



Underwriters
Laboratories

Test report No. : 30CE0169-HO-01-A-R1
Page : 1 of 22
Issued date : February 2, 2010
Revised date : February 24, 2010
FCC ID : CWTWB1U808

RADIO TEST REPORT

Test Report No. : 30CE0169-HO-01-A-R1

Applicant : Alps Electric Co., Ltd.

Type of Equipment : Passive Entry System (Hand Unit)

Model No. : TWB1U808

Test regulation : FCC Part 15 Subpart C : 2009
Section 15.231

FCC ID : CWTWB1U808

Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 30CE0169-HO-01-A. 30CE0169-HO-01-A is replaced with this report.

Date of test: January 21 to February 24, 2010

Tested by:

Katsunori Okai
EMC Services

Tomotaka Sasagawa
EMC Services

Hironobu Ohnishi
EMC Services

Approved by:

Makoto Kosaka
EMC Services

NVLAP[®]

NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE
200572-0, U.S.A. The tests reported herein have been
performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may
refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.html>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (06.08.09)

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)	8
SECTION 6: Automatically deactivate	11
SECTION 7: -20dB and 99% Occupied Bandwidth	11
APPENDIX 1: Photographs of test setup	12
Radiated emission	12
Worst case position	13
APPENDIX 2: Data of EMI test	15
Automatically deactivate.....	15
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission).....	16
-20dB and 99% Occupied Bandwidth.....	17
Duty Cycle	18
Receiver Spurious Emission	20
APPENDIX 3:Test Instruments	22

SECTION 1: Customer information

Company Name : Alps Electric Co., Ltd.
Address : 6-3-36 Nakazato, Furukawa, Osaki-city, Miyagi-pref., 989-6181 Japan
Telephone Number : +81-229-23-5111
Facsimile Number : +81-229-22-3755
Contact Person : Tomosuke Takata

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Passive Entry System (Hand Unit)
Model No. : TWB1U808
Serial No. : Refer to Clause 4.2
Rating : DC3.0V (CR2025)
Receipt Date of Sample : January 21, 2010
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab

2.2 Product Description

Passive Entry System (Hand Unit), model: TWB1U808 is carried by the owner of the vehicle.
It performs transmission through RF antenna to tuner (I-KEY unit), processes LF signal from I-KEY unit,
and performs actions according to the signal.

General Specification

Radio Type : Transceiver
Clock frequency(ies) in the system : 2MHz (CPU Clock)

Radio Specification

[Transmitter]

Frequency of Operation : 314.975MHz
Modulation : FSK
Method of Frequency Generation : SAW Resonator
Antenna type : PCB Pattern antenna

[Receiver]

Frequency of Operation : 125kHz
Antenna type : Loop Coil and Bar Antenna

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2009, final revised on December 2, 2009
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.231 Periodic operation in the band 40.66 - 40.70MHz
 and above 70MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 IC: RSS-Gen 7.2.2	N/A	N/A*1)	-
Automatically Deactivate	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.231(a)(1) IC: RSS-210 A1.1.1	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.8	FCC: Section 15.231(b) IC: RSS-210 A1.1.2	2.3dB 314.975MHz Horizontal, PK with Duty Factor	Complied	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.9	FCC: Section 15.205 Section 15.209 Section 15.231(b) IC: RSS-210 A1.1.2, 2.6, 2.7	5.4dB 1889.850MHz Horizontal, PK with Duty Factor	Complied	Radiated
-20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.231(c) IC: Reference data	N/A	Complied	Radiated
Receiver Spurious Emissions	FCC: ANSI C63.4:2003 12. Measurement of unintentional radiators other than ITE IC: RSS-Gen 4.10	FCC: Section 15.109(a) Section 15.209 IC: RSS-Gen 6(a) RSS-210 2.6	24.4dB 40.000MHz Horizontal, QP /Vertical, QP	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

*1) The test is not applicable since the EUT does not have AC Mains.

FCC 15.31 (e)

This test was performed with the New Battery (DC 3.0V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission (10m*)(±dB)			Radiated emission					
				(3m*)(±dB)				(1m*)(±dB)	
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	2.7dB	4.8dB	5.0dB	2.9dB	4.8dB	5.0dB	3.9dB	4.5dB	4.4dB
No.2	-	-	-	3.5dB	4.8dB	5.1dB	4.0dB	4.3dB	4.2dB
No.3	-	-	-	3.8dB	4.6dB	4.7dB	4.0dB	4.5dB	4.4dB
No.4	-	-	-	3.5dB	4.4dB	4.9dB	4.0dB	4.6dB	4.5dB

*10m/3m/1m = Measurement distance

Radiated emission test(3m)

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, Test instruments.

Refer to APPENDIX.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

Test Item*	Mode
Automatically Deactivate	Normal use mode
Electric Field Strength of Fundamental Emission	Transmitting mode (Tx)
Electric Field Strength of Spurious Emission	
-20dB & 99% Occupied Bandwidth	
Duty Cycle	
Receiver Spurious Emission	LF Receive mode (Rx)

* The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals



* Test data was taken under worse case conditions.

Description of EUT

No	Item	Model number	Serial number	Manufacturer	Remarks
A	Passive Entry System (Hand Unit)	TWB1U808	2010012002 *1) 2010012001 *2)	Alps Electric	EUT

*1) Used for Normal Use mode

*2) Used for Continuous transmitting mode

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The EUT was set on the center of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

[Transmitting mode]

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	Below or equal to 1GHz	Above 1GHz
Detector Type	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	120kHz	PK: S/A:RBW 1MHz, VBW:1MHz

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

With the position, the noise levels of all the frequencies was measured.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test without mechanical key was the worst case. Therefore the test without mechanical key was performed only.

*The result is rounded off to the second decimal place, so some differences might be observed.

Measurement range : 30MHz-3.2GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

[Receiving mode]

The Radiated Electric Field Strength has been measured on a semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for vertical polarization (antenna angle: 0deg., 45deg., 90deg., and 135 deg.) and horizontal polarization.

*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency : From 30MHz to 1000MHz at distance 3m

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz

The worst case in receiving mode was confirmed with and without mechanical key, as a result, no difference was seen. Therefore the test with mechanical key was performed only.

* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

[Limit at 3m]=[Limit at 300m]-40 x log (3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

*The result is rounded off to the one decimal place, so some differences might be observed.

Measurement range : 9kHz-1000MHz

Test data : APPENDIX

Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

Figure 1: Direction of the Loop Antenna

Side View (Vertical)

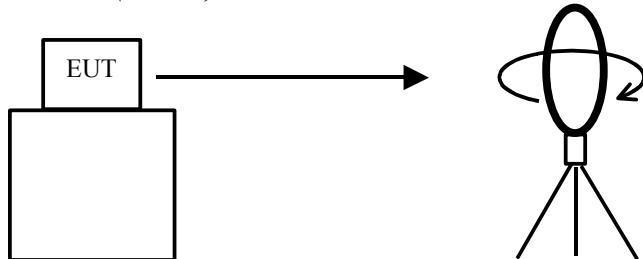


Top View (Horizontal)

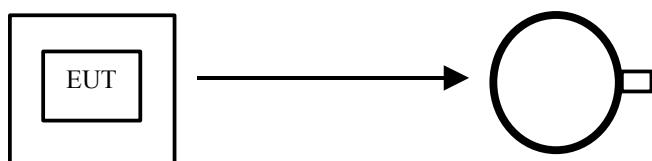

Antenna was not rotated.

Top View (Vertical)

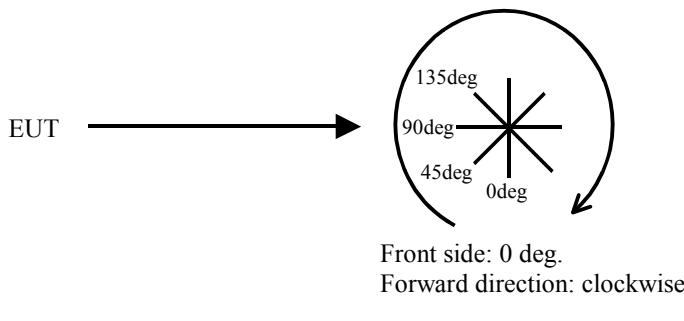

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX
Test result : Pass

SECTION 7: -20dB and 99% Occupied Bandwidth

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124