



Test report No. : 31GE0215-HO-01-A-R1
Page : 1 of 20
Issued date : January 25, 2012
Revised date : February 2, 2012
FCC ID : CWTWB1U815

RADIO TEST REPORT

Test Report No. : 31GE0215-HO-01-A-R1

Applicant : Alps Electric Co., Ltd.
Type of Equipment : Passive Entry System (Hand Unit)
Model No. : TWB1U815
Test regulation : FCC Part 15 Subpart C: 2011
FCC ID : CWTWB1U815
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This report is a revised version of 31GE0215-HO-01-A. 31GE0215-HO-01-A is replaced with this report.

Date of test: January 17 to 19, 2012

Representative test engineer:


Tomotaka Sasagawa
Engineer of WiSE Japan,
UL Verification Service

Approved by:


Shinya Watanabe
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission) 8	
SECTION 6: Automatically deactivate	11
SECTION 7: -20dB and 99% Occupied Bandwidth	11
APPENDIX 1: Data of EMI test	12
Automatically deactivate.....	12
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission).....	13
-20dB and 99% Occupied Bandwidth.....	14
Receiver Spurious Emission	15
APPENDIX 2: Test Instruments	17
APPENDIX 3: Photographs of test setup	18
Radiated emission	18
Worst case position	19

SECTION 1: Customer information

Company Name : Alps Electric Co., Ltd.
Address : 6-3-36, Nakazato, Furukawa, Osaki-city, Miyagi-pref, 989-6181, Japan
Telephone Number : +81-229-23-5111
Facsimile Number : +81-229-22-3755
Contact Person : Toru Kinoshita

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Passive Entry System (Hand Unit)
Model No. : TWB1U815
Serial No. : Refer to Section 4, Clause 4.2
Receipt Date of Sample : January 17, 2012
Country of Mass-production : Japan
Condition of EUT : Production model
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: TWB1U815 (referred to as the EUT in this report) is the Passive Entry System (Hand Unit).

Passive Entry System (Hand Unit), model: TWB1U815 is carried by the owner of the vehicle.
It performs transmission through RF antenna to tuner (I-KEY unit), processes LF signal from I-KEY unit, and performs actions according to the signal.

General Specification

Clock frequency(ies) in the system : 2MHz (CPU Clock)

Radio Specification

(Transmitter part)
Frequency of operation : 315MHz
Type of modulation : FSK
Antenna Type : PCB Pattern Antenna
Method of Frequency Generation : SAW Resonator
Operating voltage (inner) : DC 2.5-DC 3.3V (3.0V Battery)
Operating Temperature : -10 deg. C to +60 deg. C

(Receiver part)
Frequency of operation : 125kHz
Antenna Type : Loop coil and Bar Antenna
Operating voltage (inner) : DC 3.0V
Operating Temperature : -10 deg. C to +60 deg. C

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2011, final revised on November 21, 2011 and effective December 21, 2011

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators Section 15.231 Periodic operation in the band 40.66 - 40.70MHz and above 70MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.4	FCC: Section 15.207 IC: RSS-Gen 7.2.4	N/A	N/A*1)	-
Automatically Deactivate	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.231(a)(1) IC: RSS-210 A1.1.1	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.8	FCC: Section 15.231(b) IC: RSS-210 A1.1.2	3.7dB 315.000MHz Horizontal (PK, AV limit) *2)	Complied	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: RSS-Gen 4.9	FCC: Section 15.205 Section 15.209 Section 15.231(b) IC: RSS-210 A1.1.2, 2.5.1 RSS-Gen 7.2.5	6.1dB 2205.000MHz Horizontal (PK, AV limit) *2)	Complied	Radiated
-20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators IC: -	FCC: Section 15.231(c) IC: Reference data	N/A	Complied	Radiated
Receiver Spurious Emissions	FCC: ANSI C63.4:2003 12. Measurement of unintentional radiators other than ITE IC: RSS-Gen 4.10	FCC: Section 15.109(a) Section 15.209 IC: RSS-Gen 6 RSS-210 2.3	13.4dB 945.000MHz Horizontal QP	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT does not have AC Mains.

*2) The test was performed with severer PK detection for average limit.

FCC 15.31 (e)

This test was performed with the New Battery (DC 3.0V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.2dB	5.0dB	5.1dB	4.7dB	5.7dB	4.4dB	4.3dB
No.2	4.1dB	5.2dB	5.1dB	4.8dB	5.6dB	4.3dB	4.2dB
No.3	4.5dB	5.0dB	5.2dB	4.8dB	5.6dB	4.5dB	4.2dB
No.4	4.7dB	5.2dB	5.2dB	4.8dB	5.6dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Radiated emission test (3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Data of EMI, Test instruments, and Test set up.


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

Test Item*	Mode
Automatically Deactivate Duty Cycle	Normal use mode
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20dB & 99% Occupied Bandwidth	Transmitting mode (Tx)
Receiver Spurious Emission	Receiving 125kHz mode (Rx)
* The system was configured in typical fashion (as a customer would normally use it) for testing.	

4.2 Configuration and peripherals



*Setup was taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Passive Entry System (Hand Unit)	TWB1U815	12011602 *1) 12011601 *2)	ALPS ELECTRIC CO., LTD.	EUT

*1) Used for Normal use mode

*2) Used for Transmitting mode

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The EUT was set on the center of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 3.

[Transmitting mode]

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 and 4m (frequency 9kHz – 30MHz: loop antenna was fixed height at 1.0m) and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

*Refer to Figure 1 about Direction of the Loop Antenna.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz	Above 1GHz *1)
Detector Type	Peak	Peak	Peak	Peak	Peak *2)	Peak *2)
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz	PK: S/A:RBW 1MHz, VBW:3MHz

*For the test below 30MHz, the noise was not detected when it was confirmed with PK detect.

*1) The Spectrum Analyzer was used in 3dB resolution bandwidth.

*2) Average emission measurements were not calculated with PK detect and Duty cycle factor since the PK measurement value did not exceed the AV limit.

- The carrier level was measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test without mechanical key was the worst case. Therefore the test without mechanical key was performed only.

*The result is rounded off to the second decimal place, so some differences might be observed.

Measurement range : 9kHz-3.2GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

[Receiving mode]

The Radiated Electric Field Strength has been measured on a semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for vertical polarization (antenna angle: 0deg., 45deg., 90deg., and 135deg.) and horizontal polarization.

*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency : From 30MHz to 1000MHz at distance 3m

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz

The worst case in receiving mode was confirmed with and without mechanical key, as a result, no difference was seen. Therefore the test without mechanical key was performed only.

* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

[Limit at 3m]=[Limit at 300m]-40 x log (3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

*The result is rounded off to the one decimal place, so some differences might be observed.

Measurement range : 9kHz-1000MHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

Figure 1: Direction of the Loop Antenna

Side View (Vertical)

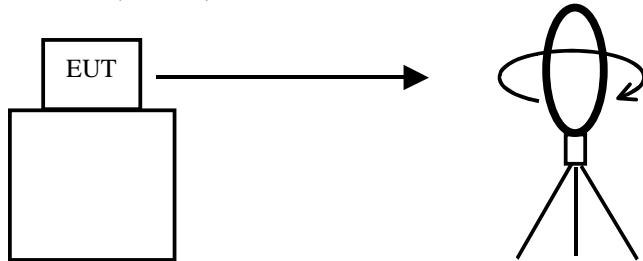


Top View (Horizontal)

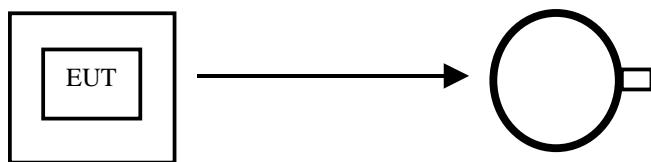

Antenna was not rotated.

Top View (Vertical)

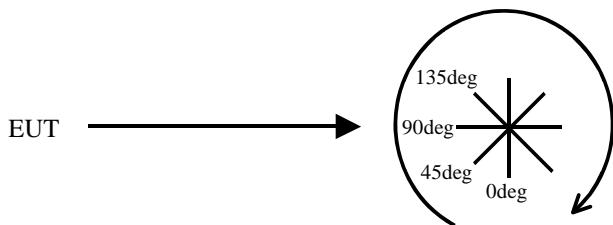

Front side: 0 deg.
Forward direction: clockwise

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX
Test result : Pass

SECTION 7: -20dB and 99% Occupied Bandwidth

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20dB Bandwidth	450kHz	10kHz	30kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth	Enough width to display 20dB Bandwidth	1 % of Span	Three times of RBW	Auto	Peak *1)	Max Hold *1)	Spectrum Analyzer

*1) The measurement was performed with Peak detector, Max Hold since the duty cycle was not 100%.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

APPENDIX 1: Data of EMI test

Automatically deactivate

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
Report No. 31GE0215-HO-01
Date 01/18/2012
Temperature/ Humidity 22 deg. C / 34% RH
Engineer Hisayoshi Sato
Mode Normal use mode

Time of Transmitting [sec]	Limit [sec]	Result
0.3296	5.00	Pass

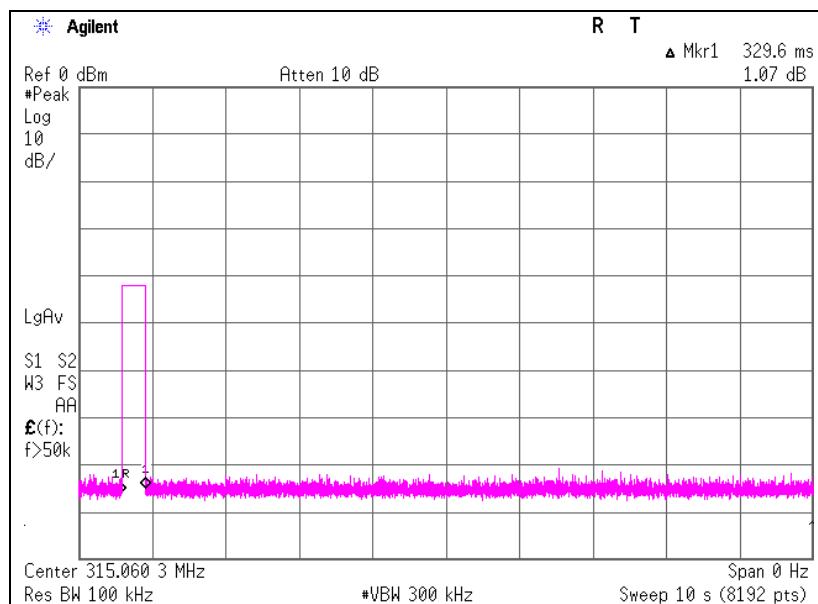

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 31GE0215-HO-01
 Date 01/18/2012
 Temperature/ Humidity 22 deg. C / 32% RH
 Engineer Hisayoshi Sato
 Mode Transmitting mode

PK limit

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver				Hor	Ver		Hor	Ver	
315.000	PK	78.9	74.9	14.9	10.1	32.0	71.9	67.9	95.6	23.7	27.7	Carrier
630.000	PK	28.5	29.0	19.7	12.0	31.9	28.3	28.8	75.6	47.3	46.8	Outside
945.000	PK	27.2	27.1	22.9	13.7	30.9	32.9	32.8	75.6	42.7	42.8	Outside
1260.000	PK	49.7	50.1	24.7	1.6	34.6	41.4	41.8	75.6	34.2	33.8	Outside
1575.000	PK	48.6	48.4	25.6	1.8	33.8	42.2	42.0	73.9	31.7	31.9	Inside
1890.000	PK	53.1	54.3	25.8	1.9	33.1	47.7	48.9	75.6	27.9	26.7	Outside
2205.000	PK	52.4	52.0	26.1	2.1	32.8	47.8	47.4	73.9	26.1	26.5	Inside
2520.000	PK	42.3	42.0	26.6	2.2	32.5	38.6	38.3	75.6	37.0	37.3	Outside
2835.000	PK	41.4	43.0	27.4	2.4	32.4	38.8	40.4	73.9	35.1	33.5	Inside
3150.000	PK	45.0	41.3	28.0	2.5	32.2	43.3	39.6	75.6	32.3	36.0	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amprifier)

AV limit

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver				Hor	Ver		Hor	Ver	
315.000	PK	78.9	74.9	14.9	10.1	32.0	71.9	67.9	75.6	3.7	7.7	Carrier
630.000	PK	28.5	29.0	19.7	12.0	31.9	28.3	28.8	55.6	27.3	26.8	Outside
945.000	PK	27.2	27.1	22.9	13.7	30.9	32.9	32.8	55.6	22.7	22.8	Outside
1260.000	PK	49.7	50.1	24.7	1.6	34.6	41.4	41.8	55.6	14.2	13.8	Outside
1575.000	PK	48.6	48.4	25.6	1.8	33.8	42.2	42.0	53.9	11.7	11.9	Inside
1890.000	PK	53.1	54.3	25.8	1.9	33.1	47.7	48.9	55.6	7.9	6.7	Outside
2205.000	PK	52.4	52.0	26.1	2.1	32.8	47.8	47.4	53.9	6.1	6.5	Inside
2520.000	PK	42.3	42.0	26.6	2.2	32.5	38.6	38.3	55.6	17.0	17.3	Outside
2835.000	PK	41.4	43.0	27.4	2.4	32.4	38.8	40.4	53.9	15.1	13.5	Inside
3150.000	PK	45.0	41.3	28.0	2.5	32.2	43.3	39.6	55.6	12.3	16.0	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter) - Gain(Amprifier) + Duty factor (Refer to Duty factor data sheet)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*Average emission measurements were not calculated with PK detect and Duty cycle factor since the PK measurement value did not exceed the AV limit.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


-20dB and 99% Occupied Bandwidth

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 31GE0215-HO-01
 Date 01/18/2012
 Temperature/ Humidity 22 deg. C / 34% RH
 Engineer Hisayoshi Sato
 Mode Transmitting mode

Bandwidth Limit : Fundamental Frequency **315 MHz x 0.25% = 787.50 kHz**

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
143.41	787.50	Pass

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
138.08	787.50	Pass

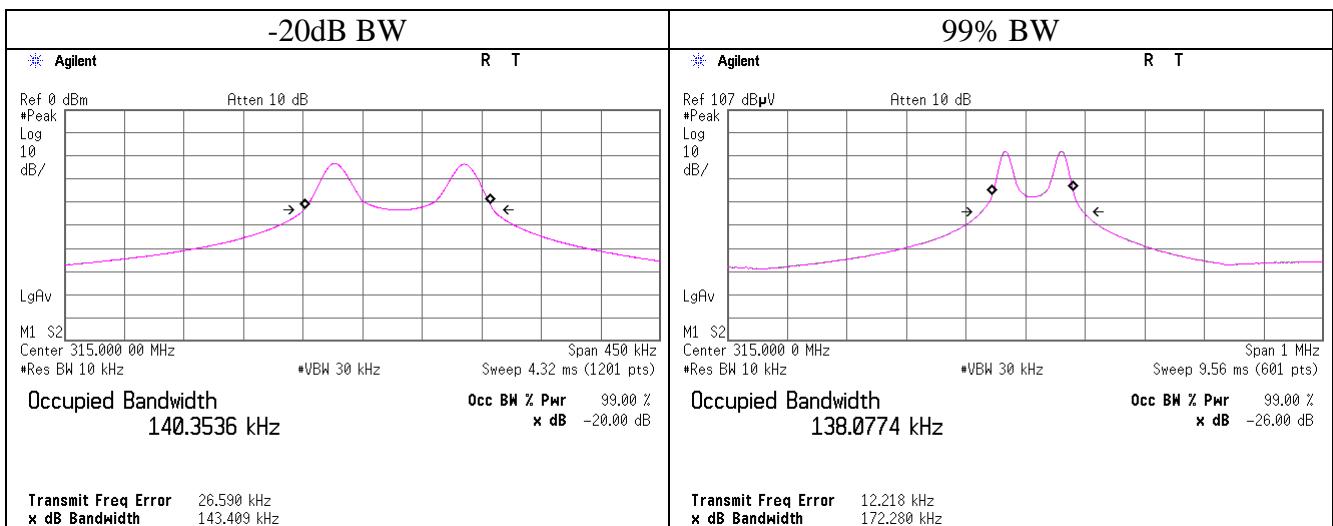

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Receiver Spurious Emission

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.3 Semi Anechoic
Date : 2012/01/17

Report No. : 31GE0215-HO-01

Temp. / Humi. : 25 deg. C / 34% RH
Engineer : Tomotaka Sasagawa

Mode / Remarks : LF Rx 125kHz

LIMIT : FCC15.209(a) 3m, 9-90kHz:PK, 110-490kHz:PK,
FCC15.209(a) 3m, 9-90kHz:AV, 110-490kHz:AV,

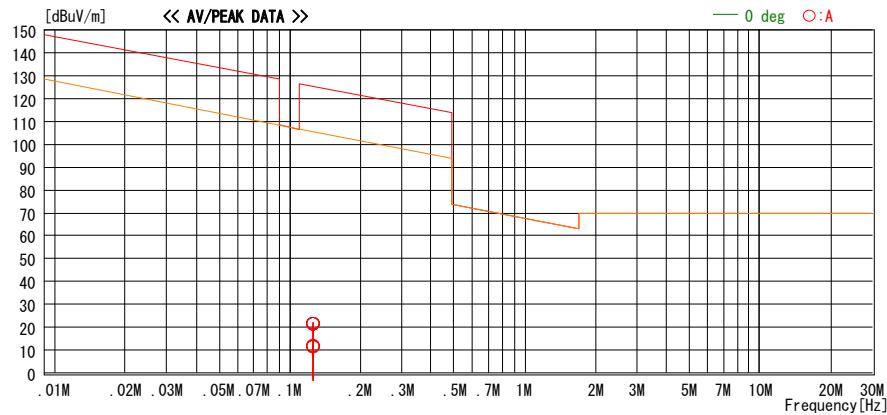

Freq. [MHz]	Reading [dBuV]	DET	Ant. Fac [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Antenna	Table [deg]	Comment
0.12500	28.1	PEAK	19.9	6.0	32.2	21.8	125.7	103.9	0	A	0
0.12500	18.1	AV	19.9	6.0	32.2	11.8	105.7	93.9	0	A	0
0.12500	27.9	PEAK	19.9	6.0	32.2	21.6	125.7	104.1	45	A	0
0.12500	17.9	AV	19.9	6.0	32.2	11.6	105.7	94.1	45	A	0
0.12500	28.2	PEAK	19.9	6.0	32.2	21.9	125.7	103.8	90	A	0
0.12500	18.1	AV	19.9	6.0	32.2	11.8	105.7	93.9	90	A	0
0.12500	27.9	PEAK	19.9	6.0	32.2	21.6	125.7	104.1	135	A	0
0.12500	18.3	AV	19.9	6.0	32.2	12.0	105.7	93.7	135	A	0
0.12500	28.0	PEAK	19.9	6.0	32.2	21.7	125.7	104.0	0	A	0
0.12500	18.4	AV	19.9	6.0	32.2	12.1	105.7	93.6	0	A	0
											LOOP-ANT:HOR

CHART: WITH FACTOR, ANT TYPE: LOOP. Except for the data below : adequate margin data below the
CALCULATION : RESULT = READING + ANT FACTOR + LOSS(CABLE + ATTEN.) -

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Receiver Spurious Emission

DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 3 Semi Anechoic Chamber
Date : 2012/01/19


Report No. : 31GE0215-HO-01

Temp. /Humi. : 22deg. C / 34% RH
Engineer : Hisayoshi Sato

Mode / Remarks : LF Receiver mode Wost axis Hor: X, Ver: Z

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

— Horizontal
— Vertical
○ Horizontal
× Vertical

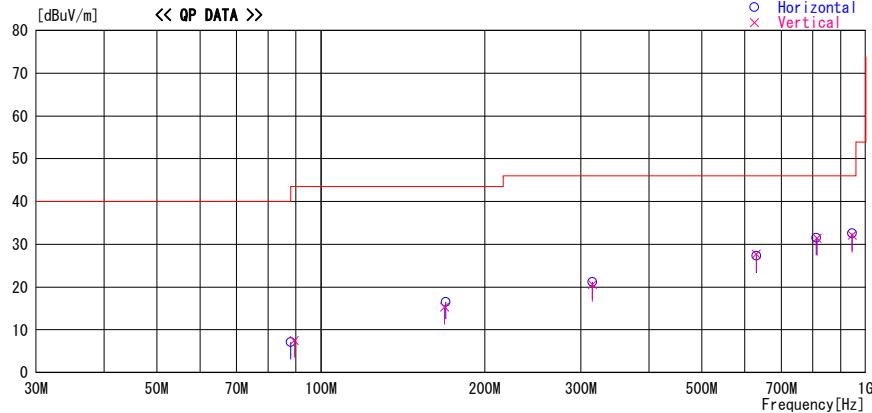

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss& Factor	Level	Angle	Height	Polar.	Limit	Margin	Comment
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]	[dBuV/m]	[dB]		
88.050	23.2	QP	8.0	-24.1	7.1	131	300	Hori.	43.5	36.4	
89.400	23.3	QP	8.3	-24.1	7.5	112	100	Vert.	43.5	36.0	
168.599	22.7	QP	15.7	-23.1	15.3	58	100	Vert.	43.5	28.2	
169.499	23.8	QP	15.8	-23.1	16.5	151	300	Hori.	43.5	27.0	
315.000	27.6	QP	14.9	-21.9	20.6	333	100	Vert.	46.0	25.4	
315.000	28.2	QP	14.9	-21.9	21.2	144	100	Hori.	46.0	24.8	
630.000	27.9	QP	19.7	-19.9	27.7	92	100	Vert.	46.0	18.3	
630.000	27.5	QP	19.7	-19.9	27.3	356	100	Hori.	46.0	18.7	
811.003	27.8	QP	22.0	-18.3	31.5	354	100	Hori.	46.0	14.5	
814.503	27.6	QP	22.1	-18.3	31.4	2	100	Vert.	46.0	14.6	
945.000	26.9	QP	22.9	-17.2	32.6	354	100	Hori.	46.0	13.4	
945.000	26.4	QP	22.9	-17.2	32.1	253	100	Vert.	46.0	13.9	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 2: Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2011/02/22 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2011/02/23 * 12
MJM-06	Measure	PROMART	SEN1955	-	RE	
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-05	Spectrum Analyzer	Advantest	R3273	160400285	RE	2011/11/23 * 12
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2011/08/11 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2011/10/15 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2011/10/15 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2011/07/15 * 12
MAT-09	Attenuator(6dB)	Weinschel Corp	2	BK7973	RE	2011/11/02 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2011/03/04 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2011/05/23 * 12
MCC-133	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336164/4(1m) / 340640(5m)	RE	2011/09/07 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2011/03/10 * 12
MLPA-01	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100017	RE	2011/10/19 * 12
MCC-112	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W(10m)/SFM141(3m)/sucoflex141-PE(1m)/421-010(1.5m)/RFM-E321(Switcher)	-/00640	RE	2011/07/15 * 12
MCC-31	Coaxial cable	UL Japan	-	-	RE	2011/07/28 * 12
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE	2011/02/15 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated emission, 99% Occupied Bandwidth, -20dB bandwidth , Automatically deactivate and Duty cycle tests

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124