

APPENDIX 2: Data of EMI test

Radiated Emission

DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2010/02/01

Report No. : 30CE0142-HO-01
Power : DC 12V

Engineer : Kazufumi Nakai

Mode / Remarks : Rx 314.975MHz, Worst-axis(Hori:X , Vert:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

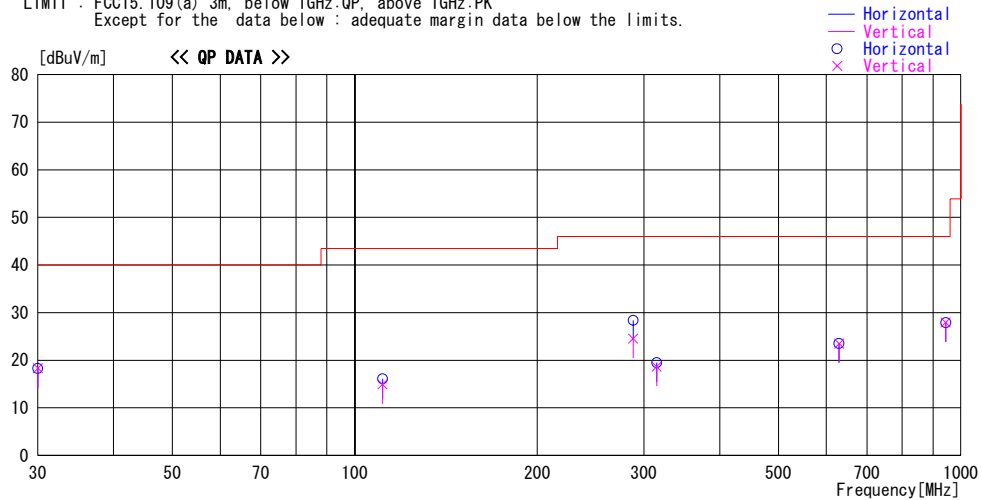


CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

Radiated Emission

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2010/02/01

Report No. : 30CE0142-HO-01
Power : DC 12V

Engineer : Kazufumi Nakai

Mode / Remarks : Rx 314.975MHz, Worst-axis(Hori:X , Vert:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

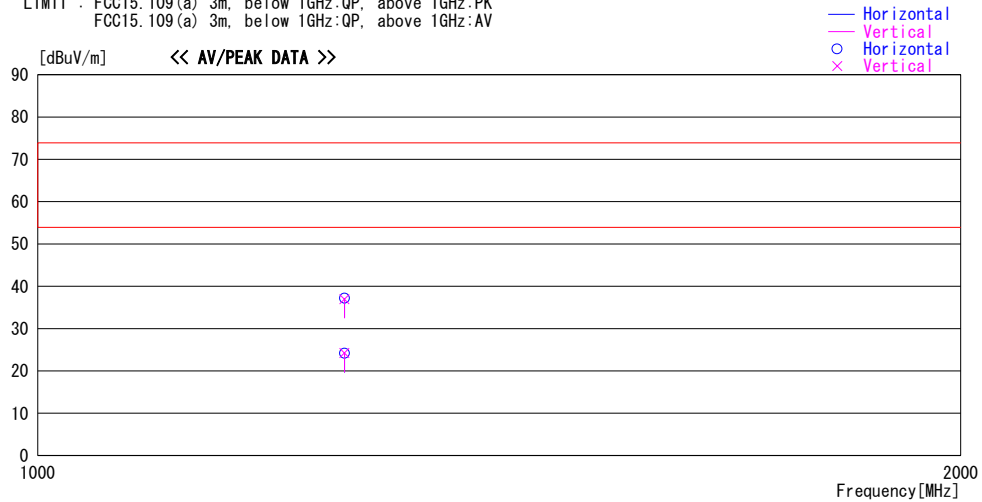

Frequency	Reading	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1258.965	43.6	PK	24.8	-31.2	37.2	0	100	Hori.	73.9	36.7	Noise Floor
1258.965	43.4	PK	24.8	-31.2	37.0	0	100	Vert.	73.9	36.9	Noise Floor
1258.965	30.6	AV	24.8	-31.2	24.2	0	100	Hori.	53.9	29.7	Noise Floor
1258.965	30.6	AV	24.8	-31.2	24.2	0	100	Vert.	53.9	29.7	Noise Floor

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

APPENDIX 3: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2009/08/17 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2009/02/05 * 12
MJM-05	Measure	PROMART	SEN1955	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2009/11/20 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2009/04/14 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	VHA91032008	RE	2009/10/05 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	201	RE	2009/10/05 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2009/02/16 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2009/11/12 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2009/09/02 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2010/01/19 * 12
MCC-47	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	295123(5m) / 287573(1m)	RE	2009/11/19 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2009/09/14 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Radiated emission

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124