



RF Exposure Evaluation Report

APPLICANT	CRESCEND TECHNOLOGIES, LLC
ADDRESS	140 E. State Parkway SCHAUMBURG IL 60173 USA
FCC ID	CWWDSDTJK50
MODEL NUMBER	DSDTJK50-O1T
PRODUCT DESCRIPTION	700/800 MHZ MOBILE PA
DATE SAMPLE RECEIVED	08/23/2019
FINAL TEST DATE	08/28/2019
PREPARED BY	Franklin Rose
TEST RESULTS	☒ PASS ☐ FAIL

Report Number	Report Version	Description	Issue Date
2233AUT19 MPETestReport	Rev1	Initial Issue	08/28/2019

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	2
GENERAL INFORMATION	3
ANTENNA INFORMATION	3
MPE CALCULATION	4
MPE TABLE	5
 GENERAL UNCONTROLLED EXPOSURE	5
 GENERAL CONTROLLED EXPOSURE	5

GENERAL REMARKS

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Prepared by:



Name and Title	Franklin Rose, Project Manager / EMC Specialist
Date	08/28/2019

GENERAL INFORMATION

EUT Description	700/800 MHZ MOBILE PA		
Model Number	DSDTJK50-O1T		
EUT Power Source	☐ 110–120Vac, 50–60Hz	☒ DC Power (13.8 VDC)	☐ Battery Operated
Test Item	☐ Engineering Prototype	☒ Pre-Production	☐ Production
Type of Equipment	☐ Fixed	☒ Mobile	☐ Portable
Antenna Connector	External, TNC Type		
Test Conditions	The temperature was 26°C Relative humidity of 50%.		
Modification to the EUT	No Modification to EUT.		
Applicable Standards	FCC CFR 47 Part 2.1091		
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070		

ANTENNA INFORMATION

Antenna is Provided	Type	Max Gain (dBi)
No	n/a	0.0

POWER OUTPUT OF EUT

Frequency	AGC Level	Input (dBm)	Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Gain (dB)	Output ERP (W)
772.0	AGC	22.45	46.86	0.00	0.00	24.4	48.53
772.0	AGC+3	25.45	47.01	0.00	0.00	21.6	50.23
772.0	Saturation	36.45	47.01	0.00	0.00	10.6	50.23
802.0	AGC	22.45	46.92	0.00	0.00	24.5	49.20
802.0	AGC+3	25.45	46.98	0.00	0.00	21.5	49.89
802.0	Saturation	36.45	46.98	0.00	0.00	10.5	49.89
815.0	AGC	22.45	46.88	0.00	0.00	24.4	48.75
815.0	AGC+3	25.45	46.93	0.00	0.00	21.5	49.32
815.0	Saturation	36.45	46.93	0.00	0.00	10.5	49.32
860.0	AGC	22.45	46.73	0.00	0.00	24.3	47.10
860.0	AGC+3	25.45	46.76	0.00	0.00	21.3	47.42
860.0	Saturation	36.45	46.76	0.00	0.00	10.3	47.42

Measured Power Output = 50.23 W

Tuning Range Maximum Power Output < 52 W.

MPE CALCULATION

The minimum separation distance is calculated as follows:


$$E(V/m) = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power density: } P_d(mW/cm^2) = \frac{E^2}{3770}$$

MPE LIMITS

Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)

Plane-wave Equivalent Power Density

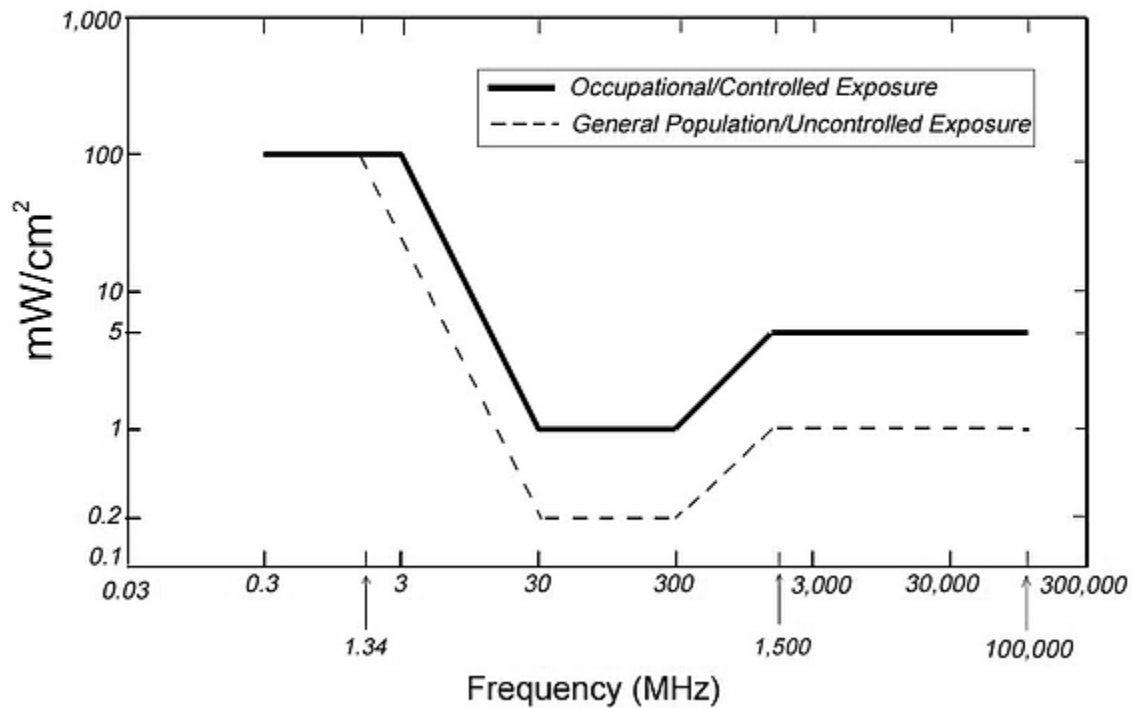


MPE Table

General Uncontrolled Exposure

The limit for General Uncontrolled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table B:

Variable	Value
Max Power	52.0 W
Frequency Range	769 - 869 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	0.51 mW/cm ²
Minimum Separation Distance	89.84 cm

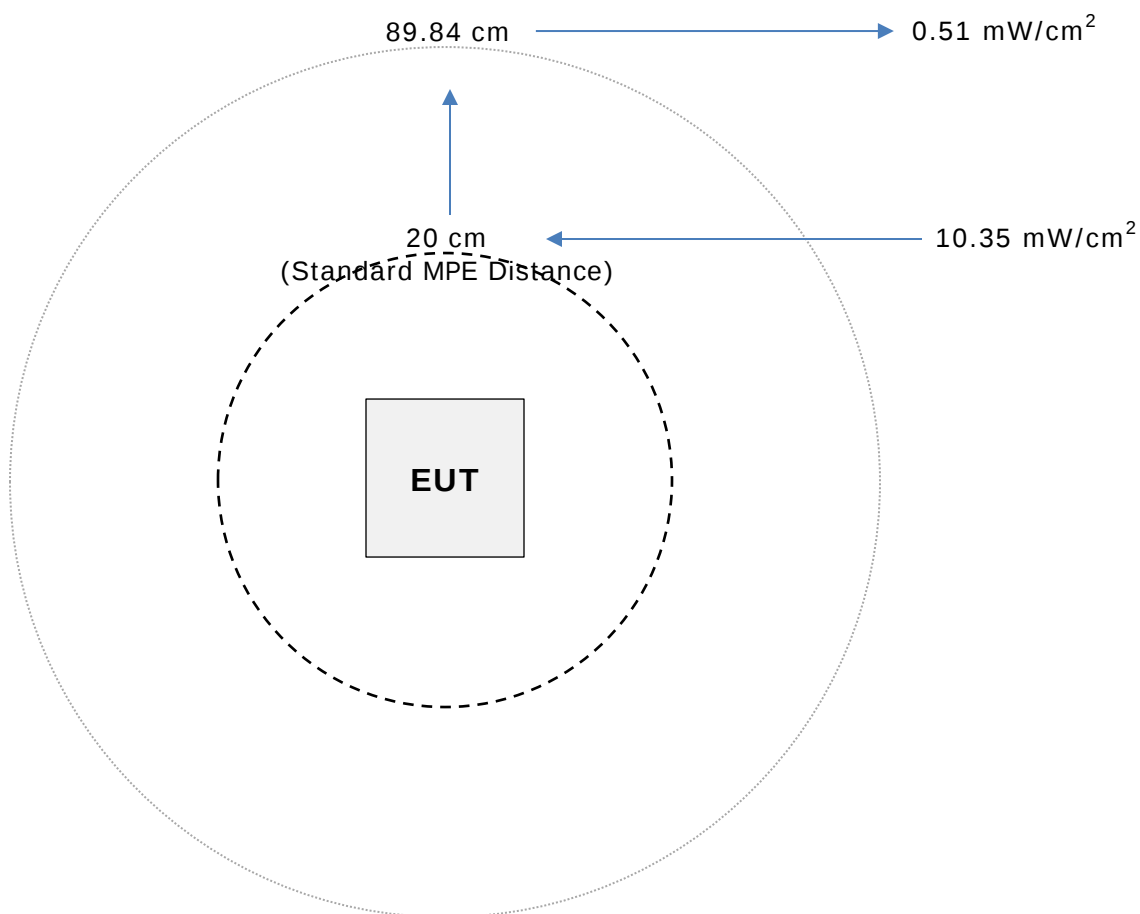

General Controlled Exposure

The limit for General Controlled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table A:

Variable	Value
Max Power	52.0 W
Frequency Range	769 - 869 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	2.56 mW/cm ²
Minimum Separation Distance	89.84 cm

