

FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment	: Household Burglar-Alarm and Fire Warning System Unit
Brand Name	: Cisco
Model No.	: DLC-100
Filing Type	: New Application
Applicant	: Tecom Co.,Ltd. No. 23 R&D Road 2, Science-Based Industrial Park, Hsin-Chu Taiwan
FCC ID	: D6XDLC100
Manufacturer	: Global Brands Manufacture (DongGuan) Ltd. Yue Yuan Industrial Estate, Huang Jiang Zhen, DongGuan City, GuangDong Province, China .
Frequency Range	: 902 ~ 928 MHz
Received Date	: Jul. 02, 2012
Final Test Date	: Aug. 13, 2012

Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1. SUMMARY OF THE TEST RESULT.....	2
2. GENERAL INFORMATION.....	3
2.1. Product Details	3
2.2. Accessories	3
2.3. Table for Filed Antenna.....	3
2.4. Table for Carrier Frequencies.....	3
2.5. Table for Test Modes	4
2.6. Table for Testing Locations	4
2.7. Table for Supporting Units	4
2.8. Test Configurations	5
3. TEST RESULT	6
3.1. AC Power Line Conducted Emissions Measurement.....	6
3.2. Field Strength of Fundamental Emissions Measurement.....	10
3.3. 20dB Spectrum Bandwidth Measurement	13
3.4. Radiated Emissions Measurement.....	19
3.5. Band Edge Emissions Measurement	35
3.6. Antenna Requirements	37
4. LIST OF MEASURING EQUIPMENTS.....	38
5. TEST LOCATION.....	40
6. TAF CERTIFICATE OF ACCREDITATION.....	41
APPENDIX A. TEST PHOTOS	A1 ~ A8
APPENDIX B. PHOTOGRAPHS OF EUT.....	B1 ~ B16

History of This Test Report

Original Issue Date: Sep. 04, 2012

Report No.: FR241856

- No additional attachment.
- Additional attachment were issued as following record:

CERTIFICATE OF COMPLIANCE

According to

47 CFR FCC Part 15 Subpart C § 15.249

Equipment : Household Burglar-Alarm and Fire Warning System Unit


Brand Name : Cisco

Model No. : DLC-100

Applicant : Tecom Co.,Ltd.

No. 23 R&D Road 2, Science-Based Industrial Park, Hsin-Chu Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 02, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

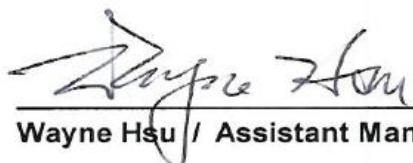

Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	12.25 dB
3.2	15.249(a)	Field Strength of Fundamental Emissions	Complies	1.40 dB
3.3	15.215(c)	20dB Spectrum Bandwidth	Complies	-
3.4	15.249(a)/(d)	Radiated Emissions	Complies	4.79 dB
3.5	15.249(d)	Band Edge Emissions	Complies	8.24 dB
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2. GENERAL INFORMATION

2.1. Product Details

Items	Description
Power Type	16.5VAC from adapter ; 12V from battery
Modulation	Z-WAVE: FSK ; LPRF : FSK
Channel Band Width (99%)	0.122 MHz
Max. Field Strength	92.60 dBuV/m at 3m (QP)

2.2. Accessories

Accessories Information				
	Brand Name	OEM	Model Name	AA-162A4G
AC Adapter	Power Rating	I/P: 120 VAC 60Hz 48W ; O/P: 16.5VAC 2.4A		
Battery	Brand Name	POWER SONIC	Model Name	PSH-1255F2-FR
	Power Rating	12V 6.0Amp.Hr	Type	LEAD-ACID

Note: Regarding to more detail and other information, please refer to user manual.

2.3. Table for Filed Antenna

Z-WAVE

Brand	Model	Antenna Type	Connector	Gain (dBi)
Galtronics	02102263-5036	PIFA	U.FL	3.2

LPRF

Brand	Model	Antenna Type	Connector	Gain (dBi)
Galtronics	SW-ATT-433ANT	Dipole	TNC	3.0

2.4. Table for Carrier Frequencies

Z-WAVE Channel Number

Frequency Band	Channel No.	Frequency
902 ~ 928 MHz	1	908.40 MHz

LPRF Channel Number

Frequency Band	Channel No.	Frequency
902 ~ 928 MHz	1	911.78 MHz
	2	913.28 MHz
	3	918.78 MHz
	4	919.78 MHz

2.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Normal Mode	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	
Radiated Emissions 9kHz~1GHz	CTX	Z-WAVE : 908.40 MHz
Radiated Emissions 1GHz~10 th Harmonic	CTX	LPRF : 911.78 MHz / 919.78 MHz
Band Edge Emissions	CTX	

Reminder:

1. CTX=continuously transmitting.
2. During the AC power line conducted emissions test, the Z-WAVE and LPRF function are at working condition.



2.6. Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

2.7. Table for Supporting Units

The EUT was tested alone.

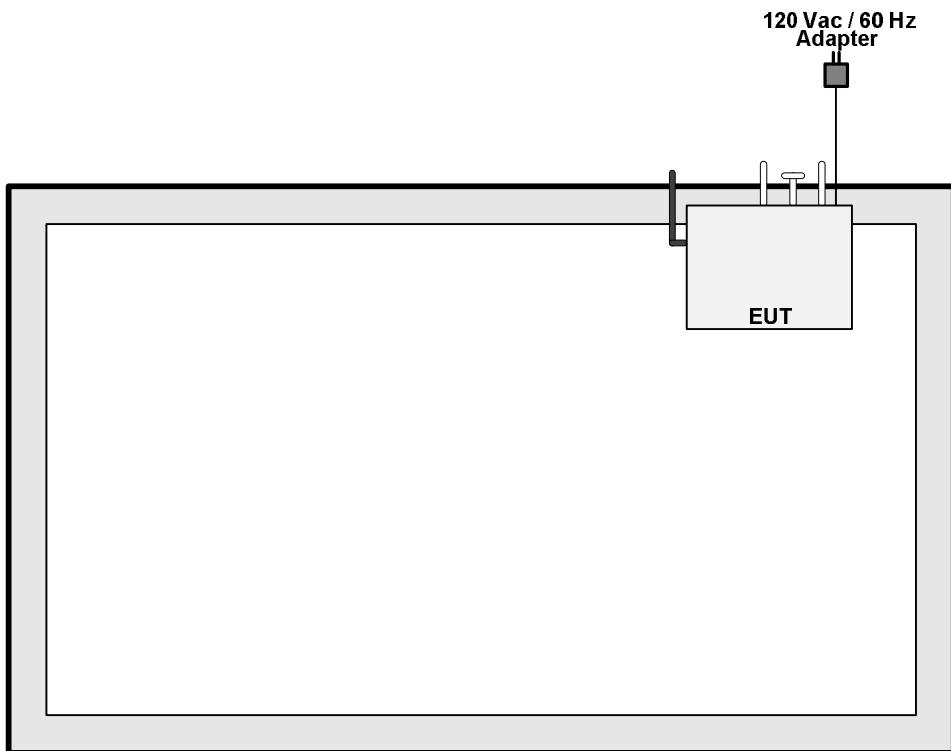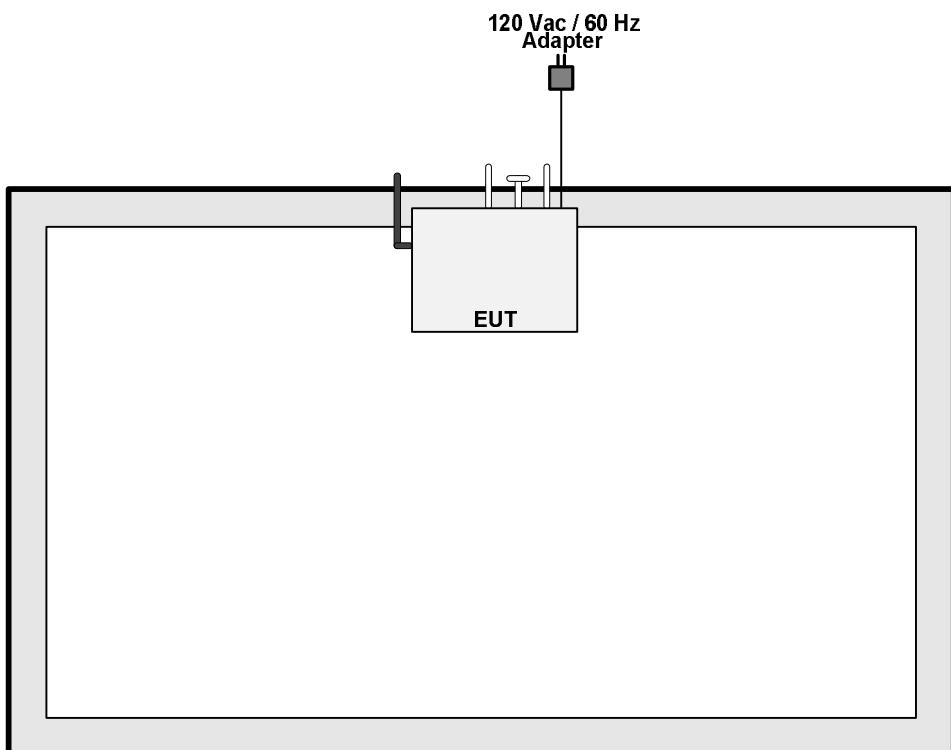2.8. Test Configurations**For conducted emissions****For radiated emissions**

3. TEST RESULT

3.1. AC Power Line Conducted Emissions Measurement

3.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.3. Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. The EUT was placed on a desk 0.8 meters height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connect to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The CISPR states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

3.1.4. Test Setup Layout

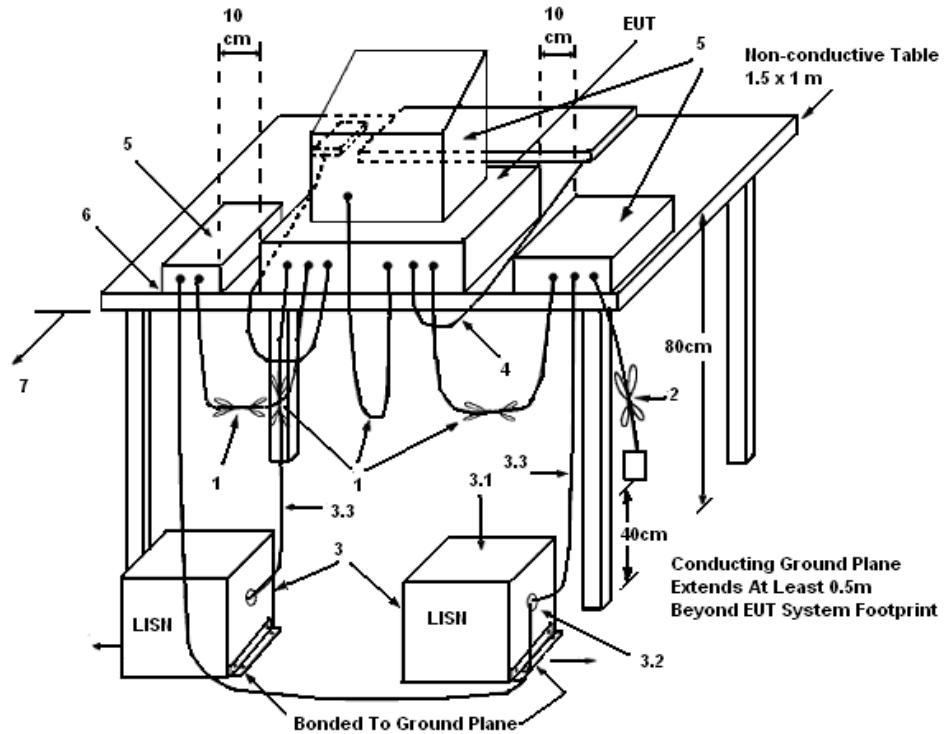

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5. Test Deviation

There is no deviation with the original standard.


3.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting mode.


3.1.7. Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Jul.10, 2012	Test Site No.	CO04-HY
Temperature	24.5°C	Humidity	49%
Test Engineer	Sam	Configuration	Normal Mode

Line

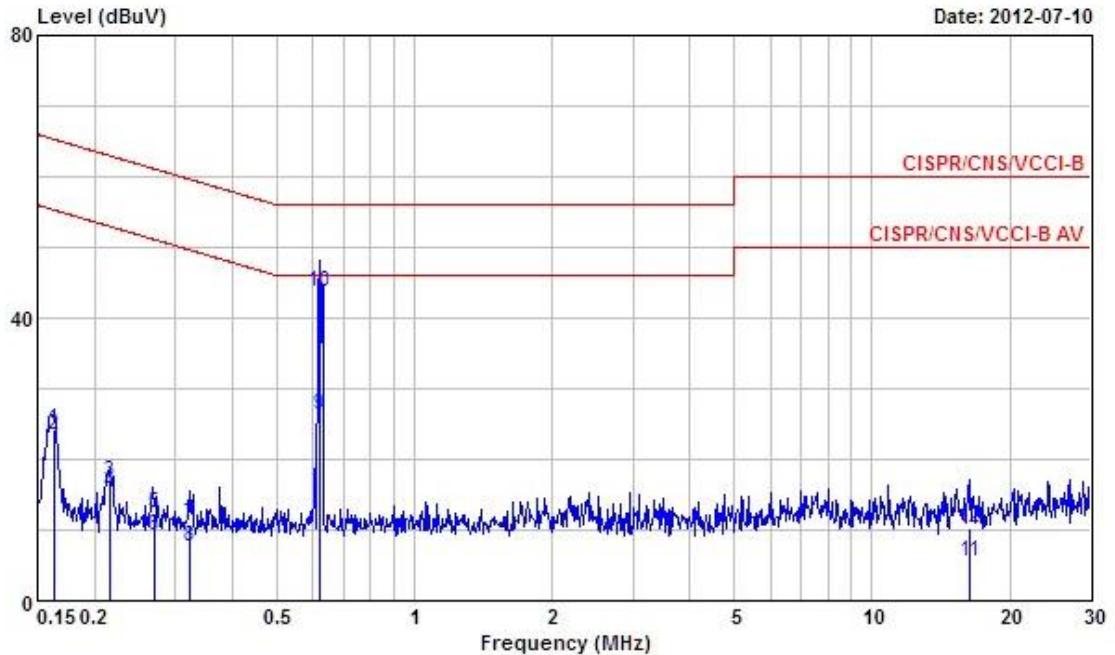

Freq	Level	Over Limit	Limit	Read Line	LISN		Cable Loss	Remark
					MHz	dBuV	dB	
1	0.1624080	24.15	-41.19	65.34	23.66	0.30	0.19	QP
2	0.1624080	23.33	-32.01	55.34	22.84	0.30	0.19	Average
3	0.2150610	16.92	-46.09	63.01	16.59	0.30	0.03	QP
4	0.2150610	15.21	-37.80	53.01	14.88	0.30	0.03	Average
5	0.2690410	12.39	-48.76	61.15	12.04	0.30	0.05	QP
6	0.2690410	9.20	-41.95	51.15	8.85	0.30	0.05	Average
7	0.3241920	10.89	-48.71	59.60	10.53	0.30	0.06	QP
8	0.3241920	7.50	-42.10	49.60	7.14	0.30	0.06	Average
9	0.6232870	26.24	-19.76	46.00	25.87	0.29	0.08	Average
10	0.6232870	43.75	-12.25	56.00	43.38	0.29	0.08	QP
11	16.400	5.65	-44.35	50.00	4.71	0.55	0.39	Average
12	16.400	10.38	-49.62	60.00	9.44	0.55	0.39	QP

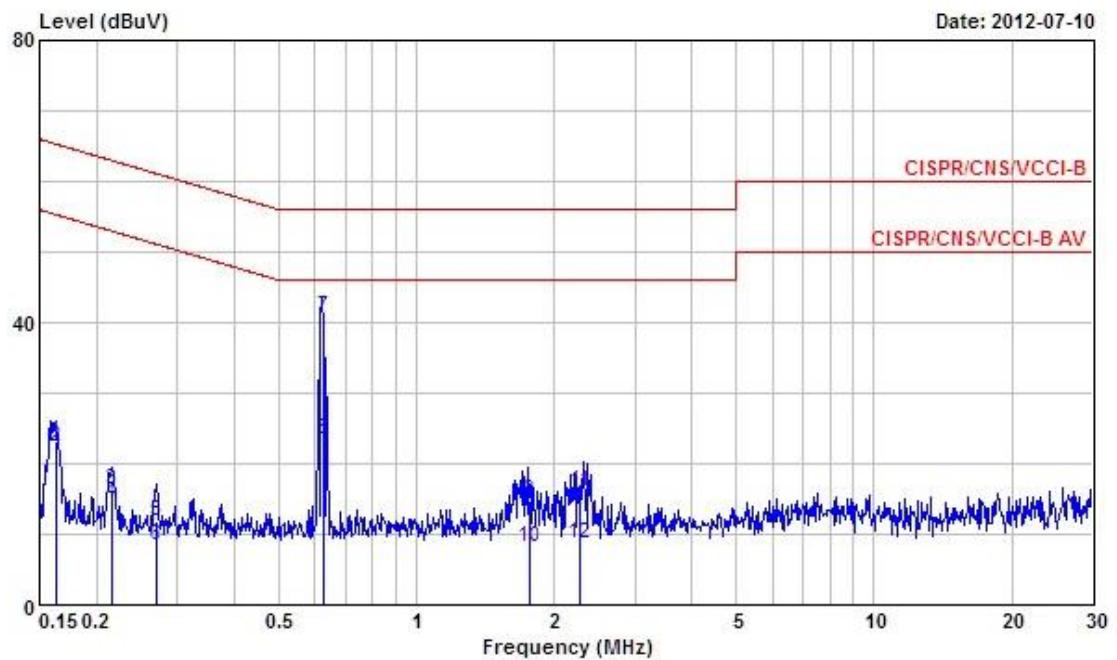Neutral

Freq	Level	Over Limit	Line	Read Level		Cable Loss	Remark
				dBuV	dBuV		
MHz							
1	0.1626620	23.11	-42.22	65.33	22.66	0.26	0.19 QP
2	0.1626620	22.27	-33.06	55.33	21.82	0.26	0.19 Average
3	0.2150610	16.19	-46.82	63.01	15.91	0.25	0.03 QP
4	0.2150610	14.46	-38.55	53.01	14.18	0.25	0.03 Average
5	0.2702580	11.90	-49.21	61.11	11.60	0.25	0.05 QP
6	0.2702580	8.54	-42.57	51.11	8.24	0.25	0.05 Average
7	0.6257870	40.78	-15.22	56.00	40.46	0.24	0.08 QP
8	0.6257870	23.51	-22.49	46.00	23.19	0.24	0.08 Average
9	1.768	14.61	-41.39	56.00	14.04	0.27	0.30 QP
10	1.768	8.26	-37.74	46.00	7.69	0.27	0.30 Average
11	2.276	16.06	-39.94	56.00	15.44	0.27	0.35 QP
12	2.276	8.78	-37.22	46.00	8.16	0.27	0.35 Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2. Field Strength of Fundamental Emissions Measurement

3.2.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94

3.2.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RB	1 MHz Peak / 1MHz Average
VB	1 MHz Peak / 10Hz Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

3.2.4. Test Setup Layout

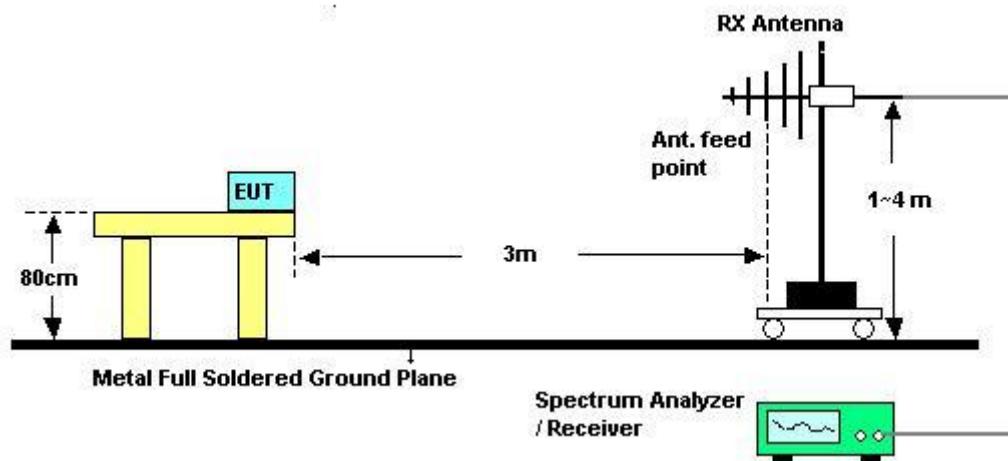

3.2.5. Test Deviation

There is no deviation with the original standard.

3.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7. Test Result of Field Strength of Fundamental Emissions

Final Test Date	Aug. 13, 2012			Test Site No.	03CH02-HY		
Temperature	19.9°C			Humidity	61%		
Test Engineer	Hsiao			Configurations	908.40 MHz / 911.78 MHz / 919.78 MHz		

908.40 MHz

Vertical

Freq	Level	Over Limit		Read		Antenna Factor	Cable Preamp		Ant Pos	Table Pos
		Line	dB	Line	dBuV		dB/m	dB		
2	908.440	90.57	-3.43	94.00	92.59	20.25	5.30	27.57	QP	---

911.78 MHz

Vertical

Freq	Level	Over Limit		Read		Antenna Factor	Cable Preamp		Ant Pos	Table Pos
		Line	dB	Line	dBuV		dB/m	dB		
2	911.800	92.60	-1.40	94.00	94.51	20.34	5.31	27.56	QP	162 165

919.78 MHz

Vertical

Freq	Level	Over Limit		Read		Antenna Factor	Cable Preamp		Ant Pos	Table Pos
		Line	dB	Line	dBuV		dB/m	dB		
2	919.780	91.14	-2.86	94.00	92.78	20.53	5.36	27.53	QP	192 182

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.3. 20dB Spectrum Bandwidth Measurement

3.3.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band.

3.3.2. Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

3.3.4. Test Setup Layout

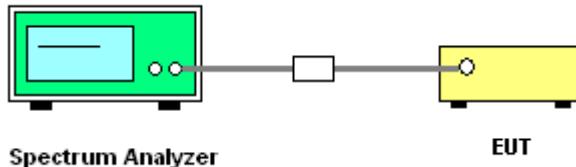

3.3.5. Test Deviation

There is no deviation with the original standard.

3.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.3.7. Test Result of 20dB Spectrum Bandwidth

Final Test Date	Jul. 11, 2012	Test Site No.	TH01-HY
Temperature	28.5°C	Humidity	69%
Test Engineer	Shiming	Configurations	908.40 MHz / 911.78 MHz / 919.78 MHz


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 902\text{MHz}$	Frequency range (MHz) $f_H < 928\text{MHz}$	Test Result
908.40 MHz	0.132	0.122	908.3313	908.4637	Complies
911.78 MHz	0.112	0.110	911.7280	-	Complies
919.78 MHz	0.112	0.110	-	919.8510	Complies

20 dB Bandwidth Plot on 908.40 MHz

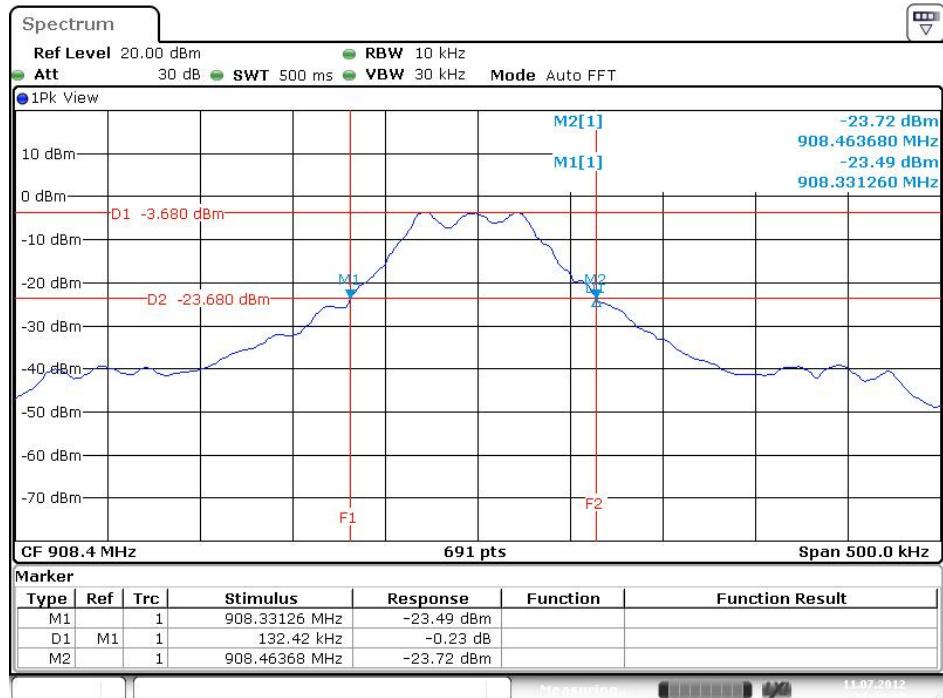


Date: 11.JUL.2012 17:39:11

20 dB Bandwidth Plot on 911.78 MHz

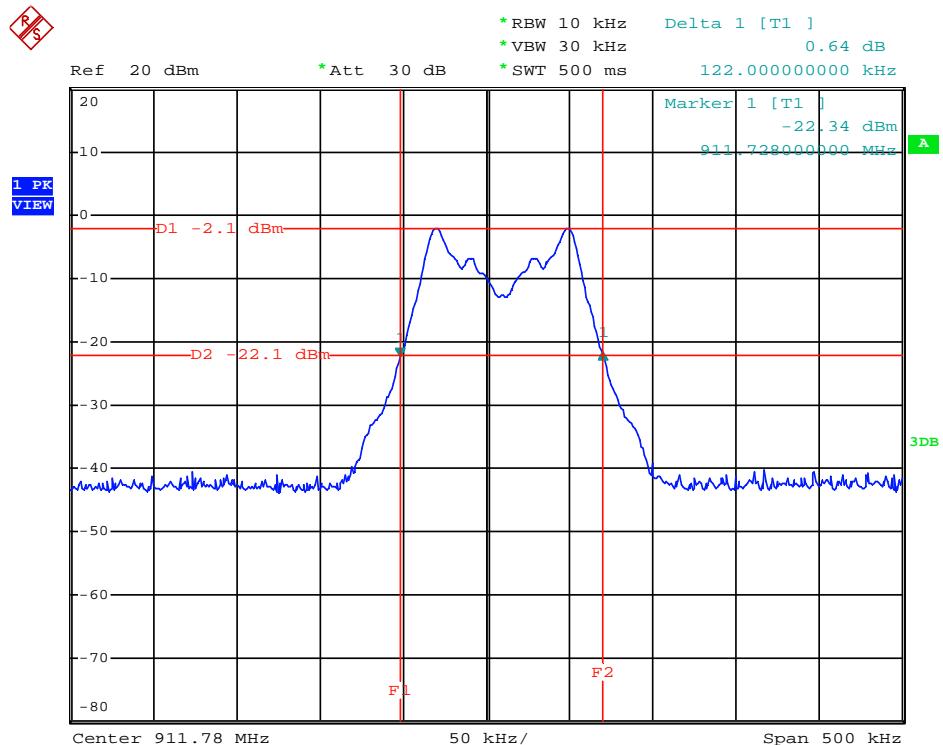


Date: 8.JUL.2012 10:11:37

20 dB Bandwidth Plot on 919.78 MHz

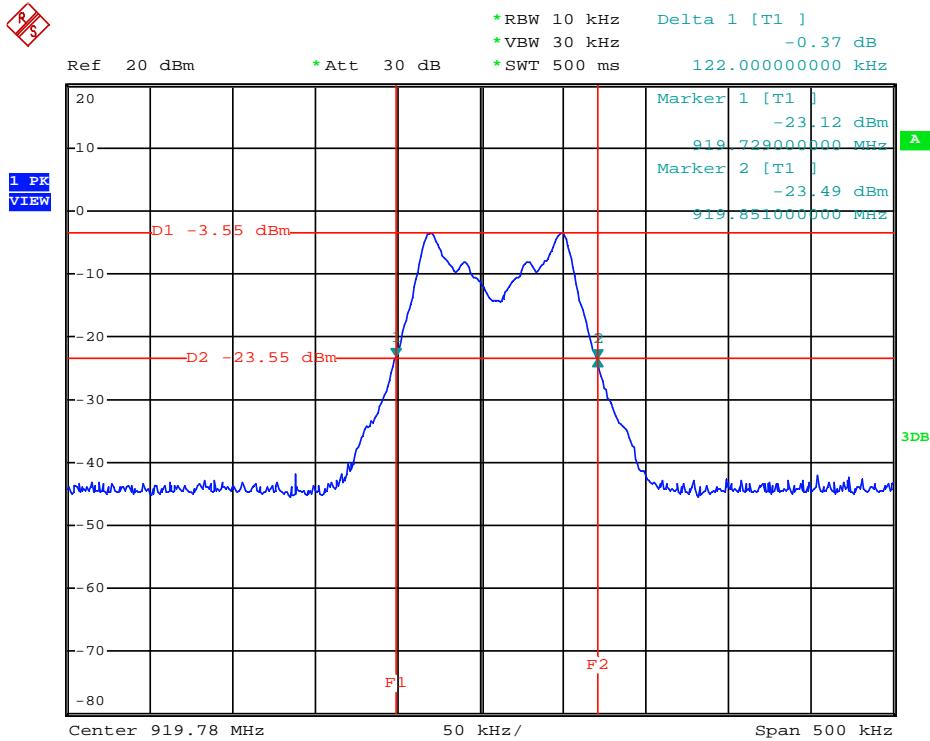


Date: 8.JUL.2012 10:20:41

99%Occupied Bandwidth Plot on 908.40 MHz

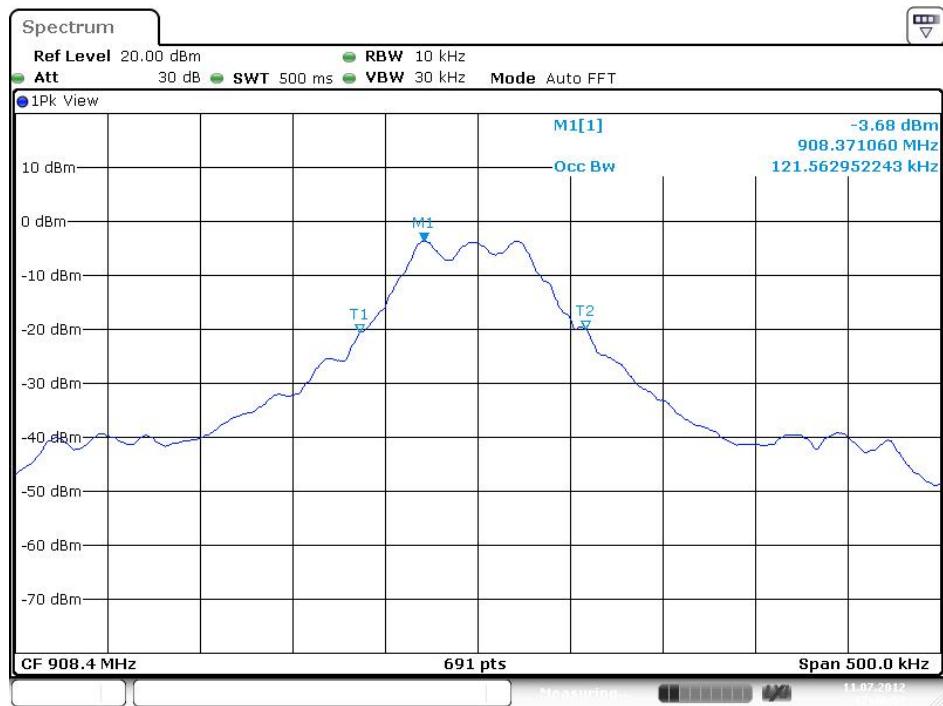


Date: 11.JUL.2012 17:40:52

99%Occupied Bandwidth Plot on 911.78 MHz

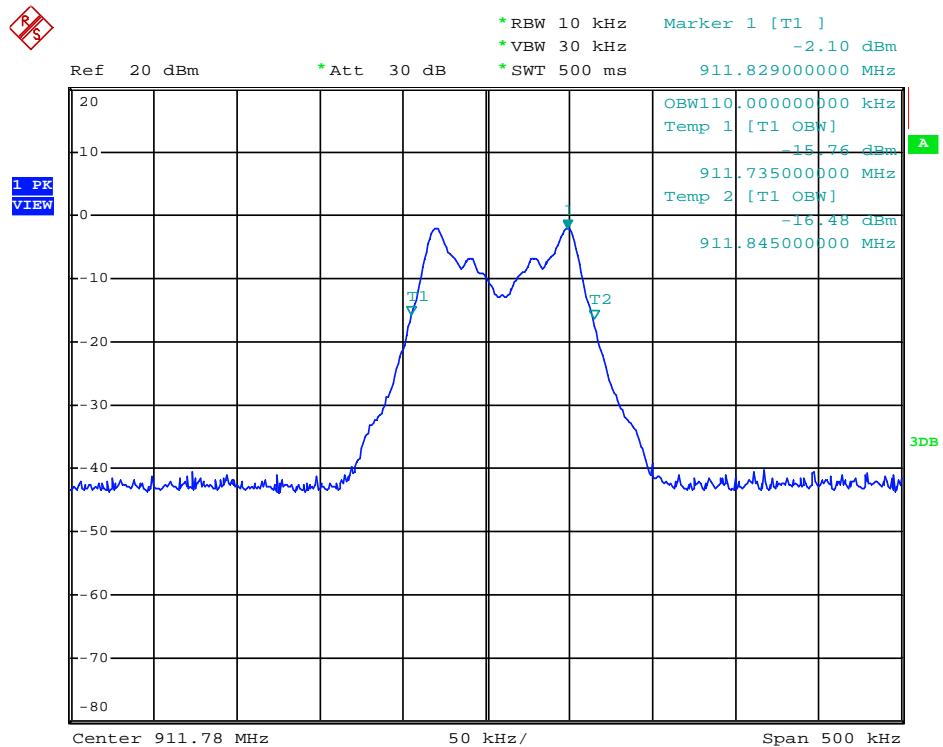

Date: 8.JUL.2012 10:11:46

99%Occupied Bandwidth Plot on 919.78 MHz

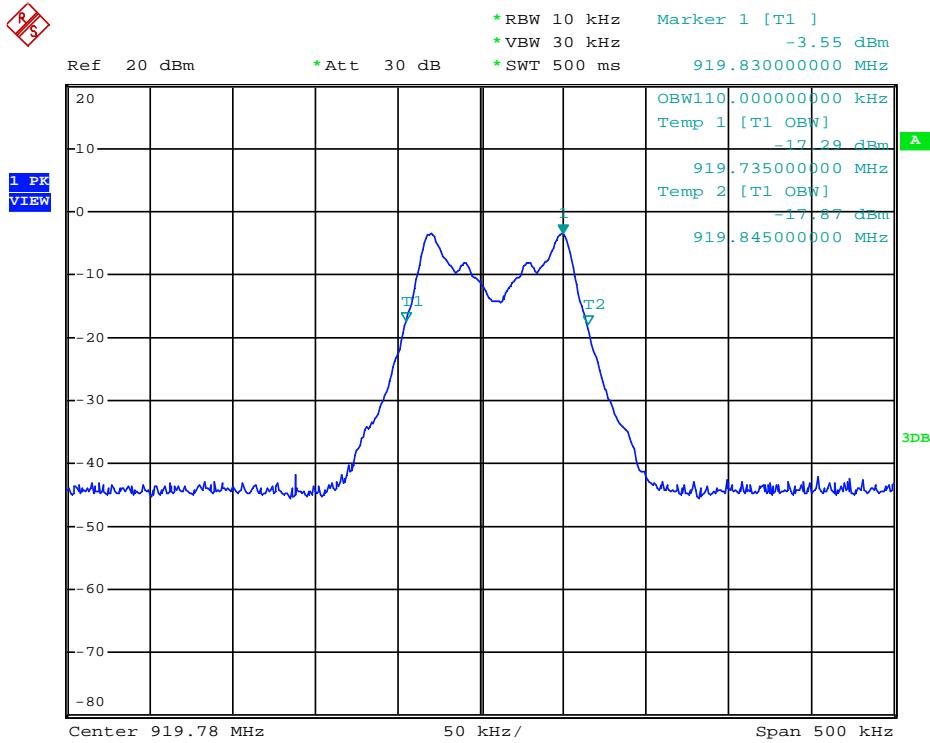

Date: 8.JUL.2012 10:22:29

3.4. Radiated Emissions Measurement

3.4.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.4.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.4.4. Test Setup Layout

For radiated emissions below 30MHz

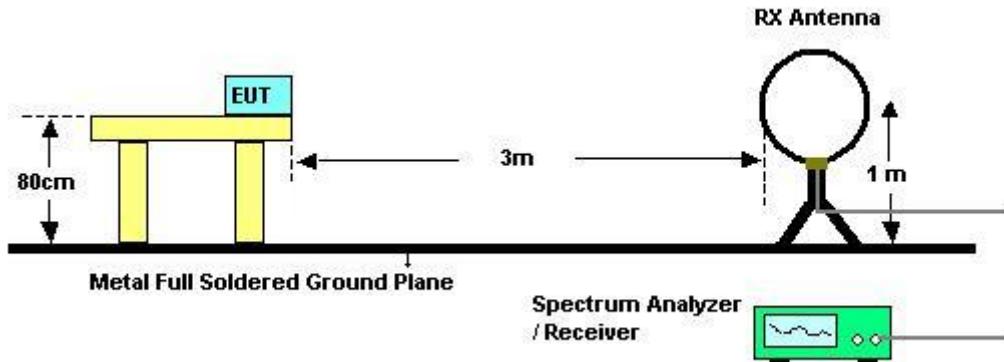

For radiated emissions above 30MHz

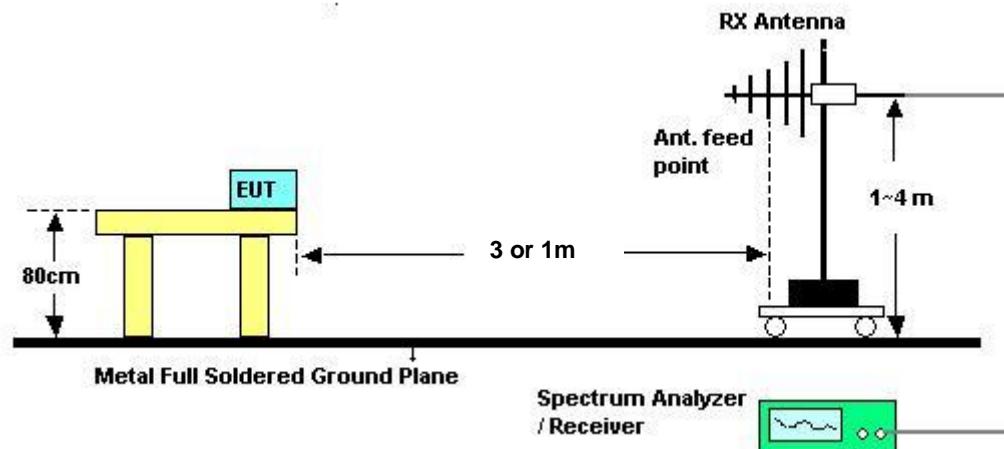

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.4.5. Test Deviation

There is no deviation with the original standard.

3.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7. Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.

3.4.8. Results of Radiated Emissions (30MHz~1GHz)

Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao	Configurations	908.40 MHz

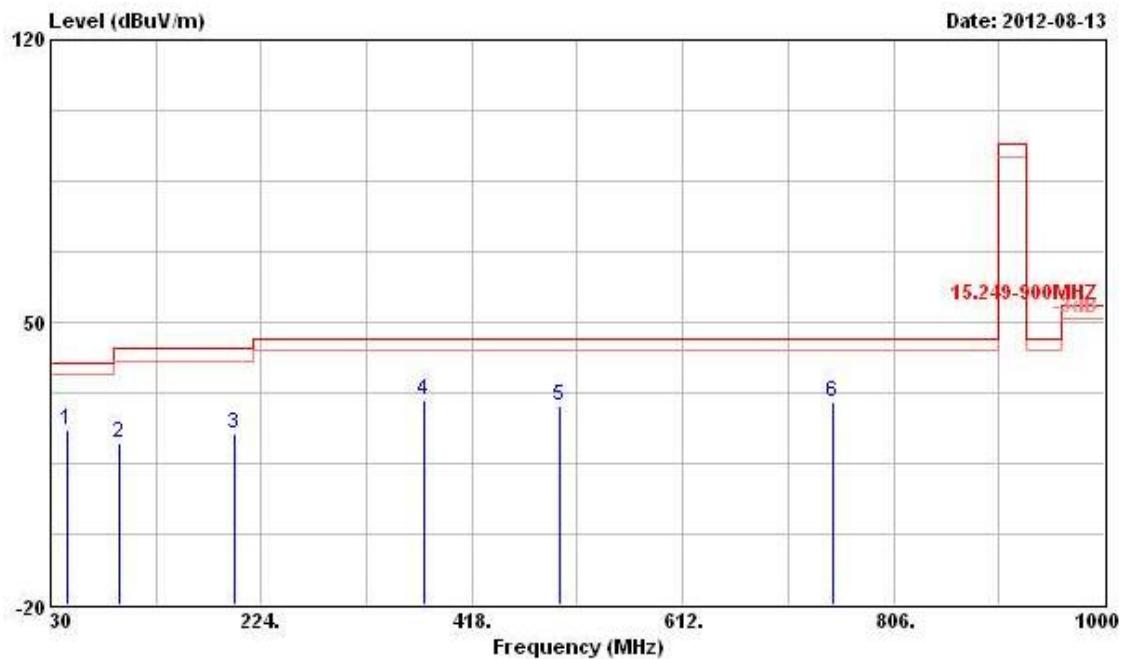Horizontal

Freq	Level	Over Limit	Line	Read		Antenna	Cable			Preamp	Remark	Ant Pos	Table Pos
				MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m			
1	44.550	23.37	-16.63	40.00	38.13	12.02	1.10	27.88	27.88	Peak		---	---
2	94.020	19.96	-23.54	43.50	36.05	10.17	1.59	27.85	27.85	Peak		---	---
3	198.780	22.58	-20.92	43.50	36.30	11.28	2.42	27.42	27.42	Peak		---	---
4	374.350	30.51	-15.49	46.00	40.05	14.86	3.29	27.69	27.69	Peak		---	---
5	498.510	29.14	-16.86	46.00	36.42	17.26	3.82	28.36	28.36	Peak		---	---
6	749.740	30.07	-15.93	46.00	33.92	19.55	4.71	28.11	28.11	Peak		---	---

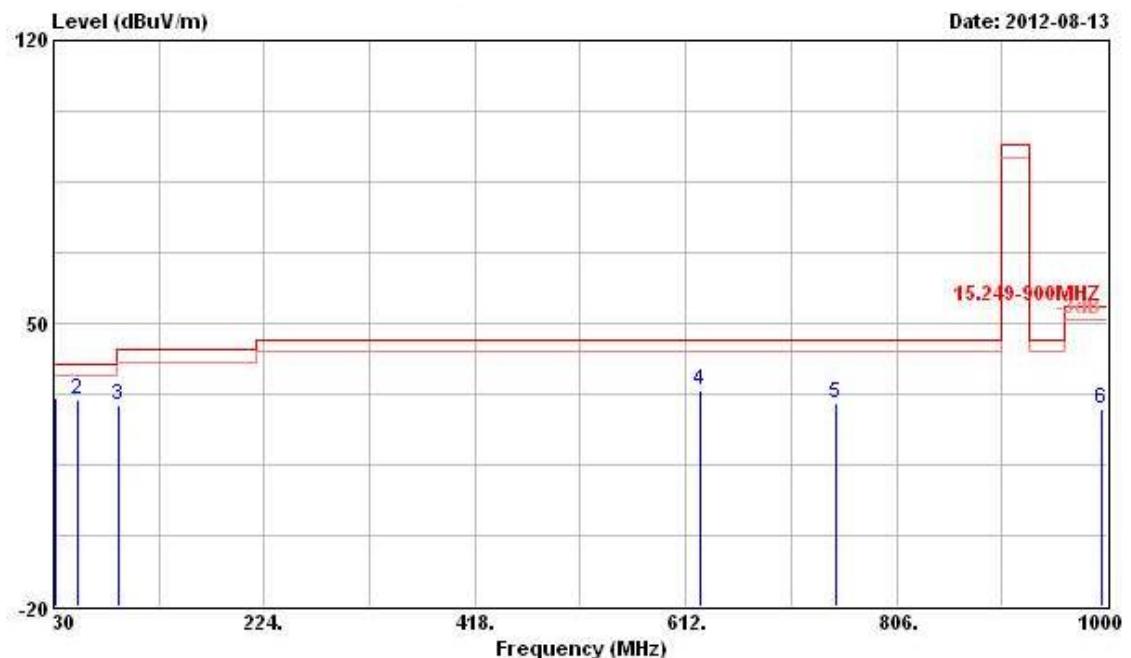Vertical

Freq	Level	Over Limit	Limit	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Level						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB		cm	deg
1 31.940	31.42	-8.58	40.00	42.96	15.48	0.92	27.94	Peak	---	---	---
2 52.310	31.24	-8.76	40.00	48.93	8.94	1.22	27.85	Peak	---	---	---
3 90.140	29.86	-13.64	43.50	46.63	9.50	1.58	27.85	Peak	---	---	---
4 625.580	33.31	-12.69	46.00	37.56	19.84	4.32	28.41	Peak	---	---	---
5 749.740	30.09	-15.91	46.00	33.94	19.55	4.71	28.11	Peak	---	---	---
6 994.180	28.73	-25.27	54.00	27.96	22.36	5.66	27.25	Peak	---	---	---

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao	Configurations	911.78 MHz

Horizontal

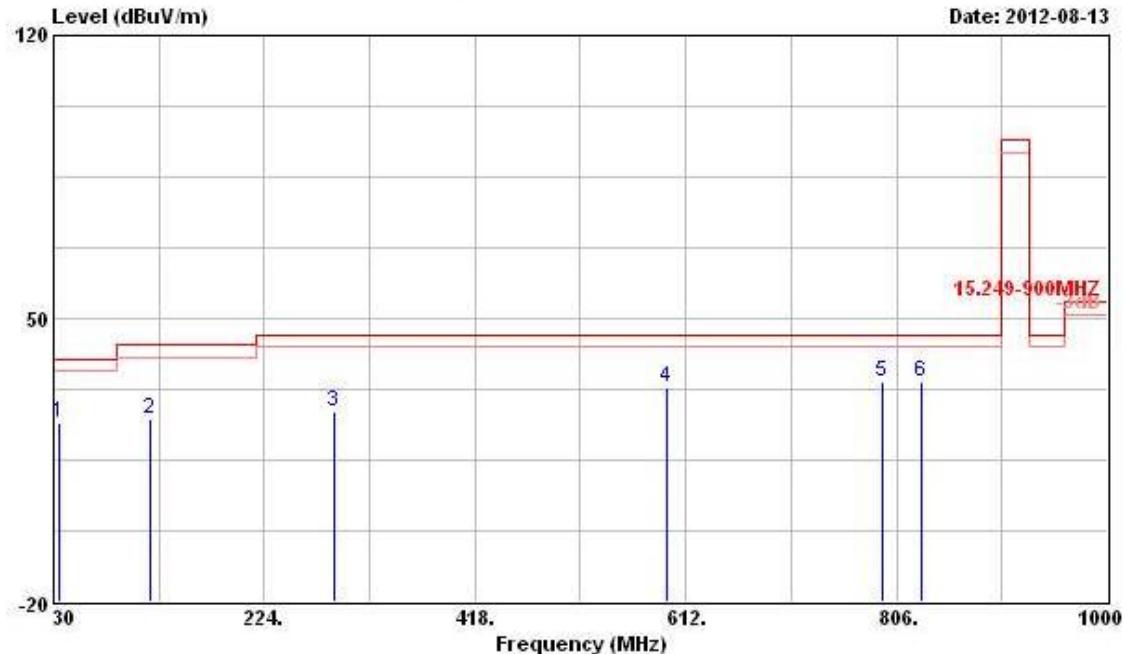

Freq	Level	Over Limit	Limit Line	Read		Ant Pos	Table Pos			
				Antenna Level	Factor					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 34.850	24.34	-15.66	40.00	36.94	14.37	0.96	27.93	Peak	---	---
2 118.270	25.20	-18.30	43.50	37.78	13.38	1.81	27.77	Peak	---	---
3 288.990	27.01	-18.99	46.00	37.73	13.55	2.92	27.19	Peak	---	---
4 594.540	33.00	-13.00	46.00	37.23	20.01	4.22	28.46	Peak	---	---
5 793.390	34.50	-11.50	46.00	37.42	20.17	4.87	27.96	Peak	---	---
6 828.310	34.37	-11.63	46.00	37.03	20.20	4.98	27.84	Peak	---	---

Vertical

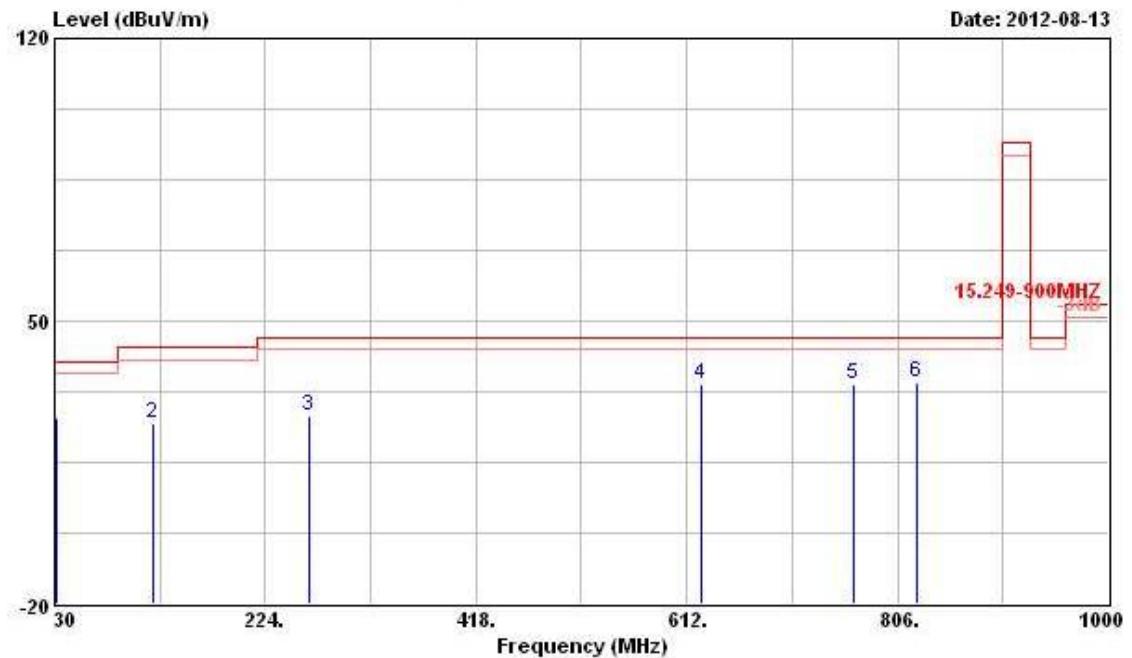

Freq	Level	Over Limit	Limit	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Level						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	
1 31.940	26.27	-13.73	40.00	37.81	15.48	0.92	27.94	Peak	---	---	
2 121.180	24.59	-18.91	43.50	37.12	13.39	1.84	27.76	Peak	---	---	
3 264.740	26.50	-19.50	46.00	37.71	13.21	2.83	27.25	Peak	---	---	
4 625.580	34.42	-11.58	46.00	38.67	19.84	4.32	28.41	Peak	---	---	
5 765.260	34.52	-11.48	46.00	38.04	19.77	4.77	28.06	Peak	---	---	
6 823.460	35.02	-10.98	46.00	37.70	20.21	4.97	27.86	Peak	---	---	

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao	Configurations	919.78 MHz

Horizontal

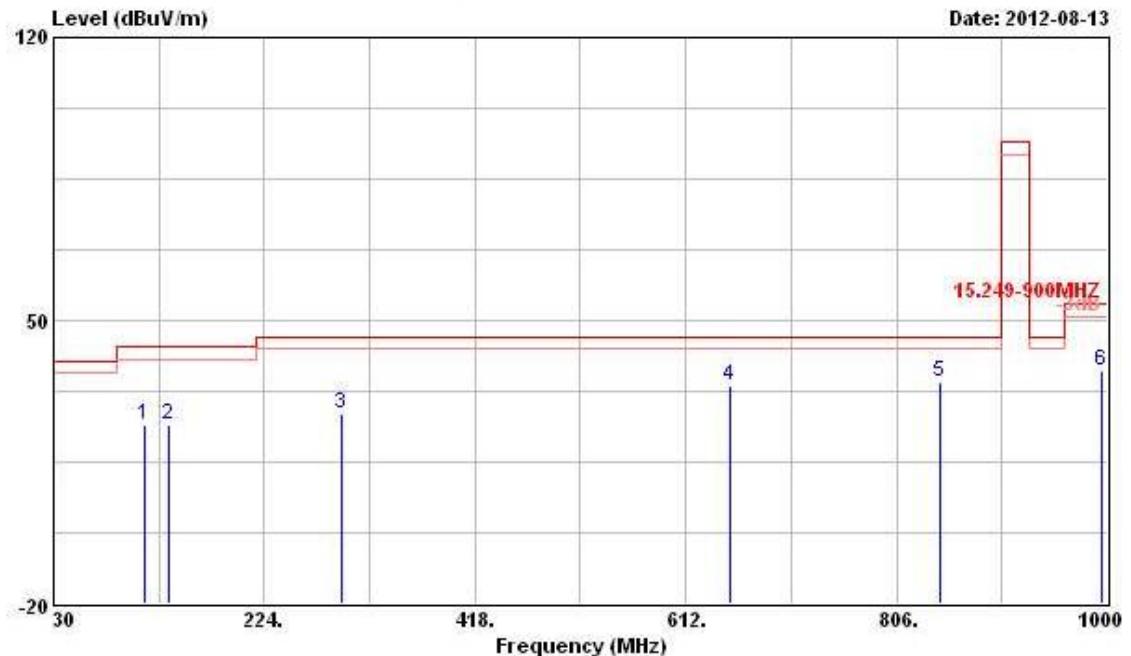

Freq	Level	Over Limit	Limit Line	Read		Ant Pos	Table Pos
				Antenna Level	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 113.420	24.30	-19.20	43.50	37.52	12.80	1.77	27.79 Peak
2 136.700	24.10	-19.40	43.50	37.56	12.26	1.97	27.69 Peak
3 295.780	26.86	-19.14	46.00	37.44	13.65	2.94	27.17 Peak
4 652.740	33.70	-12.30	46.00	38.19	19.48	4.40	28.37 Peak
5 846.740	34.91	-11.09	46.00	37.49	20.16	5.04	27.78 Peak
6 995.150	37.69	-16.31	54.00	36.89	22.38	5.66	27.24 Peak

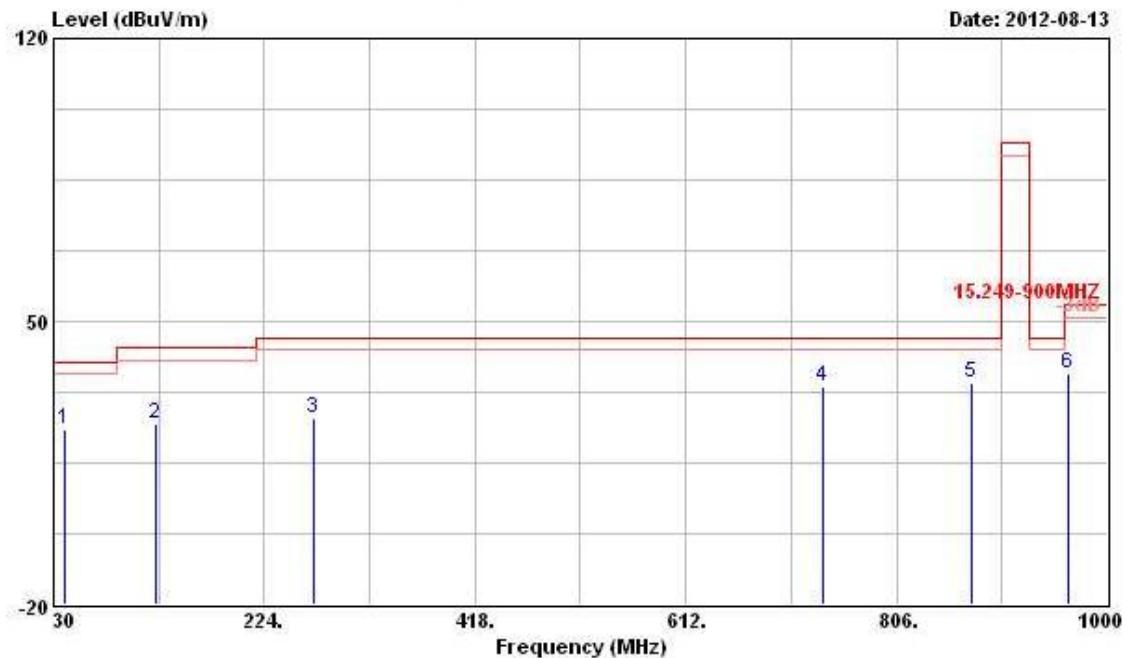

Freq	Level	Over Limit	Limit	Read	Antenna	Cable Preamp			Ant Pos	Table Pos
						Line	Factor	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m				cm	deg
1 40.670	23.17	-16.83	40.00	37.01	13.01	1.05	27.90	Peak	---	---
2 124.090	24.69	-18.81	43.50	37.35	13.23	1.86	27.75	Peak	---	---
3 269.590	26.02	-19.98	46.00	37.14	13.27	2.85	27.24	Peak	---	---
4 739.070	33.93	-12.07	46.00	38.01	19.40	4.67	28.15	Peak	---	---
5 874.870	34.87	-11.13	46.00	37.32	20.09	5.15	27.69	Peak	---	---
6 964.110	37.15	-16.85	54.00	37.33	21.61	5.57	27.36	Peak	---	---

Vertical

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.4.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao	Configurations	908.40 MHz

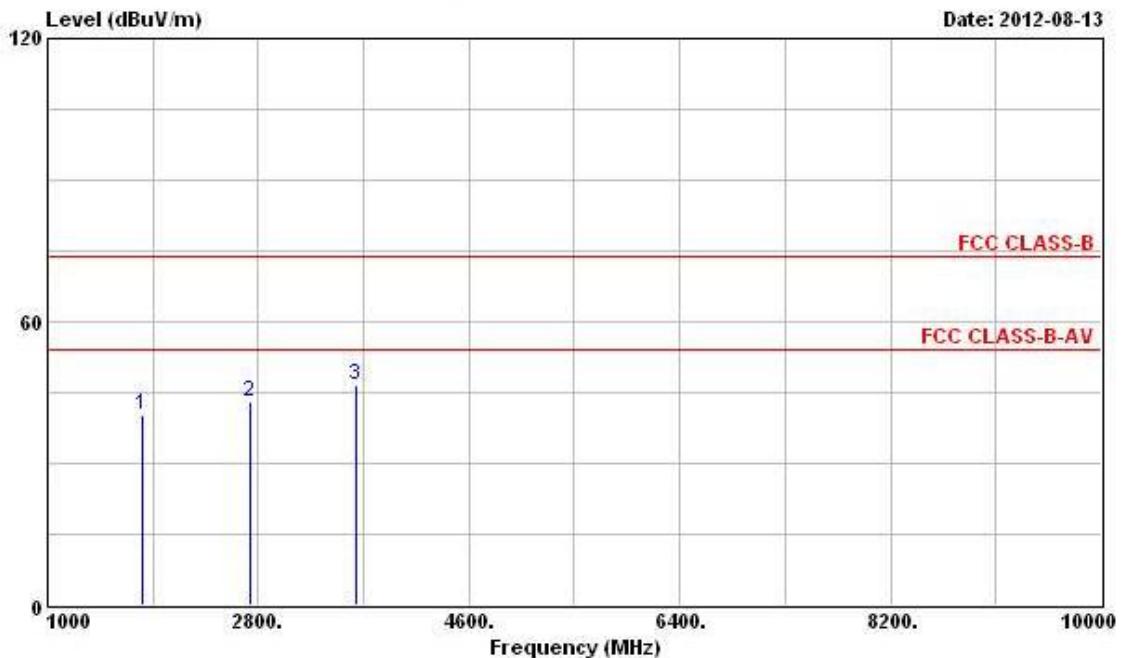Horizontal


Freq	Level	Over Limit	Limit	Read		Antenna	Cable	Preamp	Remark	Ant Pos	Table Pos
				Line	Level Factor						
MHz	dBuV/m		dB	dBuV/m		dBuV	dB/m	dB	dB	cm	deg
1 1816.800	40.40	-13.60	54.00	43.31	29.21	2.56	34.68	PK		---	---
2 2725.200	43.22	-10.78	54.00	42.14	32.72	3.24	34.88	PK		---	---
3 3633.600	46.53	-7.47	54.00	43.81	33.68	3.94	34.90	PK		---	---

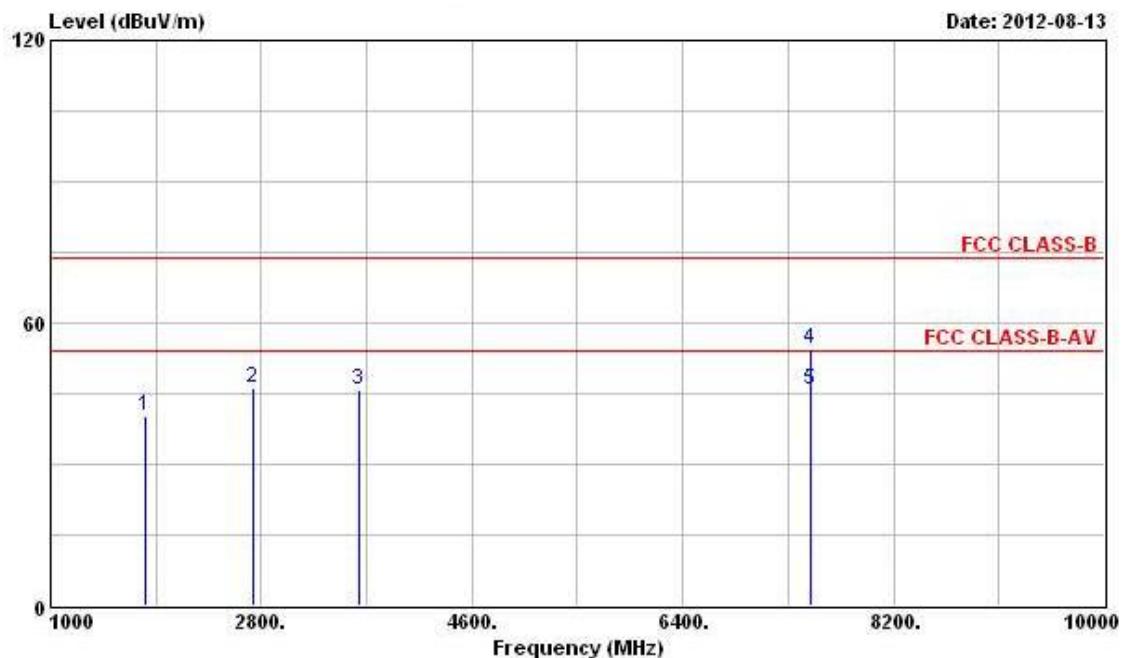Vertical


Freq	Level	Over Limit	Limit	Read		Antenna	Cable	Preamp	Remark	Table Pos	Table Pos
				Line	Factor						
	MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1816.800	40.46	-13.54	54.00	42.86	29.72	2.56	34.68	PK	---	---
2	2725.200	46.12	-7.88	54.00	45.01	32.75	3.24	34.88	PK	---	---
3	3633.600	45.76	-8.24	54.00	43.17	33.55	3.94	34.90	PK	---	---
4	7498.000	54.59	-19.41	74.00	47.08	37.00	5.66	35.15	Peak	---	---
5	7498.000	45.83	-8.17	54.00	38.32	37.00	5.66	35.15	Average	---	---

Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao	Configurations	911.78 MHz

Horizontal

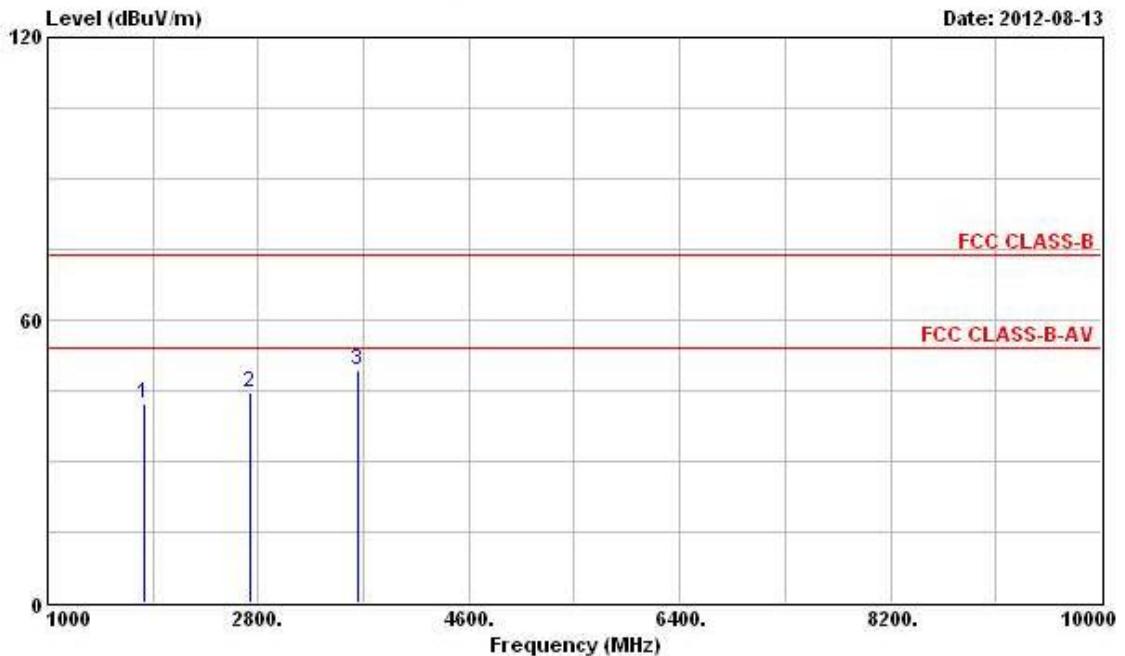


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 1823.560	42.43	-11.57	54.00	45.34	29.21	2.56	34.68 PK	---	---
2 2735.340	44.71	-9.29	54.00	43.59	32.76	3.24	34.88 PK	---	---
3 3647.120	49.21	-4.79	54.00	46.45	33.71	3.94	34.89 PK	---	---

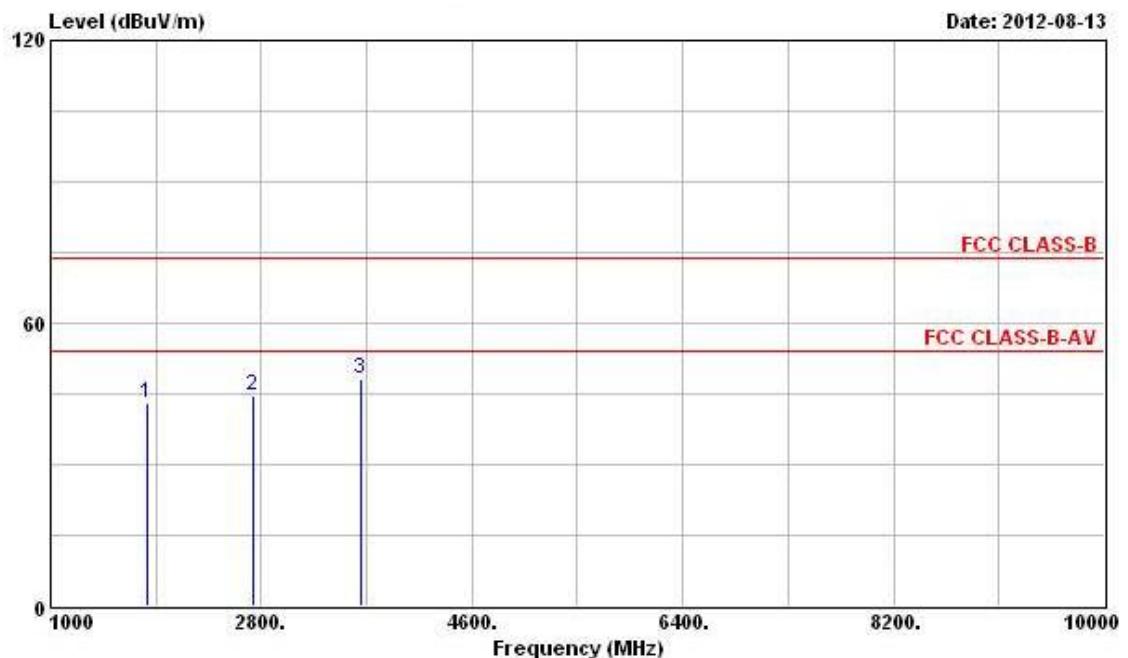
Vertical

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Cable			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 1823.560	42.86	-11.14	54.00	45.26	29.72	2.56	34.68	PK	---
2 2735.340	44.49	-9.51	54.00	43.36	32.77	3.24	34.88	PK	---
3 3647.120	48.18	-5.82	54.00	45.55	33.58	3.94	34.89	PK	---

Final Test Date	Aug. 13, 2012	Test Site No.	03CH02-HY
Temperature	19.9°C	Humidity	61%
Test Engineer	Hsiao	Configurations	919.78 MHz

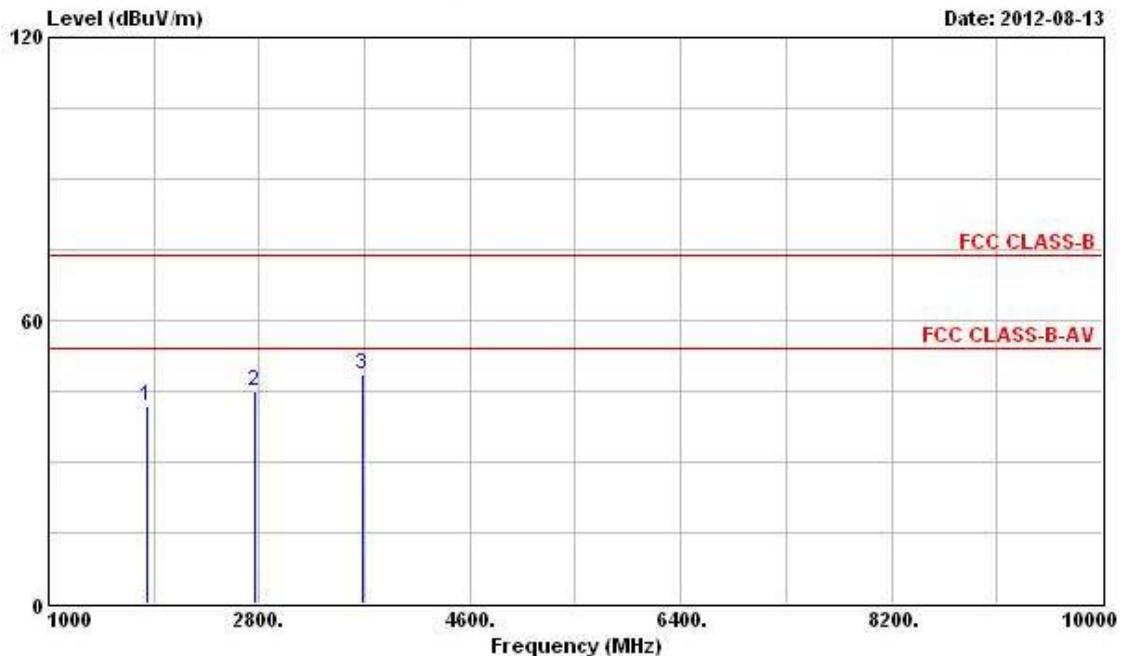Horizontal

Freq	Level	Over Limit	Limit Line	Antenna		Cable Preamp			Ant Pos	Table Pos
				Level	Factor	Loss	Factor	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 1839.560	41.78	-12.22	54.00	44.56	29.30	2.59	34.67	PK	---	---
2 2759.340	45.12	-8.88	54.00	43.94	32.80	3.26	34.88	PK	---	---
3 3679.120	48.42	-5.58	54.00	45.56	33.78	3.97	34.89	PK	---	---

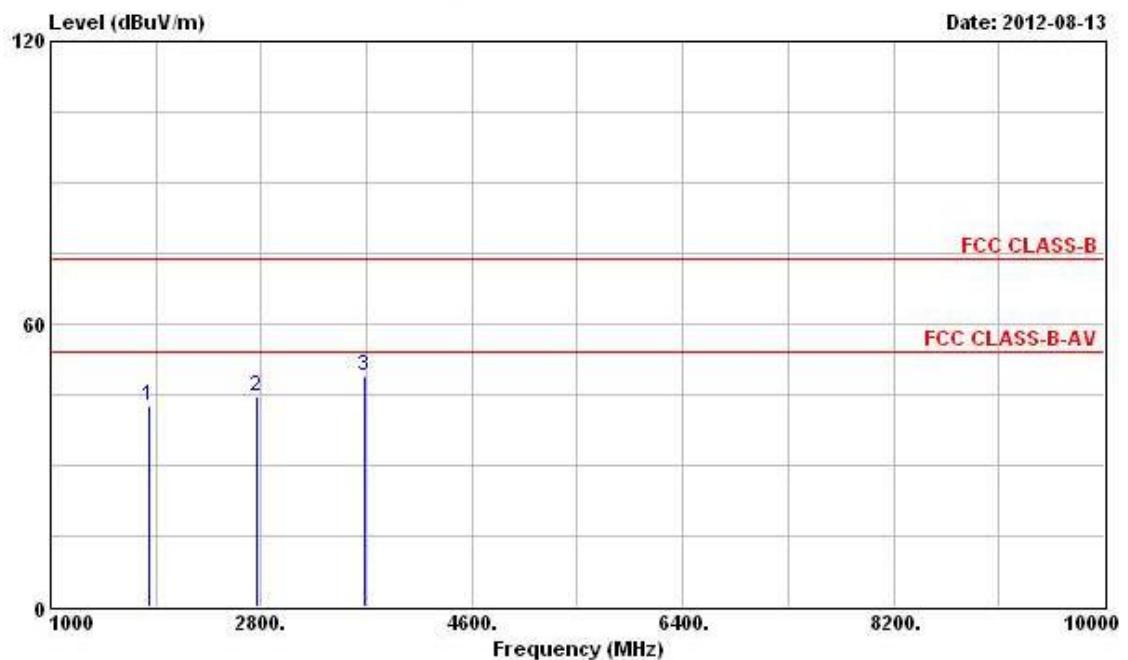Vertical

Freq	Level	Over Limit	Limit	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Level						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB		cm	deg
1 1839.560	42.65	-11.35	54.00	44.93	29.80	2.59	34.67	PK		---	---
2 2759.340	44.53	-9.47	54.00	43.35	32.80	3.26	34.88	PK		---	---
3 3679.120	48.78	-5.22	54.00	46.06	33.64	3.97	34.89	PK		---	---

3.5. Band Edge Emissions Measurement

3.5.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2. Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

3.5.3. Test Procedures

1. The test procedure is the same as section 3.4.3, only the frequency range investigated is limited to 2MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 3.4.4.

3.5.5. Test Deviation

There is no deviation with the original standard.

3.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7. Test Result of Band Edge

Final Test Date	Aug. 13, 2012			Test Site No.	03CH02-HY		
Temperature	19.9°C			Humidity	61%		
Test Engineer	Hsiao			Configurations	908.40 MHz / 911.78 MHz / 919.78 MHz		

908.40 MHz

Vertical

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Level	Factor	Loss	Factor	Pos			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	898.360	35.60	-10.40	46.00	37.93	20.03	5.24	27.60 Peak	---	---
3	936.040	36.06	-9.94	46.00	37.16	20.92	5.45	27.47 Peak	---	---

911.78 MHz

Vertical

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Level	Factor	Loss	Factor	Pos			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	901.300	36.67	-9.33	46.00	38.93	20.08	5.26	27.60 Peak	---	---
3	934.180	37.57	-8.43	46.00	38.74	20.87	5.44	27.48 Peak	---	---

919.78 MHz

Vertical

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Level	Factor	Loss	Factor	Pos			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	899.800	36.49	-9.51	46.00	38.81	20.03	5.25	27.60 Peak	---	---
3	933.640	37.76	-8.24	46.00	38.93	20.87	5.44	27.48 Peak	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6. Antenna Requirements**3.6.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.6.2. Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz ~ 2.75 GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9 kHz ~ 30 MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9 kHz ~ 30 MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: calibration interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Sep. 01, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 10, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 23, 2012	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz ~ 26.5GHz	Aug. 10, 2012	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz ~ 18GHz	Nov. 15, 2011	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Nov. 11, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1GHz ~ 40GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005
Accreditation Number : 1190
Originally Accredited : December 15, 2003
Effective Period : January 10, 2010 to January 09, 2013
Accredited Scope : Testing Field, see described in the Appendix
Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages