



Garrett Metal Detectors

Garrett Z-Lynk MS-3 Headphones

FCC 15.207:2017

FCC 15.247:2017

2400 – 2483.5 MHz DTS Transceiver

Report # GARR0032.1



NVLAP Lab Code: 201049-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



2017-1-25

Last Date of Test: August 9, 2017
Garrett Metal Detectors
Model: Garrett Z-Lynk MS-3 Headphones

Radio Equipment Testing

Standards

Specification	Method
FCC 15.207:2017	
FCC 15.247:2017	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	Yes	Pass	
6.5, 6.6, 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
7.8.2	Carrier Frequency Separation	No	N/A	Not required for DTS devices.
7.8.3	Number of Hopping Frequencies	No	N/A	Not required for DTS devices.
7.8.4	Dwell Time	No	N/A	Not required for DTS devices.
7.8.6	Band Edge Compliance - Hopping Mode	No	N/A	Not required for DTS devices.
11.6	Duty Cycle	Yes	N/A	Characterization of radio operation.
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

A handwritten signature in black ink, appearing to read "Jeremiah Darden".

Jeremiah Darden, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<u>Test</u>	<u>+ MU</u>	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	4.9 dB	-4.9 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES




California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

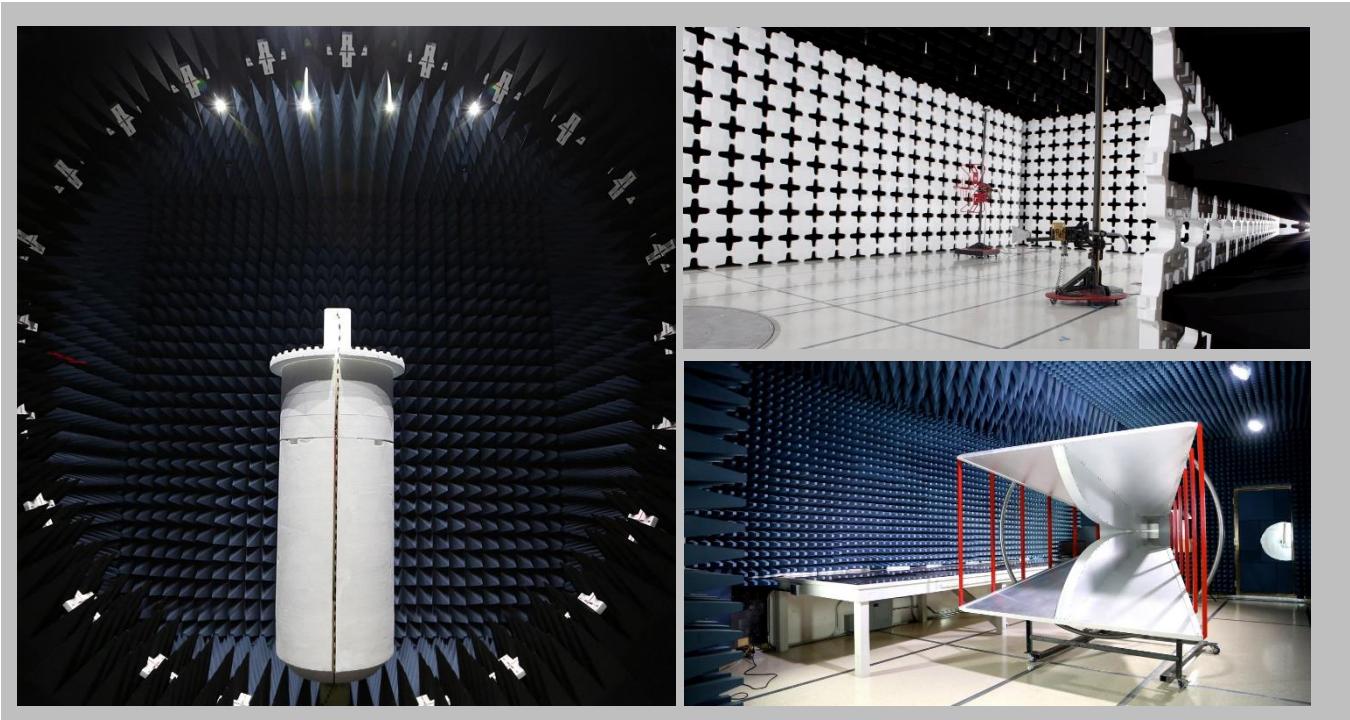


Test Setup Block Diagrams


Antenna Port Conducted Measurements

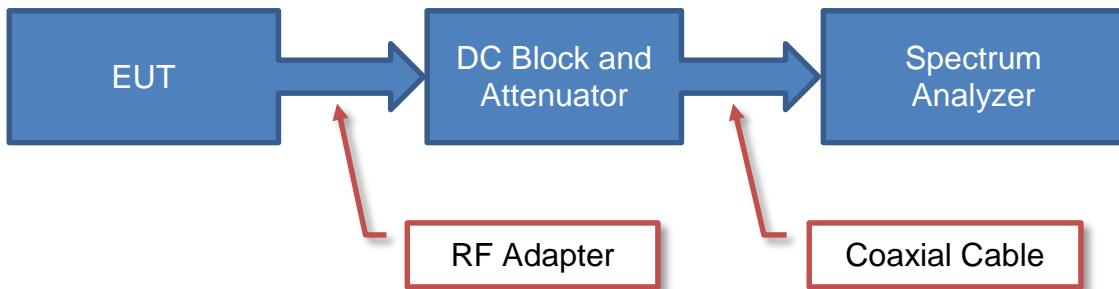

Near Field Test Fixture Measurements

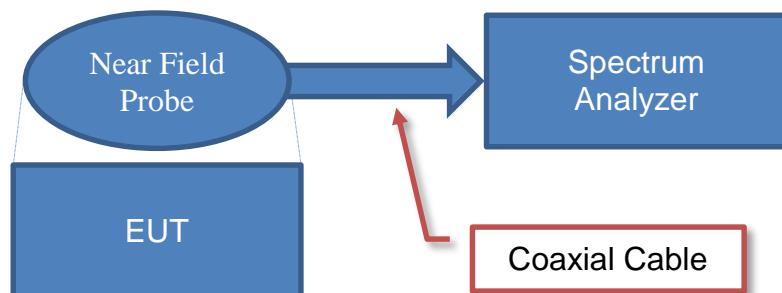

Spurious Radiated Emissions

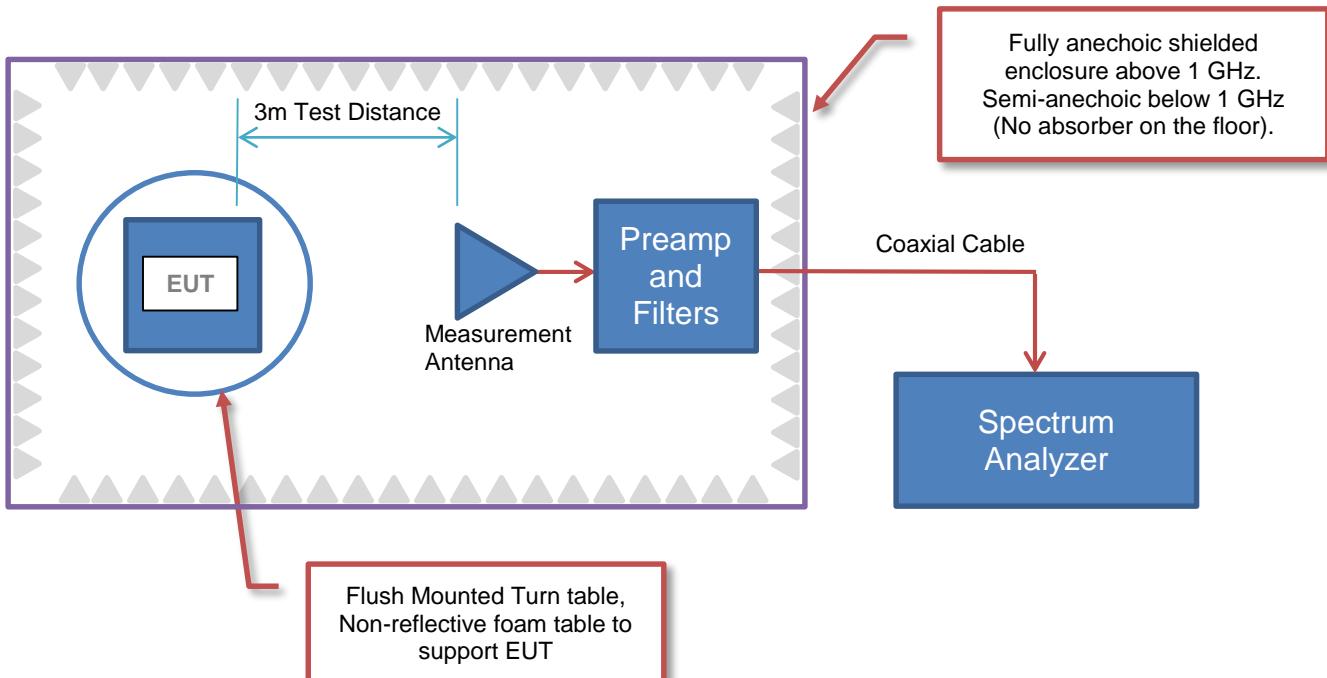



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Garrett Metal Detectors
Address:	1881 W. State Street
City, State, Zip:	Garland, TX 75042
Test Requested By:	Weldon Sanders
Model:	Garrett Z-Lynk MS-3 Headphones
First Date of Test:	July 20, 2017
Last Date of Test:	August 9, 2017
Receipt Date of Samples:	July 19, 2017
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Wireless Headphones pack using 2.4 GHz Wideband Radio that allows a user to connect their own headphones to a Garrett Z-Lynk WT-1 wireless module or a Garrett metal detector with Z-Lynk. It is using the same radio under FCC ID: DBDZLYNKWR1000 / IC: 20318-ZLYNKWR1000, but the PCB has been modified (board shape is different, slight changes in component locations, longer antenna feed line to the same original Inverted F PCB antenna) and the enclosure is different. The software has not changed and the same basic functionality and intended usage has not changed.

Testing Objective:

To demonstrate compliance of the DTS radio under FCC 15.247 for operation in the 2400 - 2483.5 MHz Band

CONFIGURATIONS



Configuration GARR0032- 1

Software/Firmware Running during test	
Description	Version
PurePath Wireless Commander	1.0.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Headphone Board (Direct Connect)	Garrett Metal Detectors	Garrett Z-Lynk MS-3	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop Computer	Acer	ZG5	LUS360B171909157F02547
AC/DC Power Supply (Laptop)	Delta Electronics, Inc.	ADP-30JH B	202W91502BN
Mouse	Microsoft	MSK-1113B	X821908-014
CC Debugger	Texas Instruments	6380	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.6m	No	AC Mains	AC/DC Power Supply (Laptop)
DC Cable	No	1.7m	No	AC/DC Power Supply (Laptop)	Laptop Computer
USB Cable	Yes	0.5m	No	CC Debugger	Laptop Computer
Ribbon Cable	No	0.2m	No	CC Debugger	Headphone Board (Direct Connect)
USB Cable	Yes	1.6m	Yes	Mouse	Laptop Computer

CONFIGURATIONS



2017-1-25

Configuration GARR0032- 2

Software/Firmware Running during test	
Description	Version
PurePath Wireless Commander	1.0.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Headphones	Garrett Metal Detectors	Garrett Z-Lynk MS-3	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop Computer	Acer	ZG5	LUS360B171909157F02547
AC/DC Power Supply (Laptop)	Delta Electronics, Inc.	ADP-30JH B	202W91502BN
Mouse	Microsoft	MSK-1113B	X821908-014
CC Debugger	Texas Instruments	6380	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.6m	No	AC Mains	AC/DC Power Supply (Laptop)
DC Cable	No	1.7m	No	AC/DC Power Supply (Laptop)	Laptop Computer
USB Cable	Yes	0.5m	No	CC Debugger	Laptop Computer
Ribbon Cable	No	0.2m	No	CC Debugger	Headphone Board (Direct Connect)
USB Cable	Yes	1.6m	Yes	Mouse	Laptop Computer

CONFIGURATIONS



2017-1-25

Configuration GARR0032- 3

Software/Firmware Running during test	
Description	Version
PurePath Wireless Commander	1.0.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Headphones	Garrett Metal Detectors	Garrett Z-Lynk MS-3	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop Computer	Acer	ZG5	LUS360B171909157F02547
AC/DC Power Supply (Laptop)	Delta Electronics, Inc.	ADP-30JH B	202W91502BN
Mouse	Microsoft	MSK-1113B	X821908-014
CC Debugger	Texas Instruments	6380	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	1.6m	No	AC Mains	AC/DC Power Supply (Laptop)
DC Cable	No	1.7m	No	AC/DC Power Supply (Laptop)	Laptop Computer
USB Cable	Yes	0.5m	No	CC Debugger	Laptop Computer
Ribbon Cable	No	0.2m	No	CC Debugger	Headphone Board (Direct Connect)
USB Cable	Yes	1.6m	Yes	Mouse	Laptop Computer
USB Cable	Yes	0.9m	No	Headphones	Laptop Computer

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	7/20/2017	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	7/25/2017	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	8/9/2017	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	8/9/2017	Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	8/9/2017	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	8/9/2017	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	8/9/2017	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.



POWERLINE CONDUCTED EMISSIONS

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
LISN	Solar Electronics	9252-50-R-24-BNC	LJK	9/21/2016	9/21/2017
Cable - Conducted Cable Assembly	Element	TXA, HHZ, TQR	TXAA	4/17/2017	4/17/2018
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFD	8/2/2017	8/2/2018
Power Source/Analyzer	Hewlett Packard	6841A	THC	NCR	NCR

MEASUREMENT UNCERTAINTY

Description			
Expanded k=2	2.4 dB		-2.4 dB

CONFIGURATIONS INVESTIGATED

GARR0032-2

MODES INVESTIGATED

Continuous Transmit. Mid Channel, 2445 MHz



POWERLINE CONDUCTED EMISSIONS

EUT:	Garrett Z-Lynk MS-3 Headphones	Work Order:	GARR0032
Serial Number:	None	Date:	08/09/2017
Customer:	Garrett Metal Detectors	Temperature:	24°C
Attendees:	None	Relative Humidity:	53%
Customer Project:	None	Bar. Pressure:	1018 mb
Tested By:	Marty Martin	Job Site:	TX01
Power:	USB via 110VAC/60Hz	Configuration:	GARR0032-3

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2017	ANSI C63.10:2013

TEST PARAMETERS

Run #:	9	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

COMMENTS



None

EUT OPERATING MODES

Continuous Transmit. Mid Channel, 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

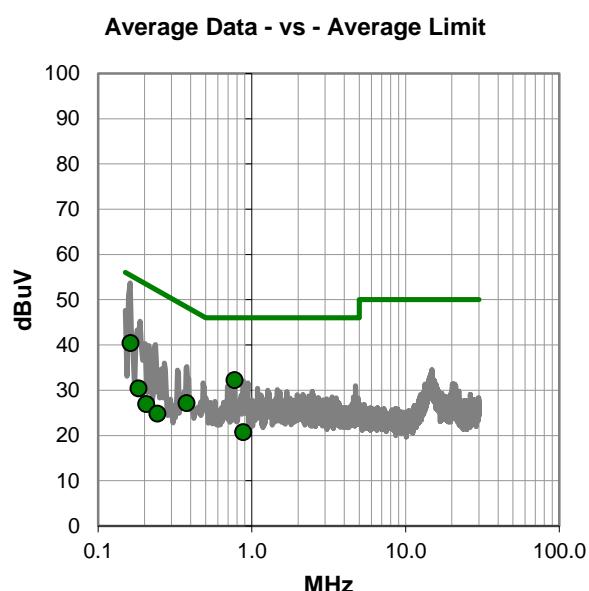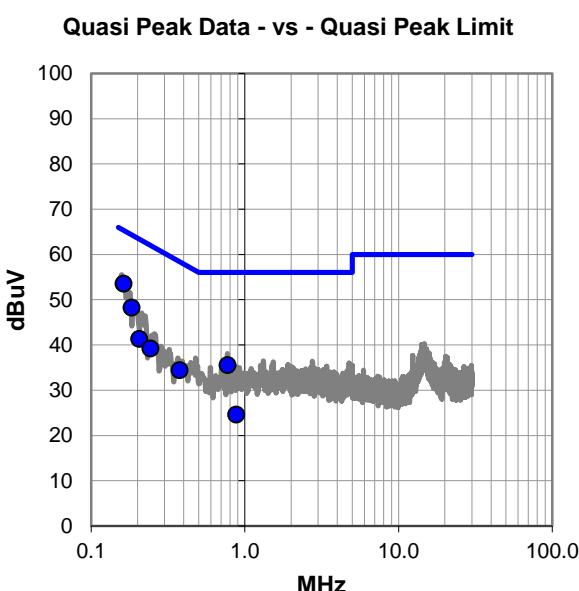



POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #9

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.163	33.7	19.8	53.5	65.3	-11.8
0.184	28.4	19.8	48.2	64.3	-16.1
0.771	15.5	20.0	35.5	56.0	-20.5
0.206	21.4	19.9	41.3	63.4	-22.1
0.243	19.5	19.7	39.2	62.0	-22.8
0.376	14.5	19.9	34.4	58.4	-24.0
0.880	4.6	20.0	24.6	56.0	-31.4

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.771	12.2	20.0	32.2	46.0	-13.8
0.163	20.6	19.8	40.4	55.3	-14.9
0.376	7.2	19.9	27.1	48.4	-21.3
0.184	10.6	19.8	30.4	54.3	-23.9
0.880	0.7	20.0	20.7	46.0	-25.3
0.206	7.0	19.9	26.9	53.4	-26.5
0.243	5.1	19.7	24.8	52.0	-27.2

CONCLUSION

Pass

Tested By



POWERLINE CONDUCTED EMISSIONS

EUT:	Garrett Z-Lynk MS-3 Headphones	Work Order:	GARR0032
Serial Number:	None	Date:	08/09/2017
Customer:	Garrett Metal Detectors	Temperature:	24°C
Attendees:	None	Relative Humidity:	53%
Customer Project:	None	Bar. Pressure:	1018 mb
Tested By:	Marty Martin	Job Site:	TX01
Power:	USB via 110VAC/60Hz	Configuration:	GARR0032-3

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2017	ANSI C63.10:2013

TEST PARAMETERS

Run #:	10	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	----	-------	---------	-----------------------------	---

COMMENTS



None

EUT OPERATING MODES

Continuous Transmit. Mid Channel, 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

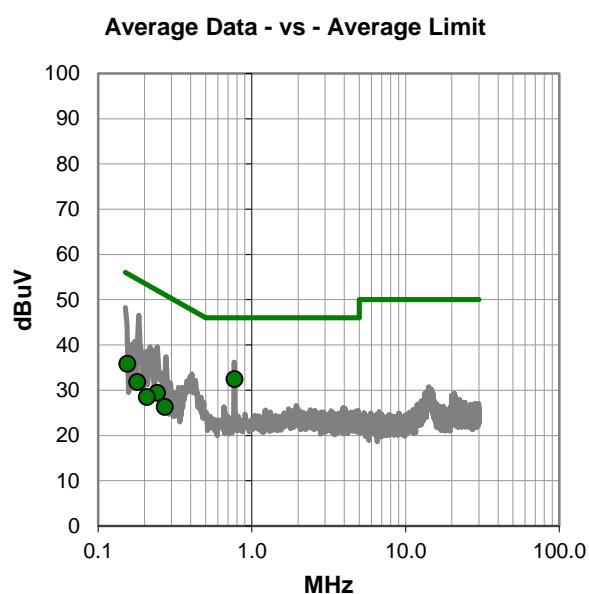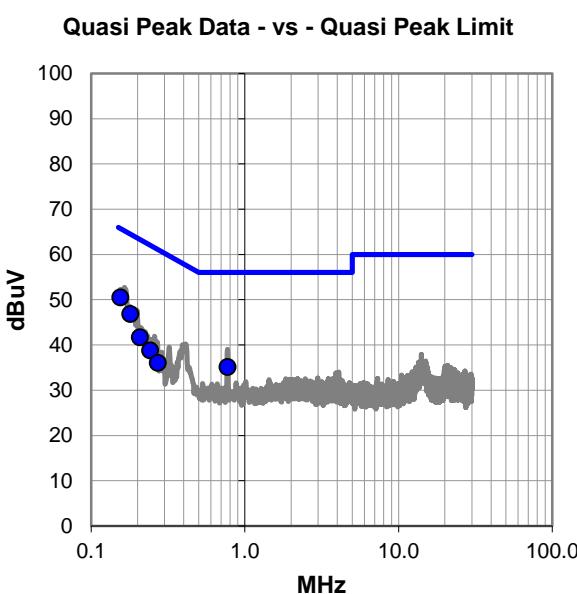



POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #10

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.155	30.7	19.8	50.5	65.7	-15.2
0.180	27.0	19.8	46.8	64.5	-17.7
0.771	15.1	20.0	35.1	56.0	-20.9
0.208	21.8	19.9	41.7	63.3	-21.6
0.243	19.1	19.7	38.8	62.0	-23.2
0.272	16.3	19.7	36.0	61.1	-25.1

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.771	12.4	20.0	32.4	46.0	-13.6
0.155	16.0	19.8	35.8	55.7	-19.9
0.243	9.7	19.7	29.4	52.0	-22.6
0.180	12.0	19.8	31.8	54.5	-22.7
0.208	8.6	19.9	28.5	53.3	-24.8
0.272	6.6	19.7	26.3	51.1	-24.8

CONCLUSION

Pass

Tested By

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.06.01

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuous Transmit

POWER SETTINGS INVESTIGATED

USB via 110VAC/60Hz

Battery

CONFIGURATIONS INVESTIGATED

GARR0032 - 2

GARR0032 - 3

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	25000 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Amplifier - Pre-Amplifier	Miteq	JSDWK42-18004000-60-5P	PAM	11/18/2016	12 mo
Cable	Element	18-40GHz	TXE	11/18/2016	12 mo
Antenna - Double Ridge	A.H. Systems, Inc.	SAS-574	AXW	8/5/2016	24 mo
Cable	Element	8-18GHz	TXD	5/31/2017	12 mo
Cable	Element	1-8.2 GHz	TXC	5/31/2017	12 mo
Cable	Element	RE 9kHz - 1GHz	TXB	11/9/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	PAL	10/12/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	PAK	10/18/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAJ	5/31/2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1551	PAH	11/9/2016	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	HHV	8/5/2016	12 mo
Antenna - Biconilog	ETS Lindgren	3143B	AYF	4/13/2016	24 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AJG	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AJF	NCR	0 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	10/4/2016	12 mo

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

SPURIOUS RADIATED EMISSIONS




EmR5 2017.07.11 PSA-ESCI 2017.06.01

Marty *Marty*

Work Order:	GARR0032	Date:	07/25/17	
Project:	None	Temperature:	23.2 °C	
Job Site:	TX02	Humidity:	54% RH	
Serial Number:	None	Barometric Pres.:	1020 mbar	Tested by: Marty Martin
EUT:	Garrett Z-Lynk MS-3 Headphones			
Configuration:	2			
Customer:	Garrett Metal Detectors			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Continuous Transmit			
Deviations:	None			
Comments:	Transmitting at 5dBm.			

Test Specifications	Test Method
FCC 15.247:2017	ANSI C63.10:2013

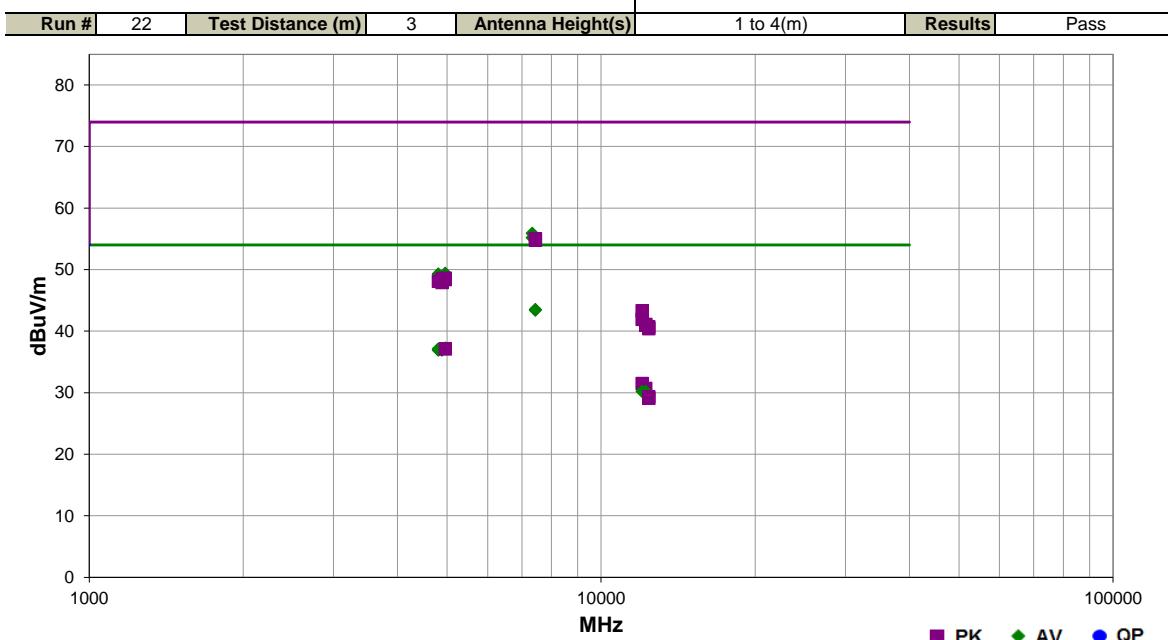

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7334.668	29.9	14.0	1.0	357.9	3.0	0.0	Horz	AV	0.0	43.9	54.0	-10.1	EUT Horz, Mid Channel, 2445 MHz
7334.772	29.9	14.0	1.0	242.0	3.0	0.0	Vert	AV	0.0	43.9	54.0	-10.1	EUT Horz, Mid Channel, 2445 MHz
7440.280	29.4	14.1	1.0	345.0	3.0	0.0	Horz	AV	0.0	43.5	54.0	-10.5	EUT Horz, High Channel 2480 MHz
7439.878	29.3	14.1	1.0	93.9	3.0	0.0	Vert	AV	0.0	43.4	54.0	-10.6	EUT Horz, High Channel 2480 MHz
4960.025	30.2	7.0	1.0	21.9	3.0	0.0	Horz	AV	0.0	37.2	54.0	-16.8	EUT Horz, High Channel 2480 MHz
4960.403	30.2	7.0	1.0	73.0	3.0	0.0	Vert	AV	0.0	37.2	54.0	-16.8	EUT Horz, High Channel 2480 MHz
4960.228	30.2	7.0	1.0	261.0	3.0	0.0	Horz	AV	0.0	37.2	54.0	-16.8	EUT Horz, High Channel 2480 MHz
4960.428	30.2	7.0	1.0	13.0	3.0	0.0	Horz	AV	0.0	37.2	54.0	-16.8	EUT Vert, High Channel 2480 MHz
4959.900	30.2	7.0	1.0	222.0	3.0	0.0	Vert	AV	0.0	37.2	54.0	-16.8	EUT Vert, High Channel 2480 MHz
4809.500	30.3	6.8	3.9	78.0	3.0	0.0	Horz	AV	0.0	37.1	54.0	-16.9	EUT Horz, Low Channel, 2405 MHz
4889.507	30.2	6.9	1.0	219.9	3.0	0.0	Horz	AV	0.0	37.1	54.0	-16.9	EUT Horz, Mid Channel, 2445 MHz
4809.507	30.1	6.8	1.0	247.0	3.0	0.0	Vert	AV	0.0	36.9	54.0	-17.1	EUT Horz, Low Channel, 2405 MHz
4889.866	30.0	6.9	1.0	298.9	3.0	0.0	Vert	AV	0.0	36.9	54.0	-17.1	EUT Horz, Mid Channel, 2445 MHz
7336.340	41.9	14.0	1.0	230.0	3.0	0.0	Horz	PK	0.0	55.9	74.0	-18.1	EUT Horz, Mid Channel, 2445 MHz
7335.975	41.2	14.0	1.2	231.0	3.0	0.0	Vert	PK	0.0	55.2	74.0	-18.8	EUT Horz, Mid Channel, 2445 MHz
7440.233	40.9	14.1	1.0	240.0	3.0	0.0	Vert	PK	0.0	55.0	74.0	-19.0	EUT Horz, High Channel 2480 MHz
7440.363	40.7	14.1	1.0	182.0	3.0	0.0	Horz	PK	0.0	54.8	74.0	-19.2	EUT Horz, High Channel 2480 MHz
12024.520	33.5	-2.0	1.0	102.0	3.0	0.0	Vert	AV	0.0	31.5	54.0	-22.5	EUT Horz, Low Channel, 2405 MHz
12224.650	32.3	-1.6	2.1	145.0	3.0	0.0	Horz	AV	0.0	30.7	54.0	-23.3	EUT Horz, Mid Channel, 2445 MHz
12224.530	32.2	-2.0	1.0	134.0	3.0	0.0	Horz	AV	0.0	30.2	54.0	-23.8	EUT Horz, Low Channel, 2405 MHz
12224.810	31.8	-1.6	1.0	130.9	3.0	0.0	Vert	AV	0.0	30.2	54.0	-23.8	EUT Horz, Mid Channel, 2445 MHz
4960.198	42.4	7.0	1.0	360.0	3.0	0.0	Horz	PK	0.0	49.4	74.0	-24.6	EUT Vert, High Channel 2480 MHz
4809.545	42.5	6.8	3.9	78.0	3.0	0.0	Horz	PK	0.0	49.3	74.0	-24.7	EUT Horz, Low Channel, 2405 MHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12399.620	30.1	-0.8	1.0	3.9	3.0	0.0	Vert	AV	0.0	29.3	54.0	-24.7	EUT Horz, High Channel 2480 MHz
12399.610	29.9	-0.8	1.6	190.9	3.0	0.0	Horz	AV	0.0	29.1	54.0	-24.9	EUT Horz, High Channel 2480 MHz
4959.922	41.8	7.0	1.0	295.0	3.0	0.0	Vert	PK	0.0	48.8	74.0	-25.2	EUT on Side, High Channel 2480 MHz
4960.015	41.7	7.0	1.0	270.0	3.0	0.0	Horz	PK	0.0	48.7	74.0	-25.3	EUT on Side, High Channel 2480 MHz
4959.923	41.6	7.0	1.0	153.9	3.0	0.0	Horz	PK	0.0	48.6	74.0	-25.4	EUT Horz, High Channel 2480 MHz
4890.387	41.6	6.9	1.0	87.9	3.0	0.0	Vert	PK	0.0	48.5	74.0	-25.5	EUT Horz, Mid Channel, 2445 MHz
4959.755	41.4	7.0	1.0	189.9	3.0	0.0	Vert	PK	0.0	48.4	74.0	-25.6	EUT Vert, High Channel 2480 MHz
4959.810	41.4	7.0	3.6	93.0	3.0	0.0	Vert	PK	0.0	48.4	74.0	-25.6	EUT Horz, High Channel 2480 MHz
4810.035	41.3	6.8	1.0	247.0	3.0	0.0	Vert	PK	0.0	48.1	74.0	-25.9	EUT Horz, Low Channel, 2405 MHz
4889.830	41.0	6.9	1.0	274.9	3.0	0.0	Horz	PK	0.0	47.9	74.0	-26.1	EUT Horz, Mid Channel, 2445 MHz
12025.290	45.3	-2.0	1.0	102.0	3.0	0.0	Vert	PK	0.0	43.3	74.0	-30.7	EUT Horz, Low Channel, 2405 MHz
12025.200	43.9	-2.0	1.0	134.0	3.0	0.0	Horz	PK	0.0	41.9	74.0	-32.1	EUT Horz, Low Channel, 2405 MHz
12225.500	42.7	-1.6	1.0	231.0	3.0	0.0	Vert	PK	0.0	41.1	74.0	-32.9	EUT Horz, Mid Channel, 2445 MHz
12224.740	42.6	-1.6	1.0	297.0	3.0	0.0	Horz	PK	0.0	41.0	74.0	-33.0	EUT Horz, Mid Channel, 2445 MHz
12399.980	41.5	-0.8	1.0	200.0	3.0	0.0	Vert	PK	0.0	40.7	74.0	-33.3	EUT Horz, High Channel 2480 MHz
12399.860	41.2	-0.8	1.0	147.9	3.0	0.0	Horz	PK	0.0	40.4	74.0	-33.6	EUT Horz, High Channel 2480 MHz
4959.760	30.1	7.0	1.0	32.0	3.0	0.0	Vert	AV	0.0	37.1	54.0	-16.9	EUT on Side, High Channel 2480 MHz

SPURIOUS RADIATED EMISSIONS




EmR5 2017.07.11

PSA-ESCI 2017.06.01

Work Order:	GARR0032	Date:	07/25/17	 	Tested by:
Project:	None	Temperature:	23.2 °C		
Job Site:	TX02	Humidity:	54% RH		
Serial Number:	None	Barometric Pres.:	1020 mbar		
EUT:	Garrett Z-Lynk MS-3 Headphones				
Configuration:	2				
Customer:	Garrett Metal Detectors				
Attendees:	None				
EUT Power:	Battery				
Operating Mode:	Continuous Transmit				
Deviations:	None				
Comments:	Transmitting at 5dBm.				

Test Specifications	Test Method
FCC 15.247:2017	ANSI C63.10:2013

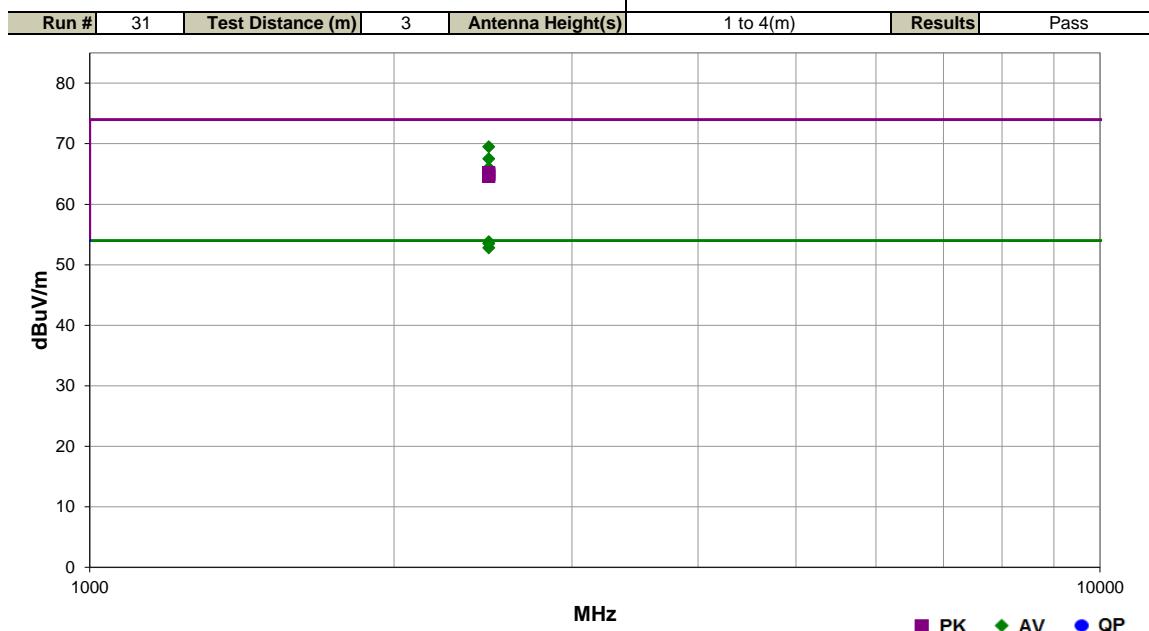

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.500	37.8	-4.0	1.0	94.9	3.0	20.0	Vert	AV	0.0	53.8	54.0	-0.2	EUT on Vert, High Channel 2480 MHz
2483.500	37.5	-4.0	3.2	141.9	3.0	20.0	Horz	AV	0.0	53.5	54.0	-0.5	EUT Horz, High Channel 2480 MHz
2483.500	36.8	-4.0	1.0	160.9	3.0	20.0	Vert	AV	0.0	52.8	54.0	-1.2	EUT on Side, High Channel 2480 MHz
2483.503	53.5	-4.0	3.9	31.0	3.0	20.0	Horz	PK	0.0	69.5	74.0	-4.5	EUT on Vert, High Channel 2480 MHz
2483.520	51.5	-4.0	2.9	231.0	3.0	20.0	Horz	PK	0.0	67.5	74.0	-6.5	EUT on Side, High Channel 2480 MHz
2483.510	50.0	-4.0	1.0	205.0	3.0	20.0	Vert	PK	0.0	66.0	74.0	-8.0	EUT Horz, High Channel 2480 MHz
2483.500	49.2	-4.0	1.0	94.9	3.0	20.0	Vert	PK	0.0	65.2	74.0	-8.8	EUT on Vert, High Channel 2480 MHz
2483.537	48.9	-4.0	3.2	141.9	3.0	20.0	Horz	PK	0.0	64.9	74.0	-9.1	EUT Horz, High Channel 2480 MHz
2483.503	48.6	-4.0	1.0	160.9	3.0	20.0	Vert	PK	0.0	64.6	74.0	-9.4	EUT on Side, High Channel 2480 MHz

SPURIOUS RADIATED EMISSIONS




EmIR5 2017.07.11

PSA-ESCI 2017.06.01

Work Order:	GARR0032	Date:	07/25/17	
Project:	None	Temperature:	23.2 °C	
Job Site:	TX02	Humidity:	54% RH	
Serial Number:	None	Barometric Pres.:	1020 mbar	Tested by: Marty Martin
EUT:	Garrett Z-Lynk MS-3 Headphones			
Configuration:	2			
Customer:	Garrett Metal Detectors			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Continuous			
Deviations:	None			
Comments:	Transmitting at 5 dBm			

Test Specifications	Test Method
FCC 15.247:2017	ANSI C63.10:2013

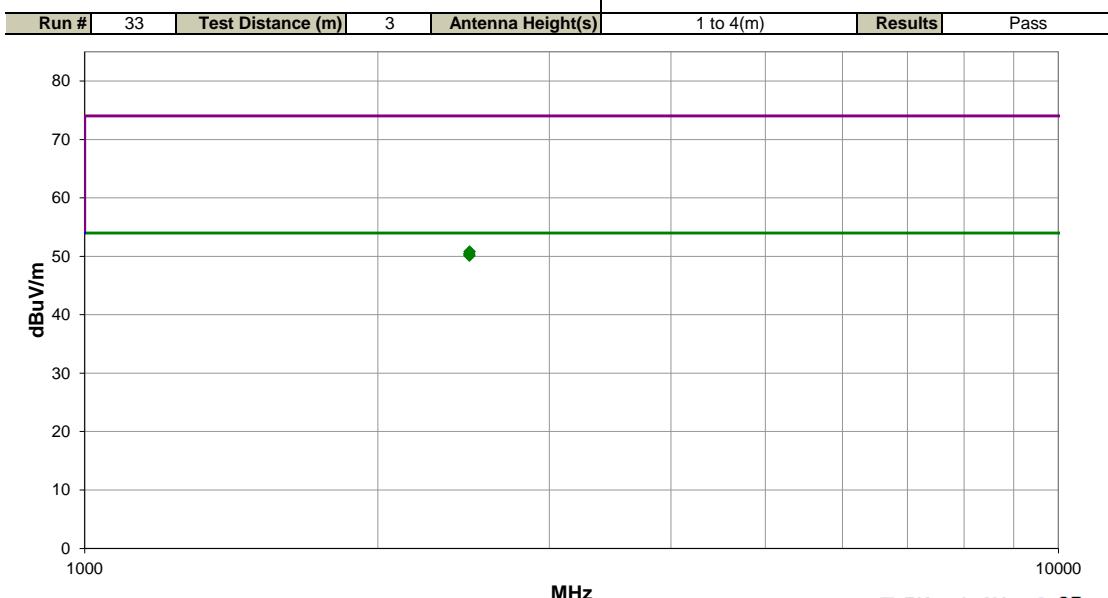

Freq (MHz)	Calculated Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Marker Delta Comments
2485.600	34.8	-4.0	3.9	31.0	3.0	20.0	Horz	AV	0.0	50.8	54.0	-3.2	EUT Vert, High Ch, 2480: Fund 72.4dBuV + - 37.6dBc = 34.8dBuV (calc. amp.)
2483.800	34.4	-4.0	1.0	205.0	3.0	20.0	Vert	AV	0.0	50.4	54.0	-3.6	EUT Horz, High Ch, 2480: Fund 76.1dBuV + - 41.7dBc = 34.4dBuV (calc. amp.)
2484.115	34.1	-4.0	2.9	231.0	3.0	20.0	Horz	AV	0.0	50.1	54.0	-3.9	EUT on Side, High Ch, 2480: Fund 76.1dBuV + - 42.0dBc = 34.1dBuV (calc. amp.)

SPURIOUS RADIATED EMISSIONS



EUT on Side, High Ch, 2480

PSA-ESCI 2017.06.01




EUT Vert, High Ch, 2480

SPURIOUS RADIATED EMISSIONS



EUT Horz, High Ch, 2480

PSA-ESCI 2017.06.01

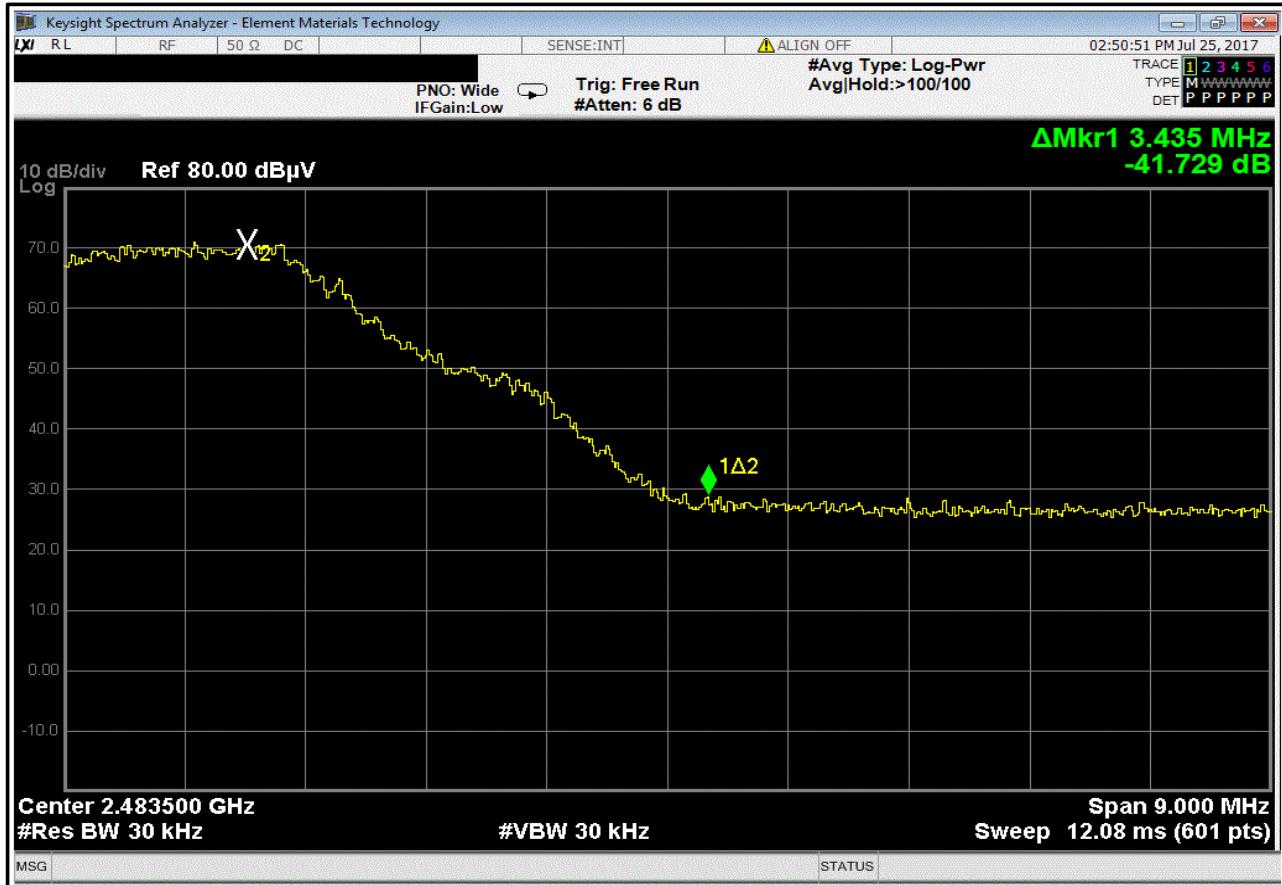

SPURIOUS RADIATED EMISSIONS




EmiRS 2017.07.11

PSA-ESCI 2017.06.01

Work Order:	GARR0032	Date:	07/25/17		
Project:	None	Temperature:	22.6 °C		
Job Site:	TX02	Humidity:	55.4% RH		
Serial Number:	None	Barometric Pres.:	1020 mbar	Tested by:	Marty Martin
EUT:	Garrett Z-Lynk MS-3 Headphones				
Configuration:	3				
Customer:	Garrett Metal Detectors				
Attendees:	None				
EUT Power:	USB via 110VAC/60Hz				
Operating Mode:	Continuous Transmit				
Deviations:	None				
Comments:	Transmitting at 5dBm. Using the headphones while charging is not a typical mode for the end user, but the headphones can operate in this mode. Scans were taken and the worse case points were re-tested to verify compliance while the headphones were charging and transmitting				

Test Specifications	Test Method
FCC 15.247:2017	ANSI C63.10:2013

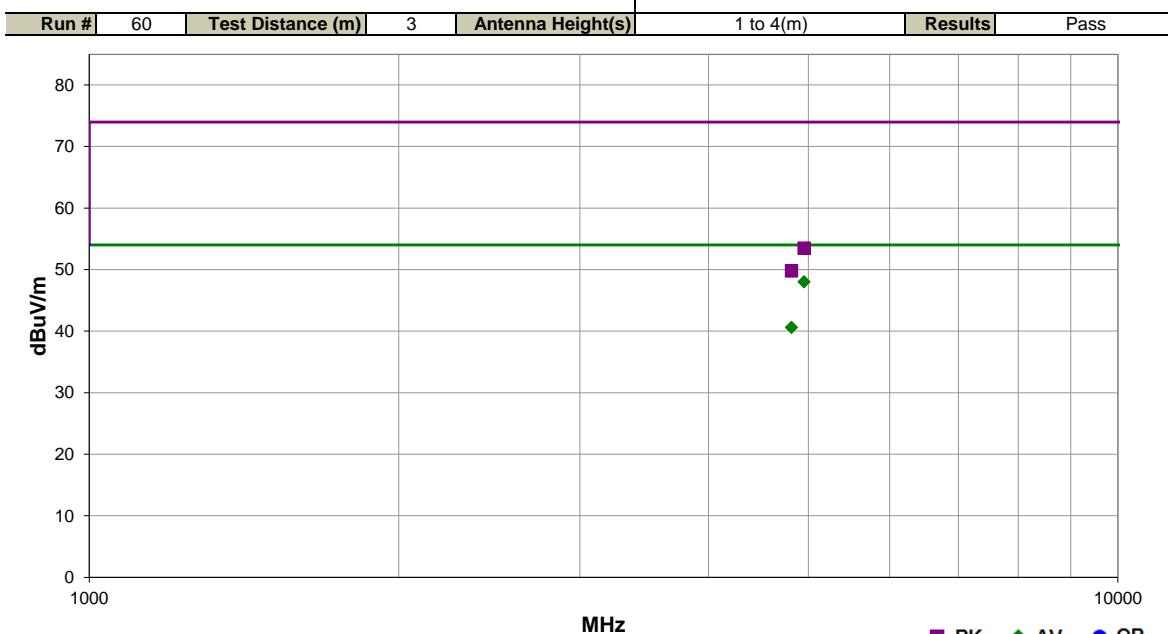

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4935.765	41.0	7.0	1.0	147.0	3.0	0.0	Vert	AV	0.0	48.0	54.0	-6.0	EUT on Vert, High Channel 2480 MHz
4815.765	33.8	6.8	1.2	214.9	3.0	0.0	Horz	AV	0.0	40.6	54.0	-13.4	EUT Horz, Low Channel, 2405 MHz
4953.635	46.5	7.0	1.0	147.0	3.0	0.0	Vert	PK	0.0	53.5	74.0	-20.5	EUT on Vert, High Channel 2480 MHz
4815.635	43.0	6.8	1.2	214.9	3.0	0.0	Horz	PK	0.0	49.8	74.0	-24.2	EUT Horz, Low Channel, 2405 MHz

DUTY CYCLE



TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

OCCUPIED BANDWIDTH



XMIT 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4018-20	TYE	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMT	10/24/2016	10/24/2017
Cable	Fairview Microwave	SCK0963-60	TXF	11/18/2016	11/18/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	10/4/2016	10/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TbTx 2017.07.11

XMI 2017.02.08

EUT:	Garrett Z-Lynk MS-3 Headphones		Work Order:	GARR0032	
Serial Number:	None		Date:	08/09/17	
Customer:	Garrett Metal Detectors		Temperature:	23.8 °C	
Attendees:	None		Humidity:	53% RH	
Project:	None		Barometric Pres.:	1018 mbar	
Tested by:	Marty Martin	Power:	USB via 110VAC/60Hz	Job Site:	TX02
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Marty Martin</i>	Value	Limit (±)
				2.204 MHz	500 kHz
				2.211 MHz	500 kHz
				2.211 MHz	500 kHz


BLE/GFSK Low Channel, 2405 MHz
BLE/GFSK Mid Channel, 2445 MHz
BLE/GFSK High Channel, 2480 MHz

OCCUPIED BANDWIDTH




TbITx 2017.07.11 XMII 2017.02.08

BLE/GFSK Low Channel, 2405 MHz			Value	Limit	Result
	(\geq)			(\geq)	
	2.204 MHz	500 kHz			Pass

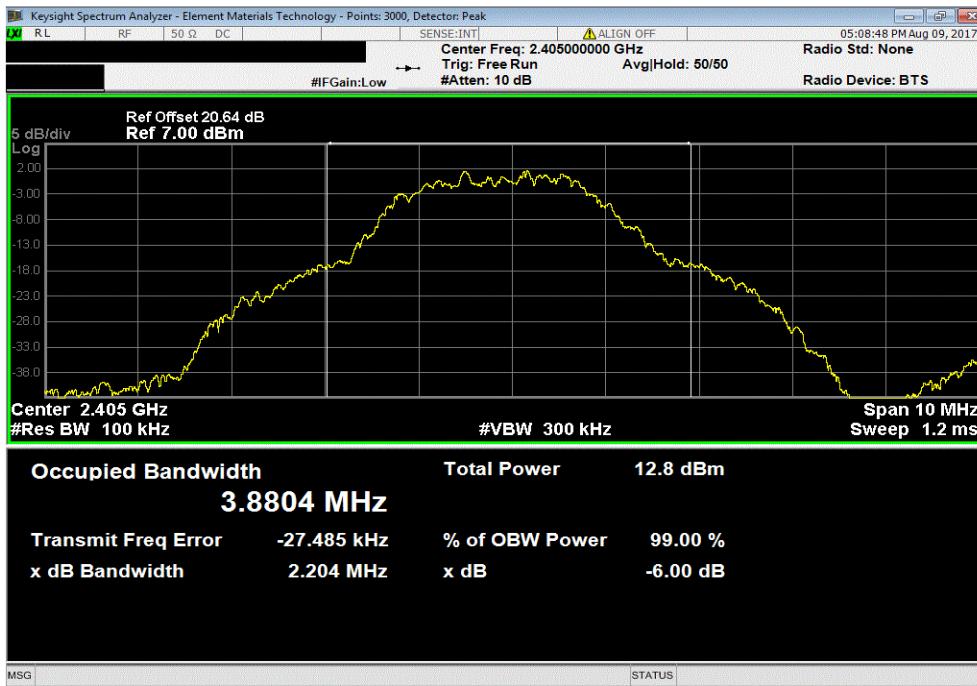


BLE/GFSK Mid Channel, 2445 MHz			Value	Limit	Result
	(\geq)			(\geq)	
	2.211 MHz	500 kHz			Pass

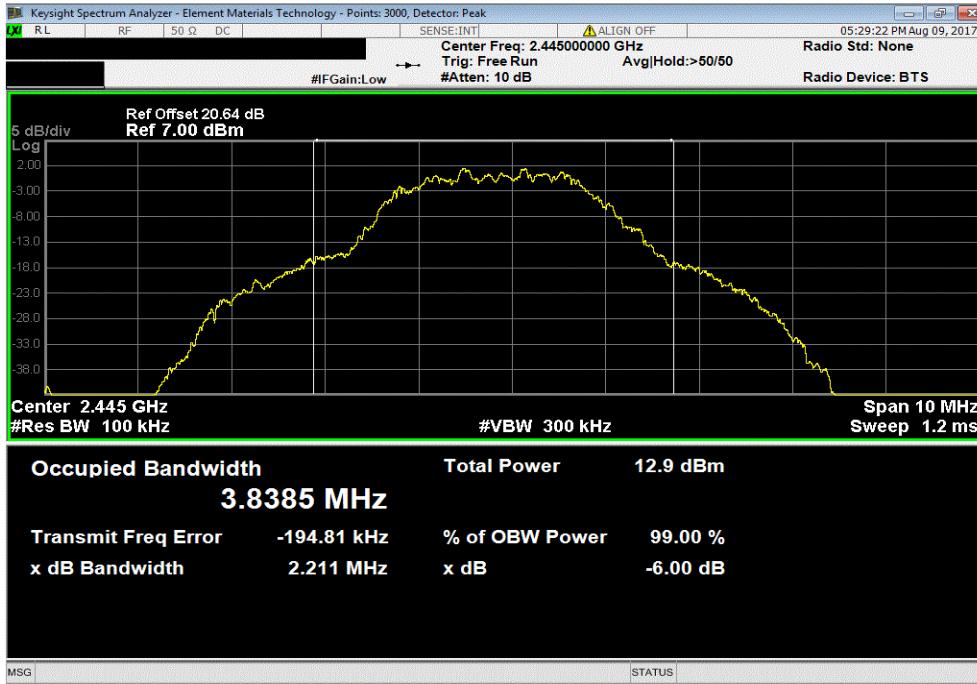

OCCUPIED BANDWIDTH



TbITx 2017.07.11 XMII 2017.02.08

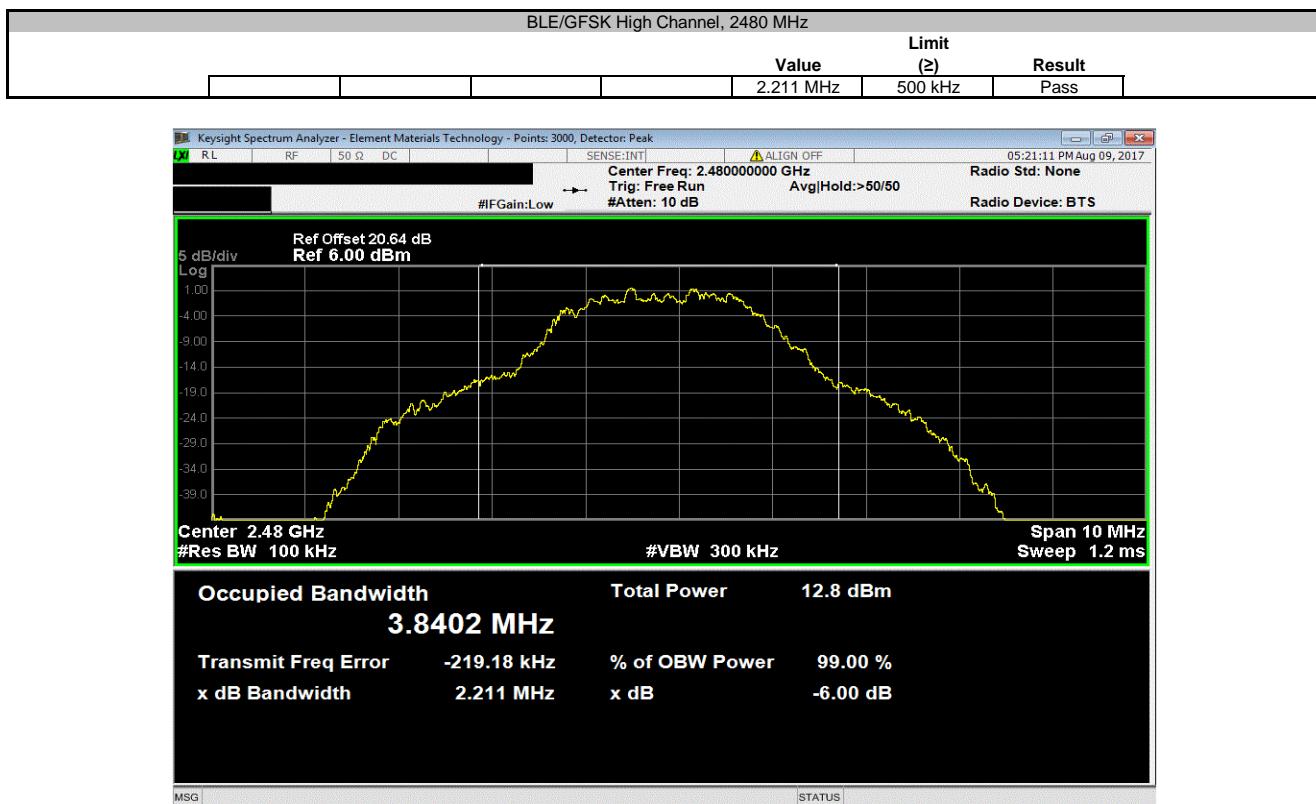

OUTPUT POWER



XMIT 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Fairview Microwave	SCK0963-60	TXF	11/18/2016	11/18/2017
Block - DC	Fairview Microwave	SD3379	AMT	10/24/2016	10/24/2017
Attenuator	Fairview Microwave	SA4018-20	TYE	10/24/2016	10/24/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	3/14/2017	3/14/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER



TbTx 2017.04.18

XMI 2017.02.08

EUT:	Garrett Z-Lynk MS-3 Headphones		Work Order:	GARR0032	
Serial Number:	None		Date:	07/20/17	
Customer:	Garrett Metal Detectors		Temperature:	22.8 °C	
Attendees:	None		Humidity:	53.5% RH	
Project:	None		Barometric Pres.:	1022 mbar	
Tested by:	Marty Martin	Power:	Battery	Job Site:	TX09
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Marty Martin</i>	Value	Limit (-)
				2.807 mW	1 W
				2.767 mW	1 W
				2.676 mW	1 W
					Pass
					Pass
					Pass

GFSK Low Channel, 2405 MHz
 GFSK Mid Channel, 2445 MHz
 GFSK High Channel, 2480 MHz

OUTPUT POWER




TbITx 2017.04.18 XMII 2017.02.08

GFSK Low Channel, 2405 MHz			Value	Limit (≤)	Result
			2.807 mW	1 W	Pass



GFSK Mid Channel, 2445 MHz			Value	Limit (≤)	Result
			2.767 mW	1 W	Pass

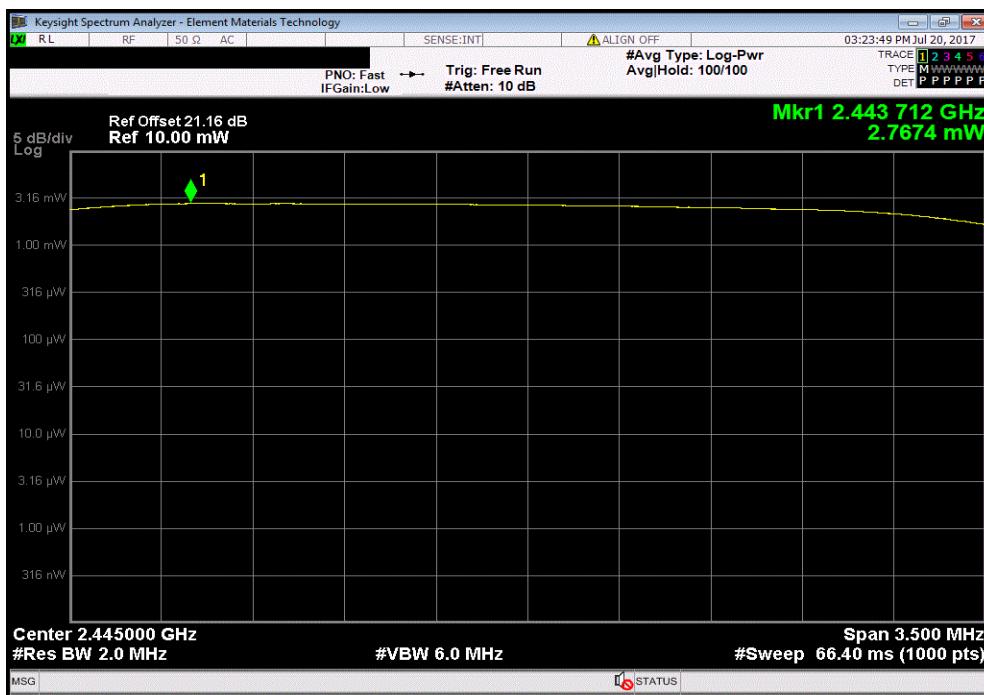


OUTPUT POWER



TbITx 2017.04.18 XMII 2017.02.08

GFSK High Channel, 2480 MHz			Value	Limit (≤)	Result
			2.676 mW	1 W	Pass

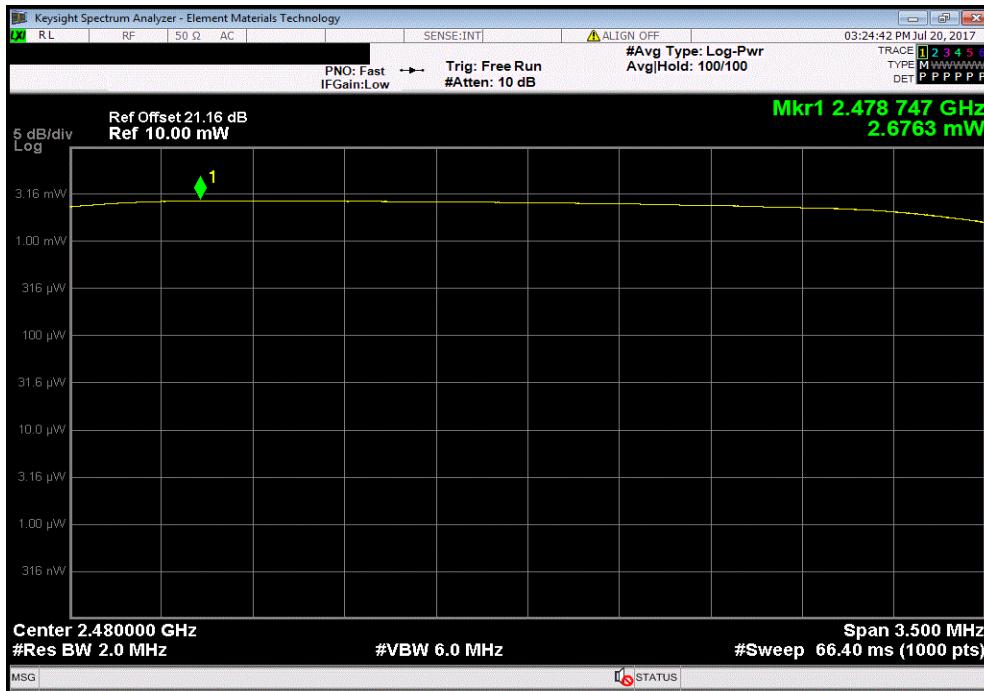

POWER SPECTRAL DENSITY



XMIT 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4018-20	TYE	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMT	10/24/2016	10/24/2017
Cable	Fairview Microwave	SCK0963-60	TXF	11/18/2016	11/18/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	10/4/2016	10/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TbTx 2017.07.11

XMI 2017.02.08

EUT:	Garrett Z-Lynk MS-3 Headphones		Work Order:	GARR0032	
Serial Number:	None		Date:	08/09/17	
Customer:	Garrett Metal Detectors		Temperature:	23.8 °C	
Attendees:	None		Humidity:	53% RH	
Project:	None		Barometric Pres.:	1018 mbar	
Tested by:	Marty Martin	Power:	USB via 110VAC/60Hz	Job Site:	TX02
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature			
			Value	Limit	Results
			dBm/3kHz	< dBm/3kHz	
			-12.144	8	Pass
			-13.144	8	Pass
			-13.337	8	Pass


BLE/GFSK Low Channel, 2405 MHz
BLE/GFSK Mid Channel, 2445 MHz
BLE/GFSK High Channel, 2480 MHz

POWER SPECTRAL DENSITY




TbITx 2017.07.11 XMII 2017.02.08

BLE/GFSK Low Channel, 2405 MHz			Value	Limit	Results
	dBm/3kHz	< dBm/3kHz			
	-12.144	8	Pass		

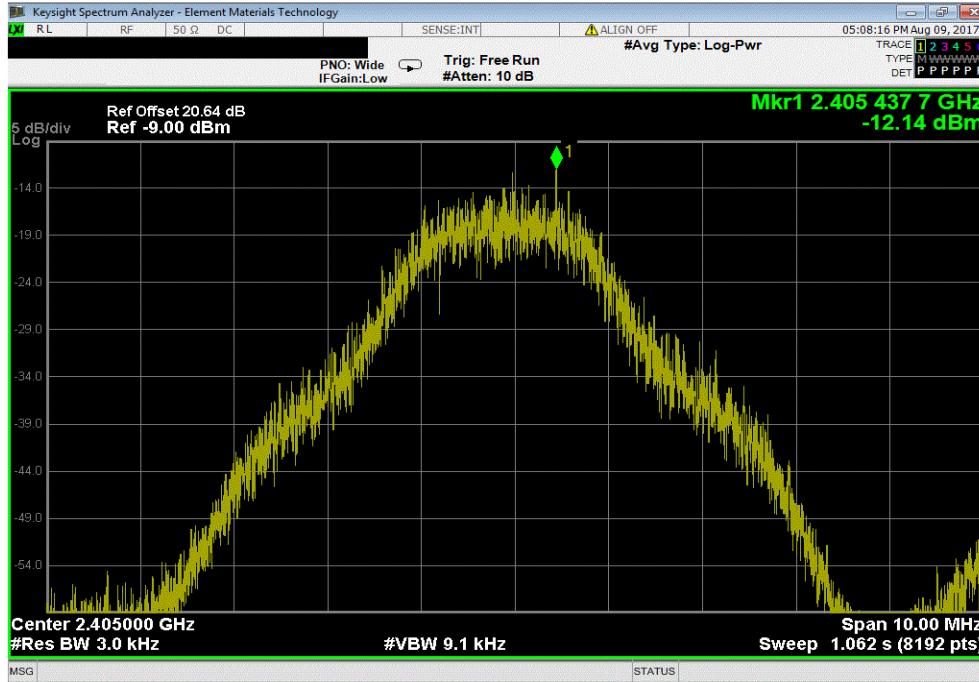

BLE/GFSK Mid Channel, 2445 MHz			Value	Limit	Results
	dBm/3kHz	< dBm/3kHz			
	-13.144	8	Pass		

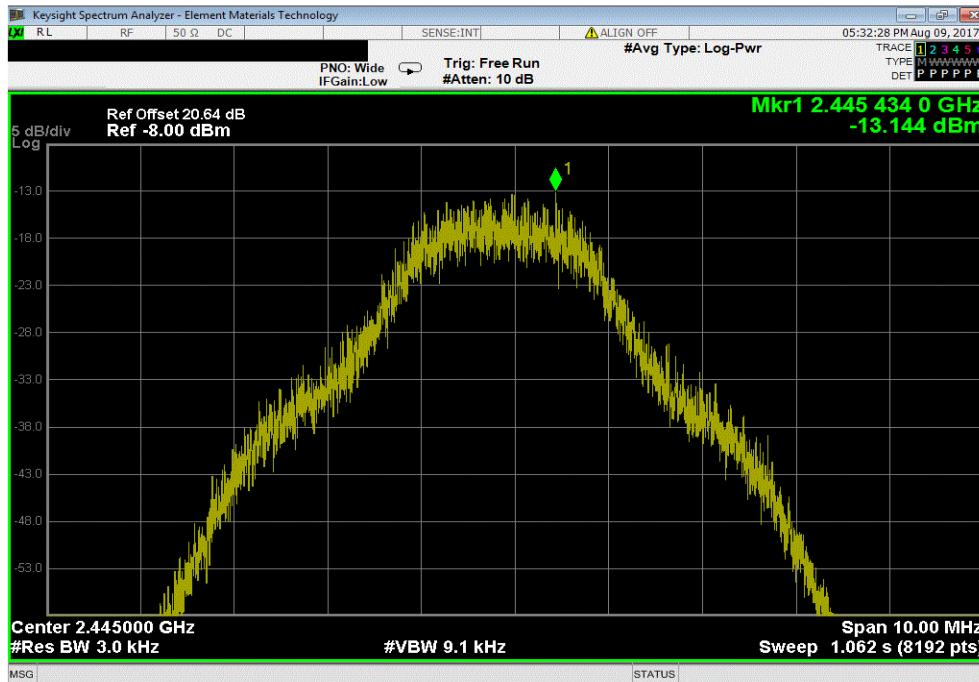


POWER SPECTRAL DENSITY



TbITx 2017.07.11 XMII 2017.02.08

BLE/GFSK High Channel, 2480 MHz			Value	Limit	Results
	dBm/3kHz	< dBm/3kHz			
	-13.337	8	Pass		

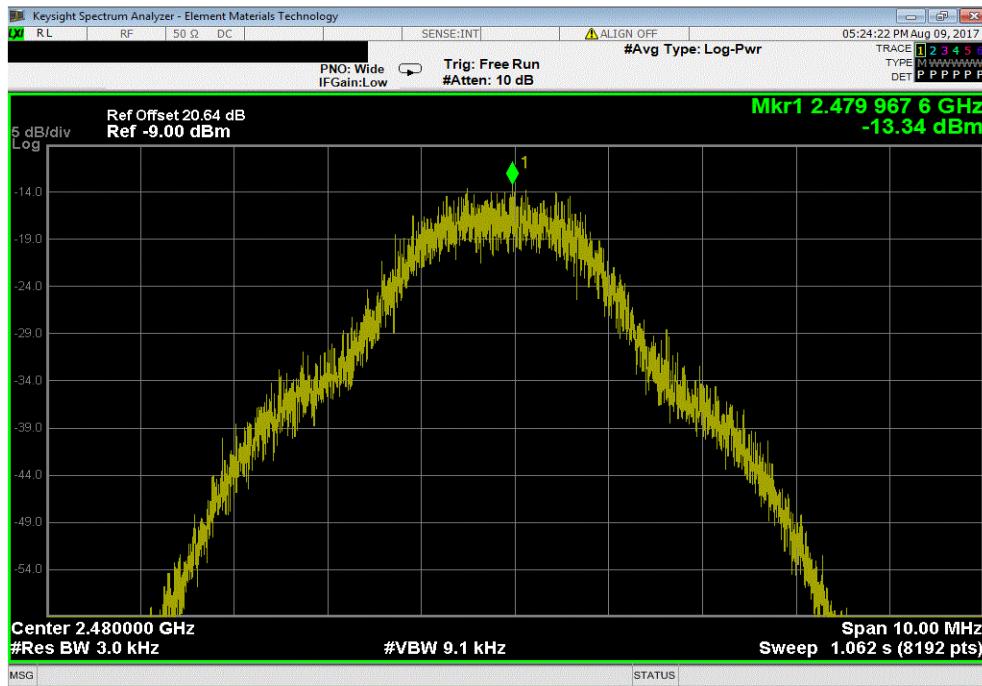

BAND EDGE COMPLIANCE



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMT	10/24/2016	10/24/2017
Cable	Fairview Microwave	SCK0963-60	TXF	11/18/2016	11/18/2017
Attenuator	Fairview Microwave	SA4018-20	TYE	10/24/2016	10/24/2017
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	10/4/2016	10/4/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



Tbitx 2017.07.11

XMI 2017.02.08


EUT:	Garrett Z-Lynk MS-3 Headphones		Work Order:	GARR0032	
Serial Number:	None		Date:	08/09/17	
Customer:	Garrett Metal Detectors		Temperature:	23.8 °C	
Attendees:	None		Humidity:	53.2% RH	
Project:	None		Barometric Pres.:	1018 mbar	
Tested by:	Marty Martin	Power:	USB via 110VAC/60Hz	Job Site:	TX02
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Marty Martin</i>	Value (dBc)	Limit ≤ (dBc)
				-41.3	-20
				-45.0	-20
					Pass
					Pass
BLE/GFSK Low Channel, 2405 MHz					
BLE/GFSK High Channel, 2480 MHz					

BAND EDGE COMPLIANCE




TbITx 2017.07.11 XMII 2017.02.08

BLE/GFSK Low Channel, 2405 MHz			Value (dBc)	Limit ≤ (dBc)	Result
			-41.3	-20	Pass

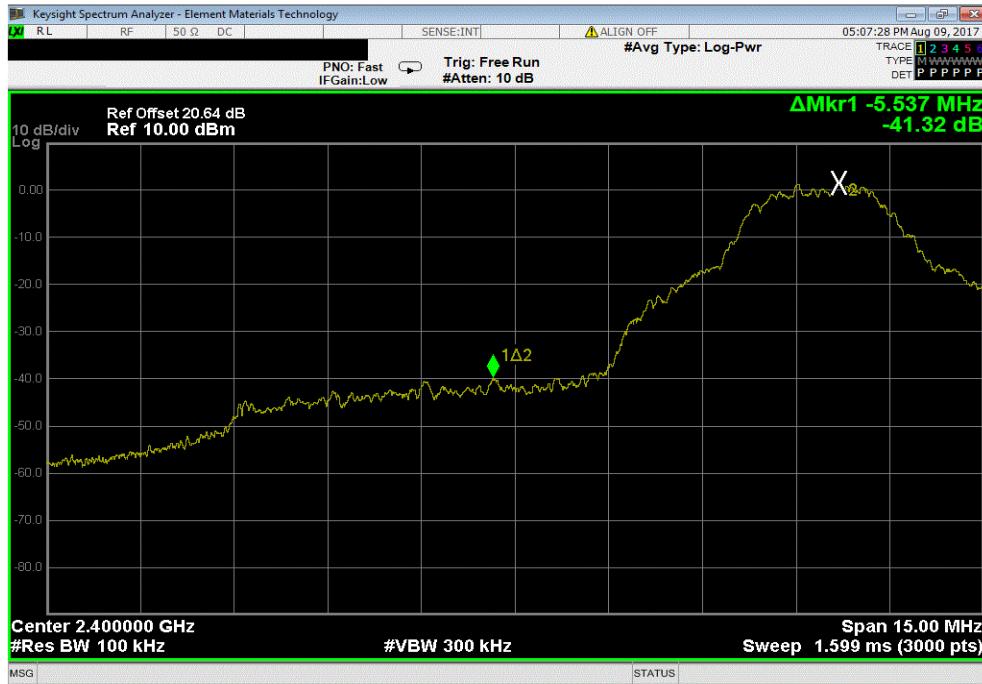

BLE/GFSK High Channel, 2480 MHz			Value (dBc)	Limit ≤ (dBc)	Result
			-45.0	-20	Pass

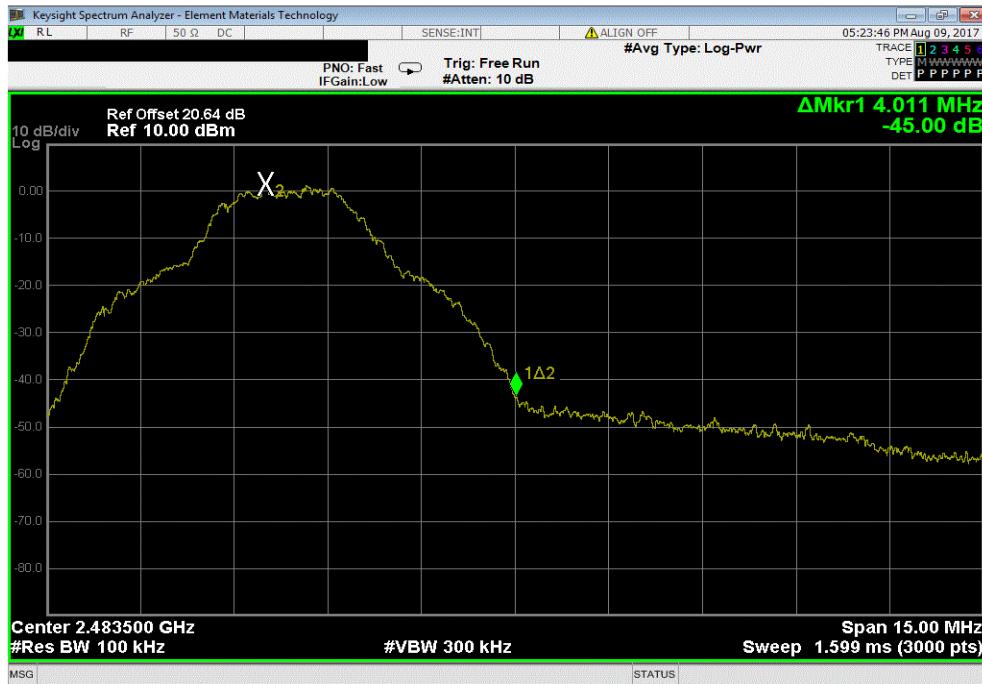

SPURIOUS CONDUCTED EMISSIONS



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4018-20	TYE	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMT	10/24/2016	10/24/2017
Cable	Fairview Microwave	SCK0963-60	TXF	11/18/2016	11/18/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	10/4/2016	10/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS



TbTx 2017.07.11

XMI 2017.02.08


EUT:	Garrett Z-Lynk MS-3 Headphones		Work Order:	GARR0032		
Serial Number:	None		Date:	08/09/17		
Customer:	Garrett Metal Detectors		Temperature:	23.8 °C		
Attendees:	None		Humidity:	53.2% RH		
Project:	None		Barometric Pres.:	1018 mbar		
Tested by:	Marty Martin	Power:	USB via 110VAC/60Hz	Job Site:	TX02	
TEST SPECIFICATIONS			Test Method			
FCC 15.247:2017			ANSI C63.10:2013			
COMMENTS						
None						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature	Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK Low Channel, 2405 MHz			Fundamental	N/A	N/A	N/A
BLE/GFSK Low Channel, 2405 MHz			30 MHz - 12.5 GHz	-53.87	-20	Pass
BLE/GFSK Low Channel, 2405 MHz			12.5 GHz - 25 GHz	-52.71	-20	Pass
BLE/GFSK Mid Channel, 2445 MHz			Fundamental	N/A	N/A	N/A
BLE/GFSK Mid Channel, 2445 MHz			30 MHz - 12.5 GHz	-53.49	-20	Pass
BLE/GFSK Mid Channel, 2445 MHz			12.5 GHz - 25 GHz	-53.49	-20	Pass
BLE/GFSK High Channel, 2480 MHz			Fundamental	N/A	N/A	N/A
BLE/GFSK High Channel, 2480 MHz			30 MHz - 12.5 GHz	-50.41	-20	Pass
BLE/GFSK High Channel, 2480 MHz			12.5 GHz - 25 GHz	-53.24	-20	Pass

SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.07.11 XMII 2017.02.08

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
Fundamental		N/A	N/A	N/A

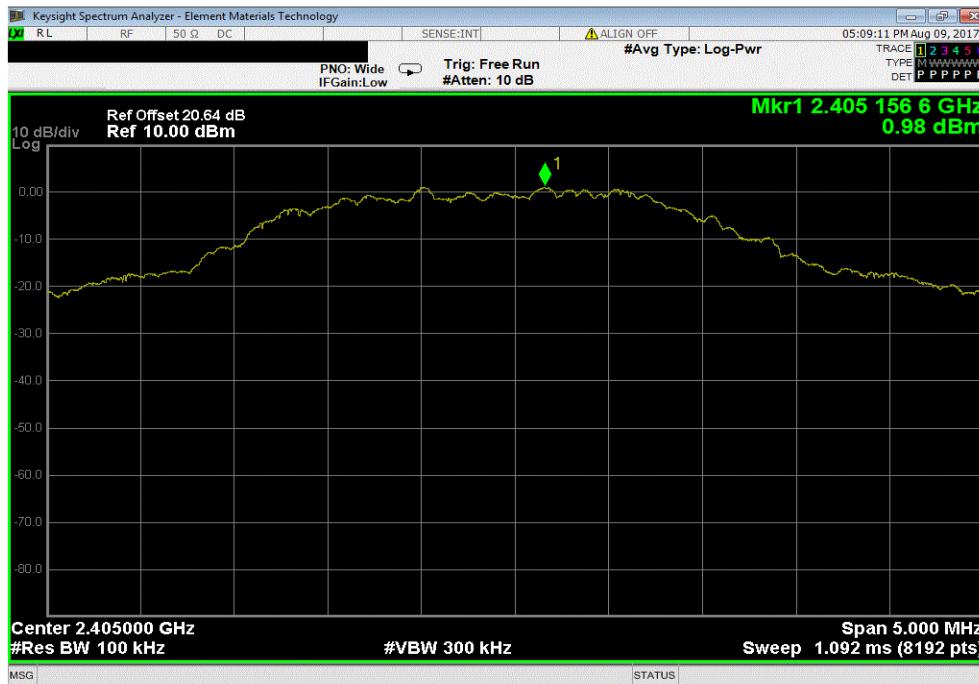

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz		-53.87	-20	Pass

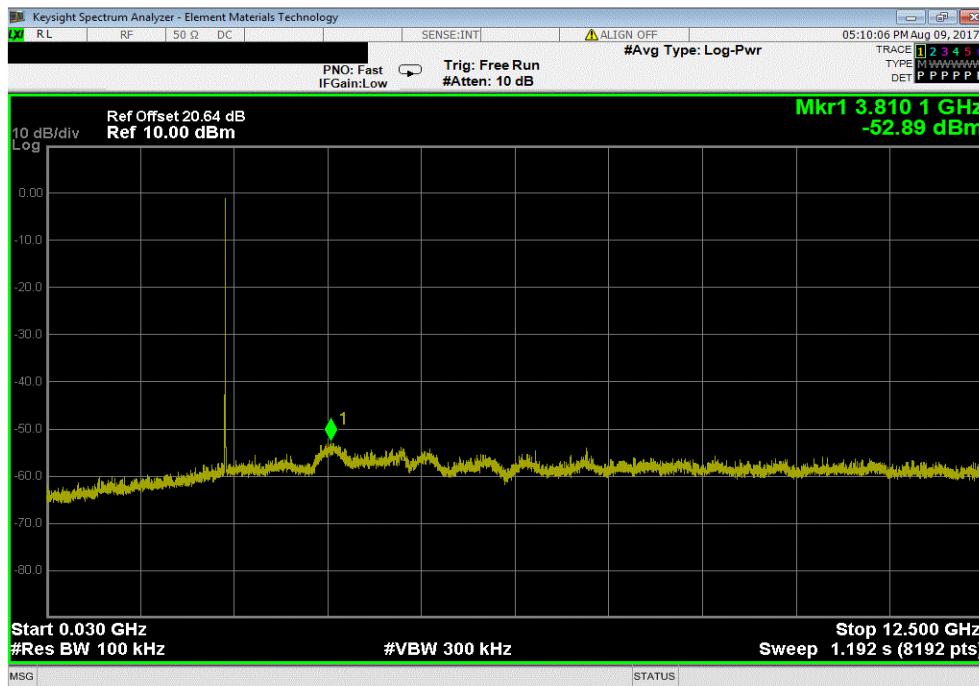


SPURIOUS CONDUCTED EMISSIONS



TbITx 2017.07.11 XMII 2017.02.08

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz		-52.71	-20	Pass

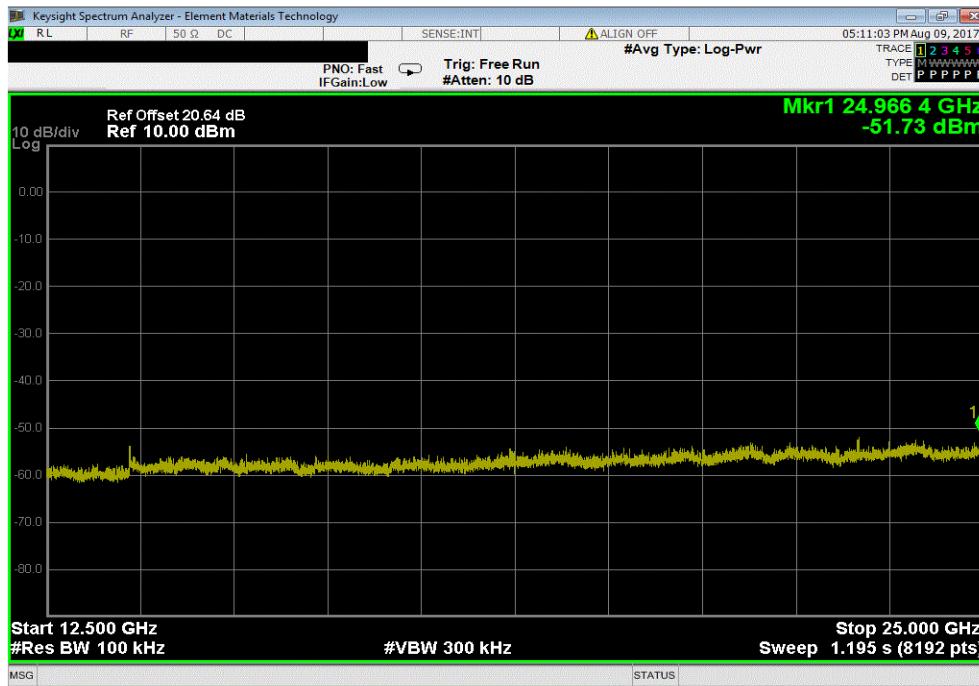

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
Fundamental		N/A	N/A	N/A




SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.07.11 XMII 2017.02.08

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz		-53.49	-20	Pass

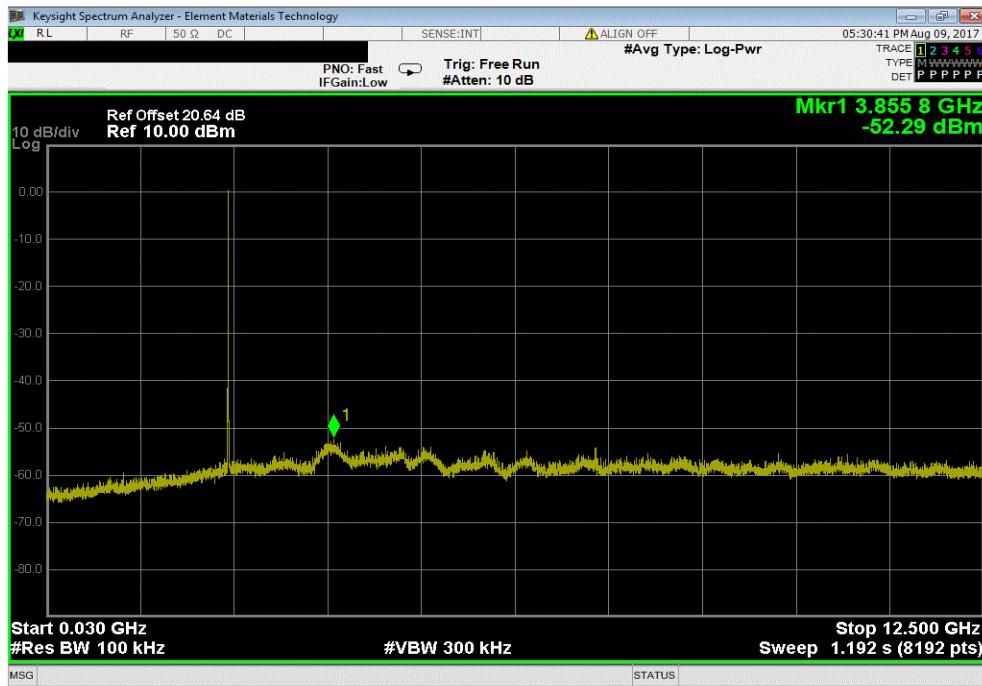

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz		-53.49	-20	Pass

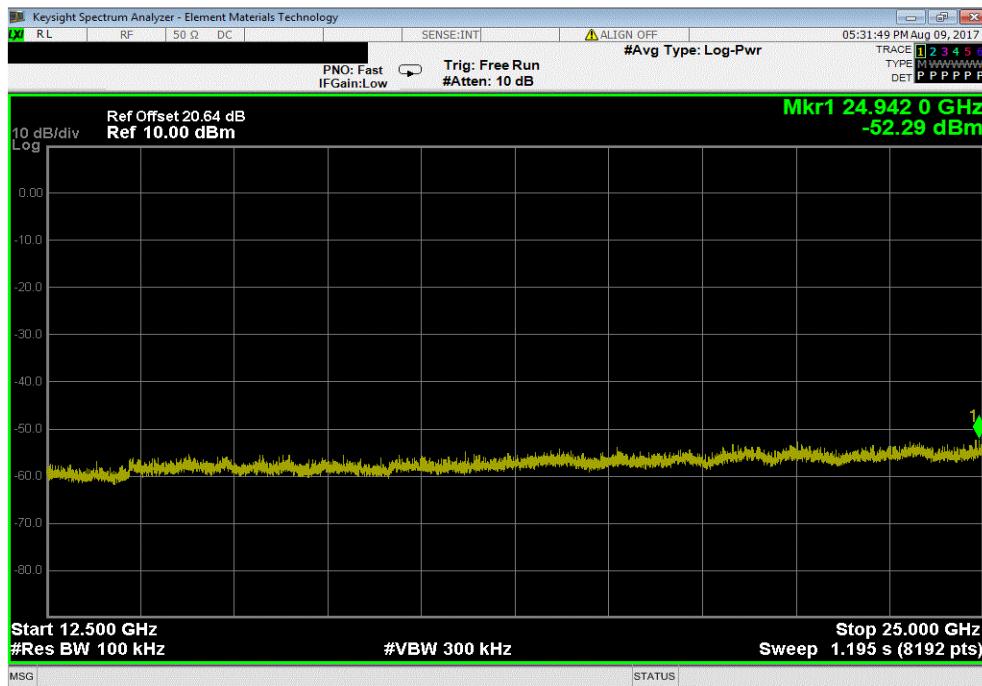

SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.07.11 XMII 2017.02.08

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
	Fundamental	N/A	N/A	N/A



Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
	30 MHz - 12.5 GHz	-50.41	-20	Pass

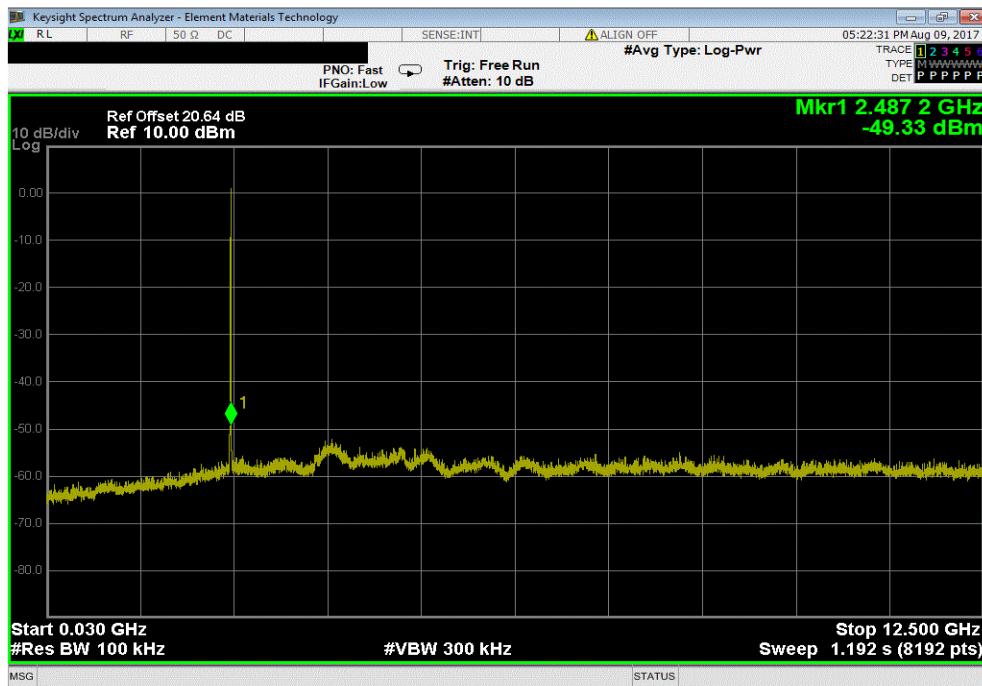

SPURIOUS CONDUCTED EMISSIONS



TbITx 2017.07.11 XMII 2017.02.08

BLE/GFSK High Channel, 2480 MHz			
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	-53.24	-20	Pass

