

NORTHWEST EMC

Garrett Metal Detectors


WR-1

FCC 15.207:2016

FCC 15.247:2016

2400-2483.5 MHz Transceiver

Report # GARR0027.8

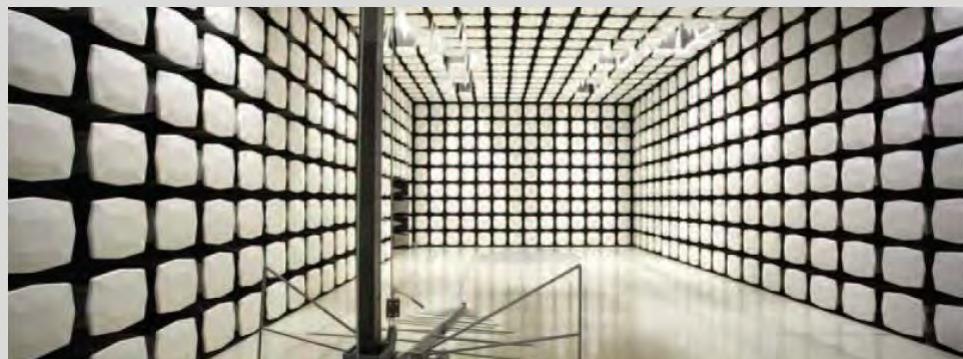

NVLAP Lab Code: 201049-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST

Last Date of Test: November 4, 2016

Garrett Metal Detectors

Model: WR-1

Radio Equipment Testing

Standards

Specification	Method
FCC 15.207:2016	
FCC 15.247:2016	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	Yes	Pass	
6.5, 6.6, 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
7.8.2	Carrier Frequency Separation	No	N/A	Not required for DTS devices.
7.8.3	Number of Hopping Frequencies	No	N/A	Not required for DTS devices.
7.8.4	Dwell Time	No	N/A	Not required for DTS devices.
7.8.6	Band Edge Compliance - Hopping Mode	No	N/A	Not required for DTS devices.
11.6	Duty Cycle	Yes	N/A	Characterization of radio operation.
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Jeremiah Darden, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<u>Test</u>	<u>+ MU</u>	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	4.9 dB	-4.9 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES




California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157




Test Setup Block Diagrams


Antenna Port Conducted Measurements

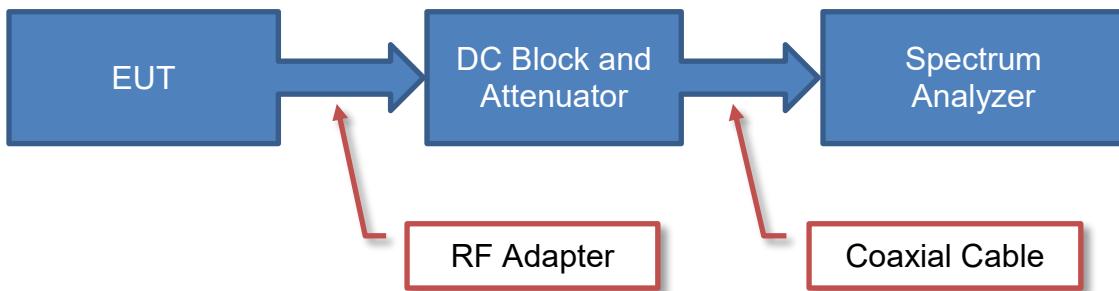

Near Field Test Fixture Measurements

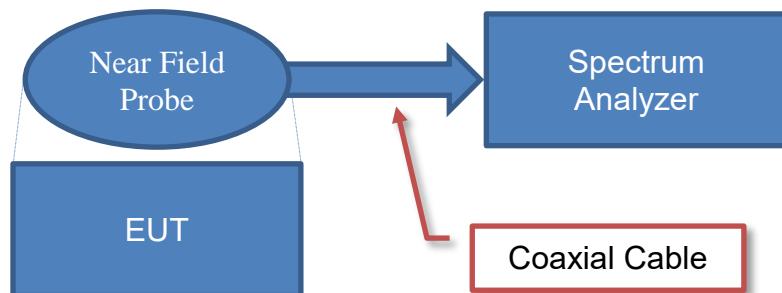

Spurious Radiated Emissions

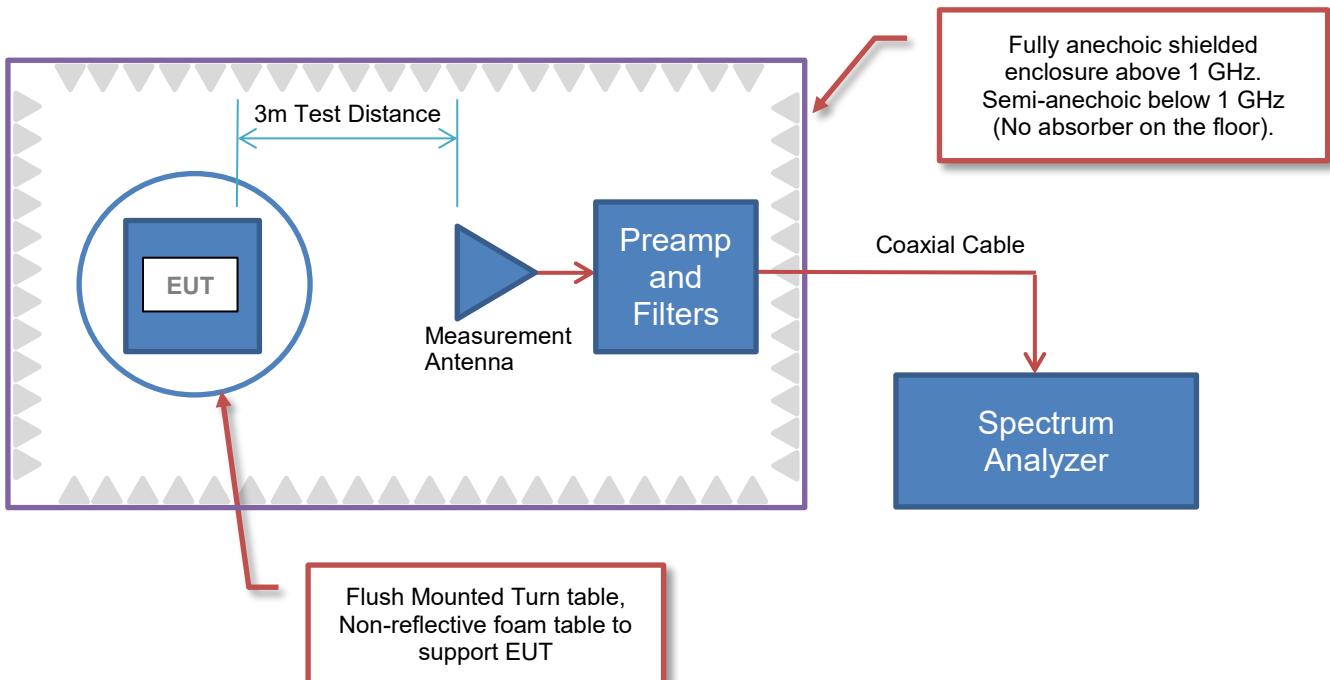

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Garrett Metal Detectors
Address:	1881 W. State Street
City, State, Zip:	Garland, TX 75042
Test Requested By:	Weldon Sanders
Model:	WR-1
First Date of Test:	October 26, 2016
Last Date of Test:	November 4, 2016
Receipt Date of Samples:	October 18, 2016
Equipment Design Stage:	Prototype
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Wireless Headphone pack using a 2.4 GHz radio that allows user to connect their own headphones to a wireless module. Wireless Headphone system consists of Model WT-1 transceiver and Model WR-1 transceiver which use the identical radio and antenna.

All radiated and conducted emissions, and output power were done on the WR-1 radio. Other antenna port direct connect tests were done on the WT-1 radio.

Testing Objective:

Seeking to demonstrate compliance under FCC 15.247 for operation in the 2400 - 2483.5 MHz Band.

CONFIGURATIONS

Configuration GARR0027- 1

Software/Firmware Running during test	
Description	Version
PurePath Wireless Commander - Texas Instruments	1.0.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Transmitter Radio Module (Direct Connect)	Garrett Metal Detectors	WT-1	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop Computer	Acer	ZG5	LUS360B171909157F02547
AC/DC Power Supply (Laptop)	Delta Electronics, Inc.	ADP-30JH B	202W91502BN
CC Debugger	Texas Instruments	Unknown	8484
Microprocessor Box	P&E Microcomputer Systems, Inc.	CYCLONE_ACP	15-065
AC/DC Power Supply (Microprocessor)	Freescale Semiconductor Japan Ltd.	3A-154WP06	None
Battery	Minamoto	LI-14500	None
Test Fixture	Unknown	None	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power (Laptop)	No	1.8m	No	AC Mains	AC/DC Power Supply (Laptop)
DC Power (Laptop)	No	1.5m	Yes	AC/DC Power Supply (Laptop)	Laptop Computer
DC Power (Microprocessor)	No	1.0m	Yes	AC/DC Power Supply (Microprocessor)	Microprocessor Box
USB (CC Debugger)	No	1.5m	No	Laptop Computer	CC Debugger
Ribbon Cable (Processor)	No	0.5m	No	Test Fixture	Microprocessor Box
Ribbon Cable (Transmitter)	No	0.5m	No	Test Fixture	CC Debugger
Battery Power	No	0.1m	No	Battery	Radio Module

CONFIGURATIONS

Configuration GARR0027- 2

Software/Firmware Running during test	
Description	Version
PurePath Wireless Commander - Texas Instruments	1.0.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Receiver Radio Module (Direct Connect)	Garrett Metal Detectors	WR-1	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop Computer	Acer	ZG5	LUS360B171909157F02547
AC/DC Power Supply (Laptop)	Delta Electronics, Inc.	ADP-30JH B	202W91502BN
CC Debugger	Texas Instruments	Unknown	8484
Battery	Minamoto	LI-14500	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power (Laptop)	No	1.8m	No	AC Mains	AC/DC Power Supply (Laptop)
DC Power (Laptop)	No	1.5m	Yes	AC/DC Power Supply (Laptop)	Laptop Computer
USB (CC Debugger)	No	1.5m	No	Laptop Computer	CC Debugger
Ribbon Cable (Receiver)	No	0.5m	No	CC Debugger	Radio Module
Battery Power	No	0.1m	No	Battery	Radio Module

CONFIGURATIONS

Configuration GARR0027- 4

Software/Firmware Running during test	
Description	Version
PurePath Wireless Commander - Texas Instruments	1.0.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Receiver Radio Module (Radiated)	Garrett Metal Detectors	WR-1	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
CC Debugger	Texas Instruments	Unknown	8484
Battery	Minamoto	LI-14500	None

Remote Equipment Outside of Test Setup Boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
Laptop Computer	Acer	ZG5	LUS360B171909157F02547	
AC/DC Power Supply (Laptop)	Delta Electronics, Inc.	ADP-30JH B	202W91502BN	

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power (Laptop)	No	1.8m	No	AC Mains	AC/DC Power Supply (Laptop)
DC Power (Laptop)	No	1.5m	Yes	AC/DC Power Supply (Laptop)	Laptop Computer
USB (CC Debugger)	No	1.5m	No	Laptop Computer	CC Debugger
Ribbon Cable (Receiver)	No	0.5m	No	CC Debugger	Radio Module
Battery Power	No	0.1m	No	Battery	Radio Module
USB Extension	No	5.0m	No	USB (CC Debugger)	Laptop Computer

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	10/26/2016	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	10/26/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	10/26/2016	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	10/26/2016	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	10/26/2016	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	11/3/2016	Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	11/4/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

POWERLINE CONDUCTED EMISSIONS

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Receiver	Rohde & Schwarz	ESCI	ARF	6/22/2016	6/22/2017
Cable - Conducted Cable Assembly	Northwest EMC	TXA, HHZ, TQR	TXAA	5/17/2016	5/17/2017
LISN	Solar Electronics	9252-50-R-24-BNC	LJK	9/21/2016	9/21/2017
LISN	Solar Electronics	9252-50-R-24-BNC	LJL	9/21/2016	9/21/2017

MEASUREMENT UNCERTAINTY

Description			
Expanded k=2	2.4 dB		-2.4 dB

CONFIGURATIONS INVESTIGATED

GARR0027-4

MODES INVESTIGATED

Transmitting at Mid Channel 2445 MHz

POWERLINE CONDUCTED EMISSIONS

EUT:	WR-1	Work Order:	GARR0027
Serial Number:	None	Date:	11/03/2016
Customer:	Garrett Metal Detectors	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	47.8%
Customer Project:	None	Bar. Pressure:	1026 mb
Tested By:	Jonathan Kiefer	Job Site:	TX01
Power:	USB via 230VAC/50Hz	Configuration:	GARR0027-4

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	20	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	----	-------	-----------	-----------------------------	---

COMMENTS



Testing the Receiver unit in Transmit Mode with TX Power setting of 5dBm.

EUT OPERATING MODES

Transmitting at Mid Channel 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

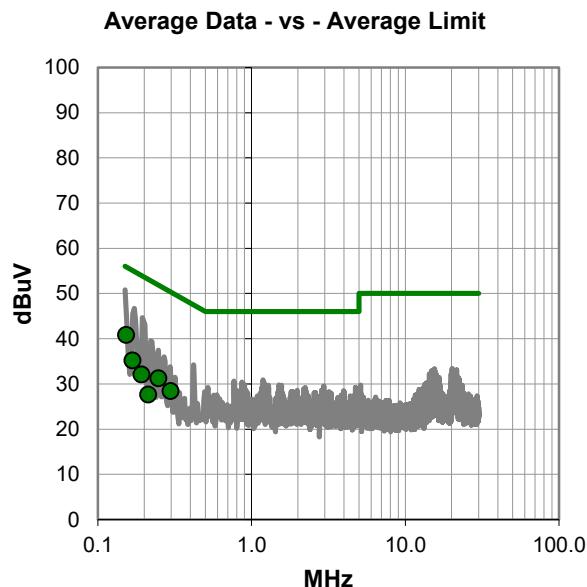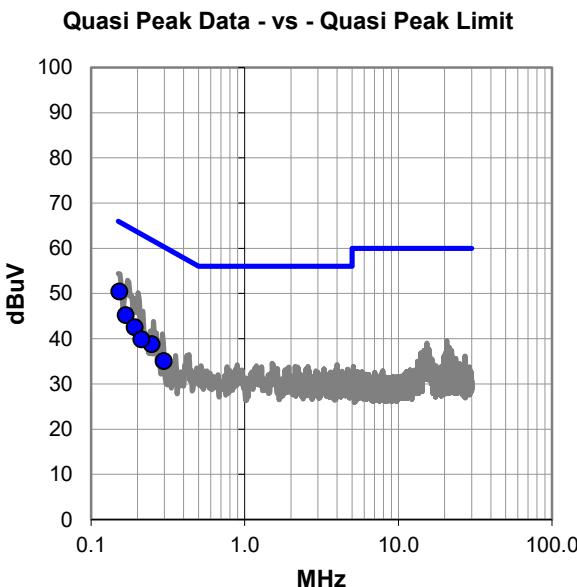

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #20

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.153	30.5	19.9	50.4	65.9	-15.5
0.168	25.3	19.9	45.2	65.0	-19.8
0.192	22.6	19.9	42.5	63.9	-21.4
0.248	18.9	19.9	38.8	61.8	-23.0
0.213	19.9	19.9	39.8	63.1	-23.3
0.298	15.1	19.9	35.0	60.3	-25.3

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.153	20.9	19.9	40.8	55.9	-15.1
0.168	15.3	19.9	35.2	55.0	-19.8
0.248	11.3	19.9	31.2	51.8	-20.6
0.192	12.2	19.9	32.1	53.9	-21.8
0.298	8.5	19.9	28.4	50.3	-21.9
0.213	7.7	19.9	27.6	53.1	-25.5

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	WR-1	Work Order:	GARR0027
Serial Number:	None	Date:	11/03/2016
Customer:	Garrett Metal Detectors	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	47.8%
Customer Project:	None	Bar. Pressure:	1026 mb
Tested By:	Jonathan Kiefer	Job Site:	TX01
Power:	USB via 230VAC/50Hz	Configuration:	GARR0027-4

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	21	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	----	-------	---------	-----------------------------	---

COMMENTS



Testing the Receiver unit in Transmit Mode with TX Power setting of 5dBm.

EUT OPERATING MODES

Transmitting at Mid Channel 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

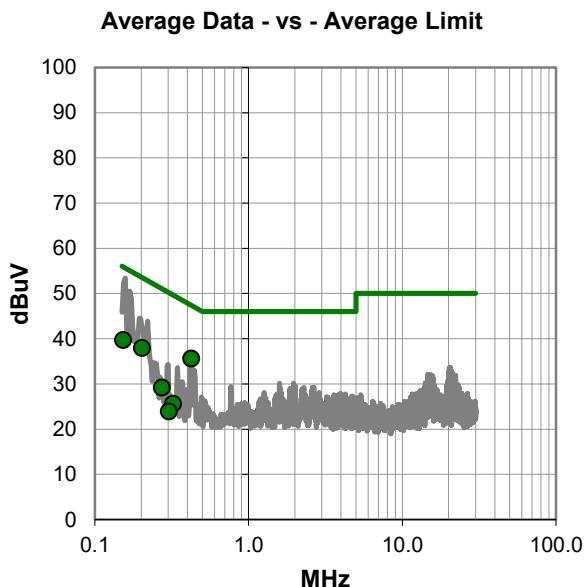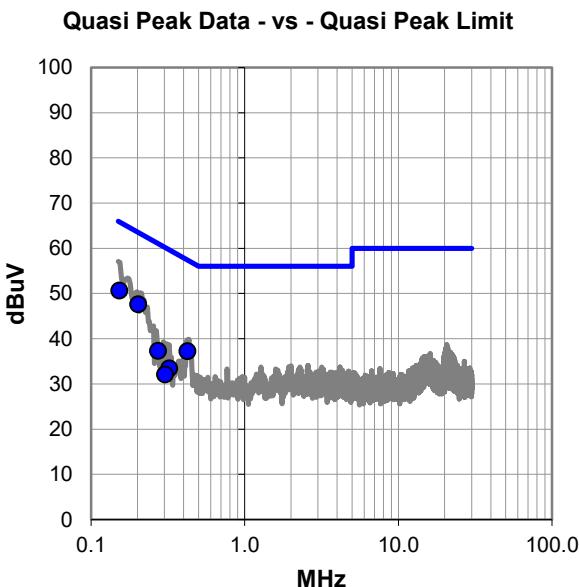

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #21

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.153	30.7	19.9	50.6	65.9	-15.3
0.203	27.7	19.9	47.6	63.5	-15.9
0.424	17.3	19.9	37.2	57.4	-20.2
0.273	17.5	19.8	37.3	61.0	-23.7
0.322	13.6	19.8	33.4	59.6	-26.2
0.303	12.2	19.9	32.1	60.2	-28.1

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.424	15.7	19.9	35.6	47.4	-11.8
0.203	18.0	19.9	37.9	53.5	-15.6
0.153	19.8	19.9	39.7	55.9	-16.2
0.273	9.4	19.8	29.2	51.0	-21.8
0.322	5.8	19.8	25.6	49.6	-24.0
0.303	4.0	19.9	23.9	50.2	-26.3

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	WR-1	Work Order:	GARR0027
Serial Number:	None	Date:	11/03/2016
Customer:	Garrett Metal Detectors	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	47.8%
Customer Project:	None	Bar. Pressure:	1026 mb
Tested By:	Jonathan Kiefer	Job Site:	TX01
Power:	USB via 100VAC/50Hz	Configuration:	GARR0027-4

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	22	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	----	-------	-----------	-----------------------------	---

COMMENTS



Testing the Receiver unit in Transmit Mode with TX Power setting of 5dBm.

EUT OPERATING MODES

Transmitting at Mid Channel 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

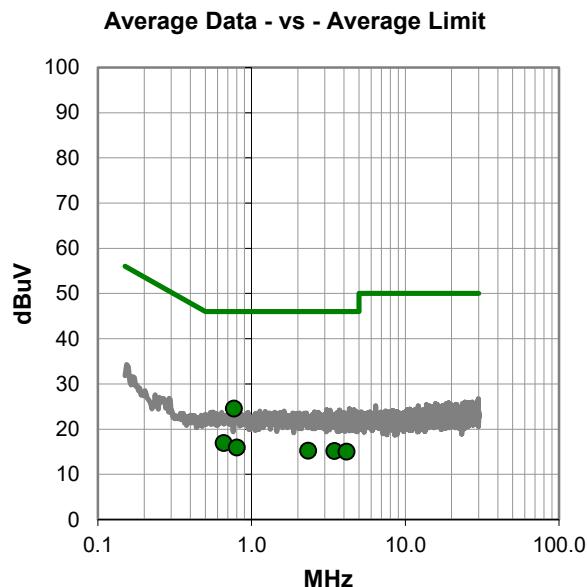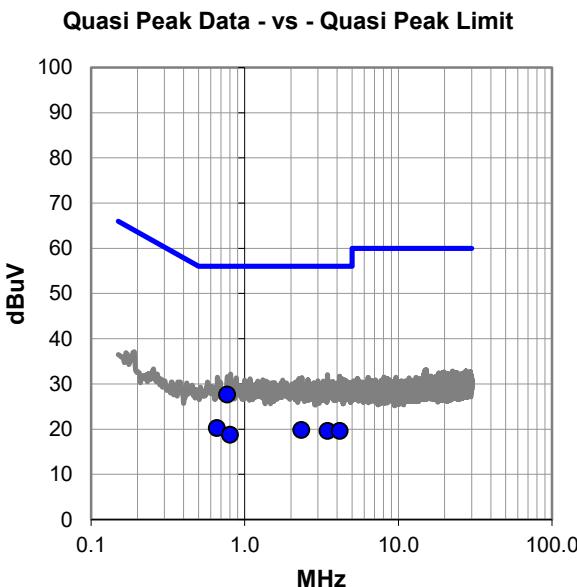

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #22

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (l)	Spec. Limit (l)	Margin (dB)
0.769	7.7	19.9	27.6	56.0	-28.4
0.661	0.3	19.9	20.2	56.0	-35.8
2.341	0.1	19.7	19.8	56.0	-36.2
3.468	-0.2	19.8	19.6	56.0	-36.4
4.156	-0.2	19.8	19.6	56.0	-36.4
0.801	-1.2	19.9	18.7	56.0	-37.3

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (l)	Spec. Limit (l)	Margin (dB)
0.769	4.6	19.9	24.5	46.0	-21.5
0.661	-3.0	19.9	16.9	46.0	-29.1
0.801	-4.0	19.9	15.9	46.0	-30.1
2.341	-4.5	19.7	15.2	46.0	-30.8
3.468	-4.7	19.8	15.1	46.0	-30.9
4.156	-4.8	19.8	15.0	46.0	-31.0

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	WR-1	Work Order:	GARR0027
Serial Number:	None	Date:	11/03/2016
Customer:	Garrett Metal Detectors	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	47.8%
Customer Project:	None	Bar. Pressure:	1026 mb
Tested By:	Jonathan Kiefer	Job Site:	TX01
Power:	USB via 100VAC/50Hz	Configuration:	GARR0027-4

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	23	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	----	-------	---------	-----------------------------	---

COMMENTS



Testing the Receiver unit in Transmit Mode with TX Power setting of 5dBm.

EUT OPERATING MODES

Transmitting at Mid Channel 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

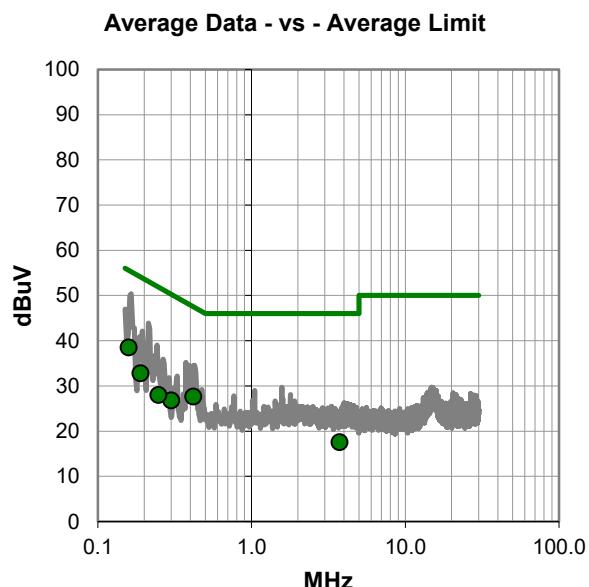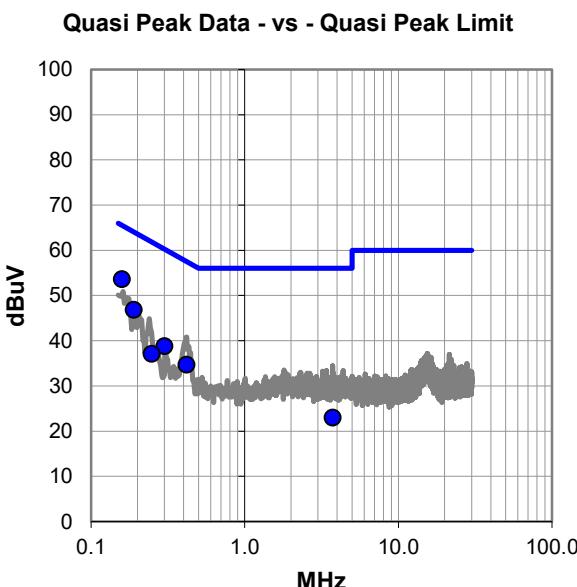

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #23

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.159	33.7	19.9	53.6	65.5	-11.9
0.190	26.9	19.9	46.8	64.0	-17.2
0.301	18.9	19.9	38.8	60.2	-21.4
0.419	14.8	19.9	34.7	57.5	-22.8
0.248	17.2	19.9	37.1	61.8	-24.7
3.734	3.3	19.7	23.0	56.0	-33.0

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.159	18.6	19.9	38.5	55.5	-17.0
0.419	7.7	19.9	27.6	47.5	-19.9
0.190	12.9	19.9	32.8	54.0	-21.2
0.301	6.9	19.9	26.8	50.2	-23.4
0.248	8.1	19.9	28.0	51.8	-23.8
3.734	-2.2	19.7	17.5	46.0	-28.5

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	WR-1	Work Order:	GARR0027
Serial Number:	None	Date:	11/03/2016
Customer:	Garrett Metal Detectors	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	47.8%
Customer Project:	None	Bar. Pressure:	1026 mb
Tested By:	Jonathan Kiefer	Job Site:	TX01
Power:	USB via 110VAC/60Hz	Configuration:	GARR0027-4

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	24	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	----	-------	-----------	-----------------------------	---

COMMENTS



Testing the Receiver unit in Transmit Mode with TX Power setting of 5dBm.

EUT OPERATING MODES

Transmitting at Mid Channel 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

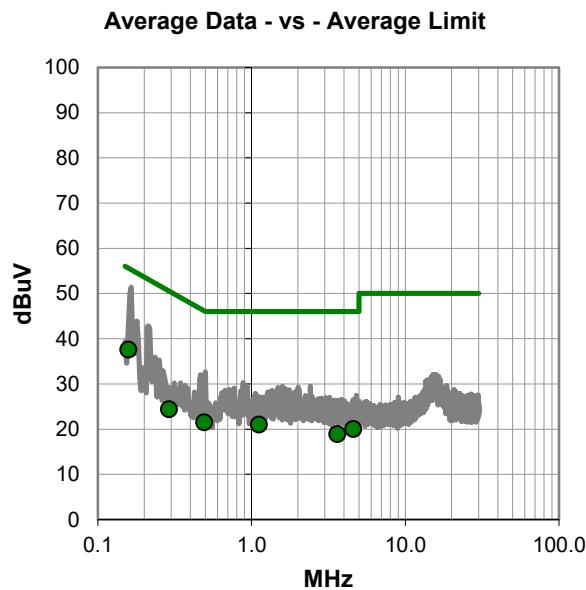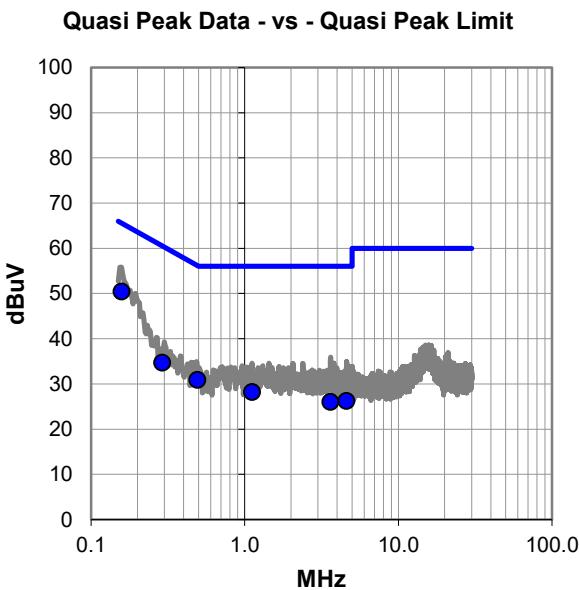

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #24

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.158	30.5	19.9	50.4	65.6	-15.2
0.493	11.1	19.8	30.9	56.1	-25.2
0.290	14.9	19.8	34.7	60.5	-25.8
1.118	8.5	19.7	28.2	56.0	-27.8
4.606	6.4	19.8	26.2	56.0	-29.8
3.610	6.2	19.8	26.0	56.0	-30.0

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.158	17.7	19.9	37.6	55.6	-18.0
0.493	1.7	19.8	21.5	46.1	-24.6
1.118	1.3	19.7	21.0	46.0	-25.0
4.606	0.2	19.8	20.0	46.0	-26.0
0.290	4.6	19.8	24.4	50.5	-26.1
3.610	-0.9	19.8	18.9	46.0	-27.1

CONCLUSION

Pass



Tested By

POWERLINE CONDUCTED EMISSIONS

EUT:	WR-1	Work Order:	GARR0027
Serial Number:	None	Date:	11/03/2016
Customer:	Garrett Metal Detectors	Temperature:	23.3°C
Attendees:	None	Relative Humidity:	47.8%
Customer Project:	None	Bar. Pressure:	1026 mb
Tested By:	Jonathan Kiefer	Job Site:	TX01
Power:	USB via 110VAC/60Hz	Configuration:	GARR0027-4

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

TEST PARAMETERS

Run #:	25	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	----	-------	---------	-----------------------------	---

COMMENTS



Testing the Receiver unit in Transmit Mode with TX Power setting of 5dBm.

EUT OPERATING MODES

Transmitting at Mid Channel 2445 MHz

DEVIATIONS FROM TEST STANDARD

None

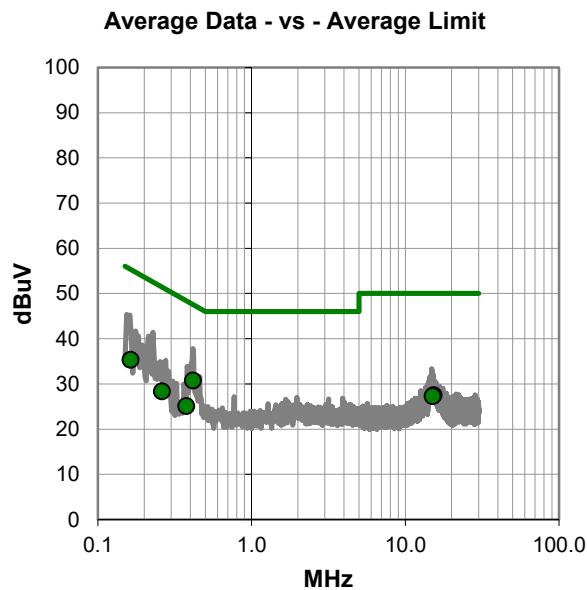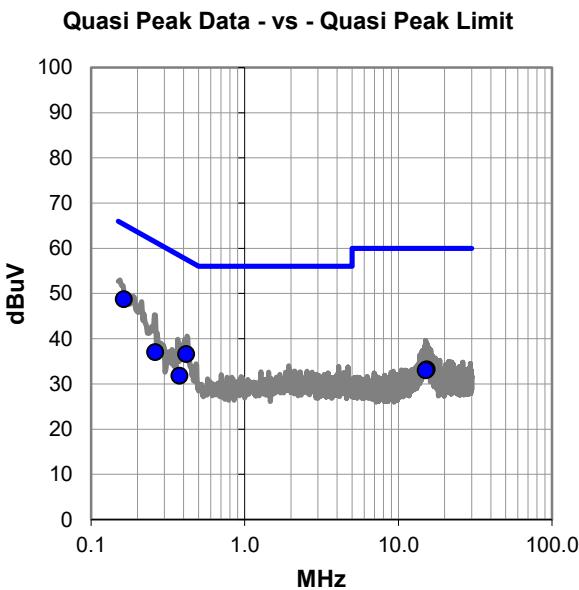

POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #25

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.163	28.8	19.9	48.7	65.3	-16.6
0.417	16.7	19.9	36.6	57.5	-20.9
0.261	17.1	19.9	37.0	61.4	-24.4
0.376	12.0	19.8	31.8	58.4	-26.6
15.313	12.9	20.3	33.2	60.0	-26.8
15.069	12.7	20.3	33.0	60.0	-27.0

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (()	Spec. Limit (()	Margin (dB)
0.417	10.8	19.9	30.7	47.5	-16.8
0.163	15.4	19.9	35.3	55.3	-20.0
15.313	7.2	20.3	27.5	50.0	-22.5
15.069	7.0	20.3	27.3	50.0	-22.7
0.261	8.4	19.9	28.3	51.4	-23.1
0.376	5.3	19.8	25.1	48.4	-23.3

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at Low Channel 2405 MHz, Mid Channel 2445 MHz, High Channel 2480 MHz

Transmitting at Low Channel 2405, High Channel 2480 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

GARR0027 - 4

FREQUENCY RANGE INVESTIGATED

Start Frequency | 30 MHz | Stop Frequency | 26500 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Amplifier - Pre-Amplifier	Miteq	JSDWK42-18004000-60-5P	PAM	11/20/2015	12 mo
Cable	Northwest EMC	18-40GHz	TXE	11/20/2015	12 mo
Antenna - Double Ridge	A.H. Systems, Inc.	SAS-574	AXW	8/5/2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	PAL	10/12/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AJG	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	PAK	10/18/2016	12 mo
Cable	Northwest EMC	8-18GHz	TXD	5/31/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AJF	NCR	0 mo
Filter - High Pass	Micro-Tronics	HPM50111	HGC	3/4/2016	12 mo
Attenuator	Weinschel Corp	4H-20	AWB	3/9/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAJ	5/31/2016	12 mo
Cable	Northwest EMC	1-8.2 GHz	TXC	5/31/2016	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJN	9/15/2016	24 mo
Filter - Low Pass	Micro-Tronics	LPM50004	HHV	8/5/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1551	PAH	9/12/2016	12 mo
Cable	Northwest EMC	RE 9kHz - 1GHz	TXB	5/31/2016	12 mo
Antenna - Biconilog	ETS Lindgren	3143B	AYF	4/13/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	10/4/2016	12 mo

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2016.07.22
EmiR5 2016.08.26

Work Order:	GARR0027	Date:	11/04/16	
Project:	None	Temperature:	23.2 °C	
Job Site:	TX02	Humidity:	48% RH	
Serial Number:	None	Barometric Pres.:	1028 mbar	Tested by: Jonathan Kiefer
EUT:	WR-1			
Configuration:	4			
Customer:	Garrett Metal Detectors			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Transmitting at Low Channel 2405, High Channel 2480 MHz			
Deviations:	None			
Comments:	Band Edge. Testing the Receiver Unit in Transmit Mode with a TX Power setting of 5dBm. Customer has stated that the EUT does not transmit while it is charging.			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

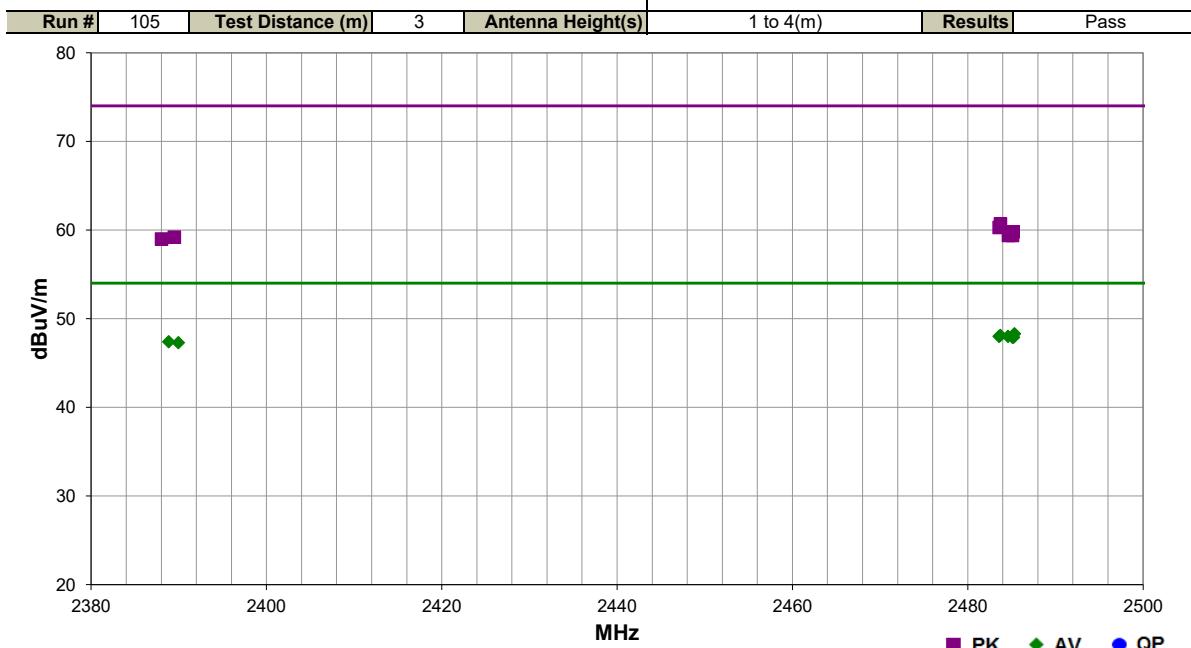

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2485.340	33.0	-4.7	1.3	0.0	3.0	20.0	Horz	AV	0.0	48.3	54.0	-5.7	High Ch, EUT Horizontal, 5dBm
2483.730	32.8	-4.7	1.2	266.0	3.0	20.0	Vert	AV	0.0	48.1	54.0	-5.9	High Ch, EUT Horizontal, 5dBm
2484.590	32.7	-4.7	1.2	243.9	3.0	20.0	Horz	AV	0.0	48.0	54.0	-6.0	High Ch, EUT Vertical, 5dBm
2483.577	32.7	-4.7	1.2	340.9	3.0	20.0	Horz	AV	0.0	48.0	54.0	-6.0	High Ch, EUT On Side, 5dBm
2485.110	32.6	-4.7	3.9	134.0	3.0	20.0	Vert	AV	0.0	47.9	54.0	-6.1	High Ch, EUT Vertical, 5dBm
2485.227	32.6	-4.7	1.3	177.9	3.0	20.0	Vert	AV	0.0	47.9	54.0	-6.1	High Ch, EUT On Side, 5dBm
2388.860	32.8	-5.4	1.3	178.9	3.0	20.0	Horz	AV	0.0	47.4	54.0	-6.6	Low Ch, EUT Horizontal, 5dBm
2389.953	32.7	-5.4	1.3	61.0	3.0	20.0	Vert	AV	0.0	47.3	54.0	-6.7	Low Ch, EUT Horizontal, 5dBm
2483.730	45.4	-4.7	1.3	0.0	3.0	20.0	Horz	PK	0.0	60.7	74.0	-13.3	High Ch, EUT Horizontal, 5dBm
2483.580	45.0	-4.7	1.3	177.9	3.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	High Ch, EUT On Side, 5dBm
2485.173	44.5	-4.7	1.2	340.9	3.0	20.0	Horz	PK	0.0	59.8	74.0	-14.2	High Ch, EUT On Side, 5dBm
2485.033	44.4	-4.7	1.2	243.9	3.0	20.0	Horz	PK	0.0	59.7	74.0	-14.3	High Ch, EUT Vertical, 5dBm
2485.103	44.1	-4.7	1.2	266.0	3.0	20.0	Vert	PK	0.0	59.4	74.0	-14.6	High Ch, EUT Horizontal, 5dBm
2484.643	44.1	-4.7	3.9	134.0	3.0	20.0	Vert	PK	0.0	59.4	74.0	-14.6	High Ch, EUT Vertical, 5dBm
2389.497	44.6	-5.4	1.3	61.0	3.0	20.0	Vert	PK	0.0	59.2	74.0	-14.8	Low Ch, EUT Horizontal, 5dBm
2388.020	44.4	-5.4	1.3	178.9	3.0	20.0	Horz	PK	0.0	59.0	74.0	-15.0	Low Ch, EUT Horizontal, 5dBm


SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2016.07.22
EmIR5 2016.08.26

Work Order:	GARR0027	Date:	11/04/16	
Project:	None	Temperature:	23.2 °C	
Job Site:	TX02	Humidity:	48% RH	
Serial Number:	None	Barometric Pres.:	1028 mbar	Tested by: Jonathan Kiefer
EUT:	WR-1			
Configuration:	4			
Customer:	Garrett Metal Detectors			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Transmitting at Low Channel 2405 MHz, Mid Channel 2445 MHz, High Channel 2480 MHz			
Deviations:	None			
Comments:	Harmonics. Testing the Receiver Unit in Transmit Mode with a TX Power setting of 5dBm. Customer has stated that the EUT does not transmit while it is charging.			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

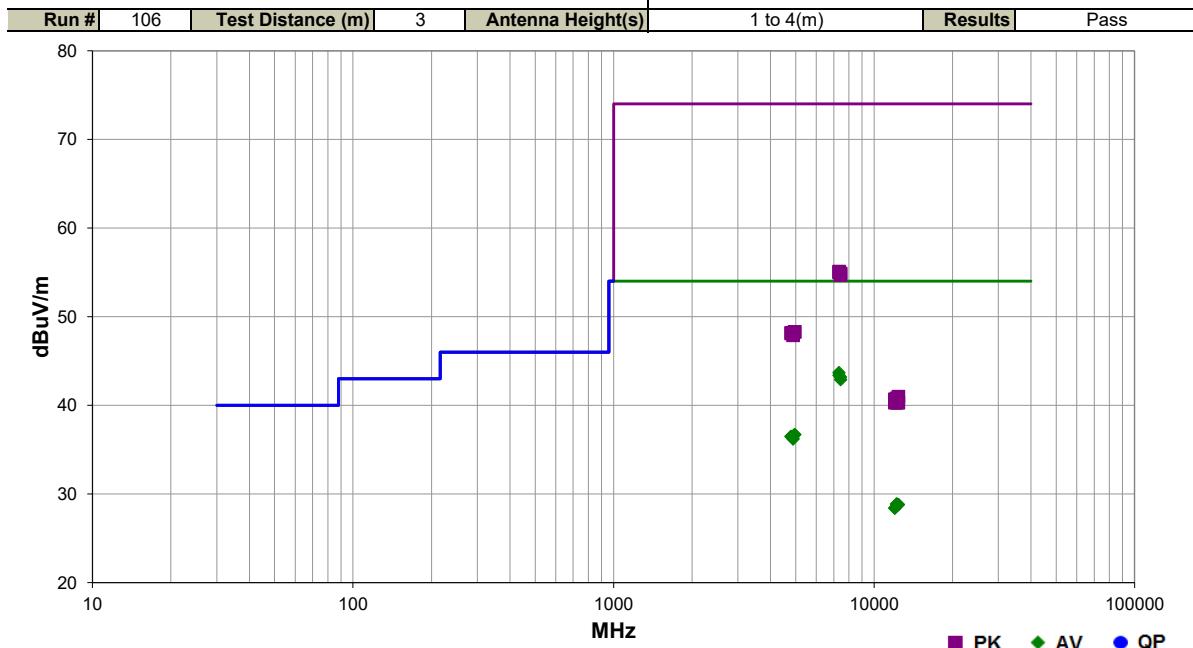

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7334.850	30.0	13.7	1.3	0.0	3.0	0.0	Horz	AV	0.0	43.7	54.0	-10.3	Mid Ch, EUT Horizontal, 5dBm
7336.942	29.7	13.7	1.2	268.9	3.0	0.0	Vert	AV	0.0	43.4	54.0	-10.6	Mid Ch, EUT Horizontal, 5dBm
7439.683	29.6	13.6	1.3	339.0	3.0	0.0	Horz	AV	0.0	43.2	54.0	-10.8	High Ch, EUT Horizontal, 5dBm
7442.267	29.3	13.6	1.2	4.9	3.0	0.0	Vert	AV	0.0	42.9	54.0	-11.1	High Ch, EUT Horizontal, 5dBm
4959.900	30.3	6.4	2.6	182.0	3.0	0.0	Horz	AV	0.0	36.7	54.0	-17.3	High Ch, EUT Horizontal, 5dBm
4962.475	30.3	6.4	1.2	158.0	3.0	0.0	Vert	AV	0.0	36.7	54.0	-17.3	High Ch, EUT Horizontal, 5dBm
4807.550	30.3	6.2	2.8	43.0	3.0	0.0	Horz	AV	0.0	36.5	54.0	-17.5	Low Ch, EUT Horizontal, 5dBm
4807.567	30.3	6.2	1.3	42.0	3.0	0.0	Vert	AV	0.0	36.5	54.0	-17.5	Low Ch, EUT Horizontal, 5dBm
4889.275	29.9	6.4	1.3	84.0	3.0	0.0	Vert	AV	0.0	36.3	54.0	-17.7	Mid Ch, EUT Horizontal, 5dBm
4889.750	29.8	6.4	1.3	45.0	3.0	0.0	Horz	AV	0.0	36.2	54.0	-17.8	Mid Ch, EUT Horizontal, 5dBm
7334.142	41.4	13.7	1.3	0.0	3.0	0.0	Horz	PK	0.0	55.1	74.0	-18.9	Mid Ch, EUT Horizontal, 5dBm
7335.308	41.3	13.7	1.2	268.9	3.0	0.0	Vert	PK	0.0	55.0	74.0	-19.0	Mid Ch, EUT Horizontal, 5dBm
7442.300	41.3	13.6	1.3	339.0	3.0	0.0	Horz	PK	0.0	54.9	74.0	-19.1	High Ch, EUT Horizontal, 5dBm
7439.900	41.1	13.6	1.2	4.9	3.0	0.0	Vert	PK	0.0	54.7	74.0	-19.3	High Ch, EUT Horizontal, 5dBm
12224.160	30.7	-1.8	1.2	357.0	3.0	0.0	Vert	AV	0.0	28.9	54.0	-25.1	Mid Ch, EUT Horizontal, 5dBm
12397.840	29.9	-1.1	1.3	100.9	3.0	0.0	Horz	AV	0.0	28.8	54.0	-25.2	High Ch, EUT Horizontal, 5dBm
12397.750	29.9	-1.1	1.2	64.9	3.0	0.0	Vert	AV	0.0	28.8	54.0	-25.2	High Ch, EUT Horizontal, 5dBm
12223.190	30.6	-1.8	1.3	114.0	3.0	0.0	Horz	AV	0.0	28.8	54.0	-25.2	Mid Ch, EUT Horizontal, 5dBm
12024.870	30.7	-2.3	1.3	321.0	3.0	0.0	Horz	AV	0.0	28.4	54.0	-25.6	Low Ch, EUT Horizontal, 5dBm
12026.290	30.7	-2.3	3.0	138.0	3.0	0.0	Vert	AV	0.0	28.4	54.0	-25.6	Low Ch, EUT Horizontal, 5dBm
4961.100	41.9	6.4	2.6	182.0	3.0	0.0	Horz	PK	0.0	48.3	74.0	-25.7	High Ch, EUT Horizontal, 5dBm
4959.175	41.9	6.4	1.2	158.0	3.0	0.0	Vert	PK	0.0	48.3	74.0	-25.7	High Ch, EUT Horizontal, 5dBm

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4809.783	42.0	6.2	1.3	42.0	3.0	0.0	Vert	PK	0.0	48.2	74.0	-25.8	Low Ch, EUT Horizontal, 5dBm
4891.167	41.8	6.4	1.3	84.0	3.0	0.0	Vert	PK	0.0	48.2	74.0	-25.8	Mid Ch, EUT Horizontal, 5dBm
4807.808	41.9	6.2	2.8	43.0	3.0	0.0	Horz	PK	0.0	48.1	74.0	-25.9	Low Ch, EUT Horizontal, 5dBm
4887.617	41.5	6.4	1.3	45.0	3.0	0.0	Horz	PK	0.0	47.9	74.0	-26.1	Mid Ch, EUT Horizontal, 5dBm
12399.860	42.1	-1.1	1.3	100.9	3.0	0.0	Horz	PK	0.0	41.0	74.0	-33.0	High Ch, EUT Horizontal, 5dBm
12226.540	42.6	-1.8	1.3	114.0	3.0	0.0	Horz	PK	0.0	40.8	74.0	-33.2	Mid Ch, EUT Horizontal, 5dBm
12023.220	43.0	-2.3	1.3	321.0	3.0	0.0	Horz	PK	0.0	40.7	74.0	-33.3	Low Ch, EUT Horizontal, 5dBm
12398.010	41.4	-1.1	1.2	64.9	3.0	0.0	Vert	PK	0.0	40.3	74.0	-33.7	High Ch, EUT Horizontal, 5dBm
12222.690	42.1	-1.8	1.2	357.0	3.0	0.0	Vert	PK	0.0	40.3	74.0	-33.7	Mid Ch, EUT Horizontal, 5dBm
12025.090	42.6	-2.3	3.0	138.0	3.0	0.0	Vert	PK	0.0	40.3	74.0	-33.7	Low Ch, EUT Horizontal, 5dBm

DUTY CYCLE

TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its output level as specified in the datasheet.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Fairview Microwave	SCK0963-60	TXF	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMM	2/25/2016	2/25/2017
Attenuator	Fairview Microwave	SA4018-20	TQY	2/25/2016	2/25/2017
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	3/15/2016	3/15/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.


The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH


EUT:	WT-1	Work Order:	GARR0027
Serial Number:	None	Date:	10/26/16
Customer:	Garrett Metal Detectors	Temperature:	23.3 °C
Attendees:	None	Humidity:	44.9% RH
Project:	None	Barometric Pres.:	1024 mbar
Tested by:	Jonathan Kiefer	Power:	Battery
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Testing the Transmitter Unit in Transmit Mode with TX Power setting of 5 dBm. This test was ran on a unit that had a similar radio as that of the receiver.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature	
		<i>Jonathan Kiefer</i>	
		Value	Limit (±)
		2.21 MHz	500 kHz
		2.19 MHz	500 kHz
		2.205 MHz	500 kHz
		Pass	
		Pass	
		Pass	
Low Channel, 2405 MHz			
Mid Channel, 2445 MHz			
High Channel, 2480 MHz			

OCCUPIED BANDWIDTH


Low Channel, 2405 MHz			Limit
Value	(\geq)	Result	
2.21 MHz	500 kHz	Pass	

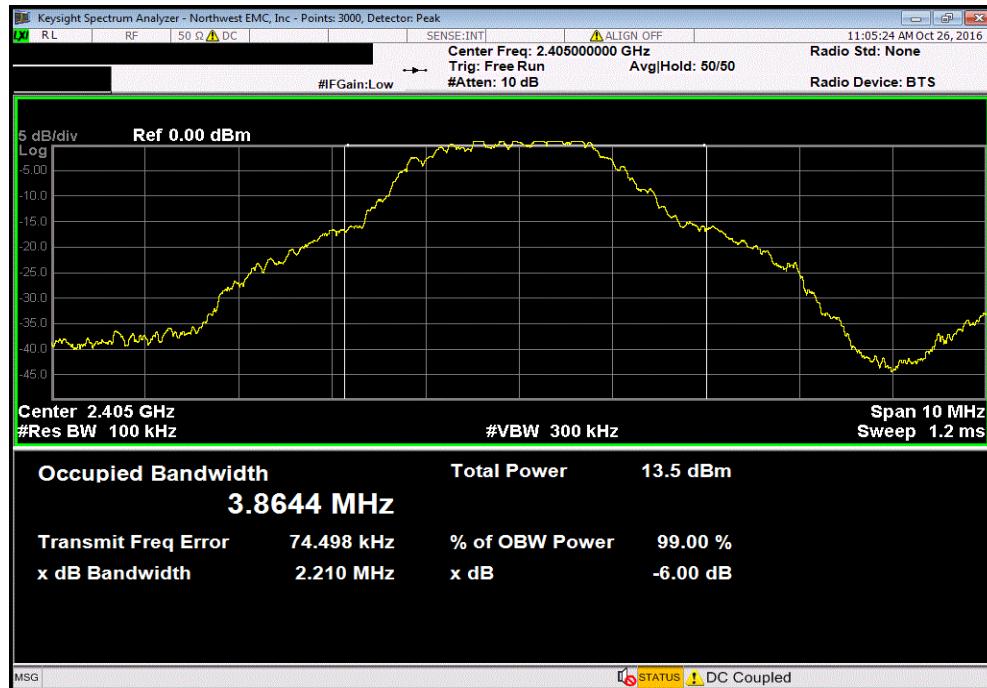

Mid Channel, 2445 MHz			Limit
Value	(\geq)	Result	
2.19 MHz	500 kHz	Pass	

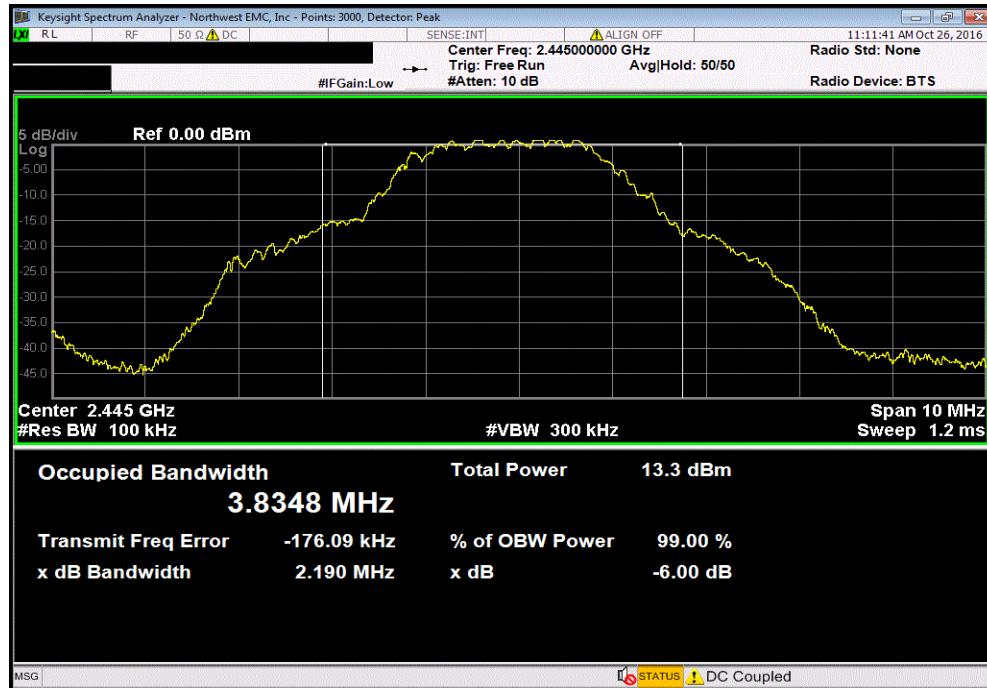

OCCUPIED BANDWIDTH

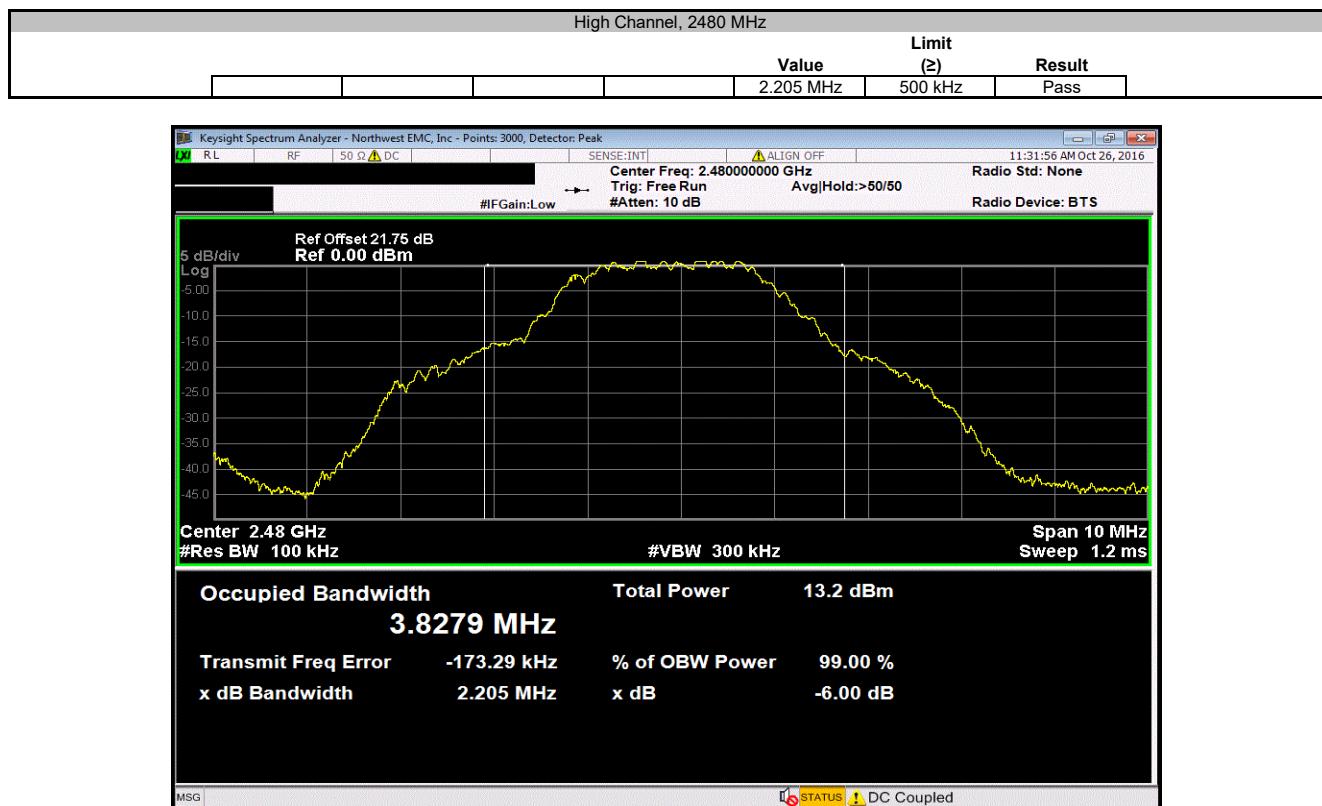

OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Fairview Microwave	SCK0963-60	TXF	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMM	2/25/2016	2/25/2017
Attenuator	Fairview Microwave	SA4018-20	TQY	2/25/2016	2/25/2017
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	3/15/2016	3/15/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio..


De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER


EUT:	WR-1	Work Order:	GARR0027												
Serial Number:	None	Date:	10/26/16												
Customer:	Garrett Metal Detectors	Temperature:	23.4 °C												
Attendees:	None	Humidity:	44.4% RH												
Project:	None	Barometric Pres.:	1024 mbar												
Tested by:	Jonathan Kiefer	Power:	Battery												
TEST SPECIFICATIONS		Test Method													
FCC 15.247:2016		ANSI C63.10:2013													
COMMENTS															
Testing the Receiver Unit in Transmit Mode with TX Power setting of 5 dBm.															
DEVIATIONS FROM TEST STANDARD															
None															
Configuration #	2	Signature	<i>Jonathan Kiefer</i>												
<table border="1"> <thead> <tr> <th>Value</th> <th>Limit (≤)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>2.582 mW</td> <td>1 W</td> <td>Pass</td> </tr> <tr> <td>2.8 mW</td> <td>1 W</td> <td>Pass</td> </tr> <tr> <td>2.806 mW</td> <td>1 W</td> <td>Pass</td> </tr> </tbody> </table>				Value	Limit (≤)	Result	2.582 mW	1 W	Pass	2.8 mW	1 W	Pass	2.806 mW	1 W	Pass
Value	Limit (≤)	Result													
2.582 mW	1 W	Pass													
2.8 mW	1 W	Pass													
2.806 mW	1 W	Pass													
Low Channel, 2405 MHz Mid Channel, 2445 MHz High Channel, 2480 MHz															

OUTPUT POWER

Low Channel, 2405 MHz			Value	Limit	Result
			(<)		
			2.582 mW	1 W	Pass

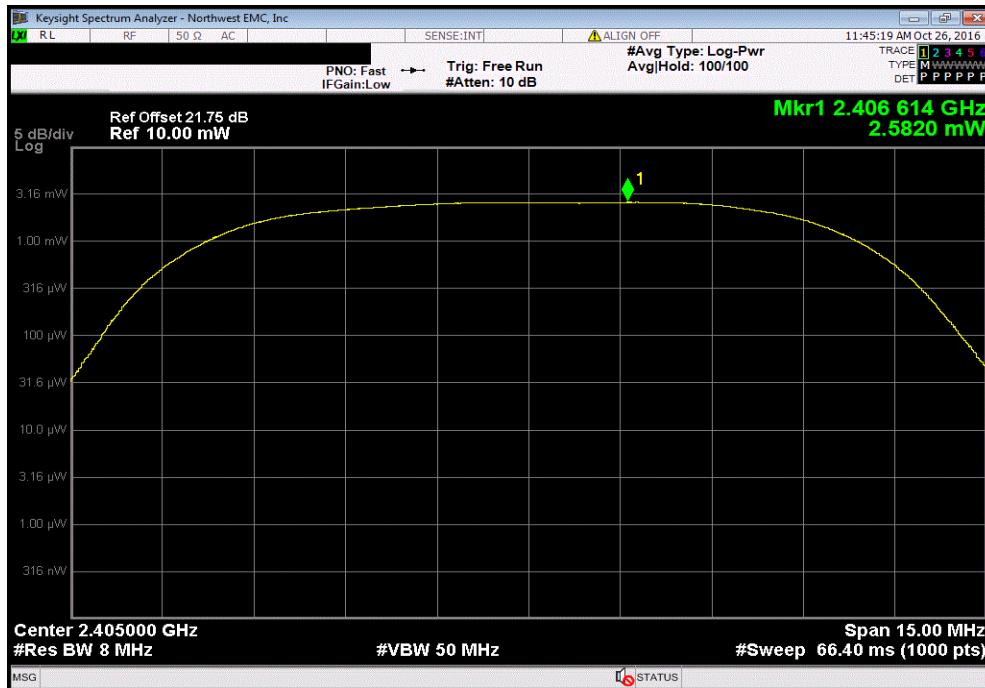


Mid Channel, 2445 MHz			Value	Limit	Result
			(<)		
			2.8 mW	1 W	Pass

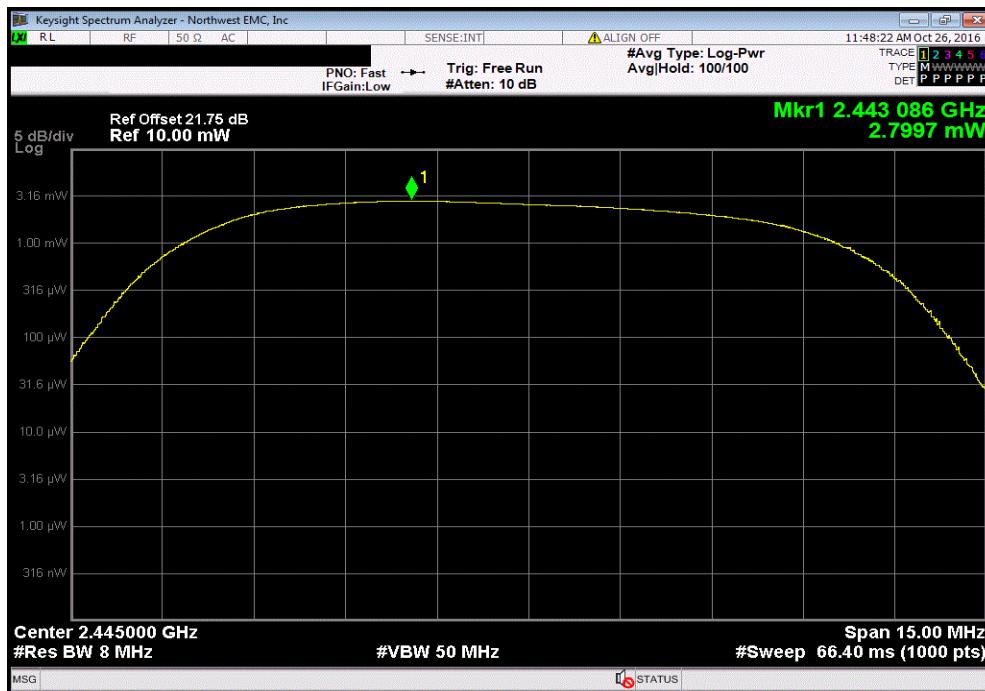

OUTPUT POWER

High Channel, 2480 MHz			Limit	
Value	(<)	Result		
2.806 mW	1 W	Pass		

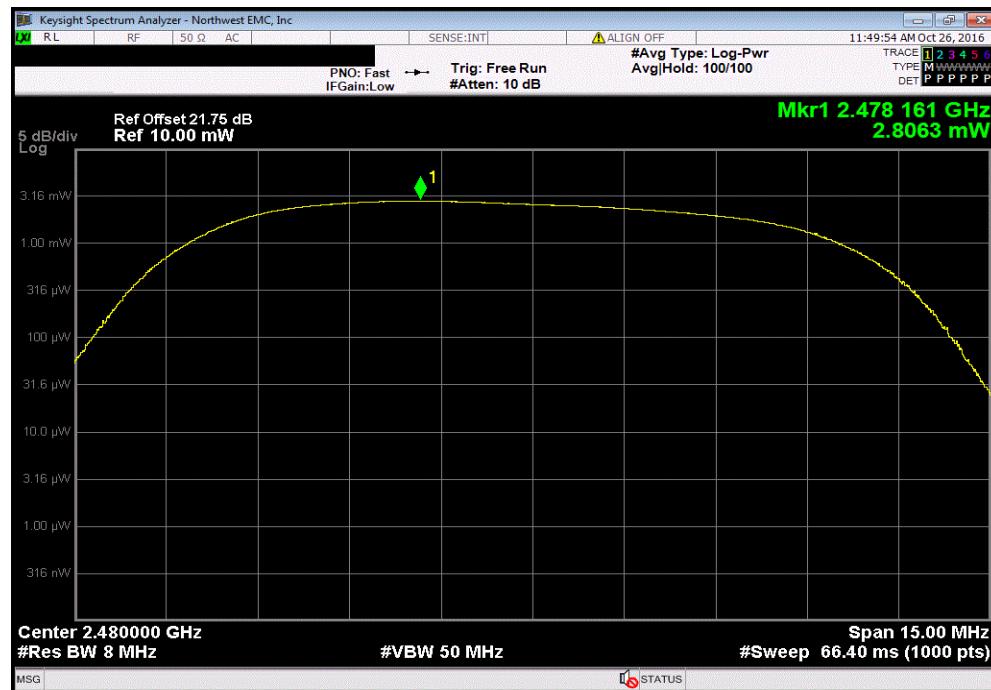

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Fairview Microwave	SCK0963-60	TXF	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMM	2/25/2016	2/25/2017
Attenuator	Fairview Microwave	SA4018-20	TQY	2/25/2016	2/25/2017
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	3/15/2016	3/15/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.


Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY


EUT:	WT-1	Work Order:	GARR0027
Serial Number:	None	Date:	10/26/16
Customer:	Garrett Metal Detectors	Temperature:	23.6 °C
Attendees:	None	Humidity:	44.9% RH
Project:	None	Barometric Pres.:	1024 mbar
Tested by:	Jonathan Kiefer	Power:	Battery
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Testing the Transmitter Unit in Transmit Mode with TX Power setting of 5 dBm.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature	
		<i>Jonathan Kiefer</i>	
		Value dBm/3kHz	Limit < dBm/3kHz
Low Channel, 2405 MHz		-11.808	8
Mid Channel, 2445 MHz		-12.312	8
High Channel, 2480 MHz		-12.54	8
		Pass	
		Pass	
		Pass	

POWER SPECTRAL DENSITY

Low Channel, 2405 MHz				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-11.808	8	Pass

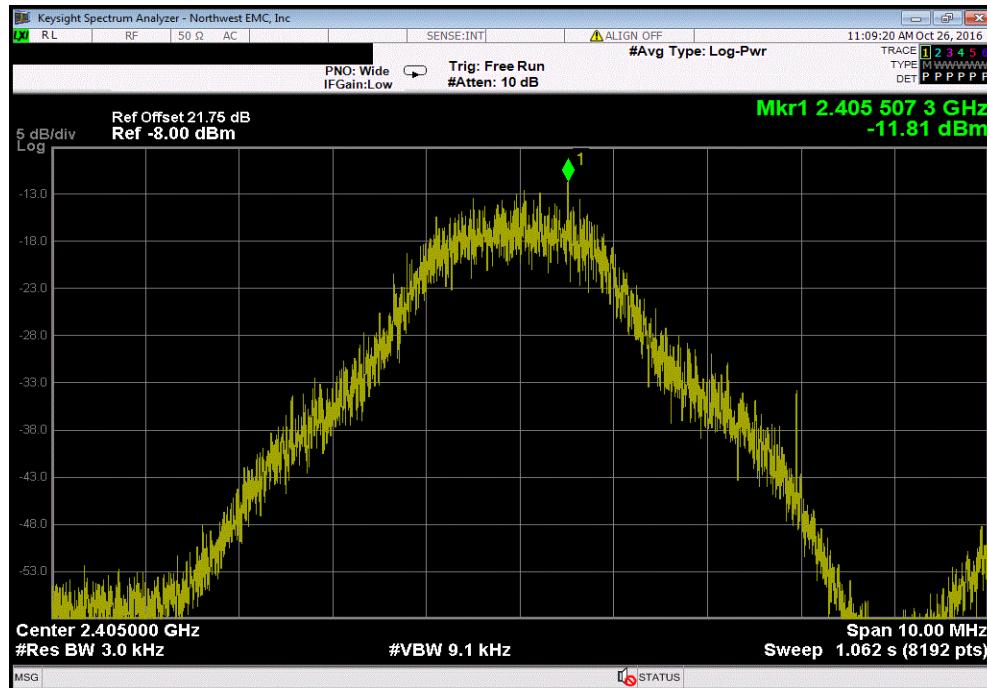


Mid Channel, 2445 MHz				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-12.312	8	Pass

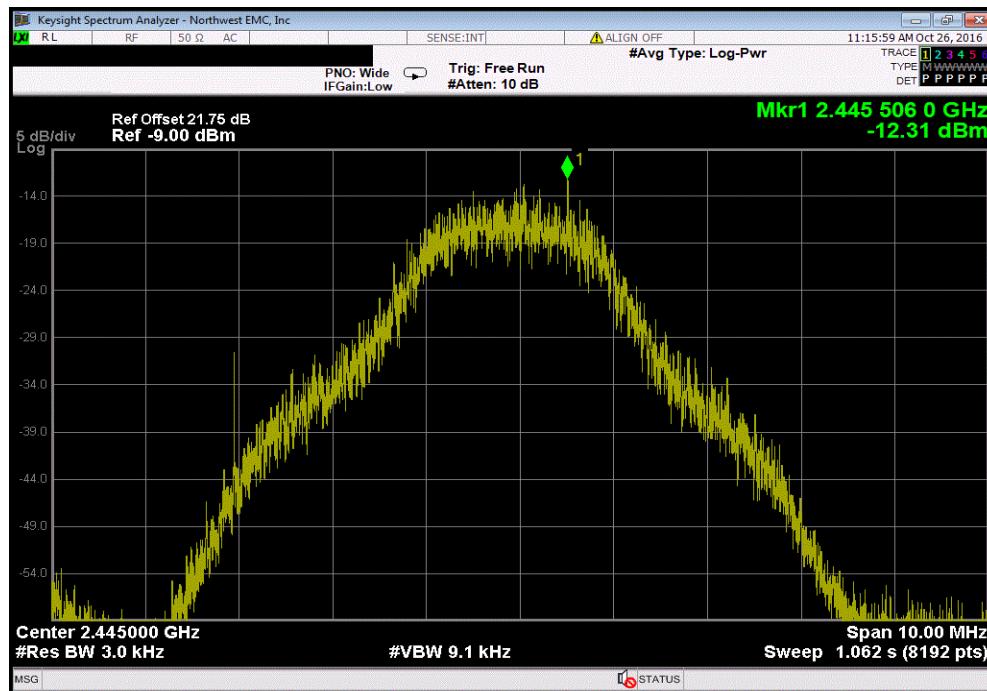

POWER SPECTRAL DENSITY

High Channel, 2480 MHz				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-12.54	8	Pass

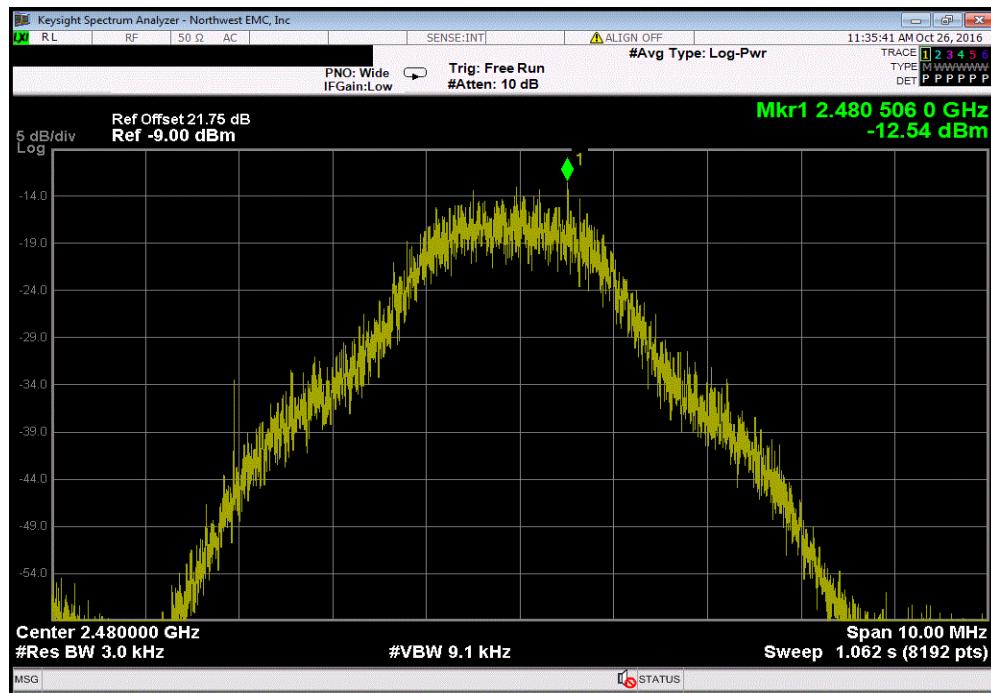

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4018-20	TQY	2/25/2016	2/25/2017
Block - DC	Fairview Microwave	SD3379	AMM	2/25/2016	2/25/2017
Cable	Fairview Microwave	SCK0963-60	TXF	10/24/2016	10/24/2017
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	3/15/2016	3/15/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE


EUT:	WT-1	Work Order:	GARR0027
Serial Number:	None	Date:	10/26/16
Customer:	Garrett Metal Detectors	Temperature:	23.1 °C
Attendees:	None	Humidity:	44.5% RH
Project:	None	Barometric Pres.:	1024 mbar
Tested by:	Jonathan Kiefer	Power:	Battery
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Testing the Transmitter Unit in Transmit Mode with TX Power setting of 5 dBm.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature	
		<i>Jonathan Kiefer</i>	
		Value (dBc)	Limit ≤ (dBc)
Low Channel, 2405 MHz		-39.19	-20
High Channel, 2480 MHz		-42.1	-20
		Pass	
		Pass	

BAND EDGE COMPLIANCE

Low Channel, 2405 MHz			Value (dBc)	Limit ≤ (dBc)	Result
			-39.19	-20	Pass

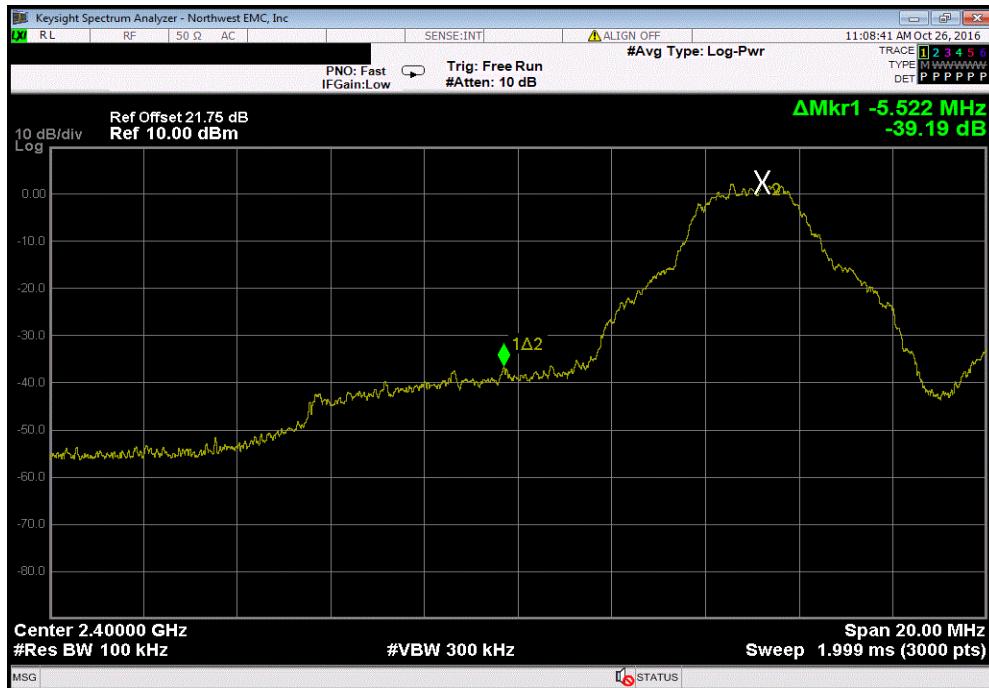

High Channel, 2480 MHz			Value (dBc)	Limit ≤ (dBc)	Result
			-42.1	-20	Pass

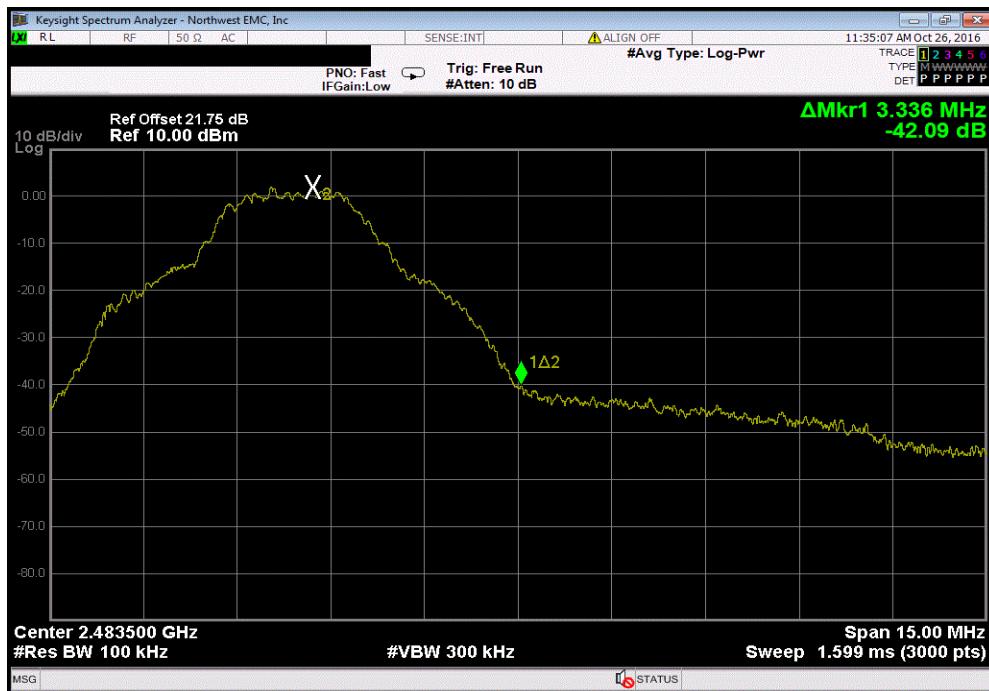

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Fairview Microwave	SCK0963-60	TXF	10/24/2016	10/24/2017
Block - DC	Fairview Microwave	SD3379	AMM	2/25/2016	2/25/2017
Attenuator	Fairview Microwave	SA4018-20	TQY	2/25/2016	2/25/2017
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	3/15/2016	3/15/2017
Generator - Signal	Agilent	E4422B	TGS	3/27/2015	3/27/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS


EUT:	WT-1	Work Order:	GARR0027		
Serial Number:	None	Date:	10/26/16		
Customer:	Garrett Metal Detectors	Temperature:	23.7 °C		
Attendees:	None	Humidity:	44.6% RH		
Project:	None	Barometric Pres.:	1024 mbar		
Tested by:	Jonathan Kiefer	Power:	Battery		
TEST SPECIFICATIONS		Test Method			
FCC 15.247:2016		ANSI C63.10:2013			
COMMENTS					
Testing the Transmitter Unit in Transmit Mode with TX Power setting of 5 dBm.					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	Jonathan Kiefer		
		Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result
Low Channel, 2405 MHz		Fundamental	N/A	N/A	N/A
Low Channel, 2405 MHz		30 MHz - 12.5 GHz	-51.44	-20	Pass
Low Channel, 2405 MHz		12.5 GHz - 25 GHz	-40.41	-20	Pass
Mid Channel, 2445 MHz		Fundamental	N/A	N/A	N/A
Mid Channel, 2445 MHz		30 MHz - 12.5 GHz	-51.45	-20	Pass
Mid Channel, 2445 MHz		12.5 GHz - 25 GHz	-40.71	-20	Pass
High Channel, 2480 MHz		Fundamental	N/A	N/A	N/A
High Channel, 2480 MHz		30 MHz - 12.5 GHz	-47.29	-20	Pass
High Channel, 2480 MHz		12.5 GHz - 25 GHz	-40.59	-20	Pass

SPURIOUS CONDUCTED EMISSIONS

Low Channel, 2405 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)		Result
	Fundamental			N/A	N/A	N/A




Low Channel, 2405 MHz				
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result	
30 MHz - 12.5 GHz	-51.44	-20	Pass	

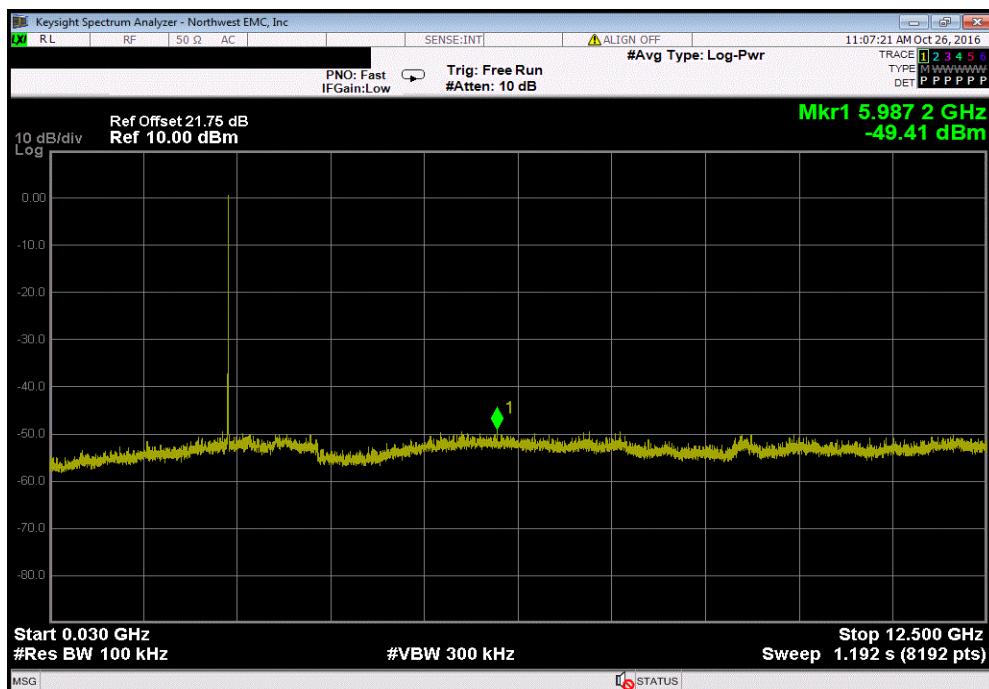


SPURIOUS CONDUCTED EMISSIONS

Low Channel, 2405 MHz			
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result
12.5 GHz - 25 GHz	-40.41	-20	Pass

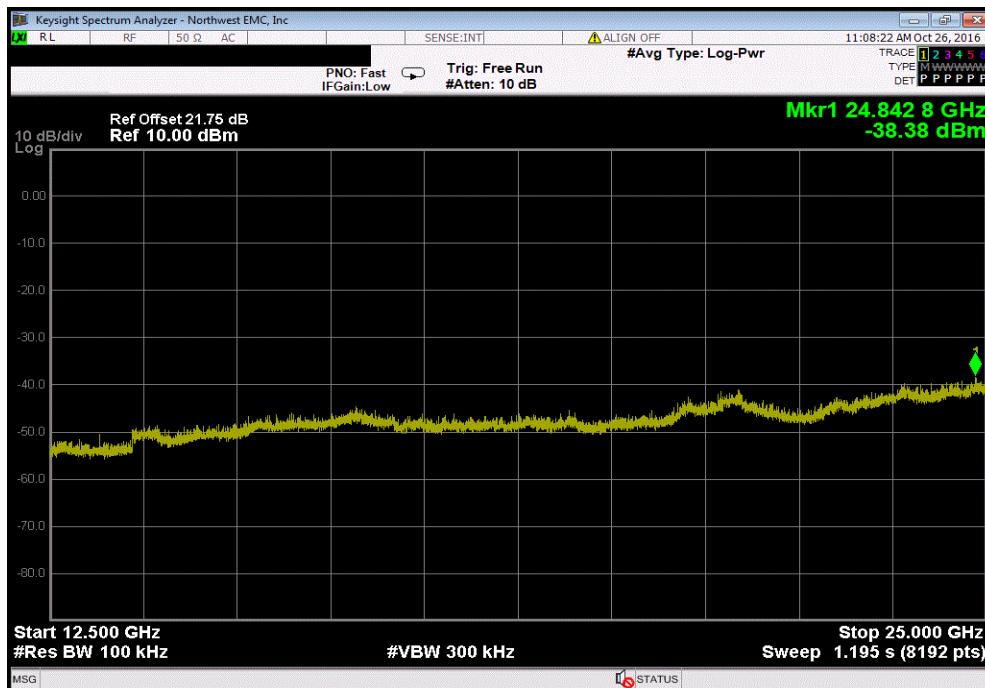


Mid Channel, 2445 MHz			
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result
Fundamental	N/A	N/A	N/A

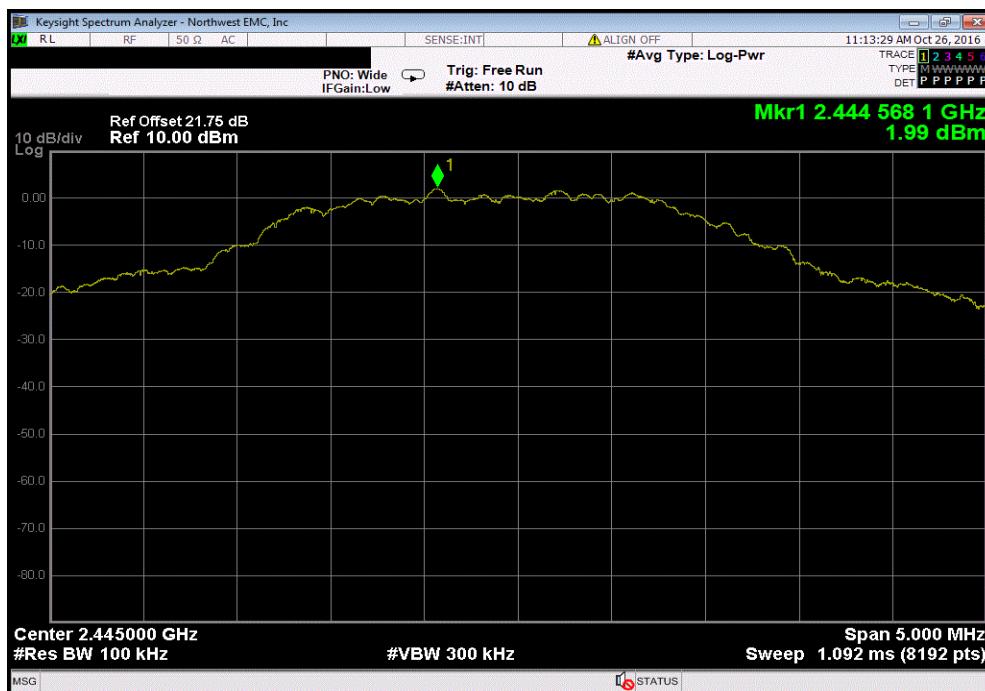


SPURIOUS CONDUCTED EMISSIONS

Mid Channel, 2445 MHz			
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result
30 MHz - 12.5 GHz	-51.45	-20	Pass

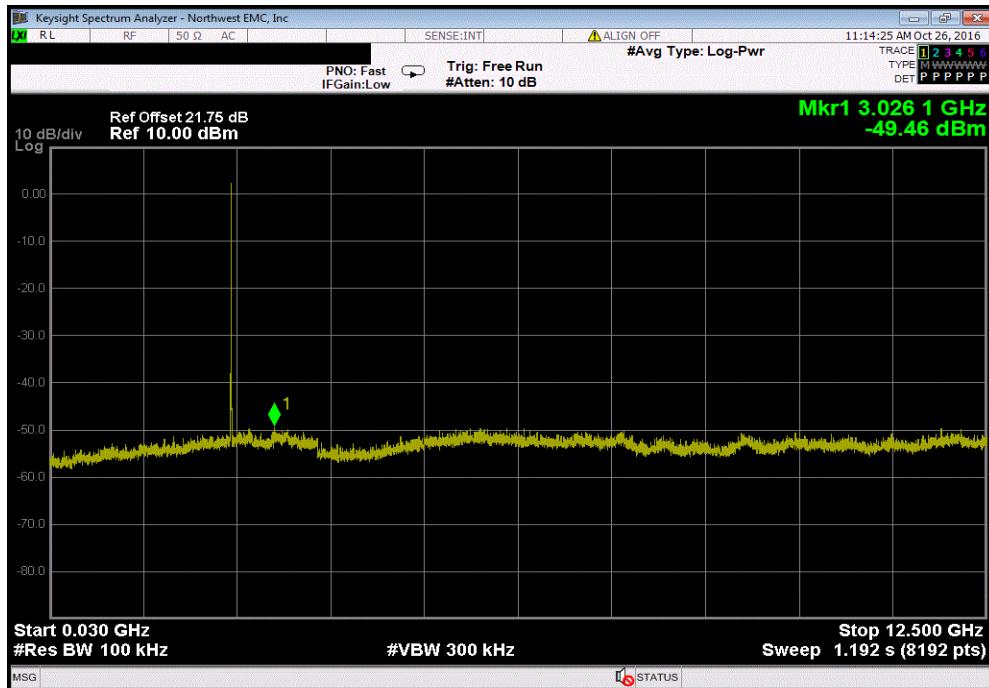


Mid Channel, 2445 MHz			
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result
12.5 GHz - 25 GHz	-40.71	-20	Pass

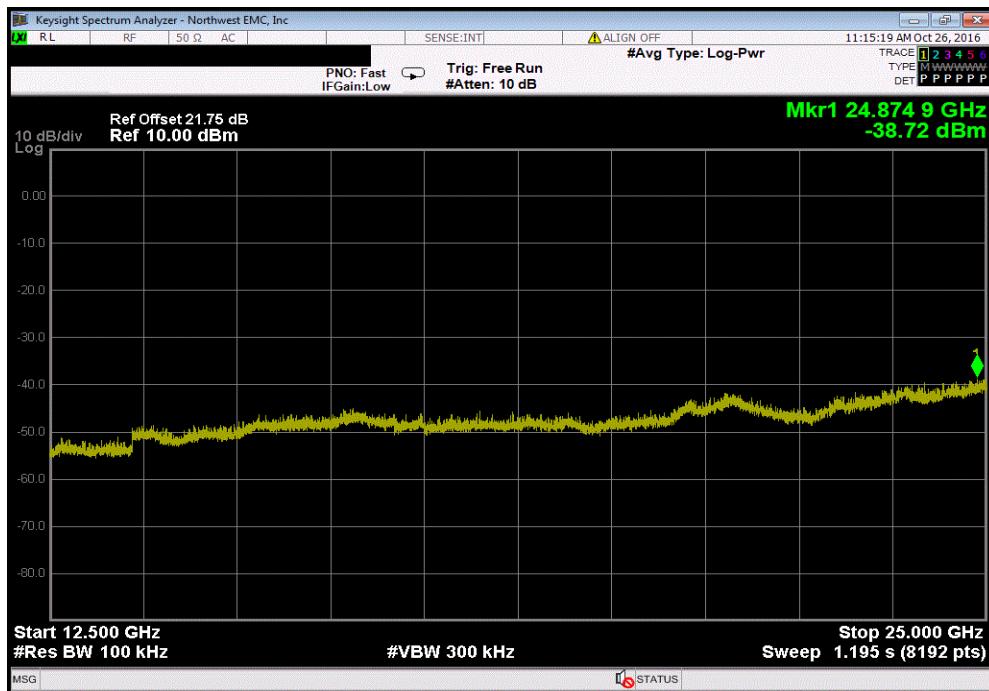


SPURIOUS CONDUCTED EMISSIONS

High Channel, 2480 MHz					
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result		
Fundamental	N/A	N/A	N/A		

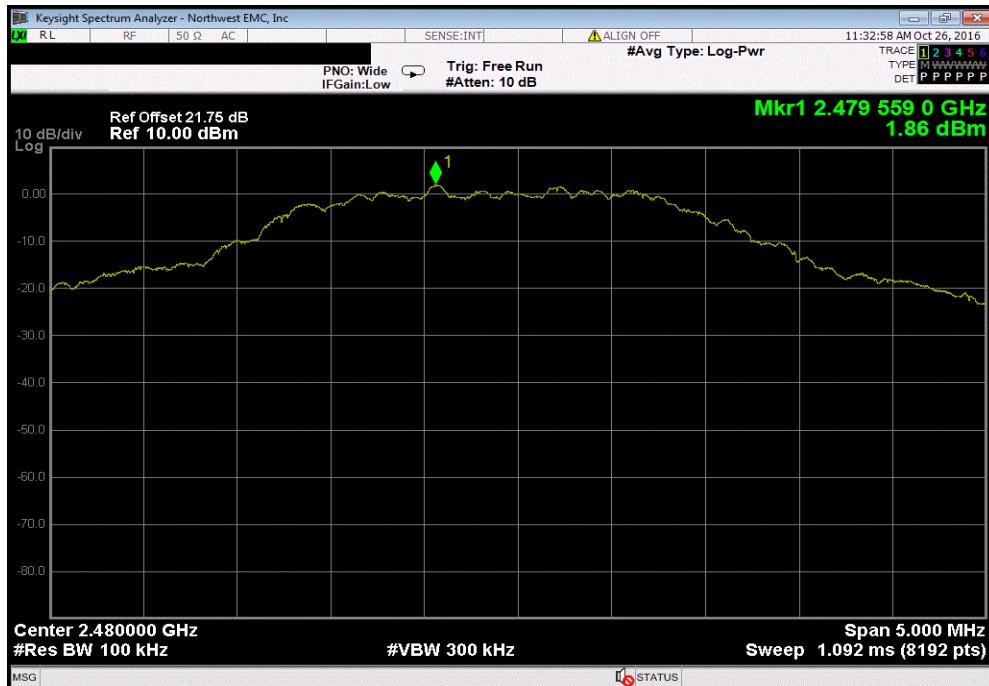

High Channel, 2480 MHz					
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result		
30 MHz - 12.5 GHz	-47.29	-20	Pass		

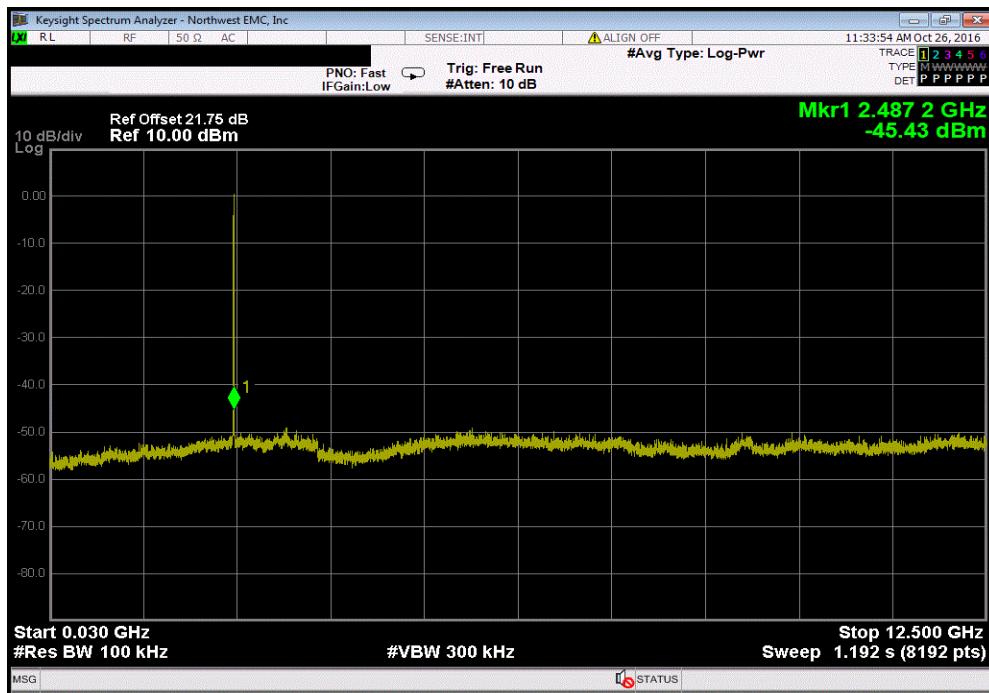

SPURIOUS CONDUCTED EMISSIONS

High Channel, 2480 MHz			
Frequency Range	Max Value (dBc)	Limit \leq (dBc)	Result
12.5 GHz - 25 GHz	-40.59	-20	Pass

