

TEST REPORT

Reference No. : WTD18S07119010W
FCC ID..... : DC9-IVPCMS
Applicant..... : OPTEX CO., LTD.
Address : 5-8-12, Ogoto Otsu-Shi, Shifa-Ken Japan 520-0101
Manufacturer : OPTEX CO., LTD.
Address : 5-8-12, Ogoto Otsu-Shi, Shifa-Ken Japan 520-0101
Product Name : Mobile Station
Model No. : IVPC-MS
Standards..... : FCC CFR47 Part 15 C Section 15.247:2018
Date of Receipt sample..... : 2018-07-24
Date of Test..... : 2018-07-25 to 2018-08-07
Date of Issue : 2018-08-08
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

Jack Wen

Jack Wen / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Accreditations for Conformity Assessment (International)			
Country/Region	Accreditation Body	Scope	Note
USA	International Services	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
2.1 TEST FACILITY.....	3
3 CONTENTS.....	4
4 REVISION HISTORY.....	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.....	7
5.2 DETAILS OF E.U.T.....	7
5.3 CHANNEL LIST.....	8
5.4 TEST MODE.....	9
6 EQUIPMENT USED DURING TEST.....	10
6.1 EQUIPMENTS LIST.....	10
6.2 MEASUREMENT UNCERTAINTY.....	11
6.3 TEST EQUIPMENT CALIBRATION.....	11
7 TEST SUMMARY.....	12
8 CONDUCTED EMISSION.....	13
8.1 E.U.T. OPERATION.....	13
8.2 EUT SETUP.....	13
8.3 MEASUREMENT DESCRIPTION.....	13
8.4 CONDUCTED EMISSION TEST RESULT.....	14
9 RADIATED EMISSIONS.....	16
9.1 EUT OPERATION.....	16
9.2 TEST SETUP.....	17
9.3 SPECTRUM ANALYZER SETUP.....	18
9.4 TEST PROCEDURE.....	19
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
9.6 SUMMARY OF TEST RESULTS.....	20
10 BAND EDGE MEASUREMENT.....	32
10.1 TEST PRODUCE.....	32
10.2 TEST RESULT.....	33
11 BANDWIDTH MEASUREMENT.....	37
11.1 TEST PROCEDURE:.....	37
11.2 TEST RESULT:.....	37
12 MAXIMUM OUTPUT POWER.....	44
12.1 TEST PROCEDURE:.....	44
12.2 TEST RESULT:.....	44
13 POWER SPECTRAL DENSITY.....	45
13.1 TEST PROCEDURE:.....	45
13.2 TEST RESULT:.....	45
14 ANTENNA REQUIREMENT.....	52
15 RF EXPOSURE.....	53
15.1 REQUIREMENTS.....	53
15.2 THE PROCEDURES / LIMIT.....	53
15.3 MPE CALCULATION METHOD.....	54
16 PHOTOGRAPHS – TEST SETUP PHOTOS.....	55

16.1 RADIATED EMISSION55

16.2 CONDUCTED EMISSION57

17 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS58

17.1 EUT – EXTERNAL VIEW58

17.2 EUT – INTERNAL VIEW.....63

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD18S07119010W	2018-07-24	2018-07-25 to 2018-08-07	2018-08-08	original	-	Valid

5 General Information

5.1 General Description of E.U.T

Product Name:	Mobile Station
Model No.:	IVPC-MS
Model Difference:	N/A
Operation Frequency:	802.11b/g/n HT20/n HT40: 2412MHz ~ 2462MHz
RF output power	14.97dBm
Antenna Gain:	2dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)
Antenna installation:	Integrated Antenna

5.2 Details of E.U.T

Ratings:	Input: DC 5V 1.5A Battery: DC 3.7V 2700mAh 9.99Wh
----------	--

5.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017.09.11	2018.09.10
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017.09.11	2018.09.10
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017.09.11	2018.09.10
4.	Cable	LARGE	RF300	-	2018.07.18	2019.07.17
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2017.09.11	2018.09.10
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018.07.18	2019.07.17
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018.05.18	2019.05.17
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017.10.14	2018.10.15
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018.05.18	2019.05.17
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018.05.18	2019.05.17
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018.04.07	2019.04.06
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018.04.07	2019.04.06
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018.04.20	2019.04.19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018.04.19	2019.04.18
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018.04.20	2019.04.19
4	Cable	HUBER+SUHNER	CBL2	525178	2018.04.20	2019.04.19
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-14	2018-09-13

2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-14	2018-09-13
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-14	2018-09-13

6.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

7 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	C
Conducted Emissions	15.207(a)	C
Bandwidth	15.247(a)(2)	C
Maximum Peak Output Power	15.247(b)(3),(4)	C
Power Spectral Density	15.247(e)	C
Band Edge	15.247(d)	C
Antenna Requirement	15.203	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013,ANSI C63.4:2014
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

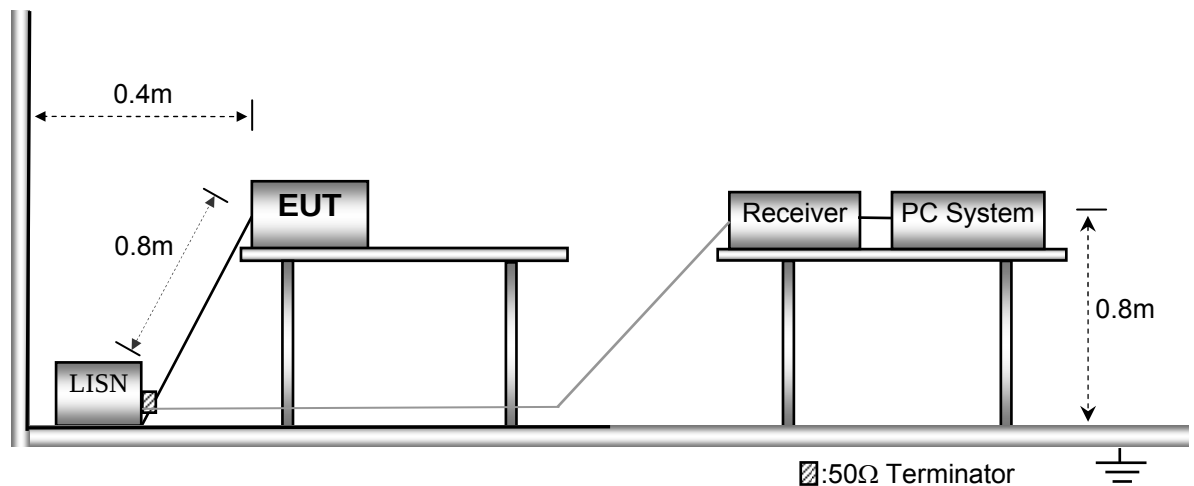

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Only the worst case (WIFI transmitting mode) test data were record in the report.

Live line:

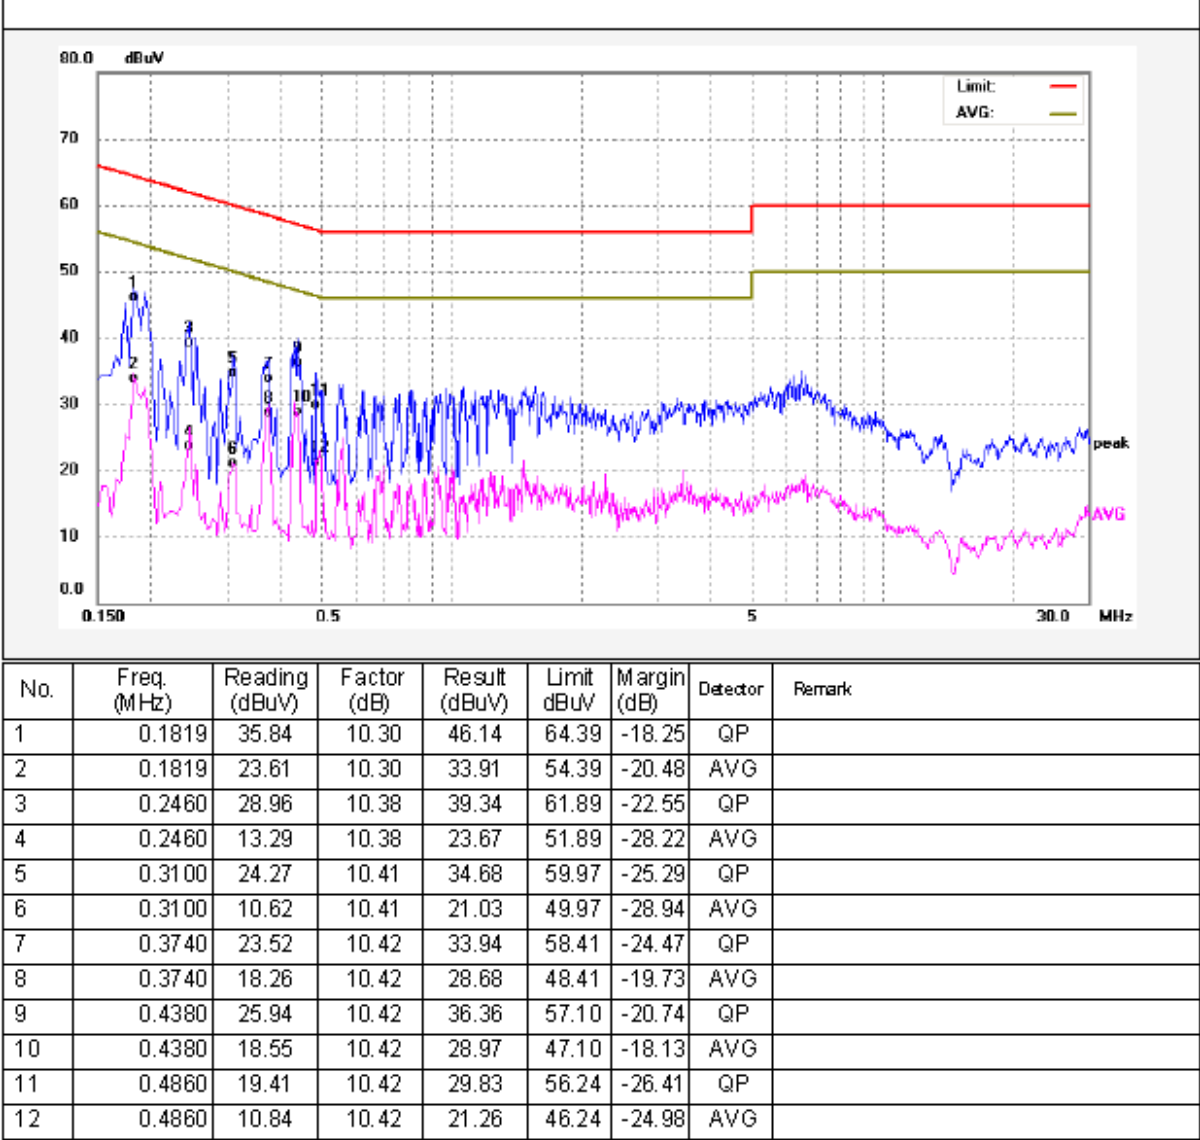

Neutral line:

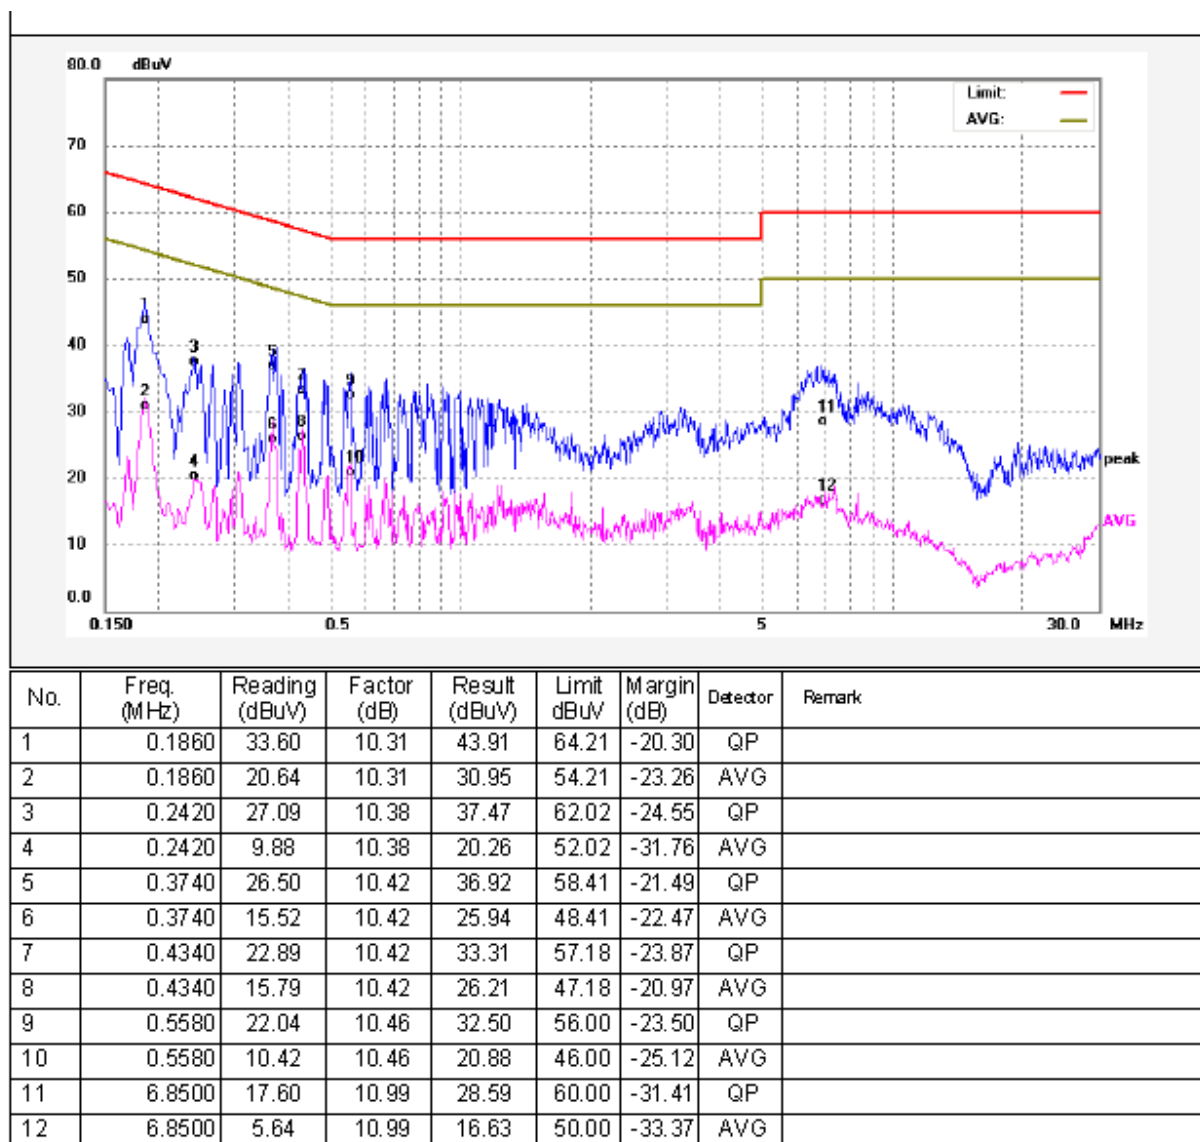

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013, ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

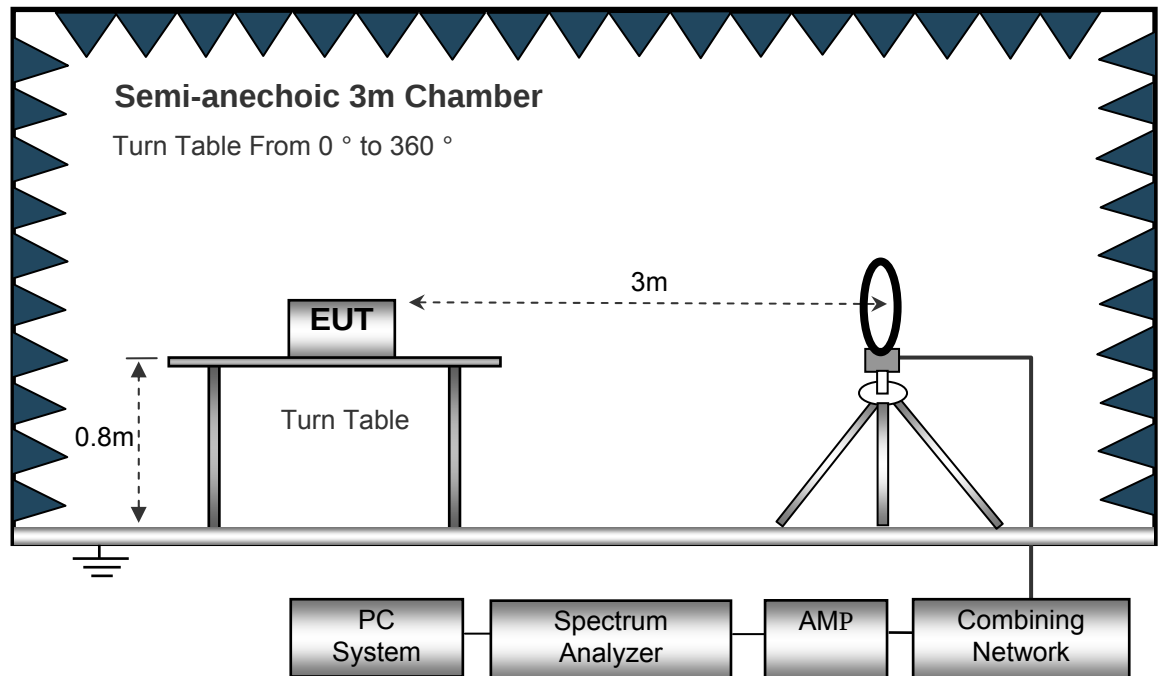

The test setup for emission measurement from 30 MHz to 1 GHz.

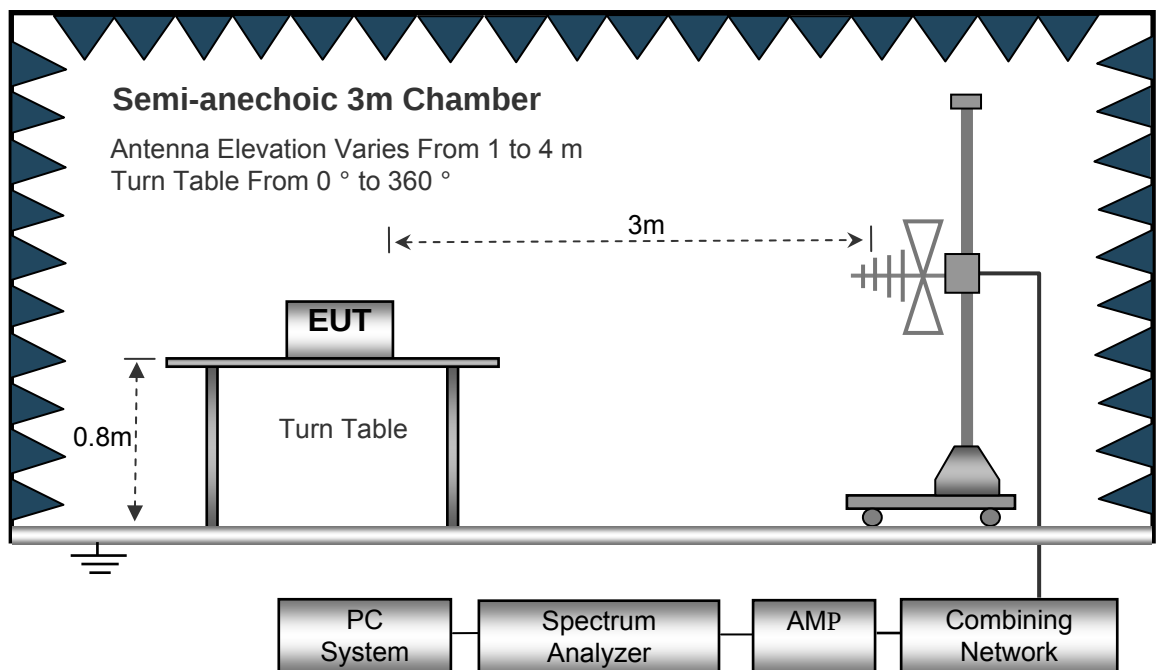

The test setup for emission measurement above 1 GHz.

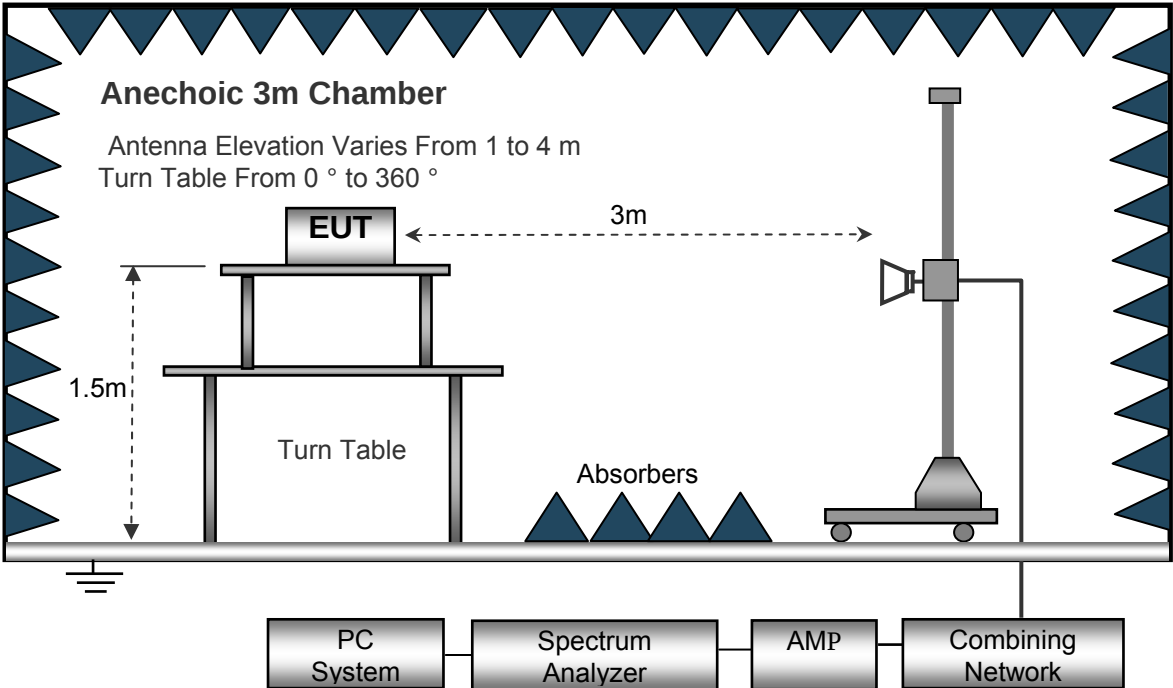

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
486.16	12.81	PK	193	1.3	H	21.09	33.90	45.00	-11.10
486.16	12.22	PK	141	1.4	V	21.09	33.31	45.00	-11.69
4824.00	50.49	PK	185	1.9	V	-1.05	49.44	74.00	-24.56
4824.00	42.74	Ave	185	1.9	V	-1.05	41.69	54.00	-12.31
7236.00	46.19	PK	331	1.8	H	1.34	47.53	74.00	-26.47
7236.00	41.24	Ave	331	1.8	H	1.34	42.58	54.00	-11.42
2336.19	46.46	PK	23	1.4	V	-13.19	33.27	74.00	-40.73
2336.19	39.32	Ave	23	1.4	V	-13.19	26.13	54.00	-27.87
2371.26	43.37	PK	202	1.4	H	-13.15	30.22	74.00	-43.78
2371.26	38.40	Ave	202	1.4	H	-13.15	25.25	54.00	-28.75
2487.78	43.72	PK	83	1.6	V	-13.08	30.64	74.00	-43.36
2487.78	37.86	Ave	83	1.6	V	-13.08	24.78	54.00	-29.22

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
486.16	12.91	PK	160	1.6	H	21.09	34.00	45.00	-11.00
486.16	13.23	PK	130	1.4	V	21.09	34.32	45.00	-10.68
4874.00	49.46	PK	112	1.8	V	-0.63	48.83	74.00	-25.17
4874.00	44.24	Ave	112	1.8	V	-0.63	43.61	54.00	-10.39
7311.00	45.24	PK	274	1.4	H	2.21	47.45	74.00	-26.55
7311.00	42.79	Ave	274	1.4	H	2.21	45.00	54.00	-9.00
2343.08	45.29	PK	100	1.4	V	-13.19	32.10	74.00	-41.90
2343.08	37.58	Ave	100	1.4	V	-13.19	24.39	54.00	-29.61
2388.16	44.12	PK	5	1.7	H	-13.14	30.98	74.00	-43.02
2388.16	37.77	Ave	5	1.7	H	-13.14	24.63	54.00	-29.37
2484.14	42.06	PK	98	1.1	V	-13.09	28.97	74.00	-45.03
2484.14	36.46	Ave	98	1.1	V	-13.09	23.37	54.00	-30.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
486.16	14.26	PK	296	1.2	H	21.09	35.35	45.00	-9.65
486.16	12.89	PK	94	1.1	V	21.09	33.98	45.00	-11.02
4924.00	50.34	PK	204	1.8	V	-0.25	50.09	74.00	-23.91
4924.00	44.75	Ave	204	1.8	V	-0.25	44.50	54.00	-9.50
7386.00	48.22	PK	222	2.0	H	2.85	51.07	74.00	-22.93
7386.00	41.31	Ave	222	2.0	H	2.85	44.16	54.00	-9.84
2310.88	46.73	PK	189	1.5	V	-13.19	33.54	74.00	-40.46
2310.88	39.43	Ave	189	1.5	V	-13.19	26.24	54.00	-27.76
2361.72	43.72	PK	120	1.5	H	-13.14	30.58	74.00	-43.42
2361.72	37.15	Ave	120	1.5	H	-13.14	24.01	54.00	-29.99
2484.02	43.76	PK	29	1.7	V	-13.09	30.67	74.00	-43.33
2484.02	38.76	Ave	29	1.7	V	-13.09	25.67	54.00	-28.33

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
486.16	13.17	PK	309	1.8	H	21.09	34.26	45.00	-10.74
486.16	13.73	PK	279	1.7	V	21.09	34.82	45.00	-10.18
4824.00	51.66	PK	215	1.7	V	-1.06	50.60	74.00	-23.40
4824.00	48.37	Ave	215	1.7	V	-1.06	47.31	54.00	-6.69
7236.00	47.10	PK	313	2.0	H	1.35	48.45	74.00	-25.55
7236.00	46.46	Ave	313	2.0	H	1.35	47.81	54.00	-6.19
2346.37	45.26	PK	303	1.1	V	-13.19	32.07	74.00	-41.93
2346.37	38.59	Ave	303	1.1	V	-13.19	25.40	54.00	-28.60
2352.80	43.26	PK	269	1.9	H	-13.14	30.12	74.00	-43.88
2352.80	37.23	Ave	269	1.9	H	-13.14	24.09	54.00	-29.91
2489.83	43.81	PK	306	1.5	V	-13.08	30.73	74.00	-43.27
2489.83	36.42	Ave	306	1.5	V	-13.08	23.34	54.00	-30.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
486.16	13.83	PK	7	1.0	H	21.09	34.92	45.00	-10.08
486.16	13.80	PK	310	1.2	V	21.09	34.89	45.00	-10.11
4874.00	49.64	PK	249	1.2	V	-0.62	49.02	74.00	-24.98
4874.00	48.79	Ave	249	1.2	V	-0.62	48.17	54.00	-5.83
7311.00	47.47	PK	120	1.1	H	2.20	49.67	74.00	-24.33
7311.00	46.28	Ave	120	1.1	H	2.20	48.48	54.00	-5.52
2316.27	45.11	PK	167	1.6	V	-13.19	31.92	74.00	-42.08
2316.27	38.84	Ave	167	1.6	V	-13.19	25.65	54.00	-28.35
2386.49	42.24	PK	309	1.6	H	-13.15	29.09	74.00	-44.91
2386.49	38.29	Ave	309	1.6	H	-13.15	25.14	54.00	-28.86
2492.44	44.97	PK	66	1.4	V	-13.09	31.88	74.00	-42.12
2492.44	36.99	Ave	66	1.4	V	-13.09	23.90	54.00	-30.10

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
486.16	14.02	PK	203	1.7	H	21.09	35.11	45.00	-9.89
486.16	12.30	PK	272	1.1	V	21.09	33.39	45.00	-11.61
4924.00	50.76	PK	95	1.2	V	-0.25	50.51	74.00	-23.49
4924.00	46.47	Ave	95	1.2	V	-0.25	46.22	54.00	-7.78
7386.00	47.69	PK	267	1.4	H	2.86	50.55	74.00	-23.45
7386.00	42.41	Ave	267	1.4	H	2.86	45.27	54.00	-8.73
2344.90	46.13	PK	167	1.7	V	-13.19	32.94	74.00	-41.06
2344.90	38.71	Ave	167	1.7	V	-13.19	25.52	54.00	-28.48
2383.34	44.33	PK	342	1.6	H	-13.14	31.19	74.00	-42.81
2383.34	36.63	Ave	342	1.6	H	-13.14	23.49	54.00	-30.51
2485.42	42.37	PK	195	1.6	V	-13.08	29.29	74.00	-44.71
2485.42	38.71	Ave	195	1.6	V	-13.08	25.63	54.00	-28.37

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
486.16	13.17	PK	24	1.8	H	21.09	34.26	45.00	-10.74
486.16	13.57	PK	52	1.9	V	21.09	34.66	45.00	-10.34
4824.00	50.58	PK	359	1.7	V	-1.06	49.52	74.00	-24.48
4824.00	48.90	Ave	359	1.7	V	-1.06	47.84	54.00	-6.16
7236.00	47.07	PK	145	1.6	H	1.34	48.41	74.00	-25.59
7236.00	45.54	Ave	145	1.6	H	1.34	46.88	54.00	-7.12
2333.93	45.28	PK	225	1.8	V	-13.19	32.09	74.00	-41.91
2333.93	37.52	Ave	225	1.8	V	-13.19	24.33	54.00	-29.67
2364.78	44.39	PK	199	1.7	H	-13.14	31.25	74.00	-42.75
2364.78	36.26	Ave	199	1.7	H	-13.14	23.12	54.00	-30.88
2490.38	43.30	PK	58	1.2	V	-13.08	30.22	74.00	-43.78
2490.38	37.05	Ave	58	1.2	V	-13.08	23.97	54.00	-30.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
486.16	13.15	PK	225	1.3	H	21.09	34.24	45.00	-10.76
486.16	13.53	PK	221	1.5	V	21.09	34.62	45.00	-10.38
4874.00	50.37	PK	214	1.1	V	-0.61	49.76	74.00	-24.24
4874.00	48.41	Ave	214	1.1	V	-0.61	47.80	54.00	-6.20
7311.00	47.65	PK	103	1.8	H	2.21	49.86	74.00	-24.14
7311.00	45.35	Ave	103	1.8	H	2.21	47.56	54.00	-6.44
2333.42	46.13	PK	87	1.0	V	-13.19	32.94	74.00	-41.06
2333.42	37.80	Ave	87	1.0	V	-13.19	24.61	54.00	-29.39
2380.58	42.64	PK	308	1.3	H	-13.14	29.50	74.00	-44.50
2380.58	37.58	Ave	308	1.3	H	-13.14	24.44	54.00	-29.56
2486.06	44.92	PK	304	1.9	V	-13.09	31.83	74.00	-42.17
2486.06	36.52	Ave	304	1.9	V	-13.09	23.43	54.00	-30.57

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
486.16	13.42	PK	73	1.3	H	21.09	34.51	45.00	-10.49
486.16	12.87	PK	41	1.1	V	21.09	33.96	45.00	-11.04
4924.00	50.65	PK	98	1.5	V	-0.24	50.41	74.00	-23.59
4924.00	48.86	Ave	98	1.5	V	-0.24	48.62	54.00	-5.38
7386.00	47.37	PK	252	1.9	H	2.83	50.20	74.00	-23.80
7386.00	45.05	Ave	252	1.9	H	2.83	47.88	54.00	-6.12
2319.19	46.52	PK	104	1.1	V	-13.19	33.33	74.00	-40.67
2319.19	39.37	Ave	104	1.1	V	-13.19	26.18	54.00	-27.82
2387.56	42.68	PK	208	1.4	H	-13.14	29.54	74.00	-44.46
2387.56	37.70	Ave	208	1.4	H	-13.14	24.56	54.00	-29.44
2484.13	44.91	PK	336	2.0	V	-13.08	31.83	74.00	-42.17
2484.13	38.31	Ave	336	2.0	V	-13.08	25.23	54.00	-28.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
N40: Low Channel 2422MHz									
486.16	13.47	PK	54	1.8	H	21.09	34.56	45.00	-10.44
486.16	12.81	PK	212	1.1	V	21.09	33.90	45.00	-11.10
4844.00	50.74	PK	180	1.8	V	-1.06	49.68	74.00	-24.32
4844.00	48.56	Ave	180	1.8	V	-1.06	47.50	54.00	-6.50
7266.00	48.27	PK	101	1.5	H	1.34	49.61	74.00	-24.39
7266.00	42.83	Ave	101	1.5	H	1.34	44.17	54.00	-9.83
2312.52	45.63	PK	38	2.0	V	-13.19	32.44	74.00	-41.56
2312.52	39.49	Ave	38	2.0	V	-13.19	26.30	54.00	-27.70
2356.42	43.27	PK	298	1.8	H	-13.15	30.12	74.00	-43.88
2356.42	38.58	Ave	298	1.8	H	-13.15	25.43	54.00	-28.57
2491.32	42.54	PK	258	1.3	V	-13.08	29.46	74.00	-44.54
2491.32	38.61	Ave	258	1.3	V	-13.08	25.53	54.00	-28.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
N40: Middle Channel 2437MHz									
486.16	13.77	PK	159	1.6	H	21.09	34.86	45.00	-10.14
486.16	13.28	PK	84	1.1	V	21.09	34.37	45.00	-10.63
4874.00	49.06	PK	7	1.5	V	-0.62	48.44	74.00	-25.56
4874.00	48.47	Ave	7	1.5	V	-0.62	47.85	54.00	-6.15
7311.00	47.37	PK	325	1.5	H	2.21	49.58	74.00	-24.42
7311.00	43.85	Ave	325	1.5	H	2.21	46.06	54.00	-7.94
2318.47	46.06	PK	269	1.7	V	-13.19	32.87	74.00	-41.13
2318.47	39.83	Ave	269	1.7	V	-13.19	26.64	54.00	-27.36
2381.63	44.78	PK	96	1.7	H	-13.16	31.62	74.00	-42.38
2381.63	38.58	Ave	96	1.7	H	-13.16	25.42	54.00	-28.58
2489.50	42.09	PK	317	1.8	V	-13.08	29.01	74.00	-44.99
2489.50	36.31	Ave	317	1.8	V	-13.08	23.23	54.00	-30.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
N40: High Channel 2452MHz									
486.16	13.20	PK	249	1.7	H	21.09	34.29	45.00	-10.71
486.16	12.29	PK	135	1.2	V	21.09	33.38	45.00	-11.62
4904.00	50.88	PK	0	1.0	V	-0.24	50.64	74.00	-23.36
4904.00	44.32	Ave	0	1.0	V	-0.24	44.08	54.00	-9.92
7356.00	48.80	PK	193	1.1	H	2.85	51.65	74.00	-22.35
7356.00	42.86	Ave	193	1.1	H	2.85	45.71	54.00	-8.29
2313.25	46.89	PK	125	1.9	V	-13.19	33.70	74.00	-40.30
2313.25	37.12	Ave	125	1.9	V	-13.19	23.93	54.00	-30.07
2354.04	43.96	PK	203	1.1	H	-13.14	30.82	74.00	-43.18
2354.04	38.37	Ave	203	1.1	H	-13.14	25.23	54.00	-28.77
2493.64	43.42	PK	269	1.7	V	-13.08	30.34	74.00	-43.66
2493.64	37.49	Ave	269	1.7	V	-13.08	24.41	54.00	-29.59

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance V04
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting


10.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


10.2 Test Result

Test result plots shown as follows:


TX 11b: Band edge-left side

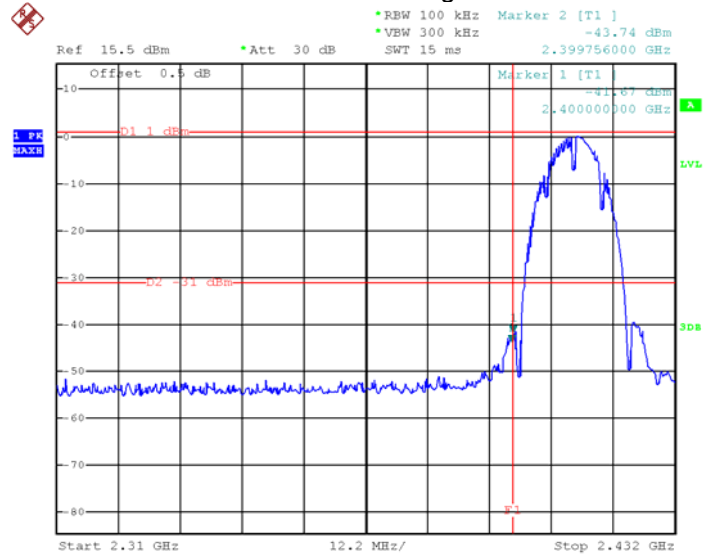


TX 11b: Band edge-right side

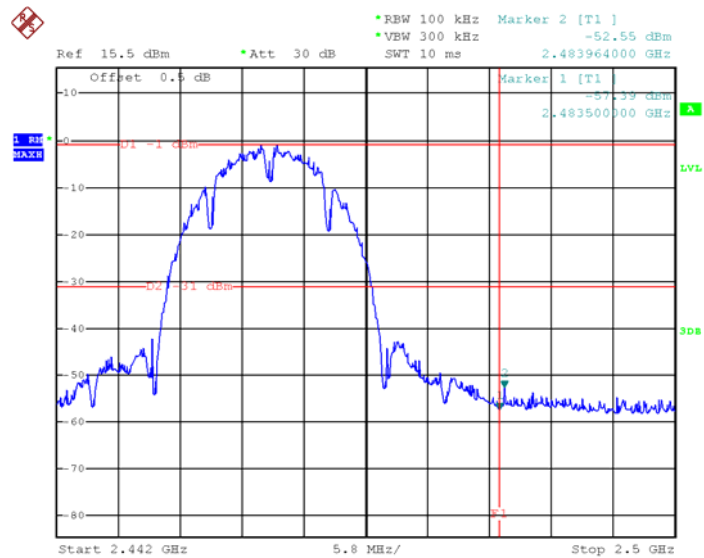


TX 11g: Band edge-left side

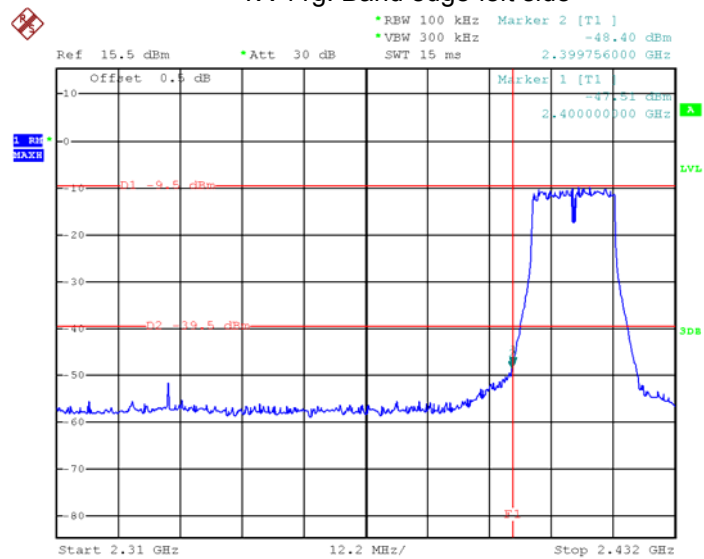


TX 11g: Band edge-right side

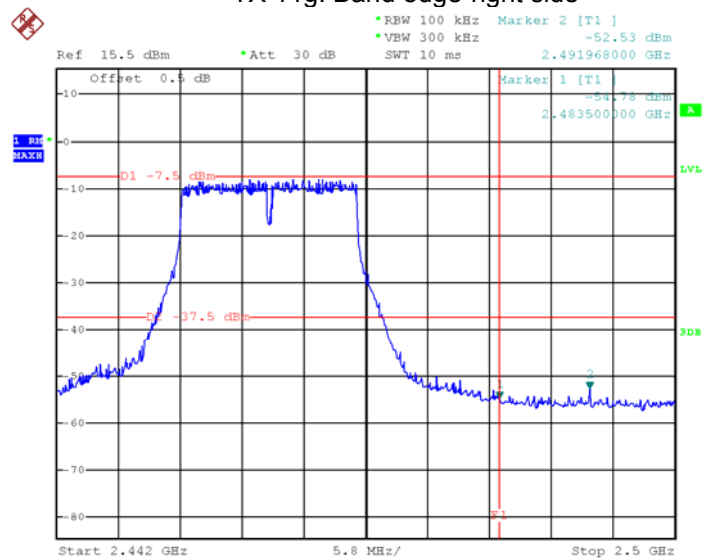


TX 11n HT20: Band edge-left side

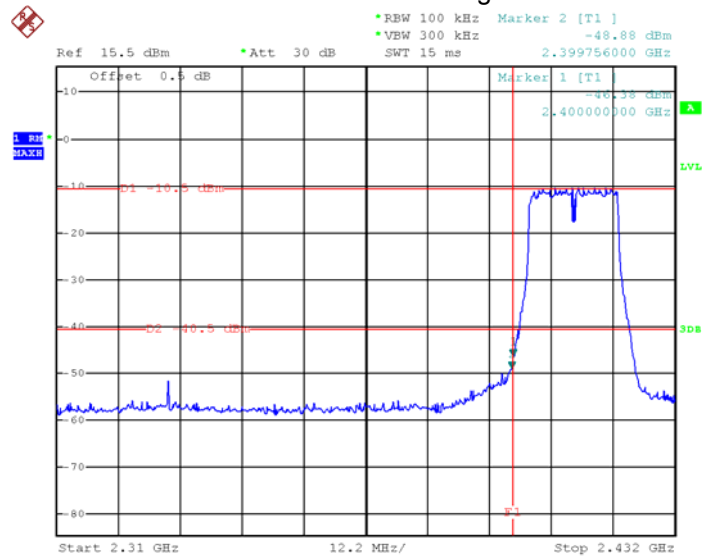


TX 11n HT20: Band edge-right side

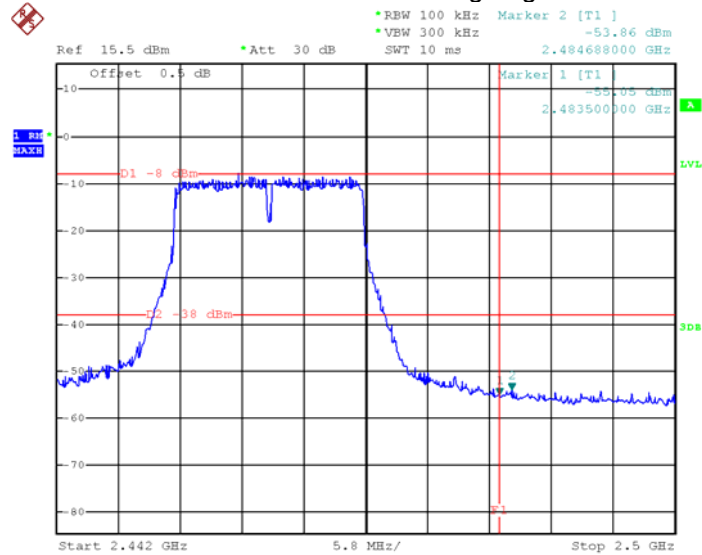

TX 11n HT40: Band edge-left side

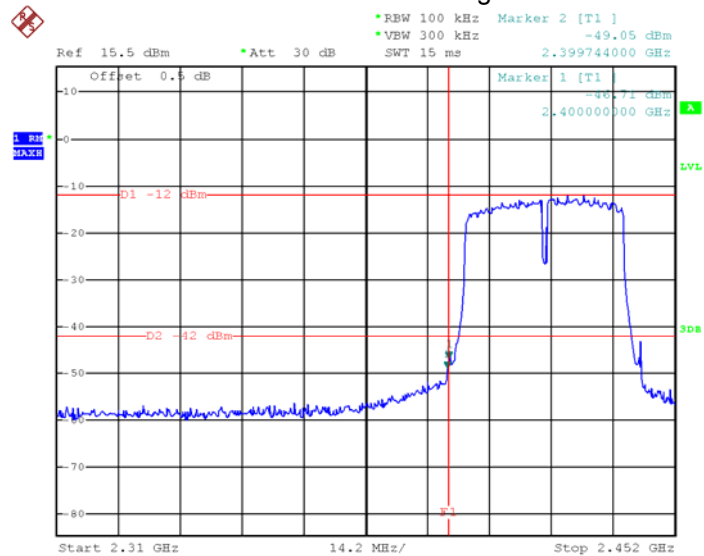

TX 11n HT40: Band edge-right side

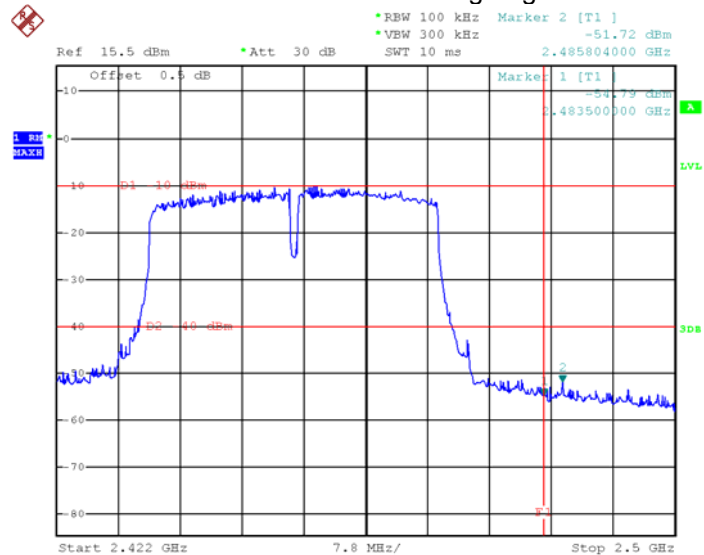

11 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance V04

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:


Operation mode	6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	10.080	10.080	10.080	14.368	14.368	14.304
TX 11g	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	16.600	16.600	16.600	16.500	16.500	16.500
TX 11n HT20	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	17.766	17.766	17.766	17.712	17.658	17.658
TX 11n HT40	Channel 3	Channel 6	Channel 9	Channel 3	Channel 6	Channel 9
	36.410	36.410	36.410	35.970	36.080	36.080

Wifi: Test result plot as follows:


Mode: TX 11b channel 1


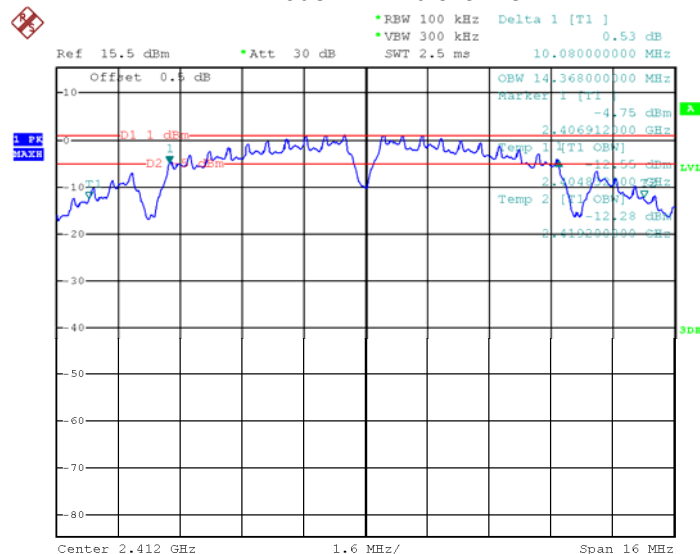


Mode: TX 11b channel 6

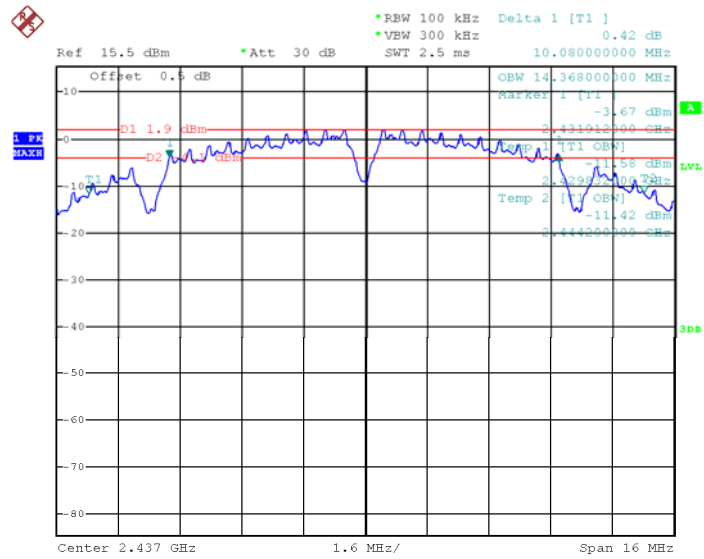


Mode: TX 11b channel 11

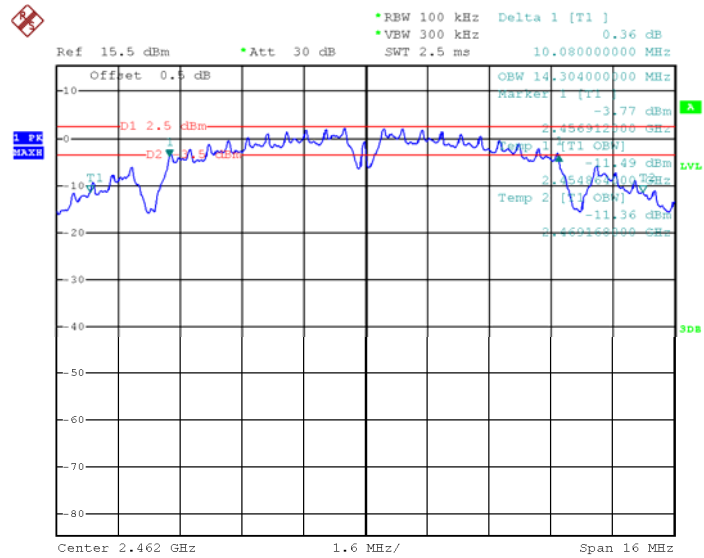


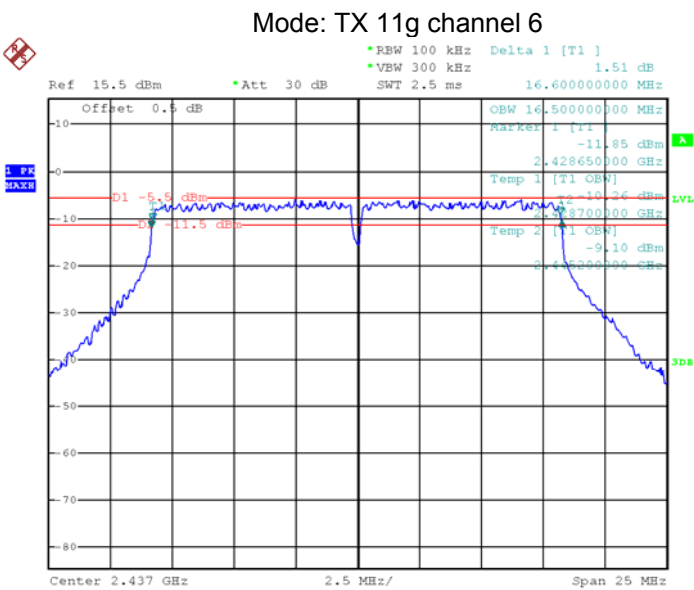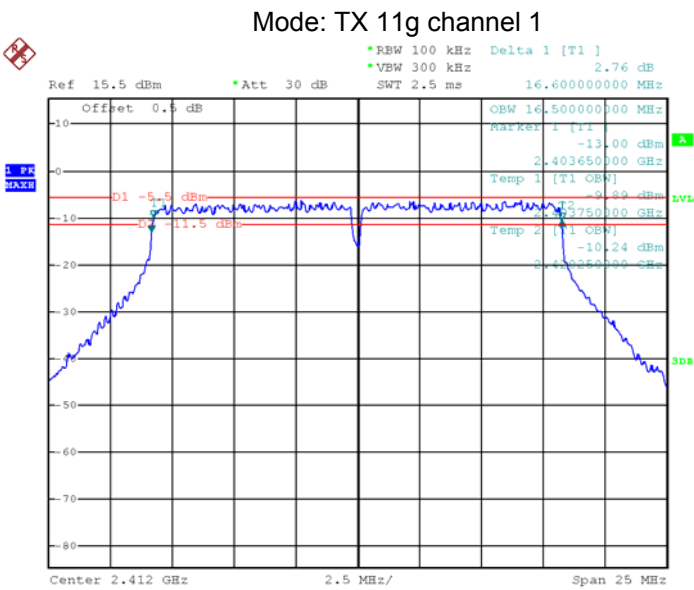


Mode: TX 11g channel 11

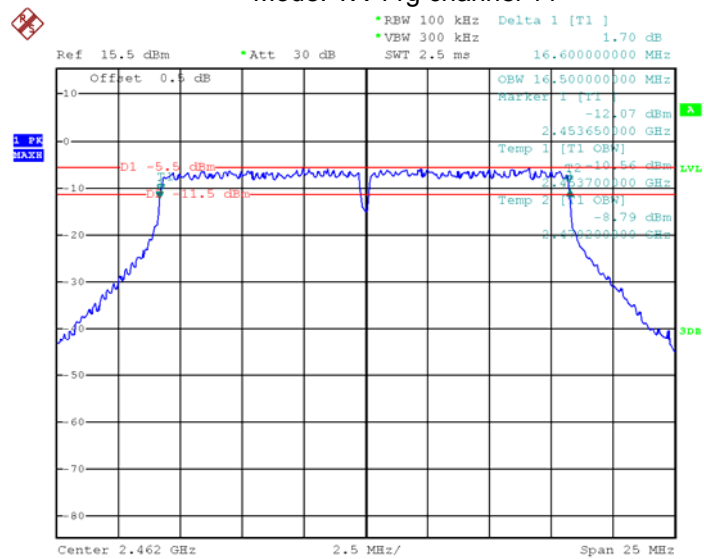


Mode: TX 11n HT20 channel 1

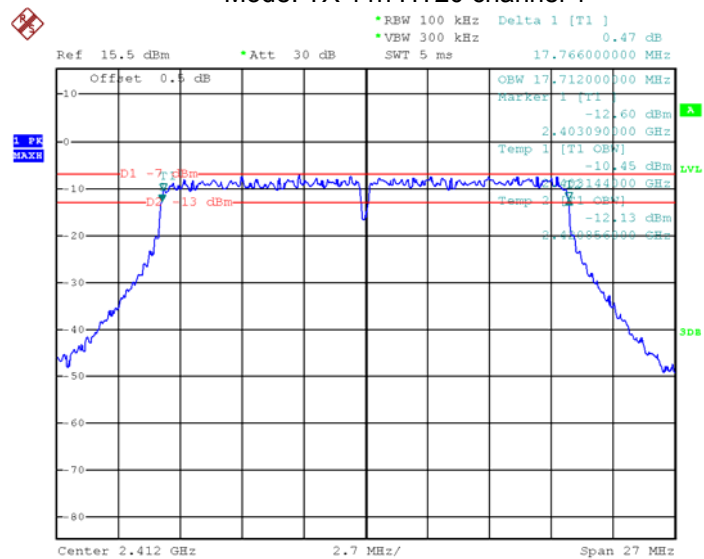


Mode: TX 11n HT20 channel 6

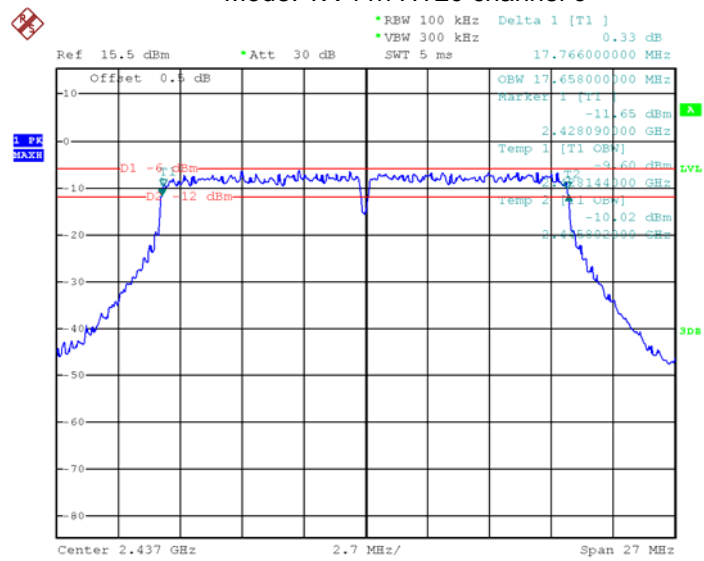


Mode: TX 11n HT20 channel 11

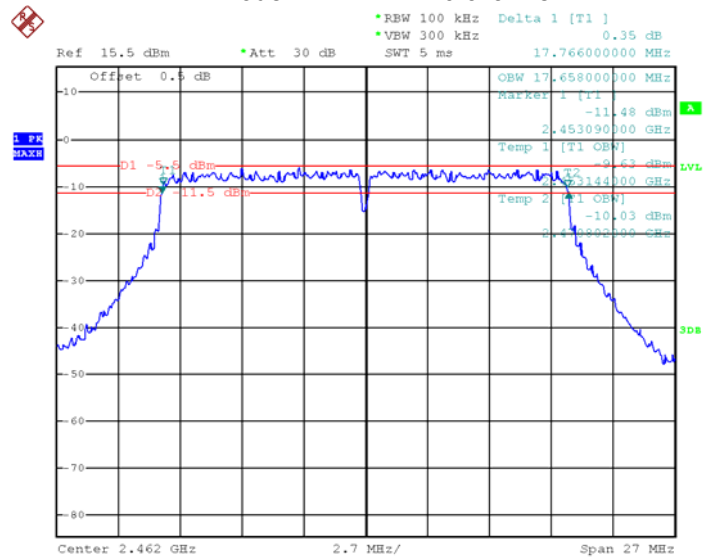


Mode: TX 11n HT40 channel 3

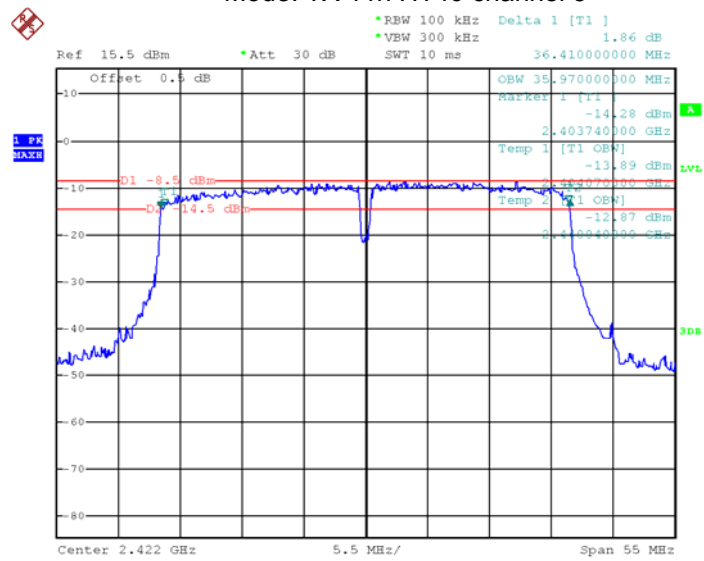

Mode: TX 11n HT40 channel 6

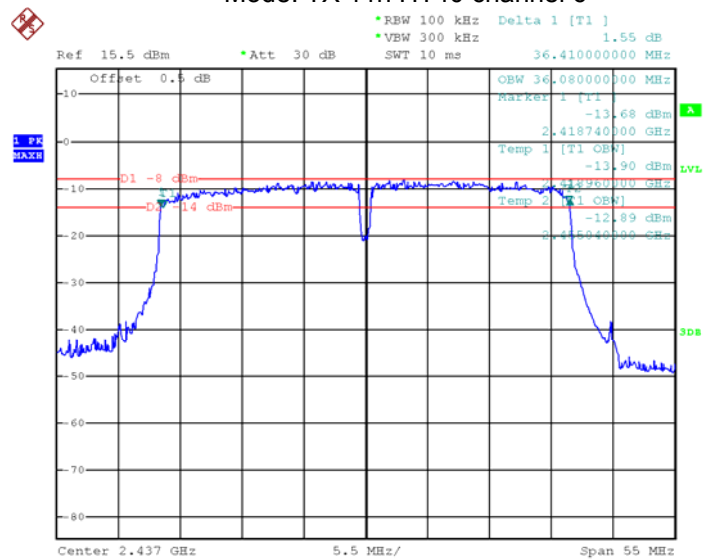

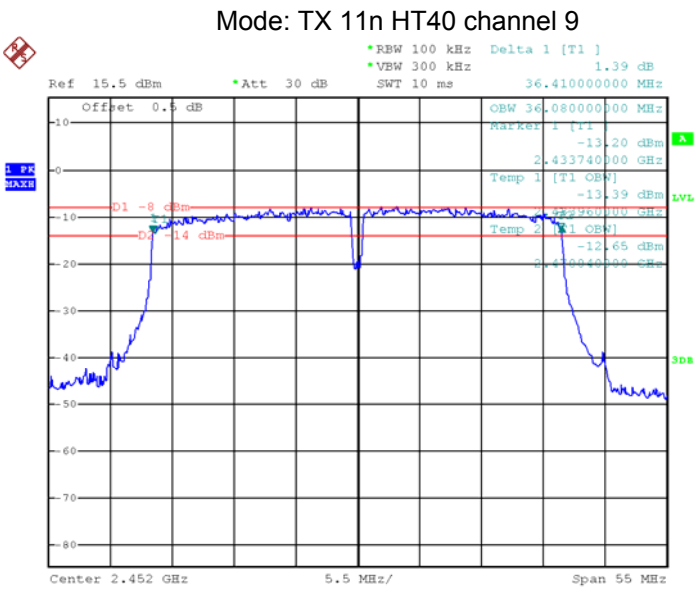

12 Maximum Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance V04

12.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
11.06	11.79	14.97
Limit: 1W/30dBm		

Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
13.61	14.71	10.28
Limit: 1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
8.96	9.86	10.28
Limit: 1W/30dBm		

Test mode :TX 11n HT40		
Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.42	10.43	10.19
Limit: 1W/30dBm		

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

13.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



13.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-19.47	-18.61	-17.97
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-21.07	-20.58	-19.95
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-20.89	-20.21	-20.15
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-19.94	-19.70	-21.05
Limit: 8dBm per 3kHz		

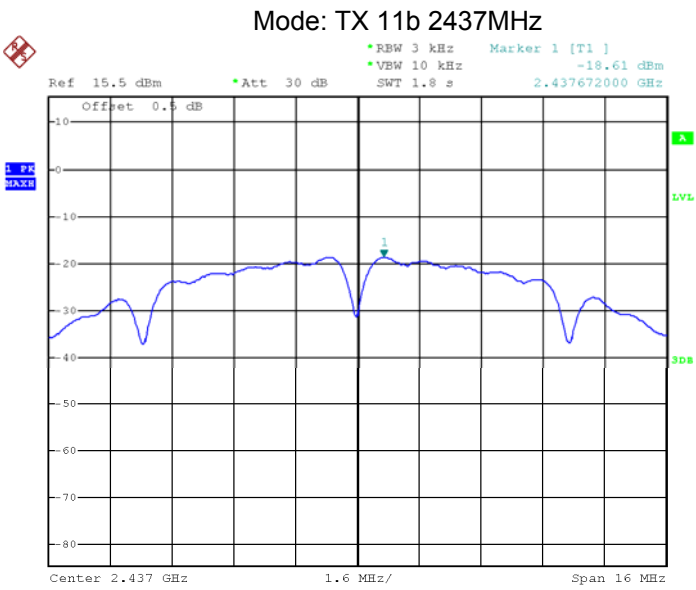
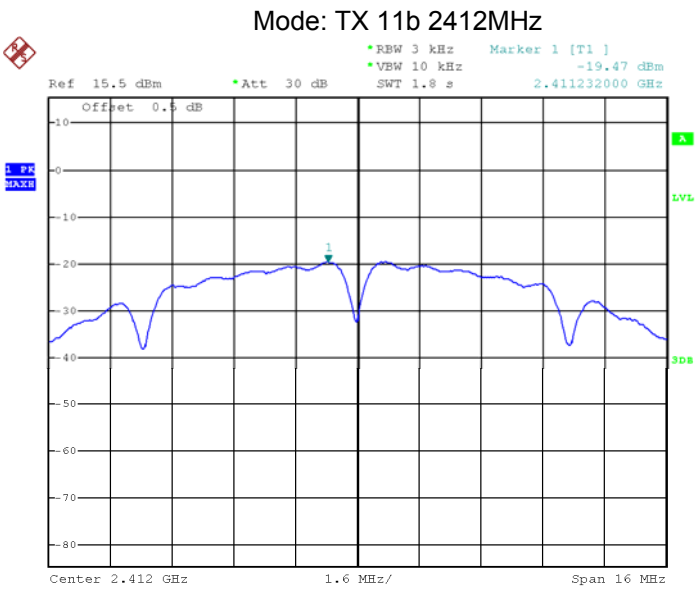


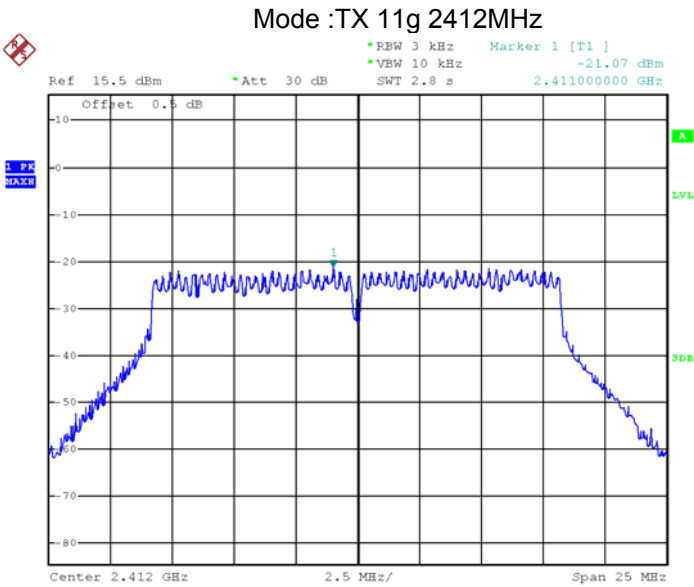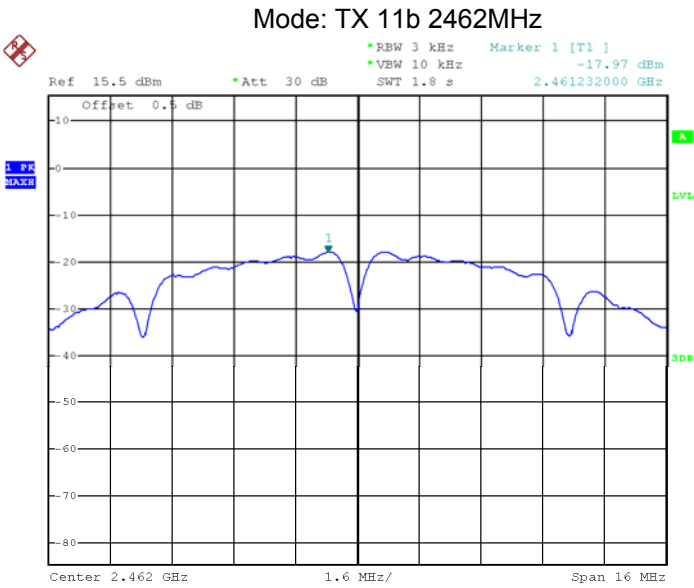

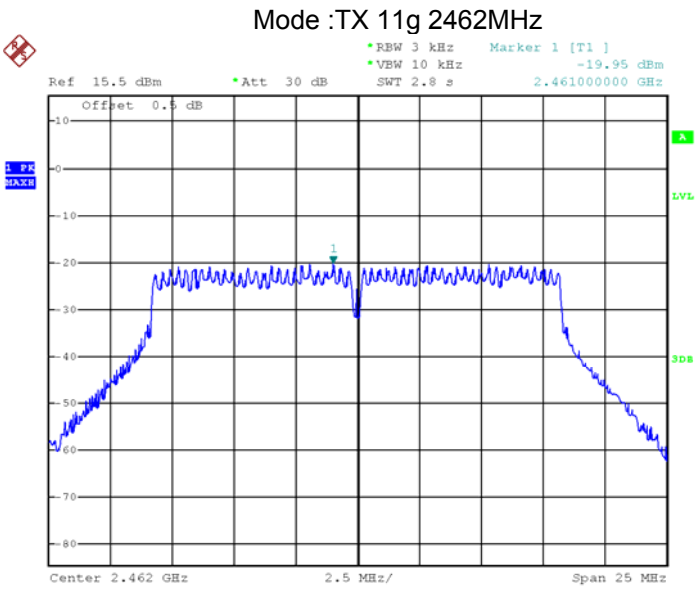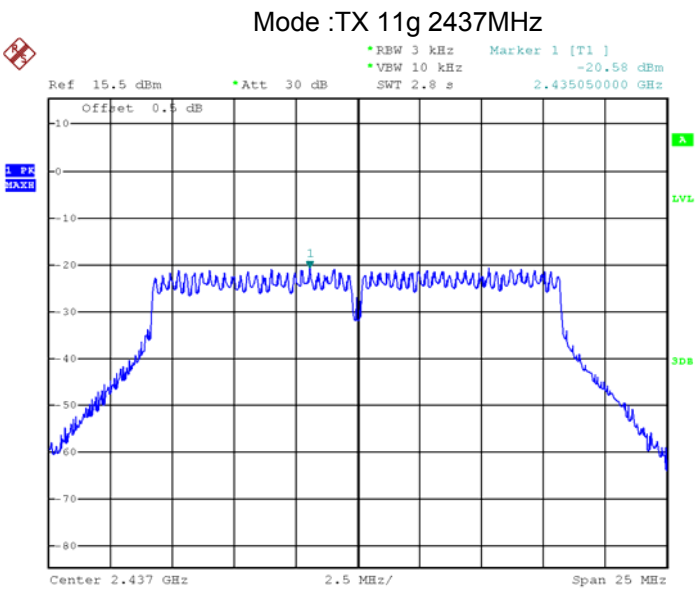

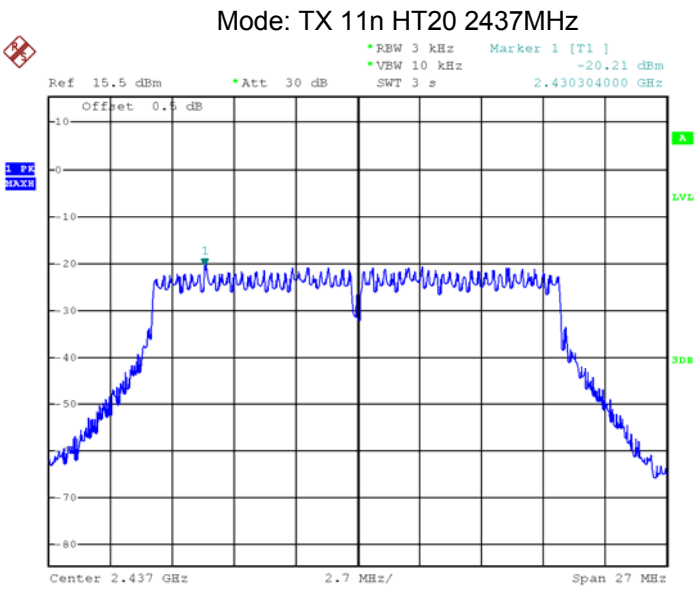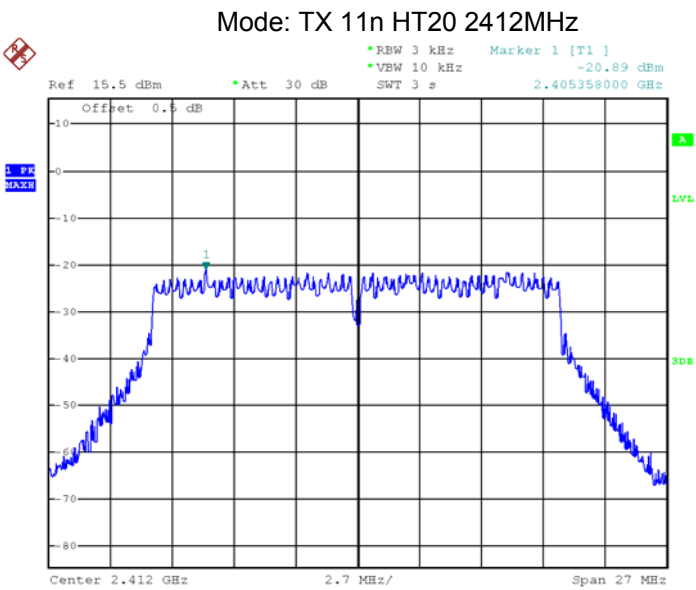

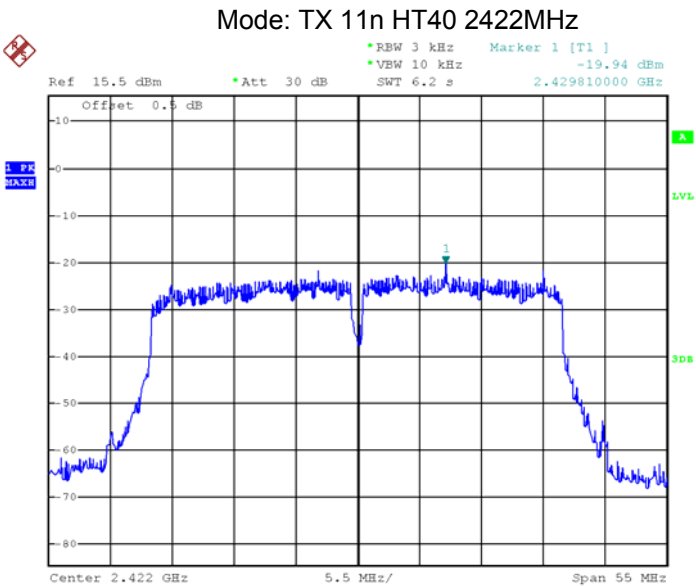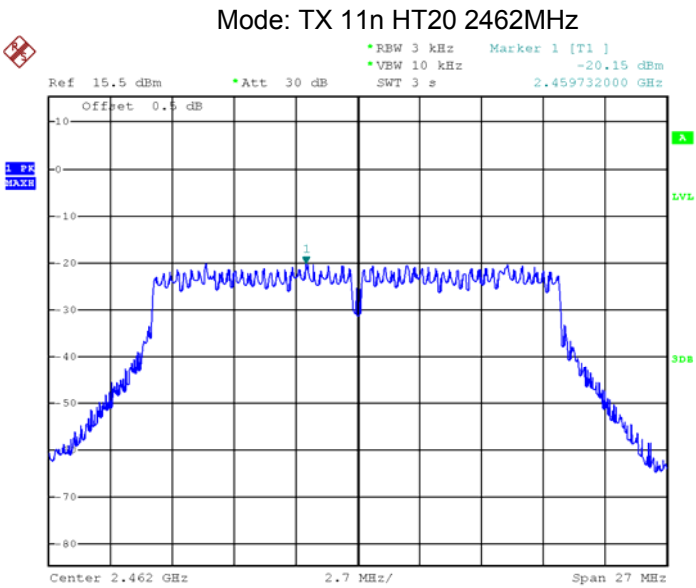

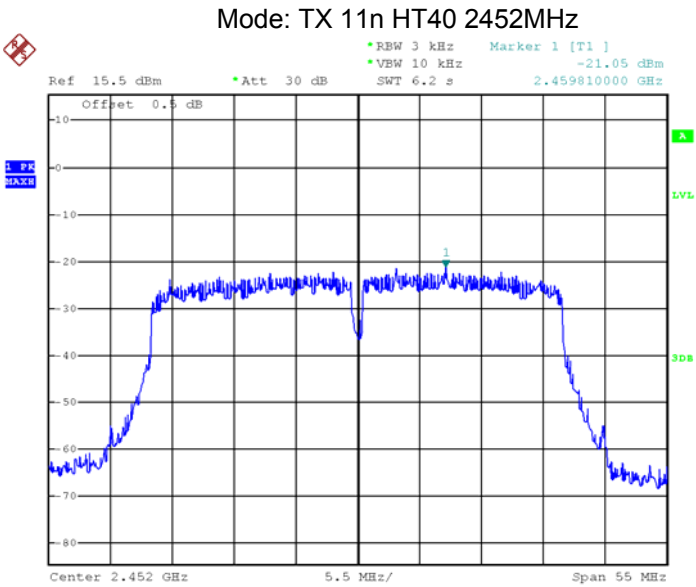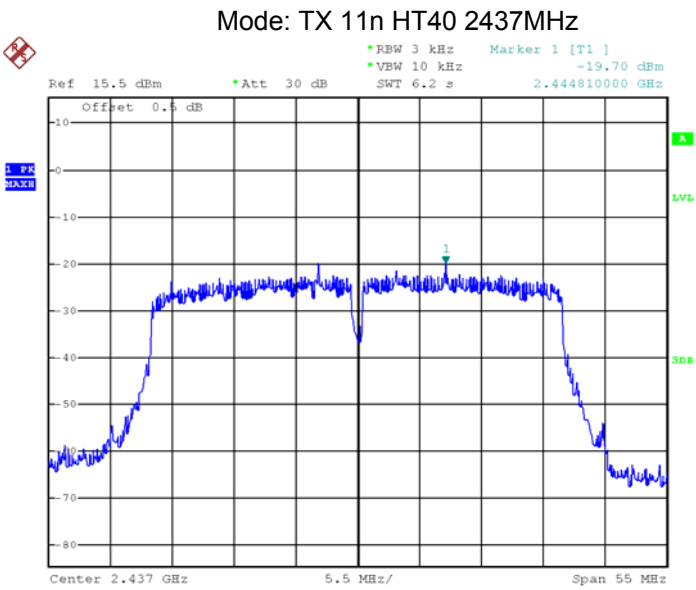


14 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a Integrated Antenna, meets the requirements of FCC 15.203.

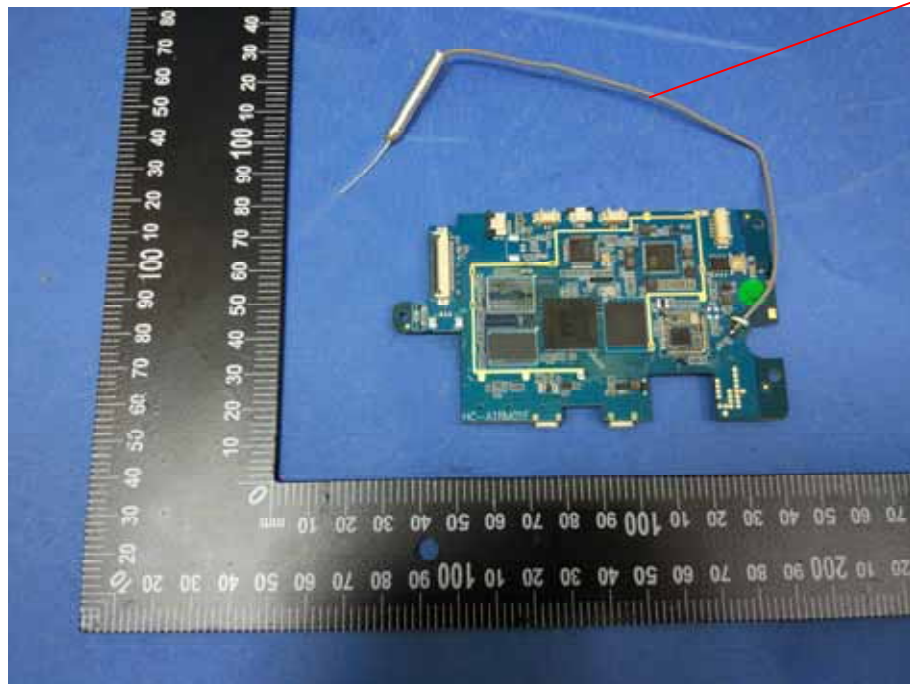

ANT

15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
2.00	1.585	14.97	31.41	0.009902	1

16 Photographs – Test Setup Photos


16.1 Radiated Emission

Test frequency Below 30MHz





Test frequency from 30MHz to 1GHz



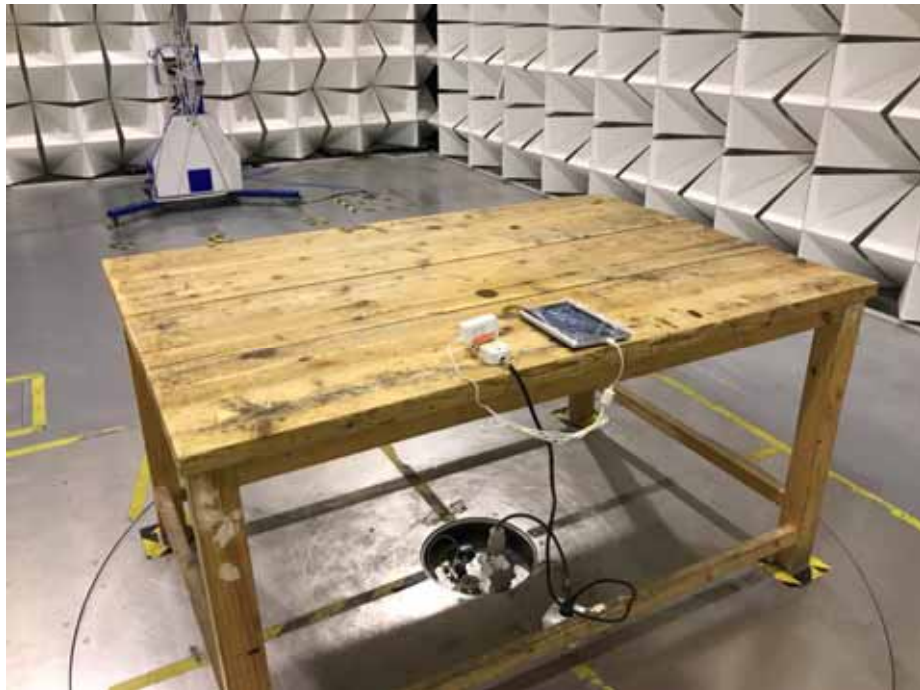

Test frequency above 1GHz

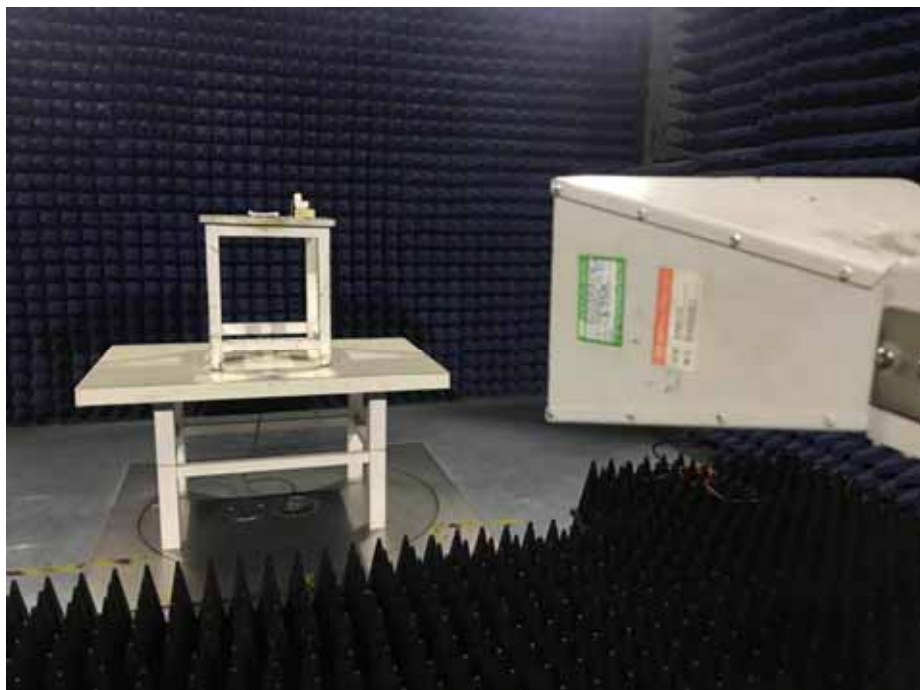

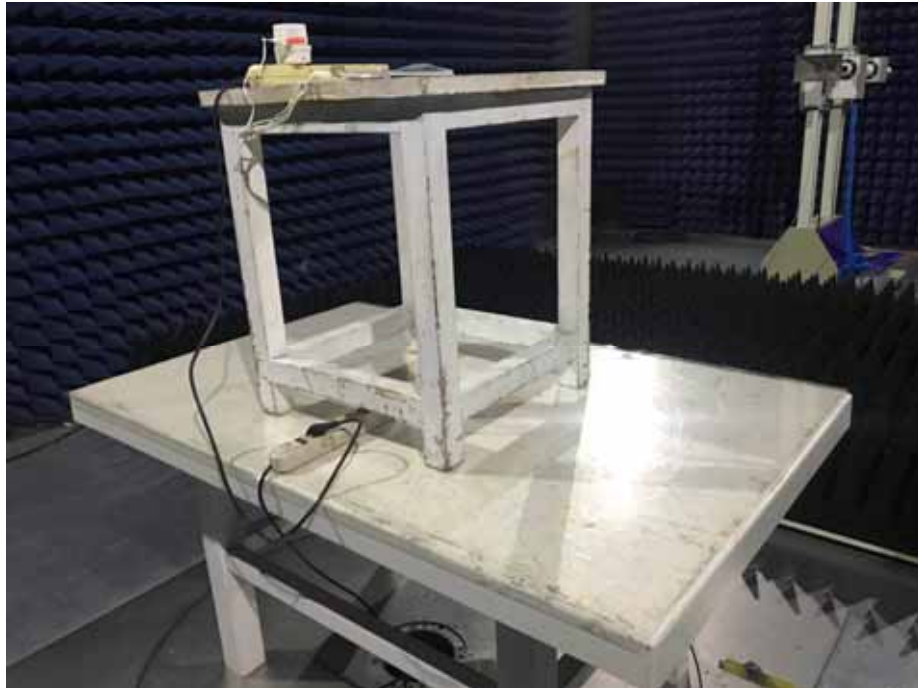



16.2 Conducted Emission






17 Photographs - Constructional Details

17.1 EUT – External View



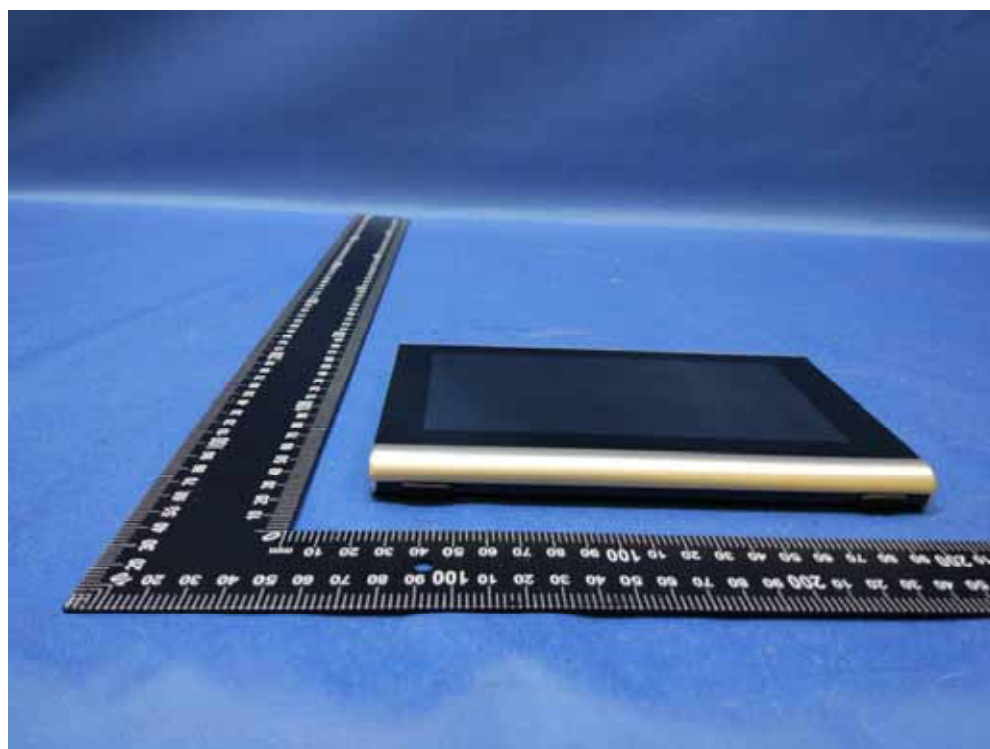
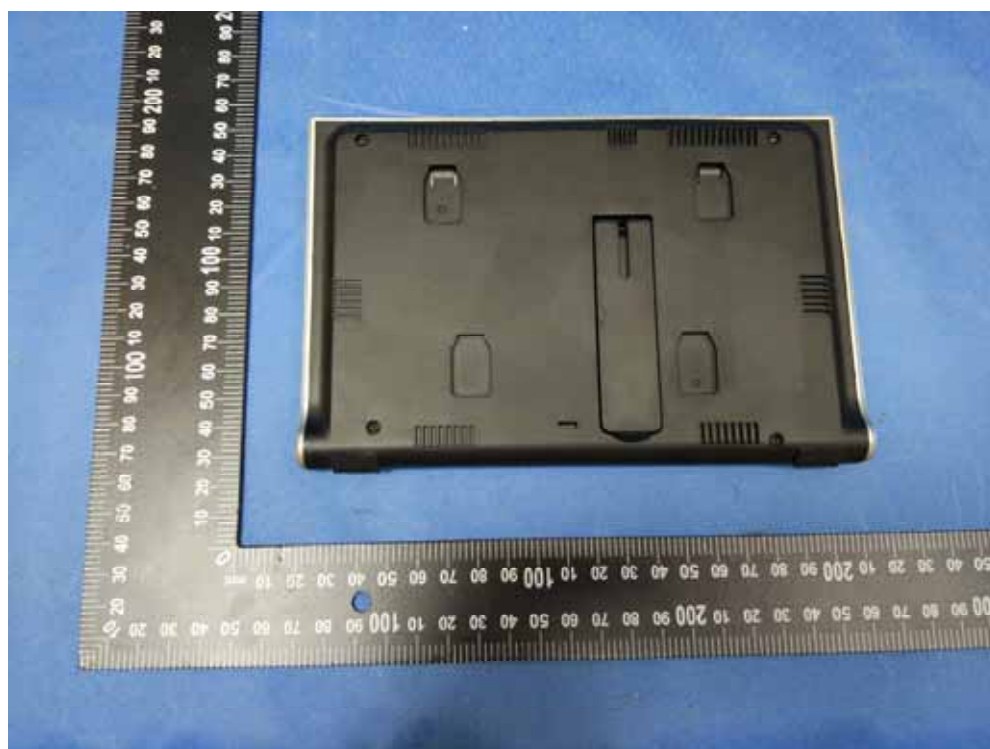


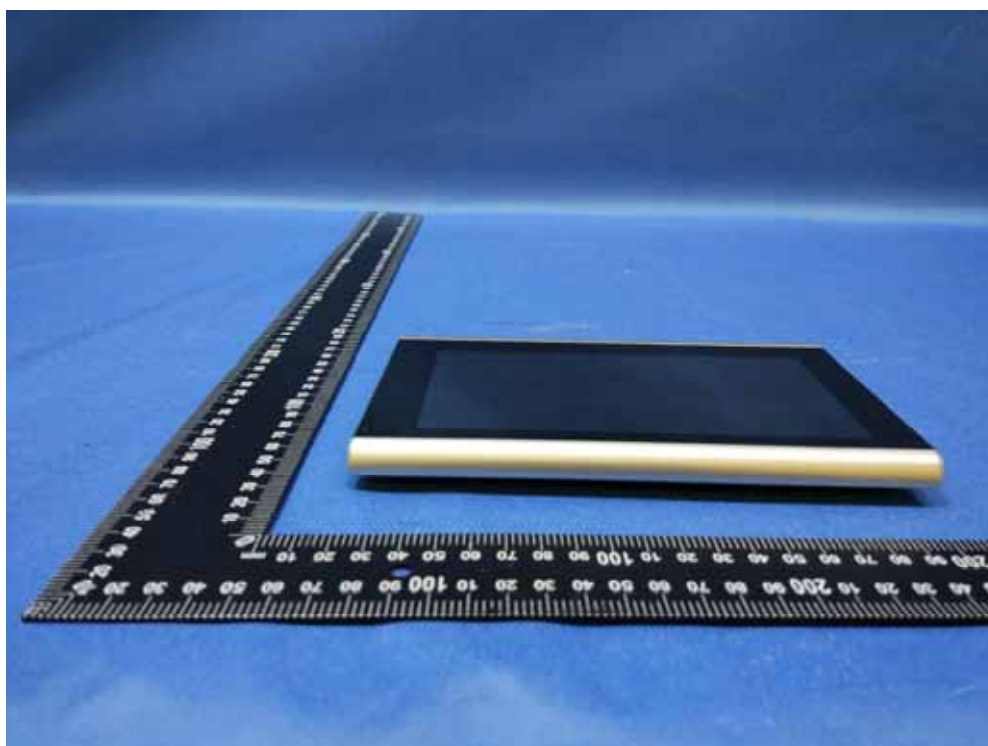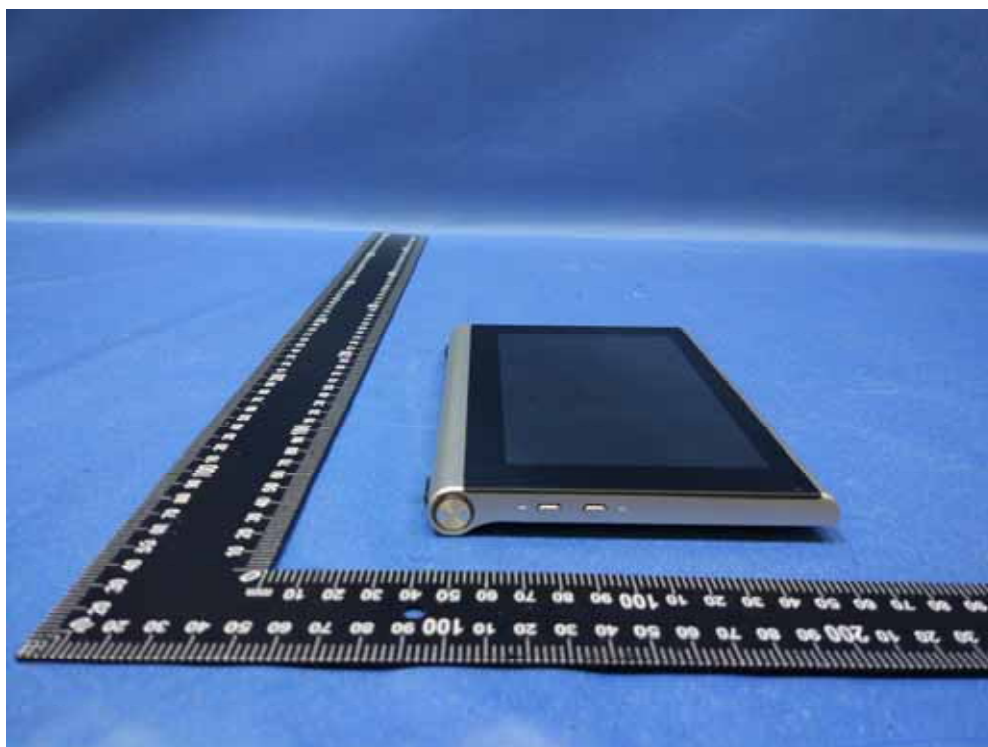


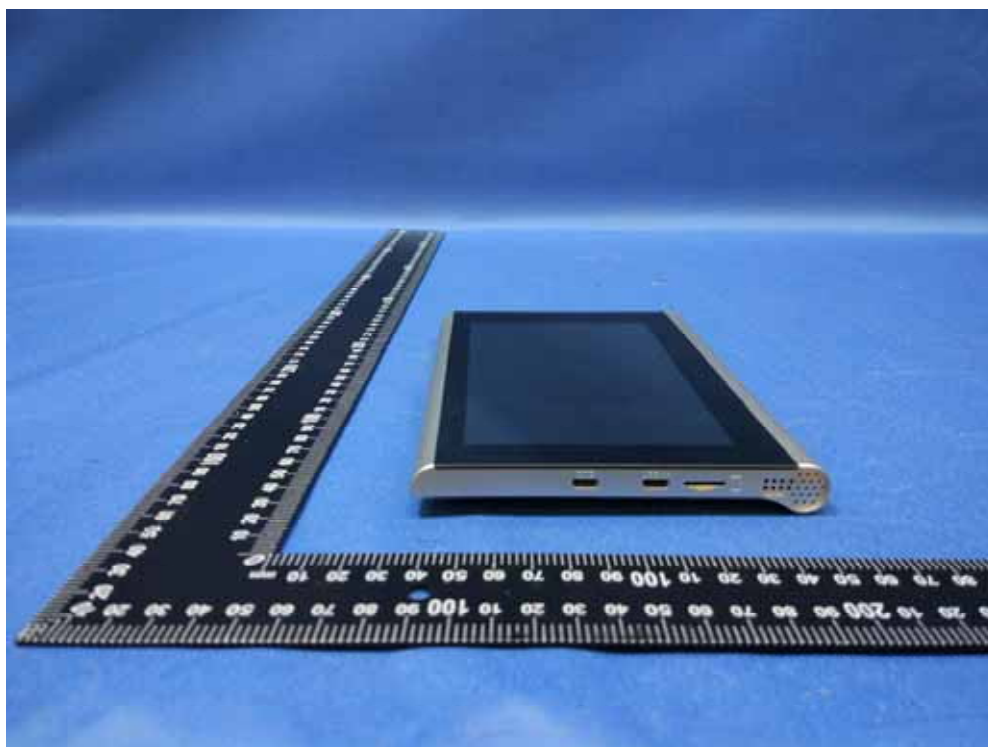








17.2 EUT – Internal View

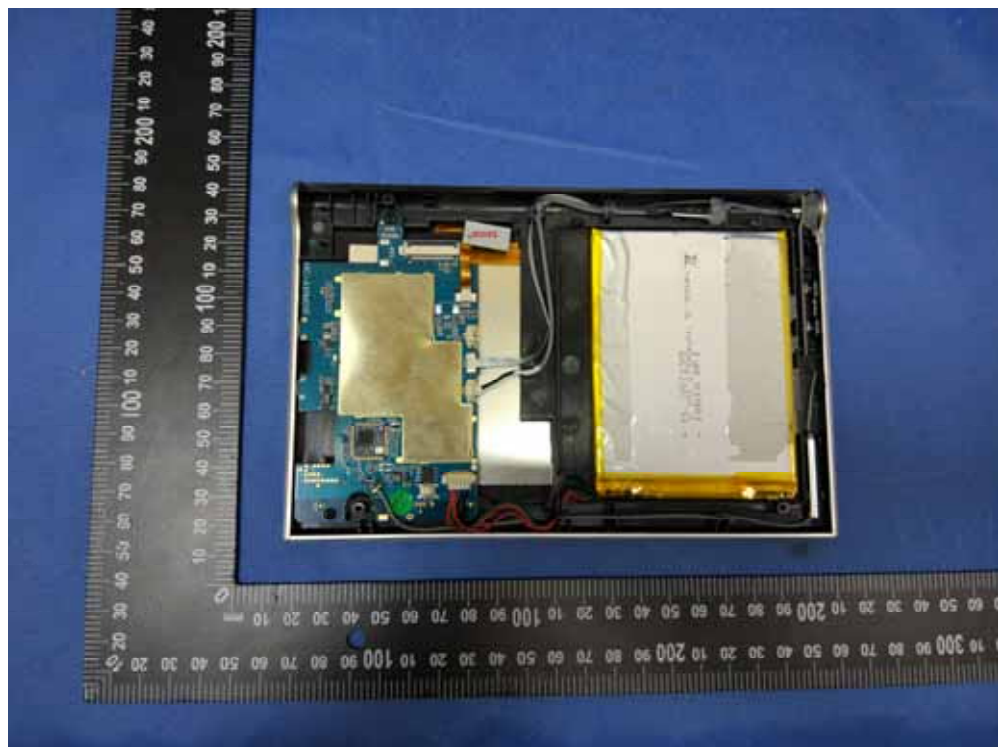
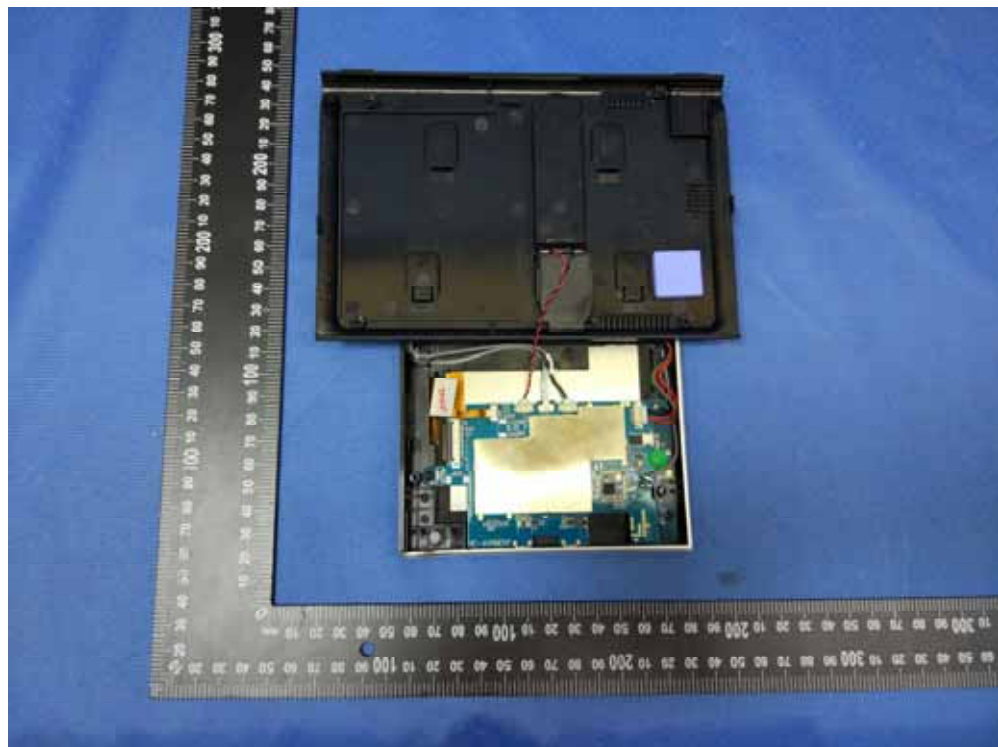




antenna

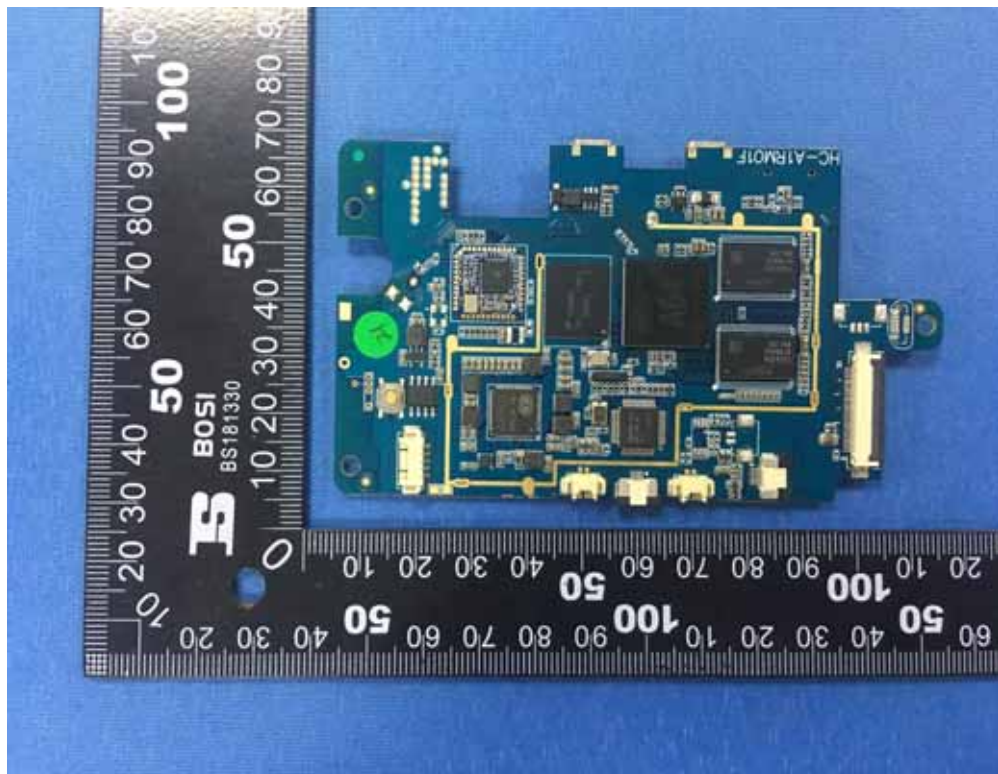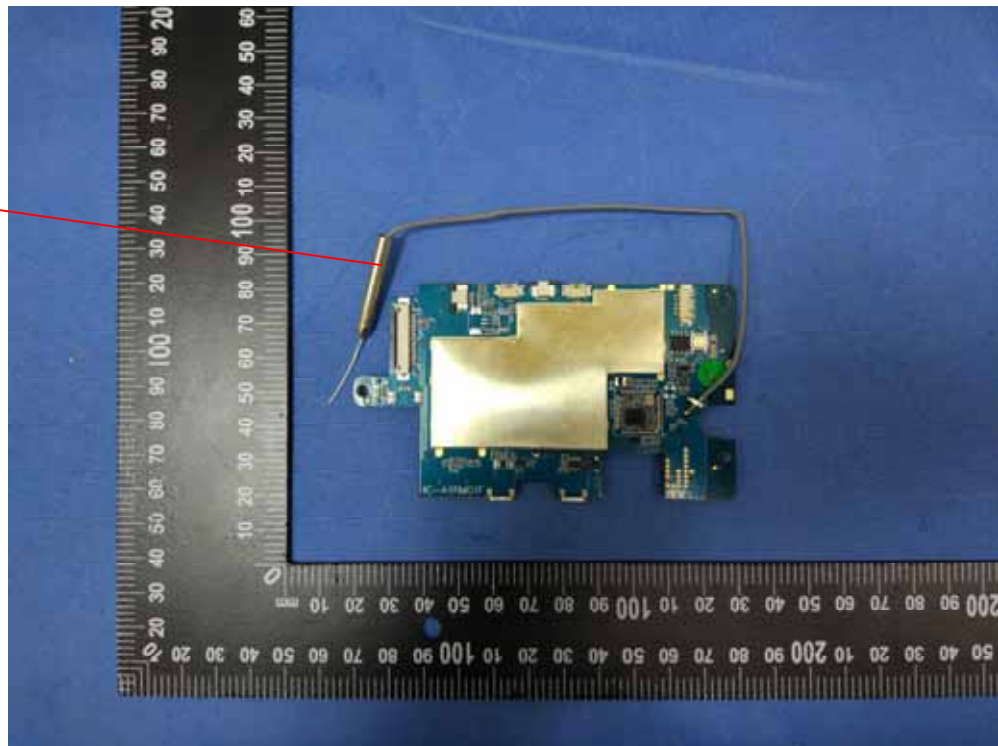


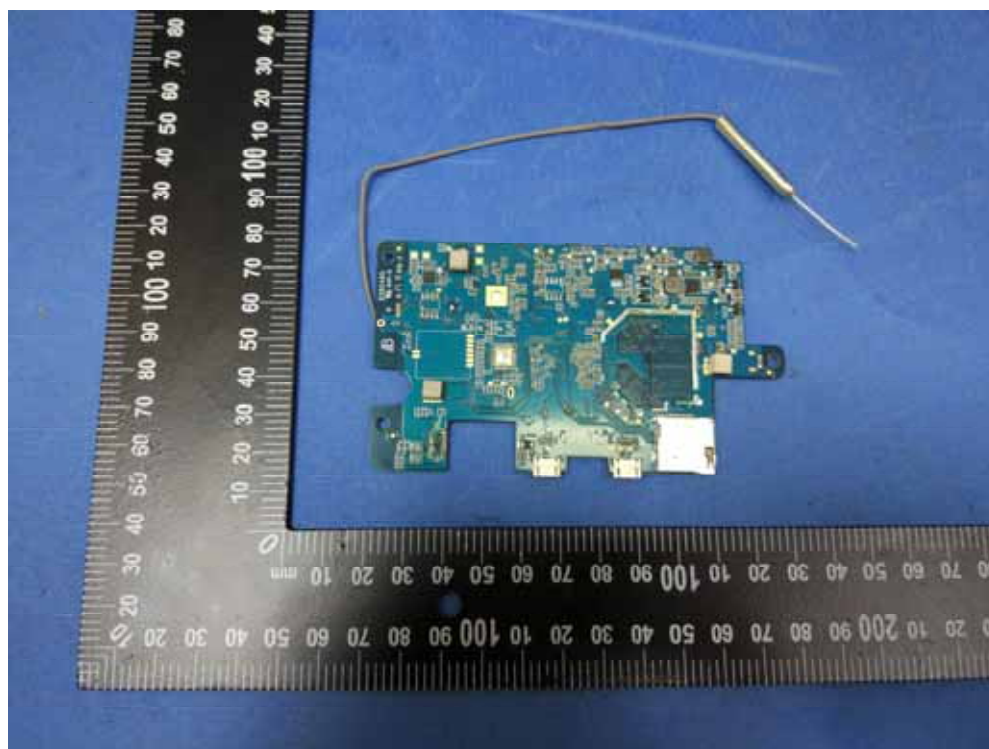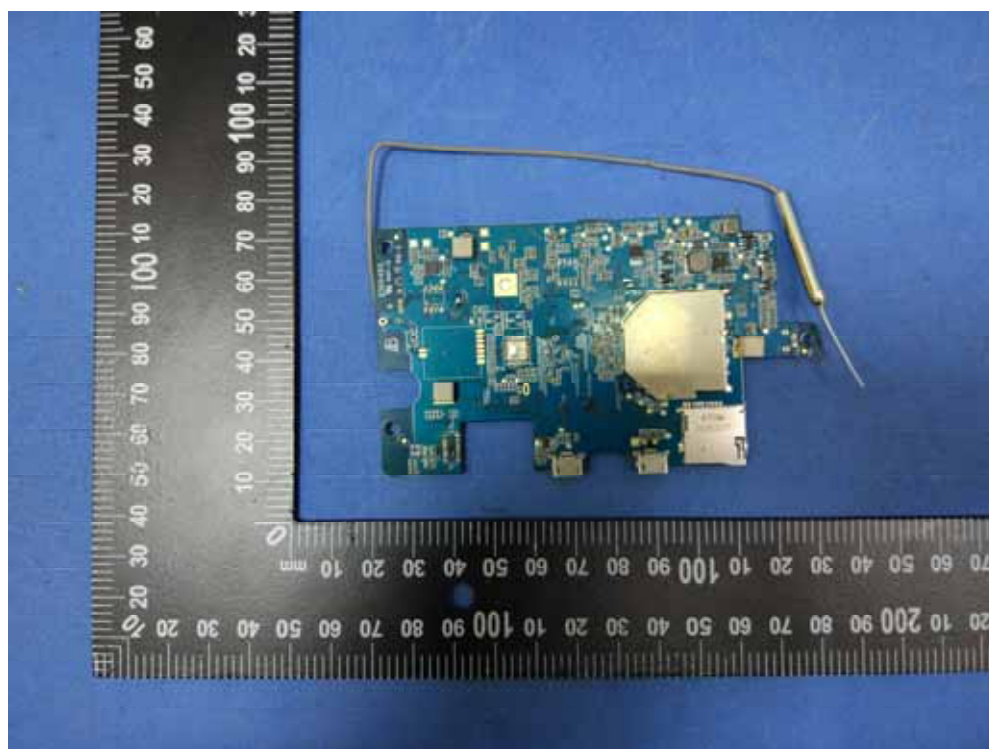

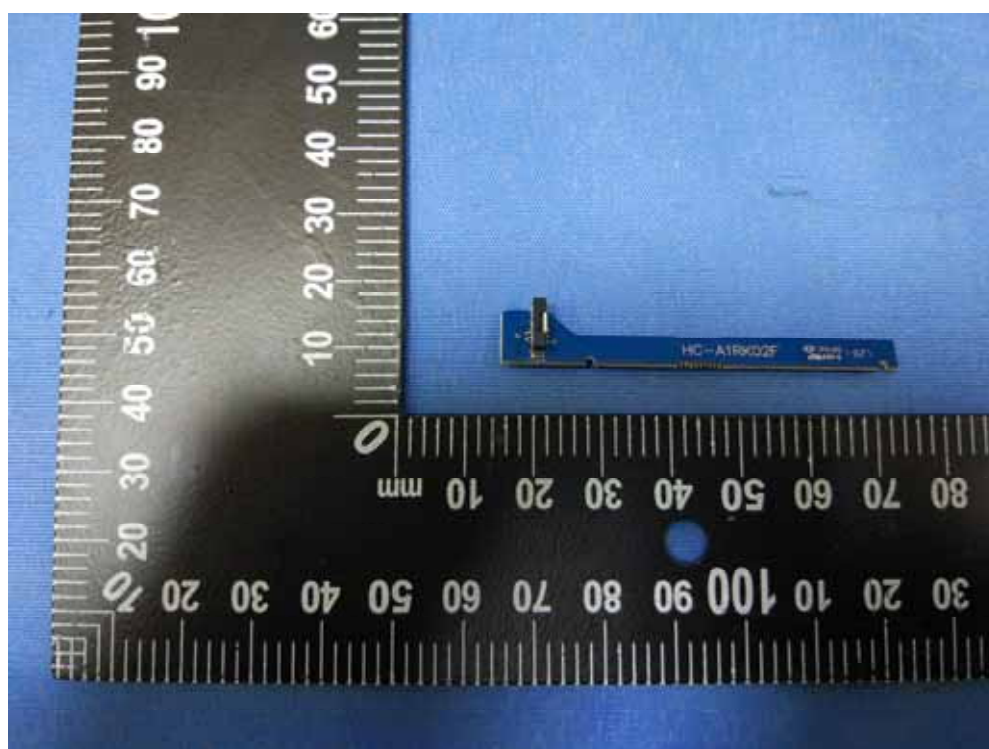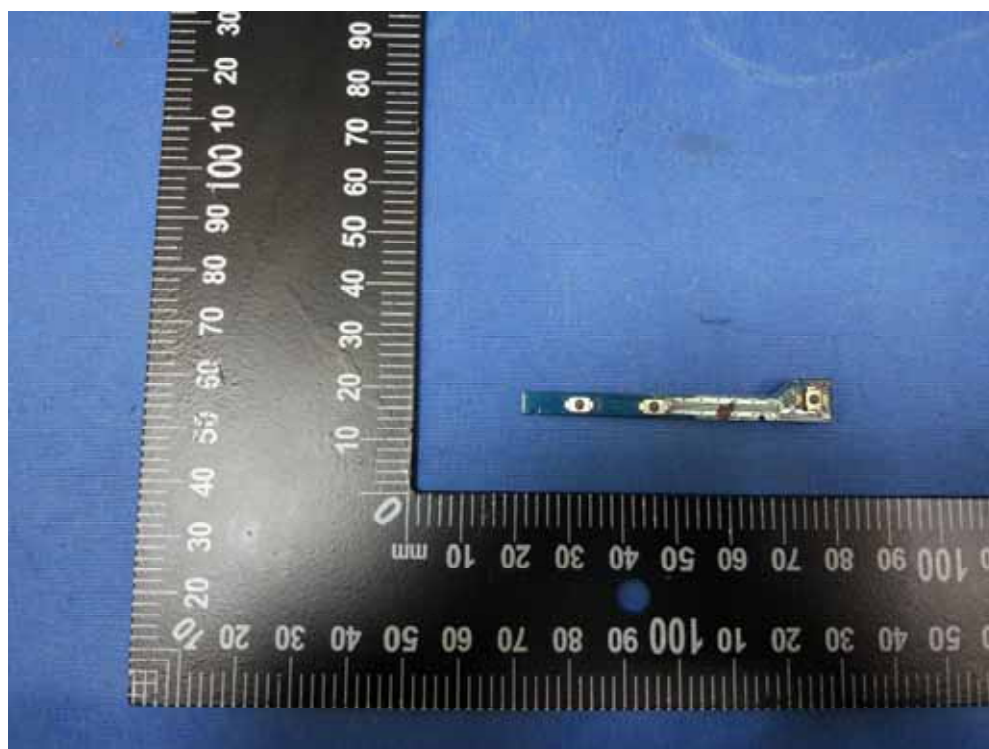

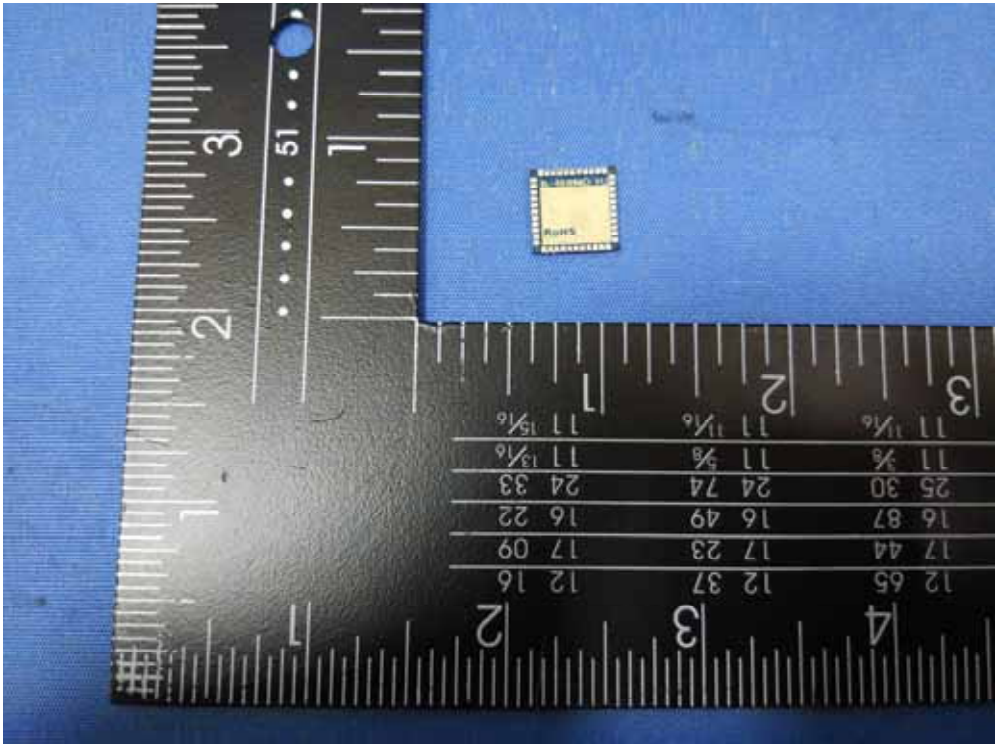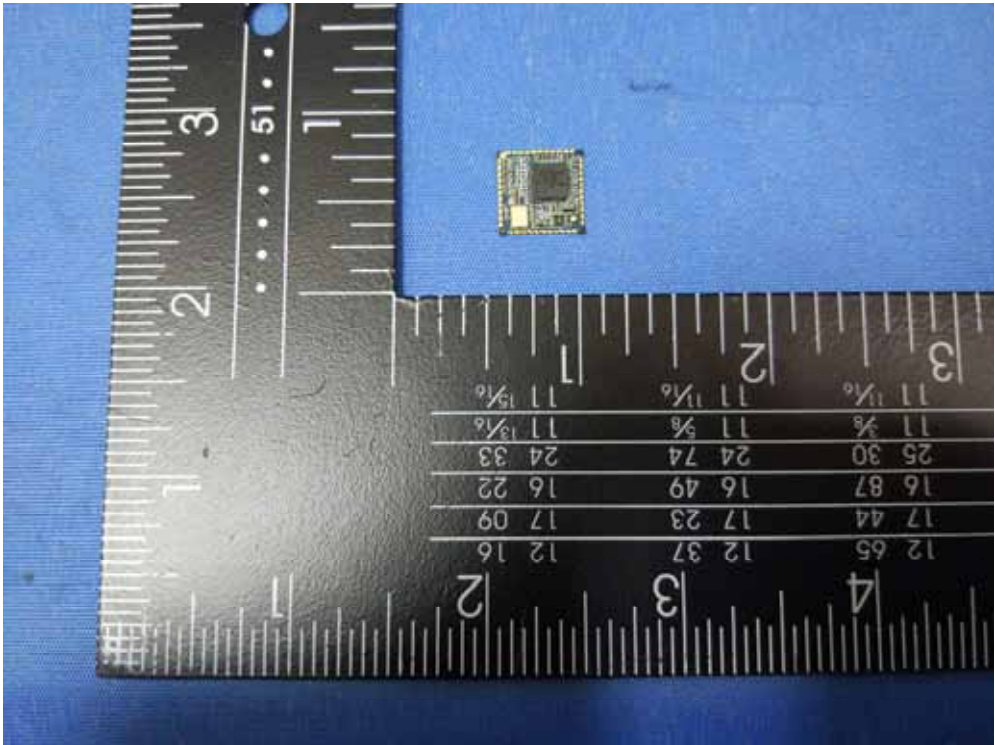

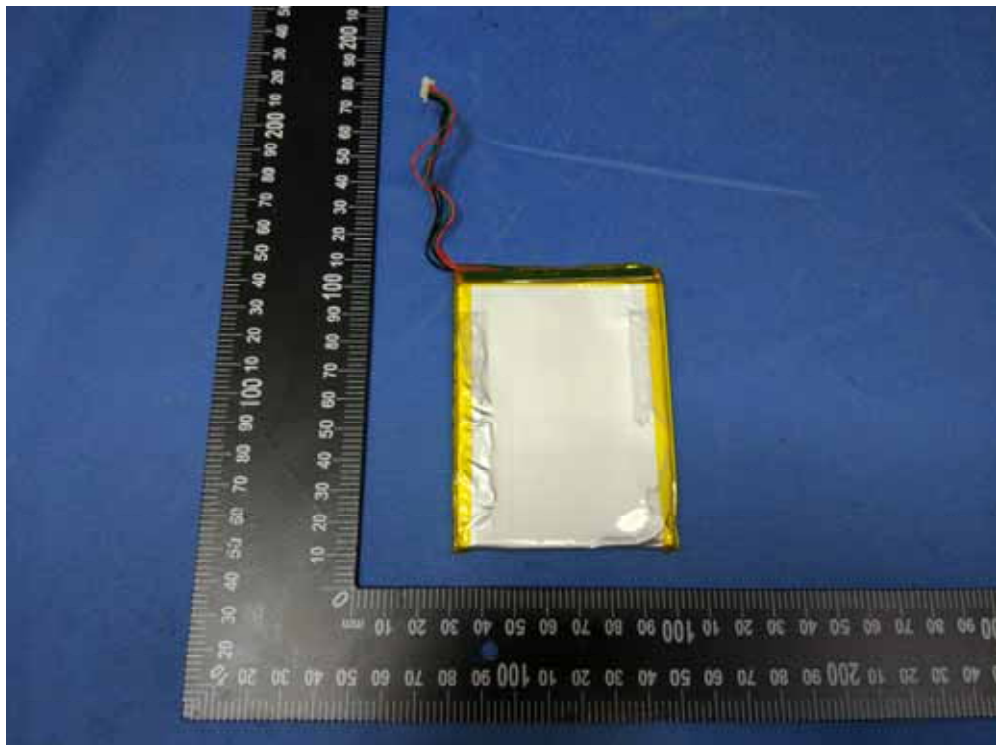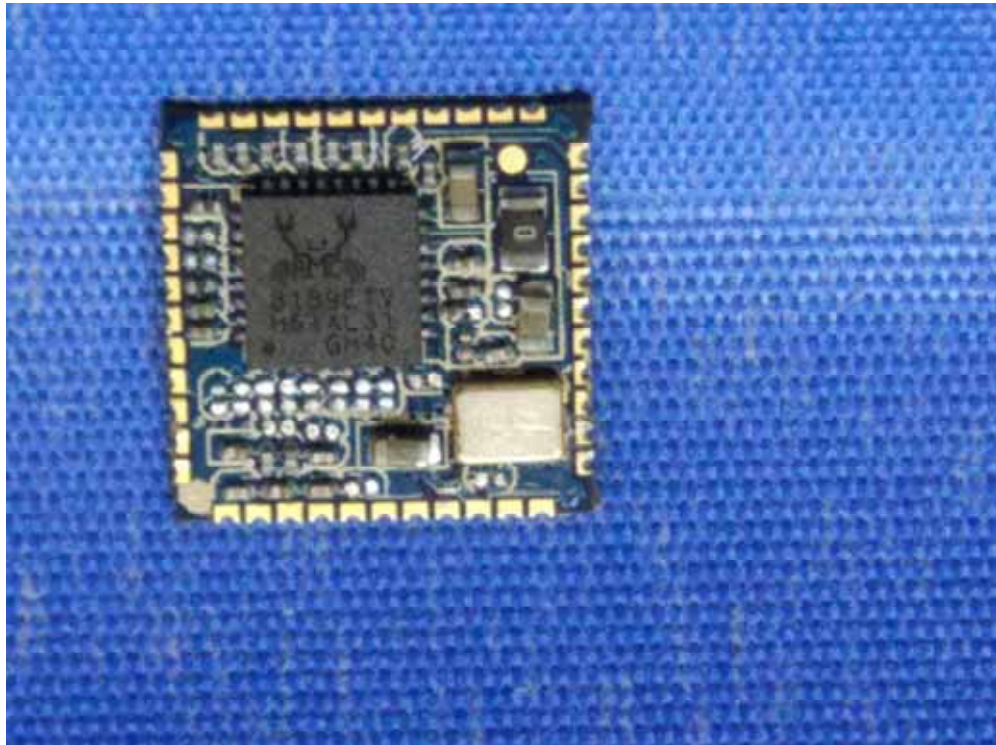

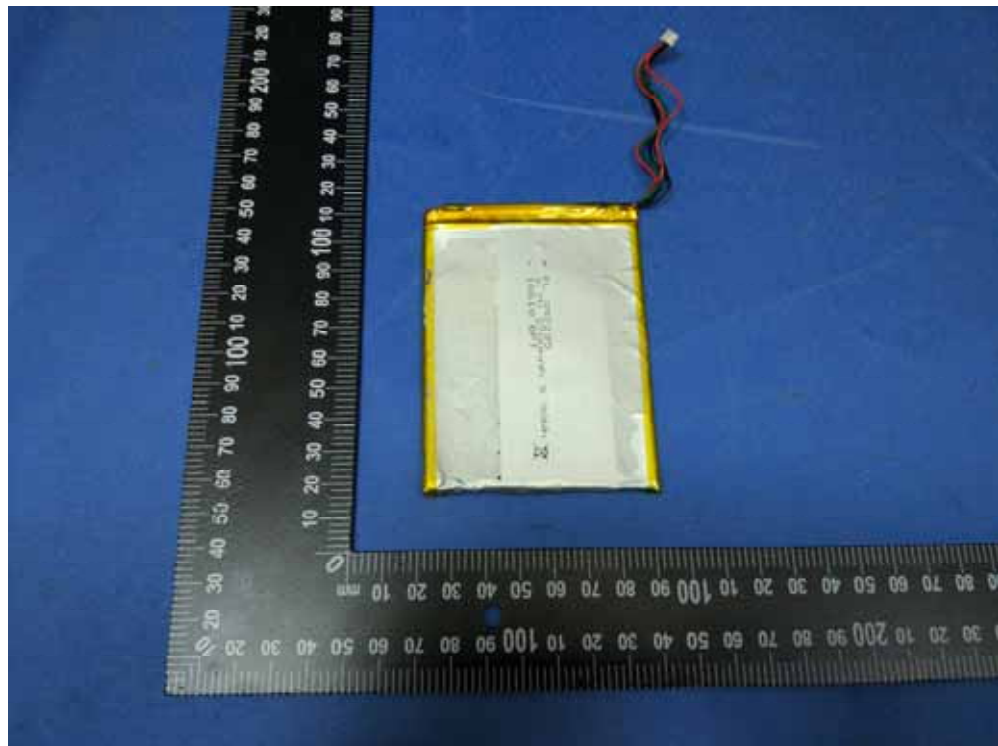

=====End of Report=====