

Advanced
Compliance Laboratory

6 Randolph Way
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT of

Remote Controller
MODEL: BN-3S-33V (BN-3S-33RC)
FCC ID: **DCO-BN-3S-33**

September 29, 2014

This report concerns (check one): Original grant Class II change _____
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes _____ no
If yes, defer until: _____ (date)
Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes _____ no
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for: ALPHA ARSENAL LLC
Report prepared by: Advanced Compliance Lab
Report number: 0048-140923-01

NVLAP®

The test result in this report IS supported and covered by the
NVLAP accreditation

Table of Contents

Report Cover Page.....	1
Table of Contents.....	2
Figures.....	3
1. GENERAL INFORMATION.....	4
1.1 Verification of Compliance	4
1.2 Equipment Modifications	5
1.3 Product Information	6
1.4 Test Methodology	6
1.5 Test Facility	6
1.6 Test Equipment	6
1.7 Statement for the Document Use	7
2. PRODUCT LABELING.....	8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification	9
3.2 Special Accessories	9
3.3 Configuration of Tested System.....	9
4. SYSTEM SCHEMATICS	13
5. CONDUCTED EMISSION DATA	14
5.1 Test Methods and Conditions.....	14
5.2 Test Data.....	14
6. RADIATED EMISSION DATA.....	17
6.1 Field Strength Calculation	17
6.2 Test Methods and Conditions.....	17
6.3 Test Data.....	17
6.4 Occupied Bandwidth.....	19
7. PHOTOS OF EUT	21

Figures

Figure 2.1 FCC ID Label.....	8
Figure 2.2 Location of Label on Back of the EUT.....	8
Figure 3.1 Radiated Test Setup, Position 1.....	10
Figure 3.2 Radiated Test Setup, Position 2.....	10
Figure 3.3 Radiated Test Setup, Position 3.....	11
Figure 3.4 Conducted Test Setup, Front.....	12
Figure 3.5 Conducted Test Setup, Rear.....	12
Figure 4.1 EUT Schematics.....	13
Figure 5.1 Line Conducted.....	15
Figure 5.2 Neutral Conducted	16
Figure 6.1 Bandwidth Plot	19
Figure 6.2 Pulse Train Timing	20
Figure 7.1 Front View.....	22
Figure 7.2 Rear View	23
Figure 7.3 Cover Opened_ Inside View	24
Figure 7.4 Component Side.....	25
Figure 7.5 Foil Side.....	26

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: Remote Controller
Model: BN-3S-33V (BN-3S-33RC)
Applicant: ALPHA ARSENAL LLC
Test Type: FCC Part 15C CERTIFICATION (15.231: a)
Result: PASS
Tested by: ADVANCED COMPLIANCE LABORATORY
Test Date: September 29, 2014
Report Number: 0048-140923-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	± 2.36	± 2.99	± 1.83


Wei Li
Lab Manager
Advanced Compliance Lab

Date: September 29, 2014

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	FCC ID	CABLE
Product	Remote Controller BN-3S-33V (BN-3S-33RC) ⁽¹⁾	DCO-BN-3S-33	
Housing	PLASTICS		
Power Supply	3V Battery		
Operation Freq.	434.5 Hz		
Device Type	Periodic Operation		
Receiver	RX receiver		

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2003 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment


Manufacturer	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A00290	EMI Receiver	15/10/14
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	05/01/15
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/15
Agilent	E4440A	US40420700	PSA Spectrum Analyzer	04/08/15
EMCO	3115	4945	Double Ridge Guide Horn Antenna	12/03/15
Electro-Meterics	ALR-25M/30	289	10KHz-30MHz Active Loop Antenna	27/05/15

All Test Equipment Used are Calibrated Traceable to NIST Standards. Calibration Interval : 2 years.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

2. PRODUCT LABELING

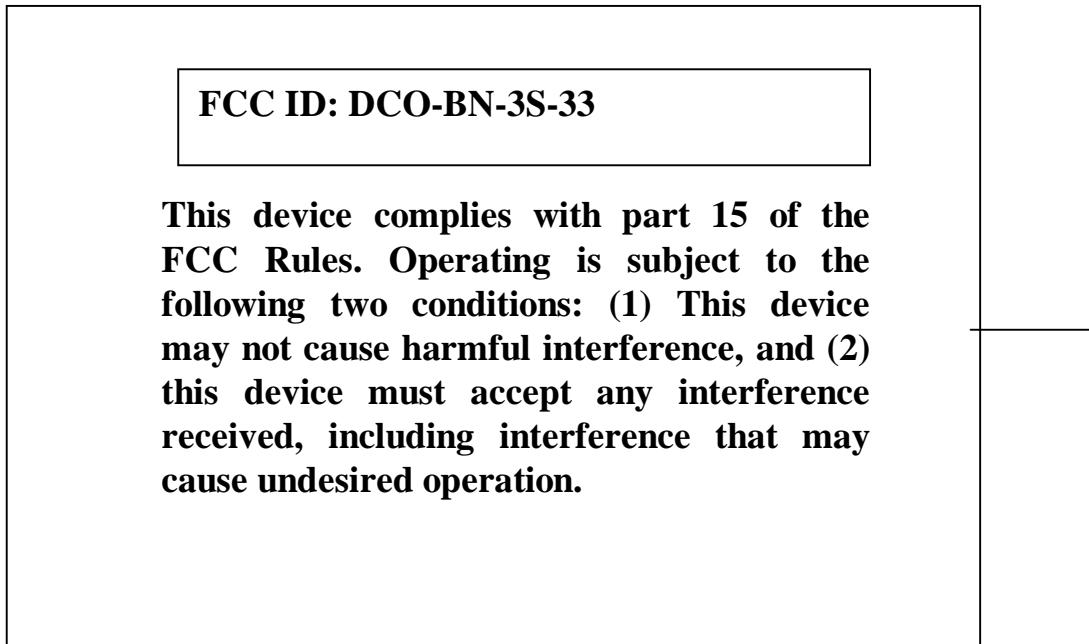

This device complies with part 15 of the FCC Rules. Operating is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Figure 2.1 FCC ID Label

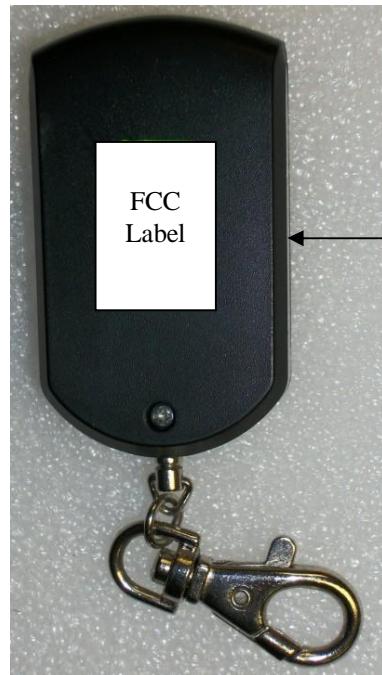


Figure 2.2 FCC ID Label Location

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna is on PCB.

BN-3S-33V & BN-3S-33RC have identical PCB design. The non-RF component, vibration motor, is not installed in BN-3S-33RC. Pre-tests were conducted on both models. The data in worst case is used for final report.

The transmission does stop within 5s after the remote is manually triggered by pushing a button.

Testing was performed as EUT was operated continuously. Fresh batteries were used.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1 to Figure 3.5 illustrate this system, which is tested standing along.

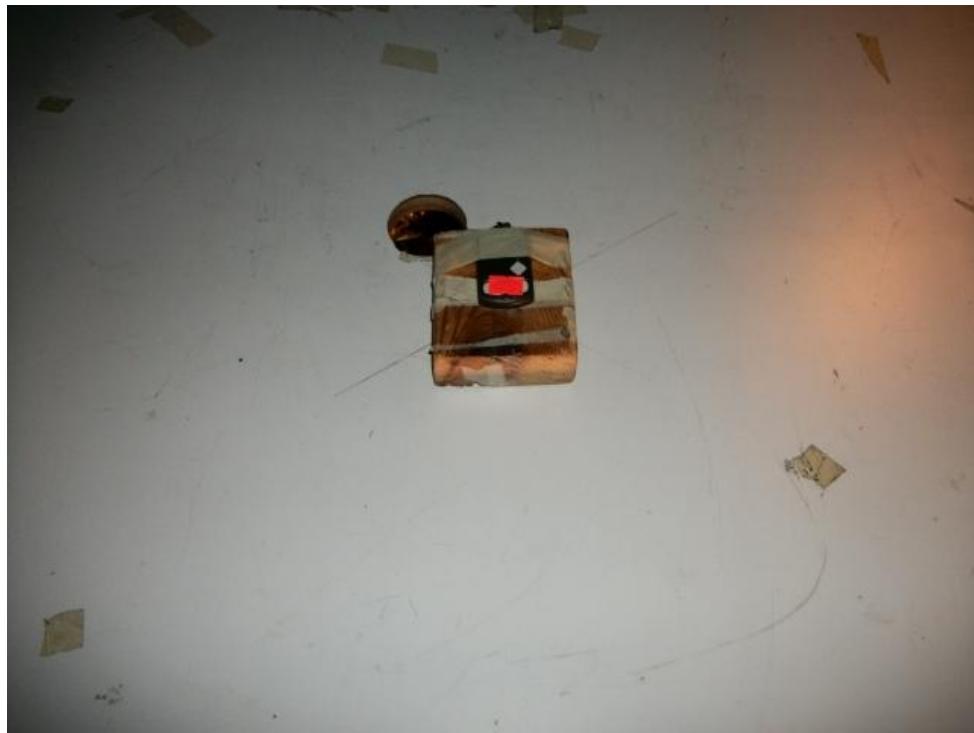


Figure 3.1 Radiated Test Setup, position 1-X



Figure 3.2 Radiated Test Setup, position 2-Y



Figure 3.3 Radiated Test Setup, position 3-Z

N/A

Figure 3.4 Conducted Setup- Front

N/A

Figure 3.5 Conducted Setup- Rear

4. SYSTEM SCHEMATICS

See Attachment.

Figure 4.1 System Schematics

5. CONDUCTED EMISSION DATA

5.1 Test Methods and Conditions

The EUT was under normal operational mode during the conducted emission test. EMI Receiver was scanned from 150KHz to 30MHz with maximum hold mode for maximum emission. Recorded data was sent to the plotter to generate output in linear format. At the input of the spectrum analyzer, a HP transient limiter is inserted for protective purpose. This limiter has a 10 dB attenuation in the range of 150KHZ to 30MHZ. That factor was automatically compensated by the receiver, so the readings are the corrected readings. The reference of the plot is the CISPR 22 Class B limit in Figure 5.1 through Figure 5.2.

Conducted Emission Technical Requirements				
Frequency Range	Class A		Class B	
	Quasi-Peak dBuV	Average dBuV	Quasi-Peak dBuV	Average dBuV
150kHz -0.5MHz	79 (8912uV)	66 (1995uV)	66-56	56-46
0.5MHz-30MHz	73 (4467uV)	60 (1000uV)	---	---
0.5MHz- 5MHz	---	---	56	46 (250uV)
5MHz-30MHz	---	---	60	50

Emissions that have peak values close to the specification limit (if any) are also measured in the quasi-peak mode to determine compliance.

5.2 Test Data

Figure 5.1-5.2 show the neutral and line conducted emissions for the standard operation.

N/A

Test Personnel:

Tester Signature: _____

Date: _____

Typed/Printed Name: _____

N/A

Fig. 5.1 Conducted Emission-Line

N/A

Fig. 5.2 Conducted Emission- Neutral

6. RADIATED EMISSION DATA

6.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

The pulse train timing plots are showed in its operational description document:

Coeff. = 0.5

The maximum average field strength should be 0.5 of the peak field strength measured. So we use peak value minus 6dB as calculated maximum average field strength.

6.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range 30MHz - 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Up to 10th harmonics were investigated.

6.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 6.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: September 29, 2014

Radiated Test Data*

Frequency (MHz)	Polarity [H or V], Position (X, Y, Z)	Height (m)	Azimuth (Degree)	Peak Reading (dBmV/m)	Cal culated Average Reading (dBmV/m)	FCC 3m Li mit (dBmV/m)	Di fference from li mit (dB)
434.5	H, X(1)	1.1	270	79.7	73.7	80.8(3)	-7.1
869.2	H, X	1.1	235	47.8	41.8	60.8(4)	-19.0
1303.7	H, X	1.0	135	49.7	43.7	54.0(2)	-10.3
1738.2	H, X	1.0	270	51.0	45.0	60.80	-15.8
434.5	V, X	1.2	000	77.1	71.1	80.80	-9.7
869.2	V, X	1.1	180	47.6	41.6	60.80	-19.2
1303.7	V, X	1.1	000	54.8	48.8	54.00	-5.2
1738.2	V, X	1.1	000	51.5	45.5	60.80	-15.3
434.5	H, Y	1.1	270	74.6	68.6	80.80	-12.2
869.2	H, Y	1.1	090	45.7	39.7	60.80	-21.1
1303.7	H, Y	1.0	135	48.5	42.5	54.00	-11.5
1738.2	H, Y	1.0	090	50.9	44.9	60.80	-15.9
434.5	V, Y	1.2	180	76.1	70.1	80.80	-10.7
869.2	V, Y	1.1	235	44.1	38.1	60.80	-22.7
1303.7	V, Y	1.1	000	52.3	46.3	54.00	-7.7
1738.2	V, Y	1.1	180	52.2	46.2	60.80	-14.6
434.5	H, Z	1.1	170	70.3	64.3	80.80	-16.5
869.2	H, Z	1.1	045	41.1	35.1	60.80	-25.7
1303.7	H, Z	1.0	135	48.6	42.6	54.00	-11.4
1738.2	H, Z	1.0	235	49.2	43.2	60.80	-17.6
434.5	V, Z	1.2	090	79.7	73.7	80.80	-7.1
869.2	V, Z	1.1	135	47.6	41.6	60.80	-19.2
1303.7	V, Z	1.1	000	54.8	48.8	54.00	-5.2
1738.2	V, Z	1.1	190	53.4	47.4	60.80	-13.4

(1) See Figure 3.1, 3.2 and 3.3 for definition of position X-1, Y-2, Z-3.

(2) Restricted band.

(3) Fundamental limit is 3750-12500 microvolts/meter linear interpolations (average reading). Per FCC 15.231(a).

(4) Spurious limit is 375-1250 microvolts/meter linear interpolations (average reading). Per 15.231(a).

* Prescans were conducted on Model BN-3S-33V and BN-3S-33RC. The data for the worse case, BN-3S-33V operation, was recorded for final filling report.

6.4 Occupied Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency, in this case, 1.086MHz($434.5 \times 0.25\%$). Bandwidth is determined at the points 20dB down from the modulated carrier. Figure 5.2 shows the occupied bandwidth plot.

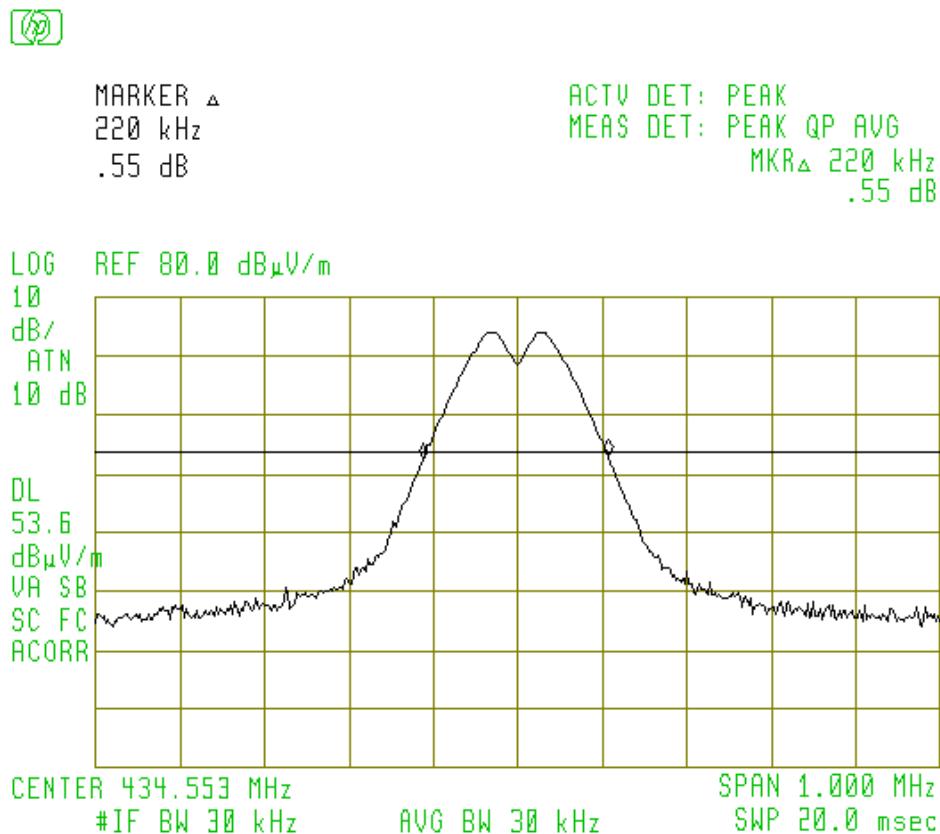


Figure 6.1 Occupied Bandwidth

