



*An IIA Company*

# Test Report - FCC Part 74 FM STL & LPAS

## Prepared For: BEI Electronics, LLC

Approved for Release By:

Signature: *Bruno Clavier*

Name & Title: Bruno Clavier, General Manager

Date of Signature 10/28/2021

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

## Table of Contents

---

1. CUSTOMER INFORMATION.....	3
1.1 PART 74 TEST RESULT SUMMARY .....	4
2. LOCATION OF TESTING.....	5
2.1 TEST LABORATORY .....	5
2.1 TESTING WAS PERFORMED, REVIEWED BY .....	5
3. TEST SAMPLE(S) (EUT/DUT).....	6
3.1 DESCRIPTION OF THE EUT.....	6
3.2 CONFIGURATION OF EUT .....	7
3.3 TEST SETUP OF EUT.....	7
4. TEST METHODS & APPLICABLE REGULATORY LIMITS.....	8
4.1 TEST METHODS/STANDARDS/GUIDANCE: .....	8
4.2 APPLIED LIMITS AND REGULATORY LIMITS:.....	8
5. MEASUREMENT UNCERTAINTY.....	8
6. ENVIRONMENTAL CONDITIONS .....	8
6.1 TEMPERATURE & HUMIDITY.....	8
7. LIST OF TEST EQUIPMENT AND TEST FACILITY.....	9
7.1 LIST OF TEST EQUIPMENT .....	9
8. TEST RESULTS .....	10
8.1 BANDWIDTH & EMISSION.....	11
8.1.1 Bandwidth Plot, 99%, 941.6 MHz .....	12
8.1.1 Bandwidth Plot, 99%, 950.9 MHz .....	13
8.1.1 Bandwidth Plot, 99%, 959.2 MHz .....	14
9. ANNEX-A - PHOTOGRAPHS OF THE EUT.....	15
10. HISTORY OF TEST REPORT CHANGES.....	15



IIA Company  
Orlando, Florida 32869  
[imcoengr.com](http://imcoengr.com)

## 1. Customer Information

Customer: BEI Electronics, LLC  
Address: 4100 N 24TH STREET  
QUINCY IL 62305



## 1.1 Part 74 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 74 known as Auxiliary and Special Broadcast and Other Program Distributional Services; ANSI C63.26-2015. Full test results are available in this report.

The Following is for Test item FCC ID: DDE-GTX900

Clauses	Description of the Requirements	Result (Pass, Fail or N/A)
2.1049(e)(3) – (5)	Occupied Bandwidth	PASS

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").  
Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A


EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

### 2.1 Testing was performed, reviewed by

Dates of Testing: 10/28/2021

Signature:



Sr. EMC Engineer  
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

10/28/2021



### 3. Test Sample(s) (EUT/DUT)

The test sample was received: 10/28/2021

#### 3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	DDE-GTX900
Brief Description	STL Transmitter
Type of Modular	N/A
Model(s) #	GTX-900
Firmware version	N/A
Software version	2.00
Serial Number	E20-9-515

Technical Characteristics	
Technology	STL Transmitter
Frequency Range	941 – 960 MHz
RF O/P Power (Max.)	42.23 dBm (16.71 W)
Modulation	FM
Bandwidth & Emission Class	256KF8E
Duty Cycle	N/A
Antenna Connector	N-Type
Voltage Rating (AC or Batt.)	AC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi
2			

### 3.2 Configuration of EUT

Test Modes				
Mode (#)	Mode (Type)	Test Frequencies	BW (nominal)	Emission Designator
1	FM	941.6 MHz 950.9 MHz 959.2 MHz	256k	F8E

#### Operating conditions during Testing:

The device was operated without the provided antenna(s).

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

#### Peripherals used during Testing:

No peripherals used.

### 3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

## 4. Test methods & Applicable Regulatory Limits

### 4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 74 Licensed device:

- 1) ANSI C63.26-2015

### 4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 74

## 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB

**Note:** The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.

## 6. Environmental Conditions

### 6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
<b>Note:</b> Specific environmental conditions that are applicable to a specific test are available in the test result section.	

## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### 7.1 List of Test Equipment

Type	Device	Manufacturer	Model	SN #	Current Cal	Cal Due
Audio Analyzer	<a href="#">Audio Analyzer</a>	HP	8903B	3011A13084	2/20/18	2/19/2021
Function Generator	<a href="#">Function Generator</a>	Standford	DS340	25200	2/21/18	2/20/2021
Modulation Analyzer	<a href="#">Modulation Analyzer</a>	HP	8901A	3050A05856	4/23/20	4/23/2023
Oscilloscope	<a href="#">Oscilloscope</a>	LeCroy	LT364	00414	3/28/19	3/27/2022
Signal Generator	<a href="#">Signal Generator HP 8648C</a>	HP	8648C	3847A04696	9/11/20	9/11/2023
Signal Generator	<a href="#">Signal Generator R&amp;S SMU-200A</a>	Rohde & Schwarz	SMU200A	103195	4/23/18	4/22/2021
Multimeter	<a href="#">Digital Multimeter</a>	Fluke	77	35053830	9/9/20	9/9/2023
Frequency Counter	<a href="#">Frequency Counter</a>	HP	5385A	2730A03025	9/9/20	9/9/2023
Antenna	<a href="#">Active Loop</a>	ETS-Lindgren	6502	00062529	10/20/20	10/20/2023
Antenna	<a href="#">Biconical 1057</a>	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	<a href="#">Log-Periodic 1243</a>	Eaton	96005	1243	4/20/18	4/19/2021
Antenna	<a href="#">Double-Ridged Horn/ETS Horn 1</a>	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
CHAMBER	<a href="#">CHAMBER</a>	Panashield	3M	N/A	3/12/19	3/11/2021
Pre-amp	<a href="#">Pre-amp</a>	RF-LAMDA	RLNA00M45GA	NA	2/27/19	2/26/2022
Receiver	<a href="#">EMI Test Receiver R&amp;S ESU 40</a>	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021
Frequency Counter	<a href="#">Frequency Counter Small</a>	HP	5385A	3242A07460	9/9/20	9/9/2023
Thermometer	<a href="#">Type K J Thermometer</a>	Martel	303	080504494	1/6/18	1/5/2021
Receiver	<a href="#">Service Monitor 3920</a>	Aeroflex	3920	299001542	1/10/18	1/9/2021

Software	Author	Version	Validation Or
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.


A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB $\mu$ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB $\mu$ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB $\mu$ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

## 8.1 Bandwidth & Emission


Limits from FCC Parts 2.1049 and test procedure from ANSI C63.26-2015.

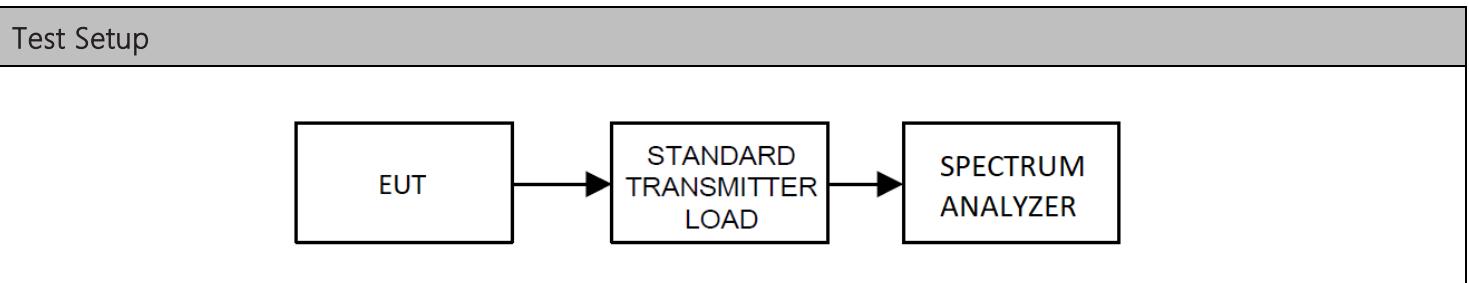

Test Results, Occupied Bandwidth		
Tuned Frequency (MHz)	Occupied Bandwidth (kHz)	Bandwidth Type
941.6	241.98	99%
950.9	241.98	99%
959.2	241.98	99%


## Occupied Bandwidth, Spectrum Plots

### 8.1.1 Bandwidth Plot, 99%, 941.6 MHz

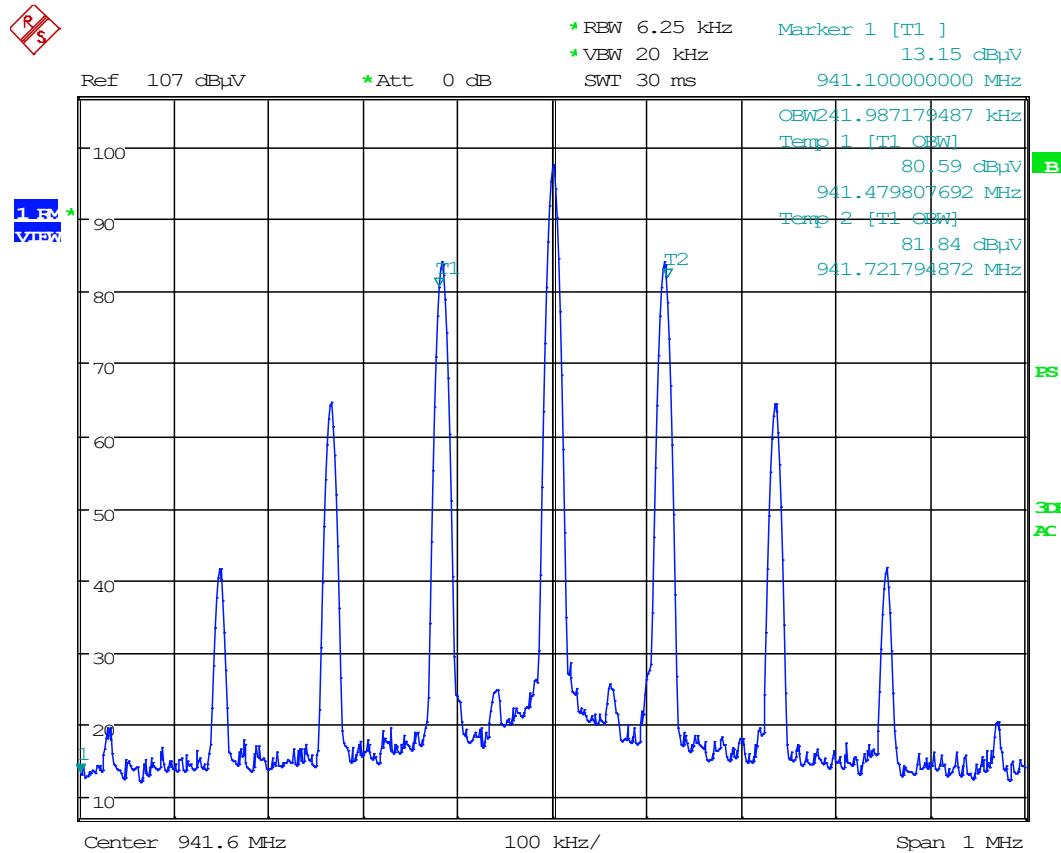


Date: 27.OCT.2021 16:37:16

### 8.1.1 Bandwidth Plot, 99%, 950.9 MHz

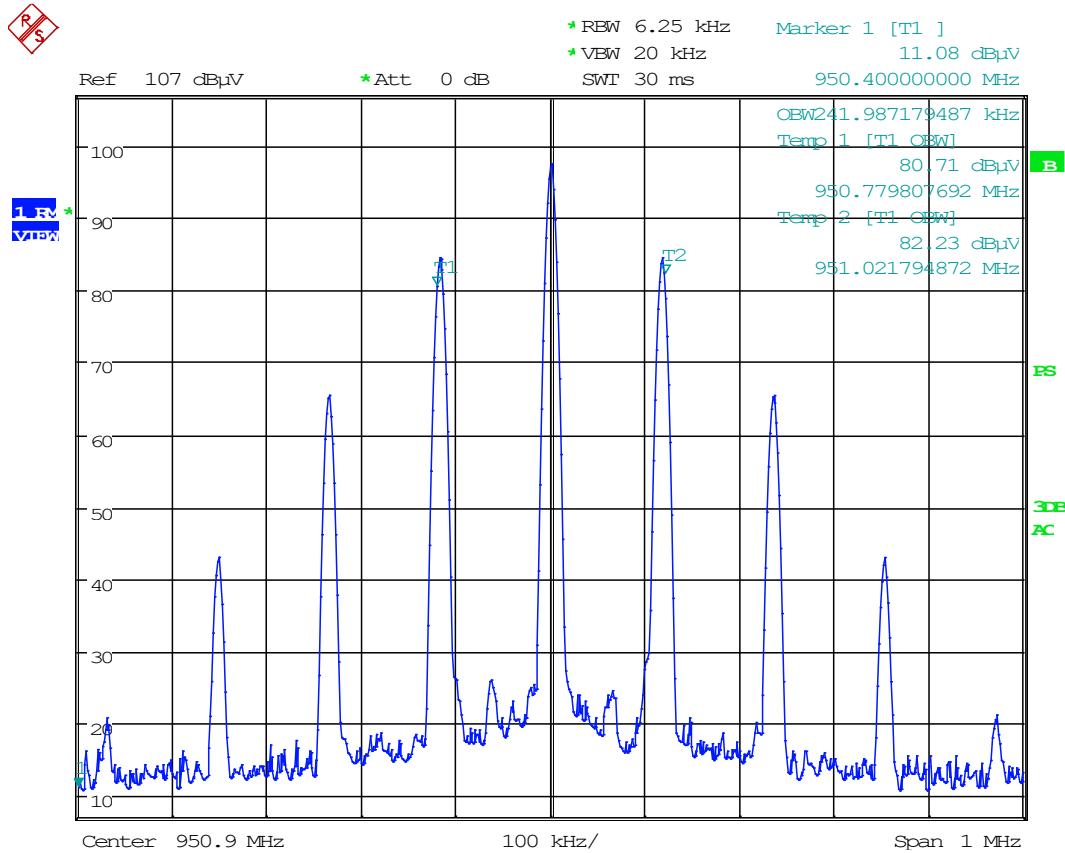

Date: 27.OCT.2021 16:38:07

### 8.1.1 Bandwidth Plot, 99%, 959.2 MHz

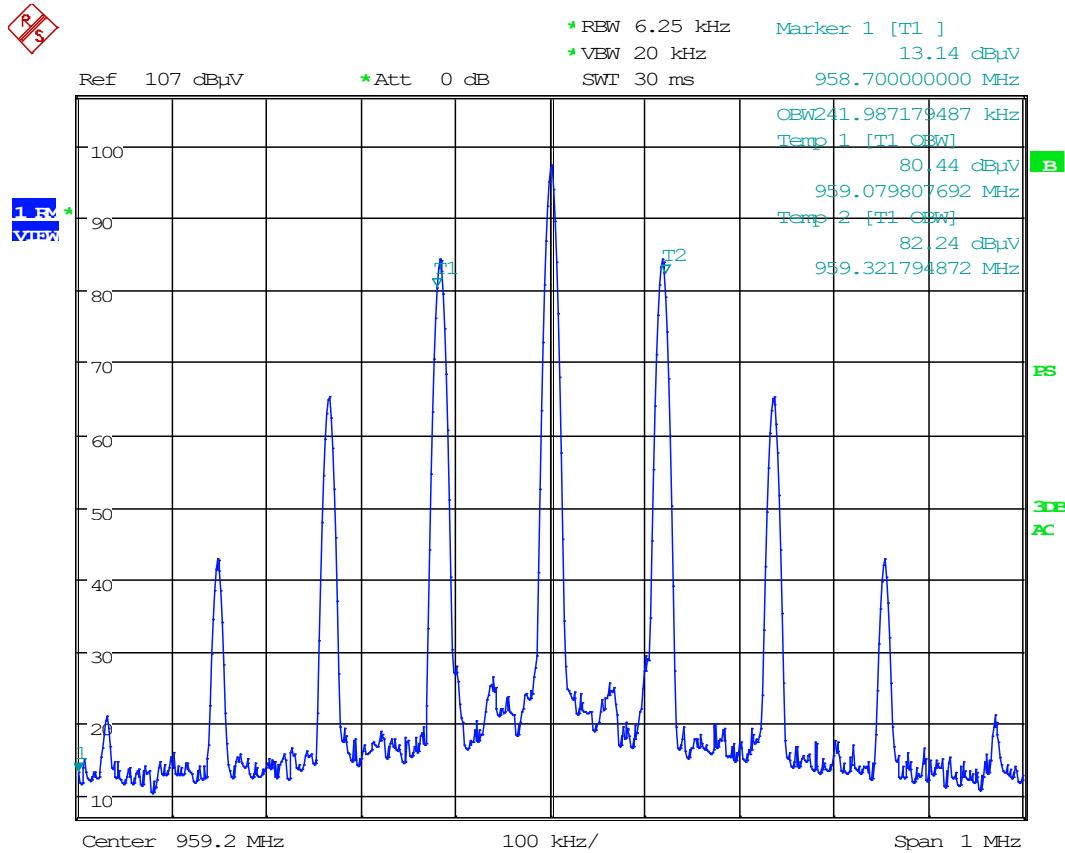

Date: 27.OCT.2021 16:38:37

## 9. ANNEX-A - Photographs of the EUT

NA for a C2PC

## 10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_4986-20_FCC_PT74_1 C2PC	1	Initial release	10/28/2021

---

END OF TEST REPORT

---