



The University of Michigan  
Radiation Laboratory  
3228 EECS Building  
Ann Arbor, MI 48109-2122  
Tel: (734) 764-0500  
Fax: (734) 647-2106

Measured Radio Frequency Emissions  
From

**Thomas & Betts Corporation Transmitter**  
**FCC ID: DE4-3301TB**  
**IC: 2998A-3301T**

Test Report No. 417124-589  
November 8, 2010

Copyright © 2010

For:  
Thomas & Betts Corporation  
8155 T&B Boulevard  
Memphis, TN 38125  
Contact: Hal Fonville  
hal\_fonville@TNB.com  
Phone: (901) 252-8439  
Fax: (901) 252-1374

Measurements made by: Valdis V. Liepa

Test report written by: Joseph D. Brunett

Testing supervised by:  
Report Approved by:

A handwritten signature in black ink, reading 'Valdis V. Liepa'.

Valdis V. Liepa  
Research Scientist

---

## Summary

Tests for compliance with FCC Regulations, CFR 47, Part 15 and with Industry Canada RSS-210/Gen, were performed on a Thomas & Betts, FCC ID: DE4-3301TB, IC: 2998A-3301T. This device under test (DUT) is subject to the rules and regulations as a Transmitter.

In testing completed on October 6, 2010, the DUT tested met the allowed specifications for radiated emissions by 7.2 dB. Conducted emissions are not subject to regulation as the DUT is powered by two 3VDC batteries.

## **Table of Contents**

|    |                                                        |   |
|----|--------------------------------------------------------|---|
| 1. | Introduction.....                                      | 3 |
| 2. | Equipment Used.....                                    | 3 |
| 3. | Device Under Test .....                                | 4 |
|    | 3.1 Description & Block Diagram .....                  | 4 |
|    | 3.2 Variants and Samples.....                          | 4 |
|    | 3.3 Modes of Operation .....                           | 4 |
|    | 3.4 Exemptions .....                                   | 4 |
|    | 3.5 EMC Relevant Modifications .....                   | 4 |
| 4. | Emissions Limits.....                                  | 5 |
|    | 4.1 Radiated Emissions Limits.....                     | 5 |
| 5. | Measurement Procedures .....                           | 6 |
|    | 5.1 Semi-Anechoic Chamber Radiated Emissions.....      | 6 |
|    | 5.2 Outdoor Radiated Emissions.....                    | 6 |
|    | 5.3 Radiated Field Computations.....                   | 6 |
|    | 5.4 Indoor Power Line Conducted Emissions.....         | 6 |
|    | 5.5 Supply Voltage Variation.....                      | 7 |
| 6. | Test Results.....                                      | 7 |
|    | 6.1 Radiated Emissions.....                            | 7 |
|    | 6.1.1 Correction for Pulse Operation .....             | 7 |
|    | 6.1.2 Emission Spectrum .....                          | 7 |
|    | 6.1.3 Emission Bandwidth .....                         | 7 |
|    | 6.1.4 Supply Voltage and Supply Voltage Variation..... | 7 |
|    | 6.2 Conducted Emissions.....                           | 7 |

## 1. Introduction

This Thomas & Betts Transmitter was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989 as subsequently amended, and with Industry Canada RSS-210/Gen, Issue 7, June 2007. Tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-2003 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057A-1).

## 2. Equipment Used

The test equipment commonly used in our facility is listed in Table 2.1. Except where indicated as a pre-test, monitoring, or support device; all equipment listed below is a part of the University of Michigan Radiation Laboratory (UMRL) quality system. This quality system has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to national standards.

**Table 2.1 Test Equipment.**

| Test Instrument                    | Used                                | Manufacturer/Model                     | Q Number  |
|------------------------------------|-------------------------------------|----------------------------------------|-----------|
| Spectrum Analyzer (9kHz-26GHz)     | <input checked="" type="checkbox"/> | Hewlett-Packard 8593E, SN: 3412A01131  | HP8593E1  |
| Spectrum Analyzer (9kHz-6.5GHz)    | <input checked="" type="checkbox"/> | Hewlett-Packard 8595E, SN: 3543A01546  | JDB8595E  |
| Power Meter                        | <input type="checkbox"/>            | Hewlett-Packard, 432A                  | HP432A1   |
| Harmonic Mixer (26-40 GHz)         | <input type="checkbox"/>            | Hewlett-Packard 11970A, SN: 3003A08327 | HP11970A1 |
| Harmonic Mixer (40-60 GHz)         | <input type="checkbox"/>            | Hewlett-Packard 11970U, SN: 2332A00500 | HP11970U1 |
| Harmonic Mixer (75-110 GHz)        | <input type="checkbox"/>            | Hewlett-Packard 11970W, SN: 2521A00179 | HP11970W1 |
| Harmonic Mixer (140-220 GHz)       | <input type="checkbox"/>            | Pacific Millimeter Prod., GMA, SN: 26  | PMPGMA1   |
| S-Band Std. Gain Horn              | <input type="checkbox"/>            | S/A, Model SGH-2.6                     | SBAND1    |
| C-Band Std. Gain Horn              | <input type="checkbox"/>            | University of Michigan, NRL design     | CBAND1    |
| XN-Band Std. Gain Horn             | <input type="checkbox"/>            | University of Michigan, NRL design     | XNBAND1   |
| X-Band Std. Gain Horn              | <input type="checkbox"/>            | S/A, Model 12-8.2                      | XBAND1    |
| X-band horn (8.2- 12.4 GHz)        | <input type="checkbox"/>            | Narda 640                              | XBAND2    |
| X-band horn (8.2- 12.4 GHz)        | <input type="checkbox"/>            | Scientific Atlanta , 12-8.2, SN: 730   | XBAND3    |
| K-band horn (18-26.5 GHz)          | <input type="checkbox"/>            | FXR, Inc., K638KF                      | KBAND1    |
| Ka-band horn (26.5-40 GHz)         | <input type="checkbox"/>            | FXR, Inc., U638A                       | KABAND1   |
| U-band horn (40-60 GHz)            | <input type="checkbox"/>            | Custom Microwave, HO19                 | UBAND1    |
| W-band horn(75-110 GHz)            | <input type="checkbox"/>            | Custom Microwave, HO10                 | WBAND1    |
| G-band horn (140-220 GHz)          | <input type="checkbox"/>            | Custom Microwave, HO5R                 | GBAND1    |
| Bicone Antenna (30-250 MHz)        | <input checked="" type="checkbox"/> | University of Michigan, RLBC-1         | LBBIC1    |
| Bicone Antenna (200-1000 MHz)      | <input checked="" type="checkbox"/> | University of Michigan, RLBC-2         | HBBIC1    |
| Dipole Antenna Set (30-1000 MHz)   | <input checked="" type="checkbox"/> | University of Michigan, RLDP-1,-2,-3   | UMDIP1    |
| Dipole Antenna Set (30-1000 MHz)   | <input type="checkbox"/>            | EMCO 3121C, SN: 992 (Ref. Antennas)    | EMDIP1    |
| Active Rod Antenna (30 Hz-50 MHz)  | <input type="checkbox"/>            | EMCO 3301B, SN: 3223                   | EMROD1    |
| Active Loop Antenna (30 Hz-50 MHz) | <input type="checkbox"/>            | EMCO 6502, SN:2855                     | EMLOOP1   |
| Ridge-horn Antenna (300-5000 MHz)  | <input checked="" type="checkbox"/> | University of Michigan                 | UMRH1     |
| Amplifier (5-1000 MHz)             | <input checked="" type="checkbox"/> | Avantek, A11-1, A25-1S                 | AVAMP1    |
| Amplifier (5-4500 MHz)             | <input checked="" type="checkbox"/> | Avantek                                | AVAMP2    |
| Amplifier (4.5-13 GHz)             | <input type="checkbox"/>            | Avantek, AFT-12665                     | AVAMP3    |
| Amplifier (6-16 GHz)               | <input type="checkbox"/>            | Trek                                   | TRAMP1    |
| Amplifier (16-26 GHz)              | <input type="checkbox"/>            | Avantek                                | AVAMP4    |
| LISN Box                           | <input type="checkbox"/>            | University of Michigan                 | UMLISN1   |
| Signal Generator                   | <input type="checkbox"/>            | Hewlett-Packard 8657B                  | HPSG1     |

### **3. Device Under Test**

#### **3.1 Description & Block Diagram**

The DUT is a 315.0 MHz transmitter, 0.75 x 0.75 x 2.5 inches in dimension and the carrier is pulse modulated and LC stabilized; the modulating frequency is crystal stabilized. The antenna is a trace on the PCB. The DUT is designed and manufactured by Thomas & Betts Corporation , 8155 T&B Boulevard Memphis, TN 38125.

| <b>Device</b> | <b>[Make], Model</b>    | <b>[S/N],P/N</b> | <b>EMC Consideration</b> |
|---------------|-------------------------|------------------|--------------------------|
| DUT           | [Thomas & Betts], 3301T | EMC1             | Software Modified        |
| DUT           | [Thomas & Betts], 3311T | EMC1             | Software Modified        |
| DUT           | [Thomas & Betts], 3341T | EMC1             | Normal Operating Mode    |

#### **3.2 Variants and Samples**

There are three electrically identical variants of the DUT. Model 3301T employs a white plastic housing with a black button, model 3341T employs a white plastic housing with a white button, and model: 3311T employs a black plastic housing with a black button and a metal front plate. Because of the effect of the metal front plate, this variant was also tested. Three samples were provided for testing: Two samples were provided with software modified for continuous repeated transmissions, one was provided as a normal operating sample.

#### **3.3 Modes of Operation**

The DUT is PWM modulated. It is manually activated and ceases to transmit within 5 seconds of deactivation. See Figure 6.1.

#### **3.4 Exemptions**

None.

#### **3.5 EMC Relevant Modifications**

No EMI Relevant Modifications were performed by this test laboratory.

#### 4. Emissions Limits

##### 4.1 Radiated Emissions Limits

The DUT tested falls under the category of an Intentional Radiator. The applicable testing frequencies and corresponding emission limits set by both the FCC and IC are given in Tables 4.1 and 4.2 below.

**Table 4.1. TX Emission Limits (FCC: 15.231(b), .205(a); IC: RSS-210 2.7 T4).**

| Frequency<br>(MHz)                                                                                             | Fundamental<br>Ave. E <sub>lim</sub> (3m) |           | Spurious**<br>Ave. E <sub>lim</sub> (3m) |           |
|----------------------------------------------------------------------------------------------------------------|-------------------------------------------|-----------|------------------------------------------|-----------|
|                                                                                                                | (μV/m)                                    | dB (μV/m) | (μV/m)                                   | dB (μV/m) |
| 260.0-470.0                                                                                                    | 3750-12500*                               |           | 375-1250                                 |           |
| 315                                                                                                            | 6042                                      | 75.6      | 604.2                                    | 55.6      |
| 433.9                                                                                                          | 10966                                     | 80.8      | 1096.6                                   | 60.8      |
| 322-335.4<br>399.9-410<br>608-614                                                                              | Restricted<br>Bands                       |           | 200                                      | 46.0      |
| 960-1240/1427(IC)<br>1300-1427<br>1435-1626.5<br>1645.5-1646.5 (IC)<br>1660-1710<br>1718.9-1722.2<br>2200-2300 | Restricted<br>Bands                       |           | 500                                      | 54.0      |

\* Linear interpolation, formula:  $E = -7083 + 41.67 * f$  (MHz)

\*\* Measure up to tenth harmonic; 120 kHz BW up to 1 GHz, 1 MHz BW above 1 GHz

**Table 4.2. Spurious Emission Limits (FCC: 15.33, .35, .109/209; IC: RSS-210 2.7, T2)**

| Freq. (MHz) | E <sub>lim</sub> (3m) μV/m | E <sub>lim</sub> dB(μV/m) |
|-------------|----------------------------|---------------------------|
| 30-88       | 100                        | 40.0                      |
| 88-216      | 150                        | 43.5                      |
| 216-960     | 200                        | 46.0                      |
| 960-2000    | 500                        | 54.0                      |

Note: Average readings apply above 1000 MHz (1 MHz BW), Quasi-Peak readings apply to 1000 MHz (120 kHz RBW), PRF of intentional emissions > 20 Hz for QPK to apply.

##### Power Line Conducted Emissions Limits

**Table 4.3 Emission Limits (FCC:15.107 (CISPR); IC: RSS-Gen, 7.2.2 T2).**

| Frequency<br>(MHz) | Class A (dBμV) |         | Class B (dBμV) |          |
|--------------------|----------------|---------|----------------|----------|
|                    | Quasi-peak     | Average | Quasi-peak     | Average  |
| .150 - 0.50        | 79             | 66      | 66 - 56*       | 56 - 46* |
| 0.50 - 5           | 73             | 60      | 56             | 46       |
| 5 - 30             | 73             | 60      | 60             | 50       |

Notes:

- The lower limit shall apply at the transition frequency
- The limit decreases linearly with the logarithm of the frequency in the range 0.15-0.50 MHz:

\*Class B Quasi-peak:  $\text{dB}\mu\text{V} = 50.25 - 19.12 * \log(f)$

\*Class B Average:  $\text{dB}\mu\text{V} = 40.25 - 19.12 * \log(f)$

- 9 kHz RBW

## **5. Measurement Procedures**

### **5.1 Semi-Anechoic Chamber Radiated Emissions**

To become familiar with the radiated emission behavior of the DUT, the device is first studied and measured in our shielded semi-anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

The DUT is laid on the test table as shown in the included block diagram and/or photographs. A shielded loop antenna is employed when studying emissions from 9 kHz to 30 MHz. Above 30 MHz and below 250 MHz a biconical antenna is employed. Above 250 MHz a ridge or standard gain horn antennas are used. The spectrum analyzer resolution and video bandwidths are set so as to measure the DUT emission without decreasing the emission bandwidth (EBW) of the device. Emissions are studied for all orientations (3-axes) of the DUT and all test antenna polarizations. In the chamber, spectrum and modulation characteristics of intentional carriers are recorded. Receiver spurious emissions are measured with an appropriate carrier signal applied. Associated test data is presented in subsequent sections.

### **5.2 Outdoor Radiated Emissions**

After measurements are performed indoors, emissions on our outdoor 3-meter Open Area Test Site (OATS) are made, when applicable. If the DUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration. Any intentionally radiating elements are placed on the test table flat, on their side, and on their end (3-axes) and worst case emissions are recorded. For each configuration the DUT is rotated 360 degrees about its azimuth and the receive antenna is raised and lowered between 1 and 4 meters to maximize radiated emissions from the device. Receiver spurious emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, our shielded loop antenna at a 1 meter receive height is used. Low frequency field extrapolation to the regulatory limit distance is employed as needed. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or biconical antennas. Care is taken to ensure that the RBW and VBW used meet the regulatory requirements, and that the EBW of the DUT is not reduced. The Photographs included in this report show the Test Setup.

### **5.3 Radiated Field Computations**

To convert the dBm values measured on the spectrum analyzer to dB( $\mu$ V/m), we use expression

$$E3(\text{dB}\mu\text{V/m}) = 107 + \text{PR} + \text{KA} - \text{KG} + \text{KE} - \text{CF}$$

where      PR = power recorded on spectrum analyzer, dBm, measured at 3 m  
              KA = antenna factor, dB/m  
              KG = pre-amplifier gain, including cable loss, dB  
              KE = duty correction factor, dB  
              CF = distance conversion (employed only if limits are specified at alternate distance), dB

When presenting the data at each frequency, the highest measured emission under all of the possible DUT orientations (3-axes) is given.

### **5.4 Indoor Power Line Conducted Emissions**

When applicable, power line conducted emissions are measured in our semi-anechoic chamber. If the DUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration.

The conducted emissions measured with the spectrum analyzer and recorded (in dBμV) from 0-2 MHz and 2-30 MHz for both the ungrounded (Hi) and grounded (Lo) conductors. The spectrum analyzer is set to peak-hold mode in order to record the highest peak throughout the course of functional operation. Only when the emission exceeds or is near the limit are quasi-peak and average detection used.

### **5.5 Supply Voltage Variation**

Measurements of the variation in the fundamental radiated emission were performed with the supply voltage varied by no less than 85% and 115% of the nominal rated value. For battery operated equipment, tests were performed using a new battery, and worst case emissions are re-checked employing a new battery.

## **6. Test Results**

### **6.1 Radiated Emissions**

#### **6.1.1 Correction for Pulse Operation**

When the transmitter is activated by button press, it can, in the worst case, transmit one 169 ms long frame of 0.160 ms wide pulses with 1.135 ms periods (frame 1), followed by a 200 ms long frame where, in the worst case, six 1.55 ms wide pulses and seven 0.550 ms wide pulses occur in an given 100 ms window (frame 2). See Figure 6.1. Computing the worst case duty factor results in:

$$K_{E\_frame1} = (0.160 \text{ ms} / 1.135 \text{ ms}) = 0.140 = \mathbf{-17.0 \text{ dB}}$$
$$K_{E\_frame2} = (6 \times 1.55 \text{ ms} + 7 \times 0.55 \text{ ms}) / 100 \text{ ms} = 0.132 = -17.6 \text{ dB}$$

Worst case duty of **-17.0 dB** is thus employed in demonstrating compliance.

#### **6.1.2 Emission Spectrum**

The relative DUT emission spectrum is recorded and is shown in Figure 6.2.

#### **6.1.3 Emission Bandwidth**

The emission bandwidth of the signal is shown in Figure 6.3. The allowed 99% bandwidth is 0.25% of 315.0 MHz, or 787.25 kHz. From the plot we see that the EBW is 220.0 kHz.

#### **6.1.4 Supply Voltage and Supply Voltage Variation**

The DUT has been designed to be powered by two 3 VDC batteries. For this test, relative radiated power was measured at the fundamental as the voltage was varied from 4.0 to 8.0 volts. The emission variation is shown in Figure 6.4.

|                             |                |                               |
|-----------------------------|----------------|-------------------------------|
| Batteries:                  | before testing | $V_{oc} = 6.1 \text{ V}$      |
|                             | after testing  | $V_{oc} = 6.00 \text{ V}$     |
| Ave. current from batteries |                | $I = 2.5 \text{ mA (pulsed)}$ |


## **6.2 Conducted Emissions**

These tests do not apply, since the DUT is powered from two 3 VDC batteries.

**Table 6.1 Highest Emissions Measured**

| Radiated Emission - RF     |                                                                                              |              |              |           |              |            |          |               |                 |            | TnB 3301T+Var; FCC/IC |
|----------------------------|----------------------------------------------------------------------------------------------|--------------|--------------|-----------|--------------|------------|----------|---------------|-----------------|------------|-----------------------|
| #                          | Freq.<br>MHz                                                                                 | Ant.<br>Used | Ant.<br>Pol. | Pr<br>dBm | Det.<br>Used | Ka<br>dB/m | Kg<br>dB | E3*<br>dBμV/m | E3lim<br>dBμV/m | Pass<br>dB | Comments              |
| 1                          | White Plastic Housing (no metal plate)                                                       |              |              |           |              |            |          |               |                 |            |                       |
| 2                          | 315.0                                                                                        | Dip          | H            | -20.1     | Pk           | 18.6       | 21.3     | 67.1          | 75.6            | 8.5        | flat                  |
| 3                          | 315.0                                                                                        | Dip          | V            | -25.7     | Pk           | 18.6       | 21.3     | 61.5          | 75.6            | 14.1       | end                   |
| 4                          | 630.0                                                                                        | Dip          | H            | -47.7     | Pk           | 24.4       | 18.3     | 48.4          | 55.6            | 7.2        | flat                  |
| 5                          | 630.0                                                                                        | Dip          | V            | -48.9     | Pk           | 24.4       | 18.3     | 47.2          | 55.6            | 8.4        | end                   |
| 6                          | 945.0                                                                                        | Dip          | H            | -61.0     | Pk           | 28.8       | 16.2     | 41.6          | 55.6            | 14.0       | flat                  |
| 7                          | 945.0                                                                                        | Dip          | V            | -60.5     | Pk           | 28.8       | 16.2     | 42.1          | 55.6            | 13.5       | end                   |
| 8                          | 1260.0                                                                                       | Horn         | H            | -36.0     | Pk           | 20.6       | 28.1     | 46.5          | 54.0            | 7.5        | side                  |
| 9                          | 1575.0                                                                                       | Horn         | H            | -40.4     | Pk           | 21.5       | 28.1     | 43.0          | 54.0            | 11.0       | flat                  |
| 10                         | 1890.0                                                                                       | Horn         | H            | -41.6     | Pk           | 22.2       | 28.1     | 42.5          | 55.6            | 13.1       | flat                  |
| 11                         | 2205.0                                                                                       | Horn         | H            | -49.1     | Pk           | 23.0       | 26.5     | 37.4          | 54.0            | 16.6       | flat                  |
| 12                         | 2520.0                                                                                       | Horn         | H            | -55.6     | Pk           | 23.9       | 26.0     | 32.3          | 55.6            | 23.4       | side                  |
| 13                         | 2835.0                                                                                       | Horn         | H            | -60.2     | Pk           | 24.8       | 24.7     | 29.9          | 54.0            | 24.1       | side                  |
| 14                         | 3150.0                                                                                       | Horn         | H            | -58.9     | Pk           | 25.8       | 23.6     | 33.3          | 55.6            | 22.3       | end                   |
| 15                         | Note: Model 3341T (black button replaced with white on 3301T) has no difference in emissions |              |              |           |              |            |          |               |                 |            |                       |
| 16                         | 3311T Black Plastic Housing with Metal Faceplate                                             |              |              |           |              |            |          |               |                 |            |                       |
| 17                         | 315.0                                                                                        | Dip          | H            | -22.4     | Pk           | 18.6       | 21.3     | 64.8          | 75.6            | 10.8       | flat                  |
| 18                         | 315.0                                                                                        | Dip          | V            | -28.5     | Pk           | 18.6       | 21.3     | 58.7          | 75.6            | 16.9       | end                   |
| 19                         | 630.0                                                                                        | Dip          | H            | -54.5     | Pk           | 24.4       | 18.3     | 41.6          | 55.6            | 14.0       | flat                  |
| 20                         | 630.0                                                                                        | Dip          | V            | -55.4     | Pk           | 24.4       | 18.3     | 40.7          | 55.6            | 14.9       | end                   |
| 21                         | 945.0                                                                                        | Dip          | H            | -65.1     | Pk           | 28.8       | 16.2     | 37.5          | 55.6            | 18.1       | flat                  |
| 22                         | 945.0                                                                                        | Dip          | V            | -64.0     | Pk           | 28.8       | 16.2     | 38.6          | 55.6            | 17.0       | end                   |
| 23                         | 1260.0                                                                                       | Horn         | H            | -39.3     | Pk           | 20.6       | 28.1     | 43.2          | 54.0            | 10.8       | side                  |
| 24                         | 1575.0                                                                                       | Horn         | H            | -44.8     | Pk           | 21.5       | 28.1     | 38.6          | 54.0            | 15.4       | side                  |
| 25                         | 1890.0                                                                                       | Horn         | H            | -44.7     | Pk           | 22.2       | 28.1     | 39.4          | 55.6            | 16.2       | flat                  |
| 26                         | 2205.0                                                                                       | Horn         | H            | -54.8     | Pk           | 23.0       | 26.5     | 31.7          | 54.0            | 22.3       | flat                  |
| 27                         | 2520.0                                                                                       | Horn         | H            | -60.3     | Pk           | 23.9       | 26.0     | 27.6          | 55.6            | 28.1       | flat                  |
| 28                         | 2835.0                                                                                       | Horn         | H            | -67.1     | Pk           | 24.8       | 24.7     | 23.0          | 54.0            | 31.0       | side                  |
| 29                         | 3150.0                                                                                       | Horn         | H            | -61.5     | Pk           | 25.8       | 23.6     | 30.7          | 55.6            | 24.9       | side                  |
| 30                         | *includes 17.0 dB Duty Cycle                                                                 |              |              |           |              |            |          |               |                 |            |                       |
| Digital Radiated Emissions |                                                                                              |              |              |           |              |            |          |               |                 |            |                       |
| #                          | Freq.<br>kHz                                                                                 | Ant.<br>Used | Ant.<br>Pol. | Pr<br>dBm | Det.<br>Used | Ka<br>dB/m | Kg<br>dB | E3<br>dBμV/m  | E3lim<br>dBμV/m | Pass<br>dB | Comments              |
| 31                         |                                                                                              |              |              |           |              |            |          |               |                 |            |                       |
| 32                         |                                                                                              |              |              |           |              |            |          |               |                 |            |                       |
| 33                         | Digital emissions > 20 dB below Class B Emissions Limits.                                    |              |              |           |              |            |          |               |                 |            |                       |
| 34                         |                                                                                              |              |              |           |              |            |          |               |                 |            |                       |
| 35                         |                                                                                              |              |              |           |              |            |          |               |                 |            |                       |
| 36                         |                                                                                              |              |              |           |              |            |          |               |                 |            |                       |

Meas. 08/09/2010; U of Mich.

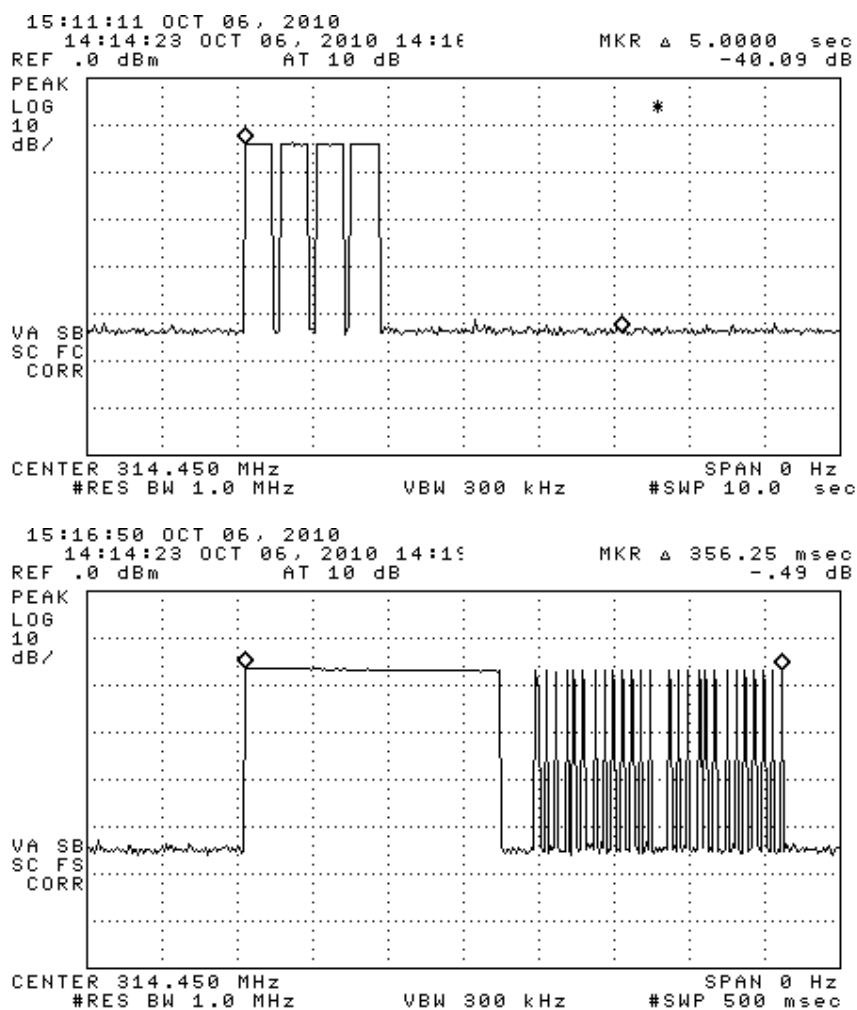

**Figure 6.1(a). Transmission modulation characteristics.**  
(top) single button press, (bottom) expanded frames.

University of Michigan Radiation Laboratory  
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-589

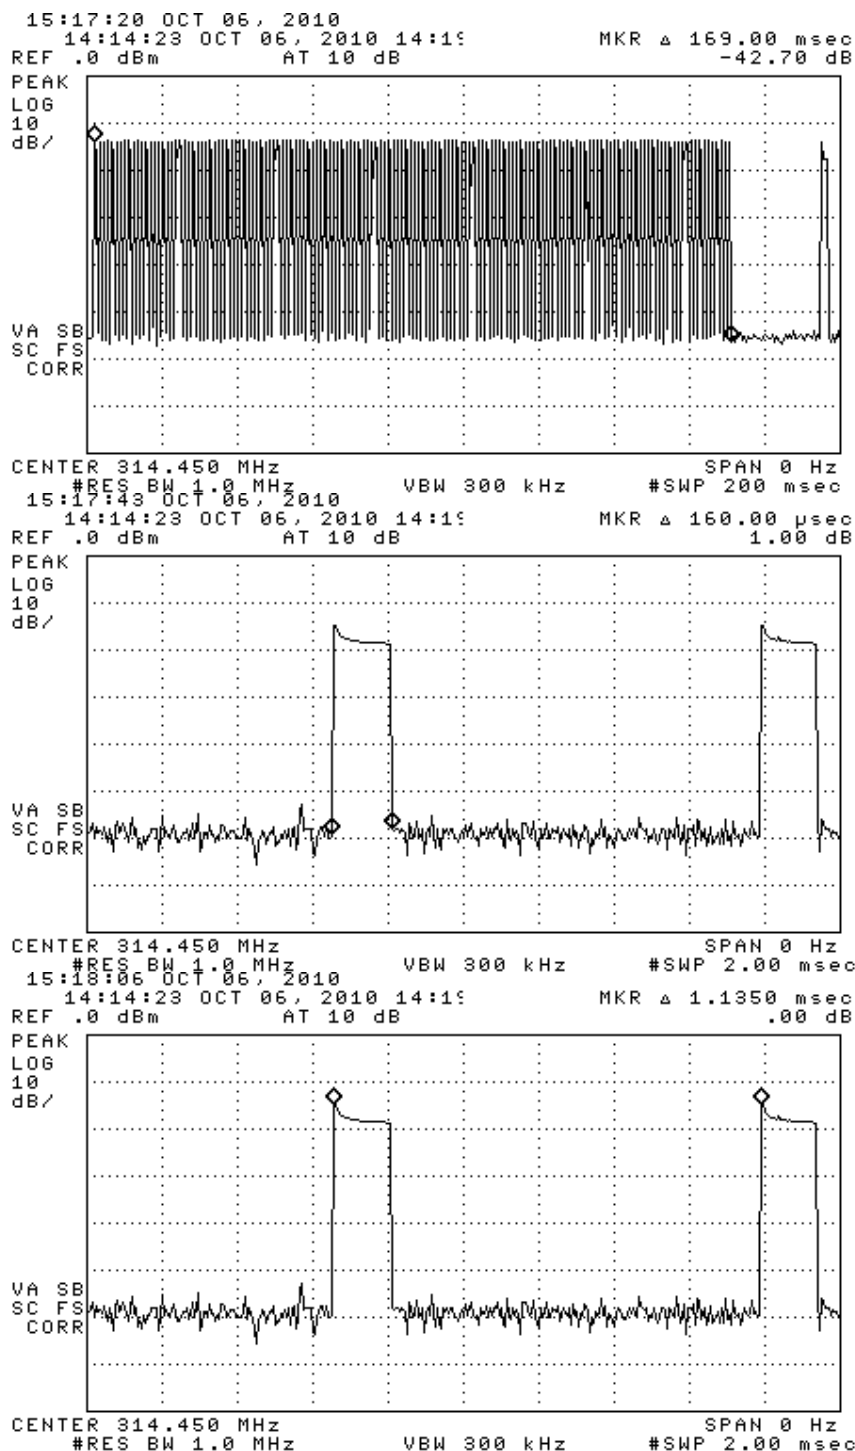


Figure 6.1(b). Leading Frame. (top) complete frame length,  
(center) pulse width, (bottom) pulse period.

University of Michigan Radiation Laboratory  
FCC Part 15, IC RSS-210/Gen - Test Report No. 417124-589

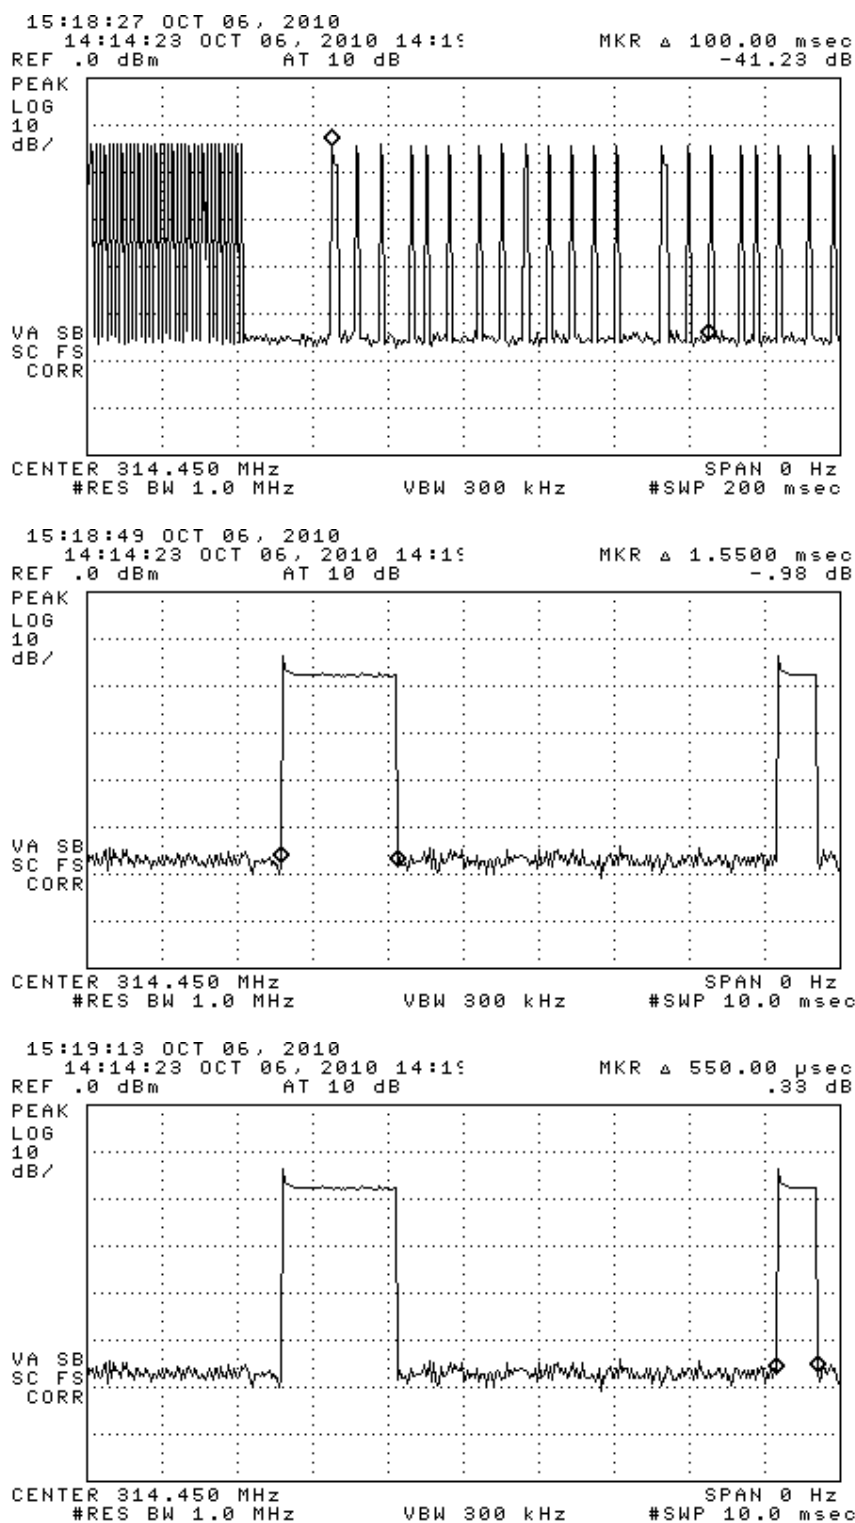


Figure 6.1. Second Frame. (top) 100 ms window,  
(center) wide pulse width, (bottom) narrow pulse width.

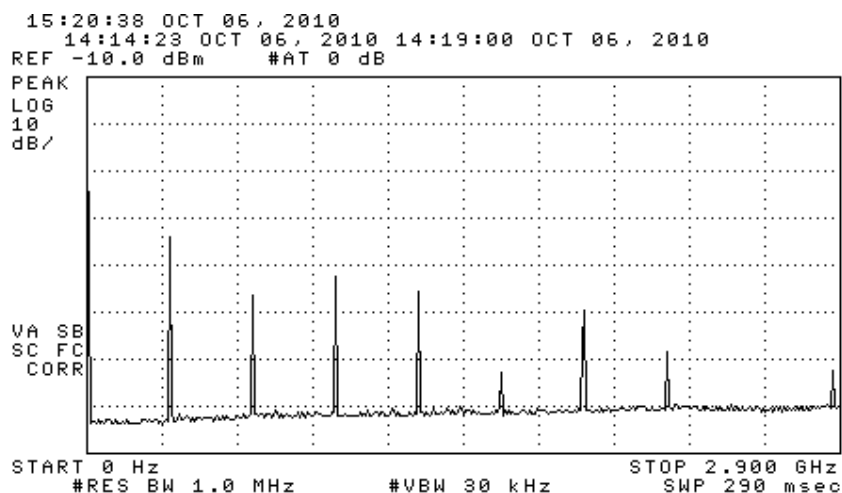


Figure 6.2. Emission spectrum of the DUT (pulsed emission). Amplitudes are only indicative (not calibrated).

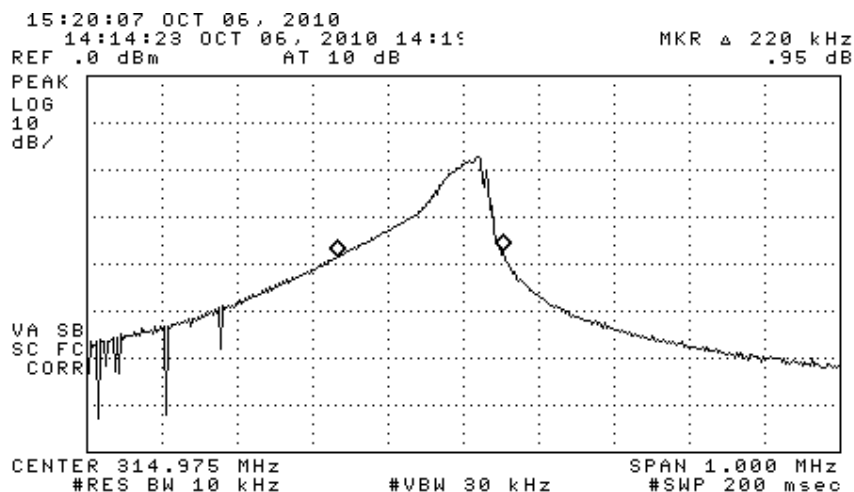


Figure 6.3. Measured emission bandwidth of the DUT (pulsed).

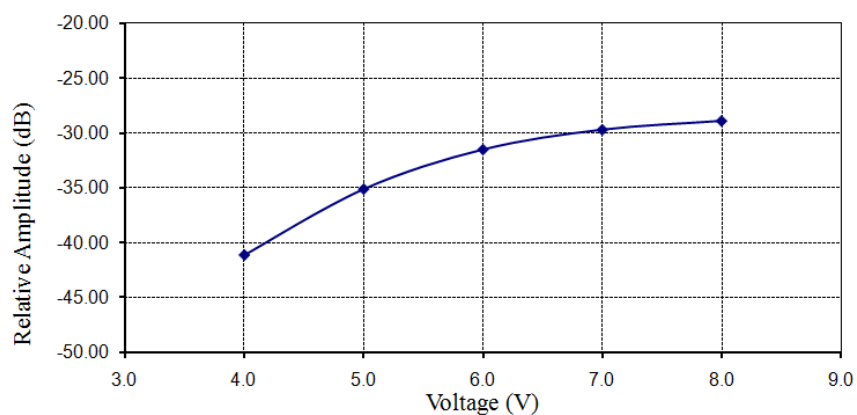


Figure 6.4. Relative emission at fundamental vs. supply voltage (pulsed).



**Photograph 6.5. DUT on OATS (one of three axes tested)**



**Photograph 6.6. Close-up of DUT on OATS (one of three axes tested)**