

Intertek Testing Services

APPLICATION FOR FCC CERTIFICATION

GVC Corporation

900 MHz DSSS Cordless Telephone

Model: 39520

FCC ID: DK4CT9000

Job # J98026020

Number of Pages: 14 pp. + Supporting Data and Documents

Date of Report: October 12, 1998

This report shall not be reproduced except in full, without written approval of Intertek Testing Services.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples on this report is dependent on the representative of the samples tested.



Table of Contents

1.0	<u>Summary of Tests</u>	1
2.0	<u>General Description</u>	2
2.1	Product Description	2
2.2	Related Submittal(s) Grants	2
2.3	Test Methodology	3
2.4	Test Facility	3
3.0	<u>System Test Configuration</u>	4
3.1	Support Equipment	4
3.2	Block Diagram of Test Setup	4
3.3	Justification	5
3.4	Software Exercise Program	5
3.5	Mode of Operation During Test	5
3.6	Modifications Required for Compliance	5
3.7	Additions, deviations and exclusions from standards	5
4.0	<u>Measurement Results</u>	6
4.1	Maximum Conducted Output Power at Antenna Terminals	6
4.2	Minimum 6 dB RF Bandwidth	8
4.3	Maximum Power Density Reading	9
4.4	Out of Band Conducted Emissions	10
4.5	Out of Band Radiated Emissions	10
4.6	Transmitter Radiated Emissions in Restricted Bands	10
4.7	AC Line Conducted Emission	11
4.10	Radiated Emissions from Digital Section of Transceiver (Transmitter),	12
4.11	Radiated Emissions from Receiver Section of Transceiver (L.O. Radiation),	12
4.12	Processing Gain Measurements	13
4.13	Transmitter Duty Cycle Calculation and Measurements	13
5.0	<u>List of Exhibits</u>	14

1.0 Summary of Tests**GVC Corporation - Model No.: 39520**
FCC ID: DK4CT9000

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(d)	Pass
Out of Band Antenna Conducted Emission	15.247(c)	Pass
Out of Band Radiated Emission	15.247(c)	N/A
Radiated Emission in Restricted Bands	15.35(b)(c)	Pass
AC Conducted Emission	15.207	Pass
Radiated Emission from Digital Part	15.109	Pass
Radiated Emission from Receiver L.O.	15.109	Not Applicable
Processing Gain Measurements	15.247(e)	Provided by applicant
Antenna Requirement	15.203	Pass*

* EUT has non-detachable antenna.



Test Engineer: _____
Xi-Ming Yang

Date: October 19, 1998



EMC Site Manager: _____
David Chernomordik

Date: October 20, 1998

2.0 General Description

2.1 Product Description

The Model 39520 is a 900 MHz DSSS digital cordless telephone.

A pre-production version of the sample was received on September 29, 1998 in good condition.

Overview of 900 MHz DSSS Cordless Telephone

Applicant	GVC Corporation	
Trade Name & Model No.	GVC Corporation, Memorex, 39520	
FCC Identifier	DK4CT9000	
Use of Product	Cordless Telephone	
Manufacturer & Model of Spread Spectrum Module	GVC Corporation	
Type of Transmission	Direct Sequence	
Rated RF Output (mW)	100	
Frequency Range (MHz)	903.6 - 926.4	
Number of Channel(s)	20	
Antenna(s) & Gain, dBi	0	
Processing Gain Measurements	<input checked="" type="checkbox"/> [X]	Will be provided to ITS for submission with the application
	<input type="checkbox"/> []	Will be provided directly to the FCC reviewing engineer by the client or manufacturer of the spread spectrum module
Antenna Requirement	<input checked="" type="checkbox"/> [X]	The EUT uses a permanently connected antenna.
	<input type="checkbox"/> []	The antenna is affixed to the EUT using a unique connector which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.
	<input type="checkbox"/> []	The EUT requires professional installation (attach supporting documentation if using this option).
Manufacturer name & address	GVC Corporation 4F, No. 6, Lane 359, Sec. 2, Chung-shan Rd., Chung-Ho, Taipei, Taiwan, R.O.C.	

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility


The open area test site and conducted measurement facility used to collect the radiated data is site 1. This test facility and site measurement data have been fully placed on file with the FCC and NVLAP accredited.

3.0 System Test Configuration

3.1 Support Equipment and description

None, the EUT is a standalone device.

3.2 Block Diagram of Test Setup

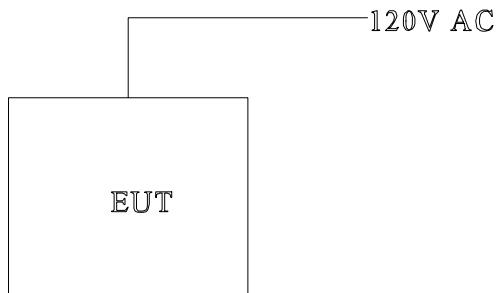

3.3 Justification

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

For radiated emission measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT is wired to transmit full power without modulation.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Detector function is in peak mode. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. For emissions testing, the units were setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

3.5 Mode of Operation During Test

The EUT was running in a transmitting mode.

3.6 Modifications Required for Compliance

The following modifications were installed during compliance testing in order to bring the product into compliance (Please note that this list does not include changes made specifically by GVC Corporation prior to compliance testing):

No modifications were made to the EUT by Intertek Testing Services.

3.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

4.0 Measurement Results**4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b):**

[] The antenna port of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

[X] The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for maximum RES BW and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyzer.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm).

For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6) dBm.

(Base Unit)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 903.6	16.3	42.7
Middle Channel: 914.4	15.6	36.3
High Channel: 926.4	13.5	22.4

Cable loss: 1.5 dB External Attenuation: 0 dB

Cable loss, external attenuation: [X] included in OFFSET function
[] added to SA raw reading

EUT Transmit Antenna Gain(dBi) + dBm max. output level = 16.3 dBm (36 dBm or less)

Please refer to the attached plots for details:

Plot B1a: Low Channel Output Power

Plot B1b: Middle Channel Output Power


Plot B1c: High Channel Output Power

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

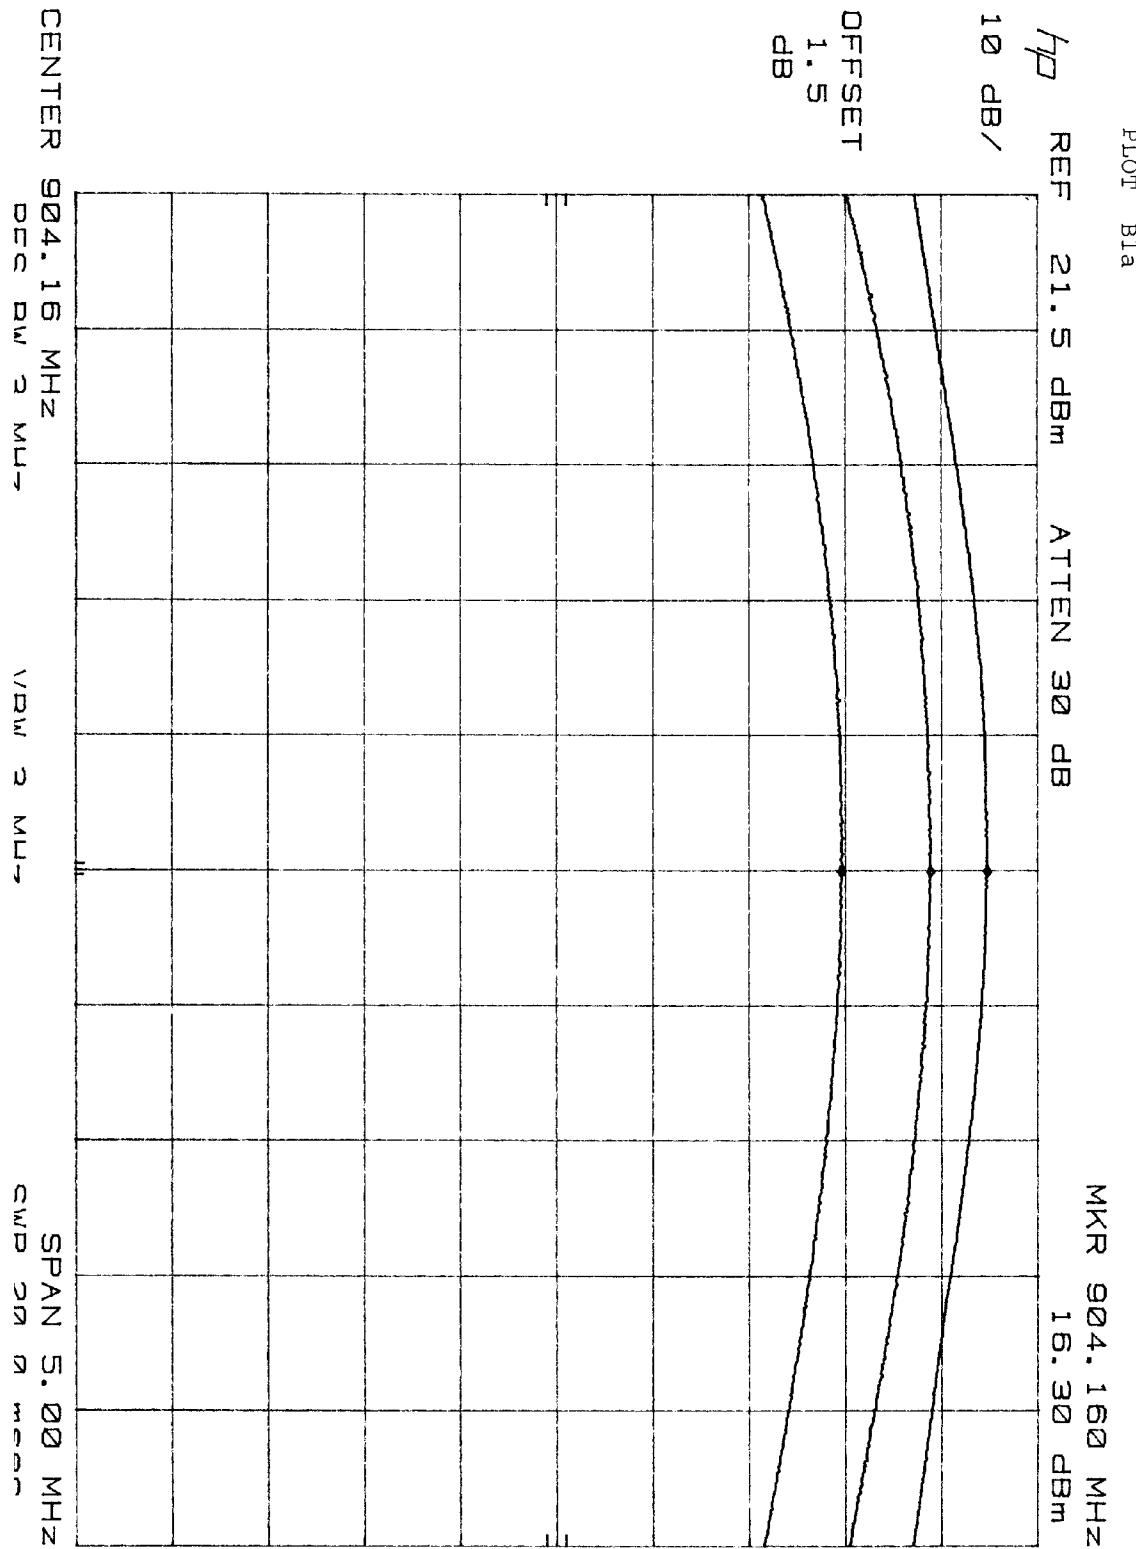


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

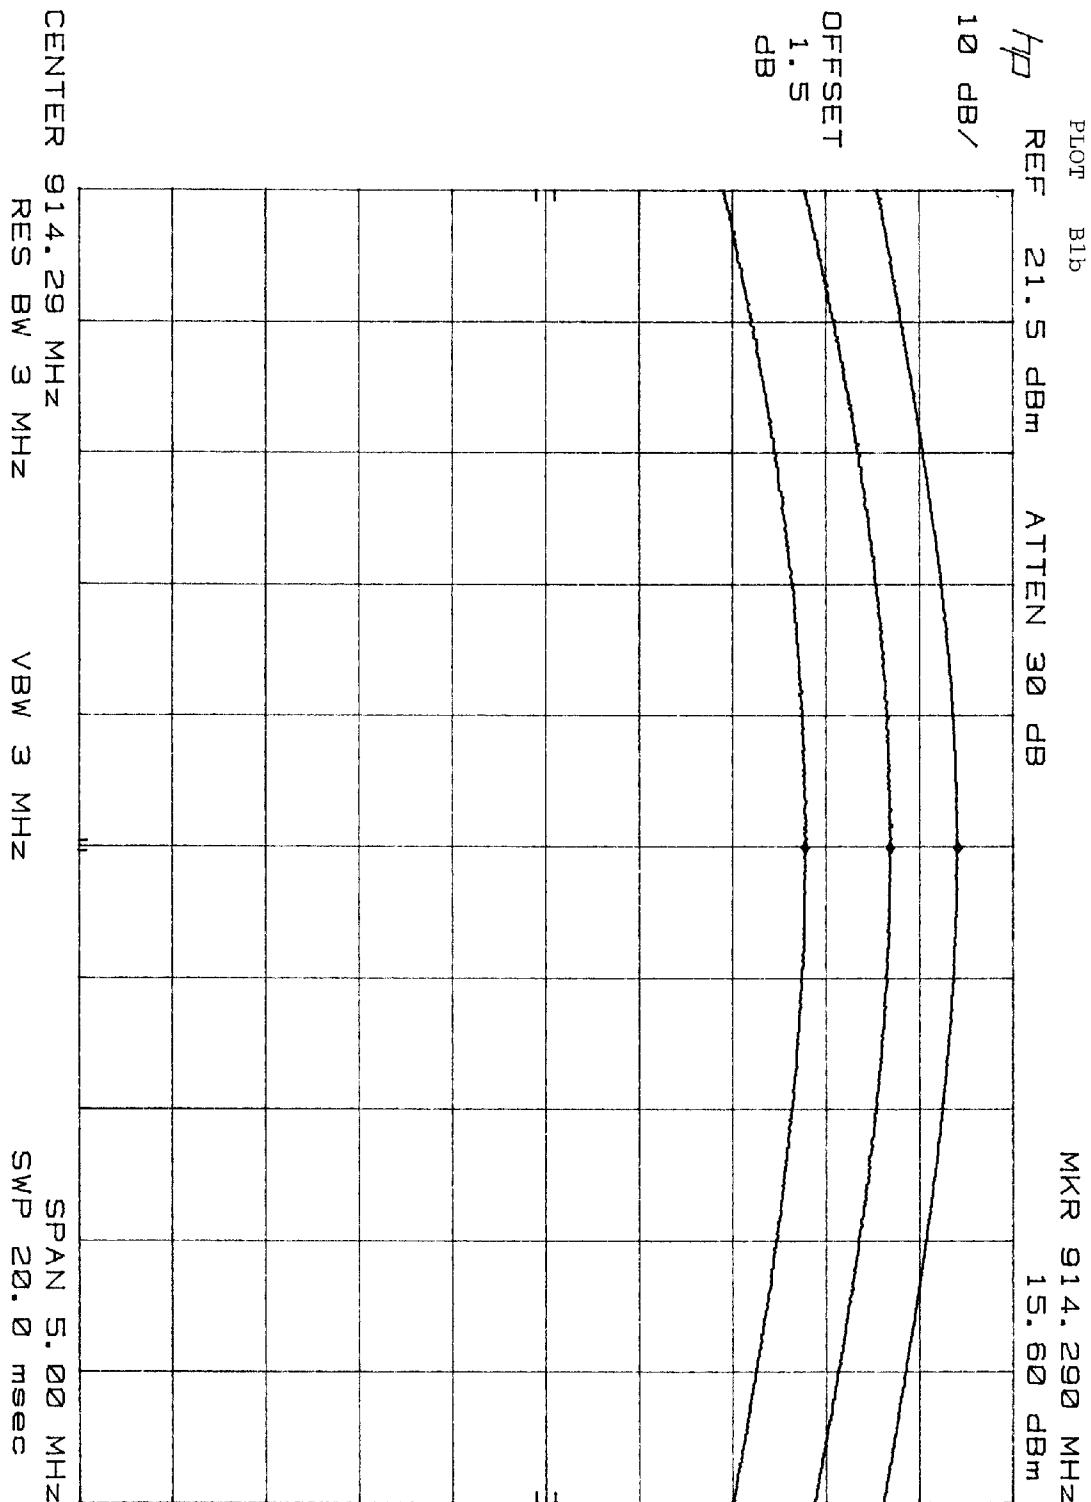


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

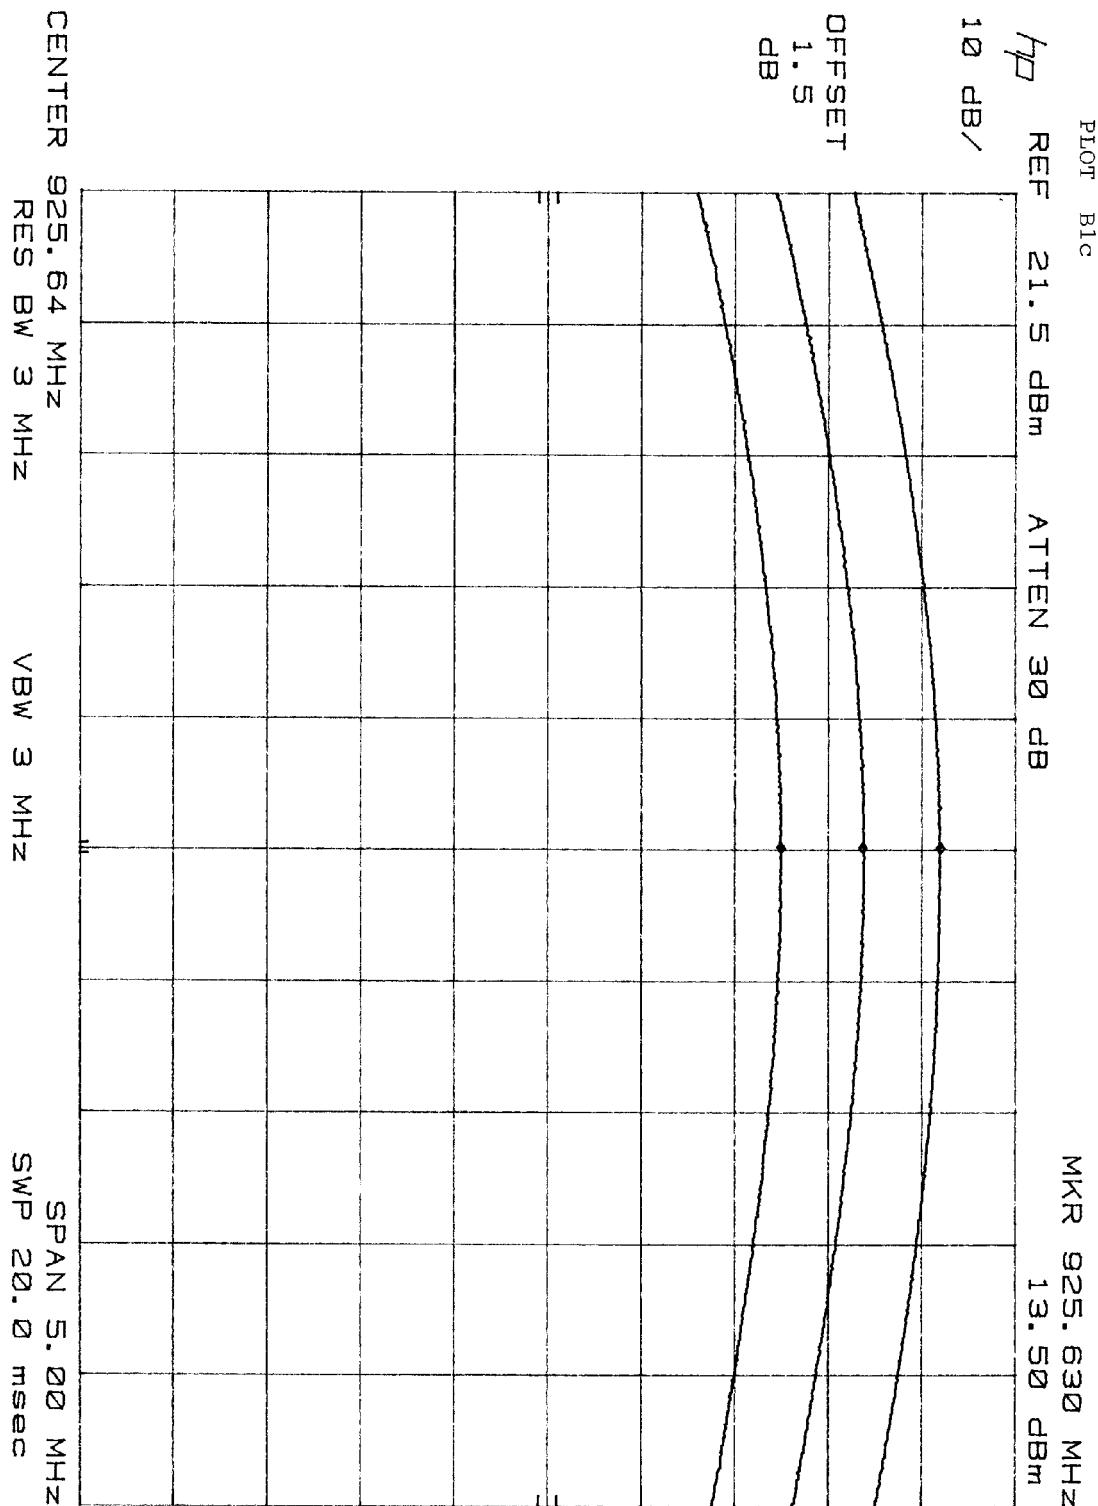

(Handset Unit)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 903.6	17.2	52.7
Middle Channel: 914.4	16.9	49.0
High Channel: 926.4	16.5	44.7

Cable loss: 0 dB External Attenuation: 0 dB

Cable loss, external attenuation: included in OFFSET function
[] added to SA raw reading

EUT Transmit Antenna Gain(dBi) + dBm max. output level = 17.2 dBm (36 dBm or less)

Please refer to the attached plots for details:

Plot H1a: Low Channel Output Power

Plot H1b: Middle Channel Output Power


Plot H1c: High Channel Output Power

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

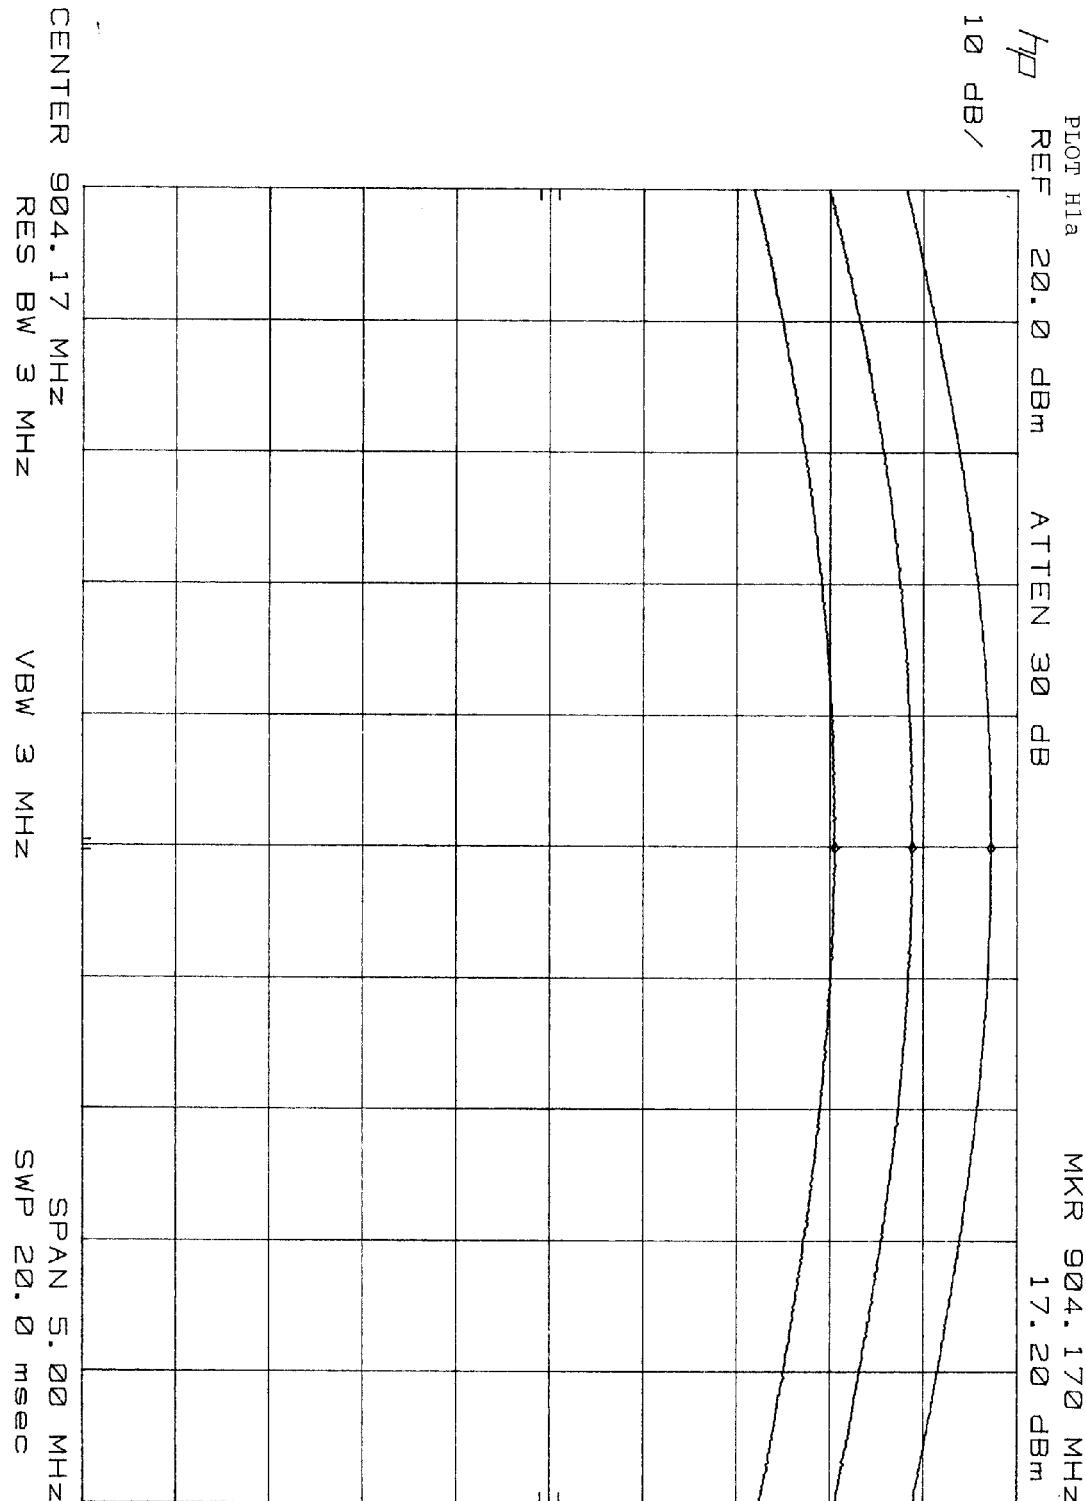



Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

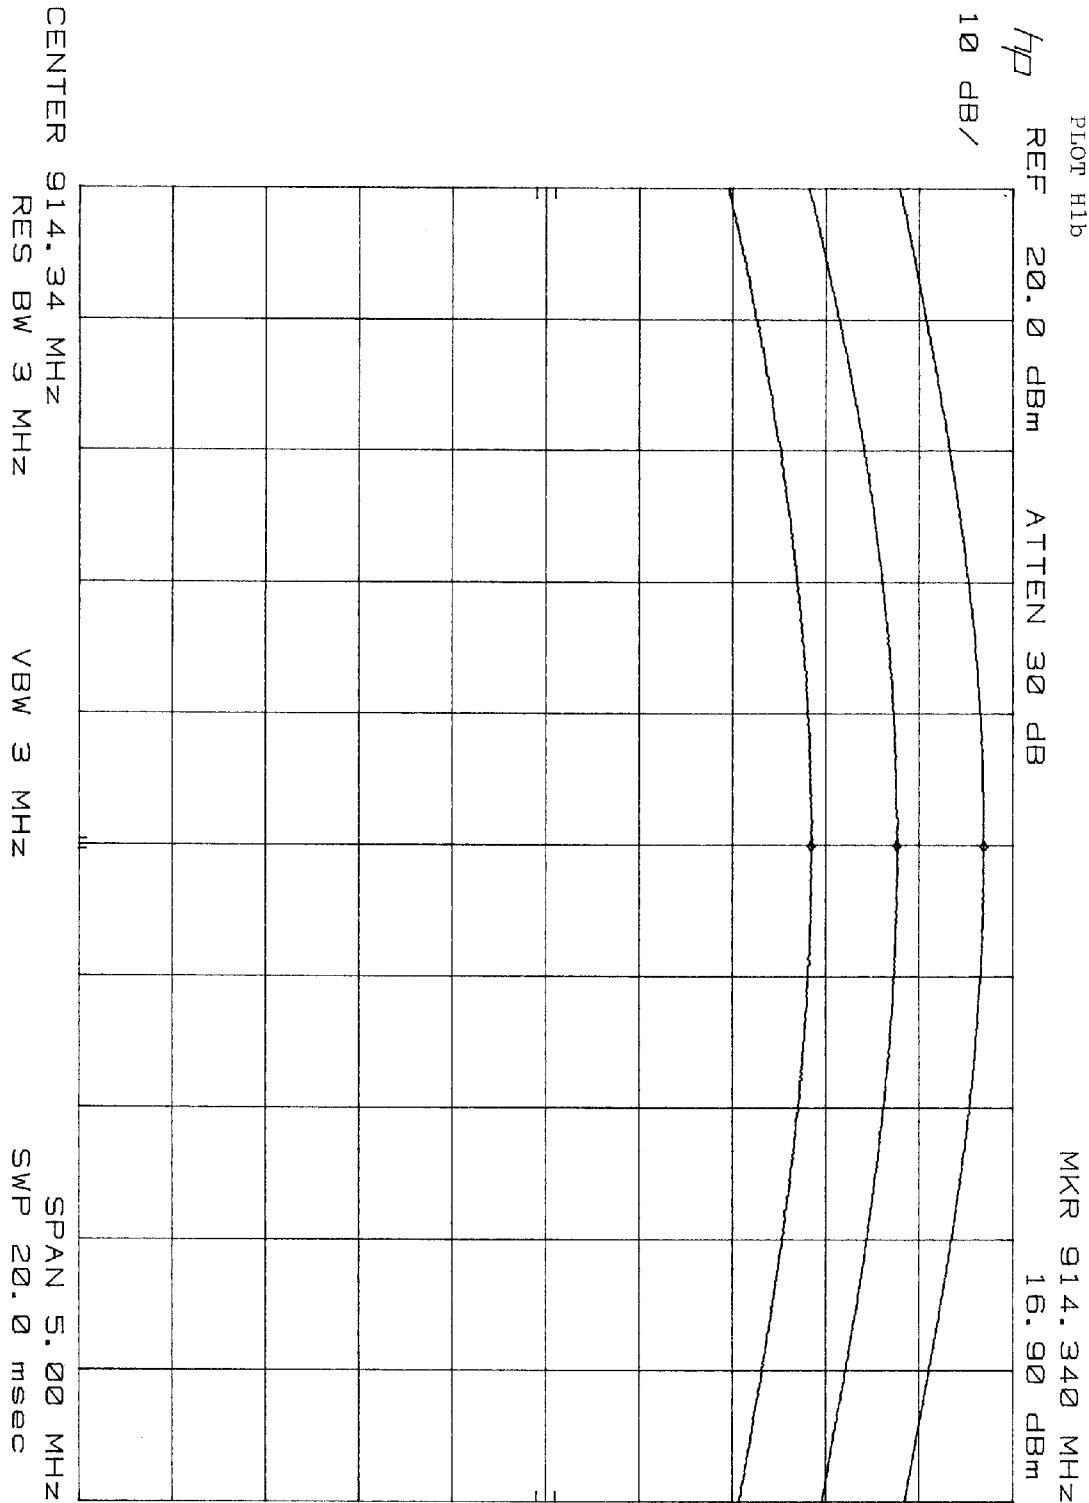

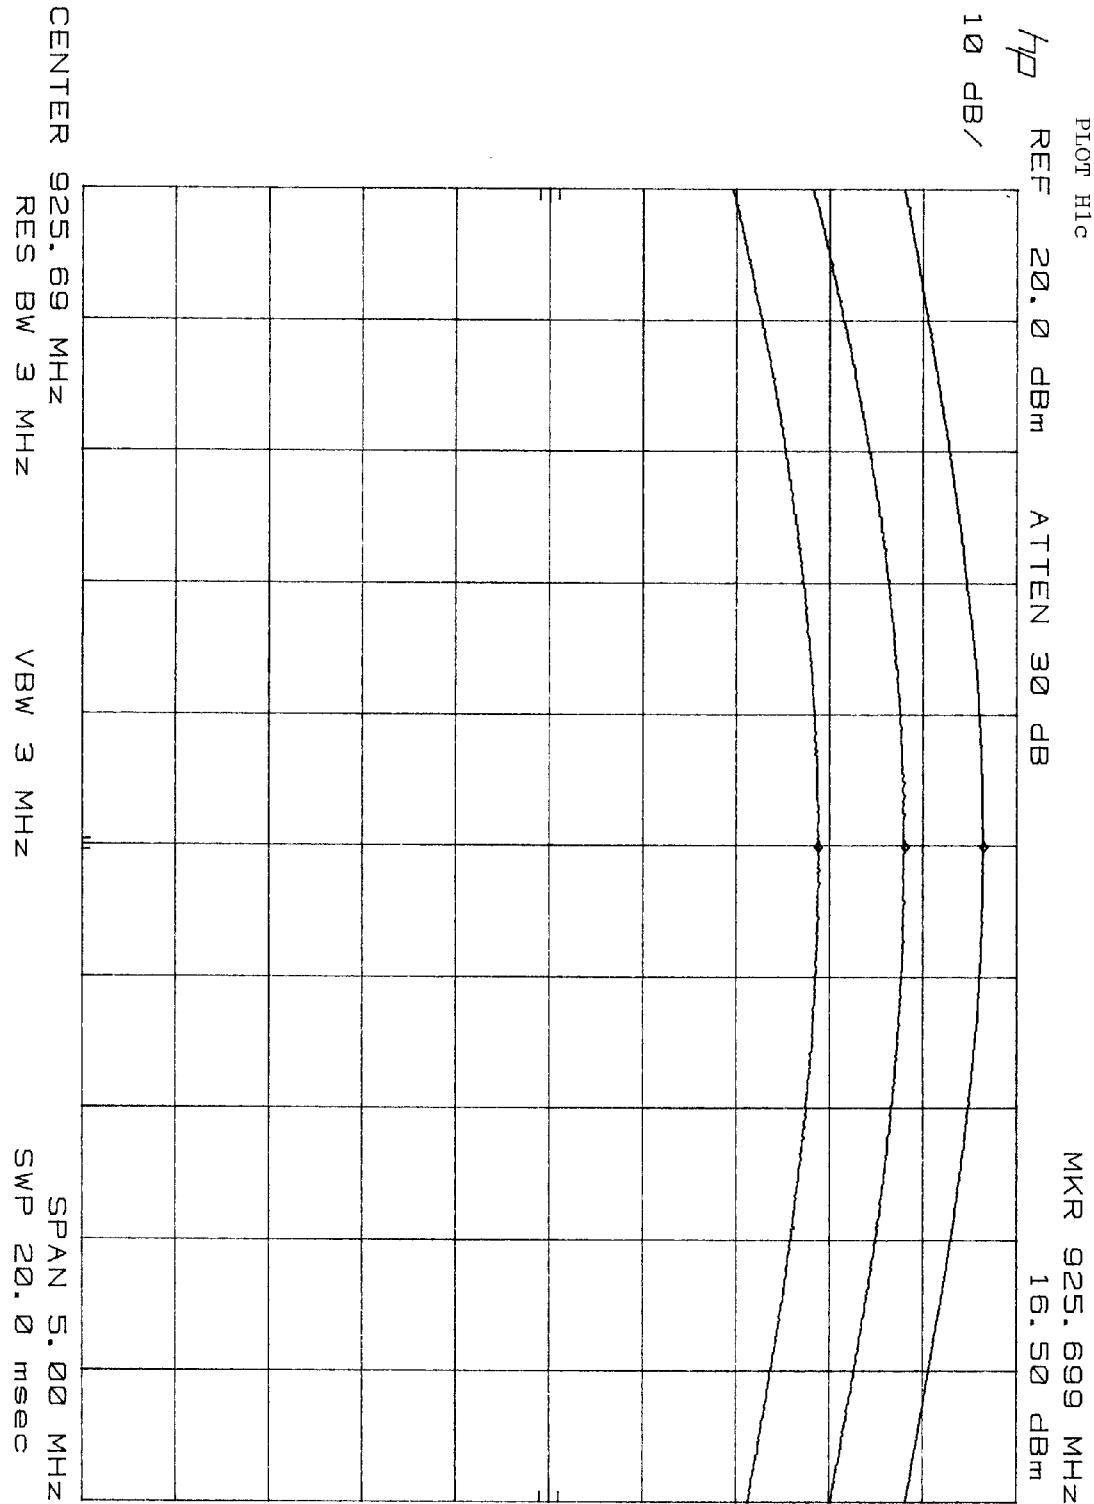

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

(Base Unit)	
Frequency (MHz)	Max. 6 dB Bandwidth (kHz)
926.4	1450

(Handset Unit)	
Frequency (MHz)	Max. 6 dB Bandwidth (kHz)
914.4	1474

Refer to the following plots for 6 dB bandwidth sharp:

Plot B2a: Low Channel 6 dB RF Bandwidth

Plot B2b: Middle Channel 6 dB RF Bandwidth

Plot B2c: High Channel 6 dB RF Bandwidth

Plot H2a: Low Channel 6 dB RF Bandwidth

Plot H2b: Middle Channel 6 dB RF Bandwidth


Plot H2c: High Channel 6 dB RF Bandwidth

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

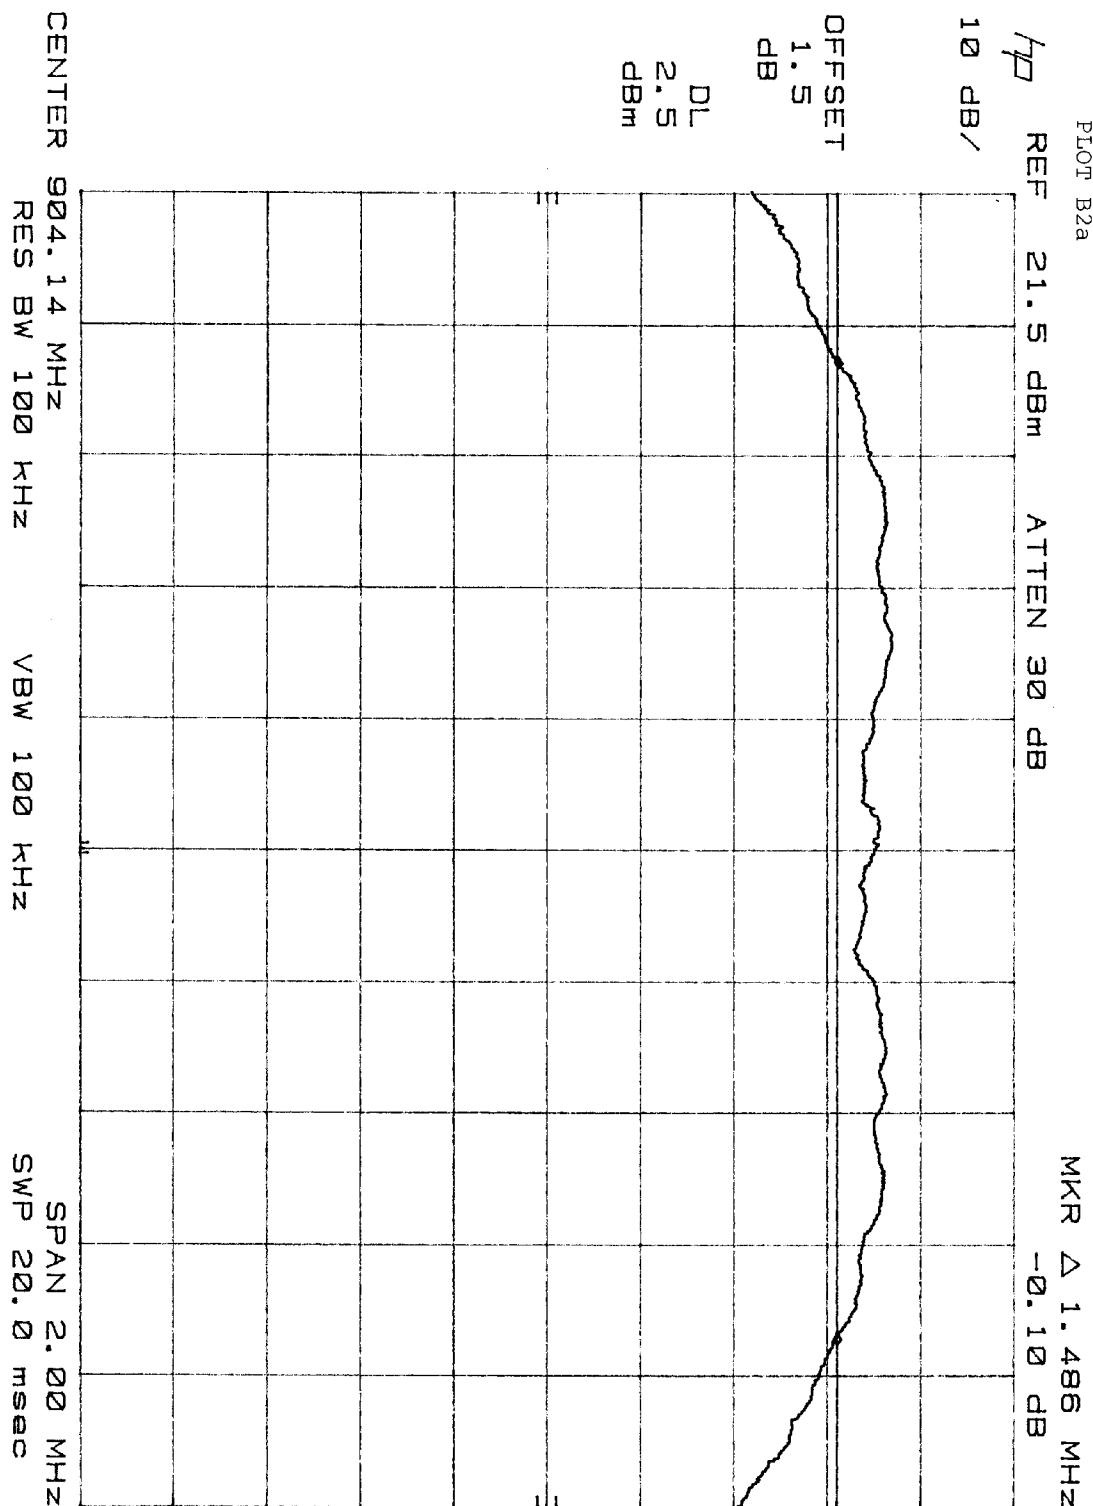


Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone

Date of Test: 9/29/98 - 10/05/98

FCC ID: DK4CT9000

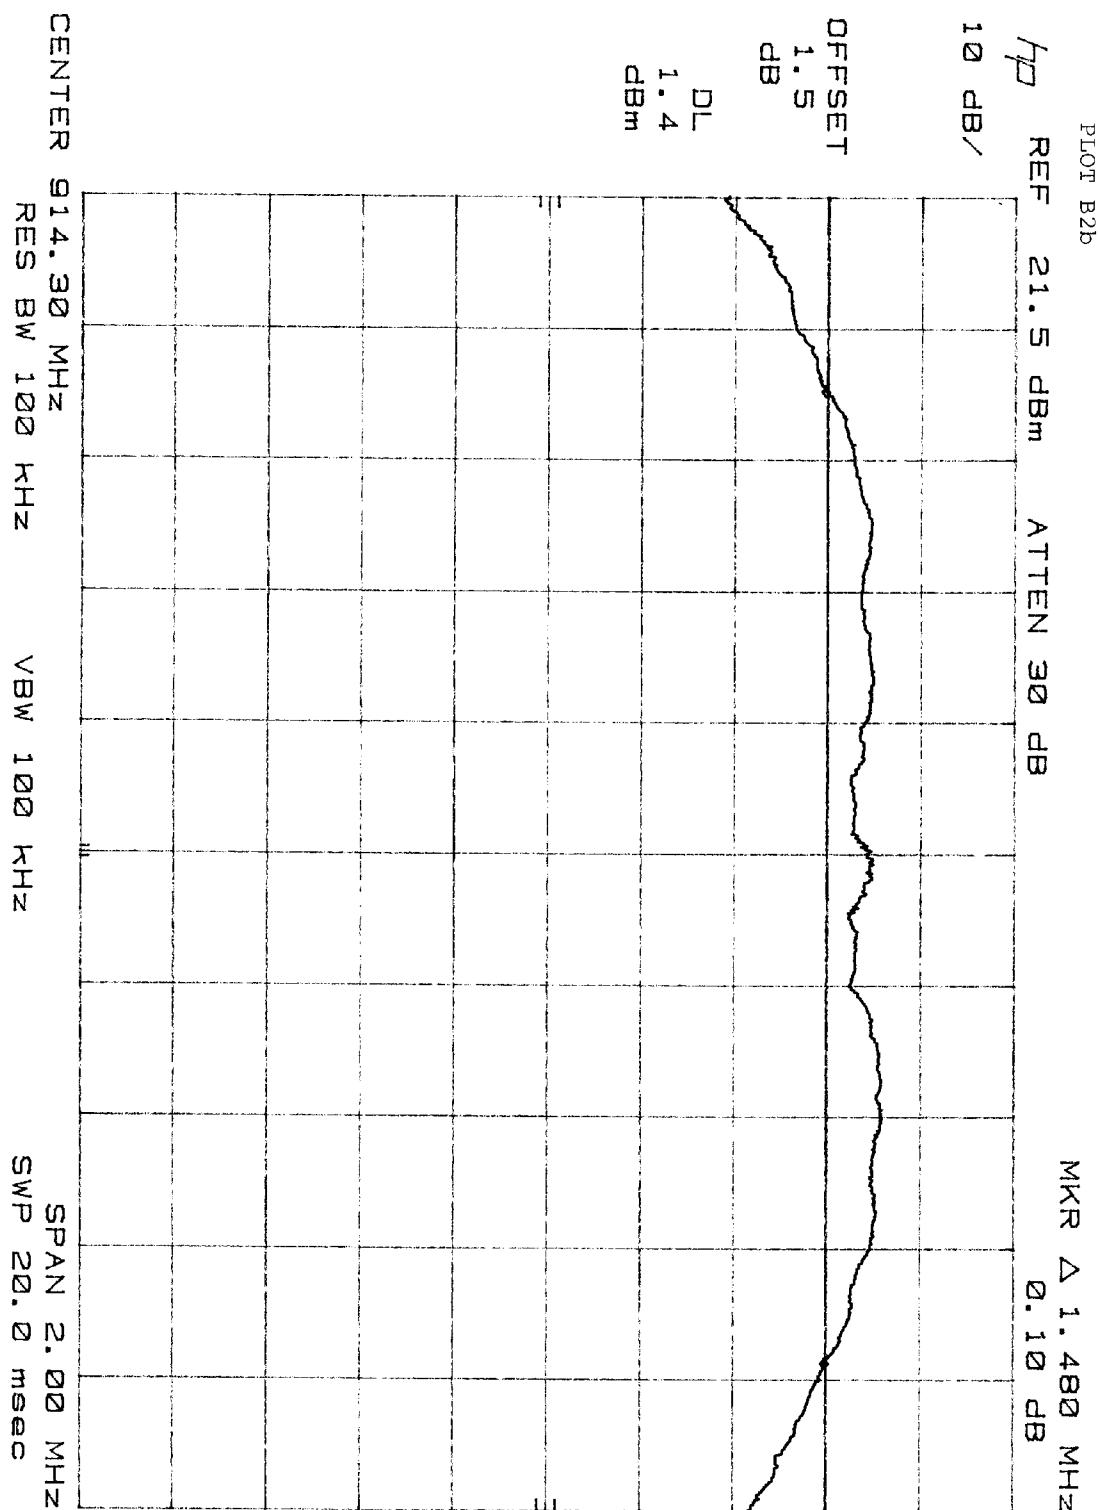



Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

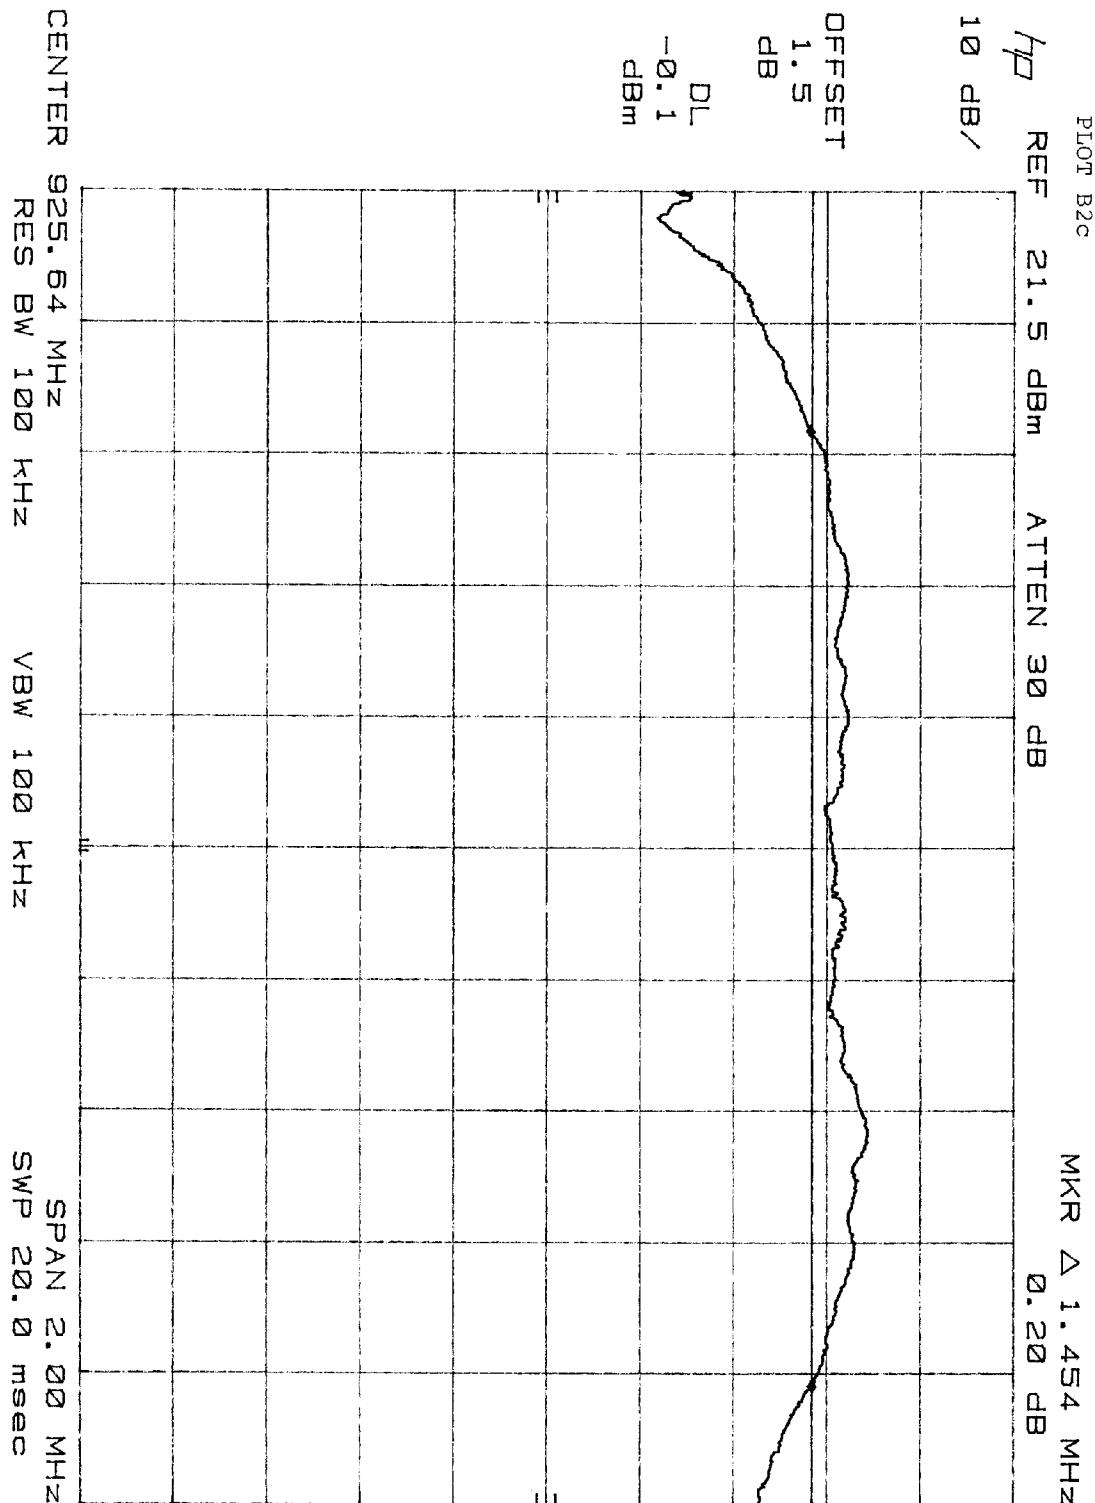

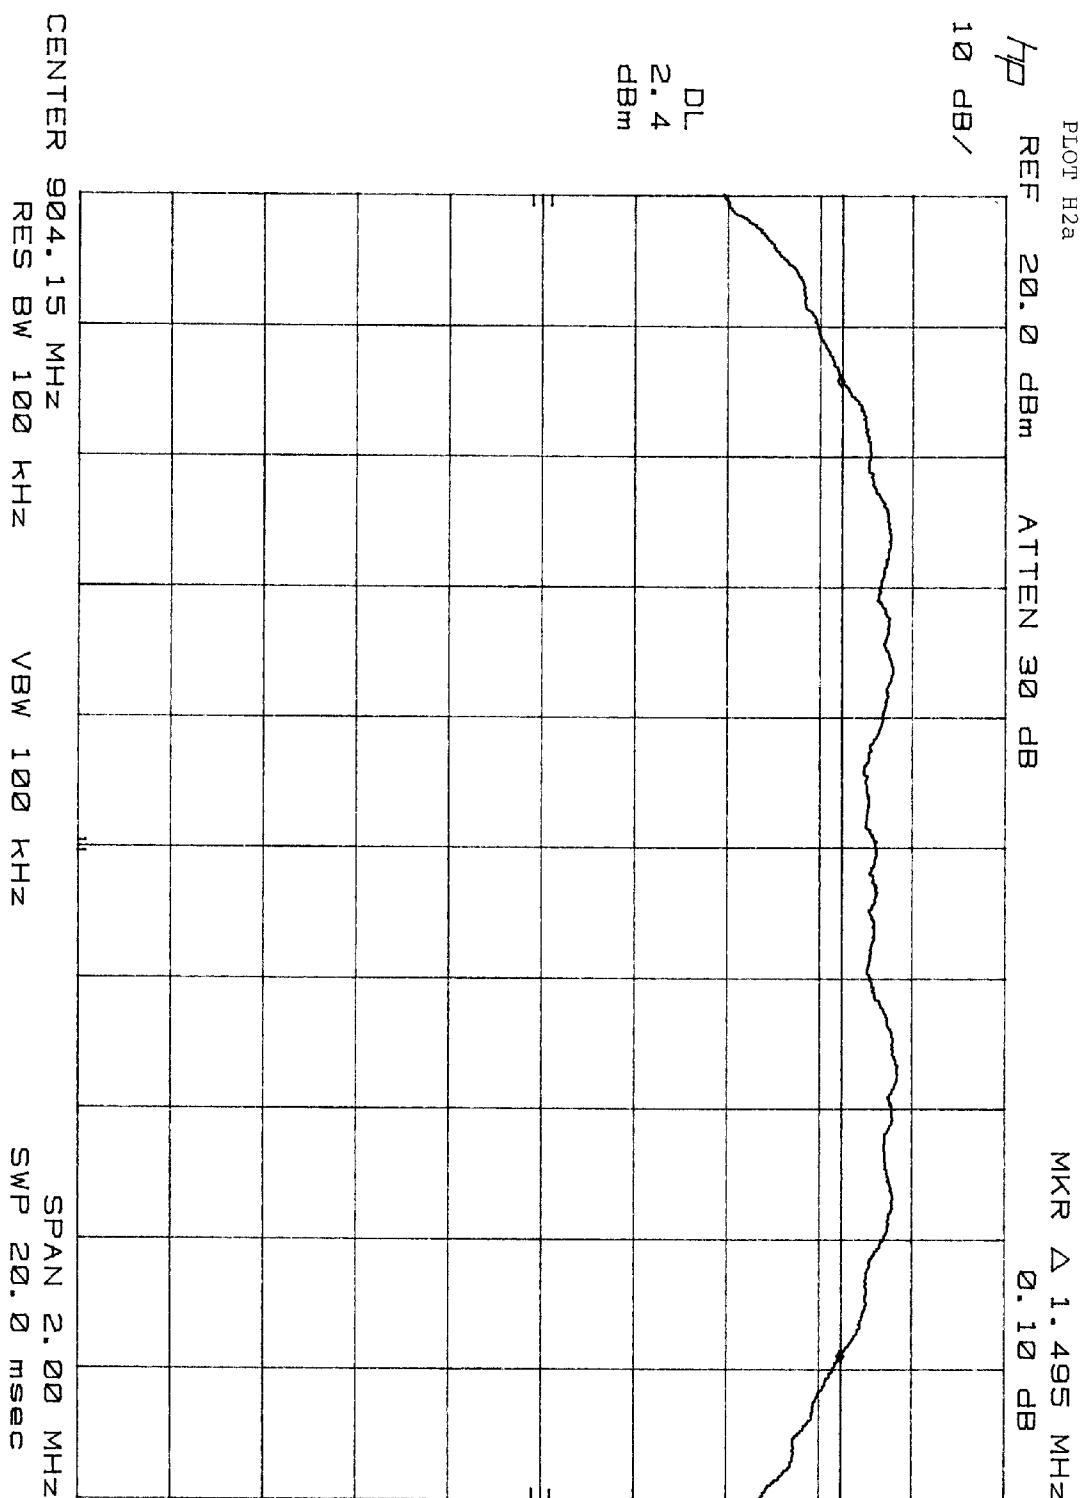


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

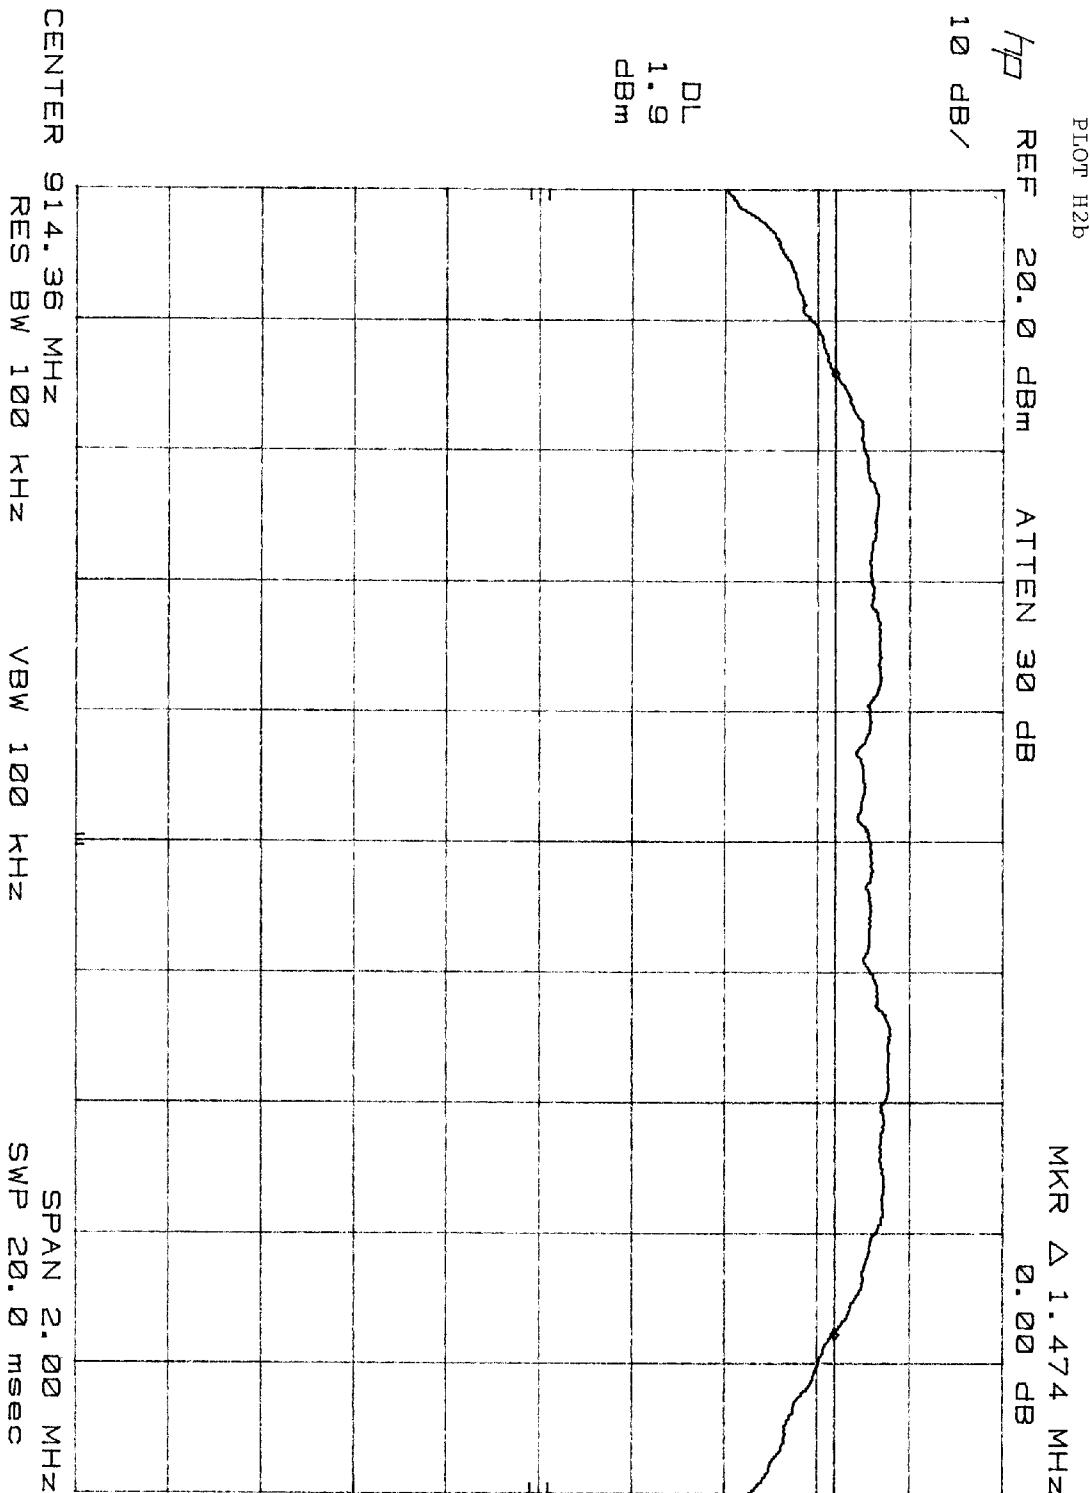

4.3 Maximum Power Density Reading, FCC Rule 15.247(d):

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output passband. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz})/3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

(Base Unit)	
Frequency (MHz)	Power Density (dBm)
903.9	3.4

(Handset Unit)	
Frequency (MHz)	Power Density (dBm)
904.7	2.8

Frequency Span = 600 kHz

Sweep Time = 600 Frequency Span/3 kHz
= 200 seconds

Refer to the following plots for power density data:


Plot B3a.1 - B3a.2 Low Channel Power Density
Plot B3b.1 - B3b.2 Middle Channel Power Density
Plot B3c.1 - B3c.2: High Channel Power Density
Plot H3a.1 - H3a.2 Low Channel Power Density
Plot H3b.1 - H3b.2 Middle Channel Power Density
Plot H3c.1 - H3c.2: High Channel Power Density

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

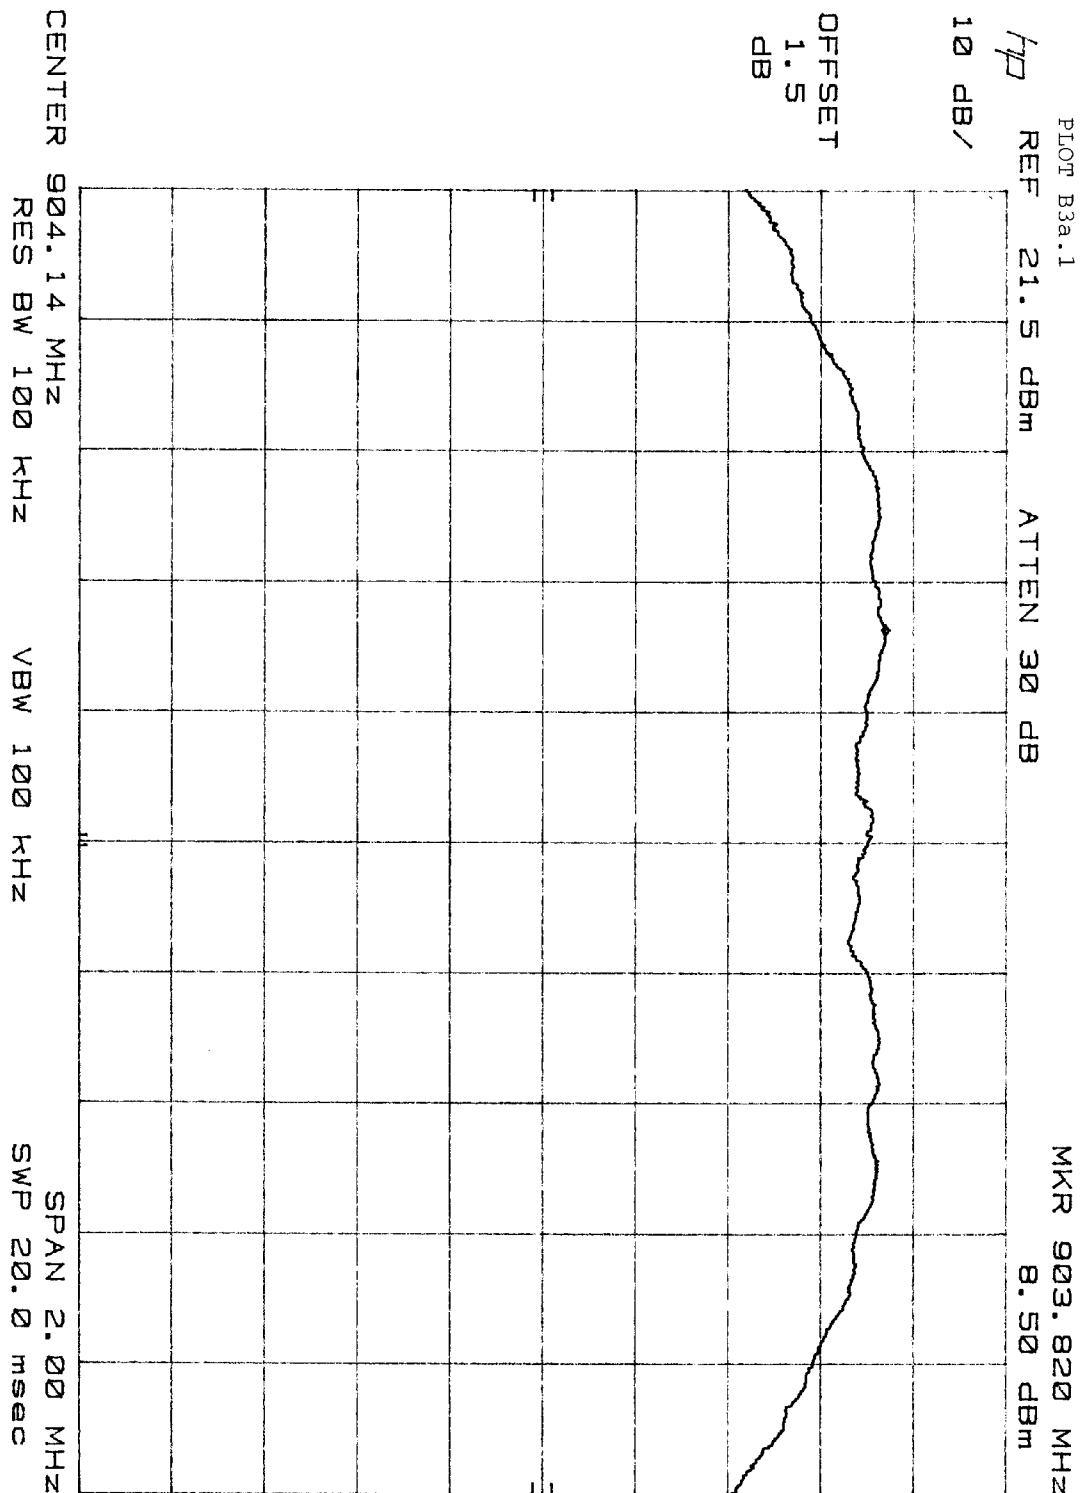


Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone

Date of Test: 9/29/98 - 10/05/98

FCC ID: DK4CT9000

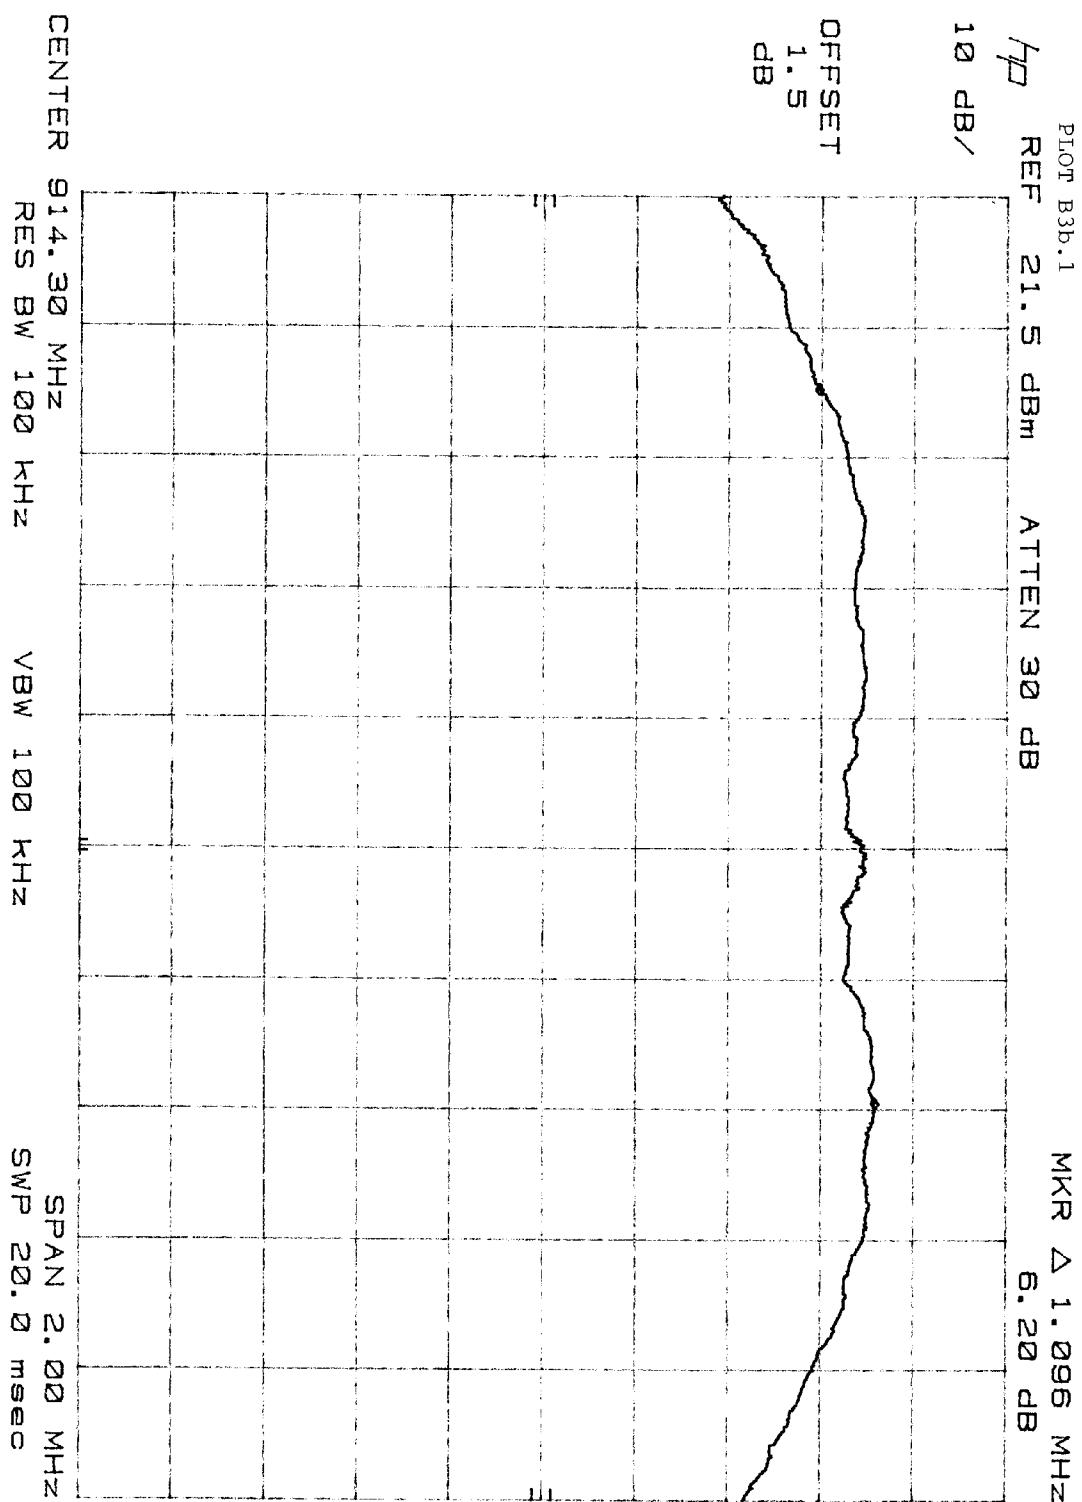


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

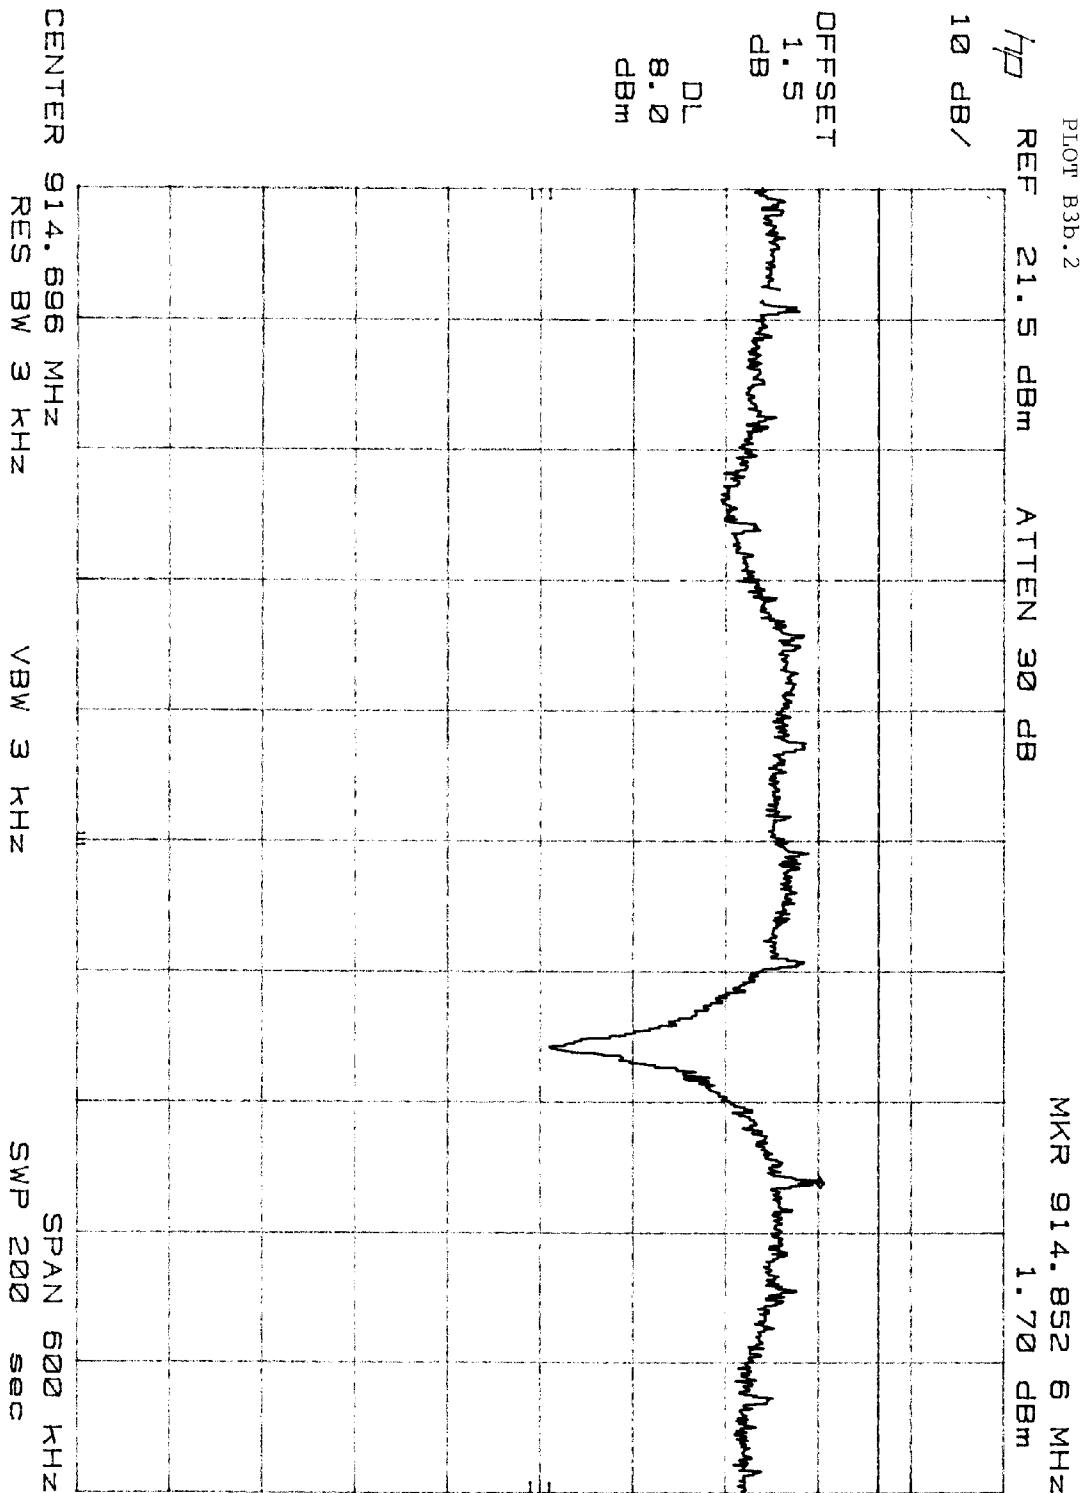


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

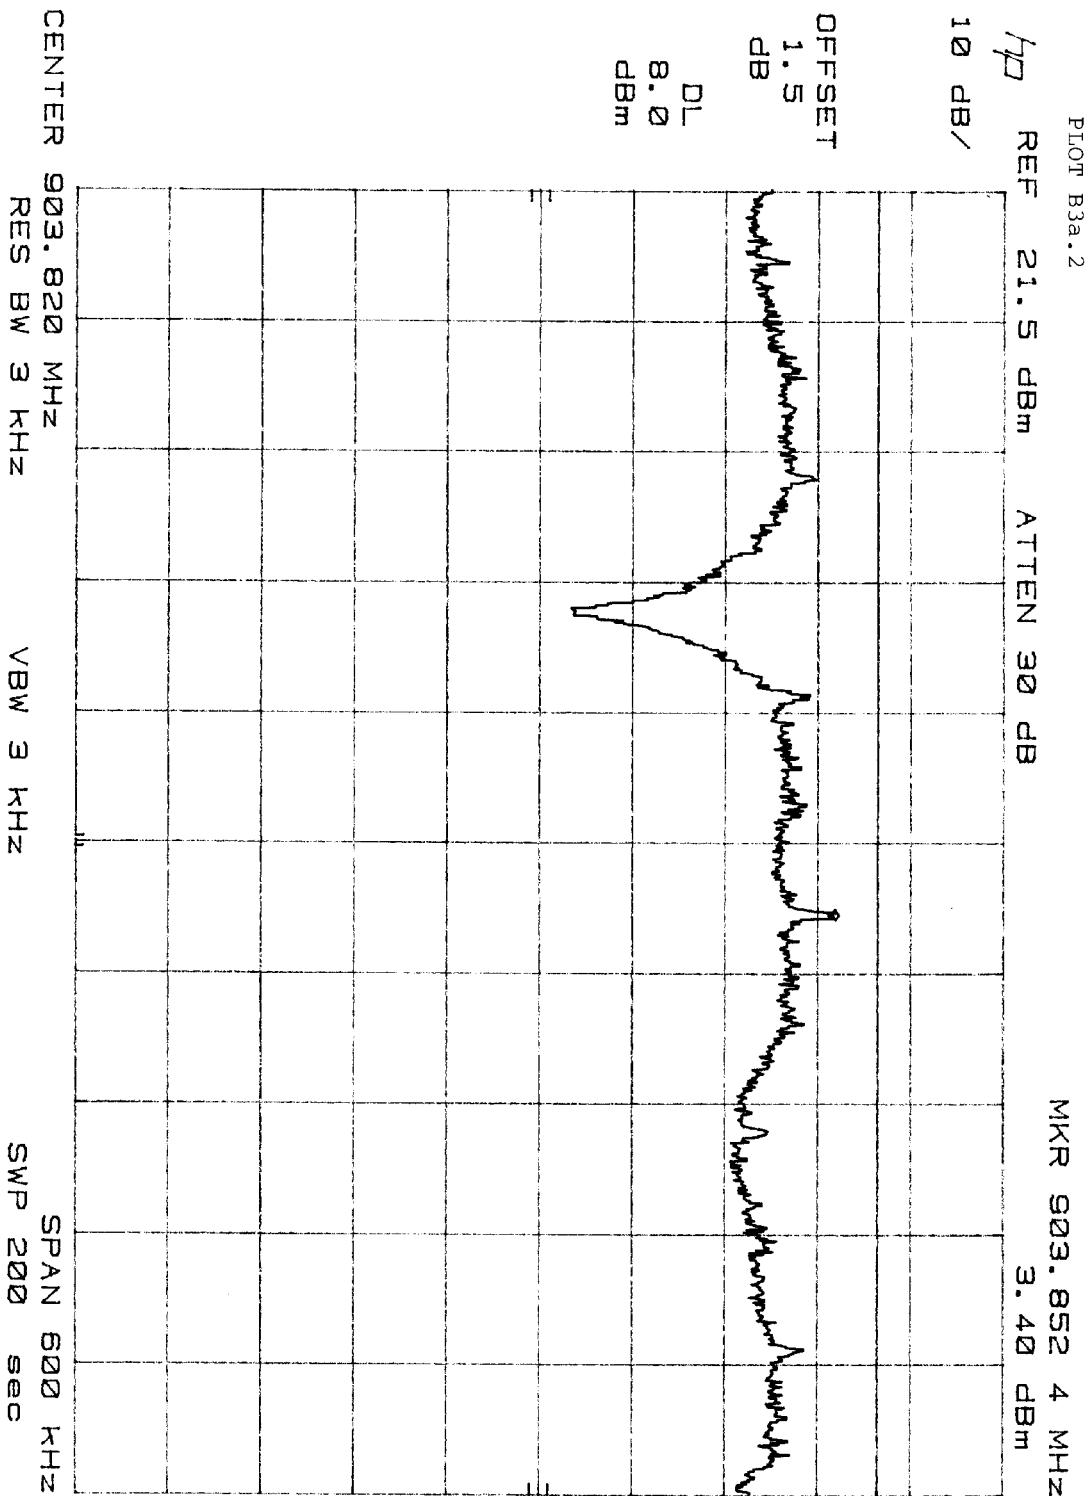


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

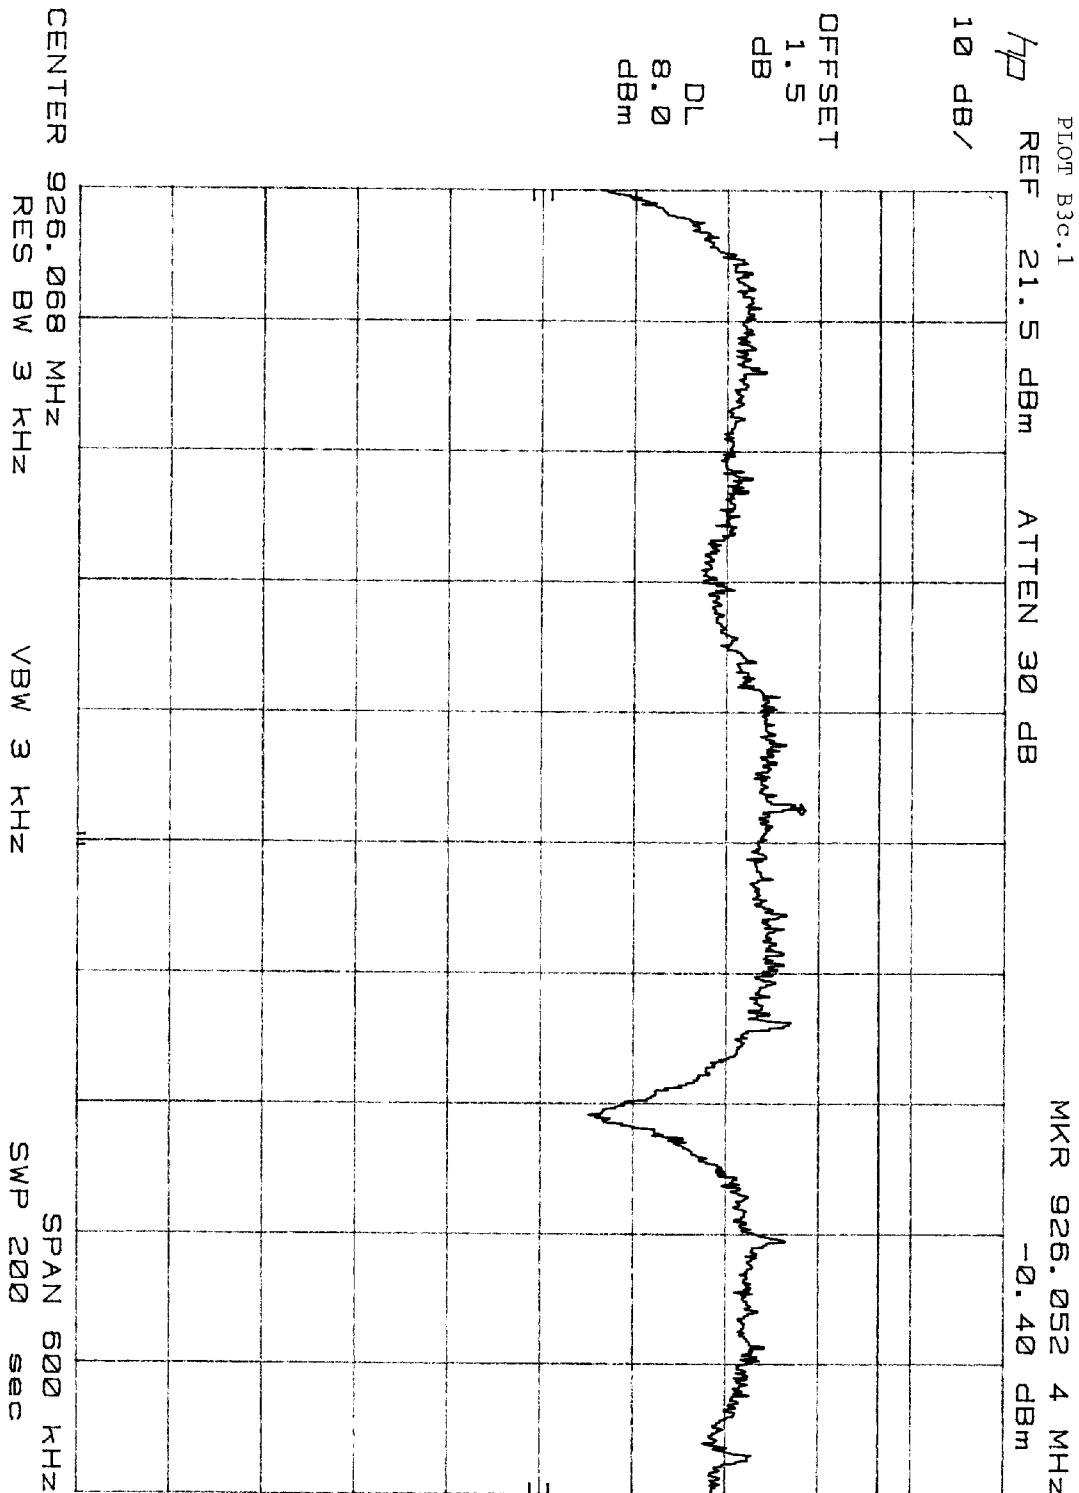



Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

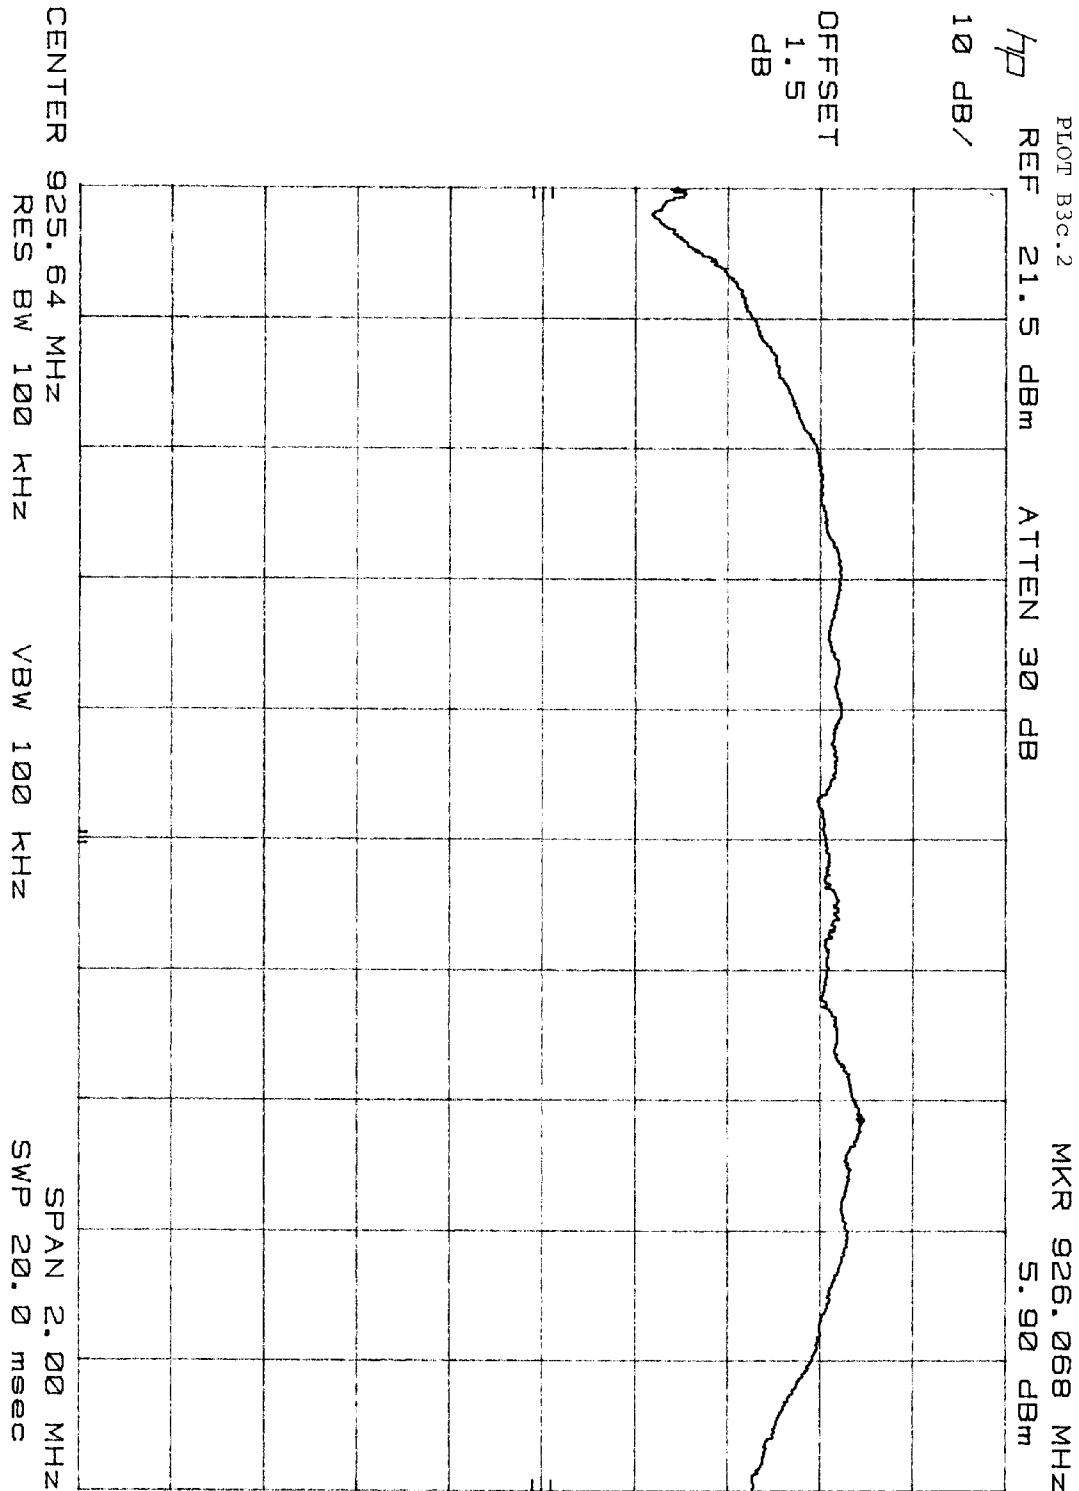

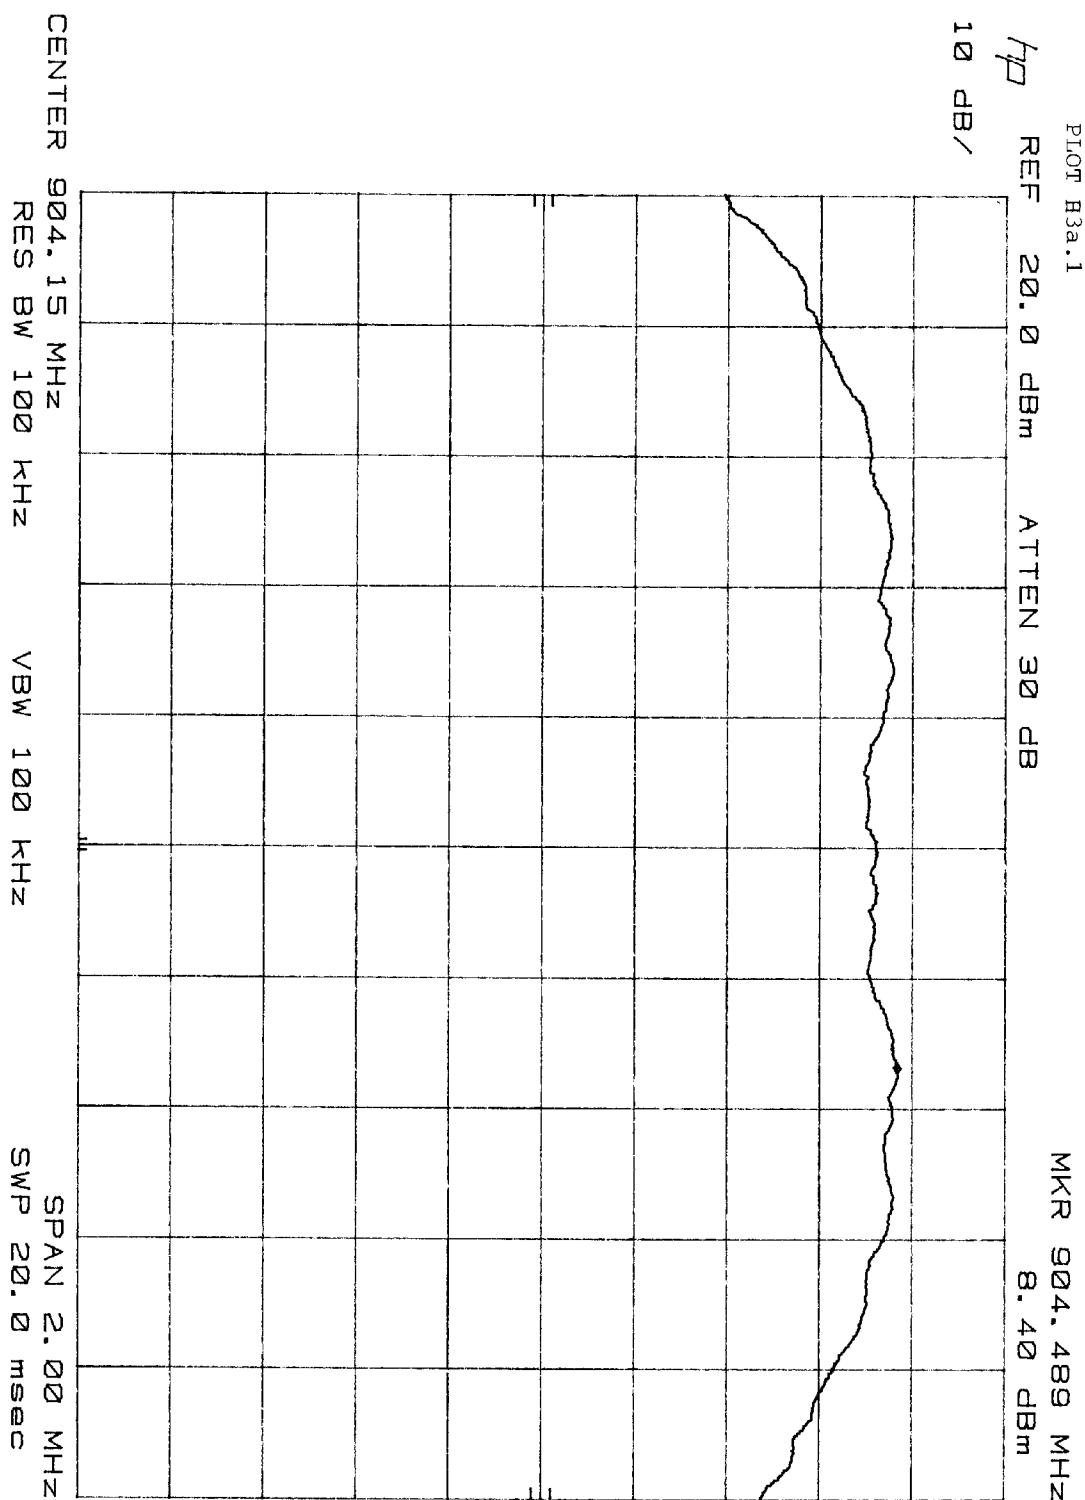



Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

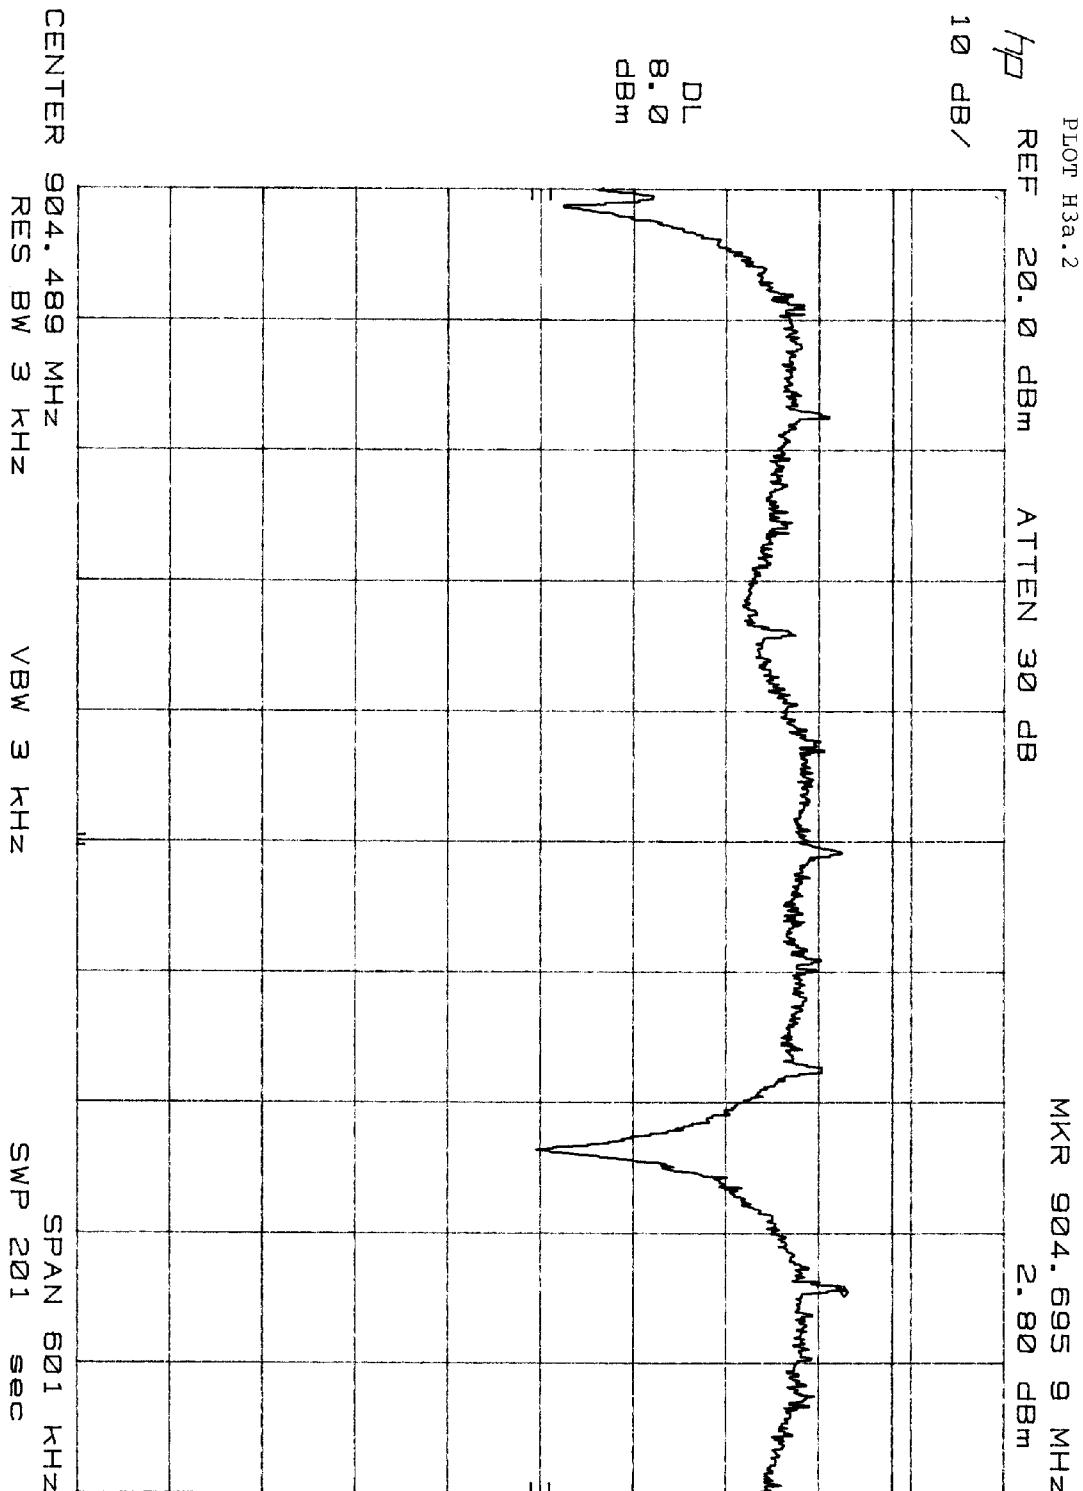

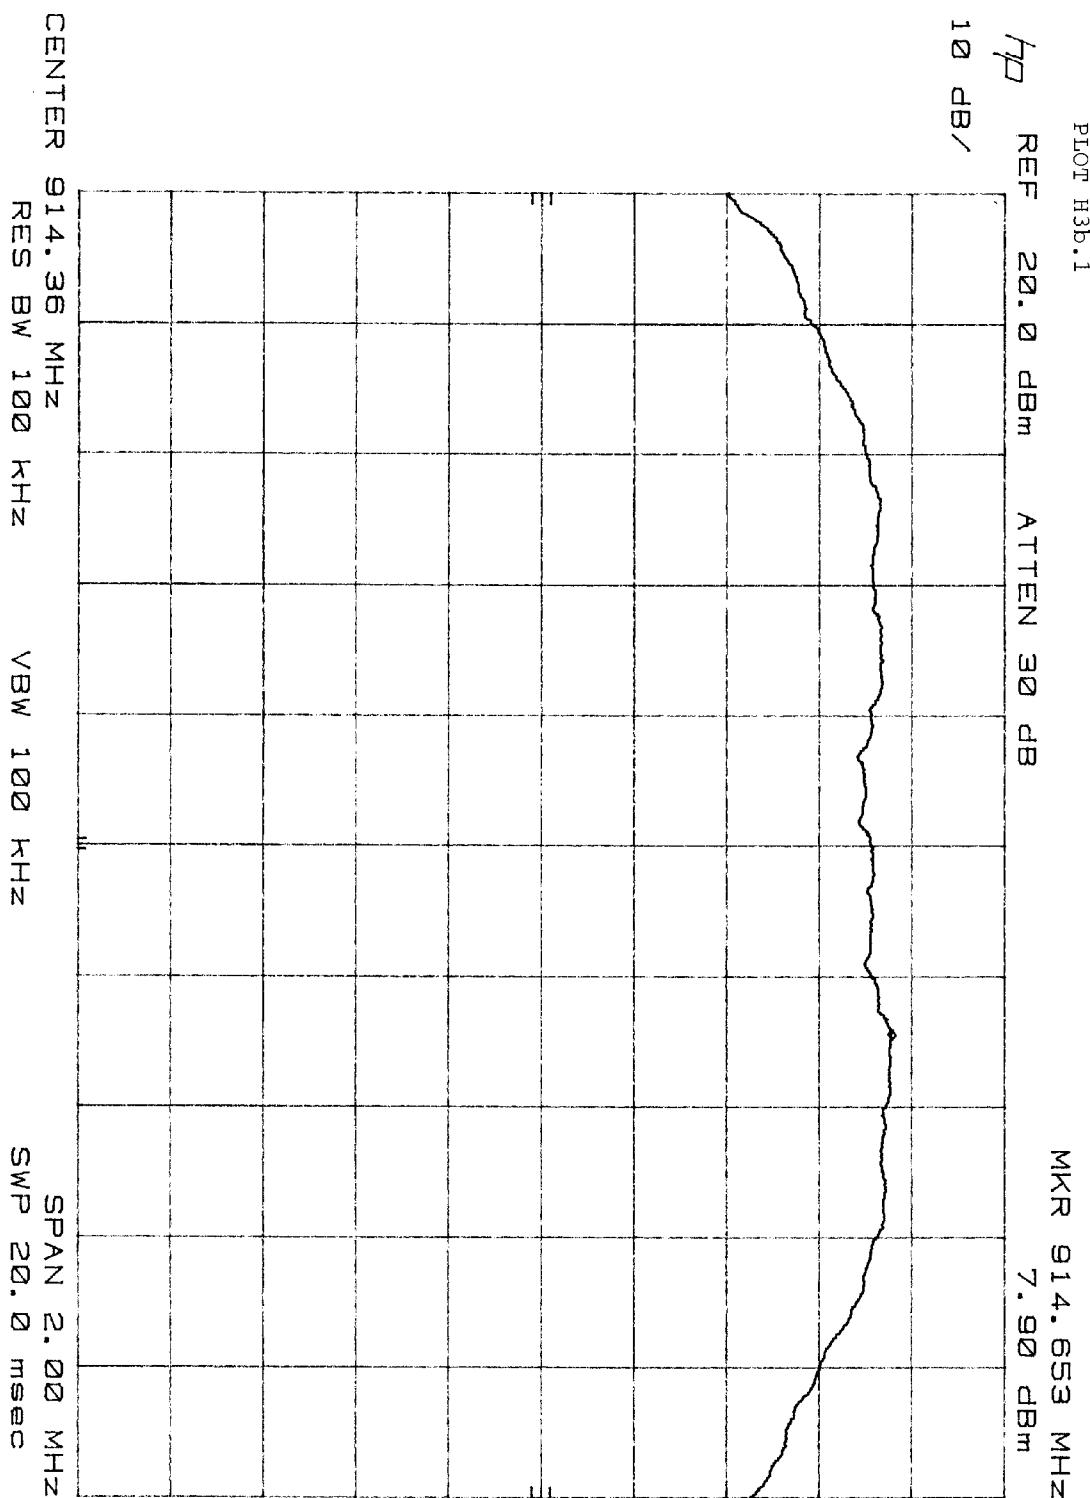


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

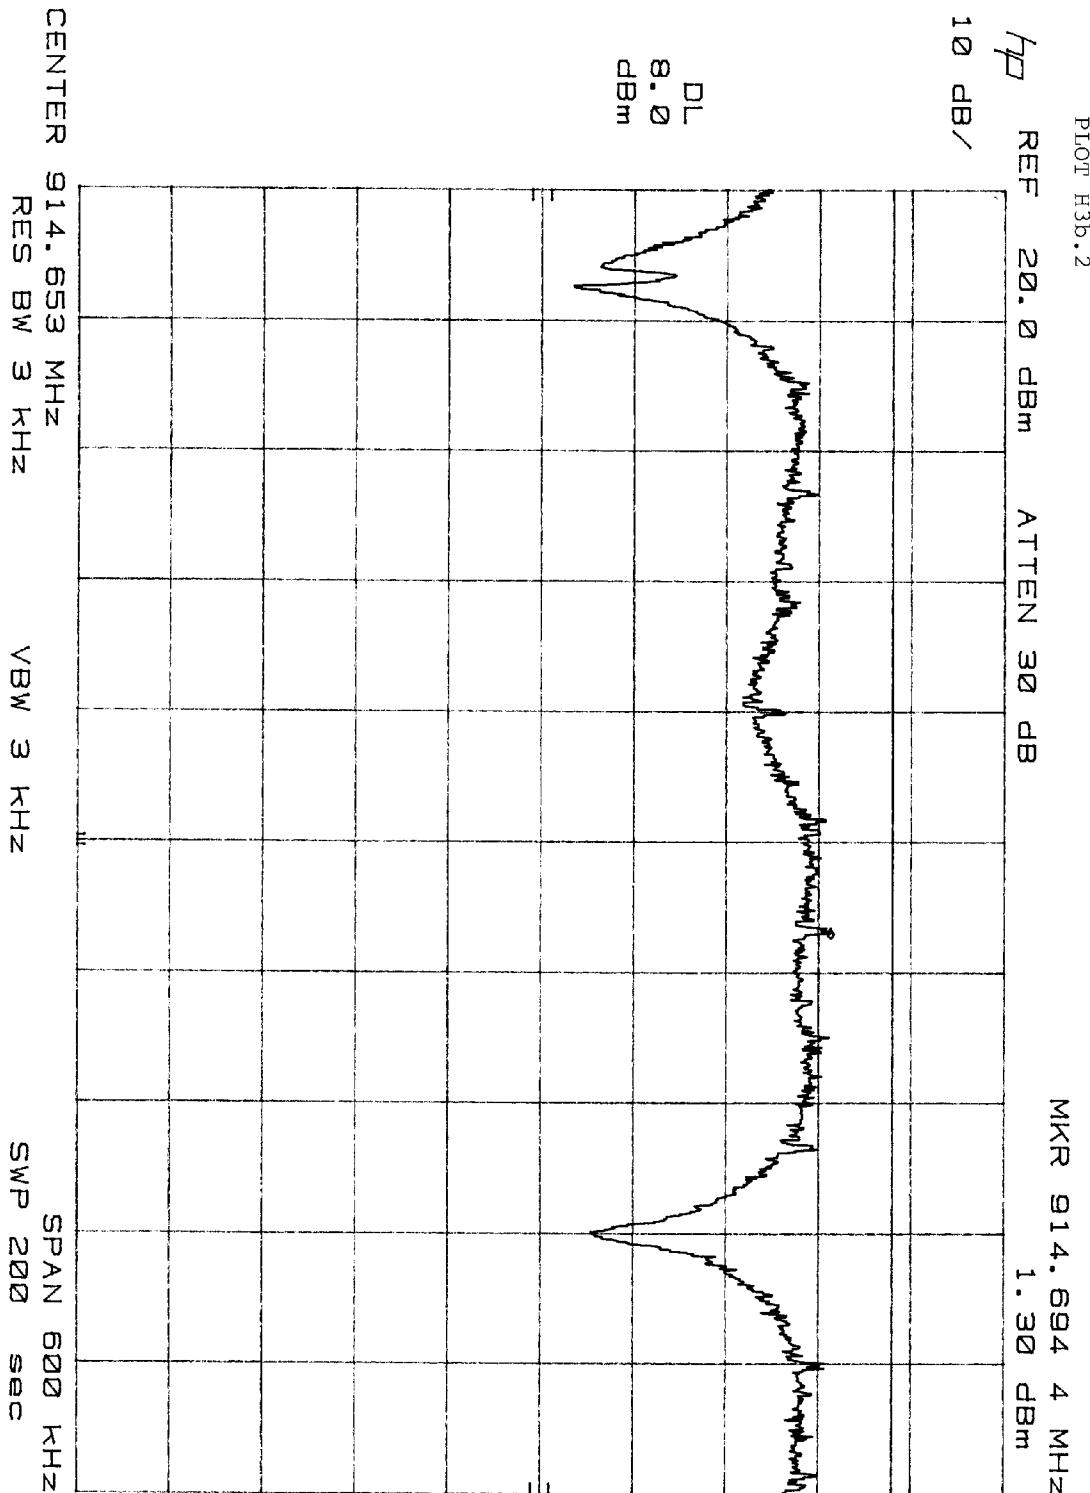


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

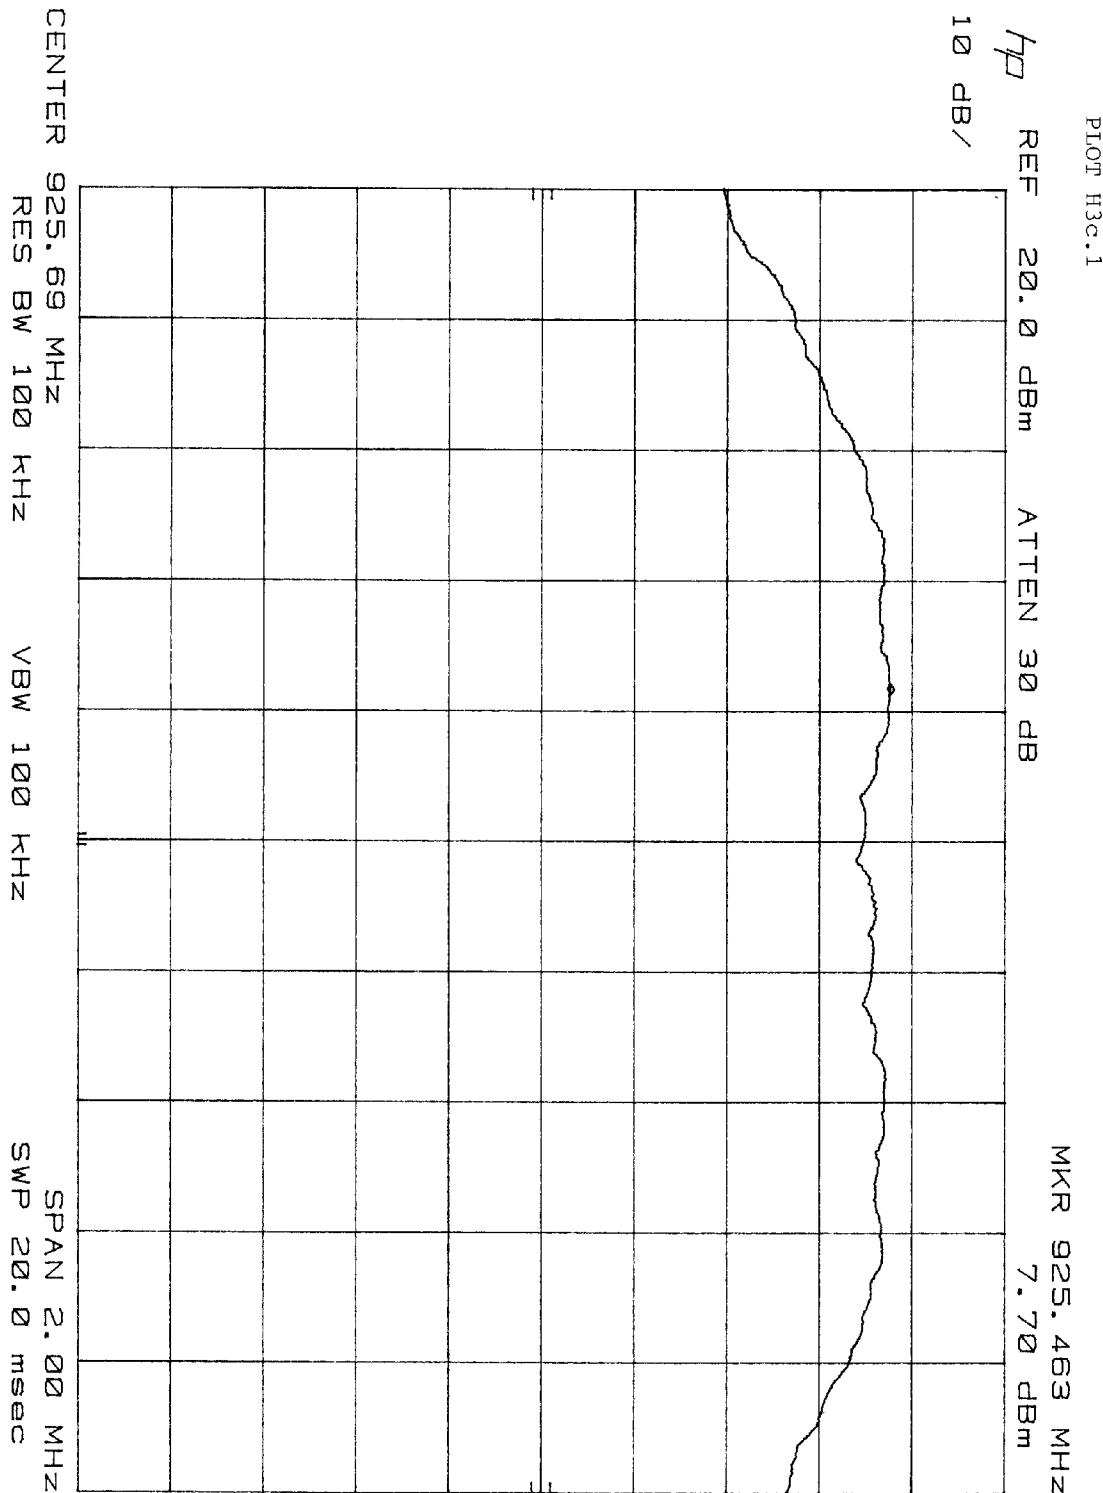


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

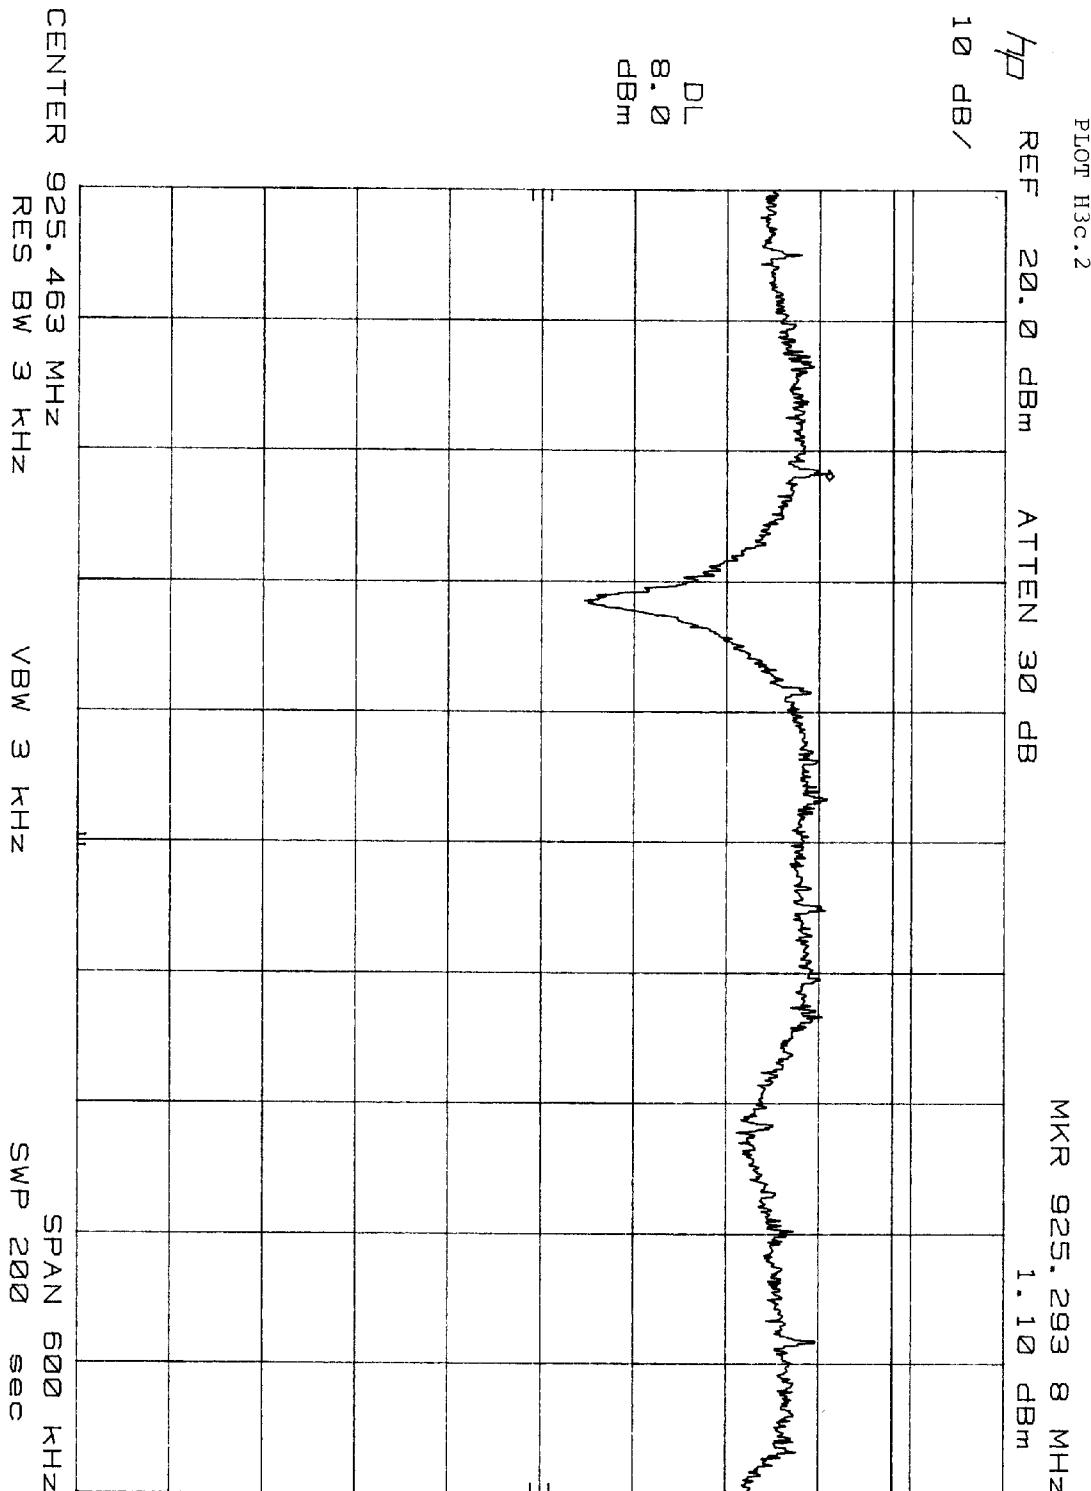

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(c):

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the following plots for out of band conducted emissions data:

Plot B4a.1 - B4a.5: Low Channel Emissions

Plot B4b.1 - B4b.4: Middle Channel Emissions

Plot B4c.1 - B4c.5: High Channel Emissions

Plot H4a.1 - H4a.4: Low Channel Emissions

Plot H4b.1 - H4b.4: Middle Channel Emissions

Plot H4c.1 - H4c.5: High Channel Emissions

4.5 Out of Band Radiated Emissions (for emissions in 4. above that are less than 26 dB below carrier), FCC Rule 15.247(c):

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Not required
 See attached data sheet

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Radiated emission measurements were performed from 30 MHz to <10000> MHz. Analyzer resolution is 100 kHz or greater for 30 MHz to 1000 MHz, 1 MHz for >1000 MHz.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000


1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

PLOT B4a.1

MKR 902.0 MHz
-29.00 dBm

HP
REF 21.5 dBm ATTEN 30 dB
10 dB/
OFFSET 1.5 dB

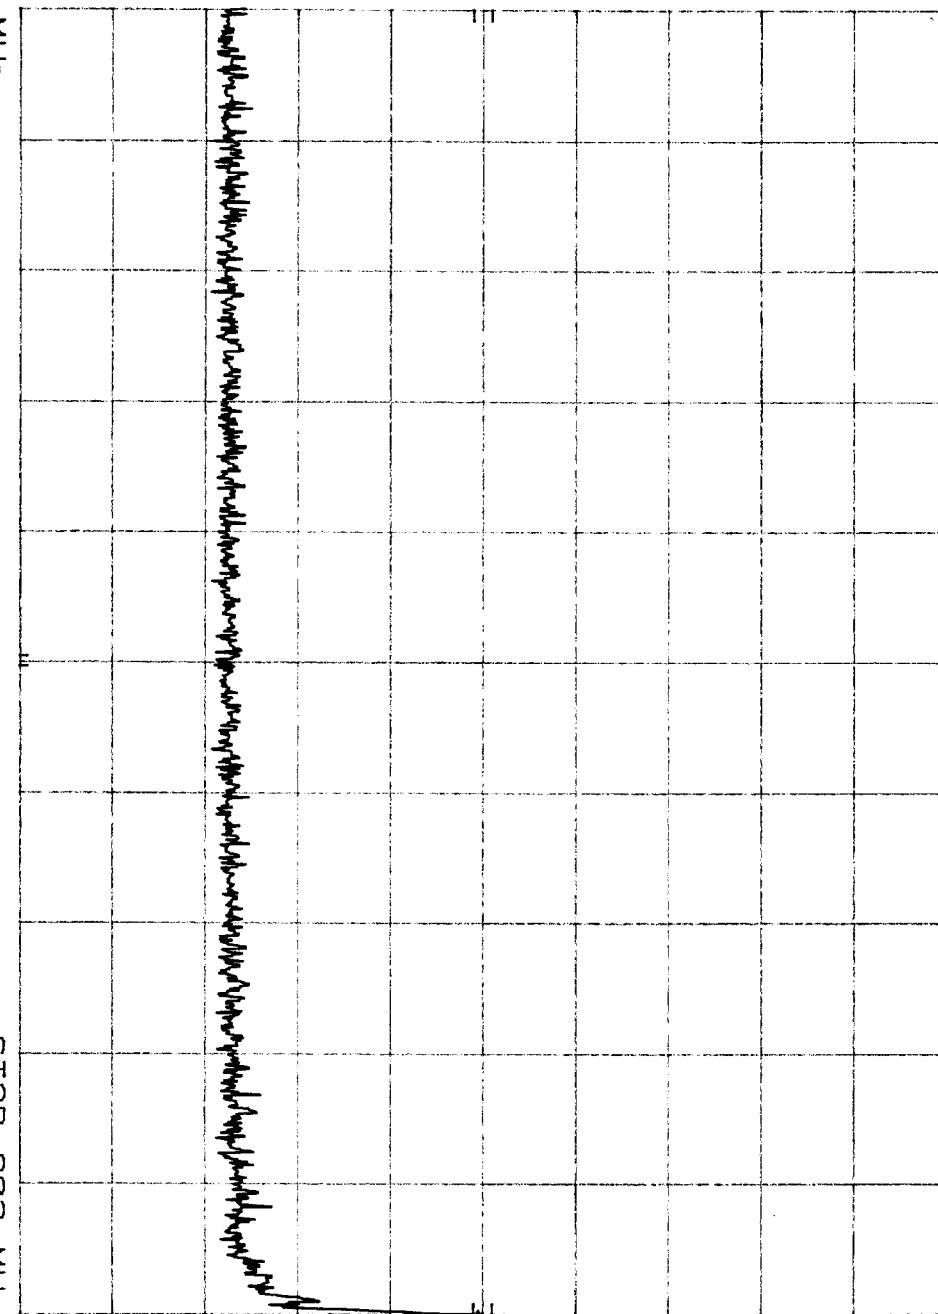

START 1 MHz
RES BW 100 kHz
VBW 100 kHz


SWP 270 msec

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

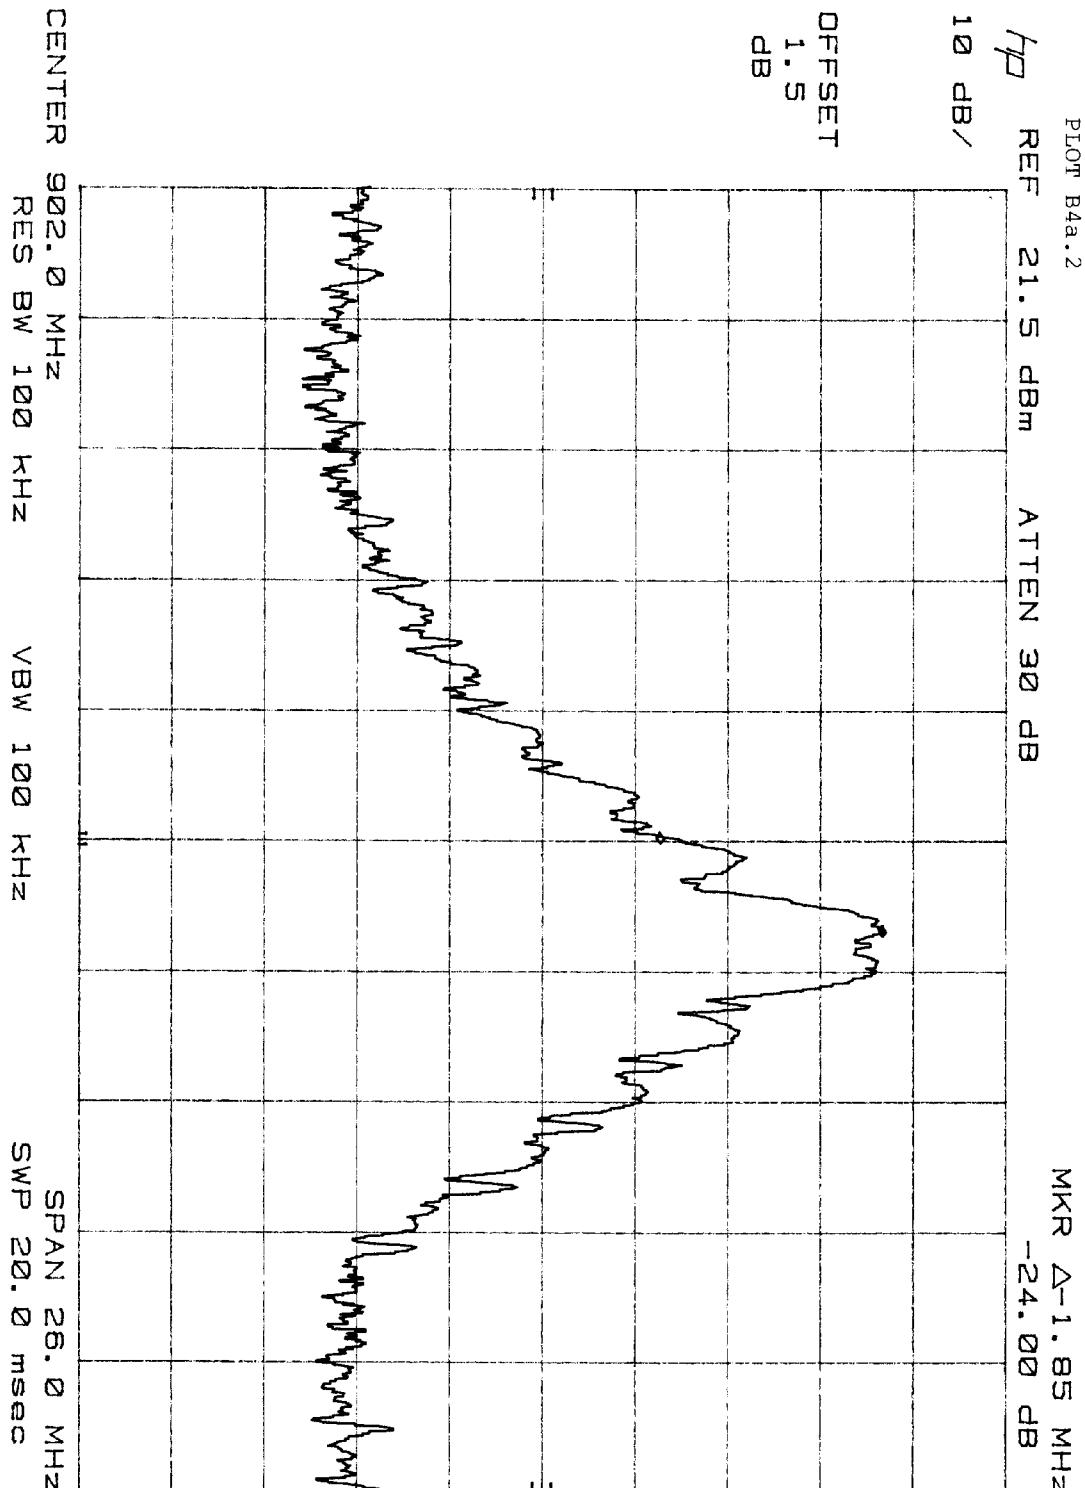

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025


Date of Test: 9/29/98 - 10/05/98

PLOT B4a.3

MKR Δ -1.66 MHz
-24.10 dB

10 dB/
REF 21.5 dBm ATTEN 30 dB

OFFSET
1.5
dB

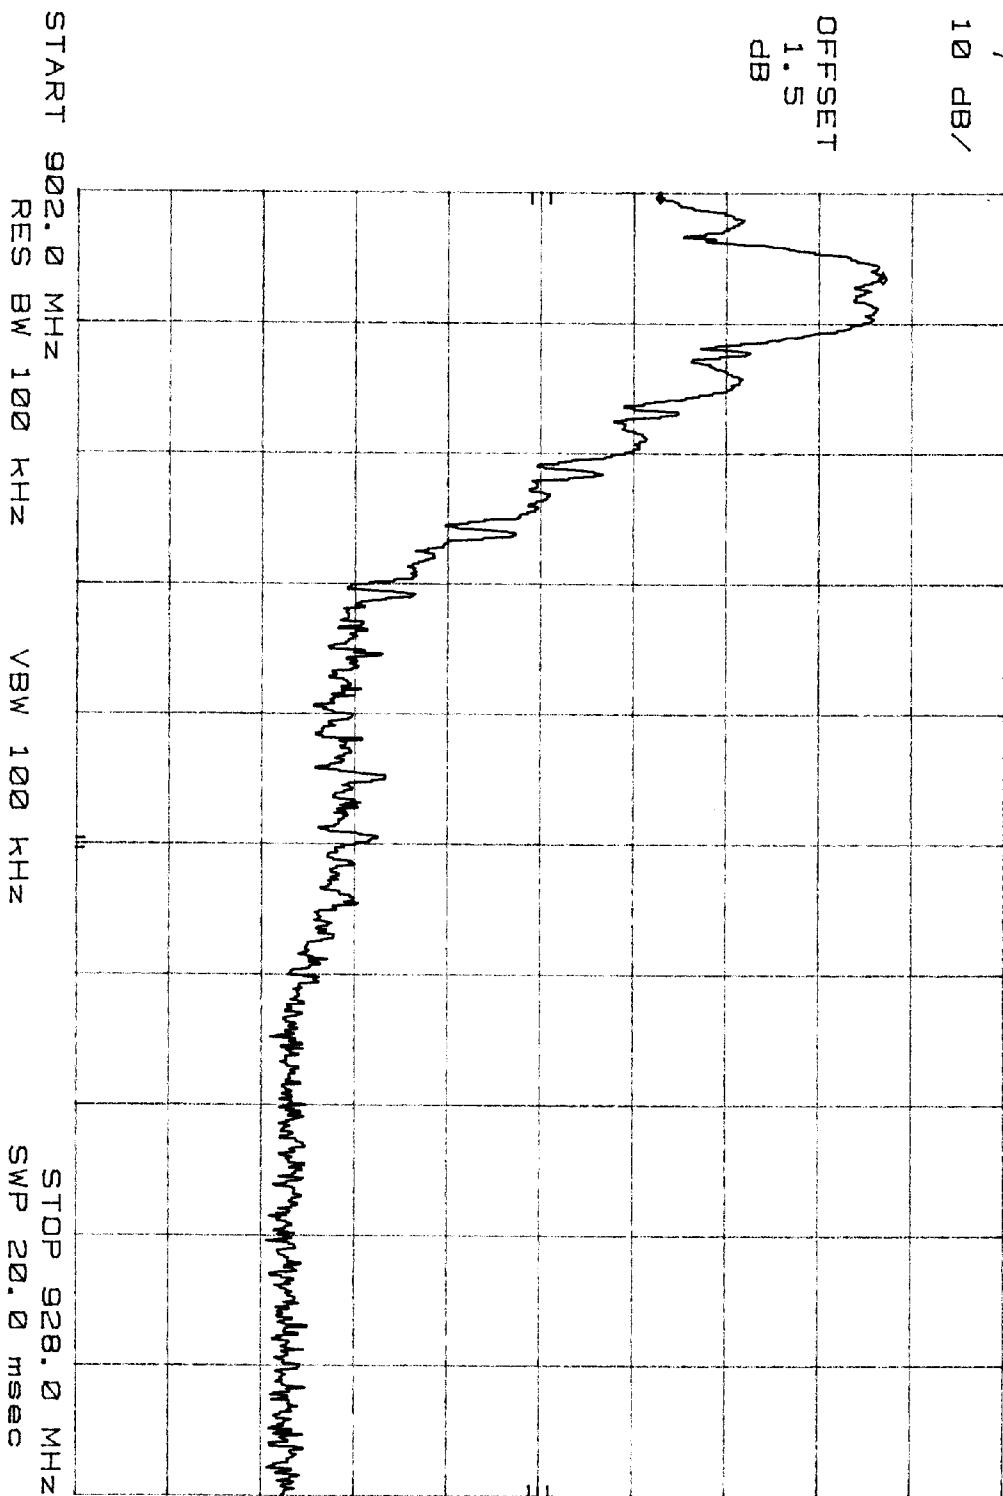

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98


PLOT B4a.4

REF 21.5 dBm ATTEN 30 dB

10 dB/

OFFSET
1.5
dB

MKR 1.808 GHz
-49.70 dBm

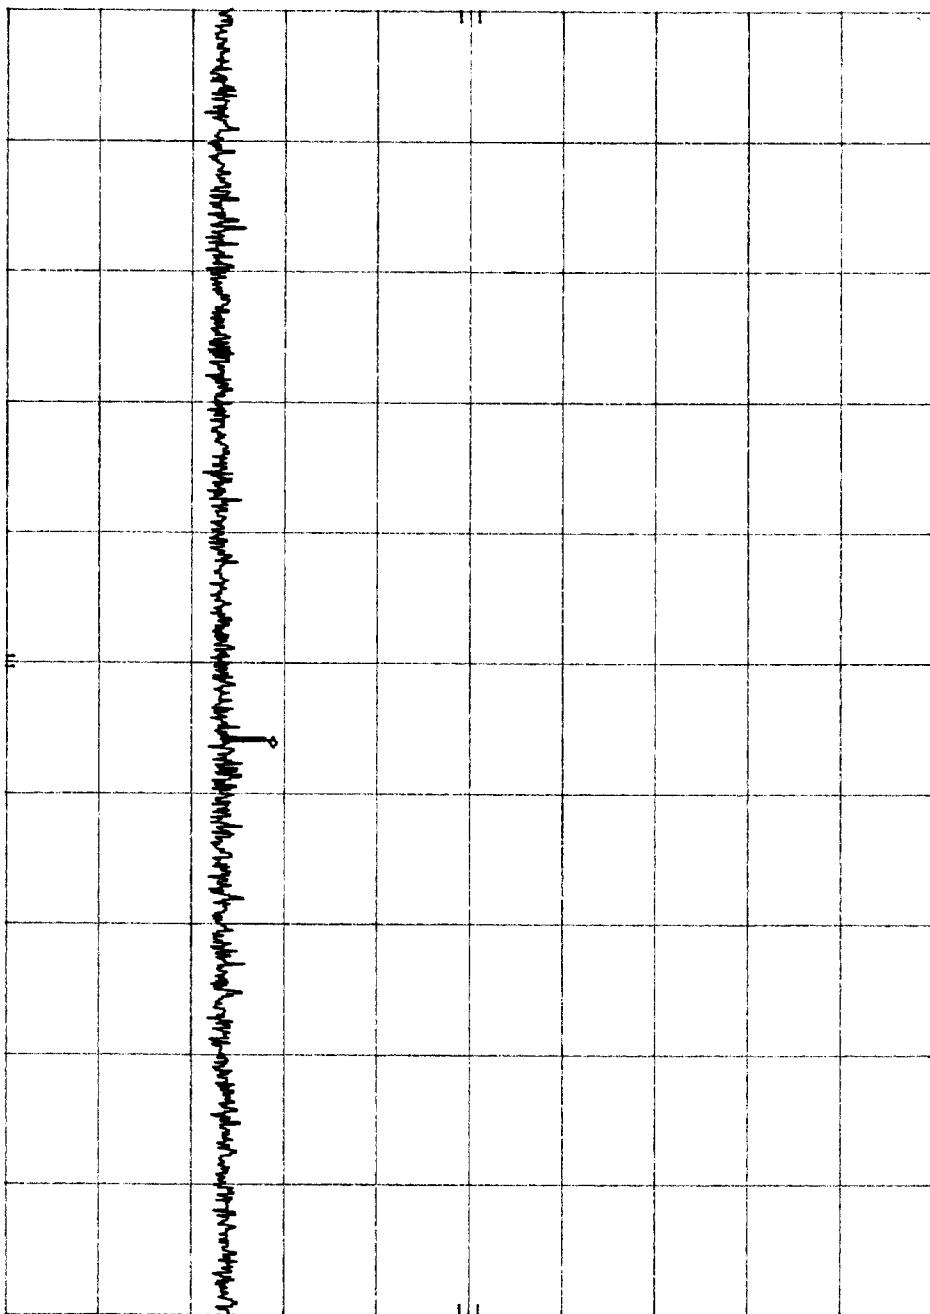


START 928 MHz
RES BW 100 kHz
VBW 100 kHz
STOP 2.50 GHz
SWP 472 msec

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

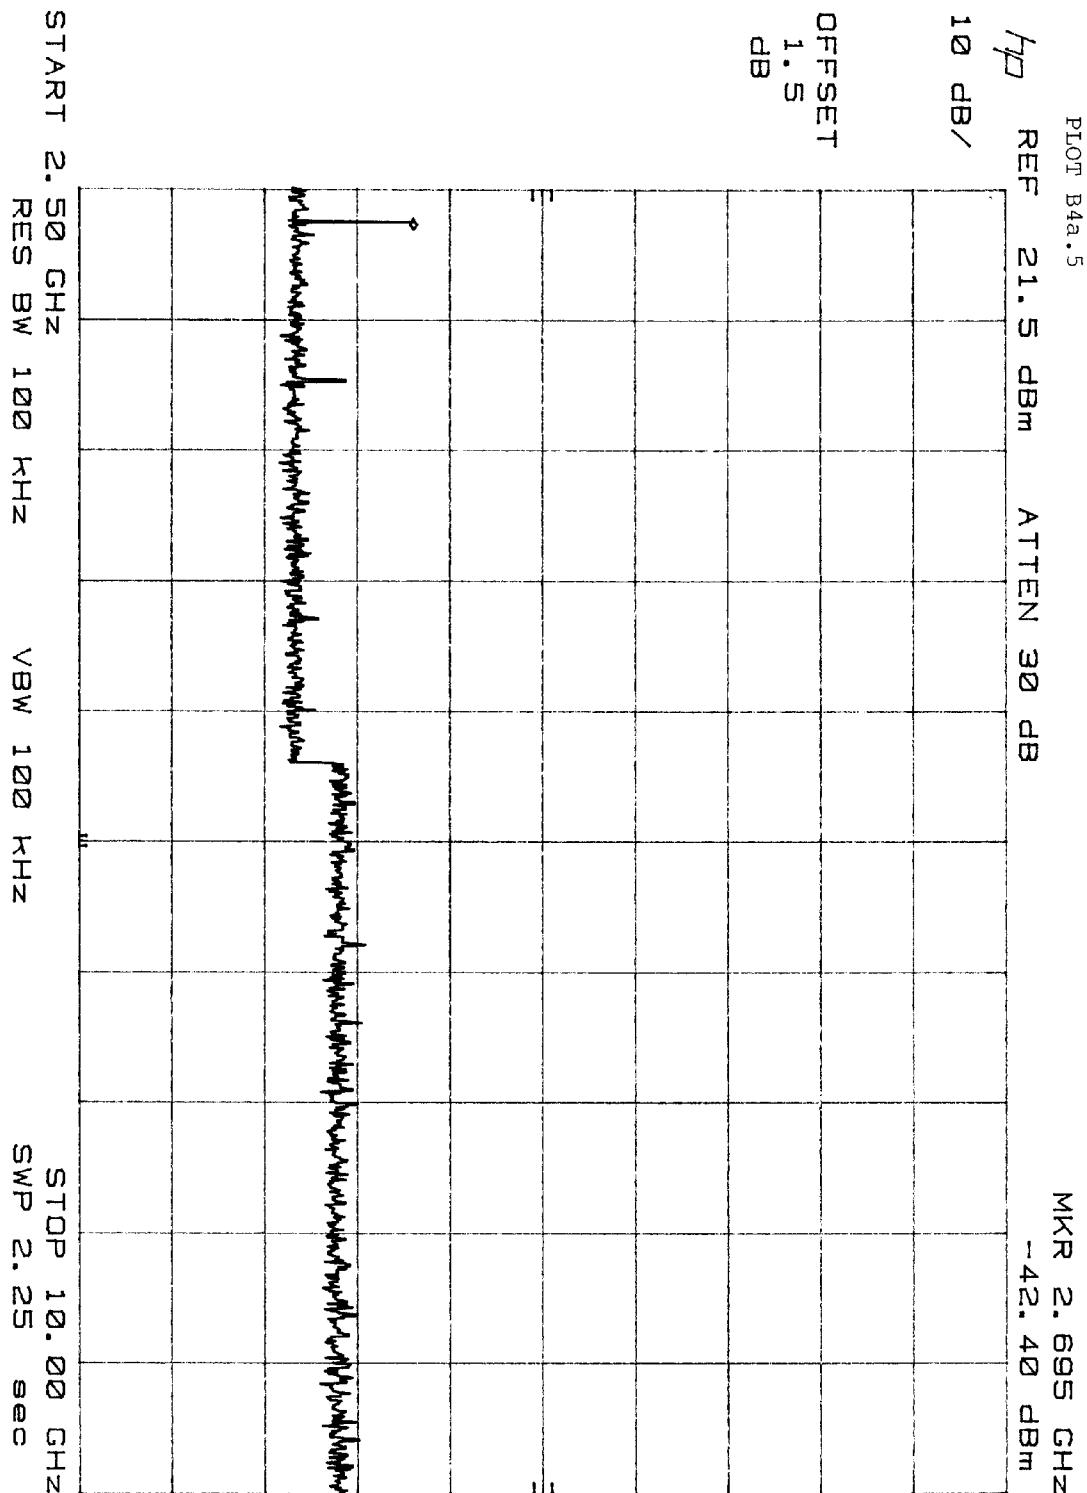

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000


1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

PLOT B4b.1

MKR 876.8 MHz
-48.80 dBm

REF 21.5 dBm ATTEN 30 dB
10 dB/
OFFSET 1.5 dB

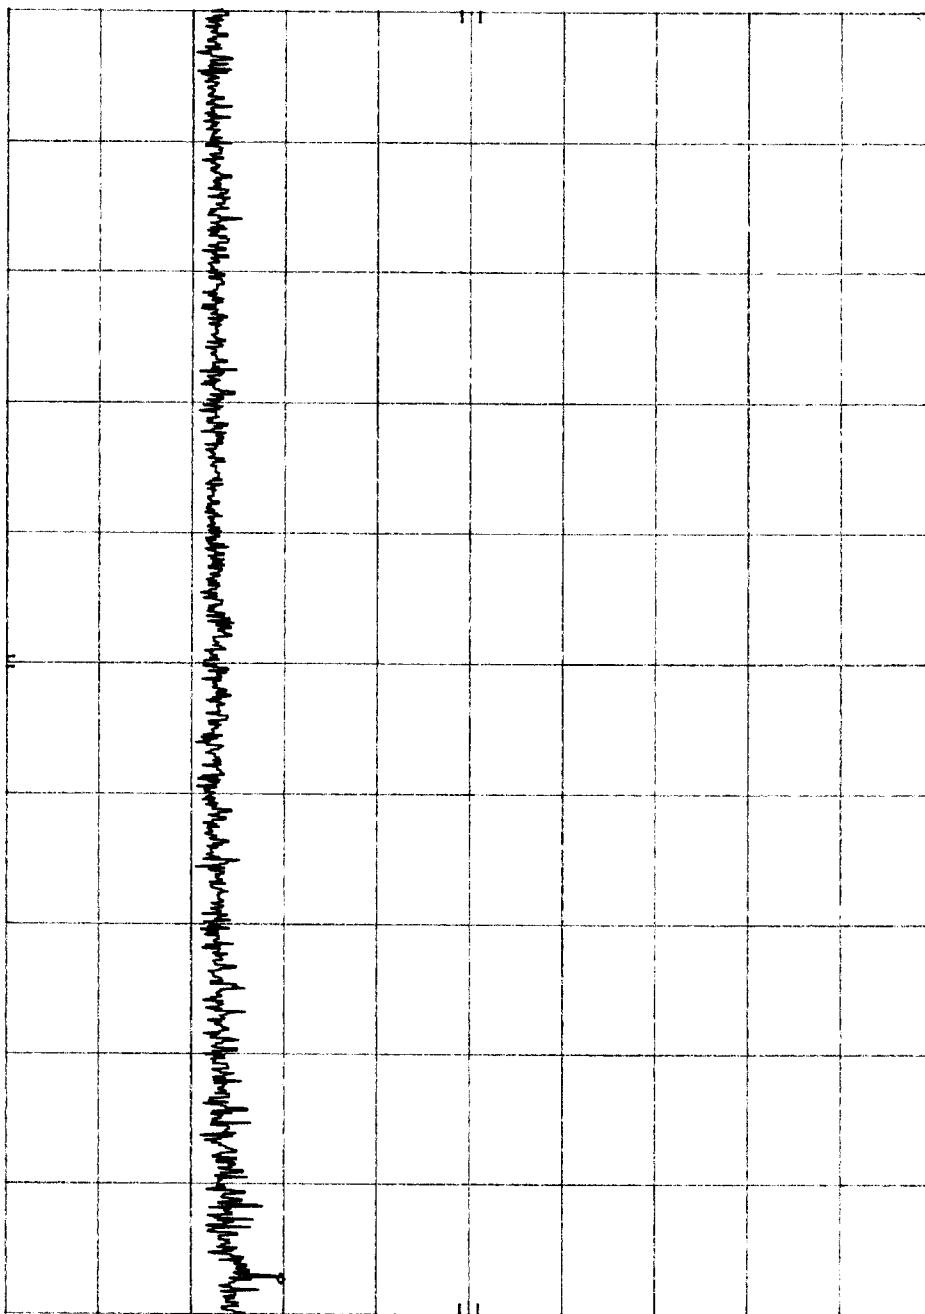


START 1 MHz
RES BW 100 kHz
VBW 100 kHz
STOP 902 MHz
SWP 270 msec

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

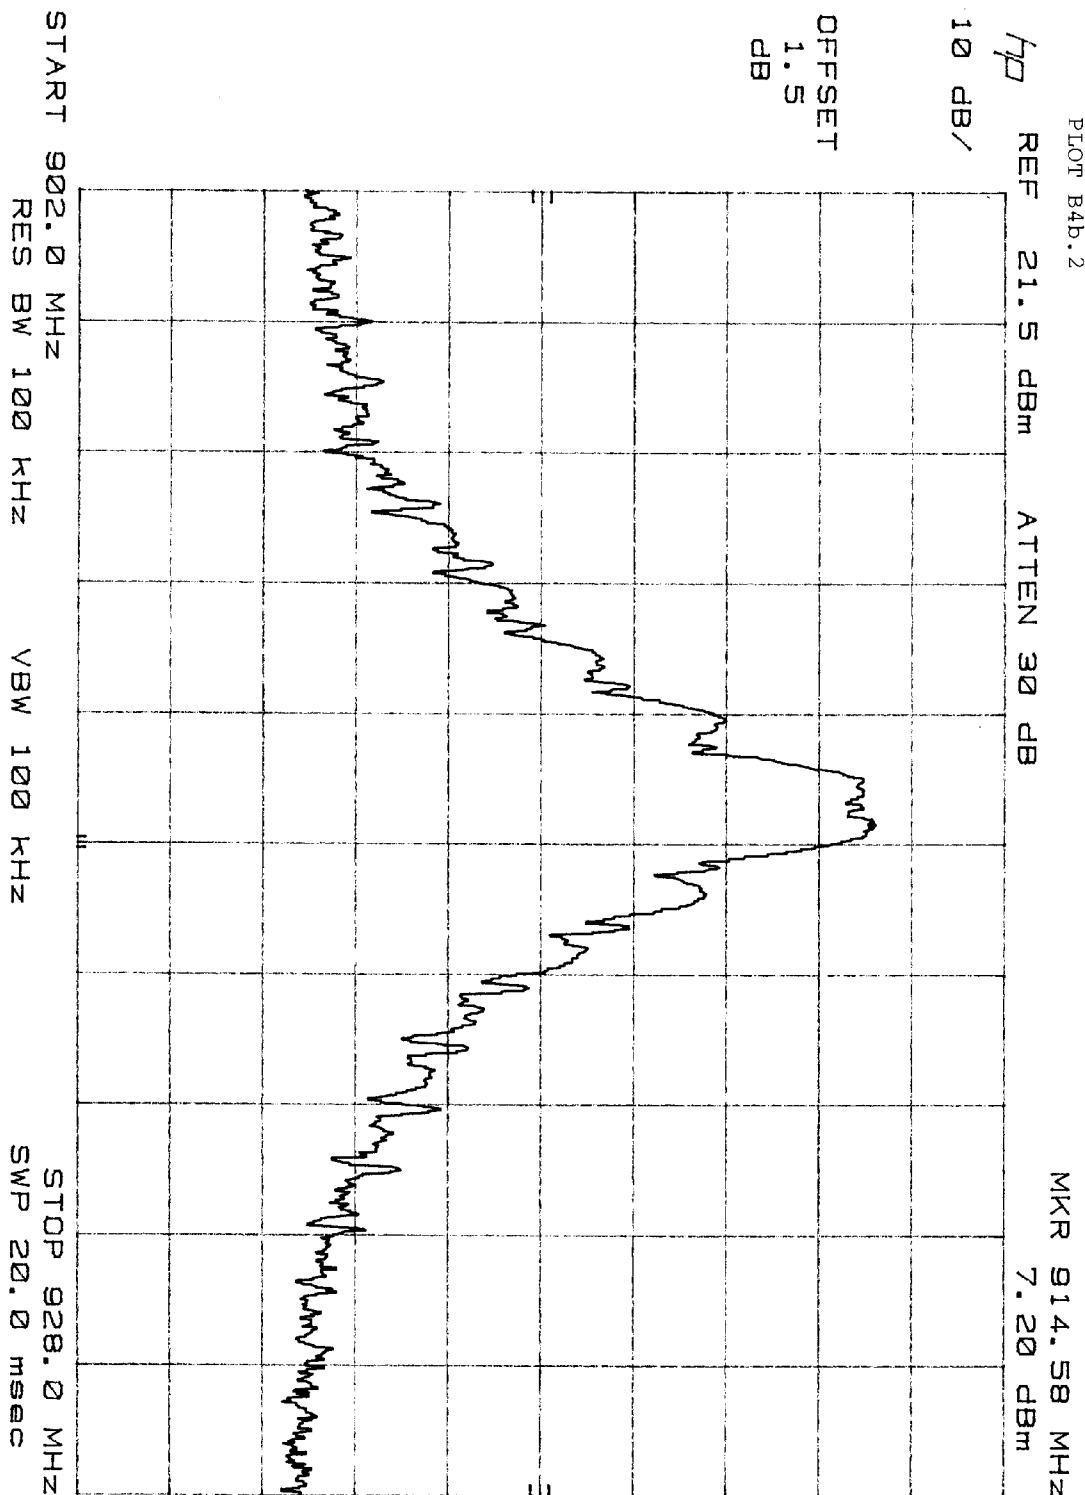

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98


PLOT B4b.3

MKR 1.829 GHz

-47.70 dBm

HP REF 21.5 dBm ATTEN 30 dB
10 dB/

OFFSET
1.5
dB

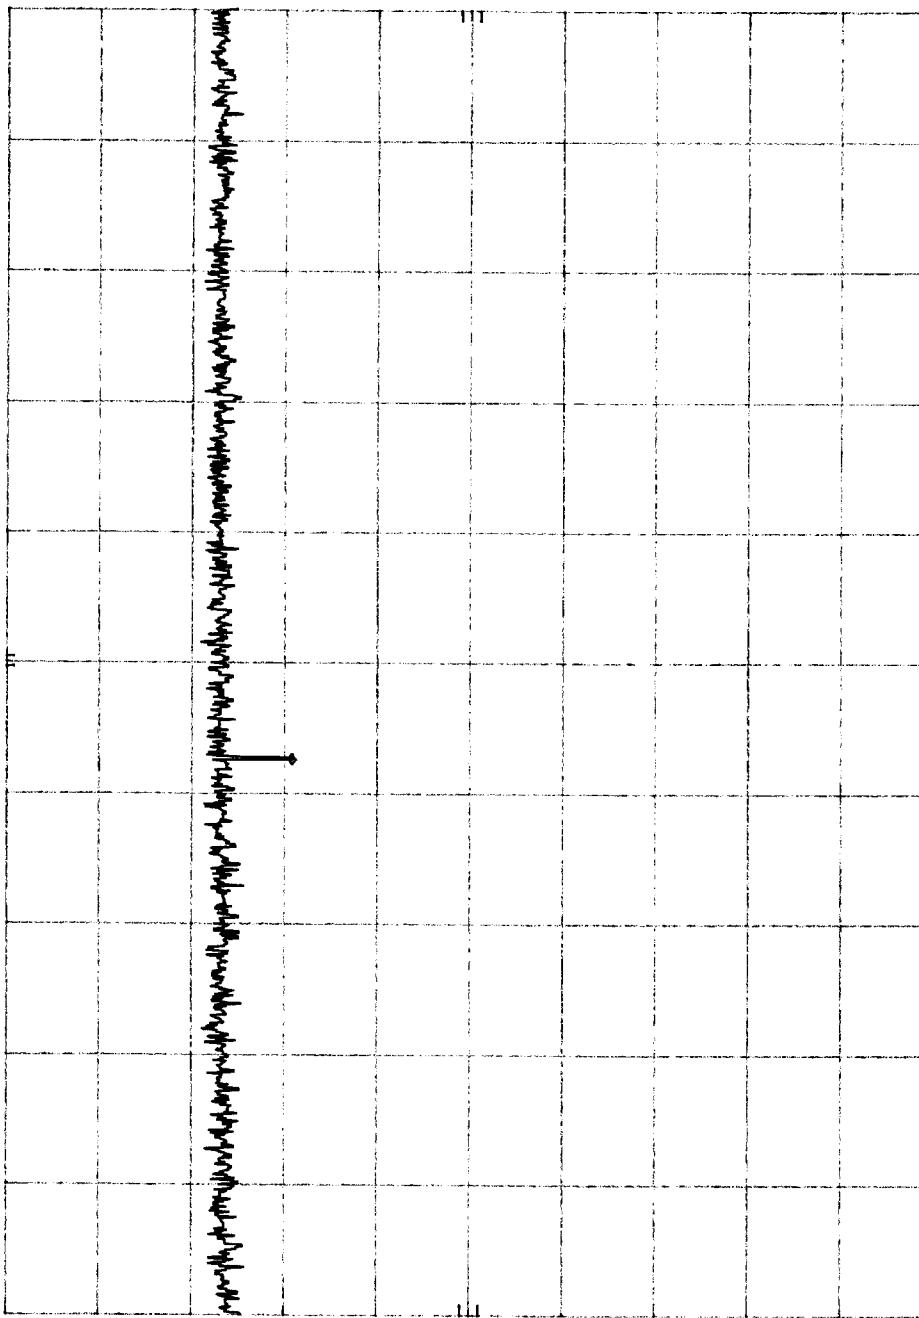


START 928 MHz RES BW 100 kHz STOP 2.50 GHz
VBW 100 kHz SWP 472 msec

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

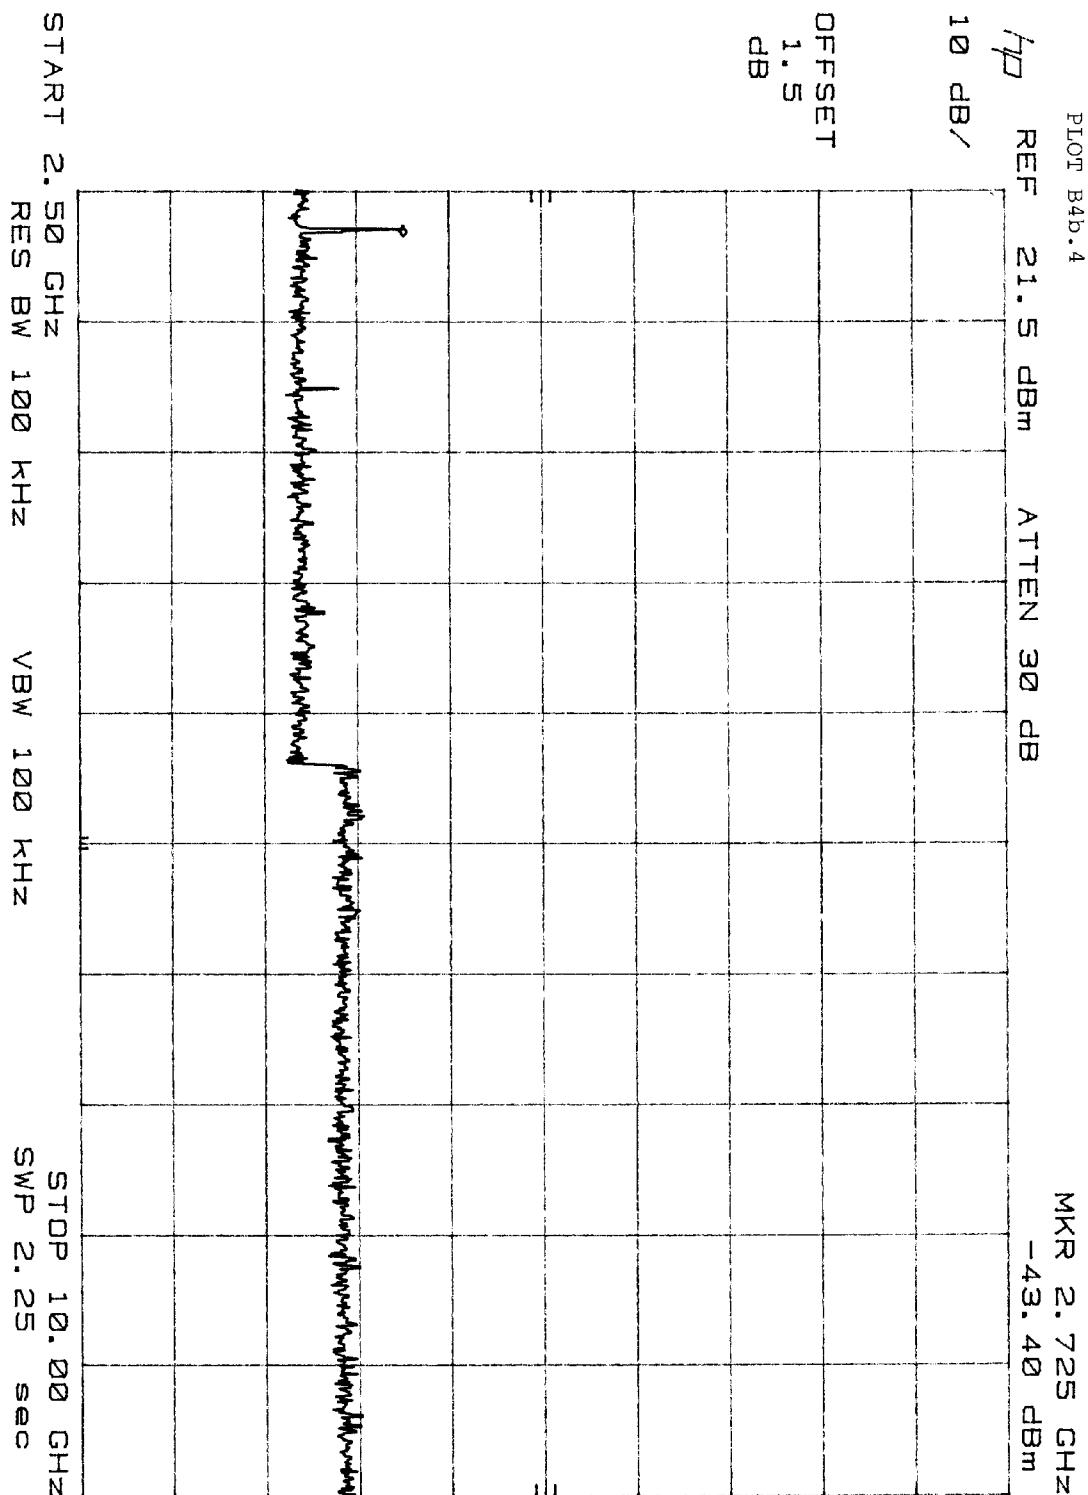

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025


Date of Test: 9/29/98 - 10/05/98

PLOT B4c.1

MKR 875.9 MHz

-48.90 dBm

REF 21.5 dBm ATTEN 30 dB
10 dB/
OFFSET 1.5 dB

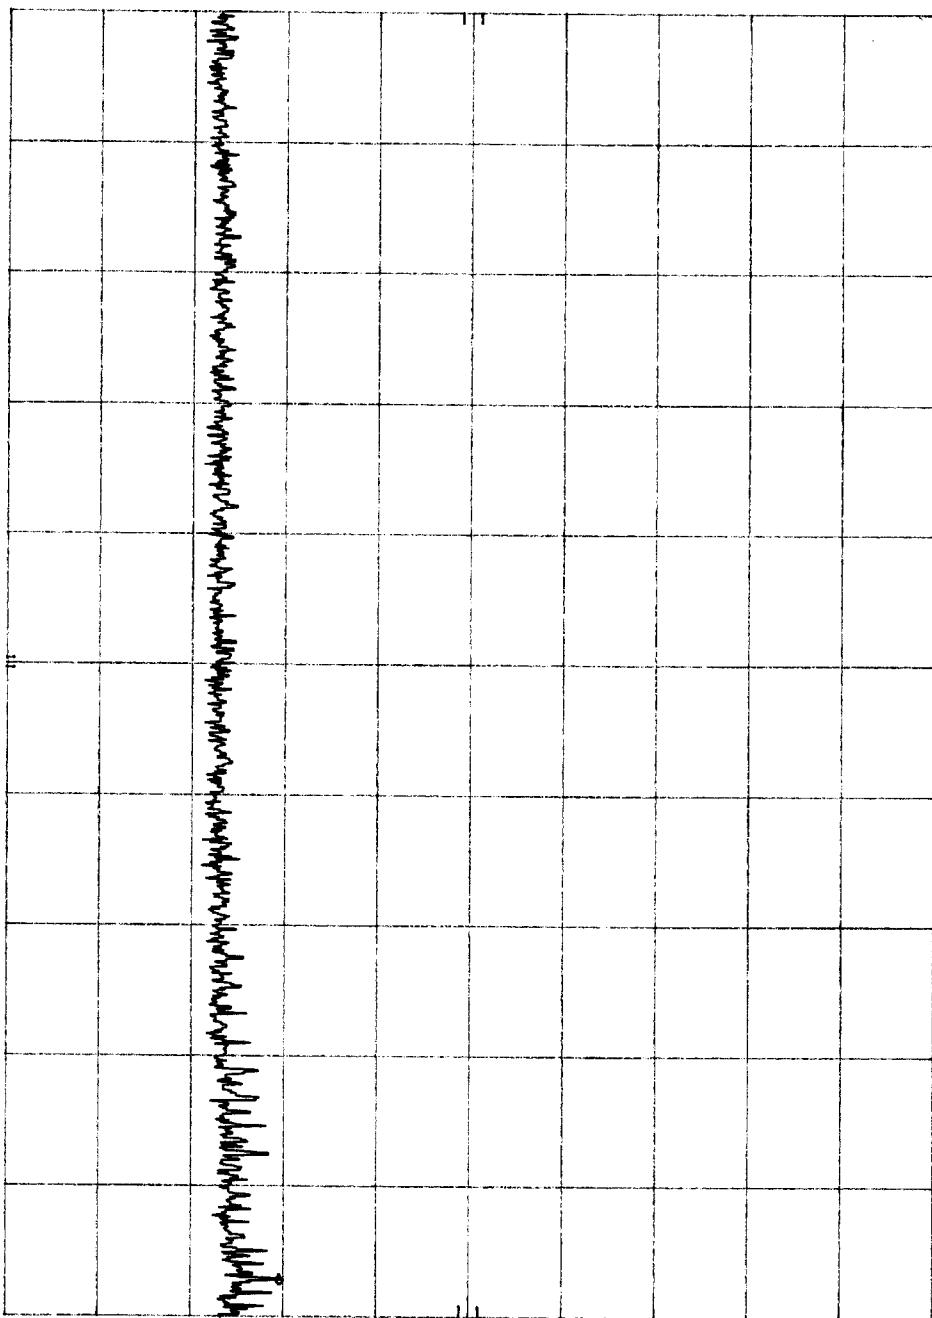


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

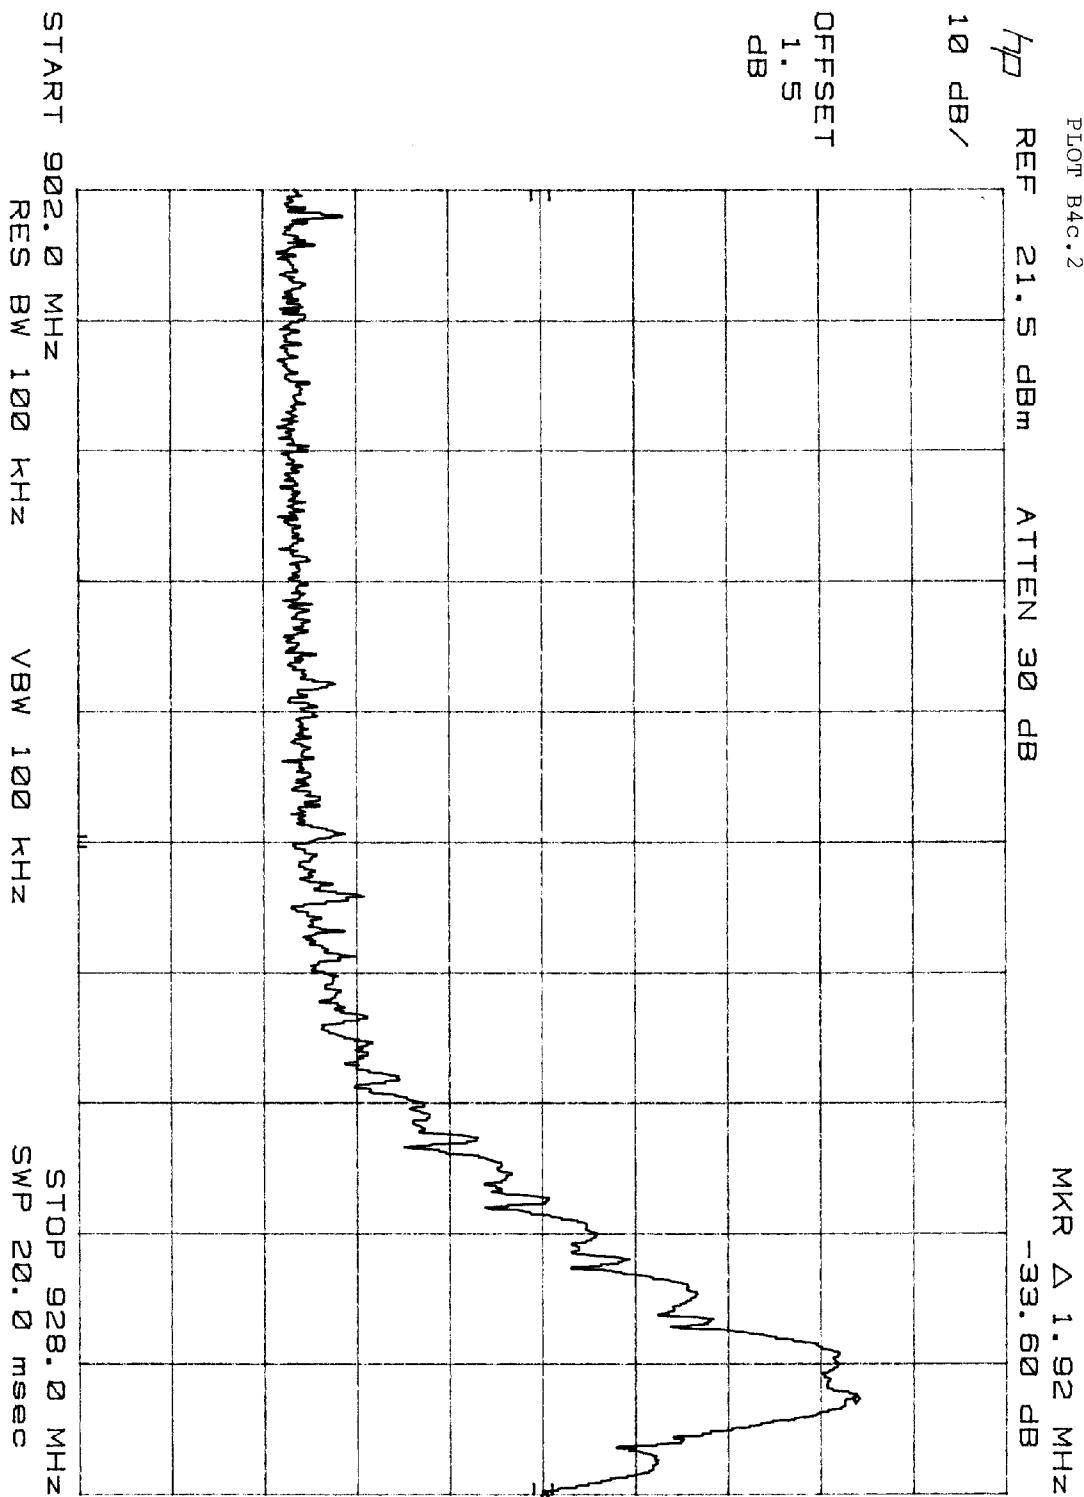


Intertek Testing Services

**GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000**

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

PLOT B4C.3

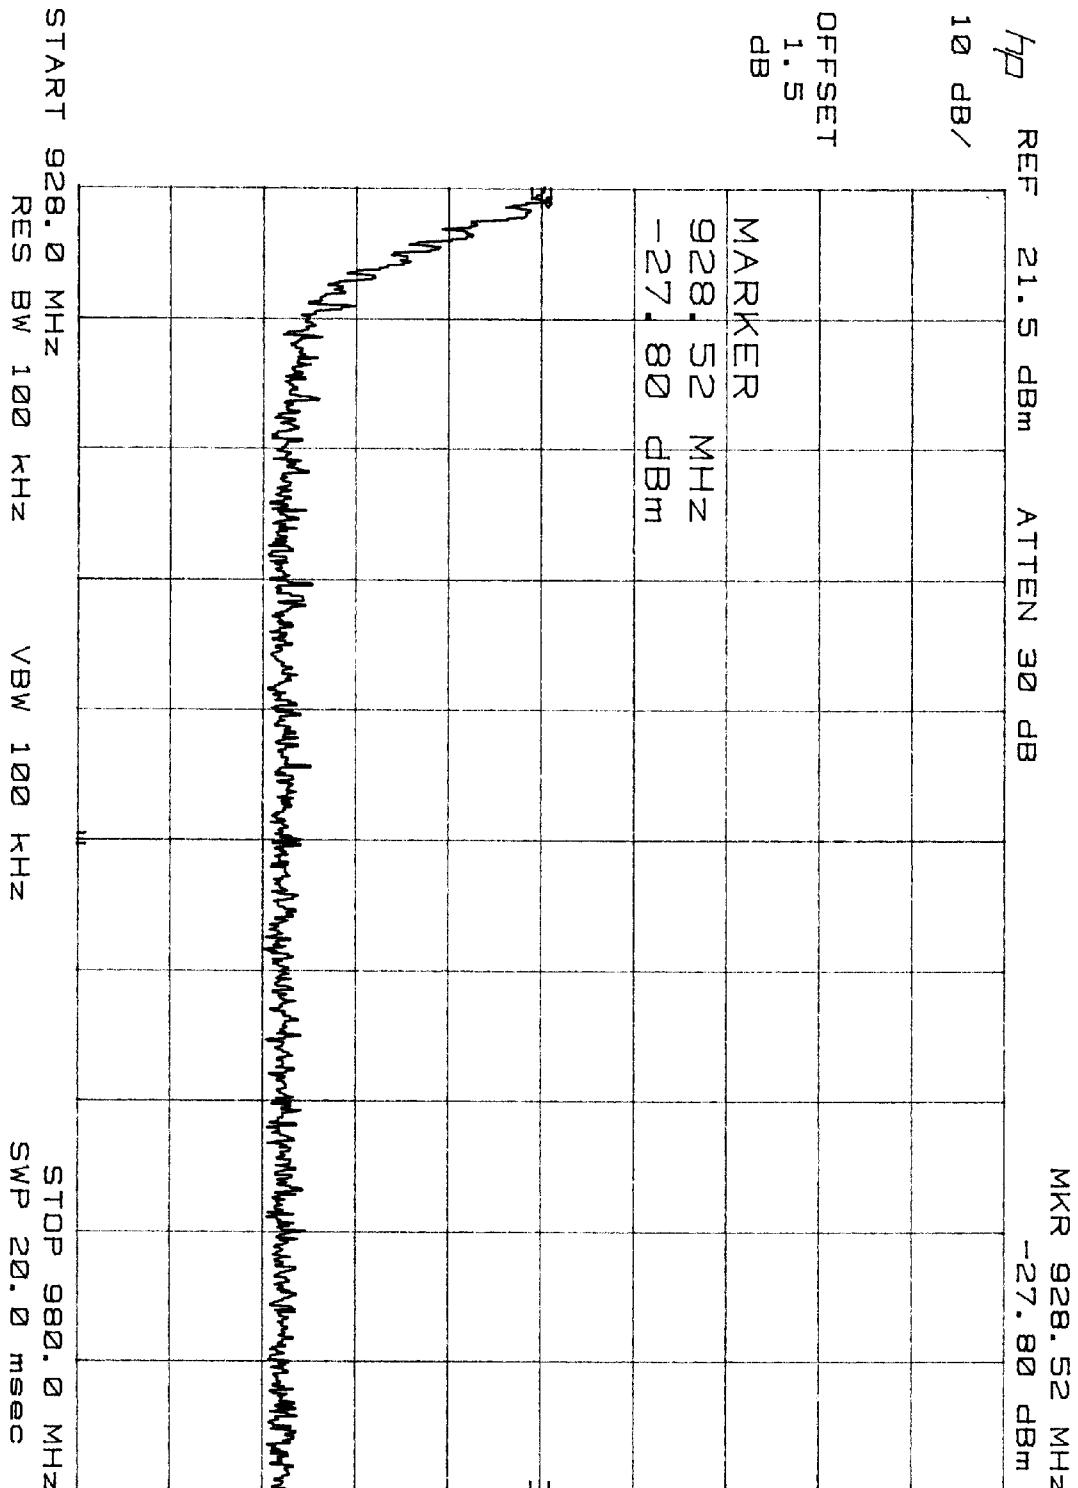

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98


PLOT B4c.4

MKR 1. 852 GHz

-49.40 dBm

REF 21.5 dBm ATTEN 30 dB
10 dB/

OFFSET
1.5
dB

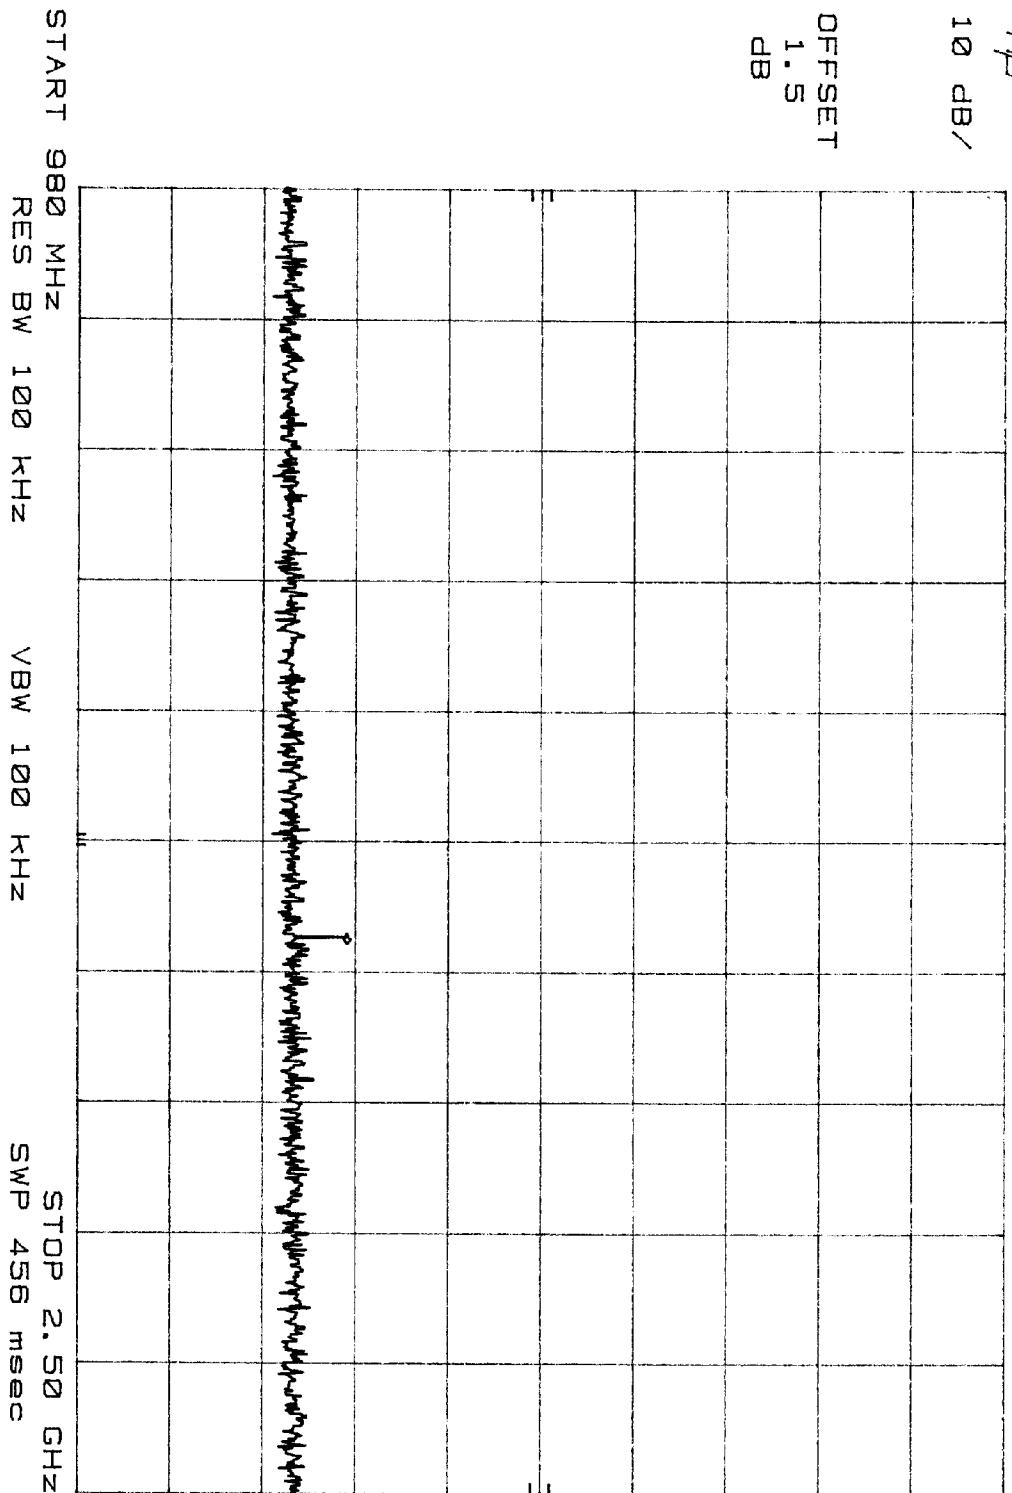


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

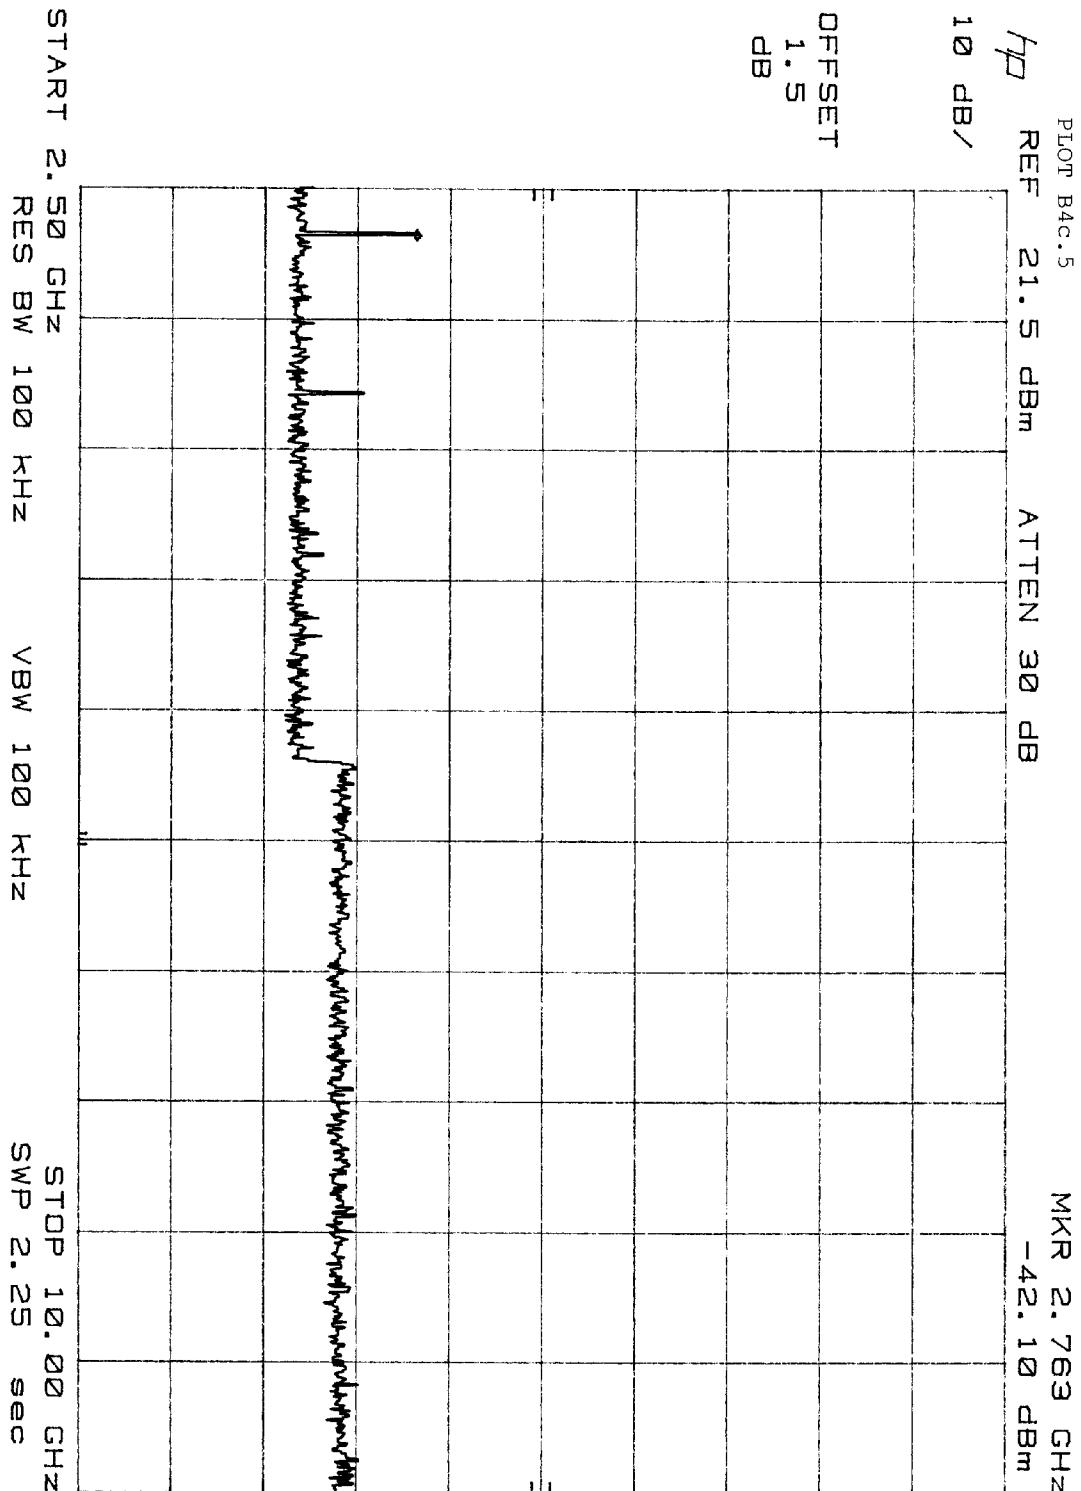


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

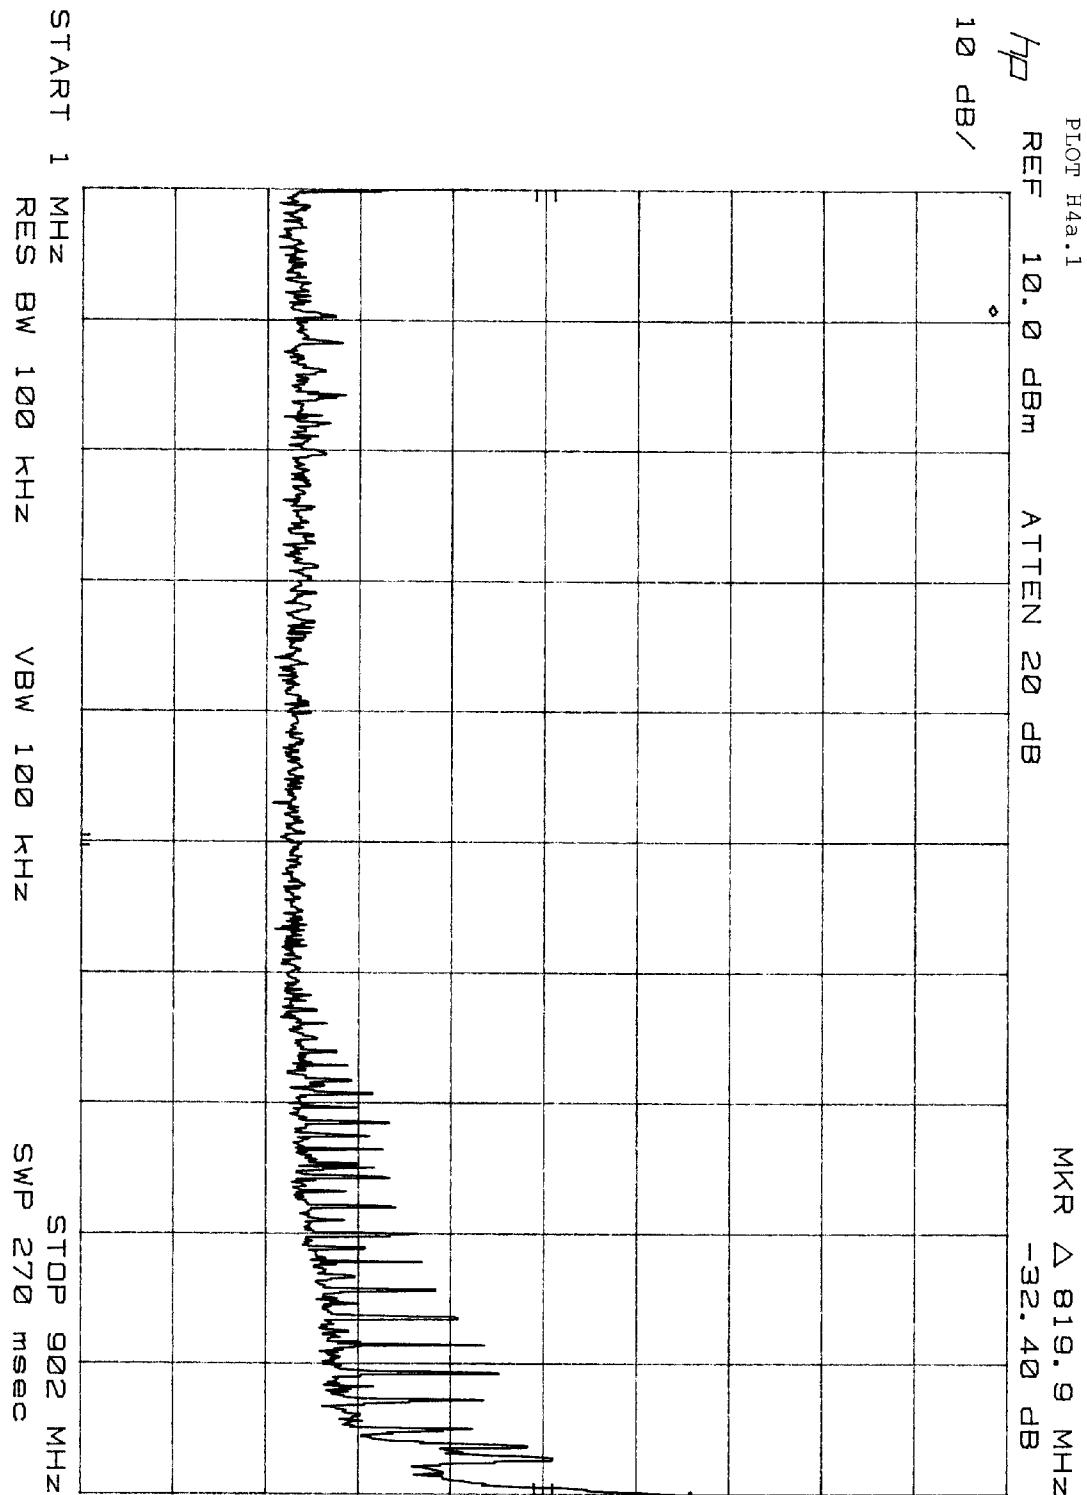


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

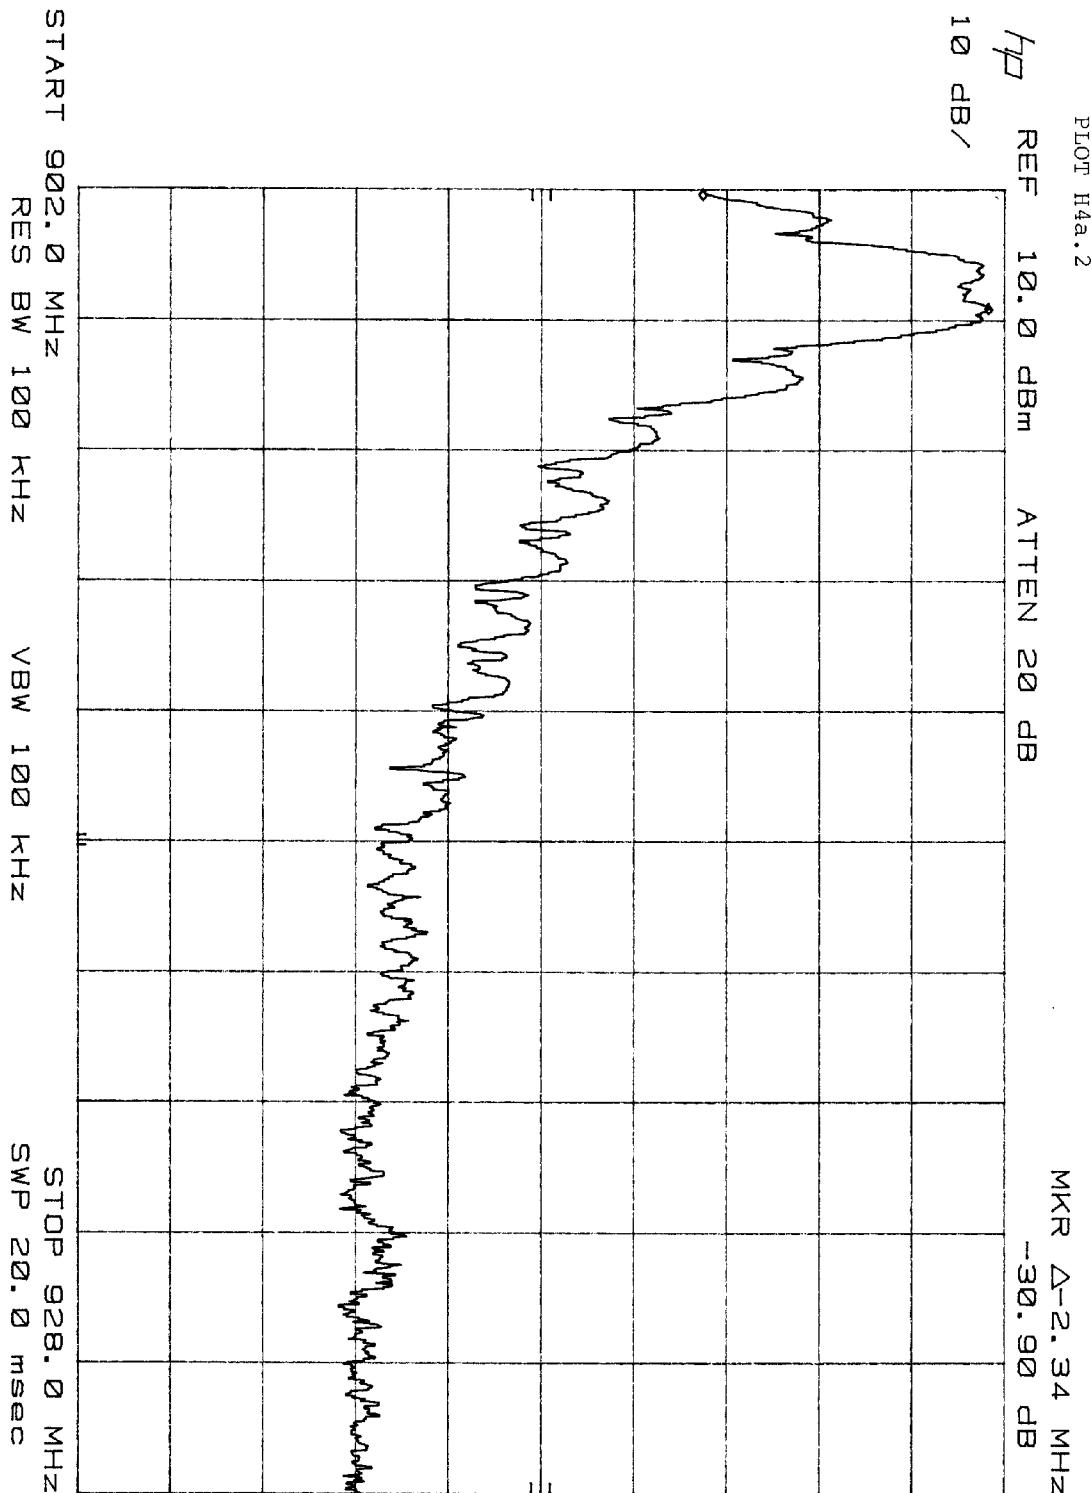

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000


1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

PLOT H4a.3

MKR 1. 808 GHz
-34.10 dBm

HP
REF 10.0 dBm ATTEN 20 dB
10 dB/

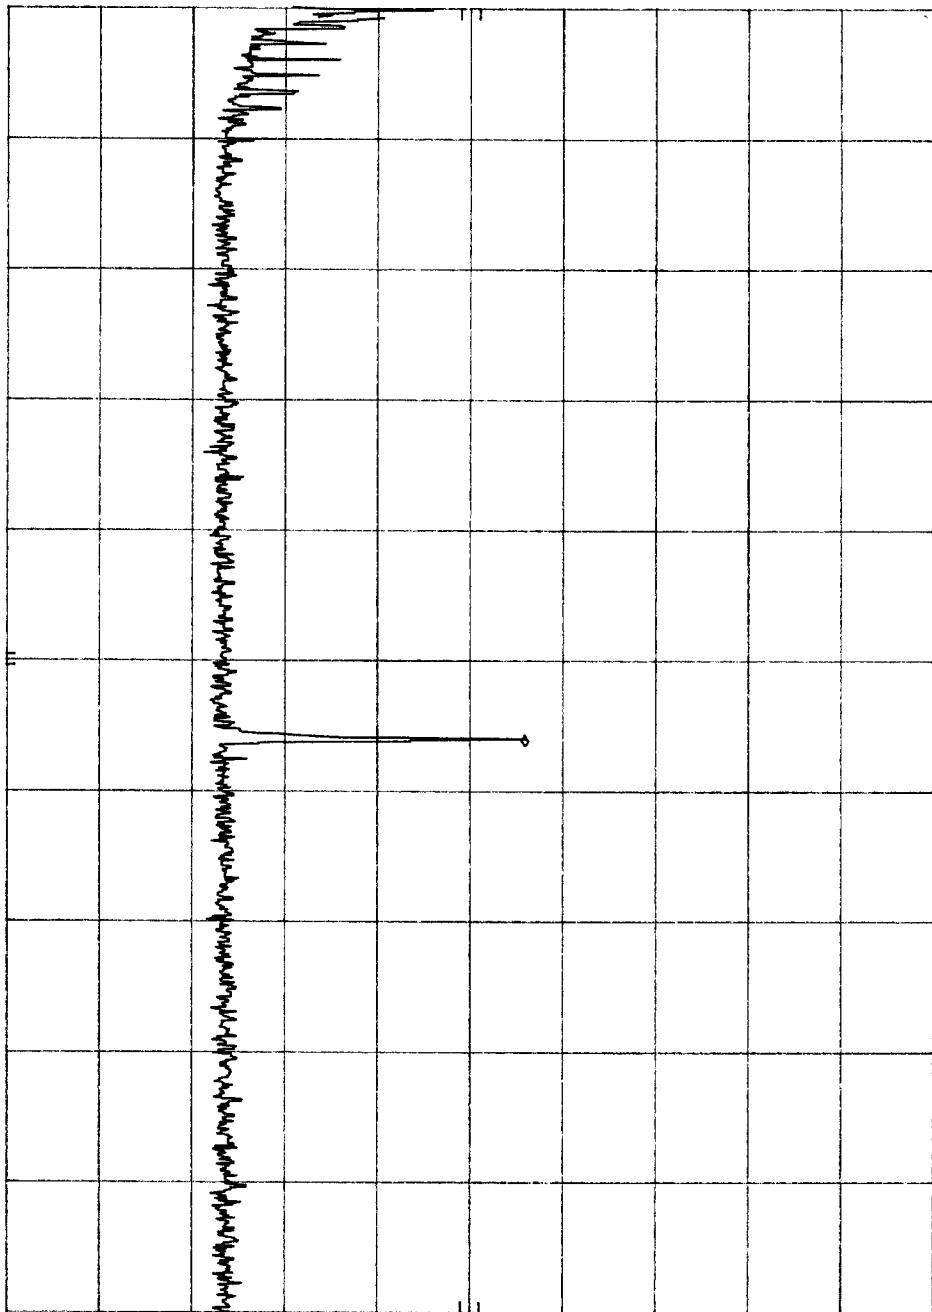


START 928 MHz
RES BW 100 kHz
VBW 100 kHz
STOP 2.50 GHz
SWP 472 msec

Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

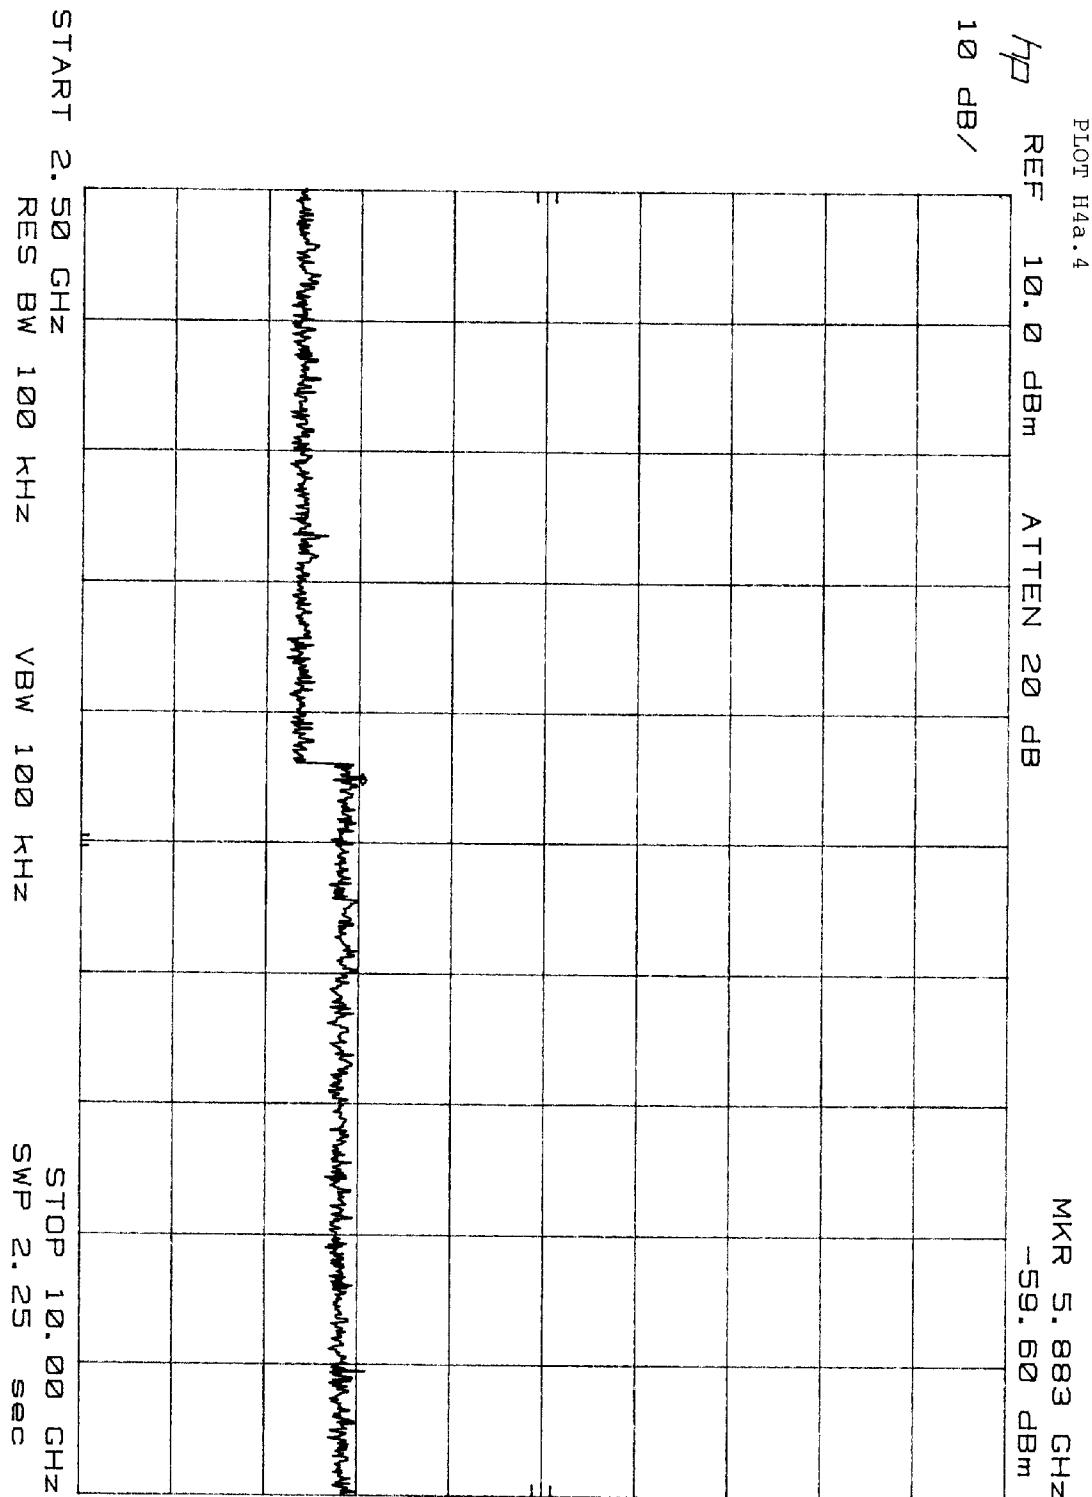



Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

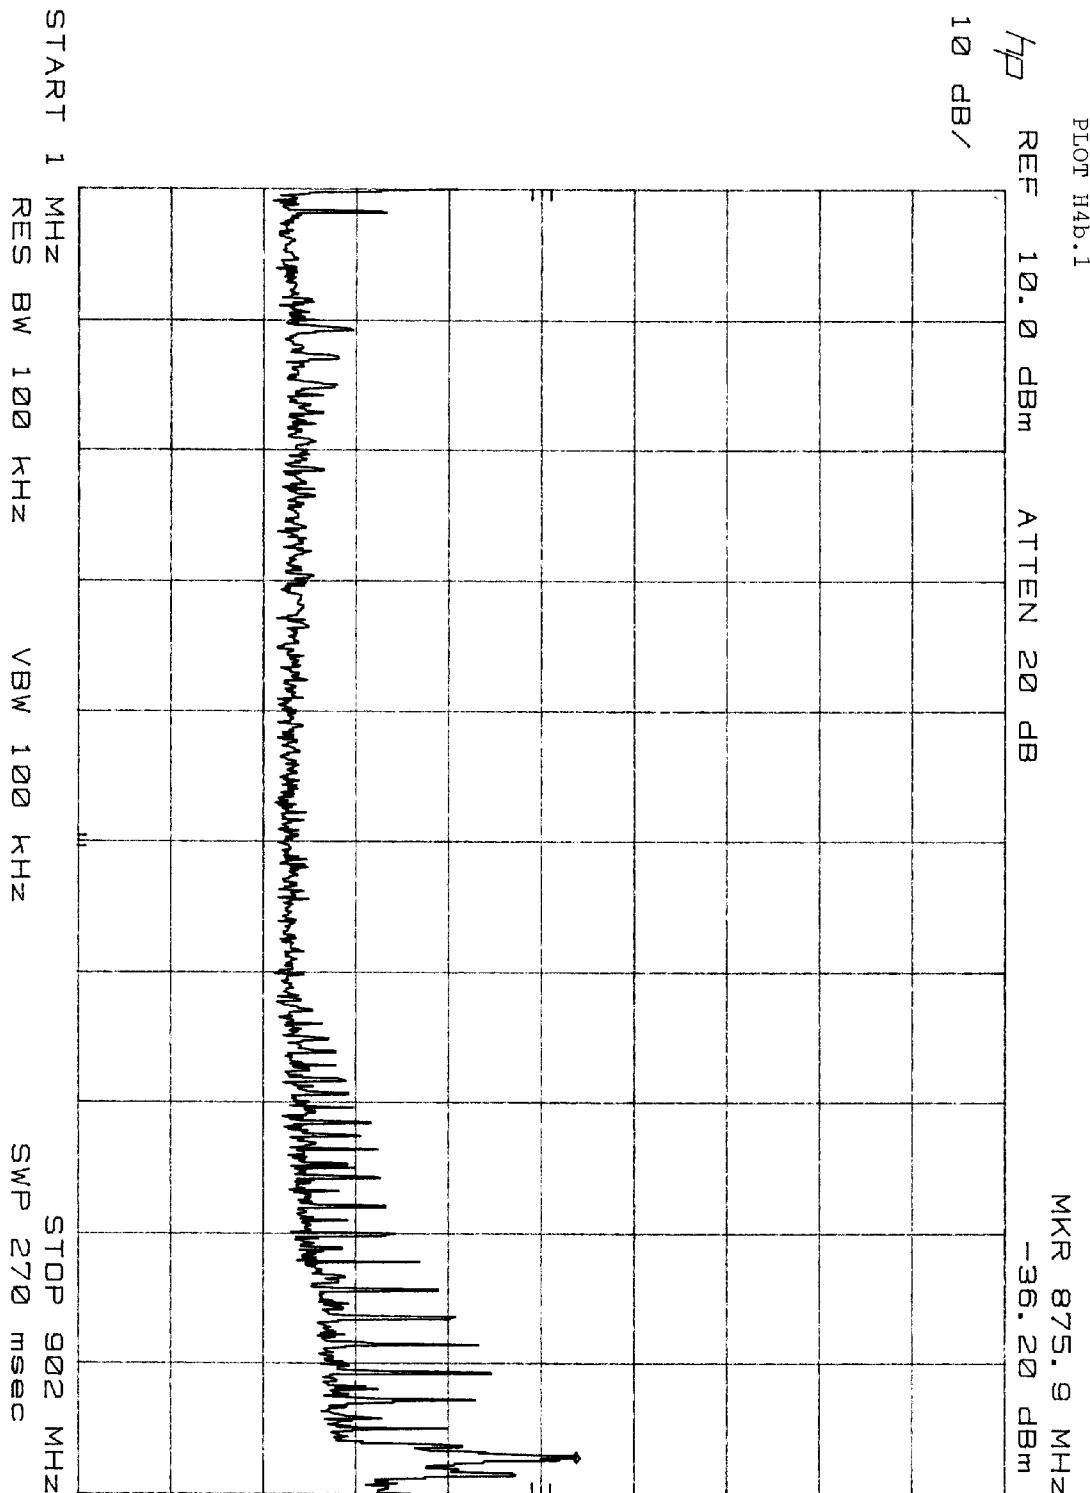

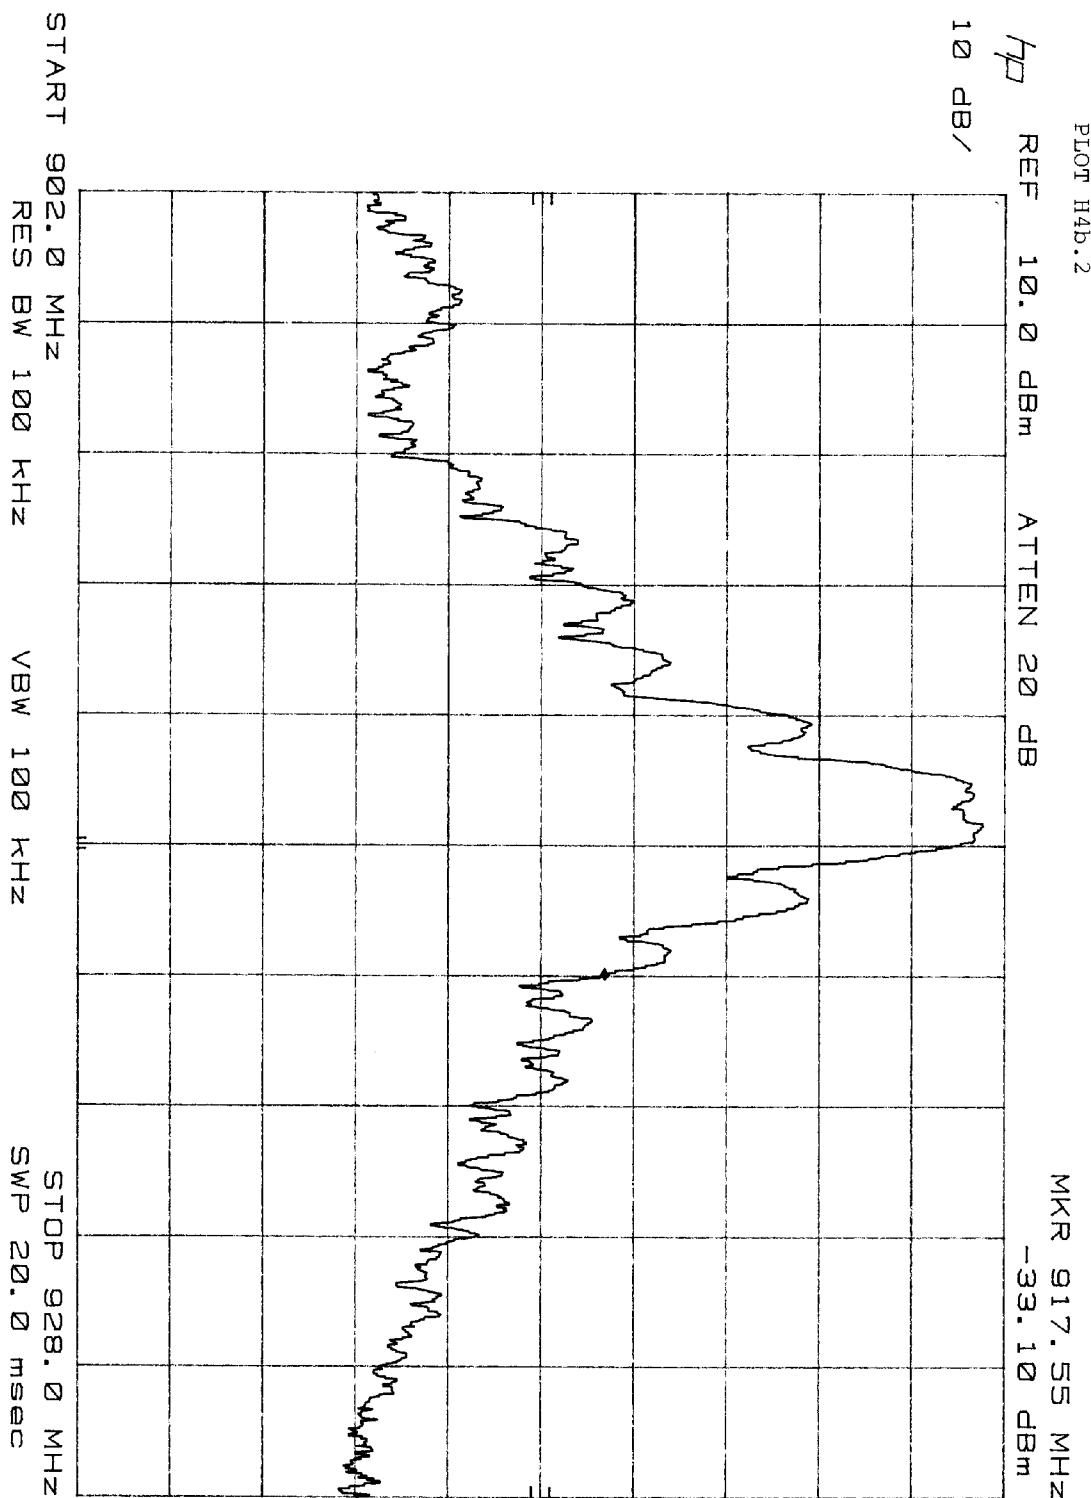


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

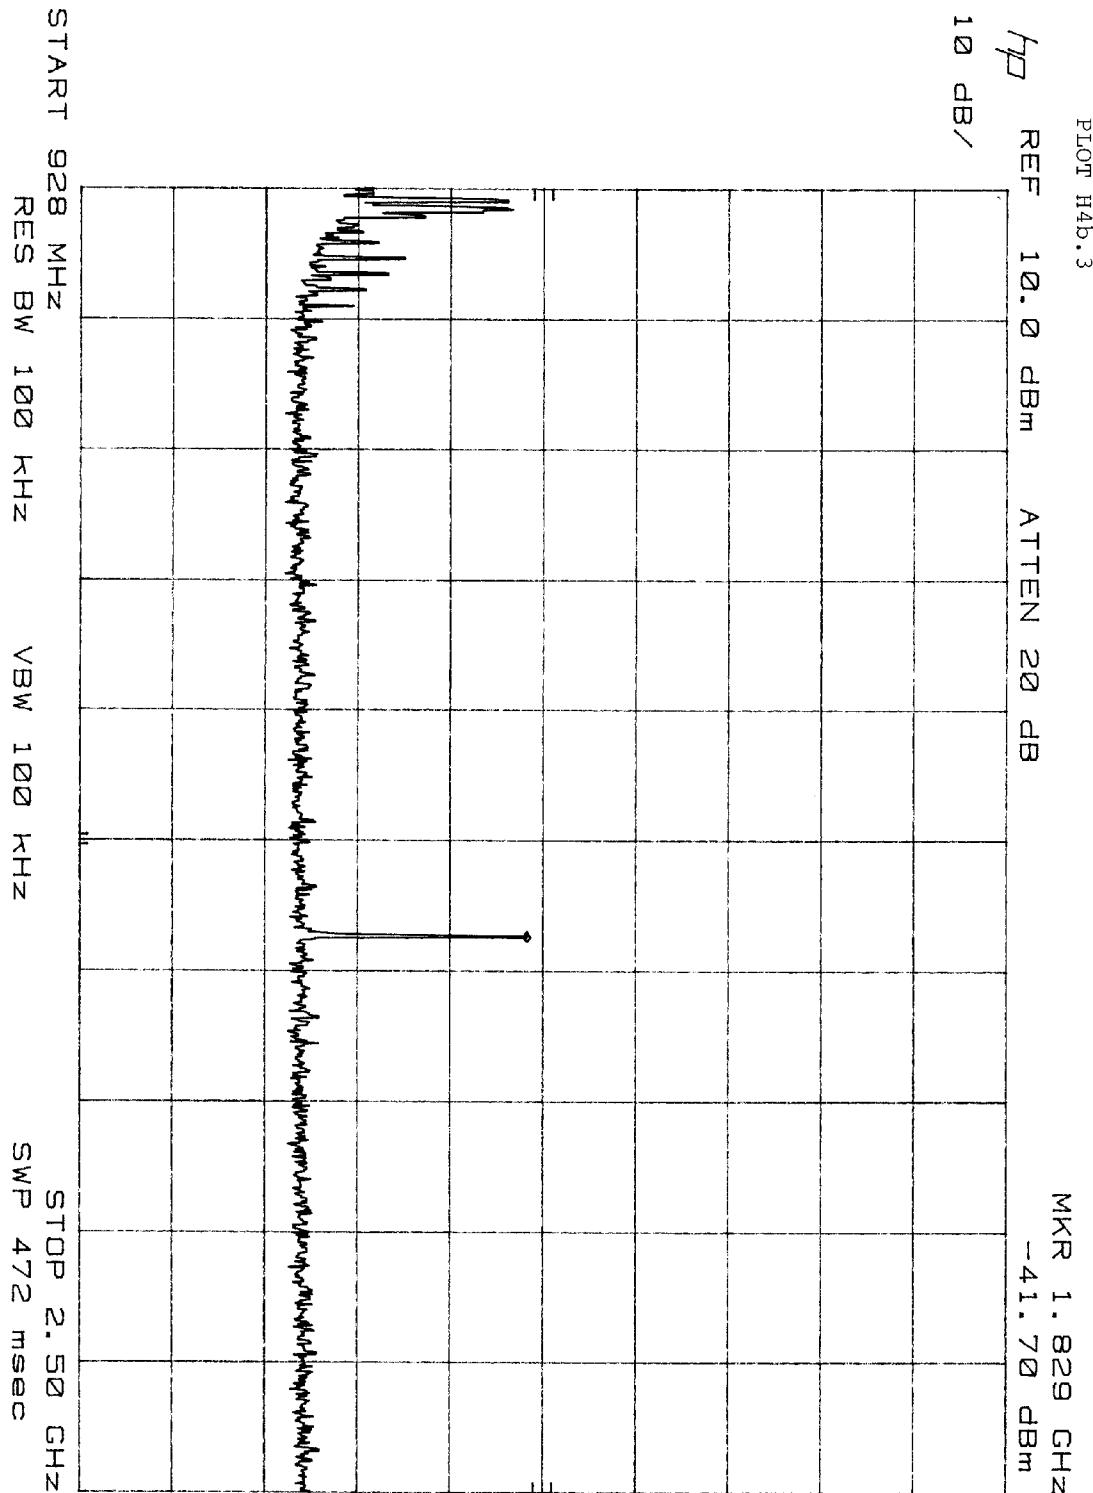


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

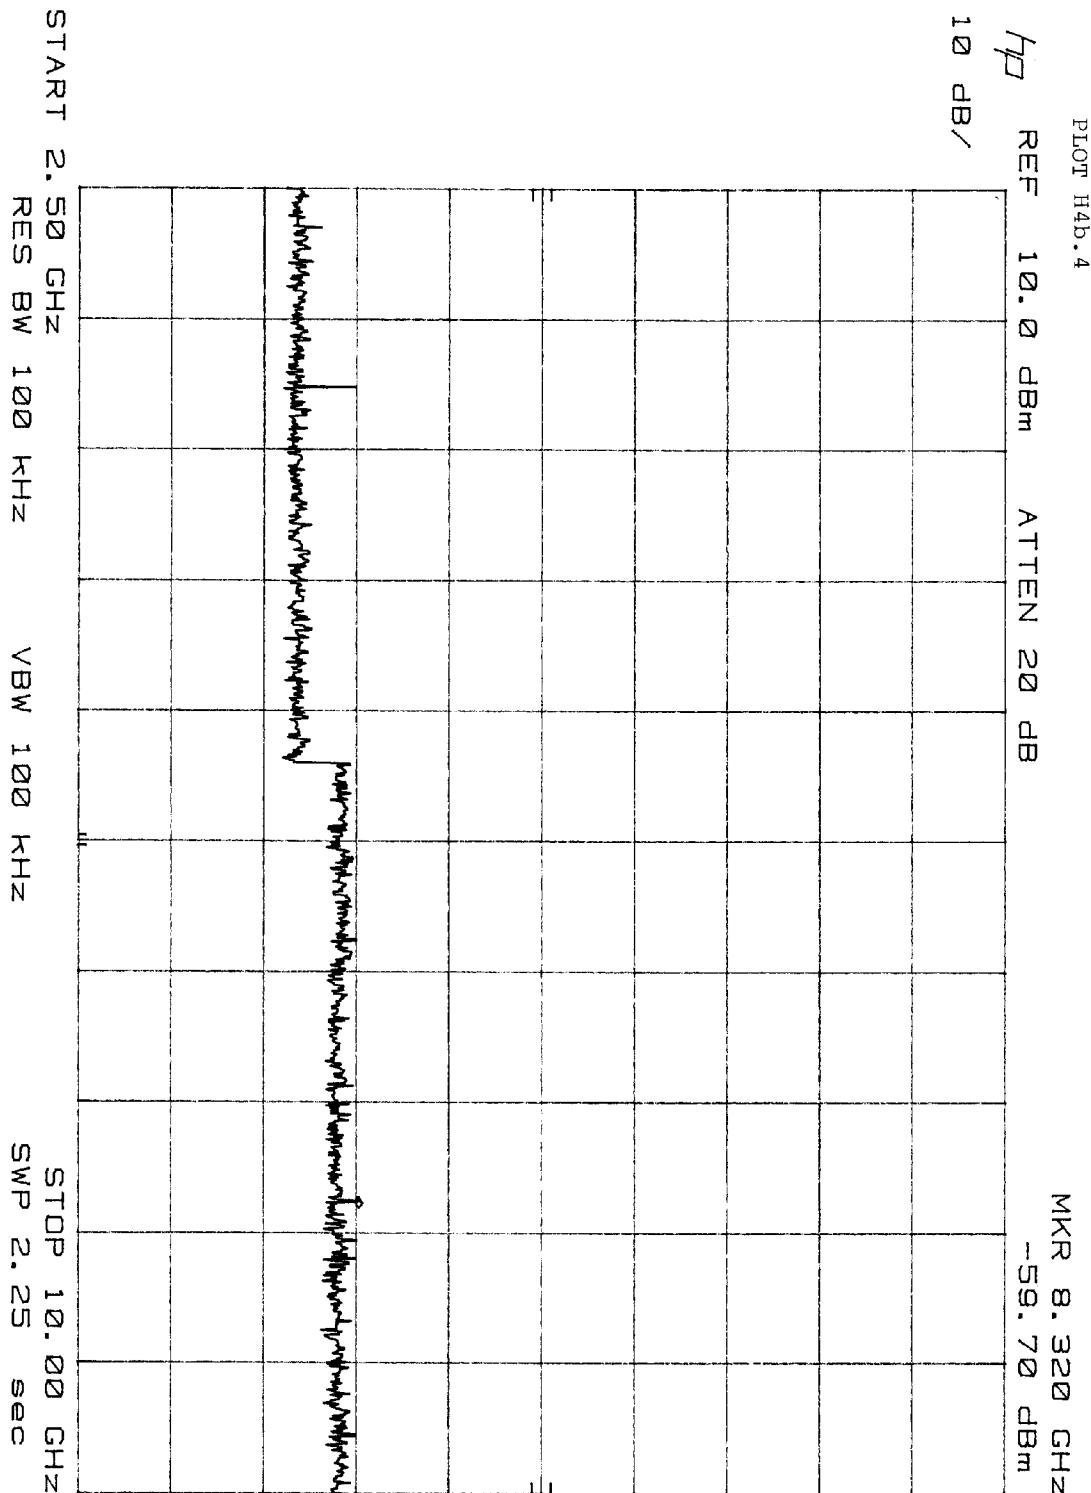


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

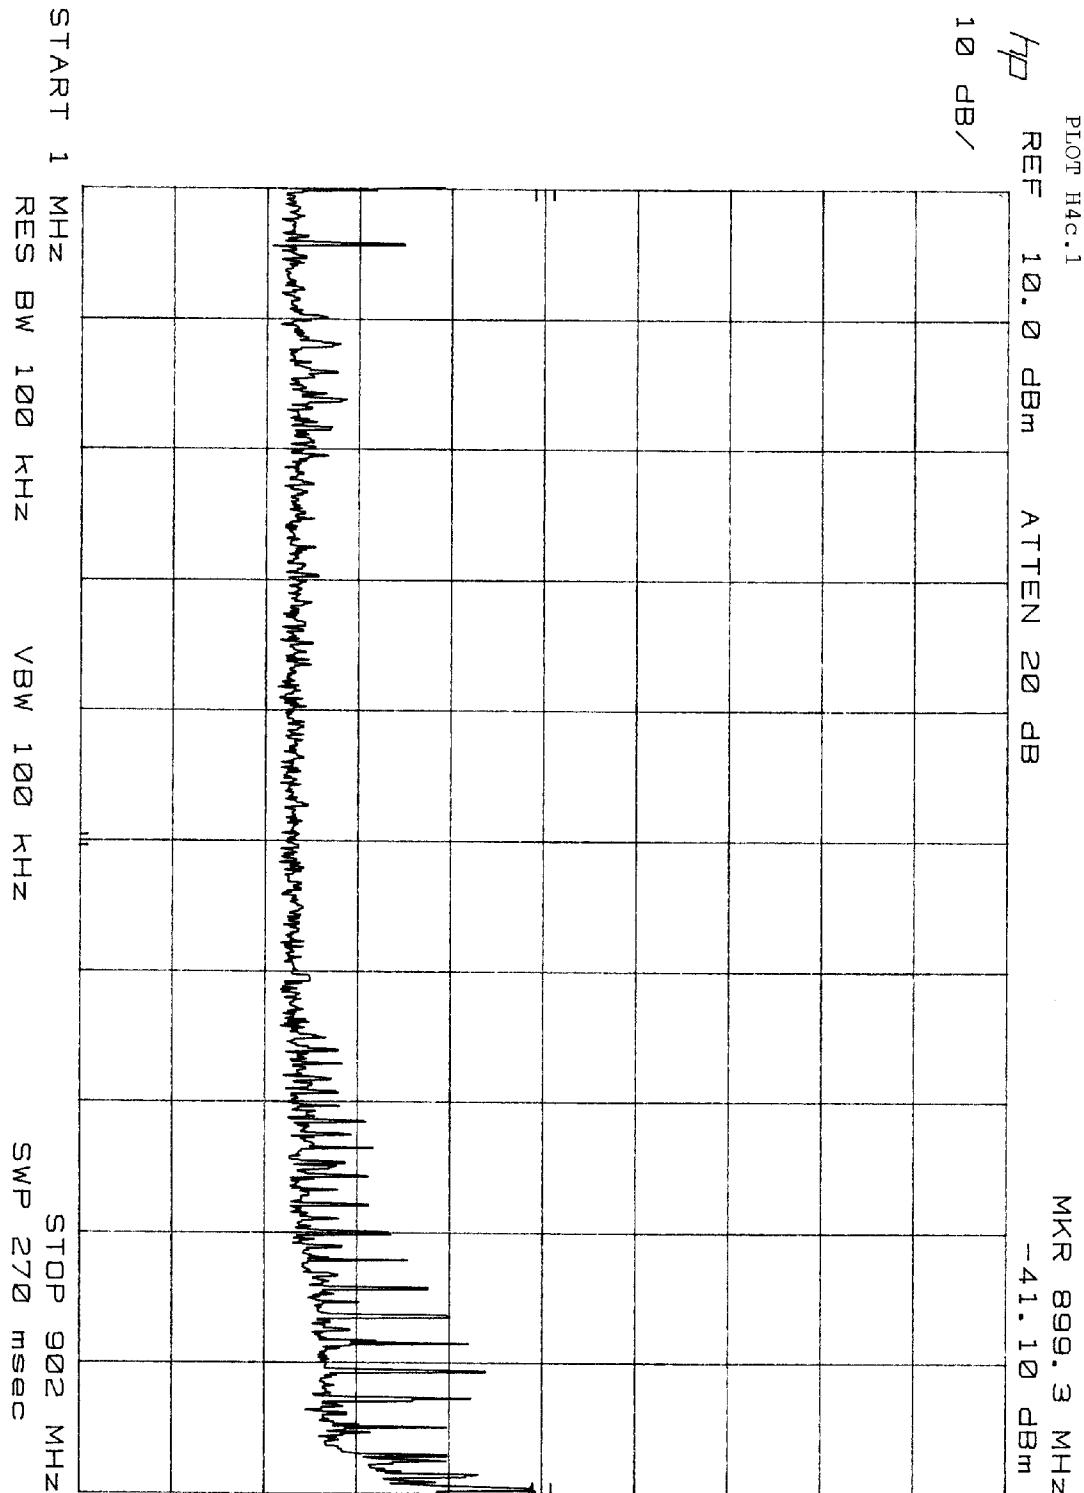


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

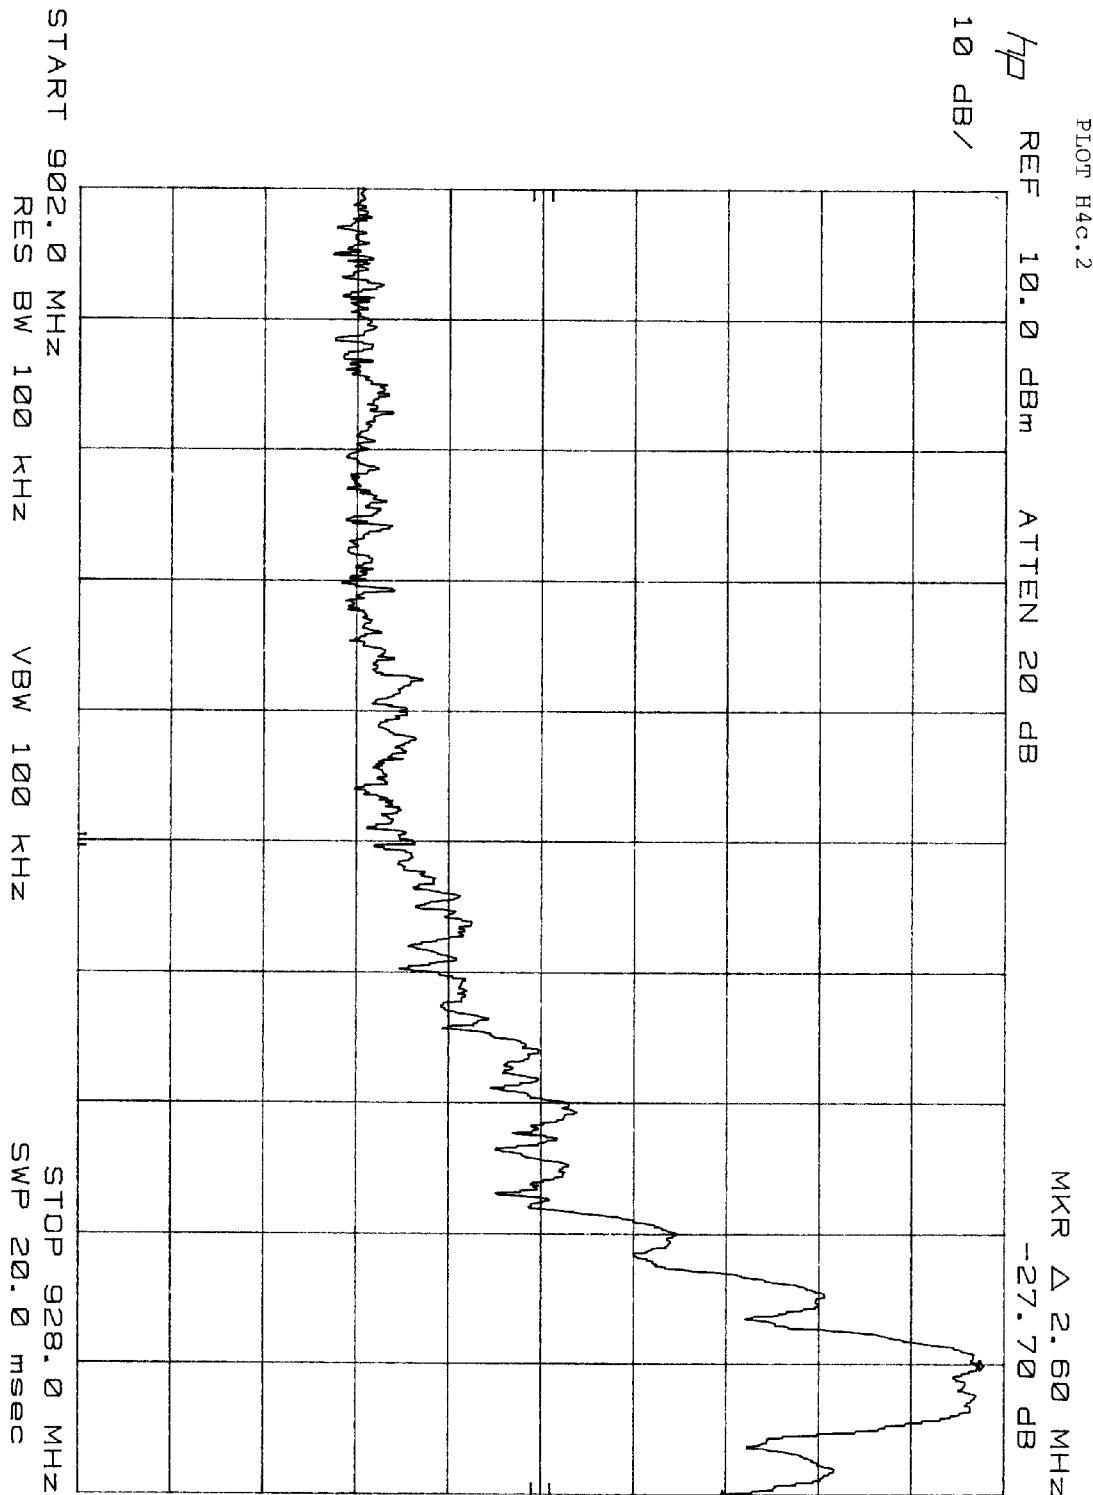


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

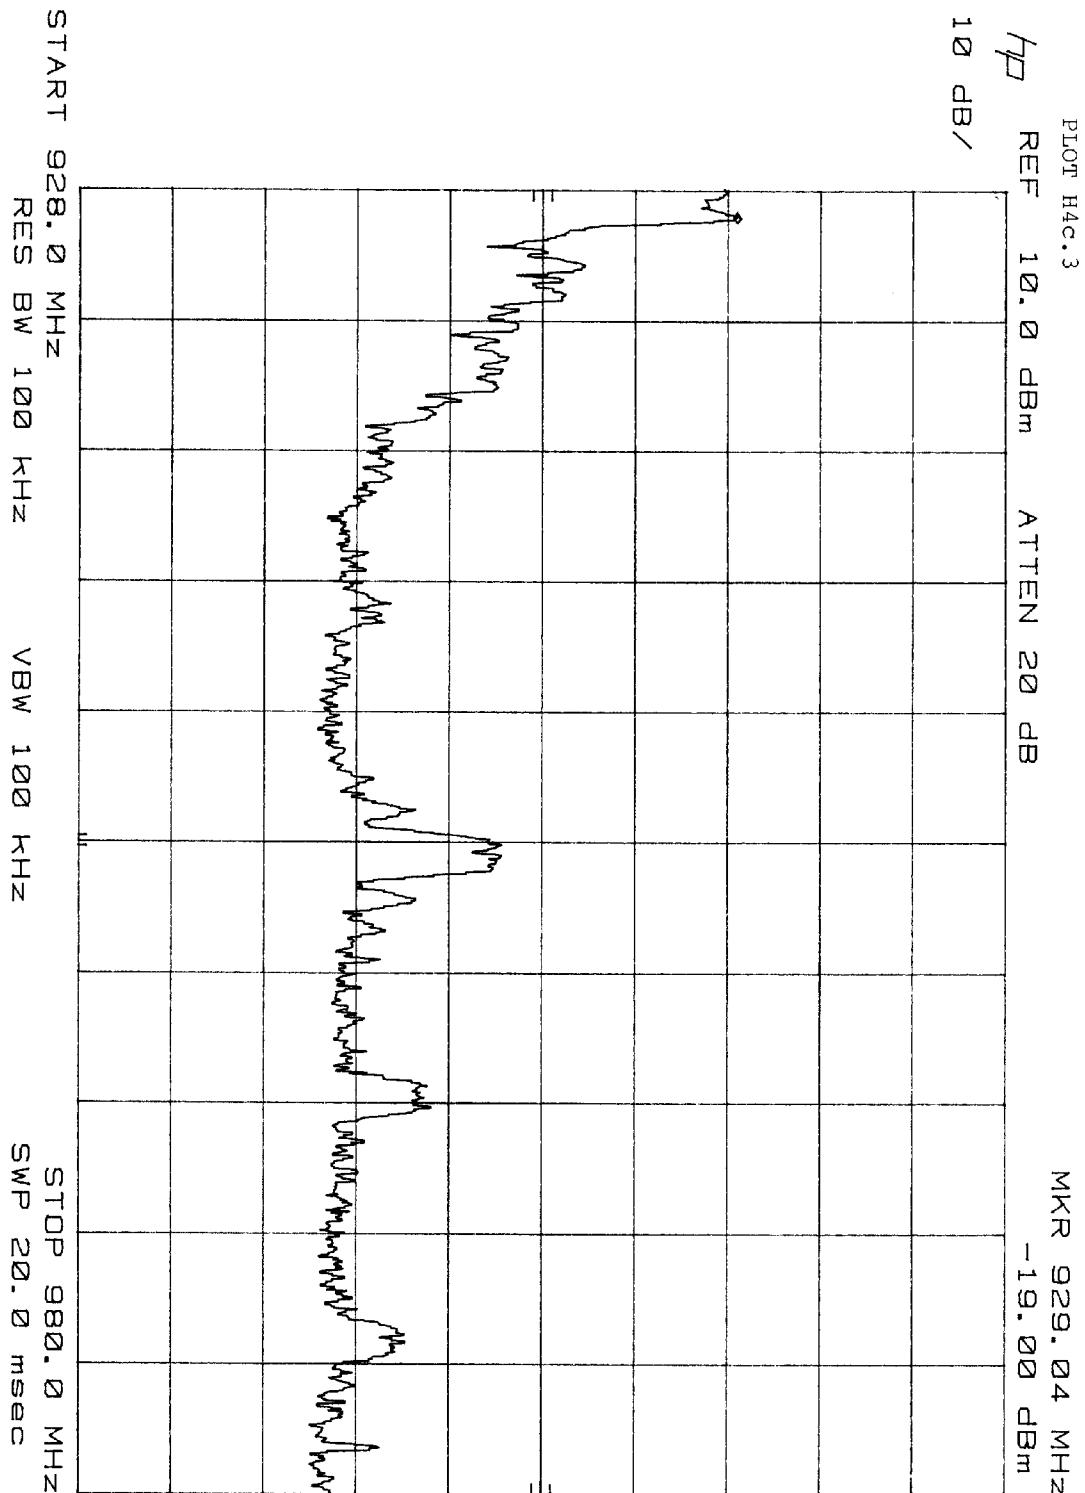


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

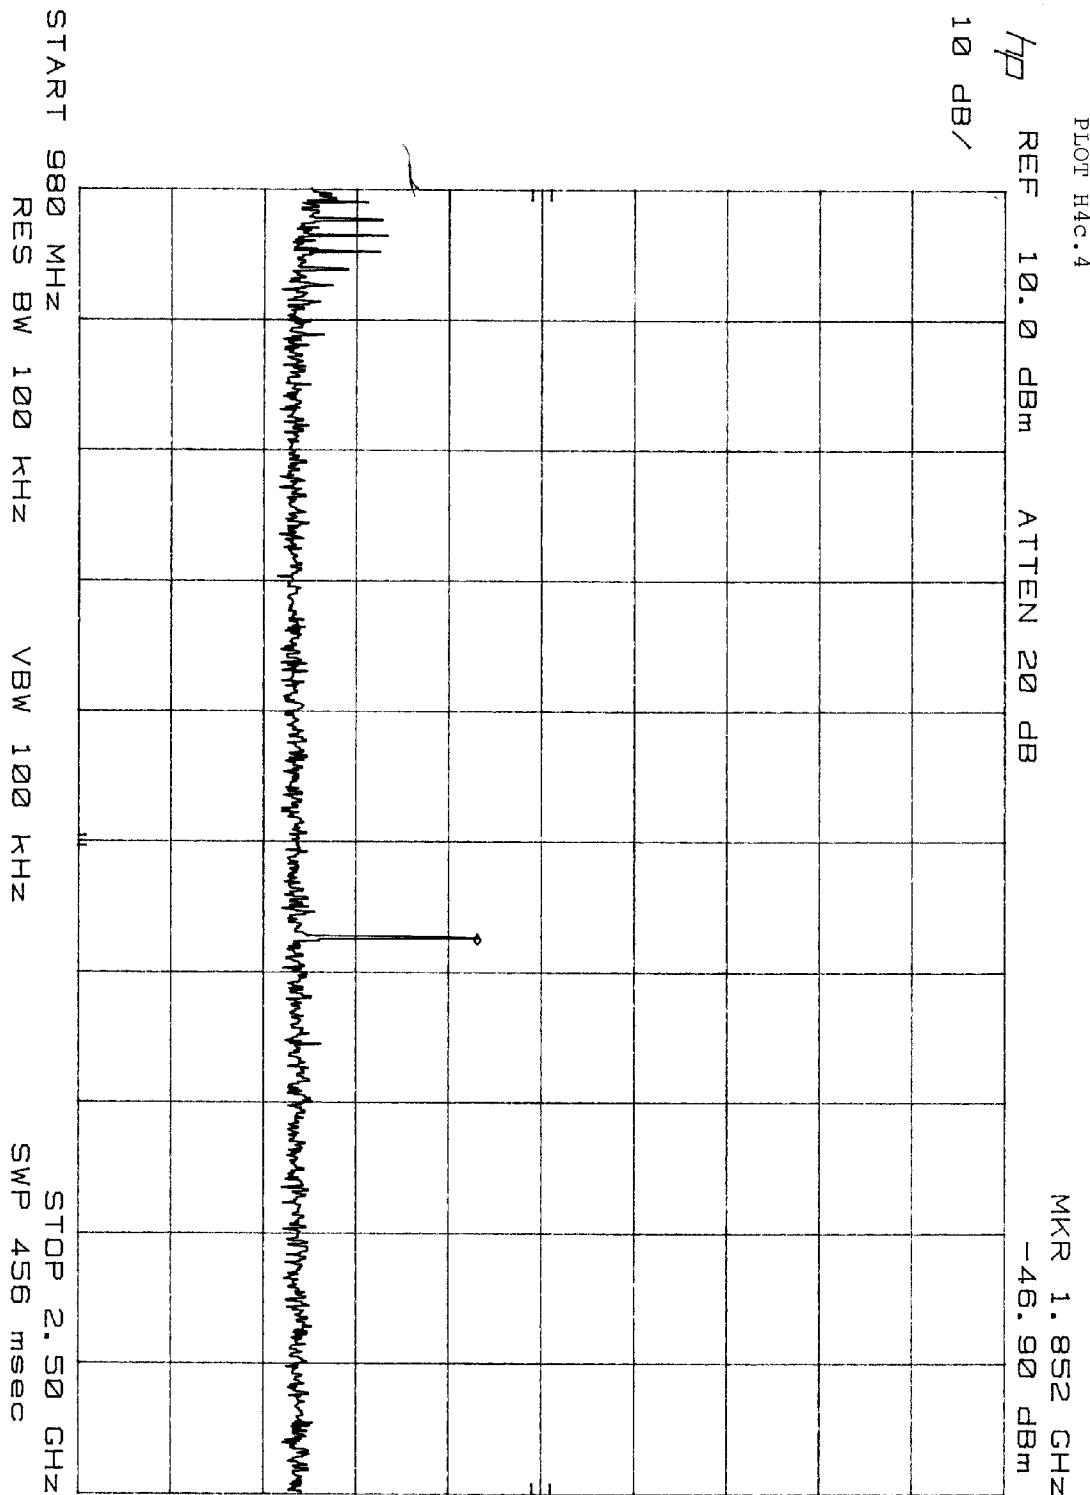


Intertek Testing Services

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone
FCC ID: DK4CT9000

1365 Adams Court, Menlo Park, CA 94025

Date of Test: 9/29/98 - 10/05/98

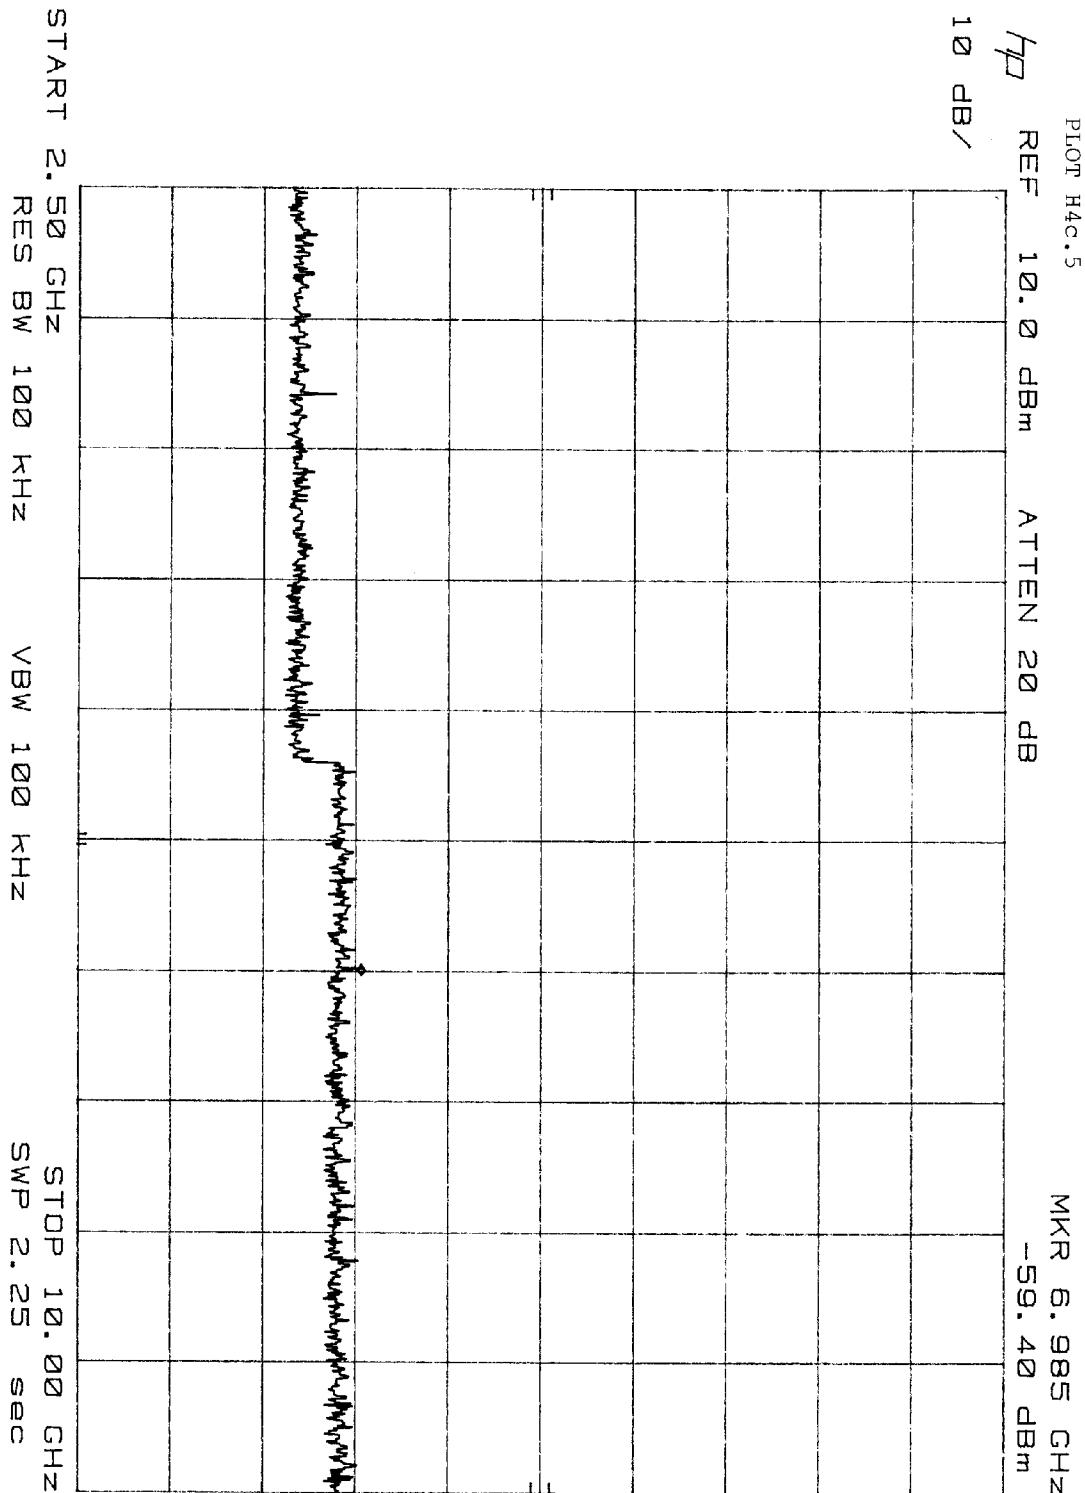

4.7 AC Line Conducted Emission, FCC Rule 15.207:

[] Not required; battery operation only

[x] Test data attached


Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone

Date of Test: 9/29/98 - 10/05/98

FCC ID: DK4CT9000

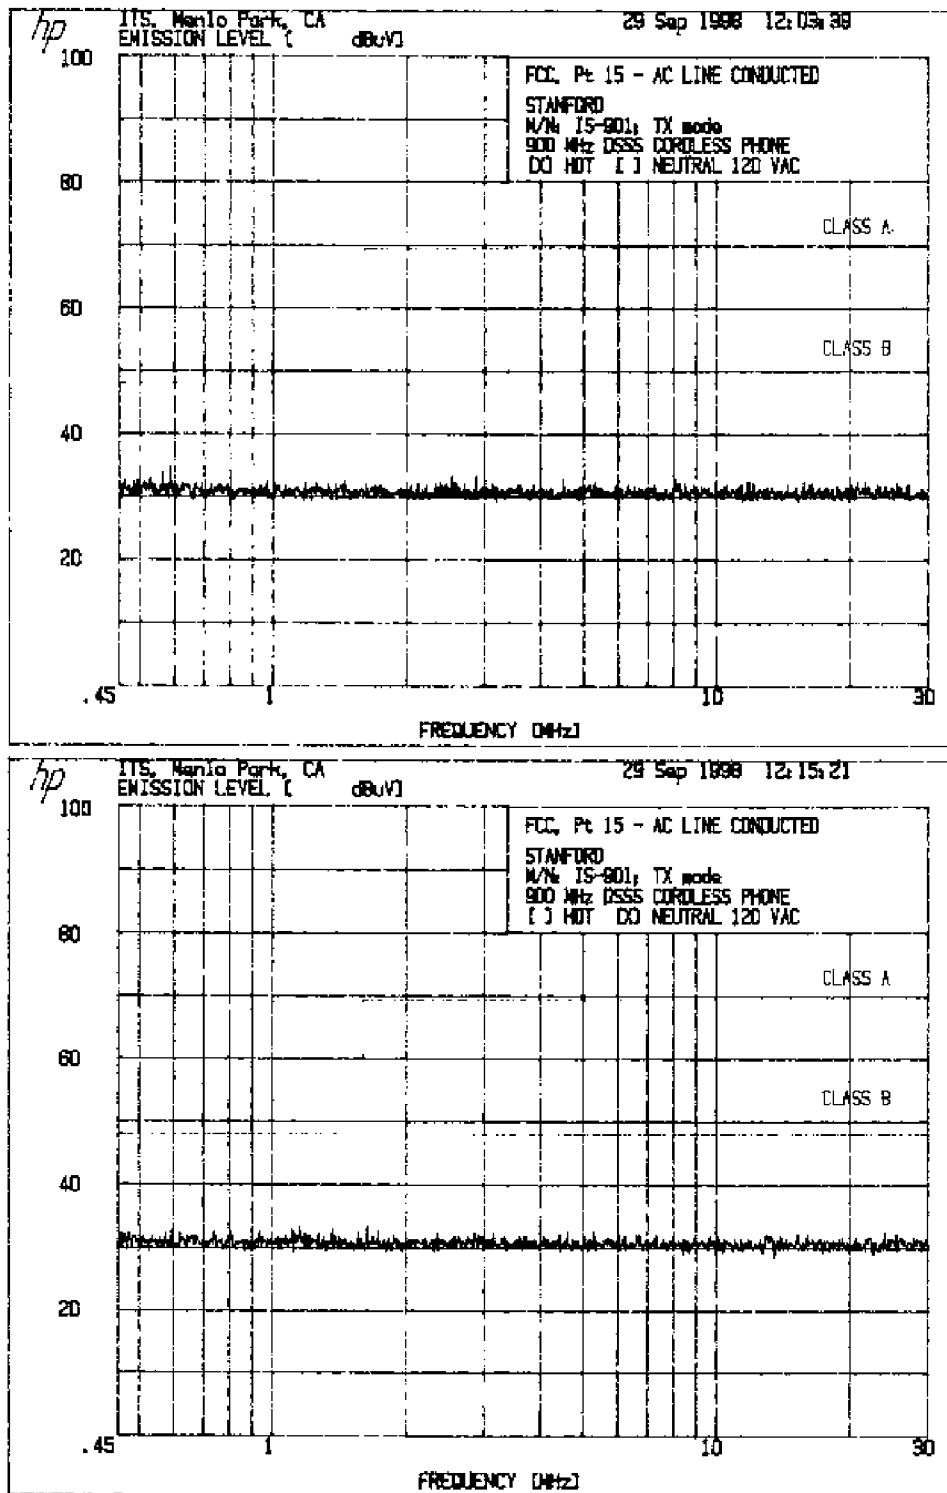

Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

GVC Corporation, 900 MHz DSSS Digital Cordless Telephone

Date of Test: 9/29/98 - 10/05/98

FCC ID: DK4CT9000

ITS, Menlo Park, CA 29 Sep 1998 12:03:39

3. FCC CFR 47, Pt 15

3.1 FCC, Pt 15 - AC LINE CONDUCTED

STANFORD

M/N: IS-901; TX mode

900 MHz DSSS CORDLESS PHONE

[X] HOT [] NEUTRAL 120 VAC

PEAKS FOUND ABOVE 33 dBuV

PEAK#	FREQ (MHz)	AMPL (dBuV)
1	.5692	34.1
2	.5936	35.0
3	2.545	33.6
4	2.687	33.8
5	4.541	33.1
6	8.137	33.3

ITS, Menlo Park, CA 29 Sep 1998 12:15:21

3. FCC CFR 47, Pt 15

3.1 FCC, Pt 15 - AC LINE CONDUCTED

STANFORD

M/N: IS-901; TX mode

900 MHz DSSS CORDLESS PHONE

[] HOT [X] NEUTRAL 120 VAC

PEAKS FOUND ABOVE 33 dBuV

PEAK#	FREQ (MHz)	AMPL (dBuV)
1	.5986	33.0
2	1.123	33.0
3	1.166	33.4
4	1.379	33.1
5	1.652	33.6

4.10 Radiated Emissions from Digital Section of Transceiver (Transmitter), FCC Ref: 15.109

- Not required - No digital part
- Test results are attached
- Included in the separate DOC report.

4.11 Radiated Emissions from Receiver Section of Transceiver (L.O. Radiation), FCC Ref: 15.109, 15.111

- Not required - EUT operation above 960 MHz only
- Not required - EUT is transmitter only
- Not performed; exempt until June 1999
- Test results are attached

ITS Intertek Testing Services

1365 Adams Court, Menlo Park CA 94025

Radiated Emissions Test Data

Company: Stanford
EUT: 900 MHz cordless phone (base unit)
Project #: J98026020
Test Mode: TX/low channel

Model #: IS-901 Digital Spread Spectrum
S/N or FCC: Not labelled
Engineer: Ahmad
Date of Test: 10/5/98
Initial: 000000

Number:	Antenna	Pre-Amp	Cable A	Cable B	OCF	Standard		FCC Part 15.247	
						1 mils	12	Test Distance	3 meters
	B	B	12	0	0				
Model:	EMCO 311_CDI_P1000_Green_M+L			None	None				

Frequency	Reading	Det.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. F.	Net	Limit @3m	Margin
MHz	dB(uV)	P/A/O	H/V	dB(1/m)	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
2712.8	45.0	A	V	27.9	28.4	2.3	0.0	46.8	54.0	-7.2
2712.8	50.0	P	V	27.9	28.4	2.3	0.0	51.8	74.0	-22.2
3616.8	51.0	H	H	31.5	27.8	2.7	0.0	57.4	74.0	16.7
3616.8	43.0	A	H	31.5	27.8	2.7	0.0	49.4	54.0	4.6
4521.3	51.0	P	V	32.1	27.9	3.2	0.0	58.4	74.0	15.6
4521.3	42.0	A	V	32.1	27.9	3.2	0.0	49.4	54.0	4.6
5425.3	45.0	P	H	32.9	28.3	3.5	0.0	53.1	74.0	-20.9
5425.3	41.2	A	H	32.9	28.3	3.5	0.0	48.3	54.0	4.7

Notes: a) P: Peak; A: Average; Q: Quasi-Peak; H: Horizontal; V: Vertical; OCF: Other Correction Factor; DF: Distance Factor
b) Insert. Loss = Cable A + Cable B + OCF
c) Negative signs (-) in Margin column signify levels below the limits
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

ITS Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

Radiated Emissions Test Data

Company: Stanford
EUT: 900 MHz cordless phone (base unit)
Project #: J98026020
Test Mode: TX MID channel

Model #: IS-901 Digital Spread Spectrum
S/N or FCC: Not labelled
Engineer: Ahmad
Date of Test: 10/5/98

Number:	Antenna	Pre-Amp	Cable A	Cable B	OCF	Standard	FCC Part 15.247
	8	8	12	0	0	Limits	12
Model:	EMCO 311	COL_P1000	Green	M+L	None	Test Distance	3 meters

Frequency MHz	Reading dB(uV)	Det P/A/Q	Ant. Pol. H/V	Ant. Factor dB(1m)	Pre-Amp dB	Insert. Loss dB	D.F. dB	Net dB(uV/m)	Limit @3m dB(uV/m)	Margin dB
2743.0	45.0	A	V	27.9	28.4	2.3	0.0	46.8	54.0	7.2
2743.0	50.0	P	V	27.9	28.4	2.3	0.0	51.8	74.0	22.2
3658.0	44.0	P	V	31.3	27.8	2.7	0.0	50.2	74.0	23.8
3658.0	38.0	A	V	31.3	27.8	2.7	0.0	44.3	54.0	9.8
4572.0	42.8	P	V	32.1	27.9	3.2	0.0	50.2	74.0	23.8
4572.0	38.0	A	V	32.1	27.9	3.2	0.0	45.4	54.0	8.6
7315.0	40.0	P	V	36.3	28.0	4.3	0.0	52.1	74.0	21.4
7315.0	39.0	A	V	36.3	28.0	4.3	0.0	47.1	54.0	6.4
8228.0	44.0	P	V	36.9	27.2	4.8	0.0	58.5	74.0	15.5
8228.0	36.0	A	V	36.9	27.2	4.8	0.0	50.5	54.0	3.5

Notes: a) P: Peak - A: Average - Q: Quasi-Peak - H: Horizontal - V: Vertical - OCF: Other Correction Factor, DF: Distance Factor
b) Insert. Loss = Cable A + Cable B + OCF
c) Negative signs (-) in Margin column signify levels below the limits
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

ITS Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

Radiated Emissions Test Data

Company: Stanford
 EUT: 900 MHz cordless phone (base unit)
 Project #: J98026020
 Test Mode: TX/ high channel

Model #: IS-901 Digital Spread Spectrum
 S/N or FCC: Not labelled
 Engineer: Ahmad
 Date of Test: 10/5/98

Initial: _____

Number:	Antenna	Pre-Amp	Cable A	Cable B	OCF	Standard	FCC Part 15.247
	8	8	12	0	0	12	

Frequency (MHz)	Reading (dB(uV))	Det. (P/A/Q)	Ant. Pol. (H/V)	Ant. Factor (dB(1m))	Pre-Amp (dB)	Insert. Loss (dB)	D.F. (dB)	Not. (dB(uV/m))	Limit @3m (dB(uV/m))	Margin (dB)
2776.7	44.0	P	H	28.1	28.4	2.3	0.0	46.0	74.0	-26.0
2776.7	38.0	A	H	28.1	28.4	2.3	0.0	40.0	94.0	-14.0
3703.0	50.0	P	V	31.3	27.8	2.7	0.0	56.2	74.0	-17.8
3703.0	44.0	A	V	31.3	27.8	2.7	0.0	50.2	94.0	-3.8
4629.0	47.0	P	V	32.1	28.0	3.2	0.0	54.3	74.0	19.7
4629.0	43.0	A	V	32.1	28.0	3.2	0.0	50.3	94.0	3.7
7406.0	45.0	P	V	35.3	28.0	4.3	0.0	47.0	74.0	18.4
7406.0	35.0	A	V	35.3	26.0	4.4	0.0	47.6	94.0	6.4
8332.1	42.0	P	V	36.9	27.2	4.6	0.0	54.1	74.0	17.5
8332.1	36.0	A	V	36.9	27.2	4.8	0.0	49.1	94.0	4.5

Notes: a) P: Peak, A: Average, Q: Quasi-Peak, H: Horizontal, V: Vertical, OCF: Other Correction Factor, D.F: Distance Factor
 b) Insert. Loss = Cable A + Cable B + OCF
 c) Negative signs (-) in Margin column signify levels below the limits
 d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

ITS Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

Radiated Emissions Test Data

Company: Stanford
EUT: 900 MHz cordless phone (handset)
Project #: J98026020
Test Mode: TX/low channel

Model #: IS-801 Digital Spread Spectrum
S/N or FCC: Not labelled
Engineer: Ahmed
Date of Test: 10/5/98

Number: Model:	Antenna B	Pre-Amp B	Cable A 12	Cable B 0	OCF 0	Standard Limits	FCC Part 15.247 12			
	EMCO 311	CDI_P10XX	Green_M+L	None	None					
2712.0	55.0	P	H	28.1	28.4	2.3	0.0	57.0	74.0	-17.0
2712.0	48.0	A	H	28.1	28.4	2.3	0.0	50.0	64.0	4.0
3616.8	51.0	P	H	31.5	27.8	2.7	0.0	57.4	74.0	10.7
3616.8	42.0	A	H	31.5	27.8	2.7	0.0	48.4	54.0	5.6
4520.8	45.0	P	H	32.2	27.9	3.2	0.0	52.5	74.0	21.5
4520.8	41.0	A	H	32.2	27.9	3.2	0.0	48.4	54.0	5.6
7233.0	40.0	P	H	35.8	28.0	4.5	0.0	52.1	74.0	21.9
7233.0	38.1	A	H	35.8	28.0	4.5	0.0	48.2	54.0	5.6

Notes: a) P: Peak, A: Average, Q: Quasi-Peak, H: Horizontal, V: Vertical, OCF: Other Correction Factor, DF: Distance Factor
b) Insert Loss = Cable A + Cable B + OCF
c) Negative signs (-) in Margin column signify levels below the limits
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits

ITS Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

Radiated Emissions Test Data

Company: Stanford
EUT: 900 MHz cordless phone (handset)
Project #: J98026020
Test Mode: TX/MID channel

Model #: IS-901 Digital Spread Spectrum
S/N or FCC: Not labeled
Engineer: Ahmad
Date of Test: 10/5/98 Initial:

Number:	Antenna	Pre Amp	Cable A	Cable B	OCF	Standard	FCC Part 15.247			
							Units	12	Test Distance	
	8	B	12	0	0				3 meters	
Module:	EMCO 311	CDL_P1000	Green_M+L	None	None					
Frequency	Reading	Det.	Ant. Pot.	Ant. Factor	Pre-Amp	Insert. Loss	D. F.	Net	U.Limit @3m	Margin
MHz	dB(uV)	P/A/Q	H/V	dB(m)	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
2743.6	52.0	P	H	28.1	28.4	2.3	0.0	54.0	74.0	20.0
2743.6	47.0	A	H	28.1	28.4	2.3	0.0	49.0	64.0	15.0
3657.0	49.0	P	V	31.3	27.8	2.7	0.0	55.2	74.0	18.8
3657.0	42.0	A	V	31.3	27.8	2.7	0.0	49.2	64.0	15.0
4571.9	48.0	P	H	12.2	27.9	3.2	0.0	50.5	74.0	18.5
4571.9	41.0	A	H	12.2	27.9	3.2	0.0	49.5	64.0	15.0
7316.0	42.0	P	H	35.5	26.0	4.3	0.0	54.1	74.0	19.9
7316.0	35.0	A	H	35.5	28.0	4.3	0.0	47.1	54.0	6.0

Notes: a) P: Peak; A: Average; Q: Quasi-Peak; H: Horizontal; V: Vertical; OCF: Other Correction Factor; DF: Distance Factor
b) Insert. Loss = Cable A + Cable B + OCF
c) Negative signs (-) in Margin column signify levels below the limits
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits

ITS Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

Radiated Emissions Test Data

Company: Stanford	Model #:	IS-901 Digital Spread Spectrum
EUT: 900 MHz cordless phone (hand set)	S/N or FCC:	N/A
Project # J98026020	Engineer:	C. Kwan
Test Mode: stand by	Date of Test:	09/30/98
		Initial

Number:	Antenna	Pre-Amp	Cable A	Cable B	OCF	Standard	FCC Part 15B
	1	7	13	0	0	Limits	2
Model:	EMCO 314	CPA-102	S2_3m	None	None	Test Distance	3 meters

Frequency	Reading	Det.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. F.	Nel	Limit @3m	Margin
MHz	dB(µV)	P/A/Q	H/V	dB(1/m)	dB	dB	dB	dB(µV/m)	dB(µV/m)	dB
277.2	32.6	P	V	11.4	35.1	2.9	0.0	11.8	46.0	-34.2
419.2	31.7	P	V	15.1	34.9	4.3	0.0	16.2	46.0	-29.8
543.2	37.6	P	V	17.1	34.8	5.3	0.0	25.2	46.0	-20.8
628.2	31.2	P	V	18.0	35.2	5.4	0.0	19.9	46.0	-26.1
704.7	31.1	P	V	19.3	36.1	6.6	0.0	20.9	46.0	-25.1
780.2	38.5	P	V	19.7	36.1	7.2	0.0	29.3	46.0	-16.7
837.7	30.1	P	V	20.9	28.4	8.2	0.0	30.8	46.0	-15.2
866.2	30.3	P	V	20.3	27.5	6.7	0.0	31.8	46.0	-14.2

Notes: a) P: Peak; A: Average; Q: Quasi Peak H: Horizontal; V: Vertical; OCF: Other Correction Factor; DF: Distance Factor
b) Insert. Loss = Cable A + Cable B + OCF
c) Negative signs (-) in Margin column signify levels below the limits
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits

ITS Intertek Testing Services

1365 Adams Court, Menlo Park CA 94025

Radiated Emissions Test Data

Company: Stanford
EUT: 900 MHz cordless phone (base unit)
Project #: J98026020
Test Mode: stand by

Model #: IS-901Digital Spread Spectrum
S/N or FCC N/A
Engineer: C. Kwan
Date of Test: 09/29/98 Initial:

Antenna Number	Pre-Amp	Cable A	Cable B	OCF	Standard	FCC Part 15B
1 Model: EMCO 314	7 CPPA_102	13 S2_3m	0 None	0 None	2	3 meters

Frequency MHz	Reading dB(uV)	Det. P/A/Q	Ant. Pol. H/V	Ant. Factor dB(1/m)	Pre-Amp dB	Insert. Loss dB	D. F. dB	Net dB(uV/m)	Limit @3m dB(uV/m)	Margin dB
144.2	30.5	P	V	8.2	35.3	2.1	0.0	5.5	43.5	-38.0
315.2	30.4	P	V	12.9	34.9	3.1	0.0	11.5	46.0	-34.5
486.2	30.4	P	V	16.4	35.0	5.0	0.0	16.9	46.0	-29.2
505.2	30.1	P	V	16.5	34.8	5.3	0.0	17.1	46.0	-28.9
657.2	30.5	P	V	18.4	35.2	6.3	0.0	20.1	46.0	-25.9
885.2	30.2	P	V	20.9	27.5	8.7	0.0	32.3	46.0	-13.7
904.2	31.0	P	V	21.0	29.1	8.3	0.0	31.3	46.0	-14.8
942.2	31.0	P	V	20.9	29.1	8.3	0.0	31.2	46.0	-14.9

Notes: a) P: Peak; A: Average; Q: Quasi Peak; H: Horizontal; V: Vertical; OCF:Other Correction Factor; DF:Distance Factor
b) Insert. Loss = Cable A + Cable B + OCF.
c) Negative signs (-) in Margin column signify levels below the limits.
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

ITS Intertek Testing Services

1365 Adams Court, Menlo Park, CA 94025

Radiated Emissions Test Data

Company:	Stanford	Model #:	IS-901Digital Spread Spectrum	1						
EUT:	900 MHz cordless phone (base unit)	S/N or FCC:	N/A	2						
Project #:	J98026020	Engineer:	C Kwan	3						
Test Mode:	stand by	Date of Test:	09/29/98	Initial:						
Number:	Antenna	Pre Amp	Cable A	Cable B	OCF	Standard	Limits	FCC Part 15B		
Model:	EMCO 314	CPFA_102	S2_3m	None	None	Test Distance	3	meters		
Frequency	Reading	Det.	Ant. Pol.	Ant. Factor	Pre-Amp	Insert. Loss	D. F.	Net	Limit @3m	Margin
MHz	dB(uV)	PI/AQ	uV	dB(1/m)	dB	dB	dB	dB(uV/m)	dB(uV/m)	dB
144.2	30.5	p	v	8.2	35.3	2.1	0.0	5.5	43.5	-38.0
315.2	30.4	p	v	12.9	34.9	3.1	0.0	11.5	46.0	-34.5
486.2	30.4	p	v	16.4	35.0	5.0	0.0	16.9	46.0	-29.2
505.2	30.1	p	v	15.5	34.8	5.3	0.0	17.1	46.0	-28.9
657.2	30.5	p	v	18.4	35.2	6.3	0.0	20.1	46.0	-25.9
886.2	30.2	p	v	20.9	27.5	8.7	0.0	32.1	46.0	-13.7
904.2	31.0	p	v	21.0	29.1	8.3	0.0	31.3	46.0	-14.8
942.2	31.0	p	v	20.9	29.1	8.3	0.0	31.2	46.0	14.9

Notes: a) P: Peak; A: Average; Q: Quasi Peak; H: Horizontal; V: Vertical; OCF:Other Correction Factor; OF: Distance Factor
b) Insert. Loss = Cable A + Cable B + OCF
c) Negative signs (-) in Margin column signify levels below the limits
d) All other emissions not reported are below the equipment noise floor which is at least 20 dB below the limits.

4.12 Processing Gain Measurements, FCC Rule 15.247(e)

The processing gain shall be determined from the ratio in dB of the signal to noise ratio with the system spreading code turned OFF, to the signal to noise ratio with the system spreading code turned ON, as measured at the demodulated output of the receiver. The processing gain shall be at least 10 dB for a direct sequence spread spectrum system.

	Refer to attached test procedure and data sheets.
X	Refer to circuit analysis and processing gain calculations provided by manufacturer.

4.13 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEEP function on the analyzer was set to ZERO SPAN. The transmitter ON time was determined from the resultant time-amplitude display:

Duty cycle = Maximum ON time in 100 msec/100

Duty cycle correction, dB = $20 * \log(\text{DC})$

	See attached spectrum analyzer chart(s) for transmitter timing
	See transmitter timing diagram provided by manufacturer
X	Not applicable, duty cycle was not used.

5.0 List of Exhibits

Exhibit 1 **ID Label Format**

Exhibit 2 **ID Label Location**

Exhibit 3 **Equipment Photographs**

Exhibit 4 **Block Diagram**

Exhibit 5 **Circuit Diagram**

Exhibit 6 **This Test Report**

Exhibit 7 **Test Setup Photos**

Exhibit 8 **Instruction Manual**