
Appendix for the Report

Dosimetric Assessment of the Portable Device

Sennheiser Communications DW30HS (FCC ID: DMOCDHDEC)

According to the FCC Requirements

SAR Distribution Plots

August 03, 2010

IMST GmbH

Carl-Friedrich-Gauß-Str. 2

D-47475 Kamp-Lintfort

Customer

Sennheiser Communications A/S

Langager 6

DK-2680 Solrod Strand

The test results only relate to the items tested. This report shall not be reproduced except in full without the written approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, HEAD MEASUREMENTS, ANTENNA 1.....	3
2	SAR DISTRIBUTION PLOTS, HEAD MEASUREMENTS, ANTENNA 2.....	5
3	SAR Z-AXIS SCANS (VALIDATION)	7
4	SAR Z-AXIS SCANS (MEASUREMENTS).....	7

1 SAR Distribution Plots, Head Measurements, Antenna 1

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [DW30_380_yplm_1_ant1.da4](#)

DUT: Sennheiser; Type: DW30HS; Serial: 10000380

Program Name: Cheek Left

Communication System: DECT US; Frequency: 1924.99 MHz; Duty Cycle: 1:15

Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.95, 7.95, 7.95); Calibrated: 18.09.2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 10.02.2010
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Left/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.040 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.37 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.063 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

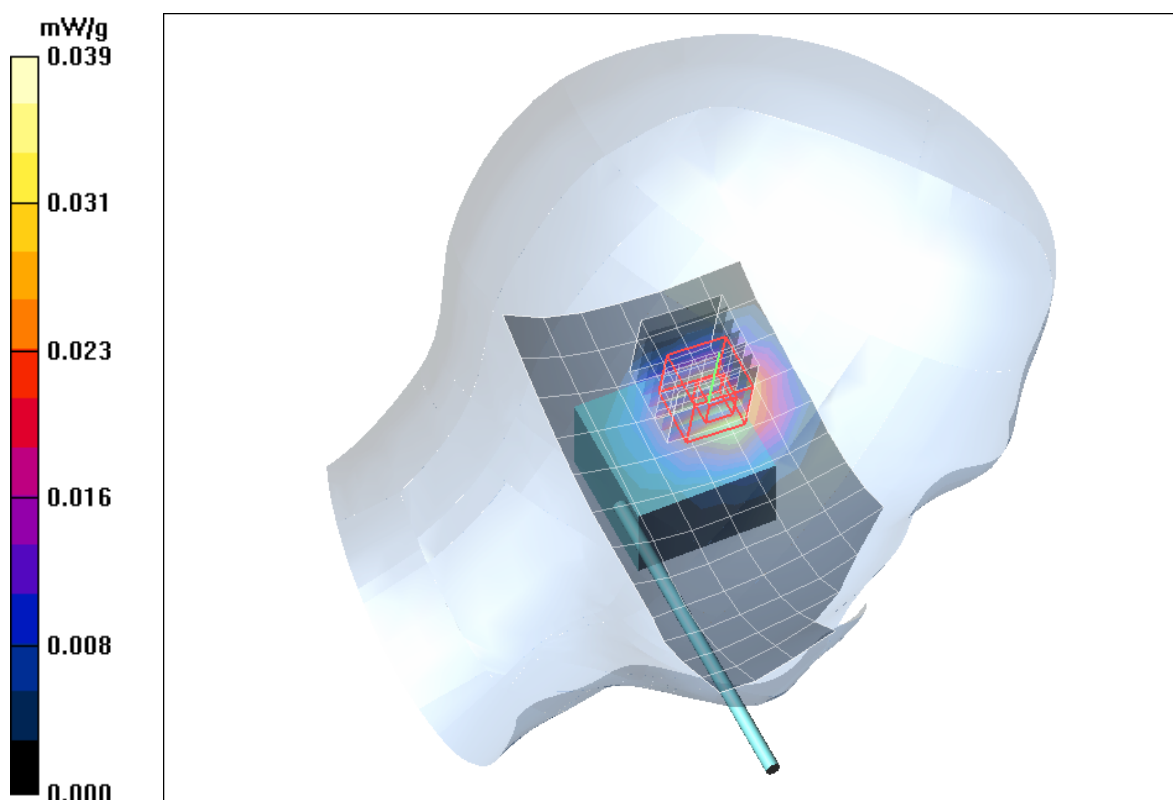


Fig. 1: SAR distribution for DECT US, channel 2, cheek position, left side of head, the view looking from above the phantom (June 16, 2010; Ambient Temperature: 20.7°C; Liquid Temperature: 20.2°C).

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [DW30_380_yprm_1_ant1.da4](#)

DUT: Sennheiser; Type: DW30HS; Serial: 10000380

Program Name: Cheek Right

Communication System: DECT US; Frequency: 1924.99 MHz; Duty Cycle: 1:15

Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.95, 7.95, 7.95); Calibrated: 18.09.2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 10.02.2010
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Right/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.037 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.71 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.065 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

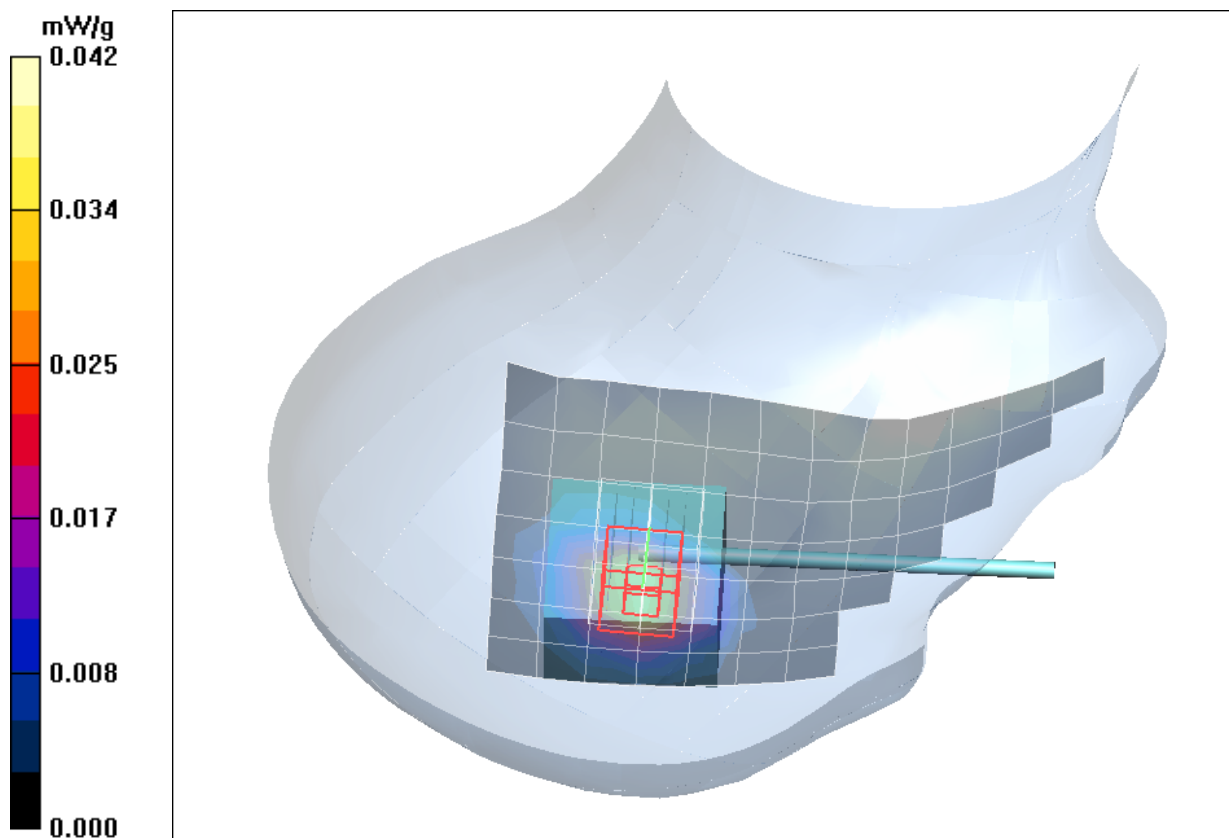


Fig. 2: SAR distribution for DECT US, channel 2, cheek position, right side of head, the view looking from above the phantom (June 16, 2010; Ambient Temperature: 20.7°C; Liquid Temperature: 20.2°C).

2 SAR Distribution Plots, Head Measurements, Antenna 2

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [DW30_380_yplm_1_ant2.da4](#)

DUT: Sennheiser; Type: DW30HS; Serial: 10000380

Program Name: Cheek Left

Communication System: DECT US; Frequency: 1924.99 MHz; Duty Cycle: 1:15

Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.95, 7.95, 7.95); Calibrated: 18.09.2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 10.02.2010
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Left/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.021 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.91 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00887 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

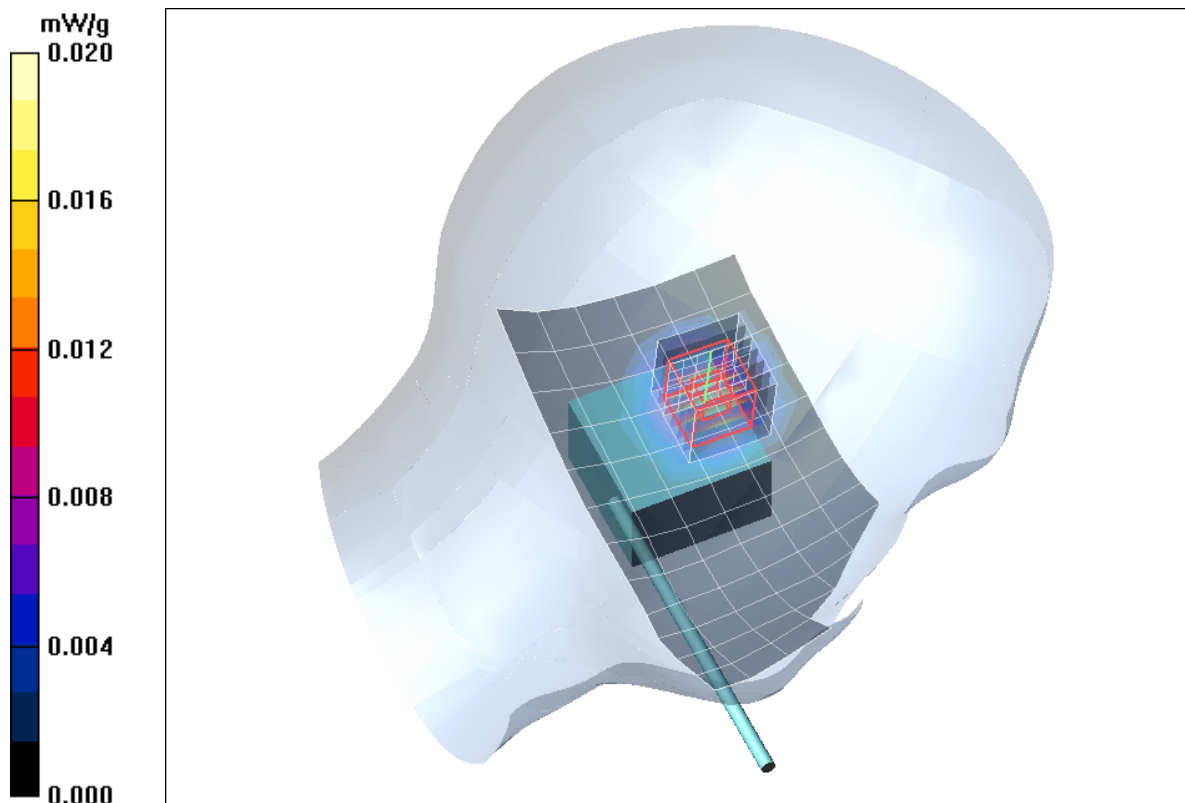


Fig. 3: SAR distribution for DECT US, channel 2, cheek position, left side of head, the view looking from above the phantom (June 16, 2010; Ambient Temperature: 20.7°C; Liquid Temperature: 20.2°C).

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [DW30_380_yprm_1_ant2.da4](#)

DUT: Sennheiser; Type: DW30HS; Serial: 10000380

Program Name: Cheek Right

Communication System: DECT US; Frequency: 1924.99 MHz; Duty Cycle: 1:15

Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3536; ConvF(7.95, 7.95, 7.95); Calibrated: 18.09.2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 10.02.2010
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Cheek Right/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.019 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.40 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.035 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00923 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

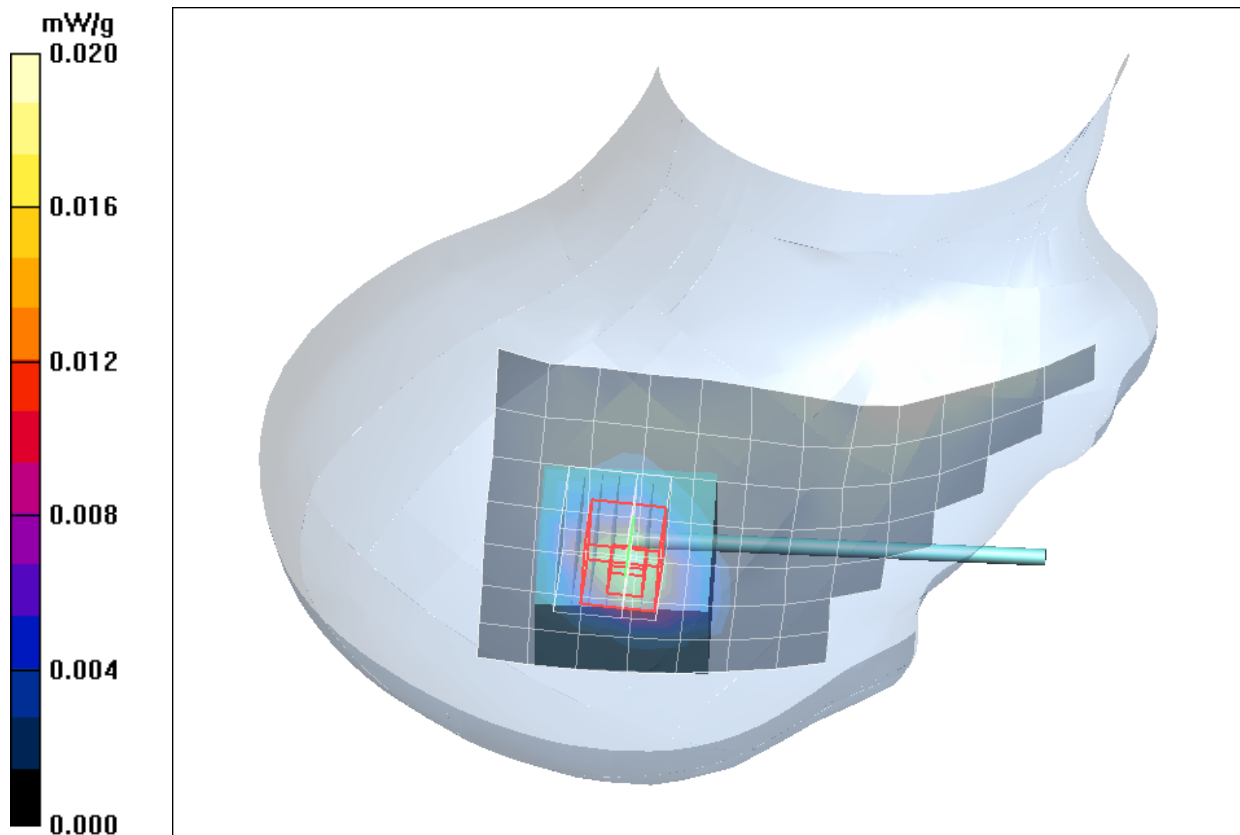


Fig. 4: SAR distribution for DECT US, channel 2, cheek position, right side of head, the view looking from above the phantom (June 16, 2010; Ambient Temperature: 20.7°C; Liquid Temperature: 20.2°C).

3 SAR z-axis scans (Validation)

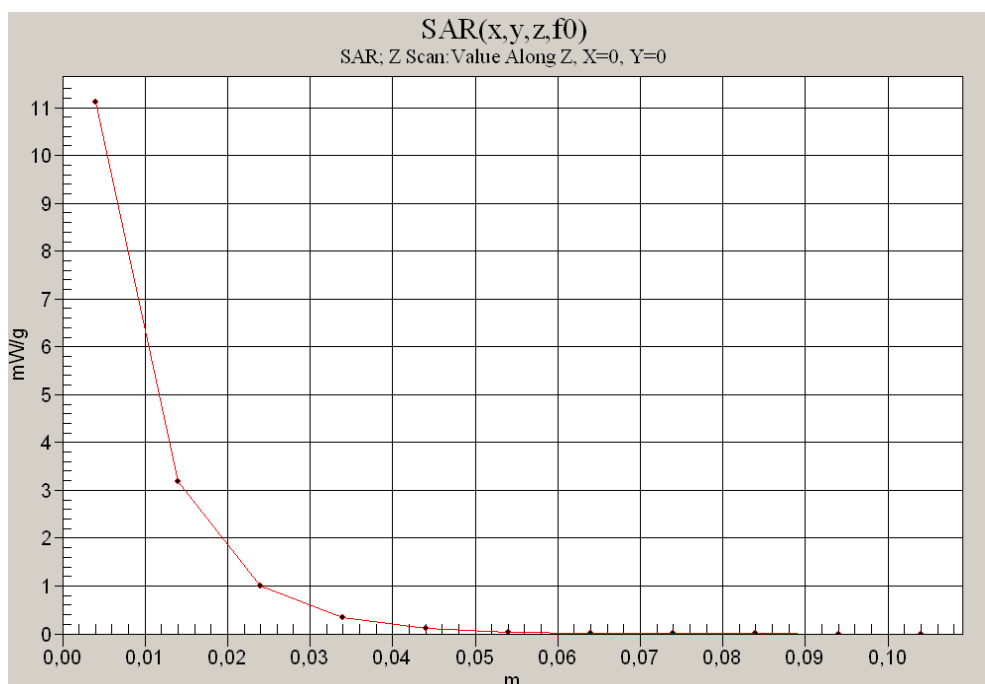


Fig. 5: SAR versus liquid depth, 1900 MHz, head (June 16, 2010; Ambient Temperature: 20.5° C; Liquid Temperature : 20.1° C).

4 SAR z-axis scans (Measurements)

The following picture shows the plot of SAR versus liquid depth for the worst case values.

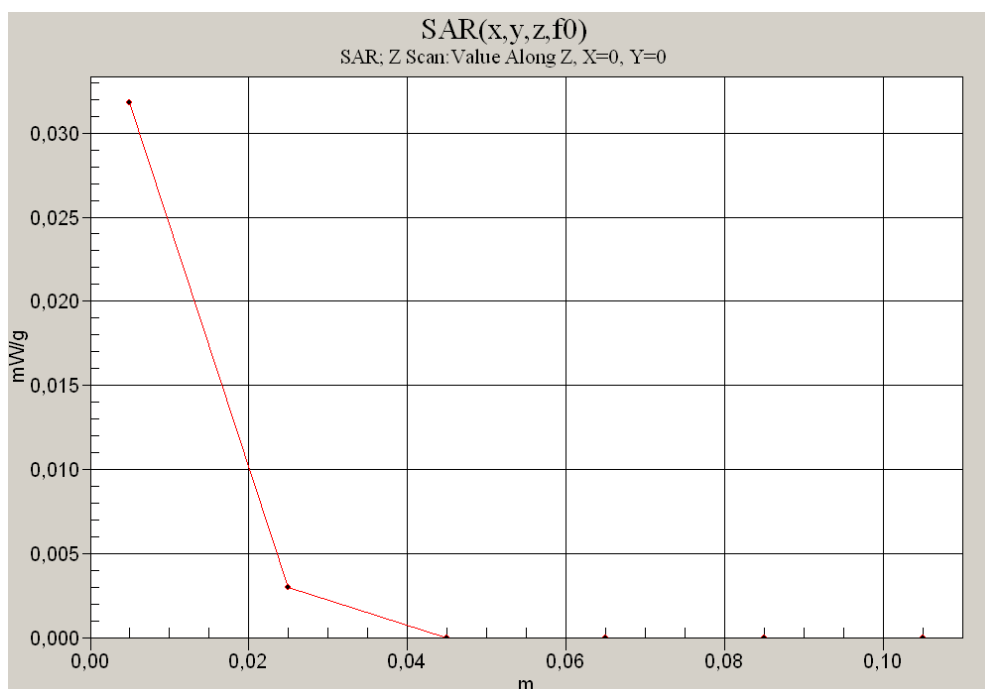


Fig. 6: SAR versus liquid depth, head: DECT US, channel 2, cheek position, right side of head, antenna 1 (June 16, 2010; Ambient Temperature: 20.7° C; Liquid Temperature : 20.2° C).