



TEST REPORT

Product Name: Bulk encoding RFID tunnel
FCC ID: DO4-300C
Trademark: Checkpoint
Model Number: RFID Box Tunnel 300C
Prepared For: Checkpoint Systems Inc
Address: 101 Wolf Drive Thorofare, New Jersey 08086 USA
Manufacturer: Shenzhen Cykeo Information Technology Co., Ltd.
Address: 1603-1608, Block C, Building 3, Yunzhi Science Park, Shuangming Avenue, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 16, 2025
Sample tested Date: May. 16, 2025 to May. 29, 2025
Issue Date: May. 29, 2025
Report No.: CTB25051605301RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is RFID radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information.....	7
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Channel List.....	8
4.5 Test Mode	8
4.6 Test Environment.....	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility.....	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result.....	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit.....	15
7.3 Test procedure	16
7.4 Test Result.....	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS.....	22
8.1 Block Diagram Of Test Setup	22
8.2 Limit.....	22
8.3 Test procedure	22
8.4 Test Result.....	23
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup	35

9.2	Limit.....	35
9.3	Test procedure	35
9.4	Test Result.....	35
10.	20DB OCCUPIED BANDWIDTH	41
10.1	Block Diagram Of Test Setup.....	41
10.2	Limit.....	41
10.3	Test procedure	41
10.4	Test Result	41
11.	CARRIER FREQUENCIES SEPARATION	47
11.1	Block Diagram Of Test Setup.....	47
11.2	Limit.....	47
11.3	Test procedure	47
11.4	Test Result	47
12.	HOPPING CHANNEL NUMBER.....	52
12.1	Block Diagram Of Test Setup.....	52
12.2	Limit.....	52
12.3	Test procedure	52
12.4	Test Result	52
13.	DWELL TIME	55
13.1	Block Diagram Of Test Setup.....	55
13.2	Limit.....	55
13.3	Test procedure	55
13.4	Test Result	55
14.	ANTENNA REQUIREMENT	61
15.	EUT TEST SETUP PHOTOGRAPHS	62

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25051605301RF01	May. 29, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209/15.247(d)	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(2)	ANSI C63.10-2020	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2020	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2020	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	RFID Box Tunnel 300C
Model Description:	N/A
Hardware Version:	IMPINJ R700
Software Version:	ItemTest
Operation Frequency:	902-928MHz
Max. RF output power:	29.407dBm
Type of Modulation:	ASK
Antenna installation:	Internal antenna
Antenna Gain:	Ant 1: 9dBi
	Ant 2: 9dBi
	Ant 3: 9dBi
	Ant 4: 9dBi
Ratings:	DC 48V+24V+12V 3A 600W

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	--

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.75	19	911.75	37	920.75
2	903.25	20	912.25	38	921.25
3	903.75	21	912.75	39	921.75
4	904.25	22	913.25	40	922.25
5	904.75	23	913.75	41	922.75
6	905.25	24	914.25	42	923.25
7	905.75	25	914.75	43	923.75
8	906.25	26	915.25	44	924.25
9	906.75	27	915.75	45	924.75
10	907.25	28	916.25	46	925.25
11	907.75	29	916.75	47	925.75
12	908.25	30	917.25	48	926.25
13	908.75	31	917.75	49	926.75
14	909.25	32	918.25	50	927.25
15	909.75	33	918.75		
16	910.25	34	919.25		
17	910.75	35	919.75		
18	911.25	36	920.25		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (ASK)	902.75MHz	914.75MHz	927.25MHz
Receiving (ASK)	902.75MHz	914.75MHz	927.25MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC)(V):	48
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-5850MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/

9	Coaxial cable	Rosenberg	8m	/	/	2025/10/25
10	Coaxial cable	Times	2m	/	/	2025/10/25
11	Coaxial cable	Times	2m	/	/	2025/10/25
12	Coaxial cable	Times	1m	/	/	2025/10/25
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

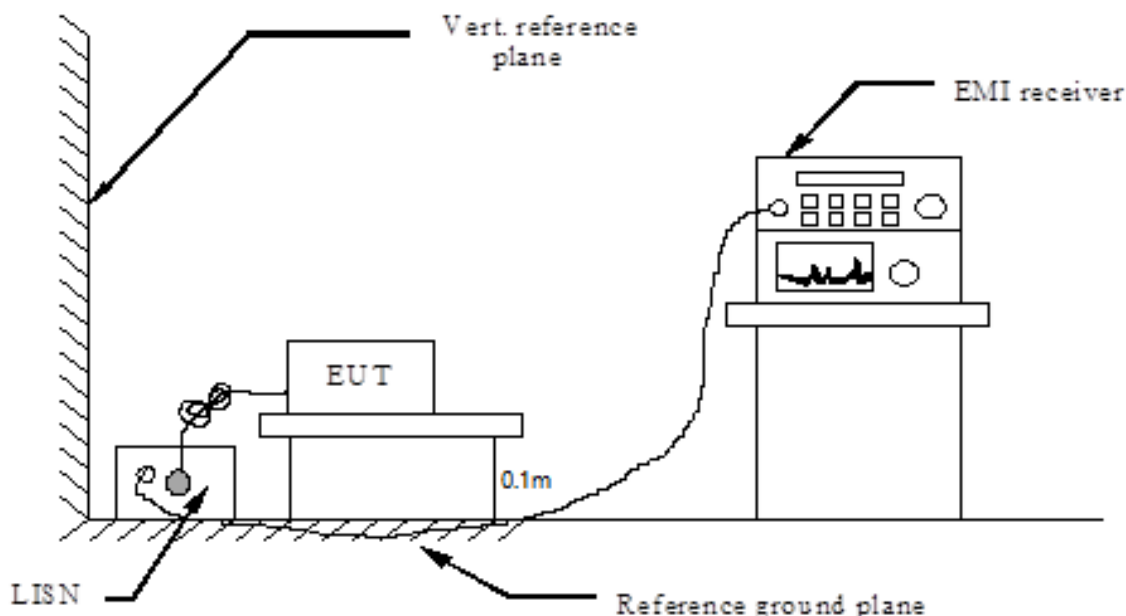

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the


horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

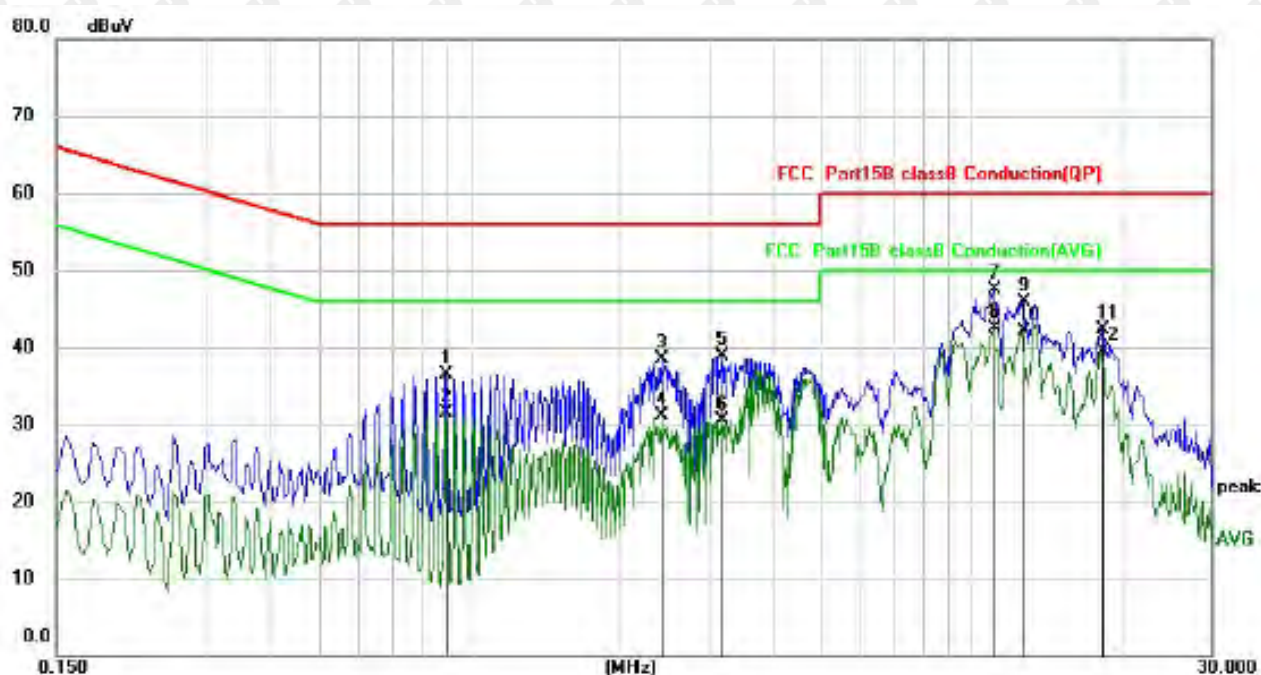

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.8980	25.55	10.87	36.42	56.00	-19.58	QP
2		0.8980	20.58	10.87	31.45	46.00	-14.55	AVG
3		2.4140	26.76	11.67	38.43	56.00	-17.57	QP
4		2.4140	19.45	11.67	31.12	46.00	-14.88	AVG
5		3.1739	27.15	11.84	38.99	56.00	-17.01	QP
6		3.1739	18.75	11.84	30.59	46.00	-15.41	AVG
7		11.0579	34.27	13.26	47.53	60.00	-12.47	QP
8	*	11.0579	29.27	13.26	42.53	50.00	-7.47	AVG
9		12.6539	32.59	13.29	45.88	60.00	-14.12	QP
10		12.6539	28.83	13.29	42.12	50.00	-7.88	AVG
11		18.1700	28.87	13.50	42.37	60.00	-17.63	QP
12		18.1700	25.93	13.50	39.43	50.00	-10.57	AVG

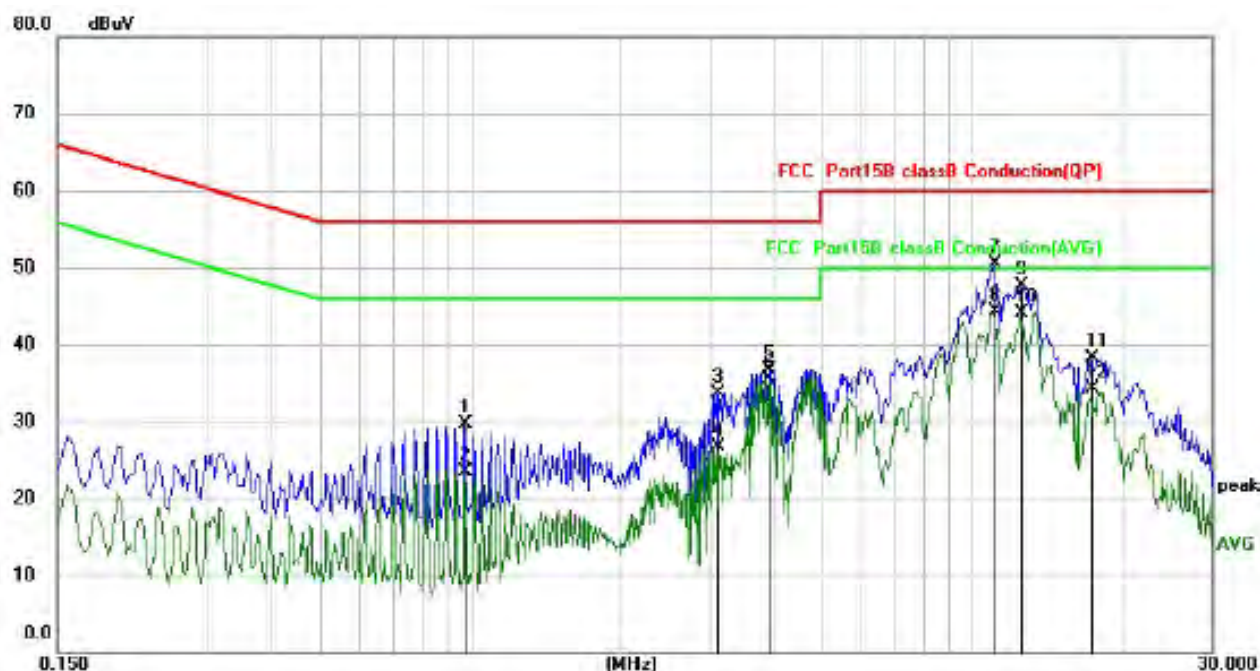

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.9778	18.75	10.93	29.68	56.00	-26.32	QP
2		0.9778	12.66	10.93	23.59	46.00	-22.41	AVG
3		3.0979	21.91	11.82	33.73	56.00	-22.27	QP
4		3.0979	14.90	11.82	26.72	46.00	-19.28	AVG
5		3.9380	24.63	12.01	36.64	56.00	-19.36	QP
6		3.9380	23.45	12.01	35.46	46.00	-10.54	AVG
7		11.0579	37.26	13.26	50.52	60.00	-9.48	QP
8	*	11.0579	31.04	13.26	44.30	50.00	-5.70	AVG
9		12.4900	34.46	13.29	47.75	60.00	-12.25	QP
10		12.4900	30.82	13.29	44.11	50.00	-5.89	AVG
11		17.2859	24.79	13.45	38.24	60.00	-21.76	QP
12		17.2859	20.92	13.45	34.37	50.00	-15.63	AVG

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of GFSK Low Channel was reported.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

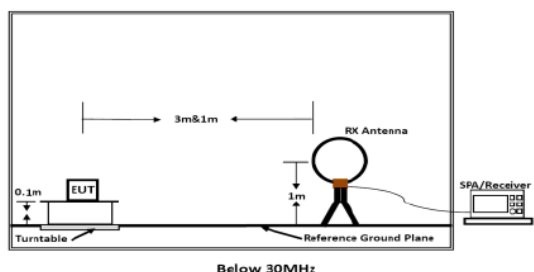


Figure 1. Below 30MHz

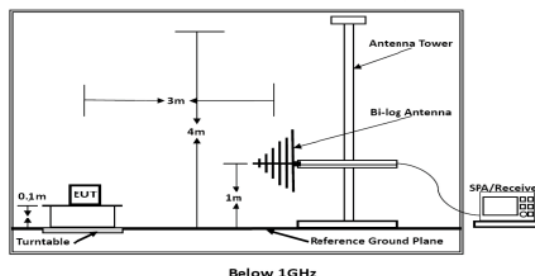


Figure 2. 30MHz to 1GHz

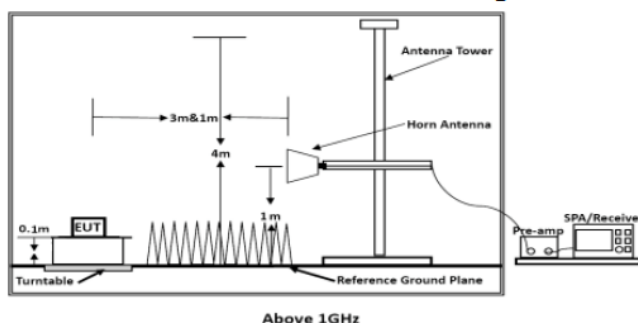


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: a.15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

b. The lower limit shall apply at the transition frequencies.

c. Emission level(dBuV/m)=20log Emission level(uV/m)

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.1 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Low channel below 1GHz Test Results:


Antenna polarity: H

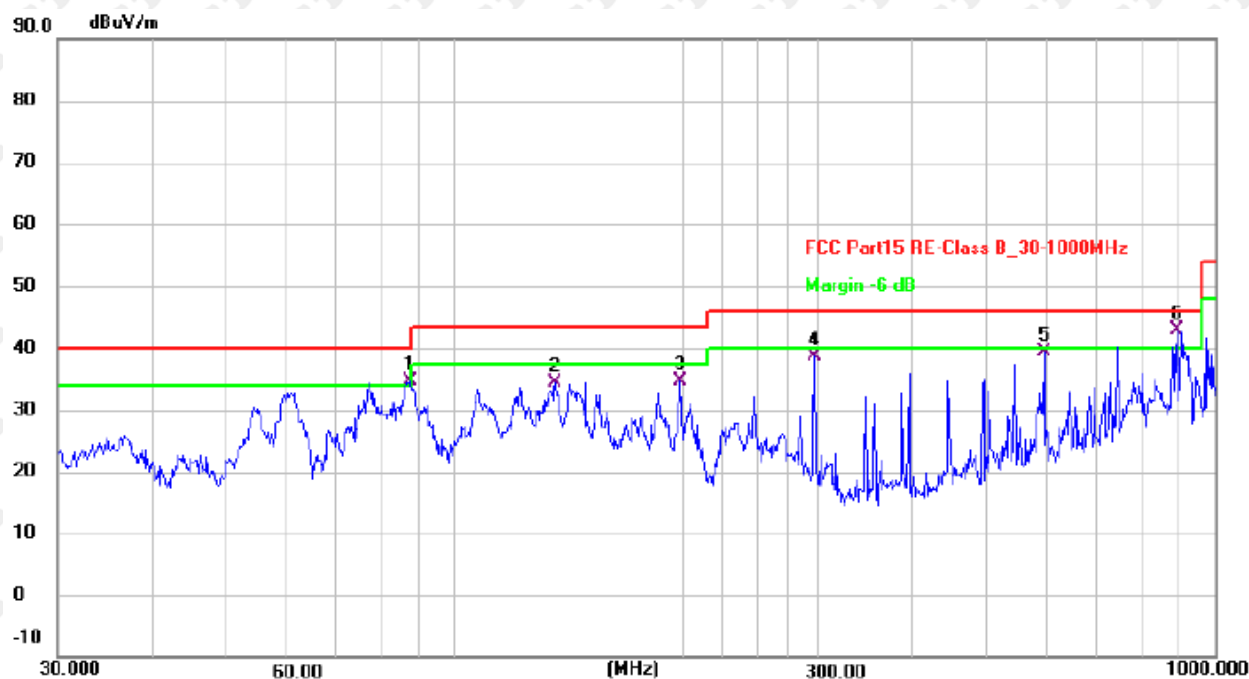

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	87.1115	52.87	-18.17	34.70	40.00	-5.30	QP
2	135.5061	48.66	-14.38	34.28	43.50	-9.22	QP
3	197.8926	51.54	-16.84	34.70	43.50	-8.80	QP
4	297.2240	52.10	-13.52	38.58	46.00	-7.42	QP
5	595.1326	45.45	-5.96	39.49	46.00	-6.51	QP
6 *	890.7277	44.12	-1.33	42.79	46.00	-3.21	QP

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level.

Antenna polarity: V

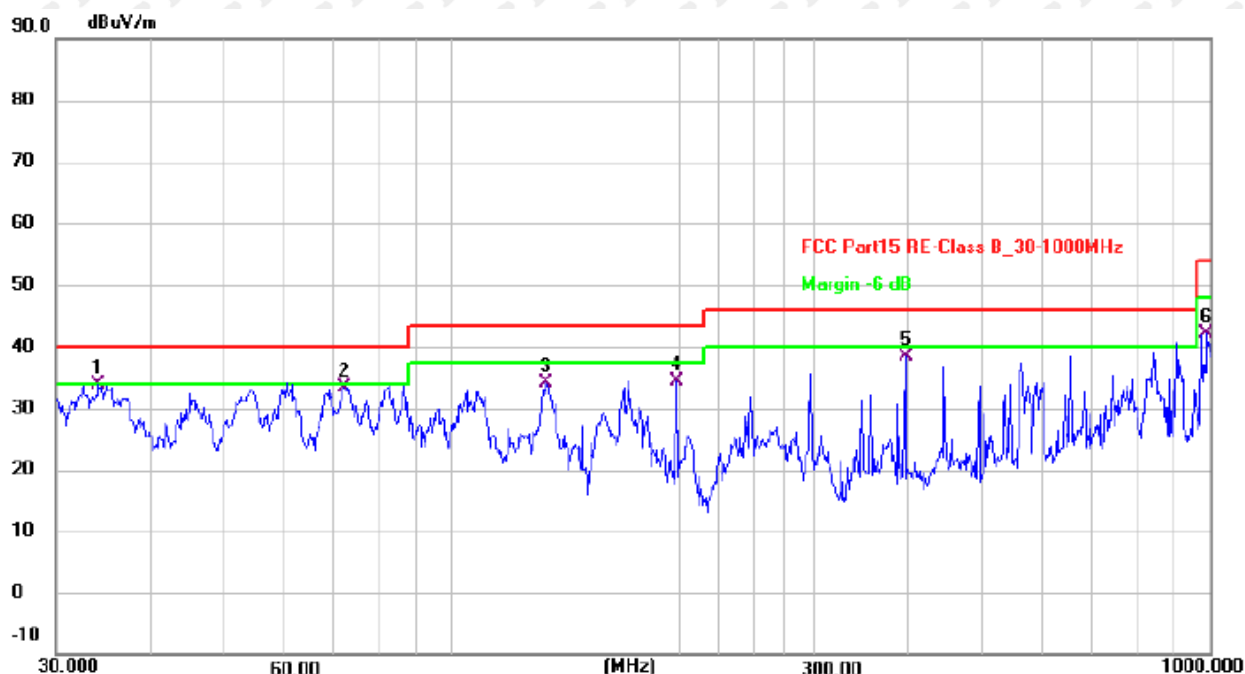

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	34.1560	47.58	-13.81	33.77	40.00	-6.23	QP
2	72.0841	50.49	-17.19	33.30	40.00	-6.70	QP
3	133.1510	48.65	-14.47	34.18	43.50	-9.32	QP
4	197.8926	51.28	-16.84	34.44	43.50	-9.06	QP
5	396.2414	49.63	-11.30	38.33	46.00	-7.67	QP
6	989.5353	42.53	-0.46	42.07	54.00	-11.93	QP

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:
CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1805.5	108.47	-5.84	52.69	74	-21.31	peak
1805.5	95.57	-5.84	43.65	54	-10.35	AVG
2708.25	56.34	-3.64	52.70	74	-21.30	peak
2708.25	47.16	-3.64	43.52	54	-10.48	AVG
3611	58.16	-0.95	57.21	74	-16.79	peak
3611	48.03	-0.95	47.08	54	-6.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1805.5	108.36	-5.84	52.69	74	-21.31	peak
1805.5	95.58	-5.84	43.65	54	-10.35	AVG
2708.25	56.23	-3.64	52.59	74	-21.41	peak
2708.25	47.14	-3.64	43.50	54	-10.50	AVG
3611	58.25	-0.95	57.30	74	-16.70	peak
3611	48.12	-0.95	47.17	54	-6.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1829.5	108.34	-5.71	52.67	74	-21.33	peak
1829.5	95.16	-5.71	45.61	54	-8.39	AVG
2744.25	56.07	-3.51	52.56	74	-21.44	peak
2744.25	46.75	-3.51	43.24	54	-10.76	AVG
3659	58.09	-0.82	57.27	74	-16.73	peak
3659	47.98	-0.82	47.16	54	-6.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1829.5	108.38	-5.71	52.67	74	-21.33	peak
1829.5	95.12	-5.71	45.61	54	-8.39	AVG
2744.25	55.94	-3.51	52.43	74	-21.57	peak
2744.25	46.81	-3.51	43.30	54	-10.70	AVG
3659	58.10	-0.82	57.28	74	-16.72	peak
3659	47.89	-0.82	47.07	54	-6.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

CH High
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1851.5	56.39	-5.65	52.36	74	-21.64	peak
1851.5	47.26	-5.65	46.89	54	-7.11	AVG
2777.25	56.23	-3.43	52.80	74	-21.20	peak
2777.25	47.38	-3.43	43.95	54	-10.05	AVG
3703	57.29	-0.75	56.54	74	-17.46	peak
3703	47.63	-0.75	46.88	54	-7.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1851.5	56.42	-5.65	52.36	74	-21.64	peak
1851.5	47.36	-5.65	46.89	54	-7.11	AVG
2777.25	56.19	-3.43	52.76	74	-21.24	peak
2777.25	47.37	-3.43	43.94	54	-10.06	AVG
3703	57.25	-0.75	56.50	74	-17.50	peak
3703	47.70	-0.75	46.95	54	-7.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1). Measuring frequencies from 1 GHz to the 25 GHz °
- (2). All modes of operation were investigated and the worst-case emissions are reported.
- (3). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

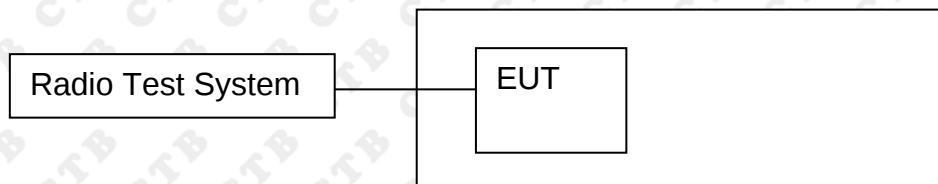

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result

ANT1:




HCH/
Hop

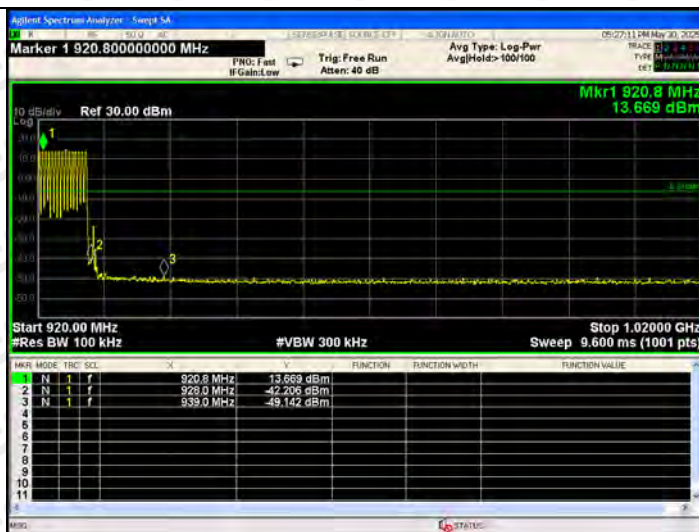


RF Conducted Spurious Emissions Graphs


LCH

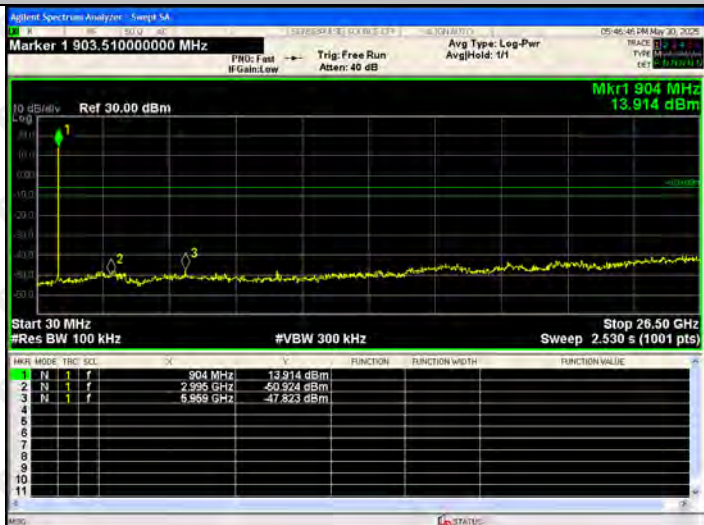

MCH



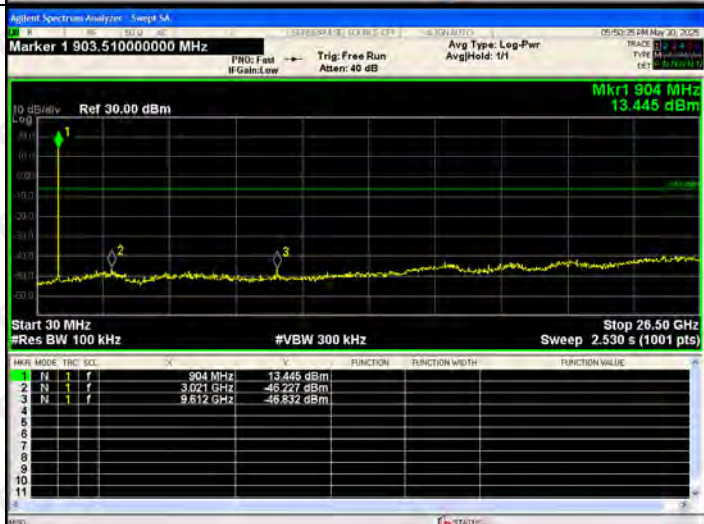


HCH

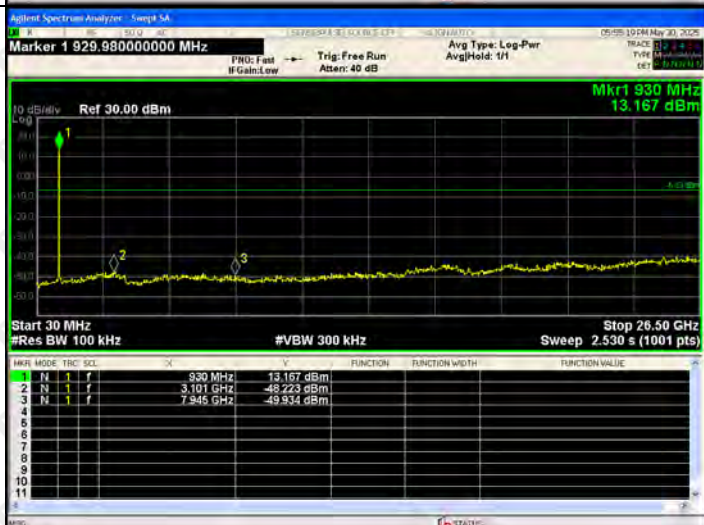


ANT2:

BAND EDGE Graphs

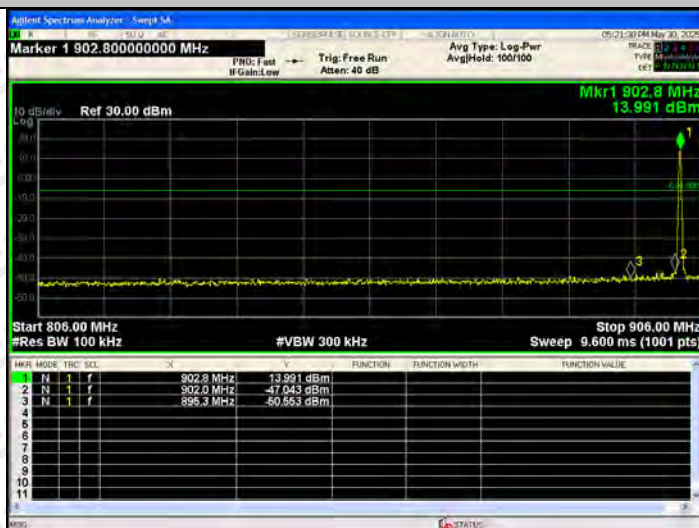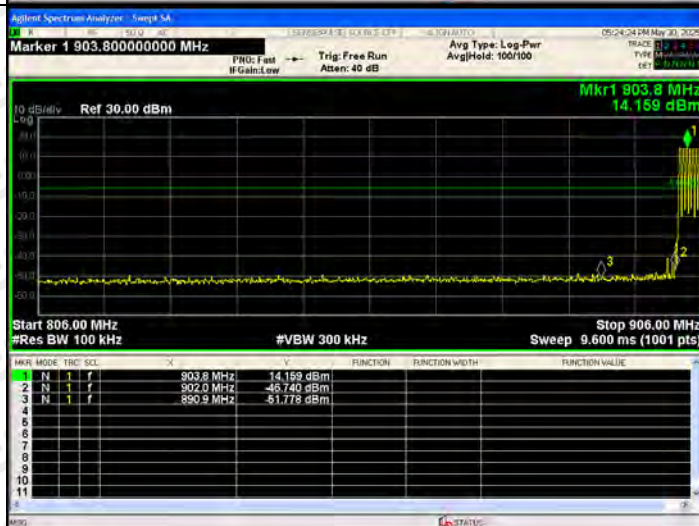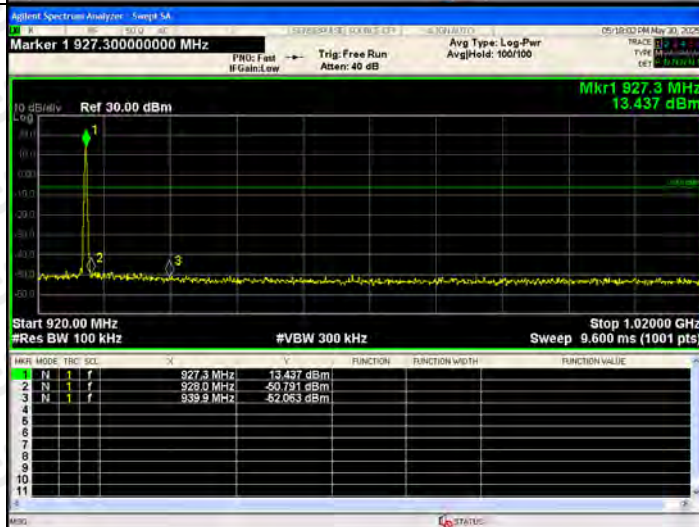
LCH/
No Hop

LCH/
Hop

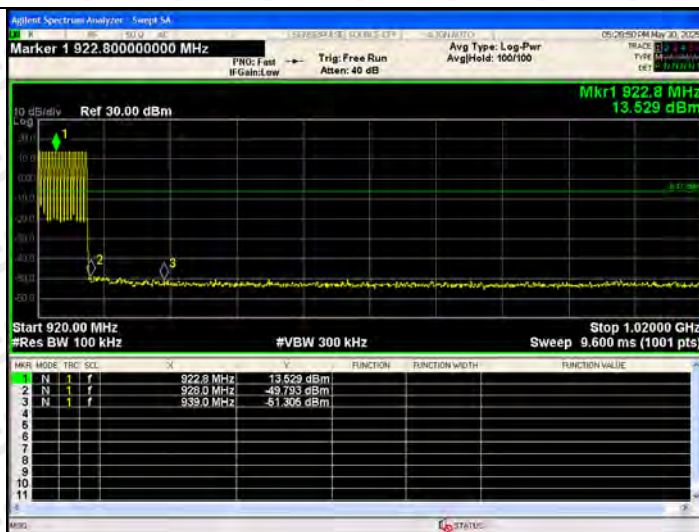HCH/
No Hop


HCH/
Hop

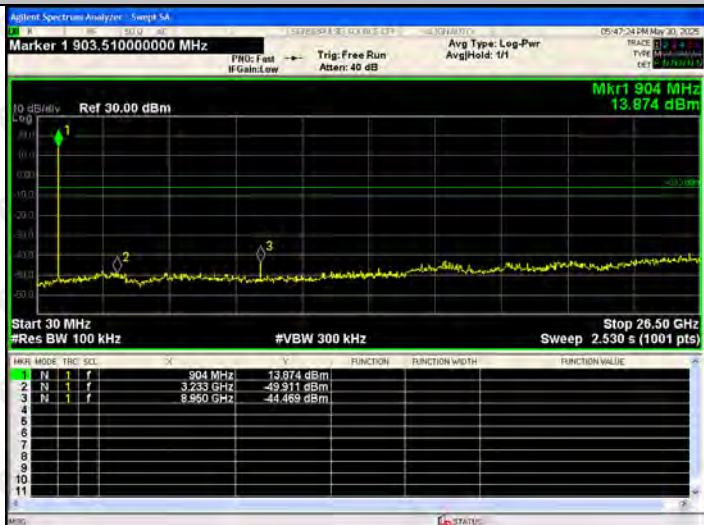


RF Conducted Spurious Emissions Graphs


LCH



MCH



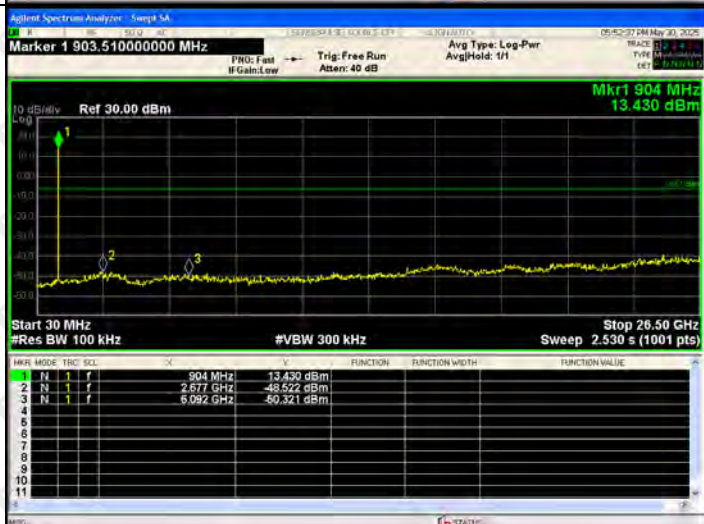


HCH

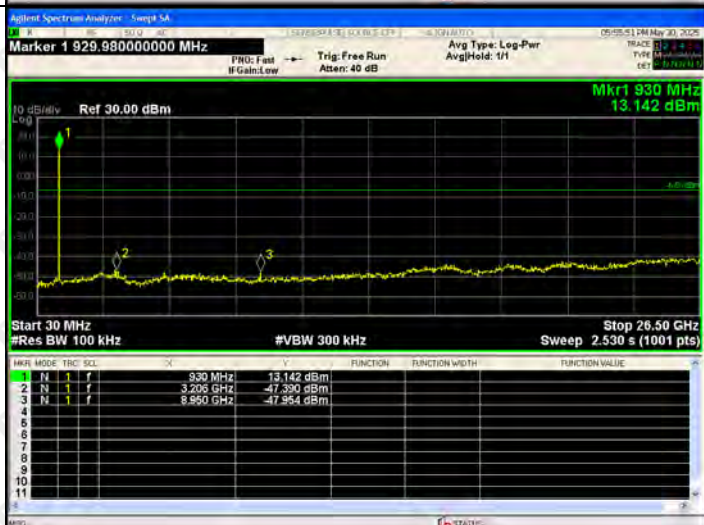


ANT3:

BAND EDGE Graphs

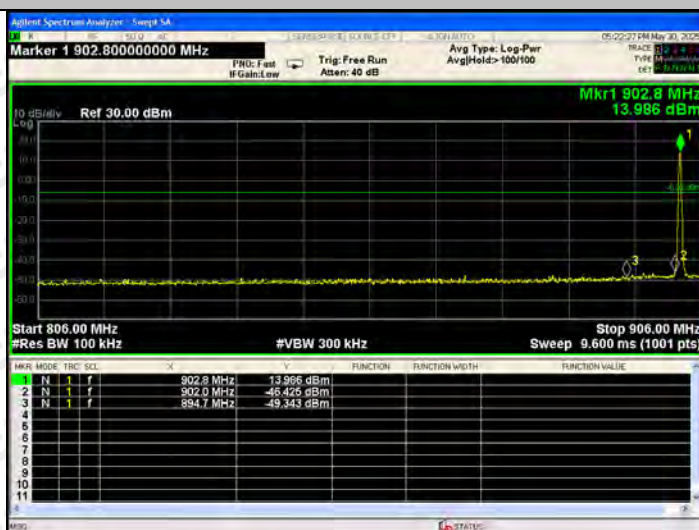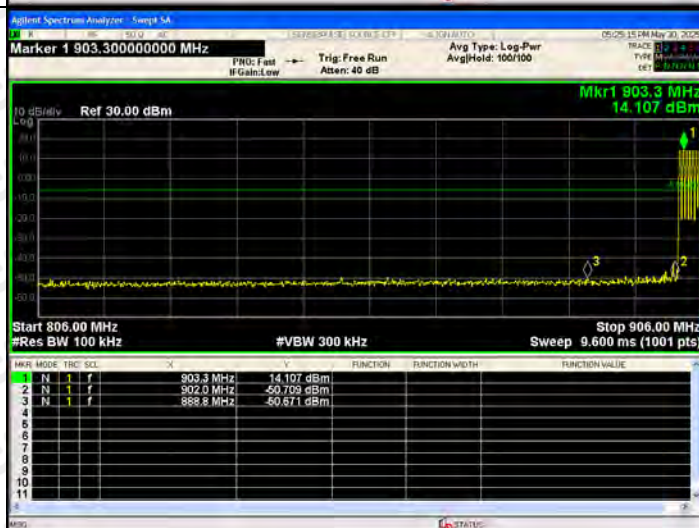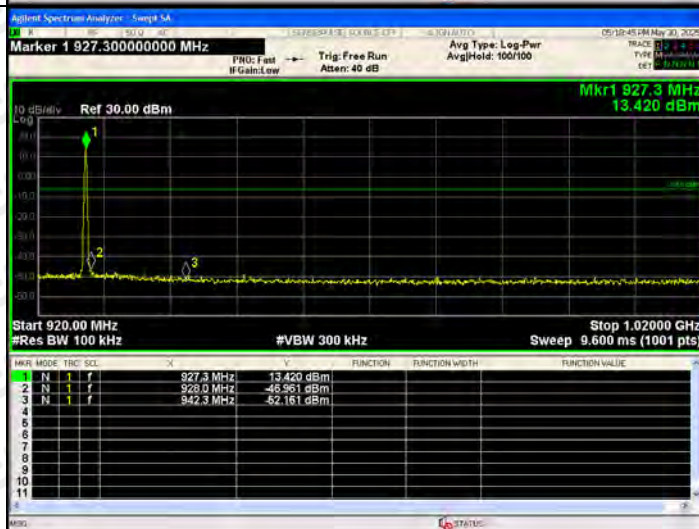
LCH/
No Hop

LCH/
Hop

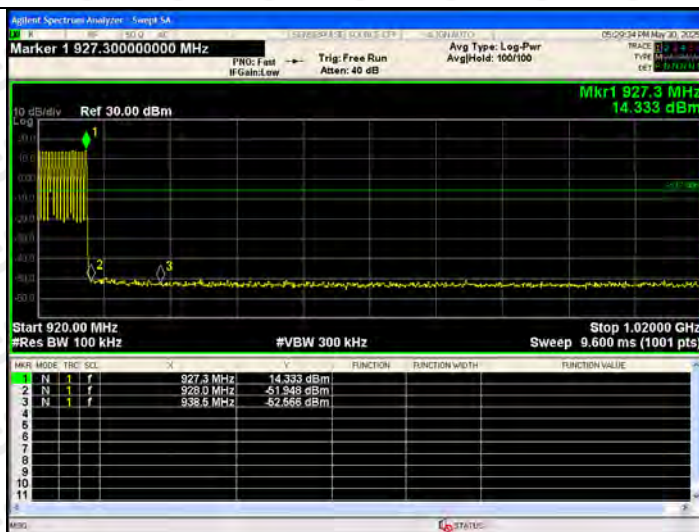HCH/
No Hop


HCH/
Hop

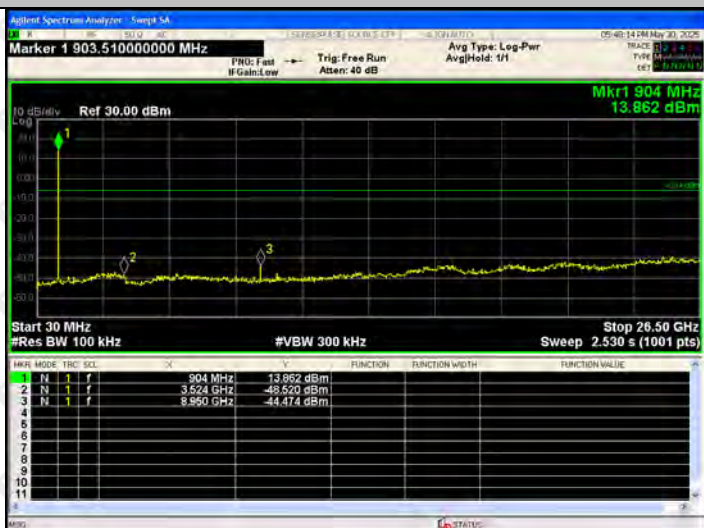


RF Conducted Spurious Emissions Graphs


LCH



MCH



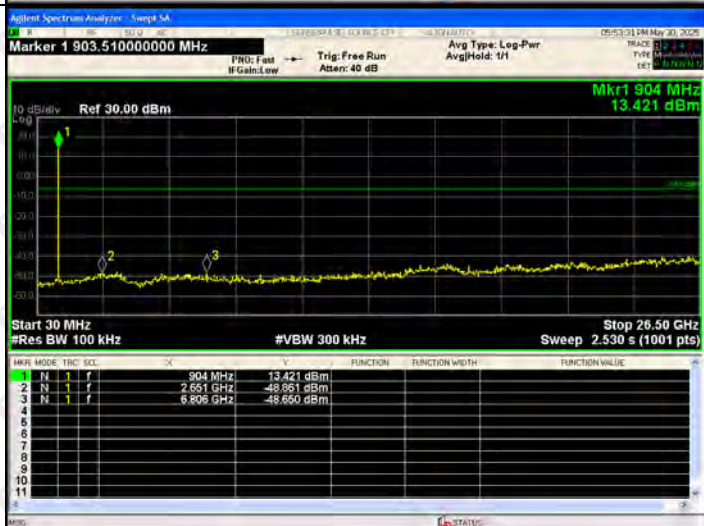


HCH

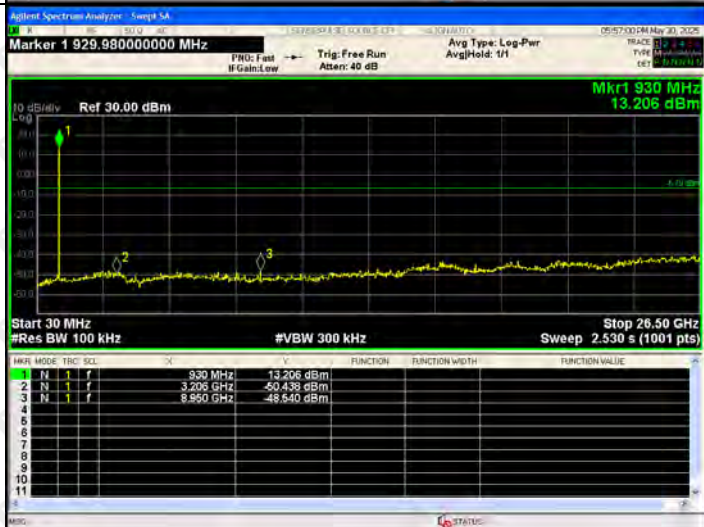


ANT4:

BAND EDGE Graphs

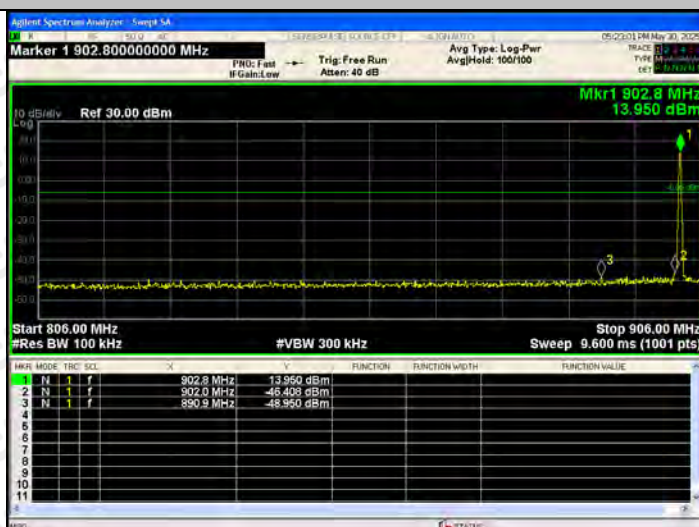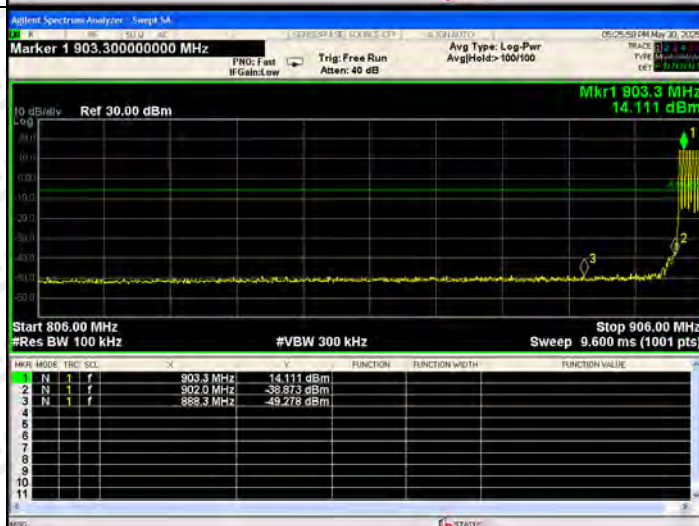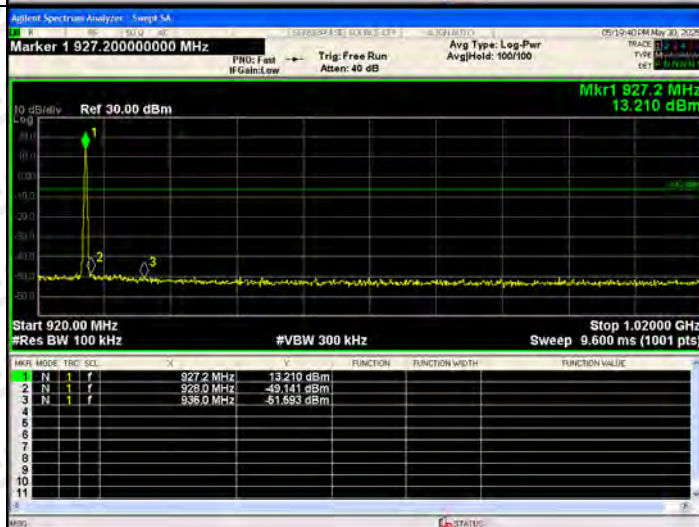
LCH/
No Hop

LCH/
Hop

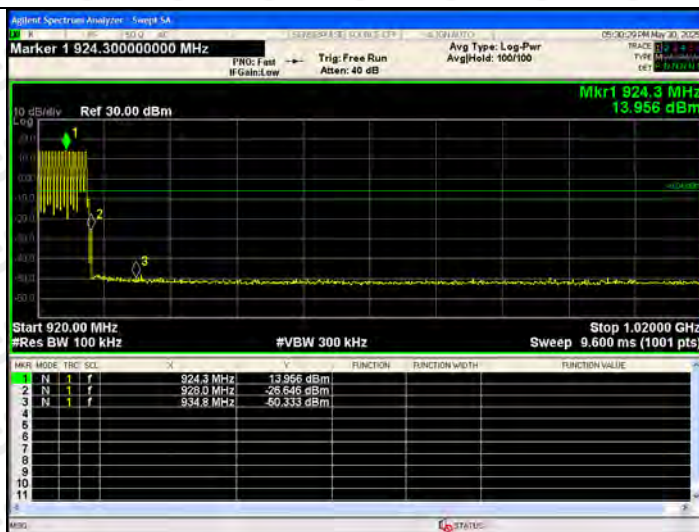HCH/
No Hop


HCH/
Hop

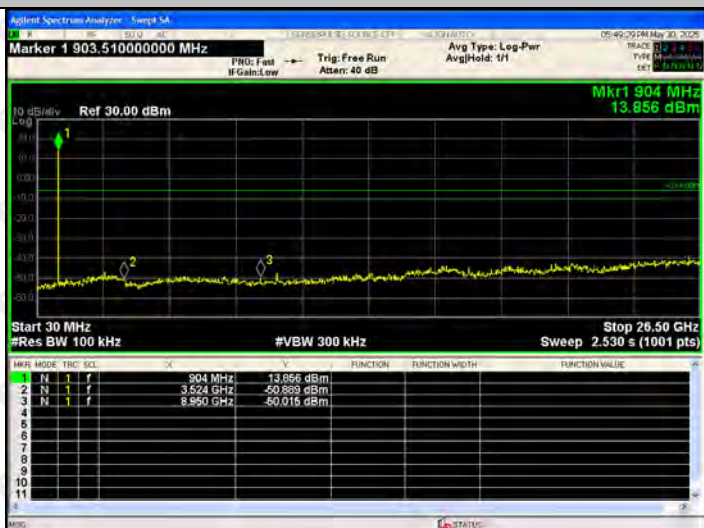


RF Conducted Spurious Emissions Graphs


LCH



MCH

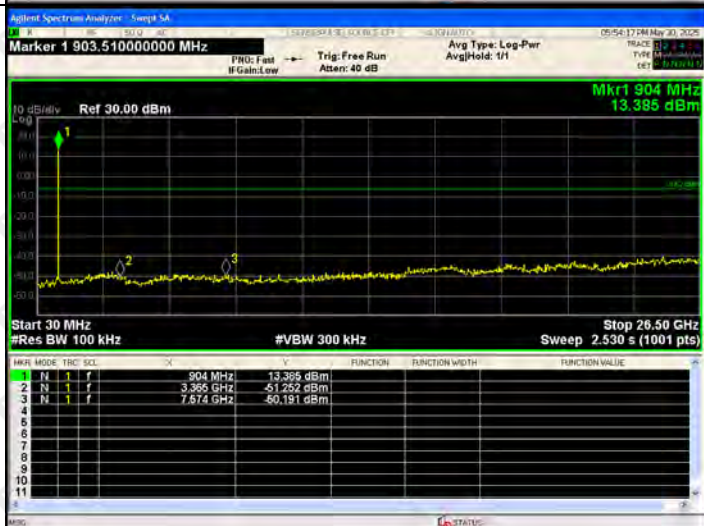


HCH

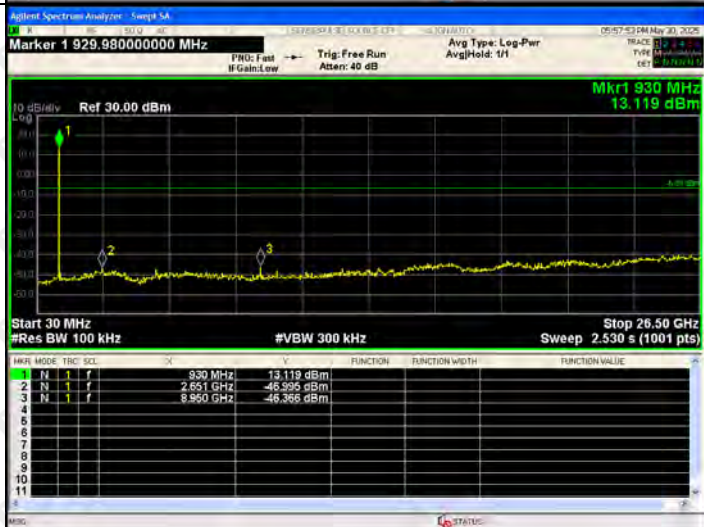

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

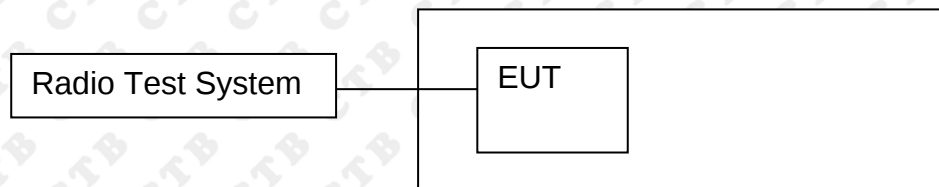

9.2 Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Peak output Power: <1W=30dBm

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.


9.4 Test Result

Antenna Gain: 9dBi

ANT1+ ANT2+ ANT3+ ANT4:

Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Maximum Peak Power [dBm] ant 3	Maximum Peak Power [dBm] ant 4	Total Power Peak Output Power(dBm)	Limit [dBm]	Verdict
LCH	14.457	14.399	14.355	14.334	29.407	30	PASS
MCH	13.996	13.889	13.871	13.848	28.921	30	PASS
HCH	14.560	13.729	14.870	13.617	29.247	30	PASS


Test Graph:
ANT1:

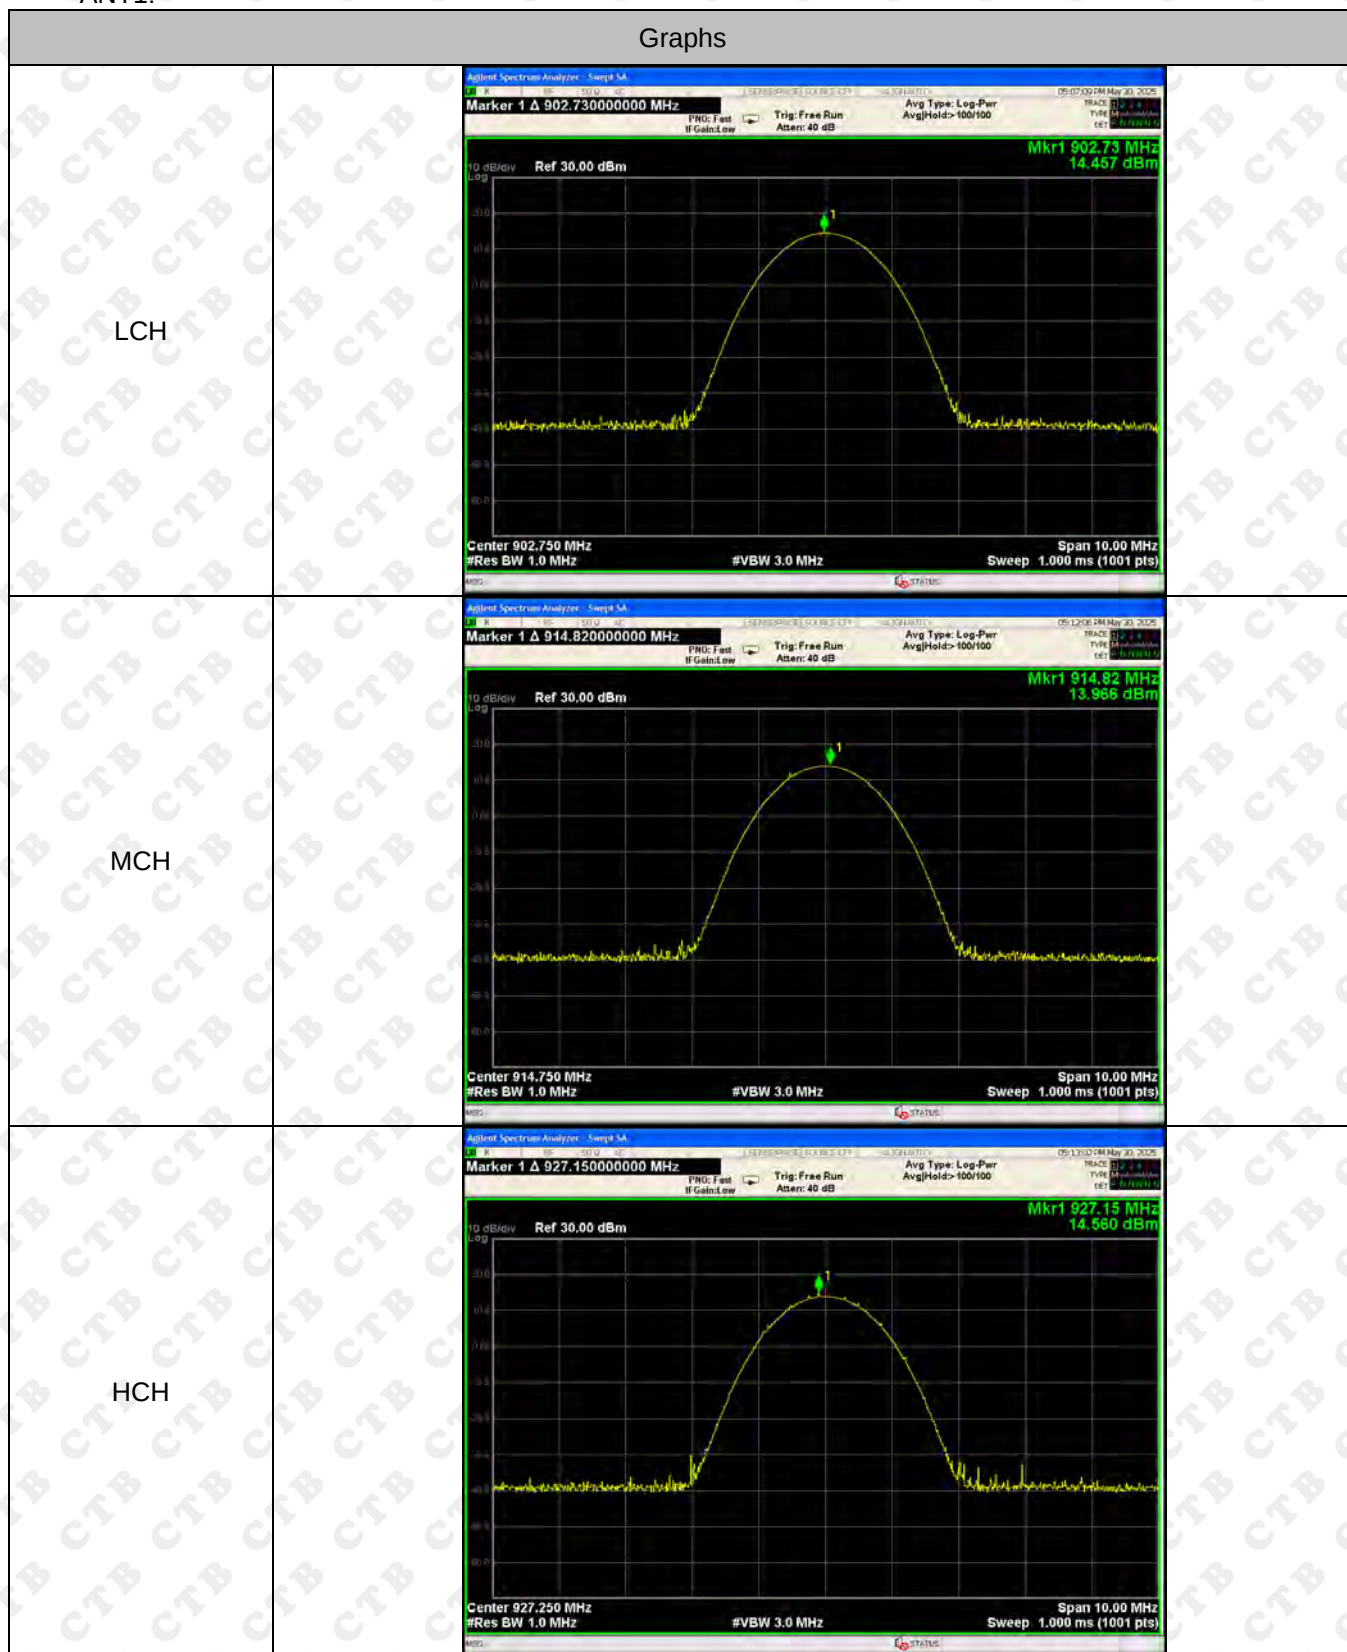


ANT2:

Graphs


LCH

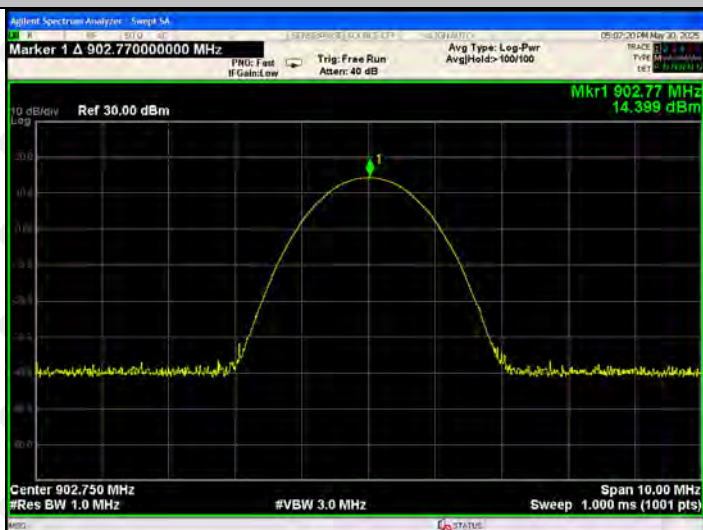

MCH

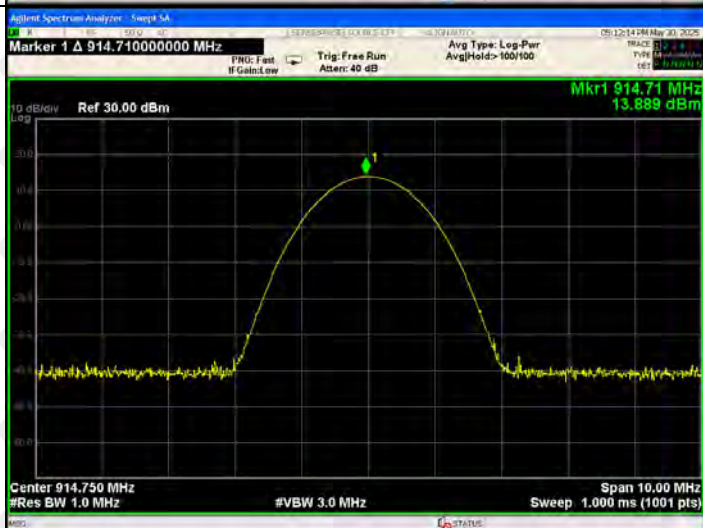


HCH

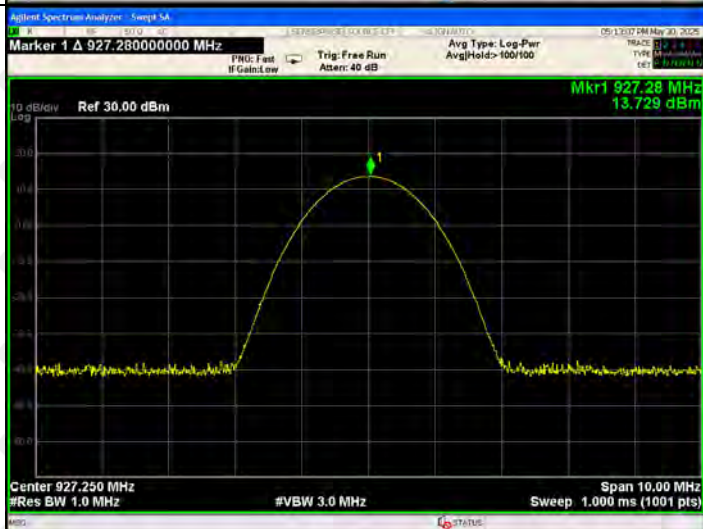


ANT3:

Graphs

LCH

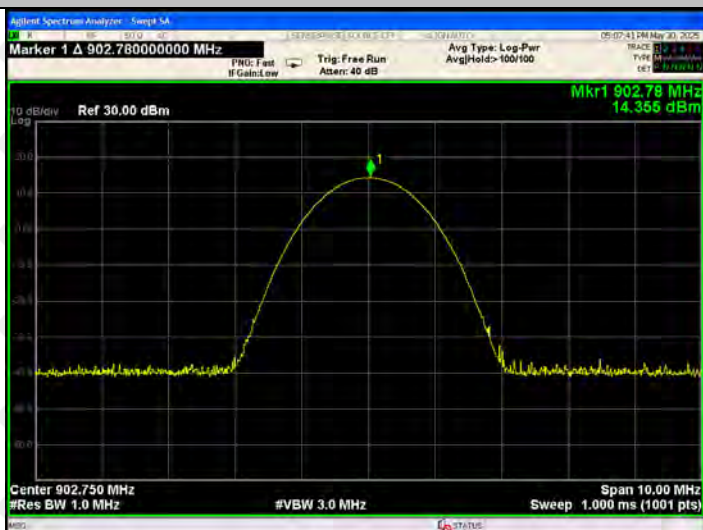

MCH

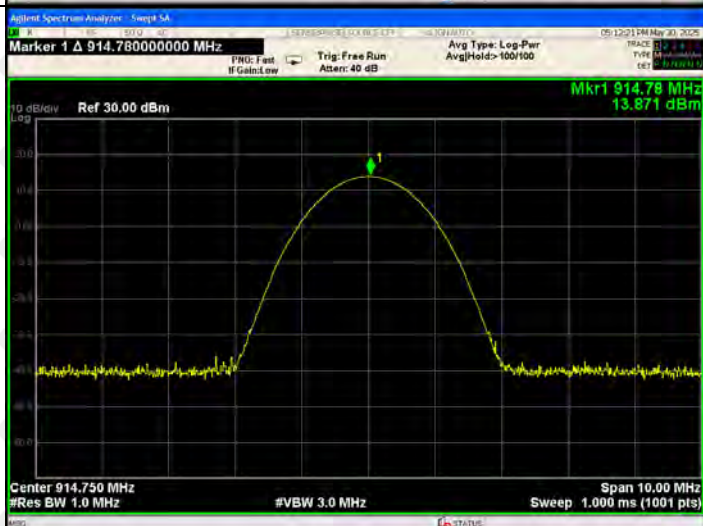


HCH




ANT4:

Graphs

LCH

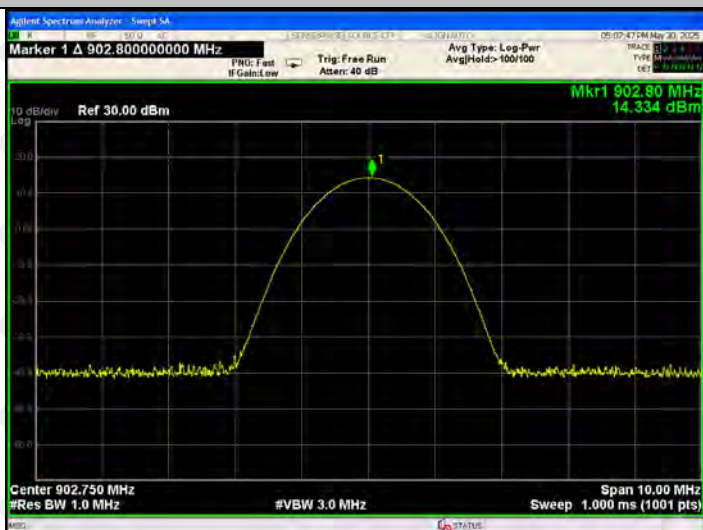

MCH

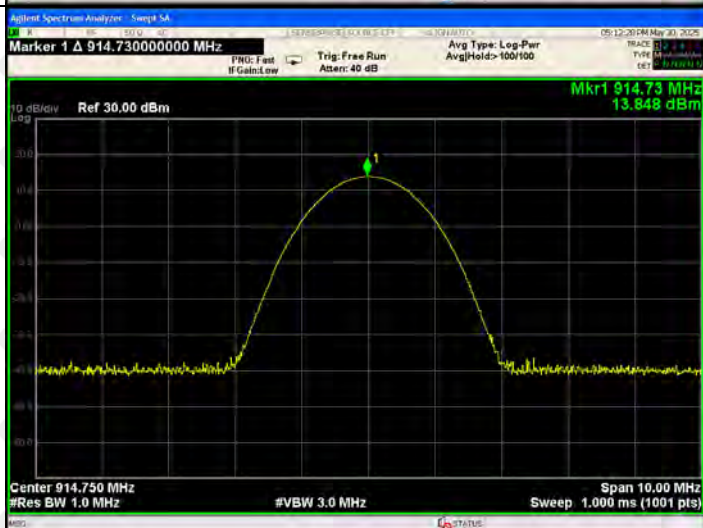


HCH



10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

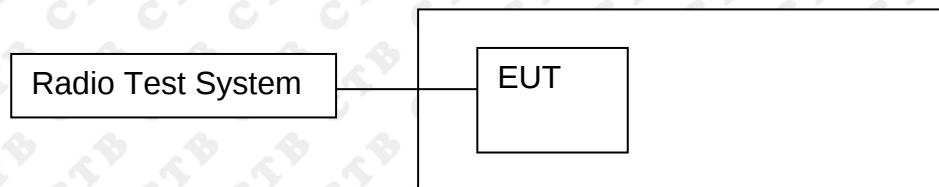

10.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

10.3 Test procedure

1. Rem1. Set RBW = 10 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak. Span=500KHz
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Frequency	20dB Bandwidth (kHz)	Result
Low channel	102.3	PASS
Mid channel	102.3	PASS
High channel	54.33	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

ANT2:

Frequency	20dB Bandwidth (kHz)	Result
Low channel	101.6	PASS
Mid channel	101.3	PASS
High channel	102.1	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

ANT3:

Frequency	20dB Bandwidth (kHz)	Result
Low channel	102.0	PASS
Mid channel	101.8	PASS
High channel	102.1	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

ANT4:


Frequency	20dB Bandwidth (kHz)	Result
Low channel	101.8	PASS
Mid channel	100.6	PASS
High channel	102.5	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.




Test Graph:
ANT1:

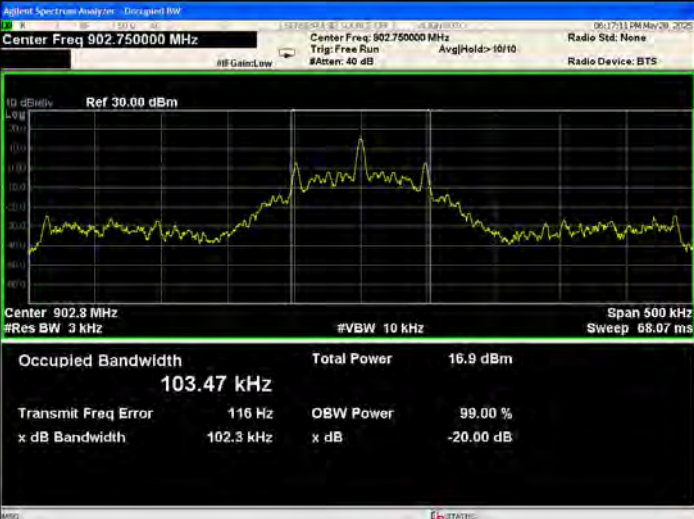Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 902.750000 MHz Center Freq: 902.750000 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 902.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 103.47 kHz Total Power 16.9 dBm Transmit Freq Error 116 Hz OBW Power 99.00 % x dB Bandwidth 102.3 kHz x dB -20.00 dB
Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 914.750000 MHz Center Freq: 914.750000 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 914.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 103.58 kHz Total Power 16.6 dBm Transmit Freq Error 78 Hz OBW Power 99.00 % x dB Bandwidth 102.3 kHz x dB -20.00 dB
High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 927.250000 MHz Center Freq: 927.250000 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 927.3 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 98.345 kHz Total Power 13.9 dBm Transmit Freq Error 429 Hz OBW Power 99.00 % x dB Bandwidth 54.33 kHz x dB -20.00 dB


ANT2:

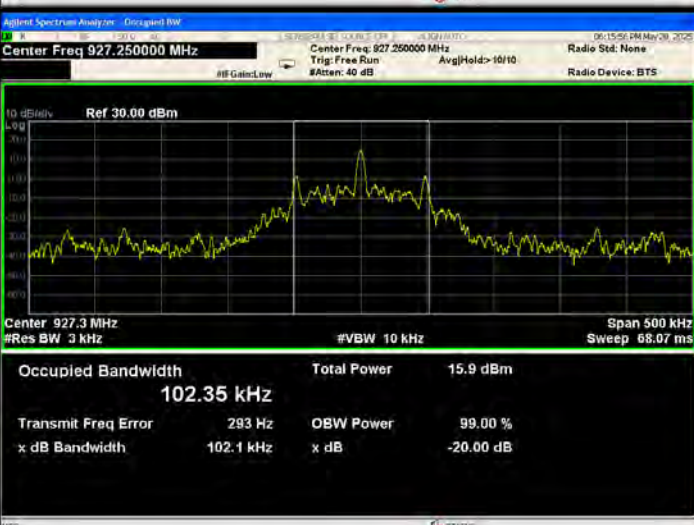Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 902.750000 MHz Center Freq: 902.750000 MHz Trig: Free Run Avg: Hold-10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 902.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.64 kHz Total Power 16.4 dBm Transmit Freq Error 111 Hz OBW Power 99.00 % x dB Bandwidth 101.6 kHz x dB -20.00 dB
Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 914.750000 MHz Center Freq: 914.750000 MHz Trig: Free Run Avg: Hold-10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 914.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.67 kHz Total Power 16.2 dBm Transmit Freq Error 43 Hz OBW Power 99.00 % x dB Bandwidth 101.3 kHz x dB -20.00 dB
High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 927.250000 MHz Center Freq: 927.250000 MHz Trig: Free Run Avg: Hold-10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 927.3 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.35 kHz Total Power 15.9 dBm Transmit Freq Error 293 Hz OBW Power 99.00 % x dB Bandwidth 102.1 kHz x dB -20.00 dB

ANT3:

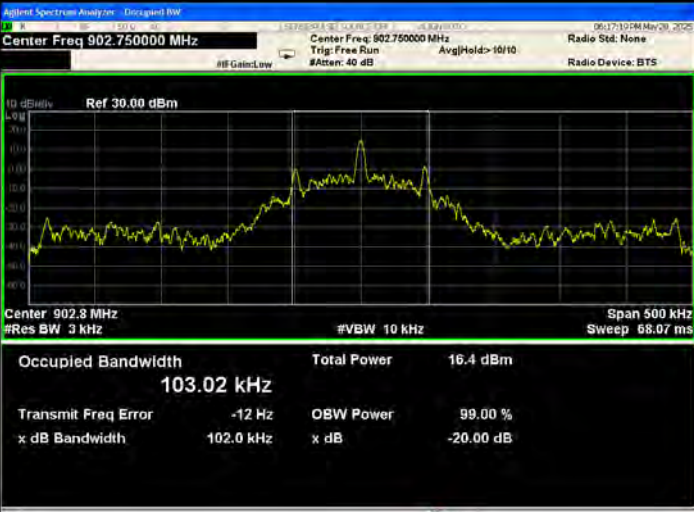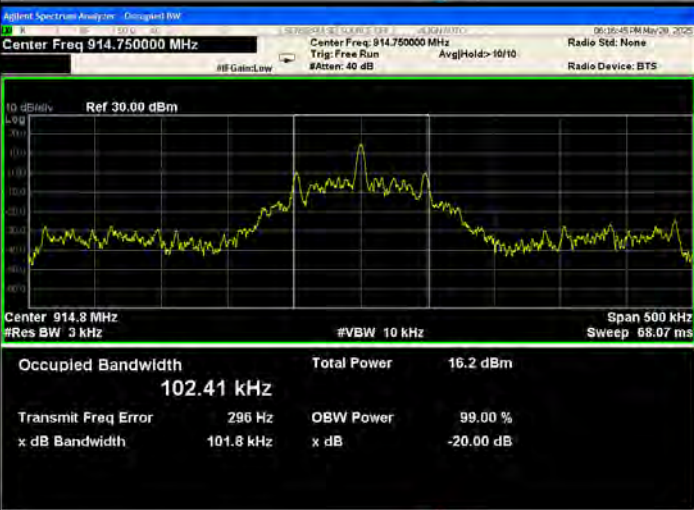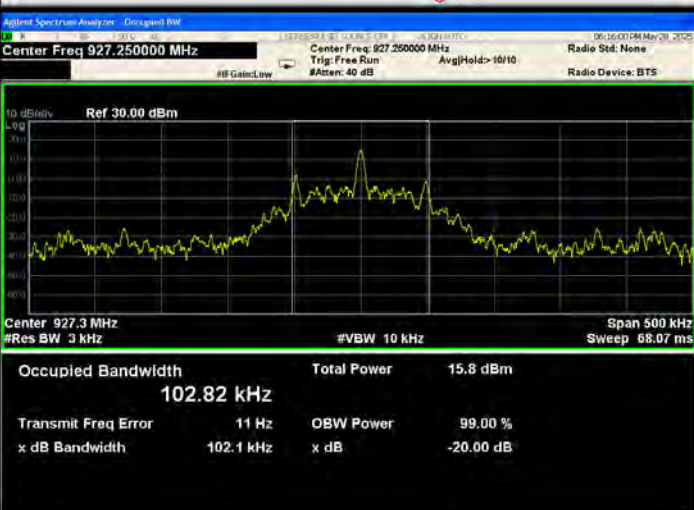
Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 902.750000 MHz Center Freq: 902.750000 MHz Trig: Free Run Avg: Hold->10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 902.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 103.02 kHz Total Power 16.4 dBm Transmit Freq Error -12 Hz OBW Power 99.00 % x dB Bandwidth 102.0 kHz x dB -20.00 dB
Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 914.750000 MHz Center Freq: 914.750000 MHz Trig: Free Run Avg: Hold->10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 914.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.41 kHz Total Power 16.2 dBm Transmit Freq Error 296 Hz OBW Power 99.00 % x dB Bandwidth 101.8 kHz x dB -20.00 dB
High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 927.250000 MHz Center Freq: 927.250000 MHz Trig: Free Run Avg: Hold->10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 927.3 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.82 kHz Total Power 15.8 dBm Transmit Freq Error 11 Hz OBW Power 99.00 % x dB Bandwidth 102.1 kHz x dB -20.00 dB

ANT4:

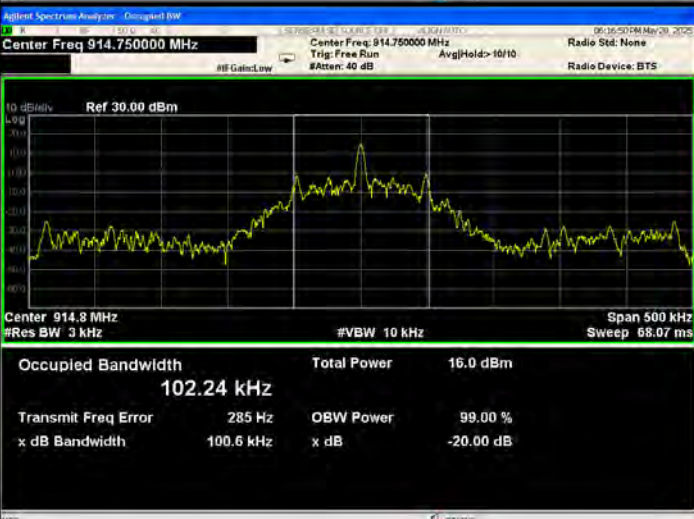Low channel	 Adjusted Spectrum Analyzer - Occupied BW Center Freq 902.750000 MHz Center Freq: 902.750000 MHz Trig: Free Run #Att: 40 dB Avg: Hold-10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 902.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 101.83 kHz Total Power 16.4 dBm Transmit Freq Error -46 Hz OBW Power 99.00 % x dB Bandwidth 101.8 kHz x dB -20.00 dB
Mid channel	 Adjusted Spectrum Analyzer - Occupied BW Center Freq 914.750000 MHz Center Freq: 914.750000 MHz Trig: Free Run #Att: 40 dB Avg: Hold-10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 914.8 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.24 kHz Total Power 16.0 dBm Transmit Freq Error 285 Hz OBW Power 99.00 % x dB Bandwidth 100.6 kHz x dB -20.00 dB
High channel	 Adjusted Spectrum Analyzer - Occupied BW Center Freq 927.250000 MHz Center Freq: 927.250000 MHz Trig: Free Run #Att: 40 dB Avg: Hold-10/10 Radio Std: None Radio Device: BTS Ref 30.00 dBm Center 927.3 MHz #Res BW 3 kHz #VBW 10 kHz Span 500 kHz Sweep 68.07 ms Occupied Bandwidth 102.34 kHz Total Power 15.7 dBm Transmit Freq Error 59 Hz OBW Power 99.00 % x dB Bandwidth 102.5 kHz x dB -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

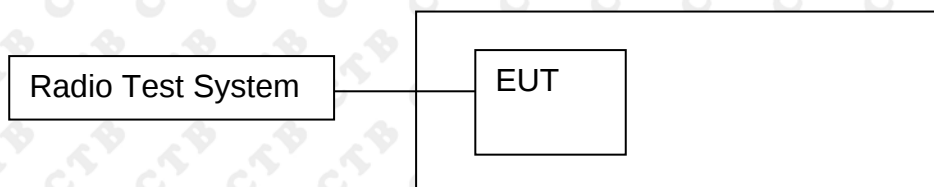

11.2 Limit

At least 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 10kHz. VBW = 30kHz, Span = 1.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

ANT1:

Channel.	Carrier Frequency Separation [MHz]	Verdict
LCH	0.500	PASS
MCH	0.500	PASS
HCH	0.500	PASS

ANT2:

Channel.	Carrier Frequency Separation [MHz]	Verdict
LCH	0.500	PASS
MCH	0.498	PASS
HCH	0.502	PASS

ANT3:

Channel.	Carrier Frequency Separation [MHz]	Verdict
LCH	0.500	PASS
MCH	0.497	PASS
HCH	0.499	PASS

ANT4:

Channel.	Carrier Frequency Separation [MHz]	Verdict
LCH	0.501	PASS
MCH	0.499	PASS
HCH	0.501	PASS

Test Graph

ANT1:

Graphs

LCH



MCH



HCH



ANT2:

Graphs

LCH



MCH



HCH



ANT3:

Graphs

LCH



MCH



HCH



ANT4:

Graphs

LCH



MCH




HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

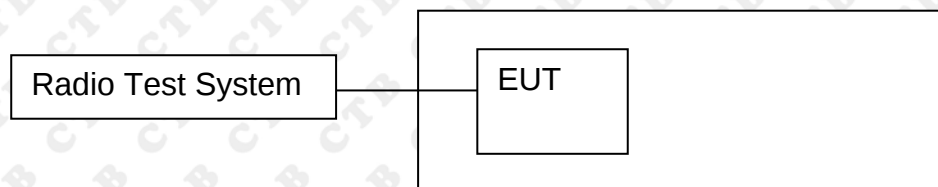

12.2 Limit

Frequency hopping systems in the 920-928 MHz band shall use at least 50 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


ANT1:

Mode	Channel.	Number of Hopping Channel	Verdict
ASK	Hop	50	PASS

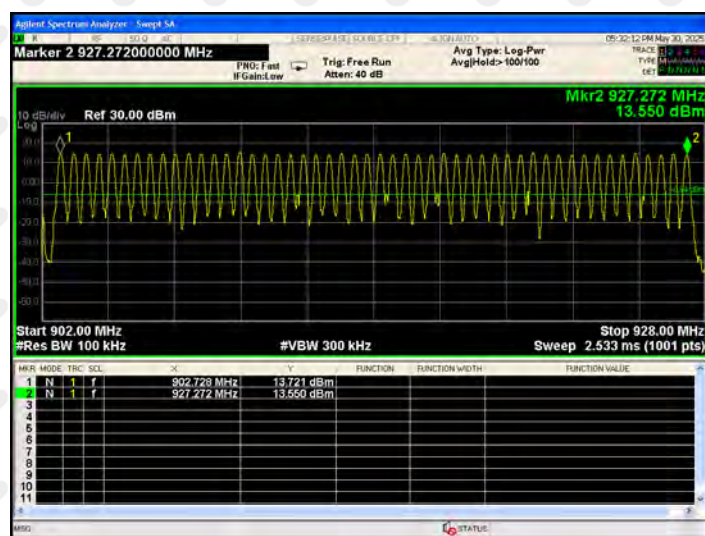


ANT2:

Mode	Channel.	Number of Hopping Channel	Verdict
ASK	Hop	50	PASS

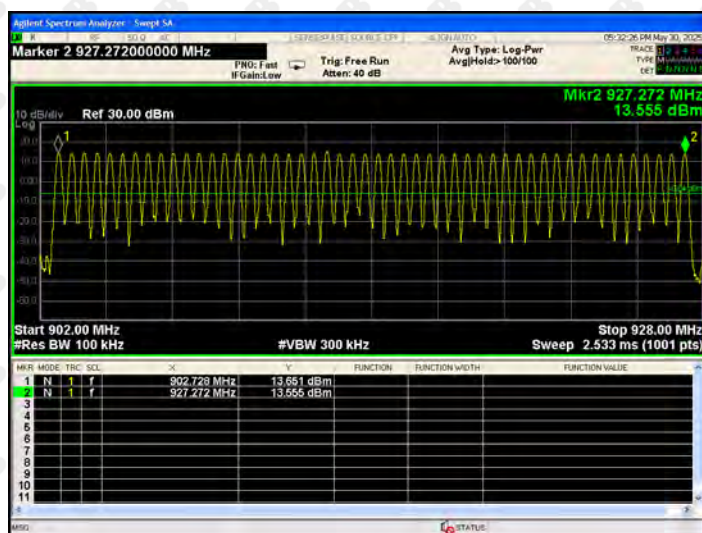


ANT3:

Mode	Channel.	Number of Hopping Channel	Verdict
ASK	Hop	50	PASS

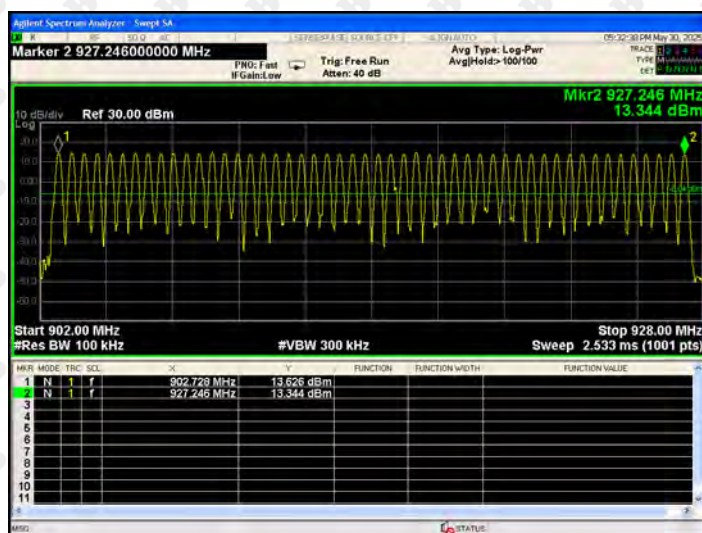


ANT4:

Mode	Channel.	Number of Hopping Channel	Verdict
ASK	Hop	50	PASS

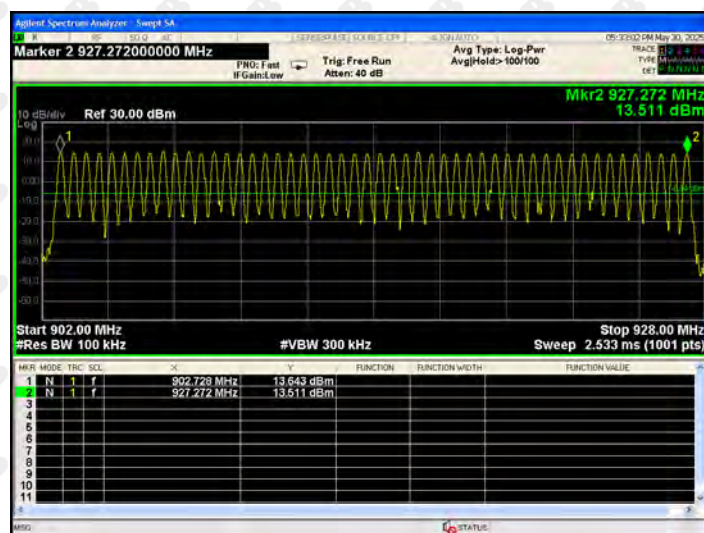

13. DWELL TIME

13.1 Block Diagram Of Test Setup

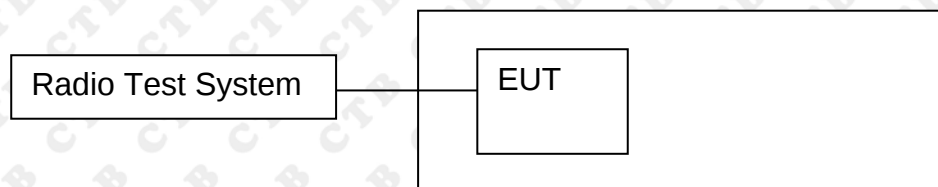

13.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

ANT1:

Channel	No. of transmission in 20s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	10	29.50	295	400	PASS
MCH	10	31.00	310	400	PASS
HCH	10	31.00	310	400	PASS

Remark: Total dwell time in 20s, c=(a)*(b)

ANT2:

Channel	No. of transmission in 20s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	10	29.50	295	400	PASS
MCH	10	29.50	295	400	PASS
HCH	10	29.50	295	400	PASS

Remark: Total dwell time in 20s, c=(a)*(b)

ANT3:

Channel	No. of transmission in 20s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	10	29.00	290	400	PASS
MCH	9	29.50	265.5	400	PASS
HCH	9	29.00	261	400	PASS

Remark: Total dwell time in 20s, $c=(a)*(b)$

ANT4:

Channel	No. of transmission in 20s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	9	29.50	265.5	400	PASS
MCH	10	29.00	290	400	PASS
HCH	9	29.50	265.5	400	PASS

Remark: Total dwell time in 20s, $c=(a)*(b)$

Test Graph

ANT1:

Graphs




ANT2:

Graphs




ANT3:

Graphs

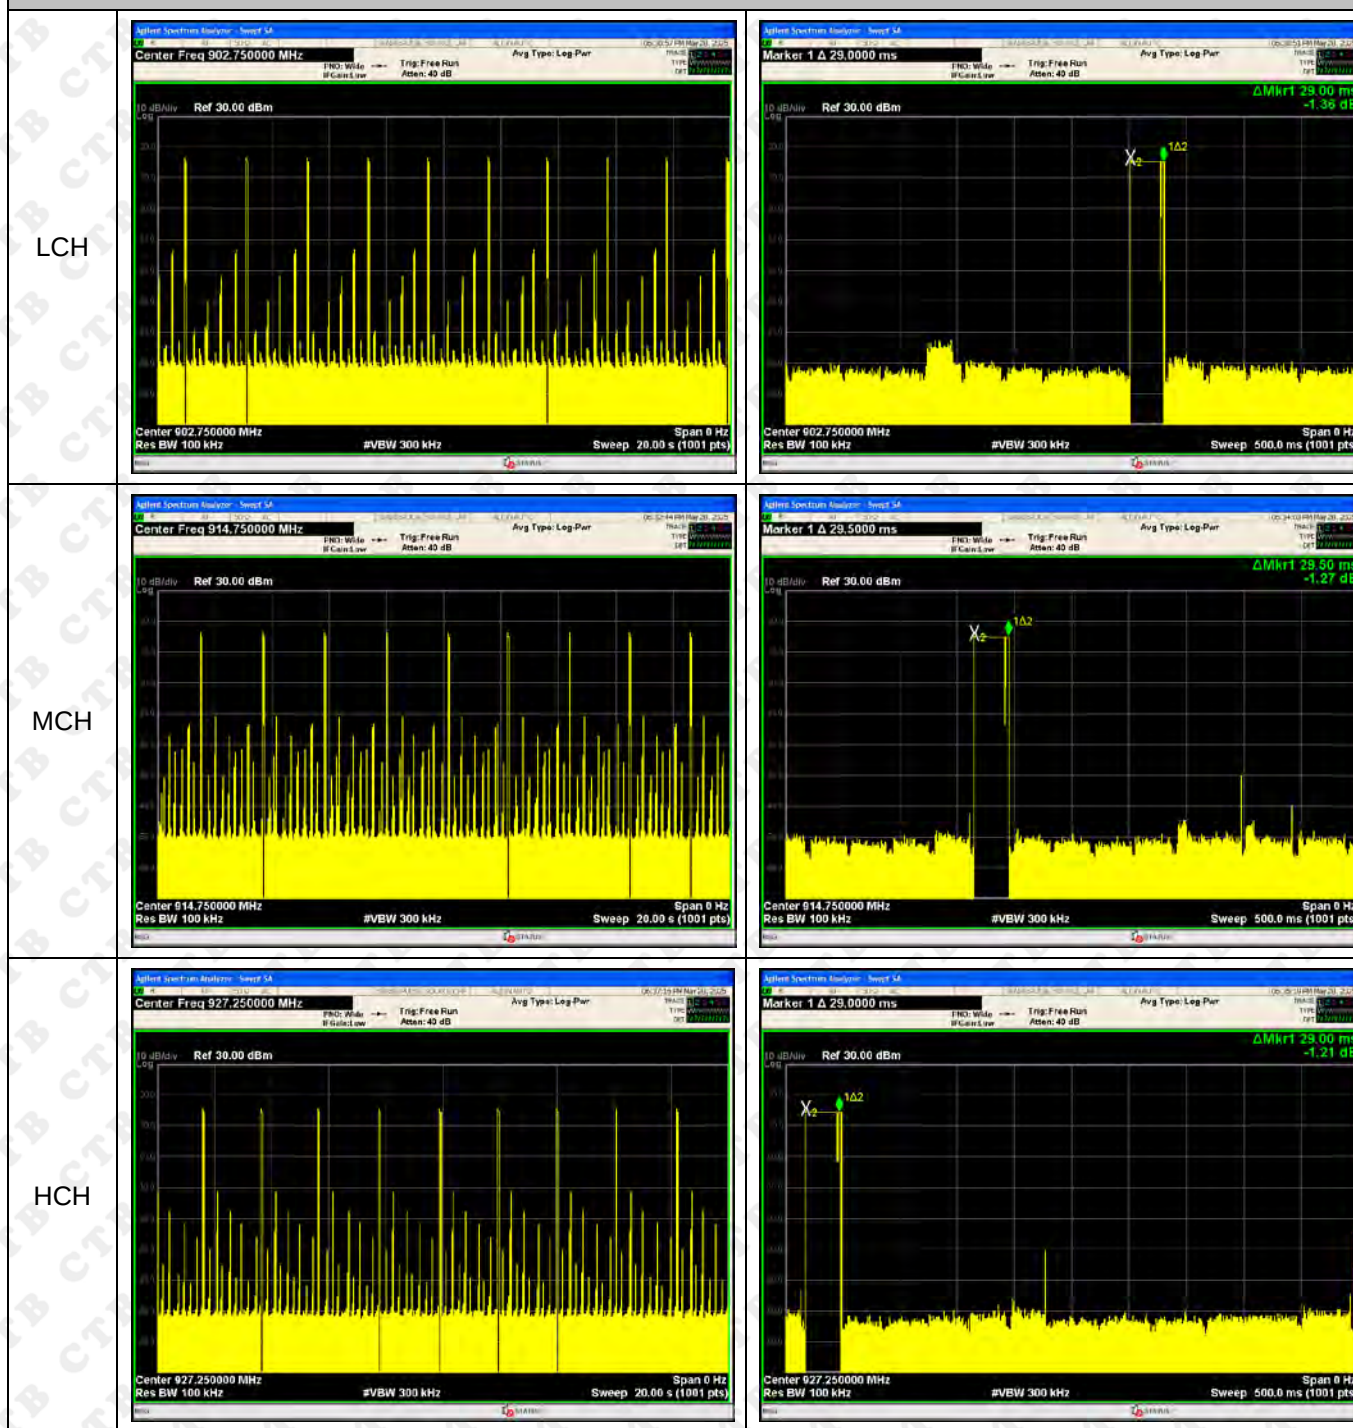

ANT4:

Graphs

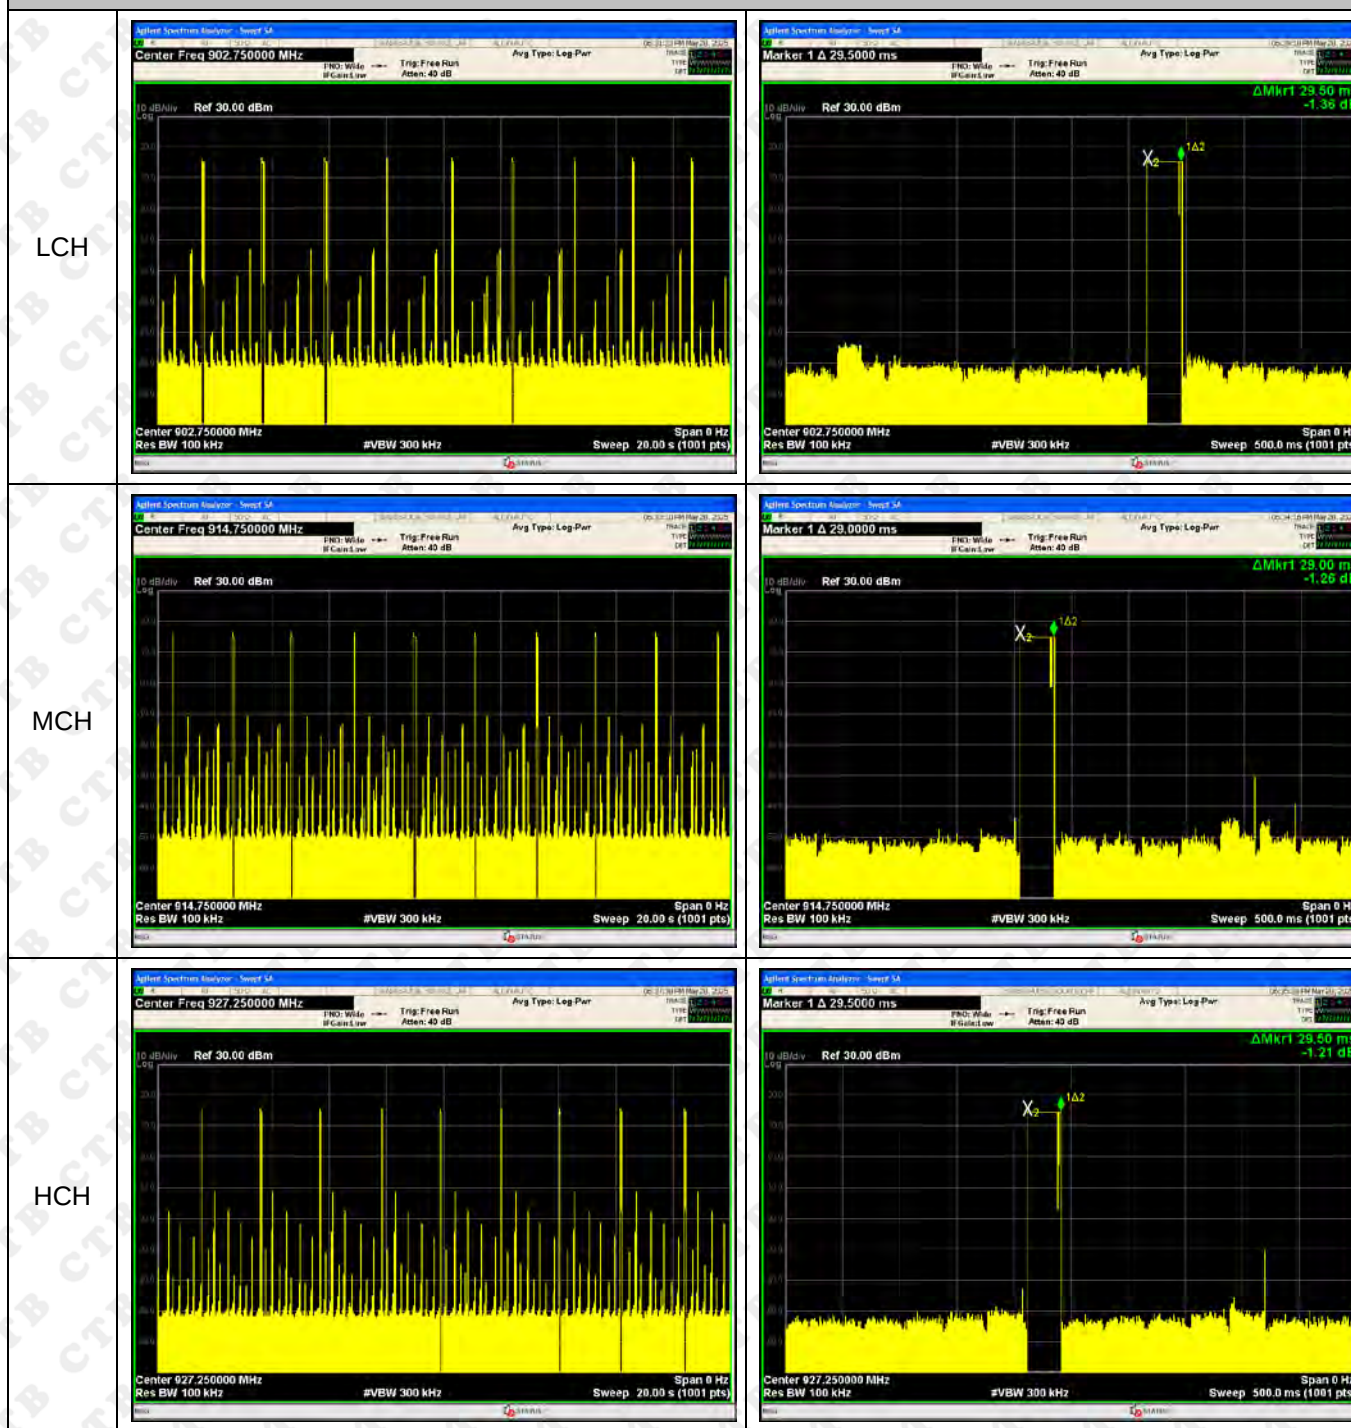

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is Ant 1: 9dBi, Ant 2: 9dBi, Ant 3: 9dBi, Ant 4: 9dBi

15. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

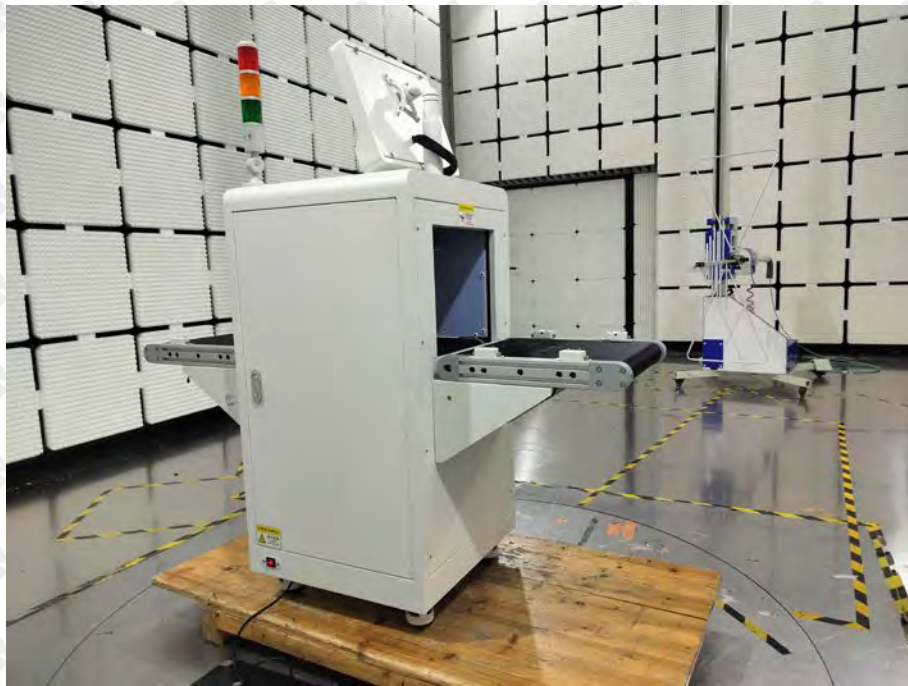

Above 1G



Conducted emission



***** END OF REPORT *****