



EMISSION -- TEST REPORT

Test Report File No. : **T 22691-00-00 HU** Date of issue : June 24, 2003

Type Designation : Liberty P2

Family variations : GX TX, GX RX, PX TX, PX RX, QX TX, QX RX, ILX-C TX, ILX-C RX, ILX-C Short TX, ILX-C Short RX

Kind of Product : Electronic Article Surveillance Detection System

Applicant : Checkpoint Systems, Inc.

Manufacturer : Pikatron Feinwerktechnik GmbH&Co. KG

Licence holder : Checkpoint Systems, Inc.

Address : 101 Wolf Drive, Thorofare

New Jersey 08086

Test result accdg. to the regulation(s) at page 3 :

Positive

This test report with attachment consists of **73** pages.
The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

DIRECTORY

	Page
 <u>Documentation</u>	
Directory	<u>2</u>
Test regulations	<u>3</u>
General information	<u>4-5</u>
Discovery of worst case condition	<u>6</u>
Ferrite location	<u>7-11</u>
Equipment under Test	<u>19</u>
Summary	<u>20</u>
 <u>Test data</u>	
Conducted emissions 10/150 kHz - 30 MHz	<u>12</u>
Spurious emissions (magnetic field) 9 kHz - 30 MHz	<u>13-14</u>
Spurious emissions (electric field) 30 MHz - 1000 MHz	<u>15</u>
Spurious emissions (electric field) 1 GHz - 18 GHz	<u>16</u>
Radiated power of the fundamental wave	<u>17</u>
Conducted power of the fundamental wave measured on the antenna terminals	<u>18</u>
 <u>Attachment</u>	
A) Test data	<u>A1-A4</u>
B) List of Test Equipment	<u>B1</u>
C) Photos of the test setup	<u>C1-C3</u>
D) Technical description of the test sample (e.g. CDF, Declaration)	<u>D1-D4</u>
E) Photos of the EuT	<u>E1-E41</u>
F) Measurement Protocol for FCC, VCCI and AUSTEL	<u>--</u>

TEST REGULATIONS

The tests were performed according to following regulations :

- o - EN 50081-1 / 2.1991
- o - EN 50081-2 / 7.1993

-
- o - EN 55011 / 3.1991

- o - Group 1
- o - class A
- o - Group 2
- o - class B

- o - EN 55014 / 4.1993

- o - Household appliances and similar
- o - tools
- o - Semiconductor devices

- o - EN 55014 / A2:1990
- o - EN 55104 / 5.1995

Category:

- o - EN 55015 / A1:1990
- o - EN 55015 / 12.1993

- o - EN 55022 / 5.1995

- o - class A
- o - class B

- o - prEN 55103-1 / 3.1995
- o - prEN 50121-3-2 / 3.1995
- o - EN 60601-1-2 / 4.1994

- o - VCCI

- o - class 1
- o - class 2

- - Part 15 Subpart C (15.223)
- o - Part 15 Subpart C (15.231)

ADDRESS OF THE TEST LABORATORY

■ - MIKES BABT PRODUCT SERVICE GmbH
Ohmstrasse 2-4
D - 94342 Strasskirchen

o - _____

ENVIRONMENTAL CONDITIONS

Temperature: 15-35 ° C

Humidity 45-60 %

Atmospheric pressure 860-1060 mbar

POWER SUPPLY SYSTEM UTILIZED

Power supply system ■ 110V/60 Hz / 1 ϕ o V DC
 o 400V/50 Hz 3PE o 400V/50 Hz 3NPE

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report accdg. to UKAS LAB34 and is documented in the MIKES BABT Product Service quality system accdg. to EN ISO/IEC 17025:2000. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EuT)

The LIBERTY Family are an Electronic Article Surveillance System (EAS). The system detects target tags attached to merchandise. The targets resonate in the region of 8.2 MHz or 9.5MHz. When an article of merchandise is purchased, the target is deactivated which causes it to no longer resonate. The LIBERTY Family system monitors an area 3-feet on either side of the antenna in the 7.4 to 10.0 MHz range, and triggers an alarm when a non-deactivated target is detected.

Number of received/tested samples: **5 / 5**

Serial Number: **see attachment D1**

DEFINITIONS FOR SYMBOLS USED IN THIS TEST REPORT

■ The black square indicates that the listed condition, standard or equipment is applicable for this report.

o Blank box indicates that the listed condition, standard or equipment was not applicable for this report.

MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL

Test Methodology

Conducted and radiated emission testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1993), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1993). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-1992 procedures and using the FCC limits or the CISPR 22 Limits.

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EuT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

General Standard Information

The test methods used comply with CISPR Publication 22 (1993), EN 55022 (1987) and AS 3548 (1992) - "Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment" and with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

For detailed description of each measurement please refer to section test results.

DISCOVERY OF WORST CASE MEASUREMENT CONDITION:

The model Liberty P2 consists of 5 different versions
LIBERTY GX, LIBERTY PX, LIBERTY QX, LIBERTY ILX-C, LIBERTY ILX-C Short,
All 5 versions are technically identical except the following items:

- different type of antennas GX, PX, QX, ILX-C, ILX-C Short,
- two different type of power supply units (Worldwide 224 Module and Worldwide 425 Module)
- ILX-C, ILX-C Short have additional a matching board. For more detailed information,
- please see technical documentation set.

To find out the worst case conditions for the complete measurements the following tests have been performed:

- Measurement of the conducted emissions of the 5 versions. This measurement have been performed in order to find out the maximum spurious emissions of the transmitter (antenna).
- Measurement of the radiated fieldstrength of the operating frequency of the 5 versions. This measurement have been performed in order to find out the transmitter (antenna) with the maximum fieldstrength.
- Measurement of the radiated spurious emissions of the 5 versions. This measurement have been performed in order to find out the maximum spurious emissions of the transmitter (antenna).

Summarizing:

- ⇒ maximum conducted emission: LIBERTY QX (difference to LIBERTY GX: 2.8 dB)
- ⇒ maximum fieldstrength: LIBERTY PX (difference to LIBERTY GX: 0.1 dB)
- ⇒ maximum spurious emission: LIBERTY GX
- ⇒ bandwidth plots: no essential differences on the 5 versions



Based on this test results, the measurements have been performed completely on the version: LIBERTY GX with power supply worldwide 425 Module. This test results are documented in the following sections of the testreport.

Ferrite Locations:

1. Fair Rite P/N 7118986 (Order No B64290-L618-X35) – Add 1 on GND of L1 with 6 turns of the primary side of the matching board.
2. Fair Rite P/N 734020 (Order No 2865-000-202) – Add 2 on L1, L2, L3 with 1 turn of the primary side of the matching board.
3. Fair Rite P/N 7118986 (Order No B64290-L618-X35) or
Fair Rite P/N 284760 (Order No 0443806406) – Add 1 on the connecting conduit (from matching board to main unit) with 4 turns of the secondary side of the matching board
4. Fair Rite P/N 284760 (Order No 0443806406) or
Fair Rite P/N 7118986 (Order No B64290-L618-X35) – Add 1 on the connecting conduit (from matching board to main unit) with 4 turns of the secondary side of the matching board
5. Fair Rite P/N 734020 (Order No 2865-000-202) – Add 1 on the end of the buzzer connection with 3 turns through the ferrite
6. Fair Rite P/N 734020 (Order No 2865-000-202) – Add 1 on the end of the lamp connection with 2 turns through the ferrite


FCC ID: DO4LIBP2

Liberty GX:

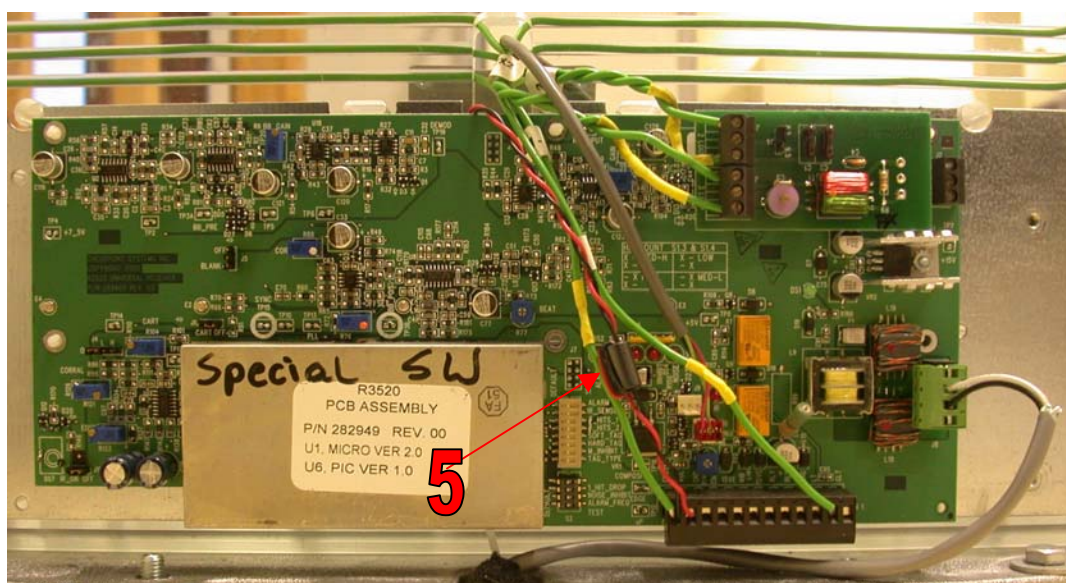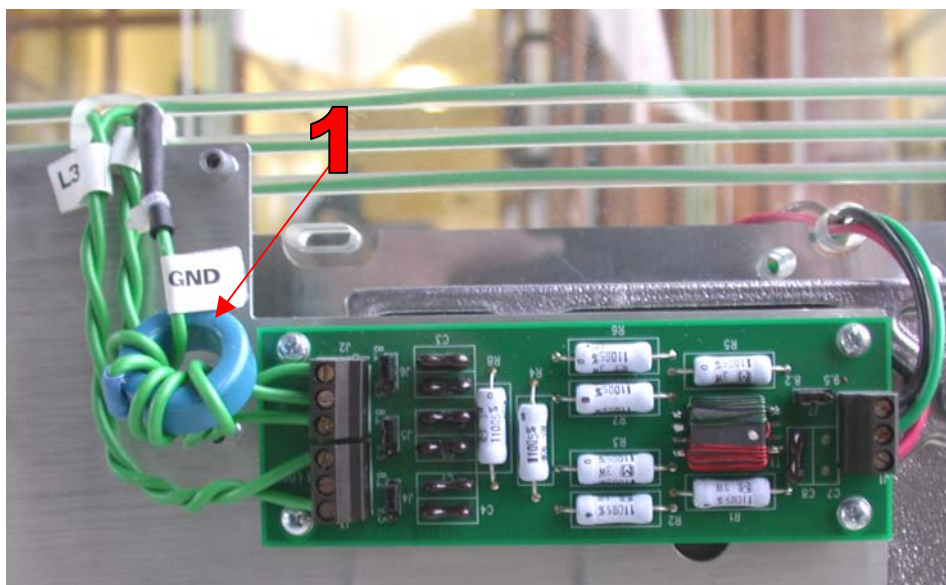


FCC ID: DO4LIBP2

Liberty PX:

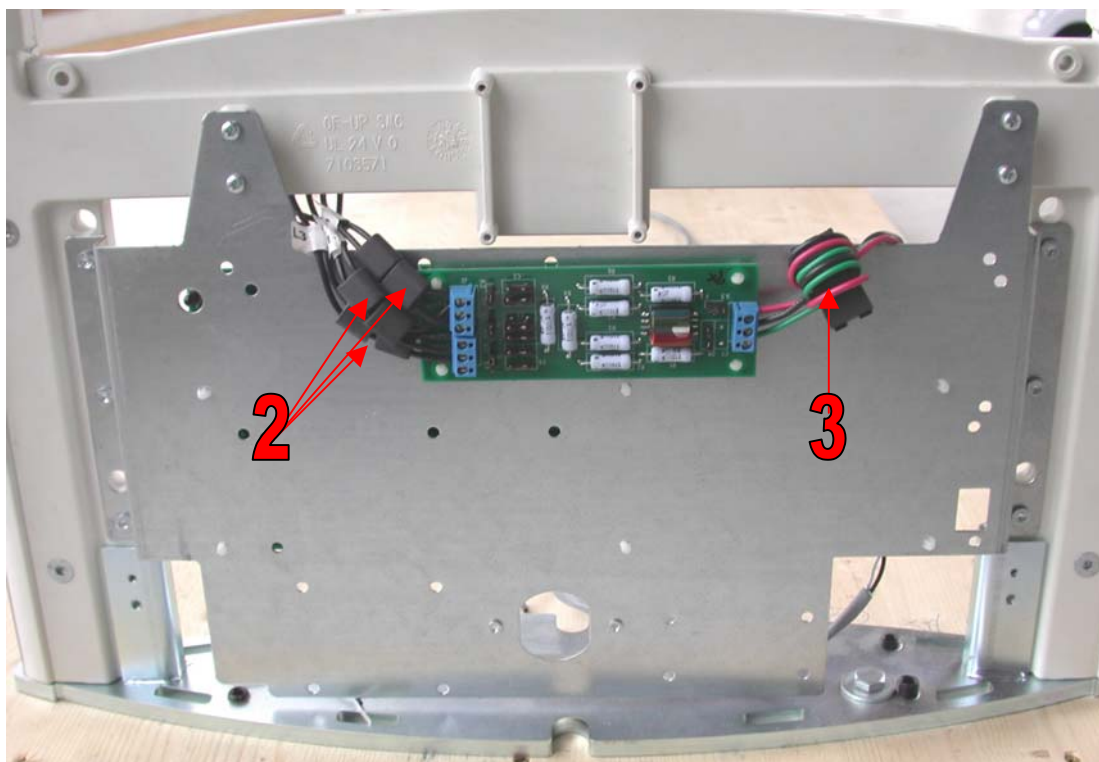


FCC ID: DO4LIBP2

Liberty QX:

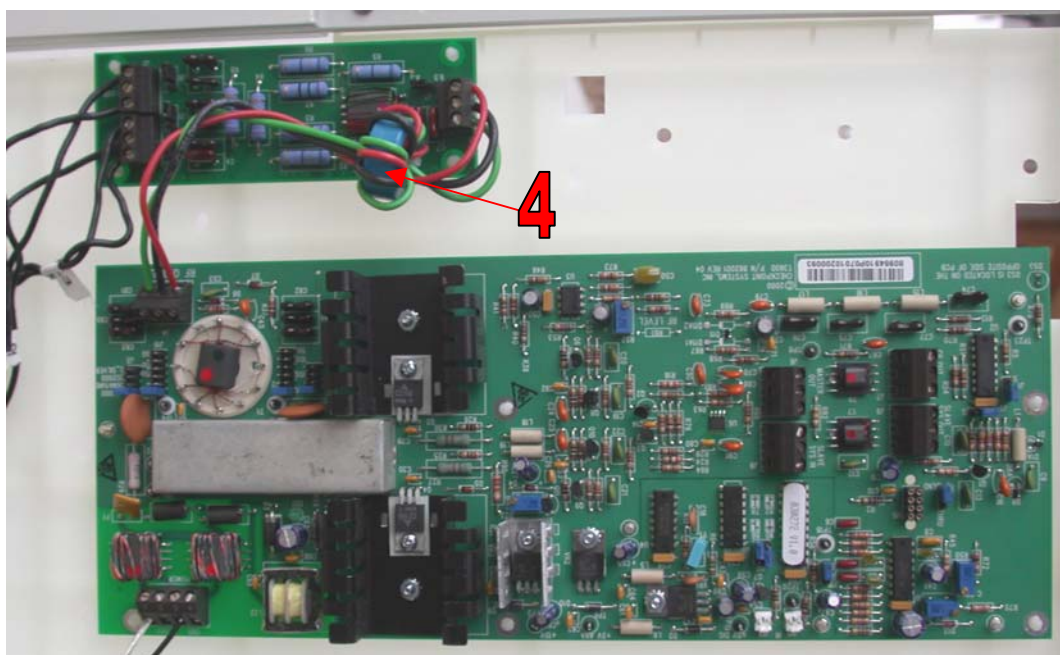


FCC ID: DO4LIBP2

Liberty ILX C:

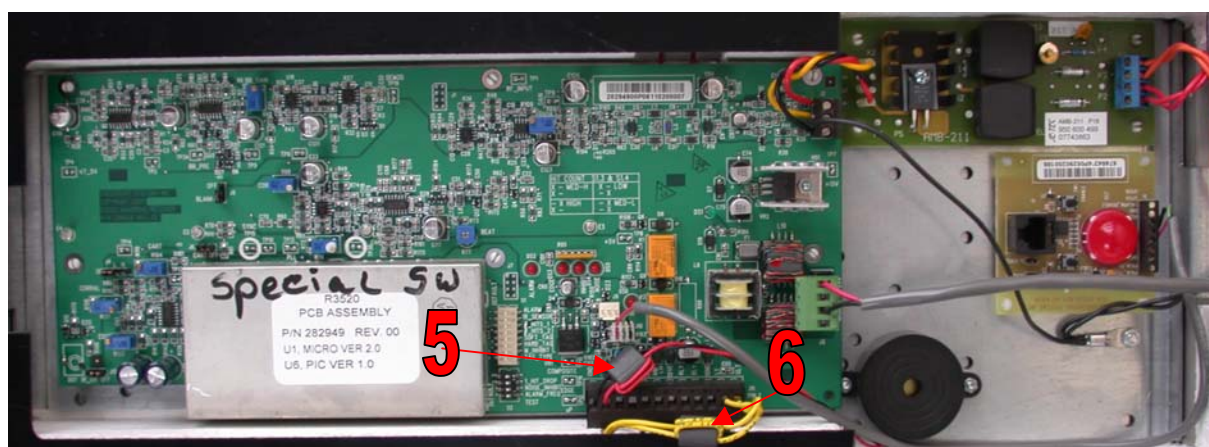

Liberty ILX C Short:

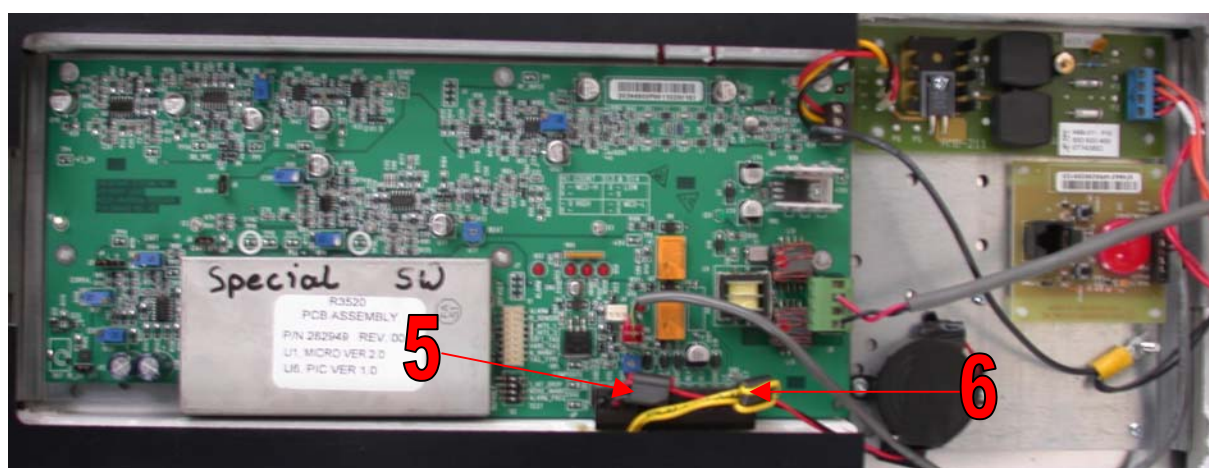

TEST RESULT**CONDUCTED EMISSIONS - 10/150 kHz - 30 MHz**

o - Test not applicable

Test location :

- o - Shielded room no. 1
- - Shielded room no. 2
- o - Shielded room no. 3
- o - Shielded room no. 4
- o - Shielded room no. 5
- o - Shielded room no. 6
- o - Shielded room no. 7
- o - Anechoic chamber
- o - Full compact chamber

For test instruments and test accessories used please see attachment B A4

Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit, which is equivalent to the Australian AS 3548 limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeter's above the floor and is positioned 40 centimeter's from the vertical ground plane (wall) of the screen room. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

Test result:

The requirements are

■ - MET

o - NOT MET

Min. limit margin

11.5 dB at 0.63 MHz

Max. limit exceeding

 dB at MHz

Remarks: The limits are met.

Fore more detailed informations, please see page A1 to A2.

SPURIOUS EMISSION

Spurious emissions from the EuT are measured in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

Spurious emissions from the EuT are measured in the frequency range of 30 MHz to 10 times the highest used frequency using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection, remeasurement of results which may be critical will be repeated in average mode. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

SPURIOUS EMISSION (MAGNETIC FIELD) 9 kHz - 30 MHz

o - Test not applicable

- o - in a shielded room
- - at a non - reflecting open-site and
- - in a test distance of 3 meters.
- - in a test distance of 30 meters.

For test instruments and test accessories used please see attachment B SER1

Description of Measurement

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 10 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	Limit (dB μ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

Testresult in detail:

Liberty GX – 8.2 MHz

Distance: 30m

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]
-	-	-	-	20	-	-	-	-

Liberty GX – 8.2 MHz

Distance: 3m

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]
16.4	38.2	12.0	32.8	20	58.2	32.0	52.8	69.5
24.6	3.4	-1.2	11.4	20	23.4	18.8	31.4	69.5

Liberty GX – 9.5 MHz

Distance: 30m

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]
-	-	-	-	20	-	-	-	-

Liberty GX – 9.5 MHz

Distance: 30m

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]
19.0	38.8	12.5	32.9	20	58.8	32.5	52.9	69.5

The requirements are

■ - MET

○ - NOT MET

Min. limit margin

16.6 dB at 16.4 MHz

Max. limit exceeding

 dB at MHzRemarks: The limits are kept.

SPURIOUS EMISSIONS (electric field) 30 MHz - 1000 MHz

o - Test not applicable

Test location :

- - Open-site 1
- o - Open-site 2
- - 3 meters
- o - 10 meters
- o - 30 meters

For test instruments and test accessories used please see attachment B SER2

Description of Measurement

The final level, expressed in dBµV/m, is arrived by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at this page. The CISPR 22 limit is equivalent to the Australian AS 3548 limit.

Example:

Frequency (MHz)	Level (dBµV)	+	Factor (dB)	=	Level (dBµV/m)	Limit (dBµV/m)	=	Delta (dB)
719	75	+	32.6	=	107.6	110	=	-2.4

Testresult in detail:

Liberty GX

Frequency [MHz]	L: PK [dBµV]	L: AV [dBµV]	L: QP [dBµV]	Correct. [dB]	L: PK [dBµV/m]	L: AV [dBµV/m]	L: QP [dBµV/m]	Limit [dBµV/m]
44.04	30.3	-2.4	25.1	14.7	45.0	12.3	39.8	40
61.72	31.1	-2.6	29.4	8.6	39.7	6.0	38.0	40
79.30	31.3	-3.0	30.6	8.9	71.3	5.9	39.5	40
91.75	29.0	-2.1	30.5	11.5	40.5	9.4	42.0	43.5
123.34	26.5	16.1	19.0	16.7	43.2	9.8	35.7	43.5
123.45	17.8	14.8	13.7	16.7	34.5	31.5	30.4	43.5
187.80	21.1	14.7	10.7	23.4	44.5	38.1	34.1	43.5
195.19	24.6	15.6	4.7	22.9	47.5	38.5	27.6	46.0

Test result:

The requirements are

■ - MET

o - NOT MET

Min. limit margin

0.2 dB at 44.04 MHz

Max. limit exceeding

 dB at MHz

Remarks: The limits are met.

SPURIOUS EMISSION 1 GHz - 18 GHz

■ - Test not applicable

Testlocation :

- o - Open-site 1
- o - Open-site 2
- o - Anechoic chamber
- o - Full compact chamber

- o - 1 meters
- o - 3 meters
- o - 10 meters

For test instruments and test accessories used please see attachment B SER3

Description of Measurement

The final level, expressed in dB μ V/m, is arrived by taking the reading from the Spectrumalyzer in dB μ V and adding the correction factors of the test setup incl. cables.

Example of the correction value at 1.8 GHz

Level reading at 1.8 GHz	Correction EMCO 3115	correction Amplifier AWT 4534 + cable	Correction factor (summarized)	corrected level
56 dB μ V	+27.3 dB	-41.2 dB	-15.8 dB	42.1 dB μ V/m

Testresult in detail:

Frequency [MHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]

Testresult

The requirements are

o - MET

o - NOT MET

Min. limit margin

_____ dB at _____ MHz

Max. limit exceeding

_____ dB at _____ MHz

Remarks: _____
Not applicable

(Transmission frequencies: 8.2 MHz, 9.5 MHz)

FIELD STRENGTH OF THE FUNDAMENTAL WAVE

o - Test not applicable

- - Open-site 1
- o - Open-site 2
- - 3 meters
- o - 10 meters
- - 30 meters

For test instruments and test accessories used please see attachment B CPR1

Description of Measurement

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at this page. The CISPR 22 limit is equivalent to the Australian AS 3548 limit.

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
315	45	+	22.5	=	67.5	-	74.3	=	-6.8

Testresult in detail:

Liberty GX – 8.2 MHz
Distance: 30m

Frequency [MHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]
8.2	39.8	22.1	33.9	20	59.8	42.1	53.9	60

Liberty GX – 9.5 MHz
Distance: 30m

Frequency [MHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]
9.5	39.6	21.6	33.6	20	59.6	41.6	53.6	60

Testresult

The requirements are

■ - MET

o - NOT MET

Min. limit margin

0.2 dB at 8.2 MHz

Max. limit exceeding

 dB at MHz

Remarks: The limits are kept.

CONDUCTED POWER OF THE FUNDAMENTAL WAVE MEASURED ON THE ANTENNA TERMINALS

■ - Test not applicable

Testlocation :

- o - Shielded room no. 1
- o - Shielded room no. 2
- o - Shielded room no. 3
- o - Shielded room no. 4
- o - Shielded room no. 5
- o - Shielded room no. 6
- o - Shielded room no. 7
- o - Anechoic chamber
- o - Full compact chamber
- o - Climatic test chamber VLK

For test instruments and test accessories used please see attachment B CPC2

Description of Measurement

The conducted power of the fundamental wave measured on the antenna terminals in a climatic test chamber. The antenna jack was connected to the input of a communication test receiver. The internal batteries have been removed also and a variable DC power supply was used instead. The measurements have been made with the EuT unmodulated. During the test the supply voltage and the temperature were varied and applied simultaneously. The lower supply voltage was given by the manufacturer. In case the equipment was switching off before, the switch off voltage was used instead.

Testresult

The requirements are

o - MET

o - NOT MET

Frequency range of equipment								
Temperature °C	DC supply voltage V	Power dBm	Power dBm	Power dBm	Power dBm	Power dBm	Power dBm	Power dBm
-30								
-20								
-10								
0								
+10								
+20								
+30								
+40								
+50								

Remarks: Not applicable

EQUIPMENT UNDER TEST

Operation - mode of the EuT.:

The equipment under test was operated during the measurement under following conditions:

- ☐ - Standby
- ☐ - Test program (H - Pattern)
- ☐ - Test program (colour bar)
- ☒ - Test program (customer specific)

- Operating mode. A security tag was swept through the field of the Liberty GX

antenna every 2 seconds to initiate a verification cycle.

Configuration of the equipment under test: see attachment D

Following periphery devices and interface cables were connected during the measurement:

☒ - PSU (Power supply unit)

Type : WORLDWIDE 425 MODULE

☒ - IMX 04

Type : Filtered and ferrite coated mains cords

☐ -

Type : _____

☐ -

Type : _____

☐ -

Type : _____

☐ -

Type : _____

☒ - unshielded power cable

☐ - unshielded cables

☐ - shielded cables

MBPS.No.:

☒ - customer specific cables

☐ - _____

☐ - _____

S U M M A R Y

GENERAL REMARKS:

The product Liberty GX (P2 family) has been tested on the following frequency:

TX-Mode: 8.2 MHz
9.5 MHz

This model was defined as the worst condition model of all 5 versions:

Liberty GX TX, GX RX,
Liberty PX TX, PX RX,
Liberty QX TX, QX RX,
Liberty ILX-C TX, ILX-C RX,
Liberty ILX-C Short TX, ILX-C Short RX

the bandwidth requirements are kept.

FINAL JUDGEMENT:

The requirements according to the technical regulations and tested operation modes are

■ - met.

o - **not** met.

The Equipment Under Test

■ - **Fulfils** the general approval requirements according to page 3.


o - **Does not** fulfil the general approval requirements according to page 3.

Date of receipt of test sample : accdg. to storage record of MBPS


Testing Start Date : October 15, 2002

Testing End Date : November 15, 2002

Checked by:

i. A. 
Günter Mikes
Dipl.Ing.(FH)

Tested by:



Markus Huber

Conducted

EUT: LIBERTY GX with P2
Manuf: Checkpoint
Op Cond: Normal Mode
Operator: HU
Test Spec: FCC Part 15
Comment: L1-9.5MHz

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp
450k 30M 5k 9k PK+AV 20ms AUTO LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 25dB

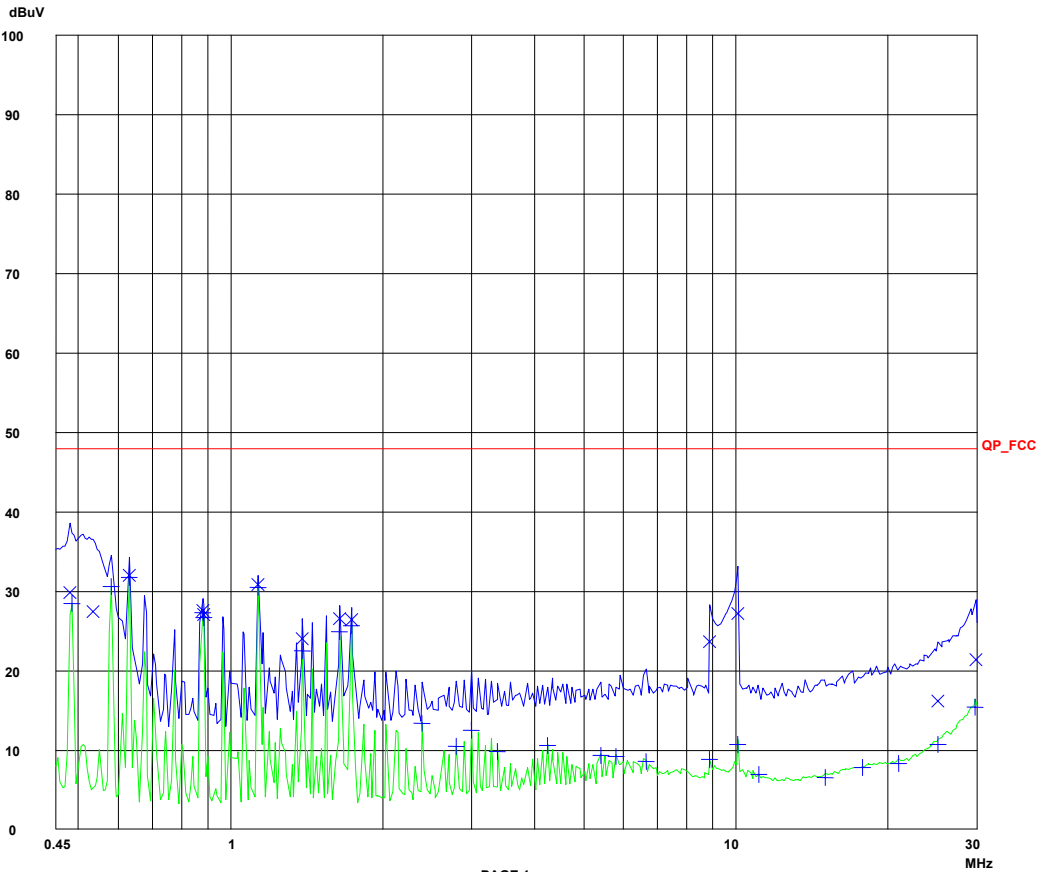


PAGE 1

Conducted

EUT: LIBERTY GX with P2
Manuf: Checkpoint
Op Cond: Normal Mode
Operator: HU
Test Spec: FCC Part 15
Comment: N-9.5MHz




Scan Settings (1 Range)
----- Frequencies -----|----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp
450k 30M 5k 9k PK+AV 20ms AUTO LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 25dB

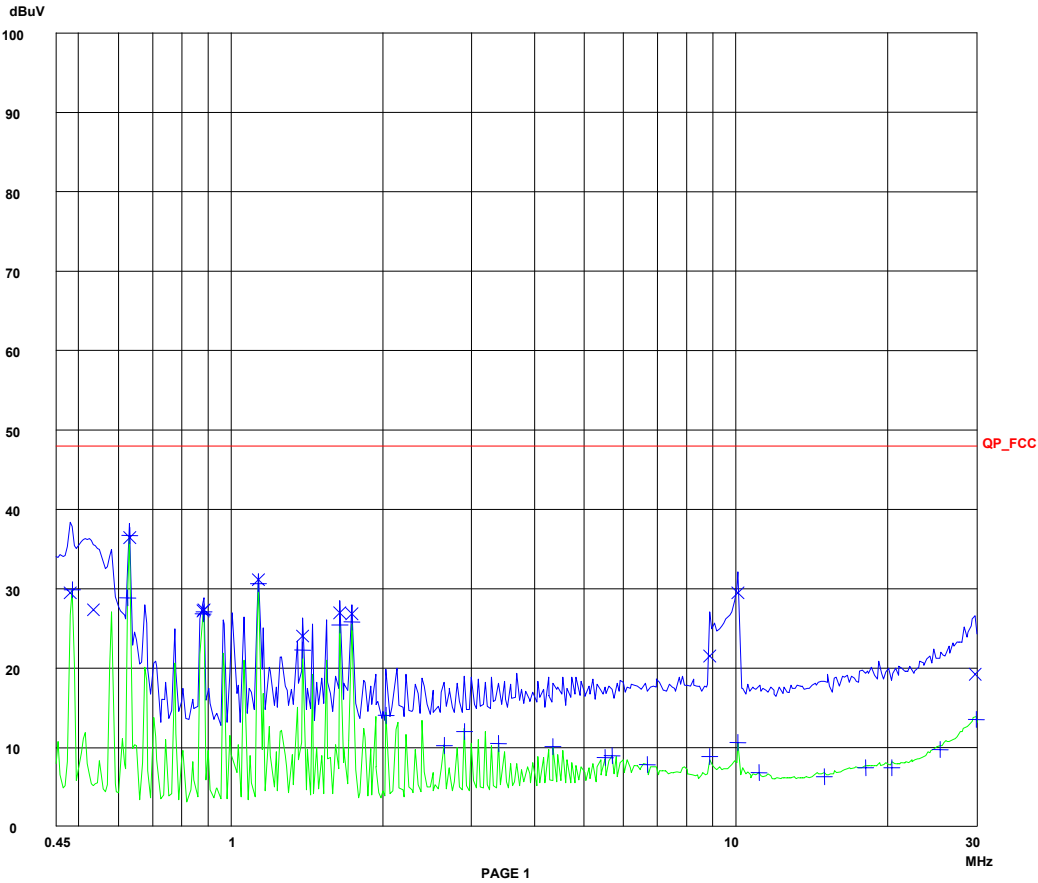




Bandwith plots

Liberty GX – TX 8.2MHz:

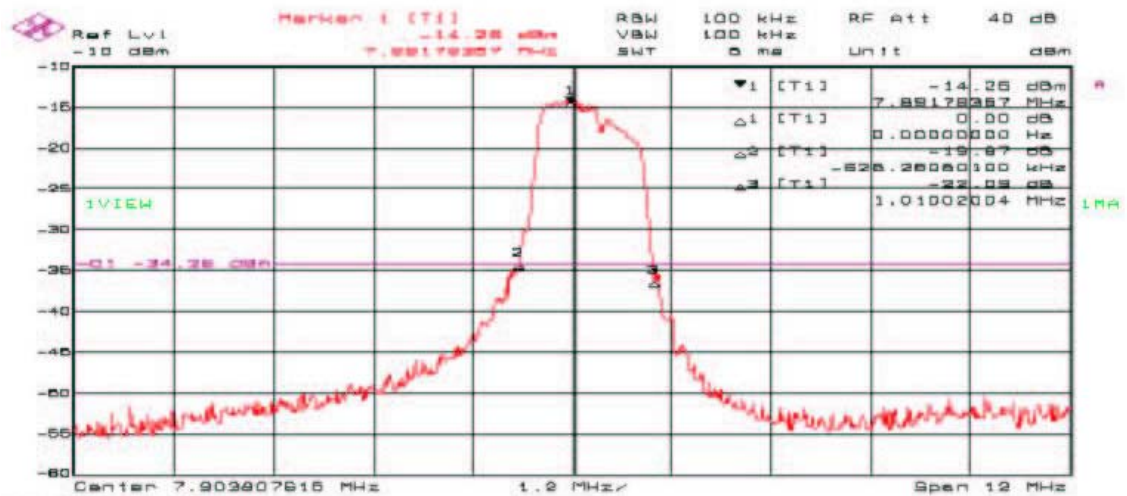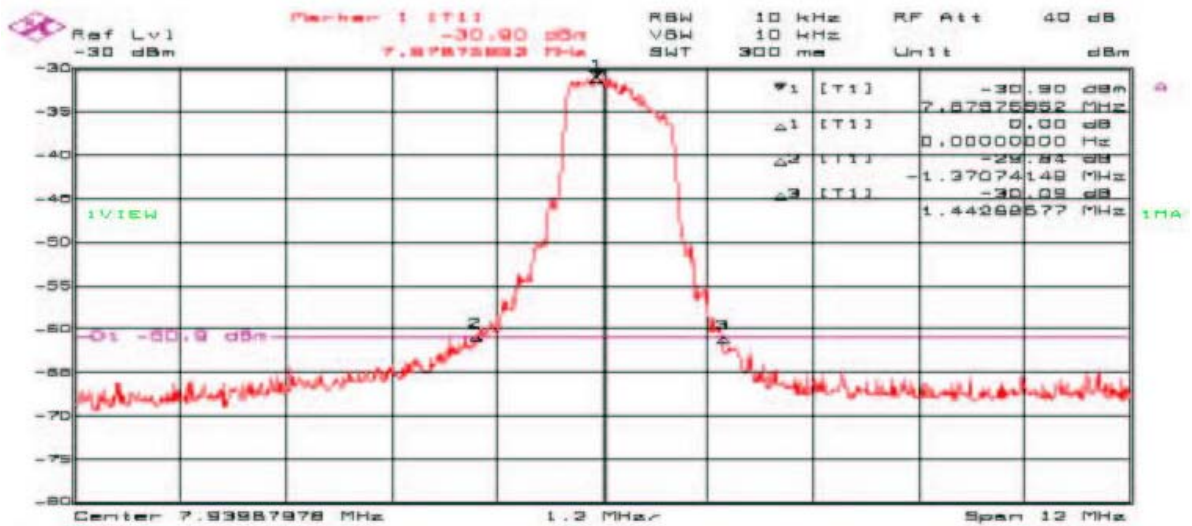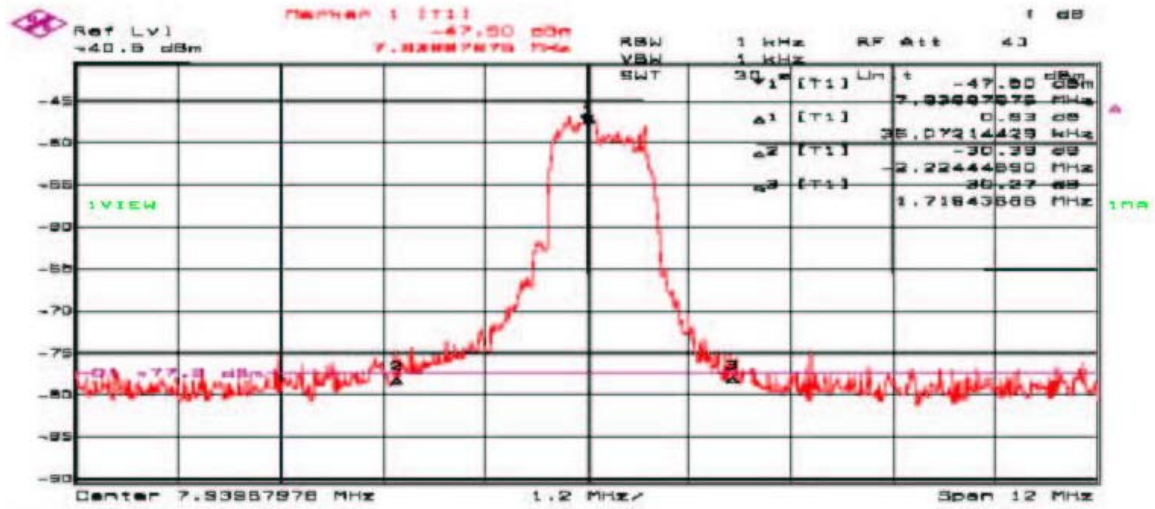

Bandwith plots

Liberty GX – TX 9.5MHz:

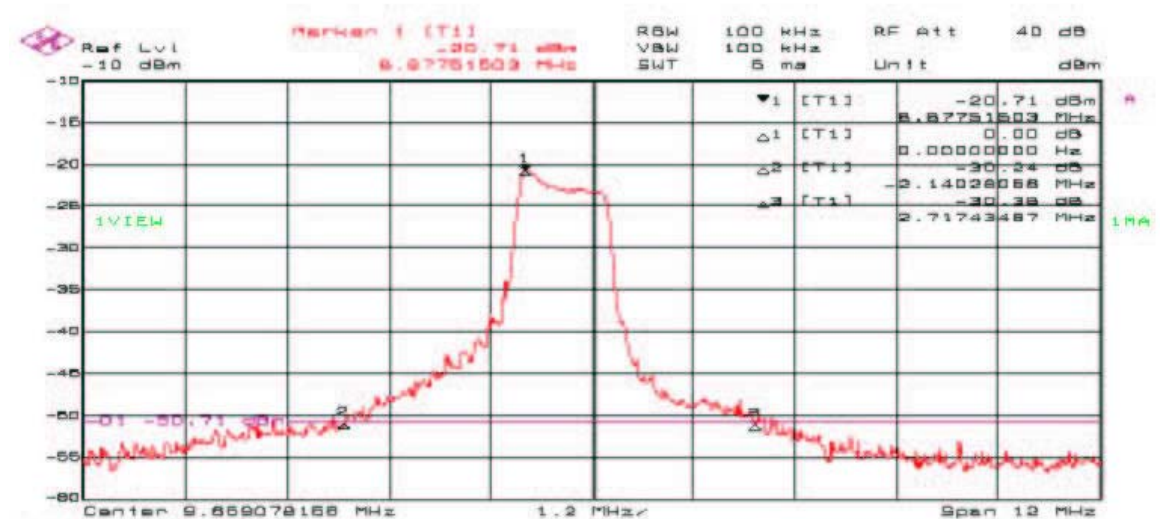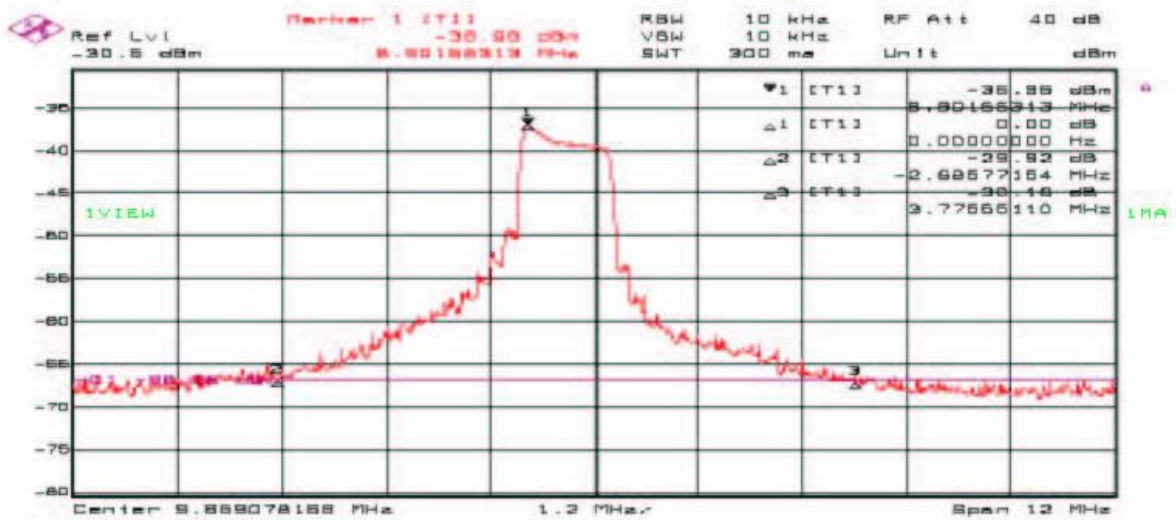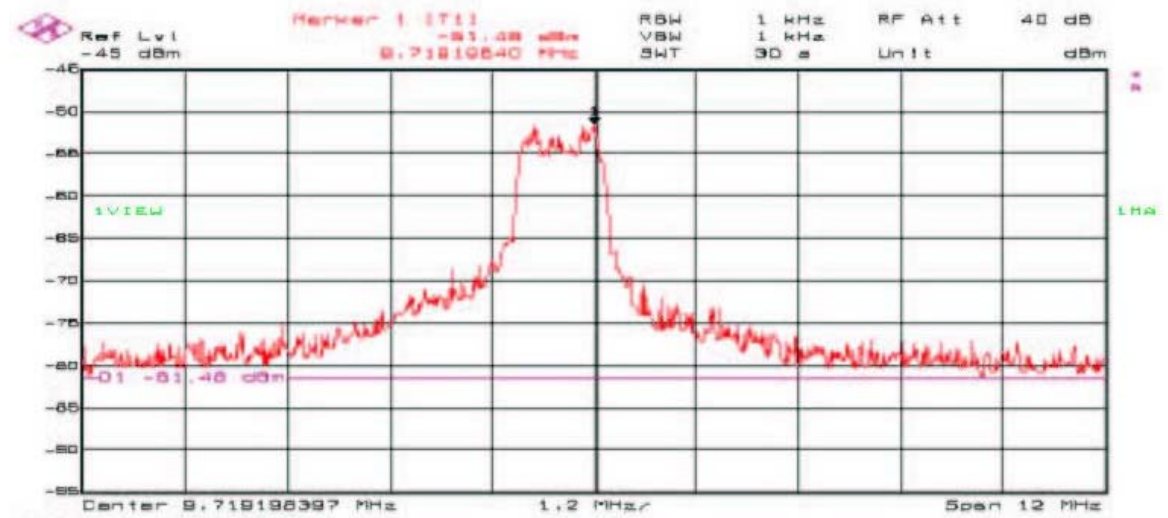

Test Report No: T 22691-00-00 HU
 Beginning of Testing: 15 Oktober 2002
 End of Testing: 15 November 2002

Attachment : B

List of Test Equipment

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.
A4	SP 103 3.5-60	Convertor 220 V / 110 V	MIKES PRODUCT SERVICE	04-07/54-91-053
	RF Cable	RF Cable 1 m	Rosenberger HF-Technik	04-07/60-02-016
	ESH 2 - Z 5	LISN	Rohde & Schwarz München	04-07/60-90-033
	ESH 3 - Z 2	Pulse Limiter	Rohde & Schwarz München	04-07/60-90-140
	HF 1/2 inch	RF Cable	Rosenberger HF-Technik	04-07/60-99-024
	NM-214-0200-NM	Test Cable	MIKES PRODUCT SERVICE	04-07/60-99-060
	ESCS-30	Test Receiver	Rohde & Schwarz München	04-07/63-99-001
CPR1	N-10-BNC	RF Cable	MIKES PRODUCT SERVICE	04-07/60-02-011
	FMZB 1516	Antenna	Schwarzbeck Mess-Elektronik	04-07/62-90-018
	ESCS-30	Test Receiver	Rohde & Schwarz München	04-07/63-99-001
SER1	N-10-BNC	RF Cable	MIKES PRODUCT SERVICE	04-07/60-02-011
	FMZB 1516	Antenna	Schwarzbeck Mess-Elektronik	04-07/62-90-018
	ESCS-30	Test Receiver	Rohde & Schwarz München	04-07/63-99-001
SER2	Controller for Turntable	Controller	EMISYS Vertriebs GmbH	04-07/59-89-157
	HCC	Controller Ant.-Mast	Rohde & Schwarz München	04-07/59-97-001
	RG 214/U	RF Cable 2 m	Huber+Suhner	04-07/60-89-463
	HF 7/8 inch	Antenna Cable 13 m	Huber+Suhner	04-07/60-99-001
	HF 7/8 inch	Antenna Cable 20 m	Huber+Suhner	04-07/60-99-002
	HF 7/8 inch	Antenna Cable 40 m	Huber+Suhner	04-07/60-99-003
	KR - 200	Coax Antenna Switch	Rosenberger HF-Technik	04-07/60-99-004
	BBA-9106	Antenna	Schwarzbeck Mess-Elektronik	04-07/62-92-048
	UHALP-9108A	Antenna	Schwarzbeck Mess-Elektronik	04-07/62-97-079
	ESVP	Test Receiver	Rohde & Schwarz München	04-07/63-89-008
	ESVP-EZM	Spectrum Monitor	Rohde & Schwarz München	04-07/74-86-016
	Turntable 5 m	Turntable	EMISYS Vertriebs GmbH	04-07/92-88-155
	Antenna Mast	Antenna Mast	Rohde & Schwarz München	04-07/92-97-001

CONSTRUCTIONAL DATAFORM FOR TESTING OF RADIO EQUIPMENT

Licence holder:	Checkpoint Systems, Inc.		
Address:	101 Wolf Drive, Thorofare, New Jersey, USA 08086		
Manufacturer:	Pikatron Feinwerktechnik GmbH & Co. KG		
Address:	Raiffeisenstr. 10, 61250 Usingen, Germany		
Type:	Electronic Article Surveillance Detection Systems		
Model:	Liberty (P2 family) Models: GX TX, GX RX, PX TX, PX RX, QX TX, QX RX, ILX-C TX, ILX-C RX		
Serial-No.:	Liberty GX TX and RX S/N 714385200U0082102005 S/N 713276500U0082102007	Liberty PX TX and RX S/N 733991400U0082102007 S/N 713049200U0082102007	Liberty QX TX and RX S/N 714385200U0082102007 S/N 729193000U0082102007
	Liberty ILX-C TX and RX S/N 792564100U0070502010 S/N 712803700U0070502006	Liberty IL-C Short TX and RX S/N 725600300U0070502001 S/N 732673200U0070502002	

Additional informations to the above named model:

Antenna: transmitter:	Type: Loop Antennas		
	Length/size: GX W: 440 mm H: 1425 mm	Length/size: PX W: 430 mm H: 1450 mm	Length/size: QX W: 270 mm H: 1545 mm
receiver:	Length/size: ILX-C W: 315 mm H: 1245 mm	Length/size: ILX-C Short W: 315 mm H: 1045 mm	
	Type: Same as transmitter		
Power supply of the transmitter: Type:	Length/size: Same as transmitter		
	nominal voltage:		24.0 V
	lowest voltage:		18.0 V
	highest voltage:		25.0 V
Power supply of the receiver: Type:	current consumption		0.4 A
	Same as transmitter		
	nominal voltage:		V
	cuurrent consumption		A

Ancillary equipment:

Description:	PSU	Type:	Worldwide 224 Module	Serial-no.:	UZ079
Description:	PSU	Type:	Worldwide 425 Module	Serial-no.:	195682
Description:	IMX 04	Type:	Filtered and mains cords	Serial-no.:	

Extreme temperature range in which the approval test should be performed:

- ☒ Category I: General (-20°C to +55°C)
☐ Category II: Portable (-10°C to +55°C)
☐ Category III: Equipment for normal indoor use (0°C to +55°C)

Connectable cables:

Name of the cable	Digital	Length/m	shielded
DC - Cable	☐ yes ☒ no	5.0	☒ yes ☐ no

O If applicable, if necessary complete overleaf

Page D1

Type designation: Liberty (P2 family) Models: GX TX, GX RX, PX TX, PX RX, QX TX, QX RX, ILX-C TX, ILX-C RX			
Name and type designation of individual units comprising the radio equipment: PSU, Worldwide 224 Module, CP 683 PSU, Worldwide 425 Module, 11794XA			
Type of equipment:			
☐ Radiotelephone equipment	☐ Remote-control equipment	☐ Radiomaritime equipment	☐ LPD
☐ One-way radiotelephone equipment	☒ Inductive loop system	☐ Inland waterways equipment	☐ RLAN
☐ Personal paging system	☐ Radio-relay system	☐ Radionavigation equipm.	☐
☐ Satellite earth station	☐ CB radiotelephone equipment	☐ Antenna	☐
☐ Data transmission equipment	☐ Movement detector	☐ Aeronautical equipment	☐
Technical characteristics:			
	Transmitter-receiver	Transmitter	Receiver
Frequency range		7.4 – 10.0 MHz	Broadband
Maximum no. of channels		1	
Channel spacing			
Class of emission (type of modulation)		FXN	
Maximum RF output power			
Maximum effective radiated power (ERP)		100 uV/m at 30 m	
Output power variable		Yes	
Channel switching frequency range			
Method of frequency generation	☒ Synthesizer ☐ Crystal ☐ Other		
Frequency generation TX			
Frequency generation RX			
IF	1st IF	2nd IF	3rd IF
Integral selective calling			
Audio-frequency interface level at external data socket			
Modes of operation	☐ Duplex mode ☐ Semi-duplex mode ☒ Simplex mode		
Power source	☒ Mains ☐ Vehicle-regulated ☐ Integral		
Antenna socket	☐ BNC ☐ TNC ☐ N ☐ M ☐ UHF ☐ Adapter ☒ None ☐		
Test specifications:	FCC Part 15 C RSS 210		

Declarations:

- We declare that the above information are correct and the named model was supplied with the maximum configuration to the accredited test laboratory.

Thercom, NJ, date 6/2/03
place of issue


Seal and signature of applicant

System Setup for FCC / IC - Tests

	Frequency	Settings TX-Power	PSU - Cable
Liberty ILX C	8.2 MHz	44.0 V PP	PS WW 425 - IMX 04
	9.5 MHz	32.0 V PP	PS WW 224 - IMX 04
Liberty ILX C short	8.2 MHz	60.0 V PP	PS WW 425 - IMX 04
	9.5 MHz	42.8 V PP	PS WW 224 - IMX 04
Liberty GX	8.2 MHz	16.8 V PP	PS WW 425 - IMX 04
	9.5 MHz	6.5 V PP	PS WW 224 - IMX 04
Liberty QX	8.2 MHz	14.6 V PP	PS WW 425 - IMX 04
	9.5 MHz	6.8 V PP	PS WW 224 - IMX 04
Liberty PX	8.2 MHz	21.5 V PP	PS WW 425 - IMX 04
	9.5 MHz	10.8 V PP	PS WW 224 - IMX 04

Cables/Connections:

AC-Cable(to PSU): Both WW425 and WW224 PSUs require shielded filter cordset Eupen IMX 04.

DC-Cable: Shield not connected to the P2-Electronic, with out Ferrite.

Sync-Cables: MASTER-OUT, CP-OUT, SLAVE SYS IN and SLAVE SYS OUT are not connected.

Connecting the sync – cables to the electronic has a negative effect to the spurious emission, but it doesn't influence the Transmitter power.

Aisle width (distance between receiver and transmitter antenna) was between 1-2 m