

FCC ID: DO4WRTZ1500

EMI - T E S T R E P O R T

- FCC Part 15.247 -



Test Report No. :	T35340-00-02HU	30. January 2012
Date of issue		

Type / Model Name : WRTZ - 1500

Product Description : UHF RFID-Reader

Applicant : Checkpoint Systems, Inc.

Address : 101 Wolf Drive, Thorofare
New Jersey, USA 08086

Manufacturer : RM Gerätebau

Address : Hirschbachstr. 47
64354 Reinheim, Germany

Licence holder : Checkpoint Systems, Inc.

Address : 101 Wolf Drive, Thorofare
New Jersey, USA 08086

Test Result according to the standards listed in clause 1 test standards:
--

POSITIVE



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test
results without the written permission of the test laboratory.

FCC ID: DO4WRTZ1500

Contents

1 TEST STANDARDS	3
2 SUMMARY	4
3 EQUIPMENT UNDER TEST	5
3.1 Photo documentation of the EUT – Detailed photos see Attachment A	5
3.2 Test setup	5
3.3 Power supply system utilised	5
3.4 Short description of the EUT	5
4 TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 Environmental conditions	7
4.3 Statement of the measurement uncertainty	7
4.4 Measurement Protocol for FCC, VCCI and AUSTEL	8
5 TEST CONDITIONS AND RESULTS	9
5.1 Conducted emissions	9
5.2 20 dB bandwidth	14
5.3 Maximum peak conducted output power	18
5.4 Spurious RF conducted emissions	19
5.5 Spurious radiated emissions in restricted bands	24
5.6 Hopping sequence	27
5.7 Equal hopping frequency use	28
5.8 Receiver input bandwidth	28
5.9 Dwell time	29
5.10 Channel separation	31
5.11 Quantity of hopping channels	33
5.12 Antenna application - Detailed photos see Attachment A	35
5.13 Receiver conducted disturbances	36
5.14 Receiver spurious emissions conducted	37
5.15 Maximum permissible exposure (MPE) – See Attachment B	38
6 USED TEST EQUIPMENT AND ACCESSORIES	39

FCC ID: DO4WRTZ1500

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2010)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart B - Unintentional Radiators (October, 2010)

Part 15, Subpart B, Section 15.107	AC Line conducted emissions,	Class B
Part 15, Subpart B, Section 15.109	Radiated emissions, general requirements,	Class B

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2010)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: portable device

OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

FCC ID: DO4WRTZ1500

2 SUMMARY

GENERAL REMARKS:

The frequency range was scanned from 9 kHz to 10 GHz.

All emissions not reported in this test report were more than 10 dB below the specified limit.

The EuT is a frequency hopping system using 50 channels in the frequency band from 902 to 928 MHz.

Following antennas are provided with the EuT:

- 520 10073 antenna: circular, 68° vertical, 70° horizontal (5.2 dBi)

The EuT is declared as Class A digital device. The EuT fulfills the requirements of a class B device

The device has a maximum of eight external antenna ports for connection of the transmission/reception antennas for communication with RFID tags.

Measurements have been made with power settings of 30.0 dBm.

For detailed information please refer to the user manual.

It is not possible to set the EuT only in receiving mode.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 13. July 2011

Testing concluded on : 17. August 2011

Checked by:

Tested by:

Thomas Weise
Dipl.-Ing.(FH)
Laboratory Manager


Markus Huber

FCC ID: DO4WRTZ1500

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – Detailed photos see Attachment A

3.2 Test setup

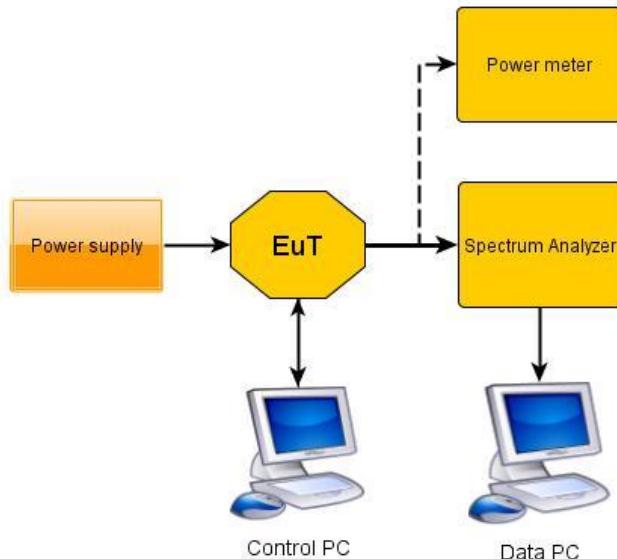

3.3 Power supply system utilised

Power supply voltage: : Primary: 100 - 240 V / 50 – 60 Hz
 Secondary: 12 V/DC

3.4 Short description of the EUT

The WRTZ-1500 is a UHF RFID reader. It can read active and passive Tags in the frequency range from 902 to 928 MHz. 8 antenna connectors are available.

Number of tested samples: 1
 Serial number: see Photo documentation of the EuT / Equipment Under Test

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TAG reading mode supplying 30.0 dBm

- Standby mode

-

FCC ID: DO4WRTZ1500

EUT configuration:

The following peripheral devices and interface cables were connected during the measurements:

- Test Software Model : Supplied by manufacturer
- Lap Top Model : Supplied by manufacturer
- Antenna Model : Kathrein Type No.520 10073
XP Power Supply – AEB70US12 –
Model : Serial No.: 70120-0002683
- _____ Model : _____
- _____ Model : _____

- customer specific cables

FCC ID: DO4WRTZ1500

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 Strasskirchen
Germany

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

FCC ID: DO4WRTZ1500

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

FCC ID: DO4WRTZ1500

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

see Attachment C

5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Description of Measurement

The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a line impedance stabilization network (LISN) with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20 \log \mu\text{V}$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz
Min. limit margin 3.2 dB at 0.515 MHz


The requirements are **FULFILLED**.

Remarks: Power setting during this measurement was 30.0 dBm.

FCC ID: DO4WRTZ1500

5.1.6 Test protocol

Test point L1
 Operation mode: Tag reading mode supplying 30.0 dBm
 Remarks:

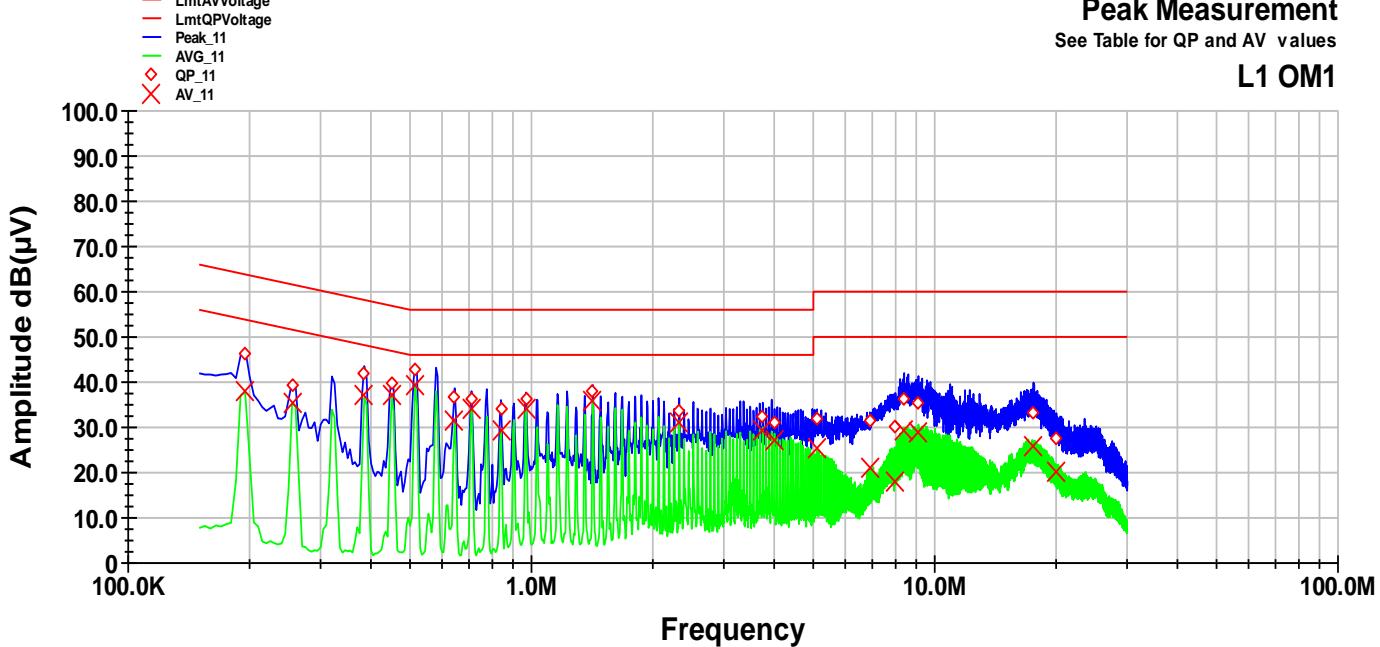


Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.195	46.3	-17.5	63.8	37.8	-16.0	53.8
0.255	39.1	-22.5	61.6	35.4	-16.2	51.6
0.385	42.0	-16.1	58.2	37.2	-11.0	48.2
0.45	39.5	-17.3	56.9	37.2	-9.7	46.9
0.515	43.0	-13.0	56.0	39.4	-6.6	46.0
0.645	36.6	-19.4	56.0	31.3	-14.7	46.0
0.71	36.5	-19.5	56.0	33.9	-12.1	46.0
0.84	34.2	-21.8	56.0	29.3	-16.7	46.0
0.97	36.2	-19.8	56.0	33.9	-12.1	46.0
1.42	38.0	-18.0	56.0	35.9	-10.1	46.0
2.325	33.6	-22.4	56.0	30.9	-15.1	46.0
3.745	32.4	-23.6	56.0	29.5	-16.5	46.0
4.005	31.0	-25.0	56.0	27.2	-18.8	46.0
5.1	32.0	-28.0	60.0	25.5	-24.5	50.0
6.905	31.6	-28.4	60.0	21.2	-28.8	50.0
7.99	30.2	-29.8	60.0	17.8	-32.2	50.0
8.395	36.3	-23.7	60.0	29.4	-20.6	50.0
9.105	35.2	-24.8	60.0	29.1	-20.9	50.0
17.565	33.1	-26.9	60.0	26.0	-24.0	50.0
20.02	27.7	-32.3	60.0	20.2	-29.8	50.0

FCC ID: DO4WRTZ1500

Test point: N
Operation mode: Tag reading mode supplying 30.0 dBm
Remarks:

Result: Passed

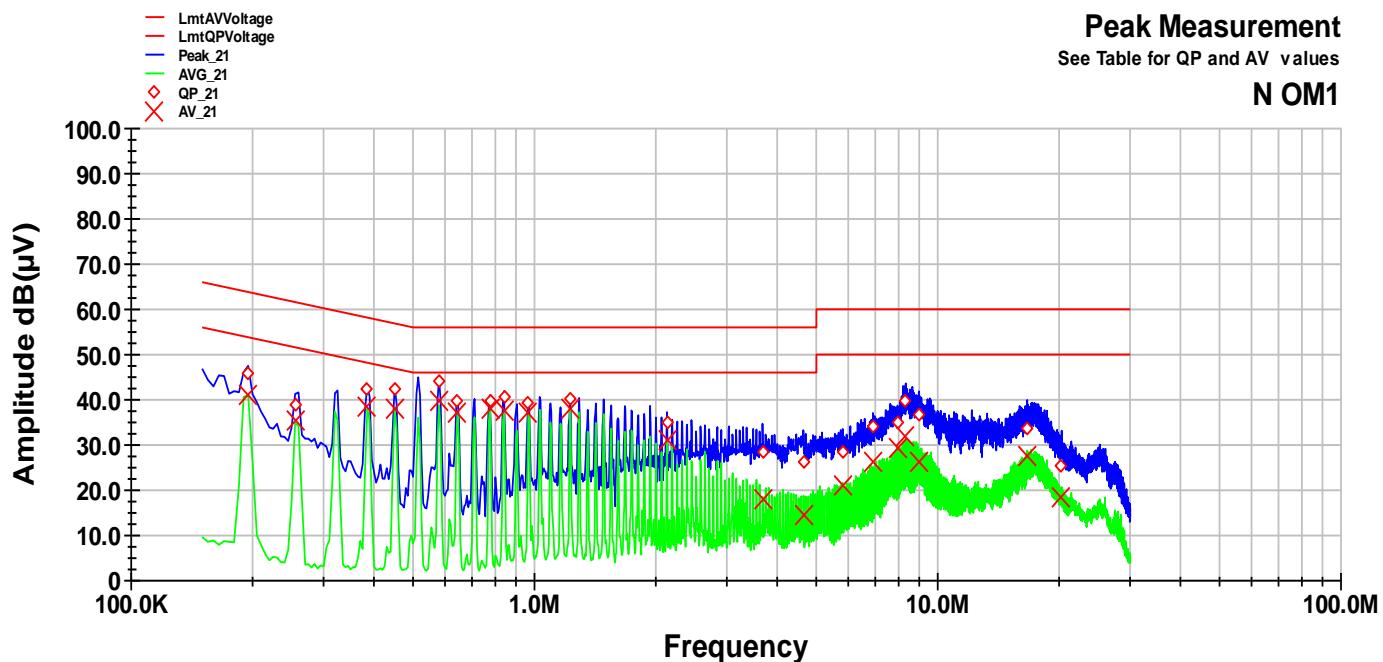


Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.195	45.9	-17.9	63.8	41.1	-12.7	53.8
0.255	38.9	-22.7	61.6	35.2	-16.4	51.6
0.385	42.4	-15.8	58.2	38.7	-9.5	48.2
0.45	42.2	-14.7	56.9	38.1	-8.8	46.9
0.58	43.9	-12.1	56.0	39.8	-6.2	46.0
0.645	39.6	-16.4	56.0	37.2	-8.8	46.0
0.775	39.7	-16.3	56.0	38.0	-8.0	46.0
0.84	40.8	-15.2	56.0	37.4	-8.6	46.0
0.965	39.4	-16.6	56.0	37.0	-9.0	46.0
1.225	40.2	-15.8	56.0	38.1	-7.9	46.0
2.13	34.8	-21.2	56.0	31.0	-15.0	46.0
3.675	28.3	-27.7	56.0	18.0	-28.0	46.0
4.64	26.1	-29.9	56.0	14.7	-31.3	46.0
5.81	28.5	-31.5	60.0	21.3	-28.8	50.0
6.905	34.0	-26.0	60.0	26.4	-23.6	50.0
7.94	35.0	-25.0	60.0	29.2	-20.8	50.0
8.325	39.9	-20.1	60.0	31.7	-18.3	50.0
9.005	36.7	-23.3	60.0	26.4	-23.6	50.0
16.655	33.7	-26.3	60.0	27.4	-22.6	50.0
20.275	25.4	-34.6	60.0	18.5	-31.5	50.0

FCC ID: DO4WRTZ1500

Test point: L1
Operation mode: Standby mode
Remarks:

Result: Passed

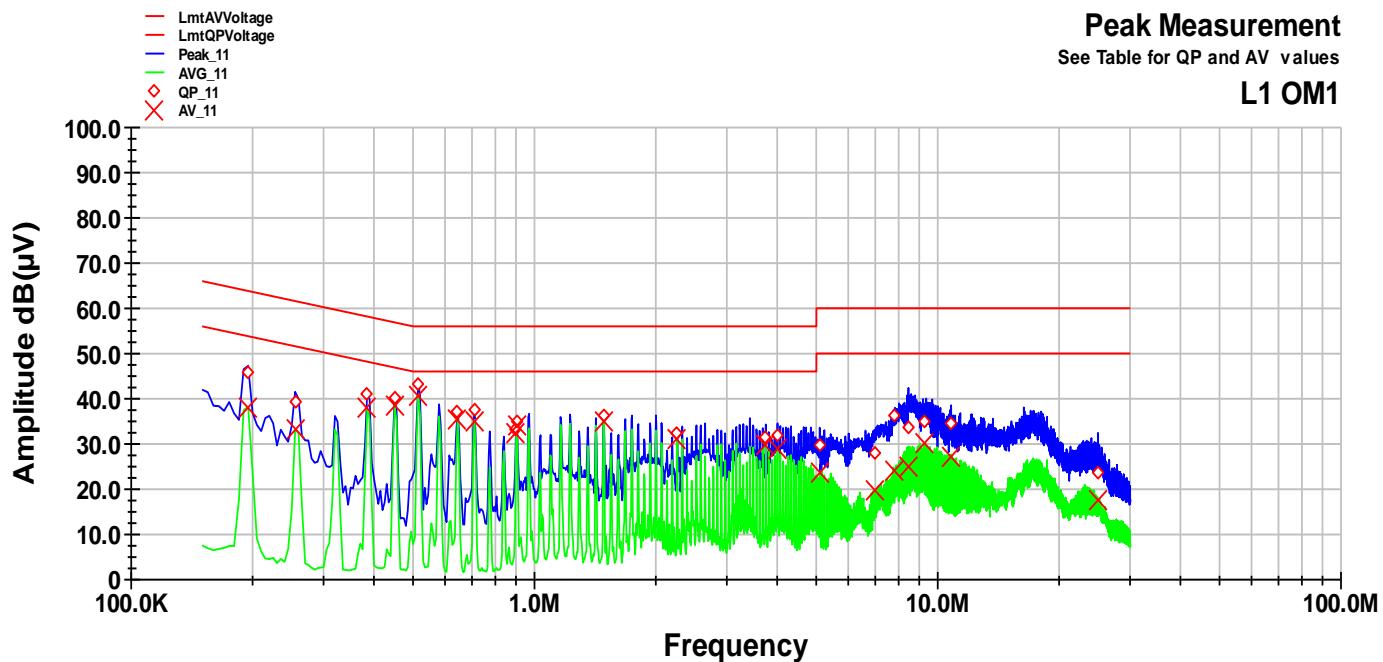


Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.195	45.8	-18.0	63.8	38.2	-15.6	53.8
0.255	39.3	-22.3	61.6	33.1	-18.5	51.6
0.385	41.1	-17.1	58.2	37.9	-10.2	48.2
0.45	40.0	-16.9	56.9	38.4	-8.5	46.9
0.515	43.2	-12.8	56.0	40.8	-5.2	46.0
0.645	37.2	-18.8	56.0	35.4	-10.6	46.0
0.71	37.5	-18.5	56.0	35.1	-10.9	46.0
0.9	33.1	-22.9	56.0	32.2	-13.8	46.0
0.905	35.0	-21.0	56.0	34.1	-11.9	46.0
1.485	36.3	-19.7	56.0	35.0	-11.0	46.0
2.26	32.2	-23.8	56.0	31.2	-14.8	46.0
3.745	31.6	-24.4	56.0	29.7	-16.3	46.0
4.005	31.9	-24.1	56.0	29.0	-17.0	46.0
5.1	29.6	-30.4	60.0	23.6	-26.4	50.0
6.975	28.2	-31.8	60.0	19.9	-30.1	50.0
7.83	36.2	-23.8	60.0	24.1	-25.9	50.0
8.455	33.9	-26.1	60.0	24.8	-25.2	50.0
9.3	35.0	-25.0	60.0	30.0	-20.0	50.0
10.79	34.4	-25.6	60.0	27.2	-22.8	50.0
24.94	23.8	-36.2	60.0	17.4	-32.6	50.0

FCC ID: DO4WRTZ1500

Test point
Operation mode:
Remarks:

N
Standby mode

Result: Passed

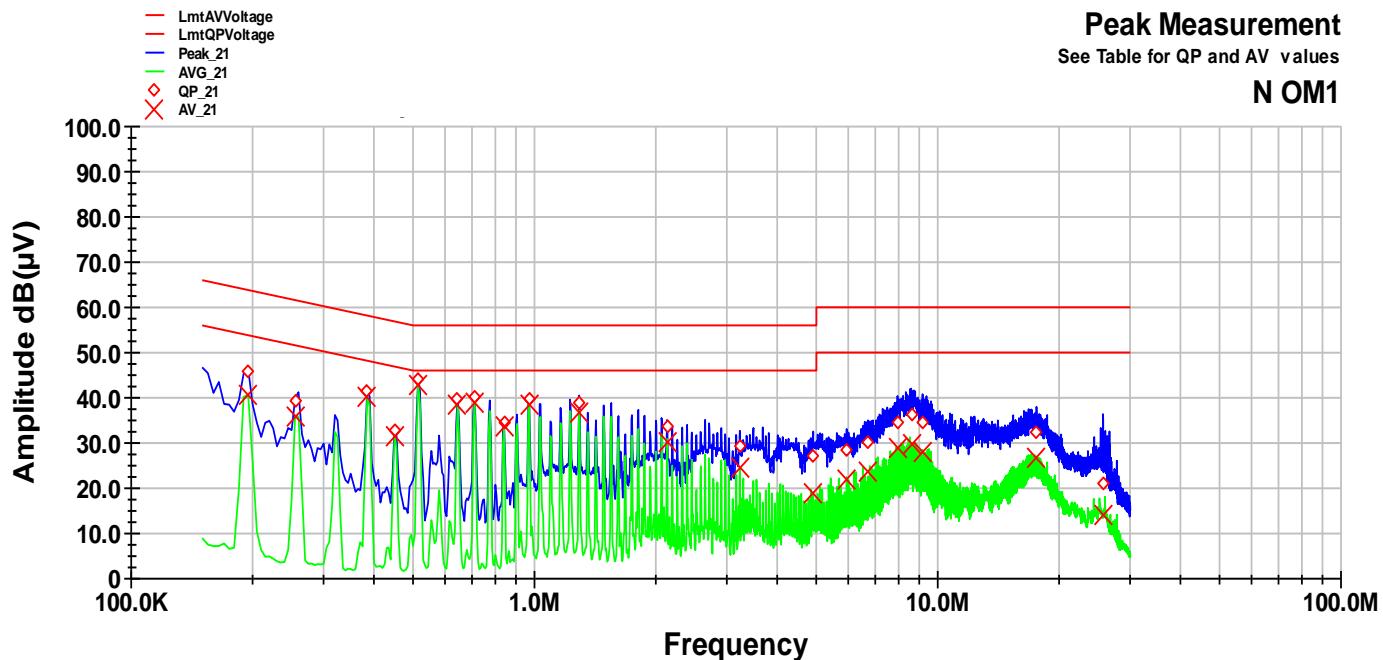

Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.195	45.7	-18.2	63.8	40.7	-13.1	53.8
0.255	39.5	-22.1	61.6	36.0	-15.6	51.6
0.385	41.6	-16.5	58.2	40.2	-7.9	48.2
0.45	32.7	-24.1	56.9	31.6	-15.2	46.9
0.515	44.3	-11.7	56.0	42.8	-3.2	46.0
0.645	39.6	-16.4	56.0	38.3	-7.7	46.0
0.71	40.3	-15.7	56.0	38.9	-7.1	46.0
0.84	34.6	-21.4	56.0	33.5	-12.5	46.0
0.97	39.8	-16.2	56.0	38.3	-7.7	46.0
1.29	38.9	-17.1	56.0	36.8	-9.2	46.0
2.13	33.6	-22.4	56.0	30.3	-15.7	46.0
3.23	29.2	-26.8	56.0	24.4	-21.6	46.0
4.91	27.3	-28.7	56.0	18.8	-27.2	46.0
5.94	28.5	-31.5	60.0	21.9	-28.1	50.0
6.715	30.0	-30.0	60.0	23.8	-26.2	50.0
7.945	34.4	-25.6	60.0	29.0	-21.0	50.0
8.59	36.1	-23.9	60.0	29.8	-20.2	50.0
9.17	34.5	-25.5	60.0	28.0	-22.0	50.0
17.57	32.2	-27.8	60.0	26.8	-23.2	50.0
25.675	21.0	-39.0	60.0	14.0	-36.0	50.0

FCC ID: DO4WRTZ1500

5.2 20 dB bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.2.1 Description of the test location

Test location: Shielded Room S4

5.2.2 Photo documentation of the test set-up

see Attachment C

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.247(a):

Frequency hopping systems shall have hopping carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2.2 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

5.2.3 Test result

Power setting 30.0 dBm:

Channel No.	-20 dB Bandwidth below peak (kHz)
CH 1 (902.75 MHz)	119.0
CH 25 (914.75 MHz)	122.0
CH 50 (927.25 MHz)	125.0

Bandwidth limit according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit -20 db bandwidth (kHz)
902-928	≥ 50	< 250


The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: DO4WRTZ1500


5.2.4 Test protocol

Channel 1
902.75 MHz

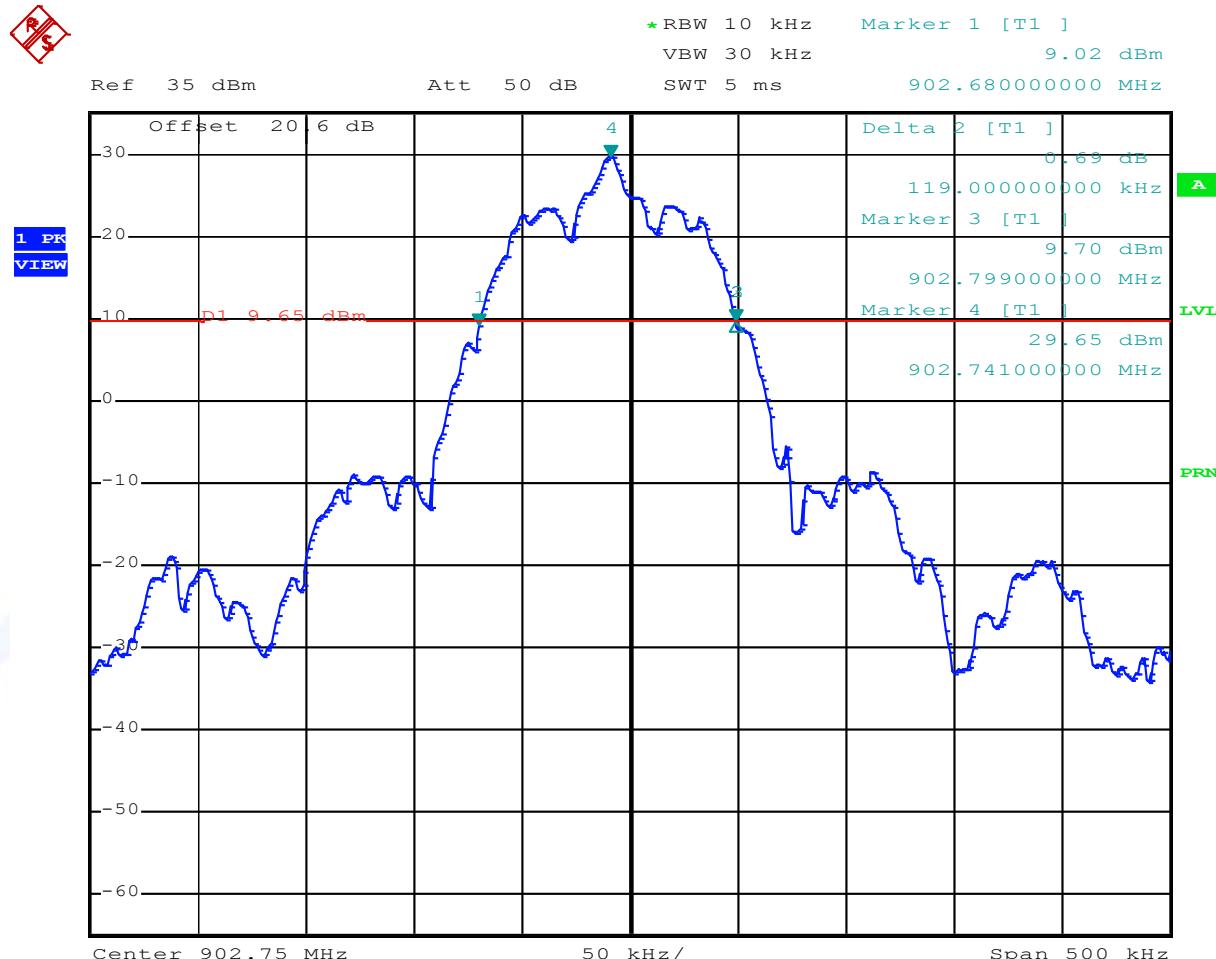


FCC ID: DO4WRTZ1500

Channel 25
914.75 MHz

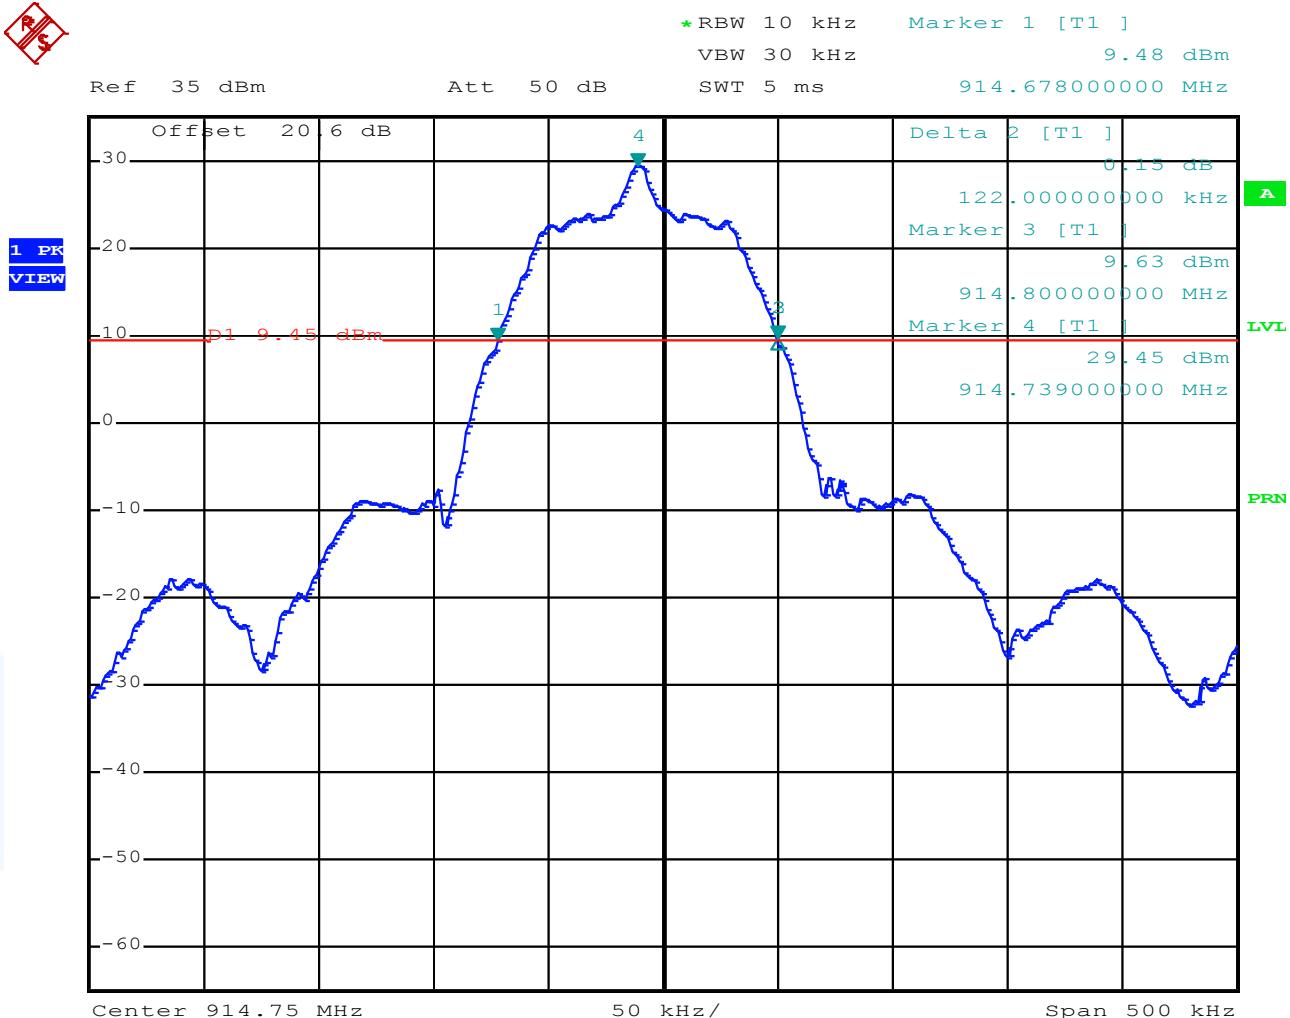

FCC ID: DO4WRTZ1500

Channel 50
927.25 MHz

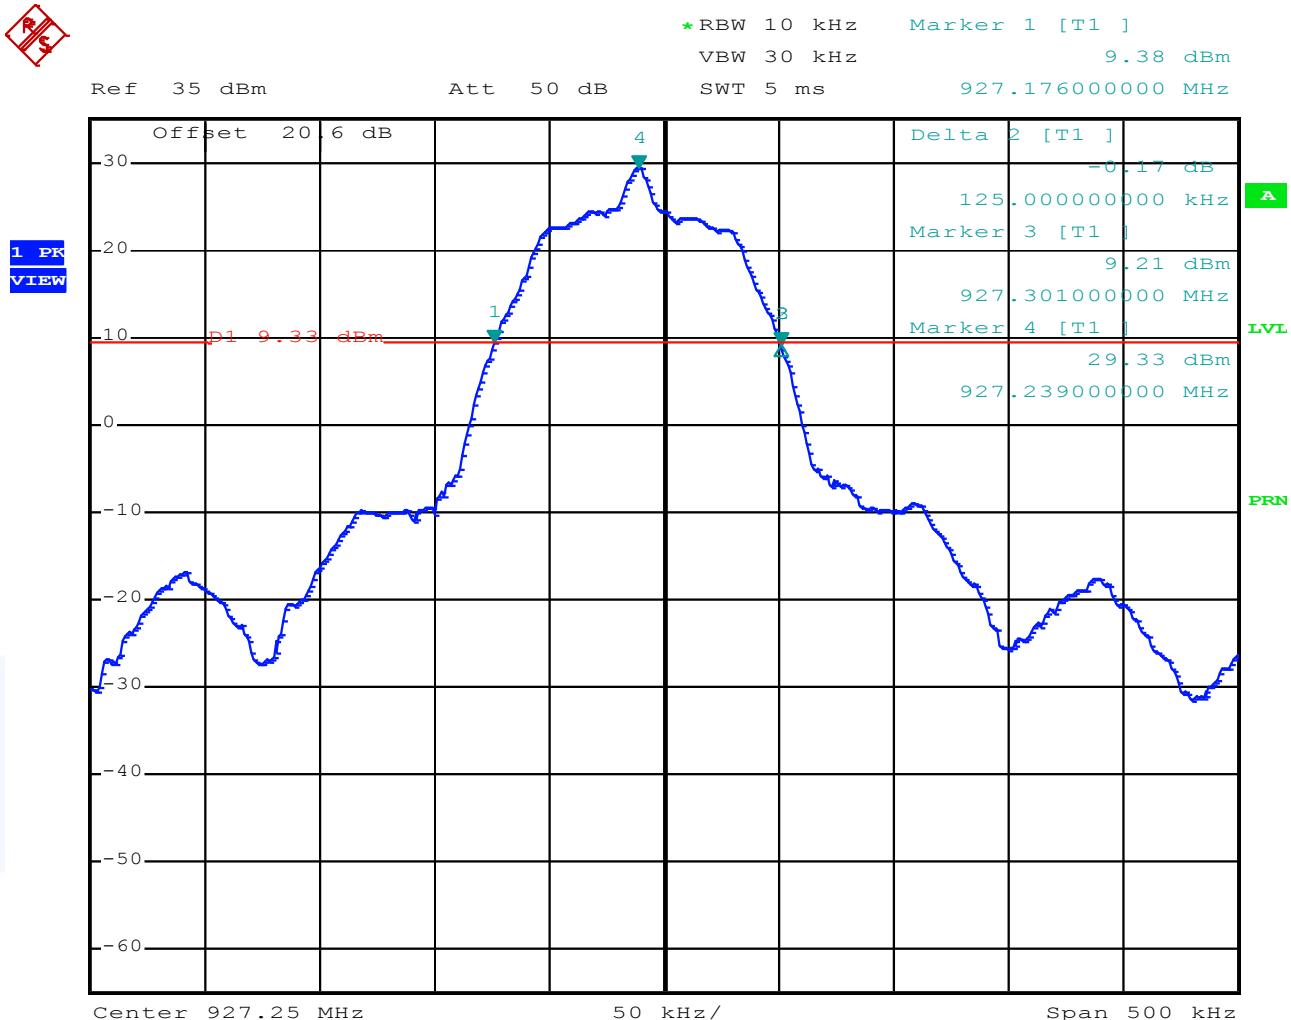

FCC ID: DO4WRTZ1500

5.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part CPC 2.

5.3.1 Description of the test location

Test location: Shielded Room S4

5.3.2 Photo documentation of the test set-up

see Attachment C

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.247(b)(2):

For frequency hopping systems operating in the 902-928 MHz band the maximum peak conducted output power shall not exceed the limit of 1 watt for systems employing at least 50 hopping channels.

5.3.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode using the assigned frequency.

Spectrum analyser settings:

RBW	300 kHz	Sweep time	5 ms (Auto)
VBW	1 MHz	Power Mode	Max. hold
Detector	Peak	Span	500 kHz

5.3.5 Test result

a) Power setting 30.0 dBm

Antenna 520 10073: antenna gain: 5.2 dBi

Channel	Frequency (MHz)	Peak Power (dBm)	Correction (dB)	Corr. Peak power (dBm)	Limit (dBm)	Delta (dB)
1	902.75	9.46	20	29.46	30.0	- 0.54
25	914.75	9.45	20	29.45	30.0	- 0.55
50	927.25	9.31	20	29.31	30.0	- 0.69

Note: Correction means fixed attenuation of 20 dB.

Test cable loss is included in the analyzer reading (Transducer factor).

Peak Power Limit according to FCC Part 15C, Section 15.247(b)(2):

Frequency (MHz)	Hopping channels	Hop. CH carrier freq. separation	Peak Power Limit	
			(dBm)	(W)
902-928	≥ 50		30	1.0

The requirements are **FULFILLED**.

Remarks:

FCC ID: DO4WRTZ1500

5.4 Spurious RF conducted emissions

For test instruments and accessories used see section 6 Part **SEC1, SEC2 and SEC3**.

5.4.1 Description of the test location

Test location: Shielded Room S4

5.4.2 Photo documentation of the test set-up

see Attachment C

5.4.3 Applicable standard

According to FCC Part 15C, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.4.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode at the assigned frequency.

5.4.5 Test result

Power setting 30.0 dBm

Hopping frequency from 902.75 to 927.25 MHz, max. level 29.44 dBm			
Frequency (kHz)	Peak power * (dBm)	Limit (-20 dB) (dBm)	Delta (dB)
80.784	-51.52	9.44	-60.9



* Fixed attenuation of 20 dB is included in the Peak power.

The requirements are **FULFILLED**.


Remarks:

- All spurious emissions falling in restricted bands have been measured radiated.
- For detailed results please refer to following test protocols.
- In the frequency range from 9 kHz to 30 MHz no emissions could be measured.
- Test was performed in frequency hopping mode from 902.75 to 927.25 MHz.
- This mode represents the worst case mode of the EuT.


FCC ID: DO4WRTZ1500
Conducted RF emission from 9 kHz to 30 MHz

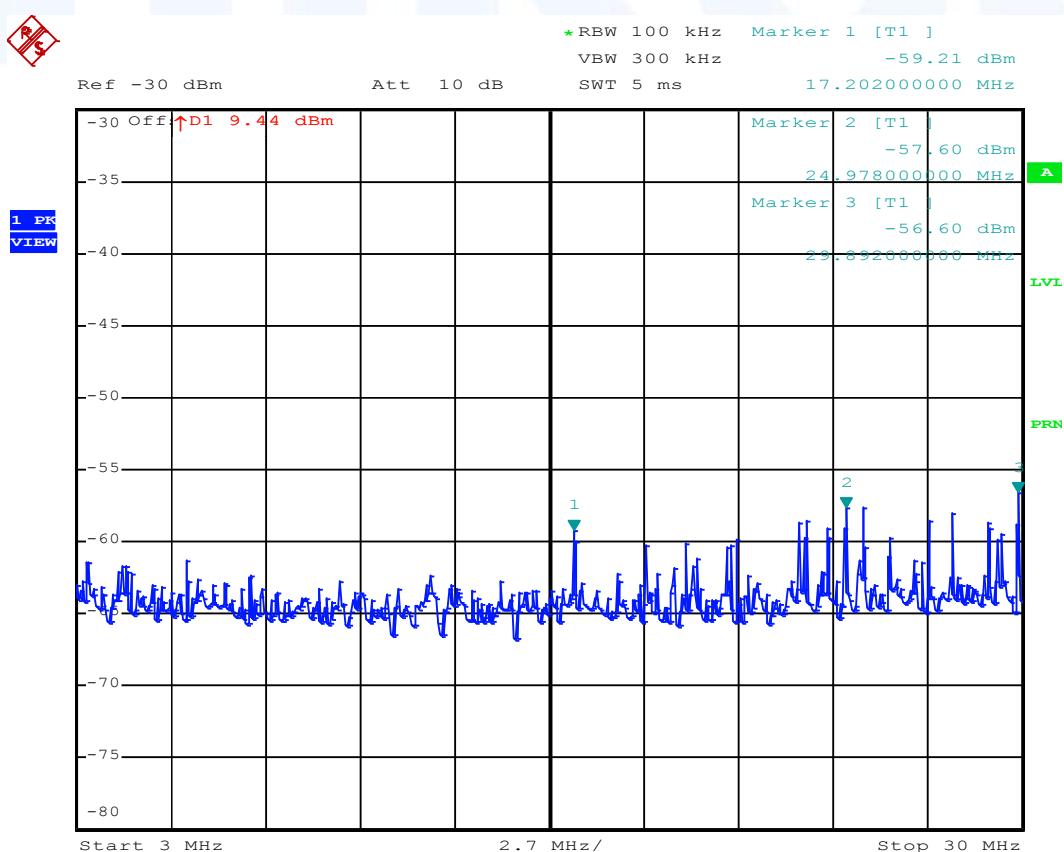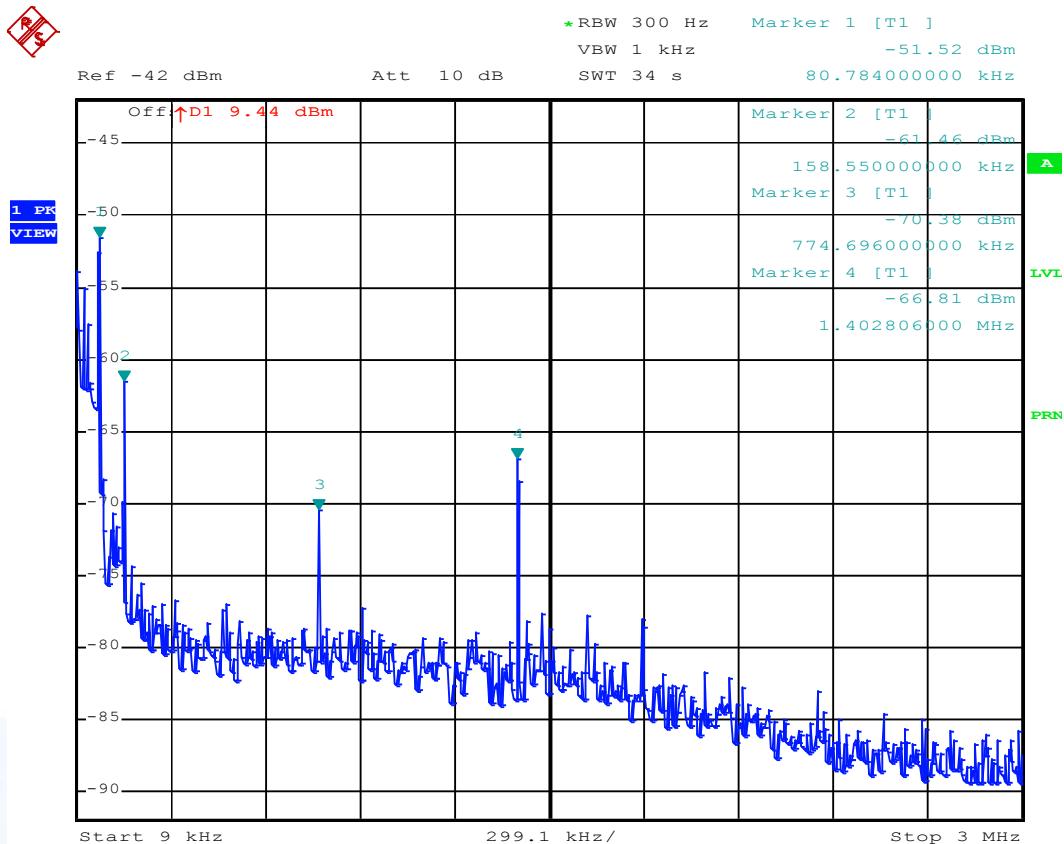


FCC ID: DO4WRTZ1500
Conducted RF emission from 30 to 1000 MHz

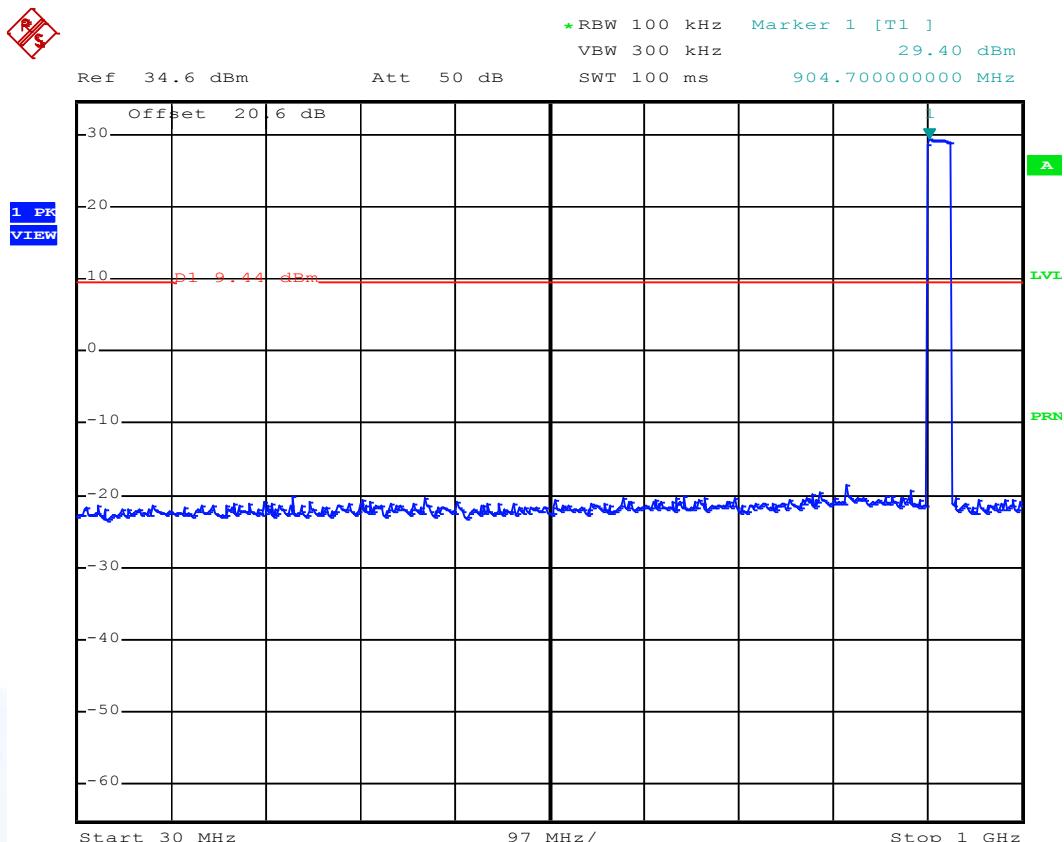

FCC ID: DO4WRTZ1500
Conducted RF emission from 30 to 1000 MHz
(Band edge)

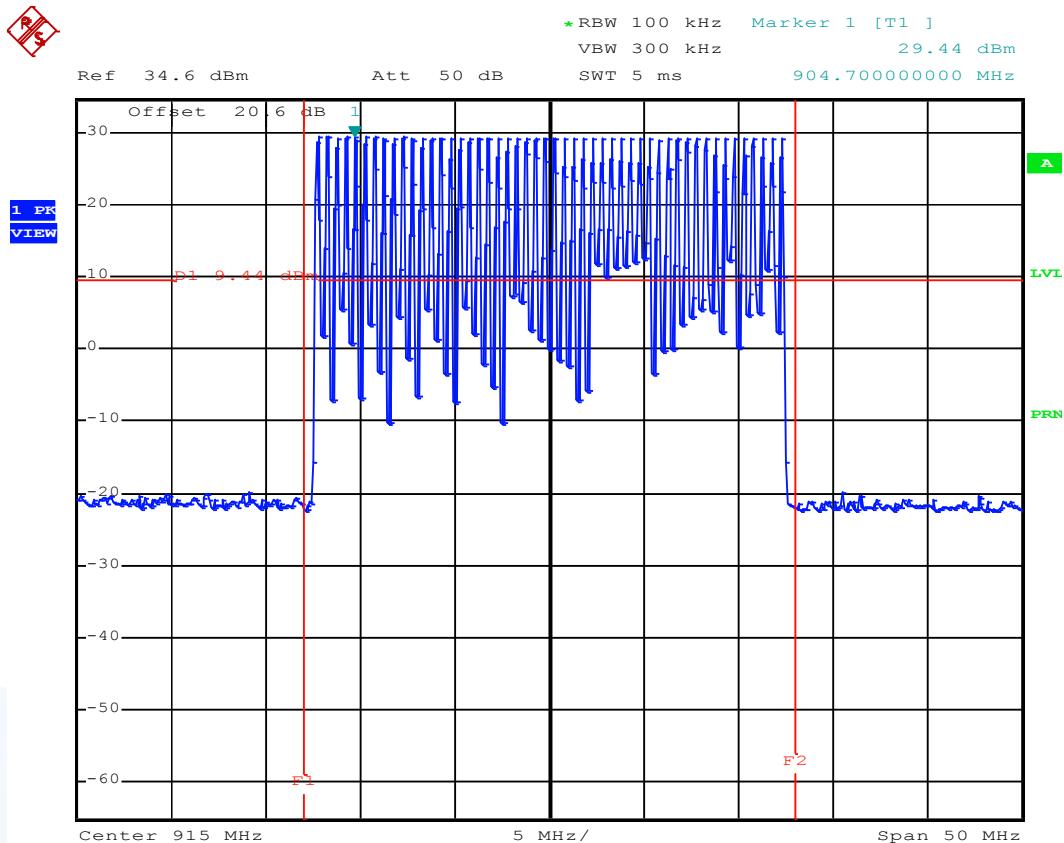

FCC ID: DO4WRTZ1500
Conducted RF emission from 1 to 10 GHz

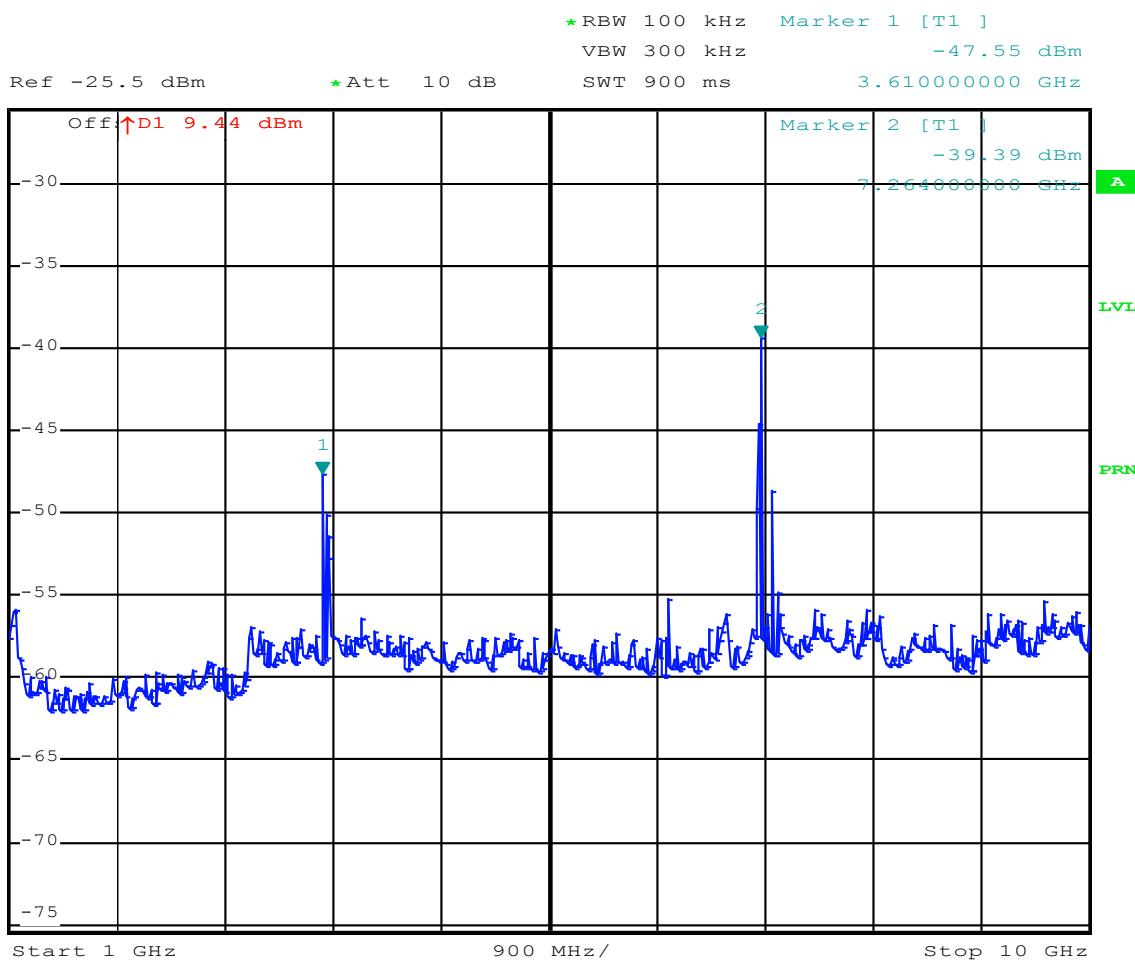

Note: Signal level no. 1 and no. 2 are located in restricted band.

FCC ID: DO4WRTZ1500**5.5 Spurious radiated emissions in restricted bands**

For test instruments and accessories used see section 6 Part **SER 1, SER 2, SER 3**.

5.5.1 Description of the test location

Test location: OATS1
Test distance: 3 metres

Test location: Anechoic Chamber A2
Test distance: 3 metres

5.5.2 Photo documentation of the test set-up

see Attachment C

5.5.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency bands 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

5.5.4 Description of Measurement

Radiated spurious emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linear polarized antennas. The measurements are made with 120 kHz bandwidth and quasi-peak detection (200 Hz, 9 kHz up to 30 MHz). The EUT was placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the equipment under test will be in accordance to ANSI C63.4. The antenna was positioned 3 metres horizontally from the EUT. To locate maximum emissions from the EUT the antenna is shifted in height from 1 to 4 metres, after the EUT is rotated 360 degrees. The measurement scan is made in horizontal and vertical polarization of the antenna. The correction factors for antenna gain and cable loss are stored in the EMI receiver and automatically added to a measurement data to display the final level in dB μ V/m.

For the radiated measurement up from 1 GHz to maximum frequency as specified in Section 15.33, a spectrum analyzer and appropriate linear polarized antennas are used. The EUT is placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The antenna was positioned 3 m horizontally from the EUT. To locate maximum emissions the EUT was rotated 360 degrees in the fully anechoic chamber. The measurement scan is made in horizontal and vertical polarization of the antenna. For testing above 1 GHz, if the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.

FCC ID: DO4WRTZ1500

5.5.5 Test result

5.5.5.1 Radiated emission test $f < 1 \text{ GHz}$

In the frequency range from 9 kHz to 30 MHz no radiated emissions could be measured.

In the frequency range from 30 MHz up to 1 GHz no radiated emissions could be measured.

5.5.5.2 Radiated emission test $f > 1 \text{ GHz}$

Power setting 30.0 dBm

Antenna 520 10073: antenna gain 5.2 dBi

Frequency (GHz)	L: PK (dB μ V)	L: AV (dB μ V)	Bandwidth (kHz)	Correct. (dB)	L: PK dB(μ V/m)	L: AV dB(μ V/m)	Limit AV dB(μ V/m)	Delta (dB)
3.610	40.73	31.42	1000	-8.0	32.7	23.4	54.0	- 26.6
7.264	45.98	39.81	1000	7.5	53.5	47.3	54.0	- 6.7

Radiated limits according to FCC Part 15C, Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	Field strength of spurious emissions (μ V/m)	dB(μ V/m)	Measurement distance (metres)
0.009 - 0.490	2400/F(kHz)		300
0.490 - 1.705	24000/F(kHz)		30
1.705 - 30	30	29,5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

FCC ID: DO4WRTZ1500

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

Remarks: During the test the EUT was set into TX continuous mode with normal modulation.

The measurement was performed up to the 10th harmonic (10000 MHz).

Test was performed in frequency hopping mode from 902.75 to 927.25 MHz.

This mode represents the worst case mode of the EuT.

FCC ID: DO4WRTZ1500

5.6 Hopping sequence


Requirement according to FCC Part 15C, Section 15.247(a):

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

Remarks: The channel is represented by a pseudo-random hopping sequence hopping through the 50 RF-channels.

For detailed information about the hopping sequence, please refer to
“Theory of Operation Manual”, clause 3.0 Detailed Description.

5.6.1 Test protocol

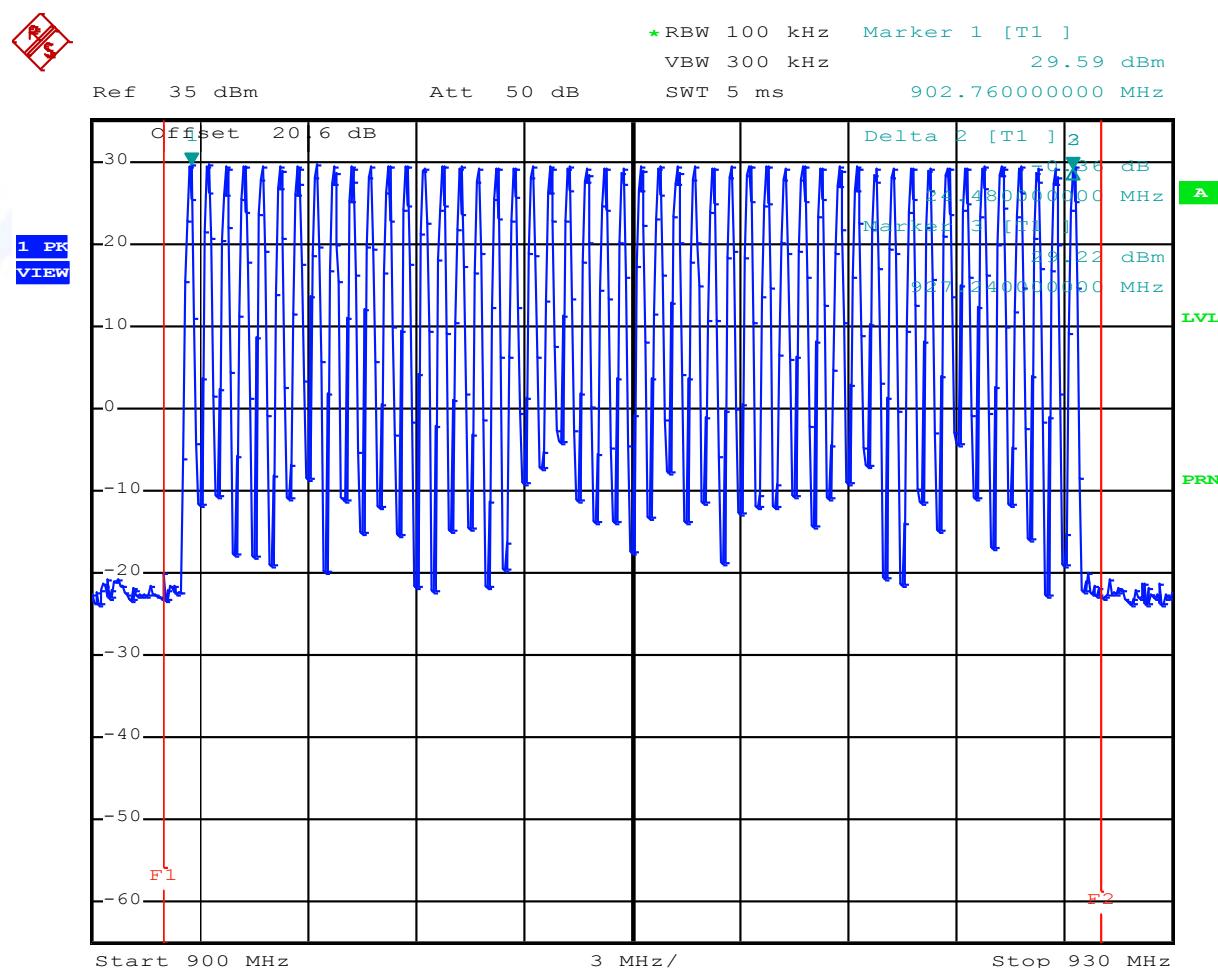

FCC ID: DO4WRTZ1500

5.7 Equal hopping frequency use

Requirement according to FCC Part 15C, Section 15.247(a):

Each frequency must be used equally on the average by each transmitter.

Remarks:	<u>The device fulfills the requirement according to FCC Part 15C, Section 15.247(a).</u>
	<u>The manufacturer declares in the system manual that this function is controlled via software.</u>
	<u>For detailed information, please refer to</u>
	<u>“Theory of Operation Manual”, clause 3.0 Detailed Description.</u>

5.8 Receiver input bandwidth

Requirement according to FCC Part 15C, Section 15.247(a):

The system receivers shall have input bandwidth that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signal.

Remarks:	<u>The receiver bandwidth is equal to the transmitter bandwidth in the 50 hopping channel mode.</u>
	<u>(Declared by the manufacturer.)</u>
	<u>For detailed information, please refer to</u>
	<u>“Theory of Operation Manual”, clause 3.0 Detailed Description.</u>

FCC ID: DO4WRTZ1500

5.9 Dwell time

For test instruments and accessories used see section 6 Part **DC**.

5.9.1 Description of the test location

Test location: Shielded Room S4

5.9.2 Photo documentation of the test set-up

see Attachment C

5.9.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(i):

Frequency hopping systems operating in the 902-928 MHz band: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

5.9.4 Description of Measurement

The measurement was done using a spectrum analyser in time domain function and able to store the maximum time of a period. This time period has been stored and added up the appropriate time intervals the hopping system has applied this channel.

5.9.5 Test result

Channel frequency (MHz)	Pulse Time (ms)	Number of Bursts (in 1 time period)	Dwell time (ms)
914.75	360	1	360

Requirement according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	time of one period (s)	Limit dwell time, AV (ms)
902-928	≥ 50	20	< 400

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: DO4WRTZ1500

5.9.6 Test protocol

Time of occupancy (Dwell time)

REF

Ref 30 dBm Att 40 dB SWT 20 s RBW 10 kHz Marker 1 [T1]
VBW 100 kHz 18.49 dB


18.800000 s

1 AV *
VIEW

A

LVL

PRN

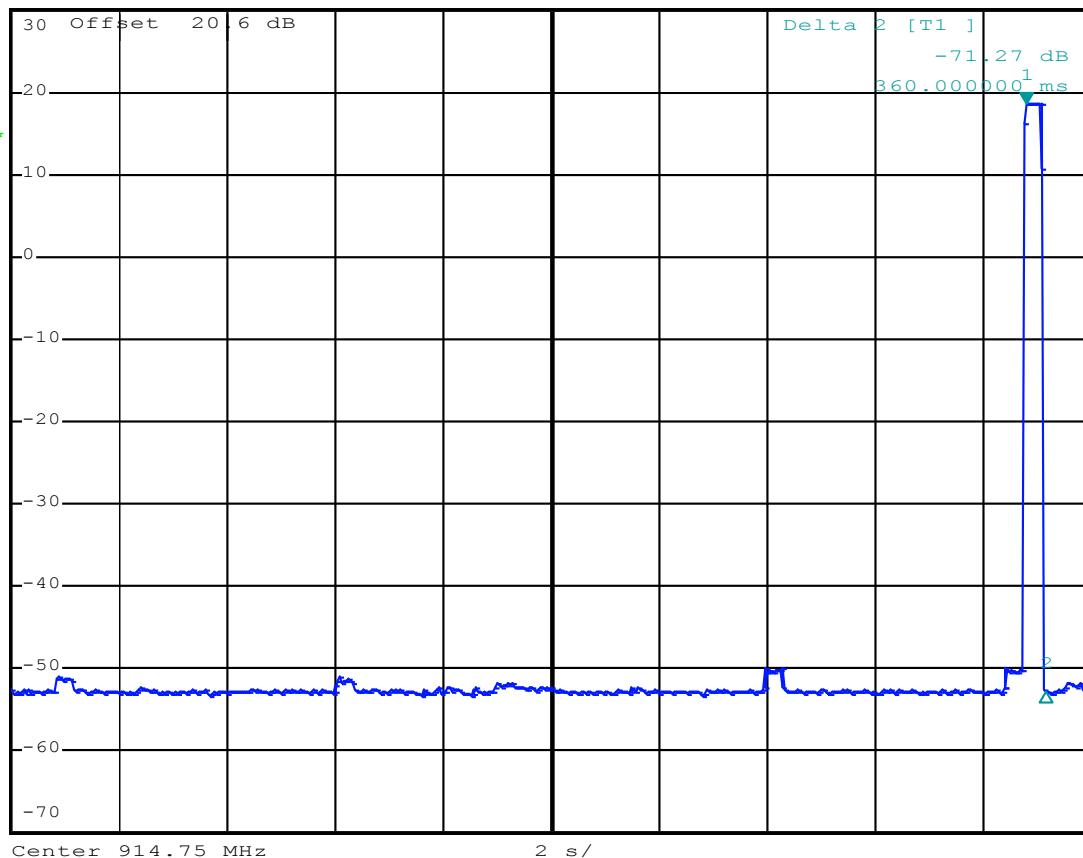

FCC ID: DO4WRTZ1500**5.10 Channel separation**

For test instruments and accessories used see section 6 Part **MB**.

5.10.1 Description of the test location

Test location: Shielded Room S4

5.10.2 Photo documentation of the test set-up

see Attachment C

5.10.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.10.4 Description of Measurement

This measurement was done by using a spectrum analyser. The Span of the analyzer was set wide enough to capture 2 frequencies. The result of the channel separation was compared with the 20 dB bandwidth and recorded.

5.10.5 Test result

Channel 1 (MHz)	Channel 2 (MHz)	Channel separation (kHz)
902.75	903.25	500

Limit according to FCC Part 15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit channel separation (kHz)
All systems		> 25 kHz or 20 dB bandwidth, whichever is greater
2400-2483.5	≥ 15	


The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: DO4WRTZ1500

5.10.6 Test protocol

Channel separation

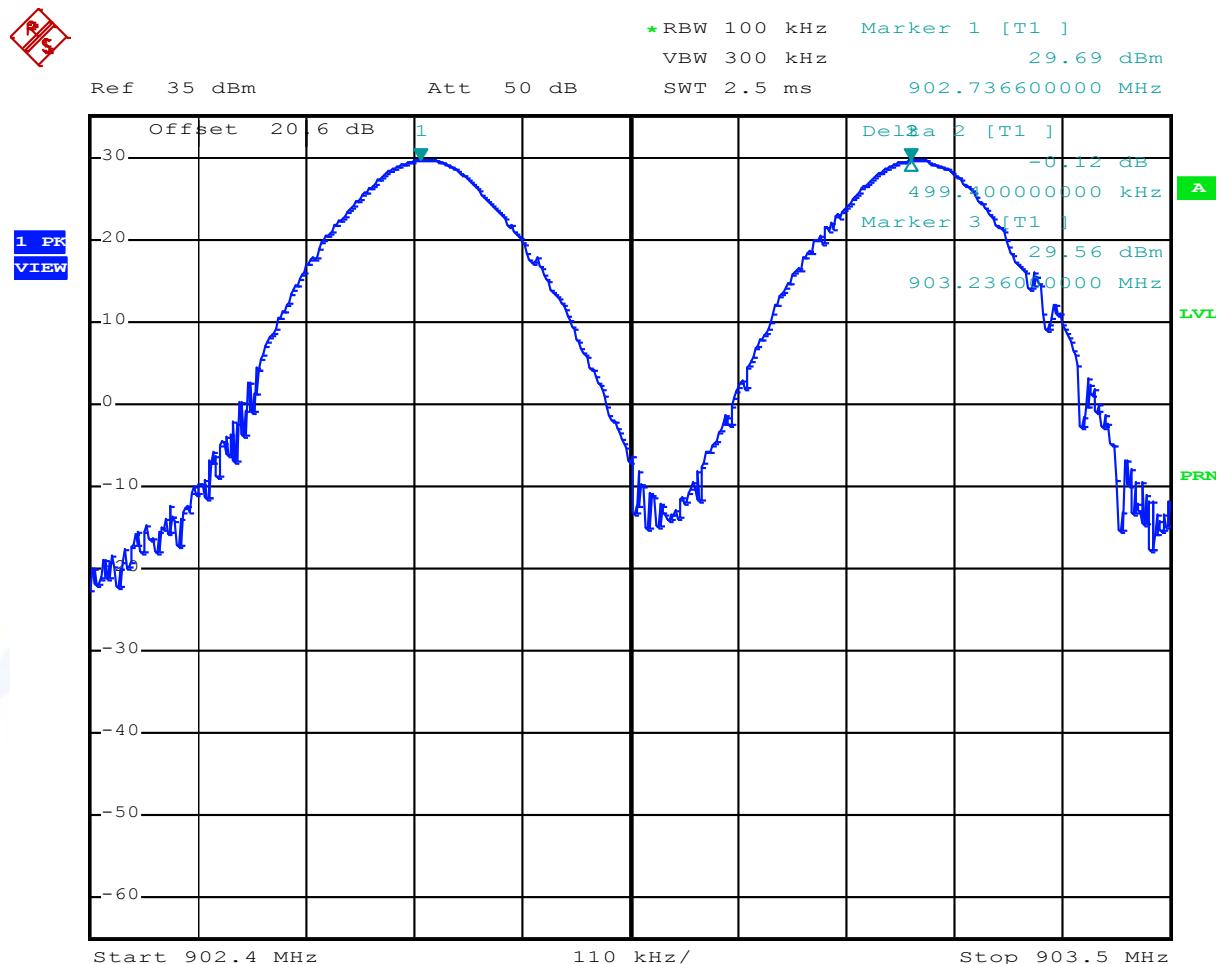

FCC ID: DO4WRTZ1500

5.11 Quantity of hopping channels

For test instruments and accessories used see section 6 Part **MB**.

5.11.1 Description of the test location

Test location: Shielded Room S4

5.11.2 Photo documentation of the test set-up

see Attachment C:

5.11.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1)(i):

For frequency hopping systems operating in the 902-928 MHz band: If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

5.11.4 Description of Measurement

This measurement was done by using a spectrum analyser. The EuT was transmitting at its maximum data rate. The Span of the analyzer was set wide enough to capture the frequency band from 902-928 MHz.

5.11.5 Test result

Hopping channel frequency range	Quantity of hopping channels value	Quantity of hopping channels minimum limit
902-928 MHz	50	50

Limit according to FCC Part 15C, Section 15.247(1):

Frequency range (MHz)	LIMIT (Quantity of Hopping Channels)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	---	---

The requirements are **FULFILLED**.


Remarks: For detailed test result please refer to following test protocol.

FCC ID: DO4WRTZ1500

5.11.6 Test protocol

Quantity of hopping channel

PS

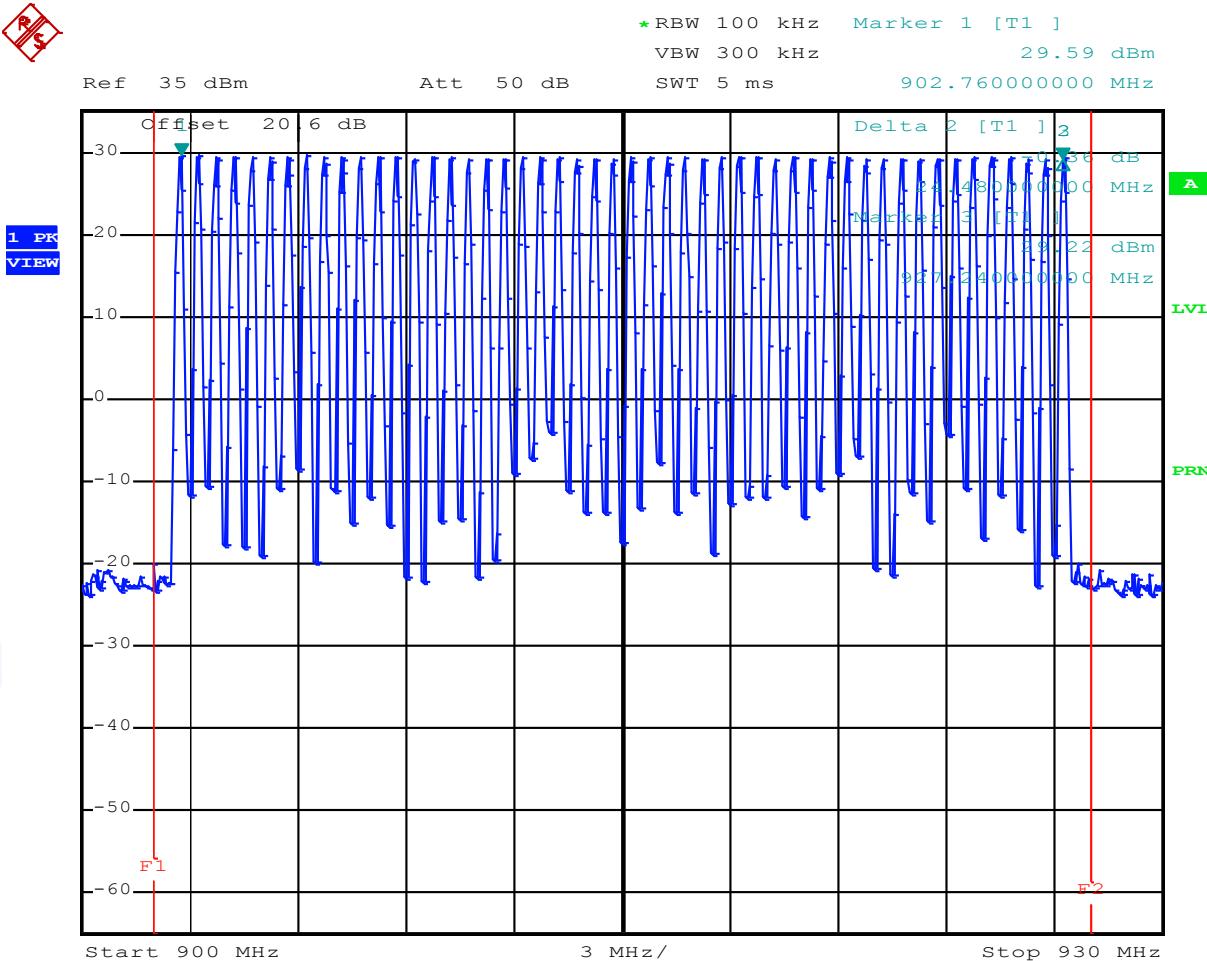

FCC ID: DO4WRTZ1500

5.12 Antenna application - Detailed photos see Attachment A

5.12.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has reverse TNC plugs to connect the defined antennas supplied by the manufacturer.
All supplied antennas meet the requirements of part 15.203 and 15.204.

5.12.2 Antenna requirements

According to FCC Part 15C, Section 15.247 (b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC ID: DO4WRTZ1500**5.13 Receiver conducted disturbances****5.13.1 Description of the test location**

Test location: None

5.13.2 Photo documentation of the test set-up**5.13.3 Applicable standard**

According to FCC Part 15C, Section 15.107(a):

Except as shown in paragraphs (b) and (c) of this Section, for an unintentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Remarks: The measurement is not applicable, because the EuT don't have a receive mode.

FCC ID: DO4WRTZ1500**5.14 Receiver spurious emissions conducted**

For test instruments and accessories used see section 6 Part **SEC 2** and **SEC 3**.

5.14.1 Description of the test location

Test location: None

5.14.2 Applicable standard

According to EN 300 328, clause 4.3.7:

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

Limit according to EN 300 328, clause 4.3.7.2

Narrowband spurious emission limits for receivers:

30 MHz to 1000 MHz	1000 MHz to 12750 MHz
2.0nW (-57dBm)	20.0nW (-47dBm)

Wideband spurious emission limits for receivers:

30 MHz to 1000 MHz	1000 MHz to 12750 MHz
-107 dBm/Hz	-97 dBm/Hz

Remarks: The measurement is not applicable, because the EuT don't have a receive mode.

FCC ID: DO4WRTZ1500**5.15 Maximum permissible exposure (MPE) – See Attachment B**

For test instruments and accessories used see section 6 Part **CPC 2**.

5.15.1 Description of the test location

Test location: None

5.15.2 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

5.15.3 Description of Measurement

The maximum total power input to the antenna has been measured conducted as described in clause 5.3 of this document. Through the Friis transmission formula, the known maximum gain of the antenna and the maximum power, the MPE can be calculated in a defined distance away from the product.

$$\text{Friis transmission formula: } P_d = \frac{P_{out} * G}{4 * \Pi * r^2}$$

where

P_d = power density (mW/cm²)

P_{out} = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

Remarks: For detailed test result please refer Attachment B.

FCC ID: DO4WRTZ1500

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30	02-02/03-05-002	30/06/2012	30/06/2011		
	ESH 2 - Z 5	02-02/20-05-004	12/05/2013	12/05/2011	12/11/2011	12/05/2011
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155			06/10/2011	06/04/2011
	SP 103 /3.5-60	02-02/50-05-182				
CPC 2	FSP 30	02-02/11-05-001	17/05/2012	17/05/2011		
	Inmet 18N50W-20 dB	02-02/50-10-001				
DC	FSP 30	02-02/11-05-001	17/05/2012	17/05/2011		
	Inmet 18N50W-20 dB	02-02/50-10-001				
MB	FSP 30	02-02/11-05-001	17/05/2012	17/05/2011		
	Inmet 18N50W-20 dB	02-02/50-10-001				
SEC 1-3	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	FSP 30	02-02/11-05-001	17/05/2012	17/05/2011		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	WHJS 1000-10EE	02-02/50-05-070				
	NW-2000-NB	02-02/50-05-113				
	Inmet 18N50W-20 dB	02-02/50-10-001				
SER 1	FMZB 1516	01-02/24-01-018			16/02/2012	16/02/2011
	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
SER 2	ESVS 30	02-02/03-05-006	20/06/2012	20/06/2011		
	VULB 9168	02-02/24-05-005	07/03/2012	07/03/2011	17/09/2011	17/03/2011
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
SER 3	FSP 30	02-02/11-05-001	17/05/2012	17/05/2011		
	AFS4-01000400-10-10P-4	02-02/17-05-003				
	AMF-4F-04001200-15-10P	02-02/17-05-004				
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	3117	02-02/24-05-009	11/02/2012	11/02/2011		
	Sucoflex N-1600-SMA	02-02/50-05-073				
	Sucoflex N-2000-SMA	02-02/50-05-075				