

**Advanced
Compliance Laboratory**

210 Cougar Court
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

of

PRODUCT NAME: REMOTE CONTROLLER
MODEL: **Situo 1/Situo 5/Situo 5 Sol RTS FCC Pure II**
FCC ID: DWNSITUORTSII IC: 12049A-SITUORTSII

March 16, 2020

This report concerns (check one): Original grant ☒ Class II change ☐
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CF 0.457(d)(1)(ii)? yes ☐ no ☒
If yes, defer until: _____ (date)
Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes ☐ no ☒
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for: SOMFY SYSTEMS Inc.
Report prepared by: Advanced Compliance Lab
Report number: 0048-200305-01



**The test result in this report IS supported and covered by the NVLAP
accreditation**

Table of Contents

Report Cover Page.....	1
Table of Contents.....	2
Figures.....	3
1. GENERAL INFORMATION.....	4
1.1 Verification of Compliance	4
1.2 Equipment Modifications	5
1.3 Product Information	6
1.4 Test Methodology	6
1.5 Test Facility	6
1.6 Test Equipment	7
1.7 Statement for the Document Use	7
2. PRODUCT LABELING	8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification	9
3.2 Special Accessories	9
3.3 Configuration of Tested System.....	9
4. SYSTEM SCHEMATICS	13
5. CONDUCTED EMISSION DATA	14
5.1 Test Methods and Conditions.....	14
5.2 Measurement Instrument Configuration for Conducted Emission.....	14
5.3 Testing Data	15
6. RADIATED EMISSION DATA.....	16
6.1 Field Strength Calculation	16
6.2 Test Methods and Conditions.....	16
6.3 Test Data.....	16
6.4 Occupied Bandwidth.....	19
7. PHOTOS OF TESTED EUT.....	24

Figures

Figure 2.1 ID Label.....	8
Figure 2.2 Location of ID Label	8
Figure 3.1 Radiated Test Setup	11
Figure 3.2 Conducted Test Setup	11
Figure 4.1 EUT Schematics	12
Figure 5.1 Line Conducted.....	15
Figure 5.2 Neutral Conducted	15
Figure 6.1 Bandwidth Plot	18
Figure 6.2 Pulse Train Timing	21
Figure 7.1 Top View	26
Figure 7.2 Side View.....	27
Figure 7.3 Bottom View.....	28
Figure 7.4 Cover Open Inside View	29
Figure 7.5 Component Side	30
Figure 7.6 Foil Side.....	31

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: REMOTE CONTROLLER

Model: SITUO 1/SITUO 5/SITUO 5 SOL RTS FCC
PURE II

Applicant: SOMFY SYSTEMS INC.

Standards: FCC Part 15.231(a) &
IC RSS-210 Issue 9/RSS-Gen Issue 5

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY


Test Completion Date: March 16, 2020

Report Number: 0048-200305-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC & IC rules and regulations. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	± 2.36	± 2.99	± 1.83



Wei Li
Lab Manager
Advanced Compliance Lab

Date: March 16, 2020

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	ID	CABLE
Product	Remote Controller: RANGE Situo 1/Situo 5/Situo 5 Sol RTS FCC Pure II (1)	FCC ID: DWN- SITUORTSII IC: 12049A-SITUORTSII	
Housing	PLASTICS		
Power Supply	3Vdc CR2032 Lithium Battery		
Operation Freq.	433.42 MHz		
Device Type	Periodic Operation		

(1) EUT submitted for Family Grant with following models:

Remote Control
Situo 1 RTS FCC Pure II Situo 1 RTS FCC Iron II Situo 1 RTS FCC Natural II Situo 1 RTS FCC Arctic II
Situo 5 RTS FCC Pure II Situo 5 RTS FCC Iron II Situo 5 RTS FCC Natural II Situo 5 RTS FCC Arctic II
Situo 5 Sol RTS FCC Pure II

Model differences:

Situo 1 has 1 RF address. Situo 5 has 5 RF addresses. Situo 5 Sol has 5 RF Addresses along with sun control function. All of them have the same Radio PCB layout, radio frequency & RF power setting. There are minor difference in digital PCB circuitry (non-radio function) among Situo 1, Situo 5 and Situo 5 Sol.

Pure, Iron, Natural and Arctic represent different colors of plastic enclosures but electrical identical.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2014/C63.10-2013 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey, USA. This site is accepted by FCC to perform measurements under Part 15 or 18 (Registration # 90601) and also designated by IC as “ site IC 3130A”. The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A00290	EMI Receiver	15/10/20
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	15/01/21
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/21
Electro-Meterics	ALR-25M/30	289	10KHz-30MHz Active Loop Antenna	28/05/20
Fischer Custom	LISN-2	900-4-0008	Line Impedance Stabilization Networks	18/03/20
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	24/03/20
EMCO	3115	4945	Double Ridge Guide Horn Antenna	22/01/21
Agilent	E4440A	US40420700	PSA Spectrum Analyzer	25/08/20

All Test Equipment Used are Calibrated Traceable to NIST Standards.

Standard Calibration interval: 2 year.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. & Canada Governments.

2. PRODUCT LABELING

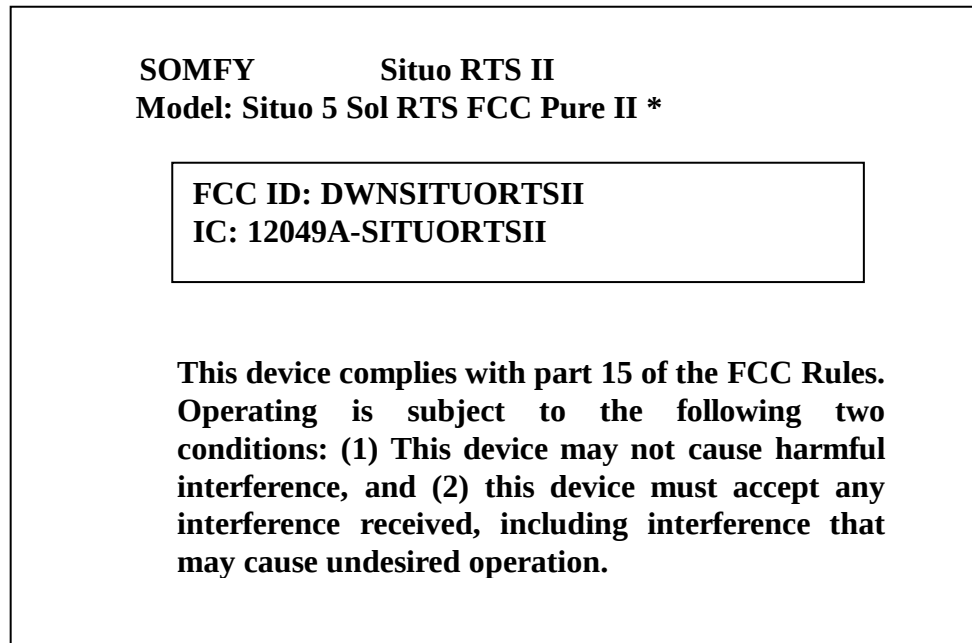


Figure 2.1 ID Label
(statement shown in the manual; *alternative mode No. listed in Sec. 1.3)



Figure 2.2 ID Label Location

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The product was configured for testing in a typical fashion (as a customer would normally use it). EUT was properly orientated for being tested in the correct plane. Its antenna is permanently affixed on PCB.

For this certification, the RTX module drives an external RF circuit whose carrier frequency is 433.42 MHz +/- 100 KHz. The power level of the RF circuit has been set to operate at the level described in FCC 15.231(a). It does not send data.

In normal operation mode, the transmission does stop within 5 seconds after the transmission is deactivated.

Emission test was performed as 433.42MHz Tx was operated continuously. Fresh batteries were used during the test.

Based on prescan results on Situo 1, Situo 5 and Situo 5 Sol, Situo 1 has worst emissions, which's still meet FCC/IC limits.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.x illustrate this system, which is tested standing along.



X-Orientation



Y-Orientation



Z-Orientation



Figure 3.1 Radiated Test Setup

N/A

Figure 3.2 Conducted Test Setup

4. SYSTEM SCHEMATICS

See Attachment.

Figure 4.1 System Schematics

5. CONDUCTED EMISSION DATA


5.1 Test Methods and Conditions

The EUT was under normal operational mode during the conducted emission test. EMI Receiver was scanned from 150KHz to 30MHz with maximum hold mode for maximum emission. Recorded data was sent to the plotter to generate output in linear format. At the input of the spectrum analyzer, a HP transient limiter is inserted for protective purpose. This limiter has a 10 dB attenuation in the range of 150KHz to 30MHz. That factor was automatically compensated by the receiver, so the readings are the corrected readings. The reference of the plot is the CISPR 22 Class B limit in Figure 5.1 through Figure 5.2.

Conducted Emission Technical Requirements				
	Class A		Class B	
Frequency Range	Quasi-Peak dBuV	Average dBuV	Quasi-Peak DBuV	Average dBuV
150kHz –0.5MHz	79 (8912uV)	66 (1995uV)	66-56	56-46
0.5MHz-30MHz	73 (4467uV)	60 (1000uV)	---	---
0.5MHz- 5MHz	---	---	56	46 (250uV)
5MHz-30MHz	---	---	60	50

Emissions that have peak values close to the specification limit (if any) are also measured in the quasi-peak mode to determine compliance.

5.2 Measurement Instrument Configuration for Conducted Emission

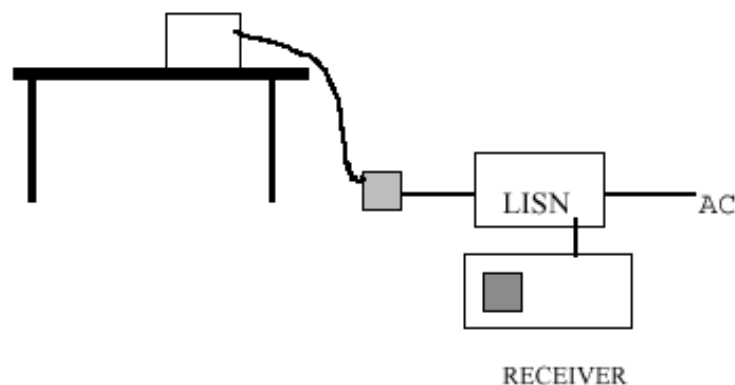

5.3 Testing Data

The following plots show the neutral and line conducted emissions for the typical operation condition (Transmitting and receiving). The conducted test data shows the worst case emissions still below the FCC Part 15/ CISPR32 Class B limits.

Not applicable to this product.

Operation Mode: Normal

Fig. 5.1 Line Conducted Emission

NA

Operation Mode: Normal

Fig. 5.2 Neutral Conducted Emission

NA

6. RADIATED EMISSION DATA

6.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

The pulse train timing plots are showed in Figure 6.2.

The pulse train timing plots as follows:

The total time for each pulse train is 139.62 ms, The short pulse is 0.640ms, The middle pulse is 2.5 ms, The long pulse is 4.8ms.

Coeff. $= (55 \times 0.640 + 1 \times 4.8 + 5 \times 2.5) / 100 = 0.525$

The maximum average field strength should be 0.525 of the peak field strength measured.

So we use peak value minus 5.6dB as calculated maximum average field strength.

6.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range under 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. The frequency range from the lowest clock frequency in EUT circuitry to 10th harmonics were investigated.

6.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 6.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: March 16, 2020,

Radiated Test Data (Worst Cases)

Situo 1 RTS II

Freq. (MHz)	Worst H/V, Z(1)	Height. (m)	Azimuth h	Peak@3m (dBuV/m)	QP/Avg @3m (dBuV/m)	PK Lim (dBuV /m)	QP /Avg. Lim (dBuV/m)	PK Mar (dBuV/ m)	QP /Avg.Mar. (dBuV/m)
433.4(3)	HX	1.0	180	79.9	74.3	100.8	80.8	-20.9	-6.5
866.9(4)	HX	1.0	180	56.7	51.1	80.8	60.8	-24.1	-9.7
1300.4(2)	HX	1.1	090	44.6	39	74.0	54.0	-29.4	-15
1733.9	HX	1.1	000	42.7	37.1	80.8	60.8	-38.1	-23.7
2167.4	HX	1.1	000	44.3	38.7	80.8	60.8	-36.5	-22.1
433.4	VX	1.2	045	66.4	60.8	100.8	80.8	-34.4	-20
866.9	VX	1.2	045	49.1	43.5	80.8	60.8	-31.7	-17.3
1300.4	VX	1.1	000	46.7	41.1	74.0	54.0	-27.3	-12.9
1733.9	VX	1.1	000	43.6	38	80.8	60.8	-37.2	-22.8
2167.4	VX	1.1	270	46.0	40.4	80.8	60.8	-34.8	-20.4
433.4(3)	HY	1.0	180	80.4	74.8	100.8	80.8	-20.4	-6
866.9(4)	HY	1.0	180	55.5	49.9	80.8	60.8	-25.3	-10.9
1300.4(2)	HY	1.1	270	45.2	39.6	74.0	54.0	-28.8	-14.4
1733.9	HY	1.1	330	41.6	36	80.8	60.8	-39.2	-24.8
2167.4	HY	1.1	330	43.7	38.1	80.8	60.8	-37.1	-22.7
433.4	VY	1.2	090	66.7	61.1	100.8	80.8	-34.1	-19.7
866.9	VY	1.2	090	52.9	47.3	80.8	60.8	-27.9	-13.5
1300.4	VY	1.1	000	46.9	41.3	74.0	54.0	-27.1	-12.7
1733.9	VY	1.1	000	42.5	36.9	80.8	60.8	-38.3	-23.9
2167.4	VY	1.1	270	47.8	42.2	80.8	60.8	-33	-18.6
433.4(3)	HZ	1.0	180	78.7	73.1	100.8	80.8	-22.1	-7.7
866.9(4)	HZ	1.0	180	51.9	46.3	80.8	60.8	-28.9	-14.5
1300.4(2)	HZ	1.1	000	45.7	40.1	74.0	54.0	-28.3	-13.9
1733.9	HZ	1.1	000	41.0	35.4	80.8	60.8	-39.8	-25.4
2167.4	HZ	1.1	330	43.8	38.2	80.8	60.8	-37	-22.6
433.4	VZ	1.2	045	80.5	74.9	100.8	80.8	-20.3	-5.9
866.9	VZ	1.2	090	56.9	51.3	80.8	60.8	-23.9	-9.5
1300.4	VZ	1.1	090	47.7	42.1	74.0	54.0	-26.3	-11.9
1733.9	VZ	1.1	180	41.6	36	80.8	60.8	-39.2	-24.8
2167.4	VZ	1.1	180	47.5	41.9	80.8	60.8	-33.3	-18.9

(1) See Figure 3.1, 3.2 and 3.3 for definition of position

(2) Restricted band.

(3) Fundamental limit is 1500-5000 microvolts/meter linear interpolations (average reading) for 260-470 MHz fundamental frequency range; 10965uV/m for 433.4MHz Fundamental. Per FCC 15.231(b) & RSS-210 A1.1 Table A.

(4) Spurious limit is 150-500 microvolts/meter linear interpolations (average reading). Per 15.231(b) & RSS-210 A1.1 Table A.

Situo 5 Sol RTS II

Freq. (MHz)	Worst H/V, Z(1)	Height. (m)	Azimuth h	Peak@3m (dBuV/m)	QP/Avg @3m (dBuV/m)	PK Lim (dBuV /m)	QP /Avg. Lim (dBuV/m)	PK Mar (dBuV/ m)	QP /Avg.Mar. (dBuV/m)
433.4(3)	HX	1.0	180	78.8	73.2	100.8	80.8	-22	-7.6
866.9(4)	HX	1.0	180	56.0	50.4	80.8	60.8	-24.8	-10.4
1300.4(2)	HX	1.1	090	43.1	37.5	74.0	54.0	-30.9	-16.5
1733.9	HX	1.1	000	40.9	35.3	80.8	60.8	-39.9	-25.5
2167.4	HX	1.1	000	42.8	37.2	80.8	60.8	-38	-23.6
433.4	VX	1.2	045	65.7	60.1	100.8	80.8	-35.1	-20.7
866.9	VX	1.2	045	50.1	44.5	80.8	60.8	-30.7	-16.3
1300.4	VX	1.1	000	45.6	40	74.0	54.0	-28.4	-14
1733.9	VX	1.1	000	42.5	36.9	80.8	60.8	-38.3	-23.9
2167.4	VX	1.1	270	46.3	40.7	80.8	60.8	-34.5	-20.1
433.4(3)	HY	1.0	180	80.0	74.4	100.8	80.8	-20.8	-6.4
866.9(4)	HY	1.0	180	57.6	52	80.8	60.8	-23.2	-8.8
1300.4(2)	HY	1.1	270	44.1	38.5	74.0	54.0	-29.9	-15.5
1733.9	HY	1.1	330	40.5	34.9	80.8	60.8	-40.3	-25.9
2167.4	HY	1.1	330	42.6	37	80.8	60.8	-38.2	-23.8
433.4	VY	1.2	090	67.5	61.9	100.8	80.8	-33.3	-18.9
866.9	VY	1.2	090	50.4	44.8	80.8	60.8	-30.4	-16
1300.4	VY	1.1	000	45.9	40.3	74.0	54.0	-28.1	-13.7
1733.9	VY	1.1	000	41.1	35.5	80.8	60.8	-39.7	-25.3
2167.4	VY	1.1	270	46.7	41.1	80.8	60.8	-34.1	-19.7
433.4(3)	HZ	1.0	180	75.6	70	100.8	80.8	-25.2	-10.8
866.9(4)	HZ	1.0	180	51.9	46.3	80.8	60.8	-28.9	-14.5
1300.4(2)	HZ	1.1	000	44.6	39	74.0	54.0	-29.4	-15
1733.9	HZ	1.1	000	39.6	34	80.8	60.8	-41.2	-26.8
2167.4	HZ	1.1	330	42.4	36.8	80.8	60.8	-38.4	-24
433.4	VZ	1.2	045	80.4	74.8	100.8	80.8	-20.4	-6.0
866.9	VZ	1.2	090	53.8	48.2	80.8	60.8	-27	-12.6
1300.4	VZ	1.1	090	46.4	40.8	74.0	54.0	-27.6	-13.2
1733.9	VZ	1.1	180	40.7	35.1	80.8	60.8	-40.1	-25.7
2167.4	VZ	1.1	180	46.2	40.6	80.8	60.8	-34.6	-20.2

(1) See Figure 3.1, 3.2 and 3.3 for definition of position


(2) Restricted band.

(3) Fundamental limit is 1500-5000 microvolts/meter linear interpolations (average reading) for 260-470 MHz fundamental frequency range; 10965uV/m for 433.4MHz Fundamental. Per FCC 15.231(b) & RSS-210 A1.1 Table A.

(4) Spurious limit is 150-500 microvolts/meter linear interpolations (average reading). Per 15.231(b) & RSS-210 A1.1 Table A.

6.4 Occupied Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency, in this case, 1.0835Hz(433.42x0.25%). Bandwidth is determined at the points 20dB down from the modulated carrier or by containing 99% of the total power of the signal. The occupied bandwidth plots are given as following.

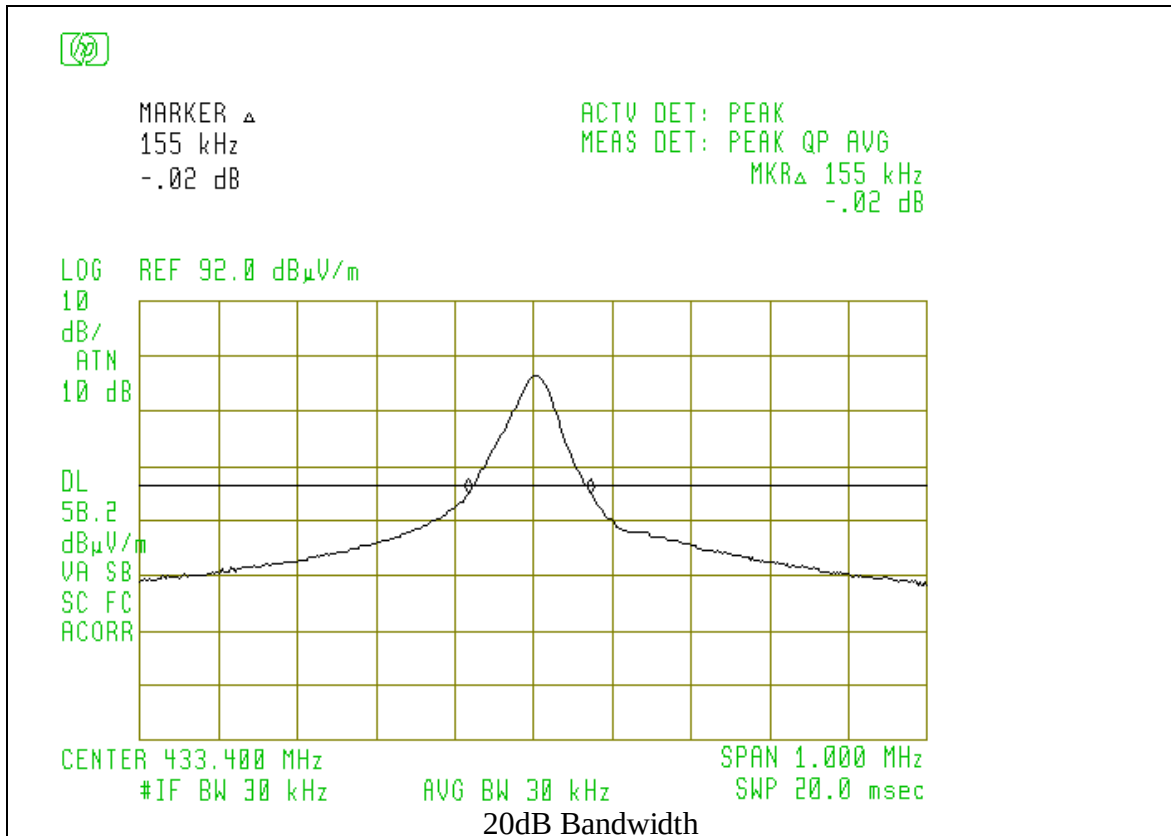



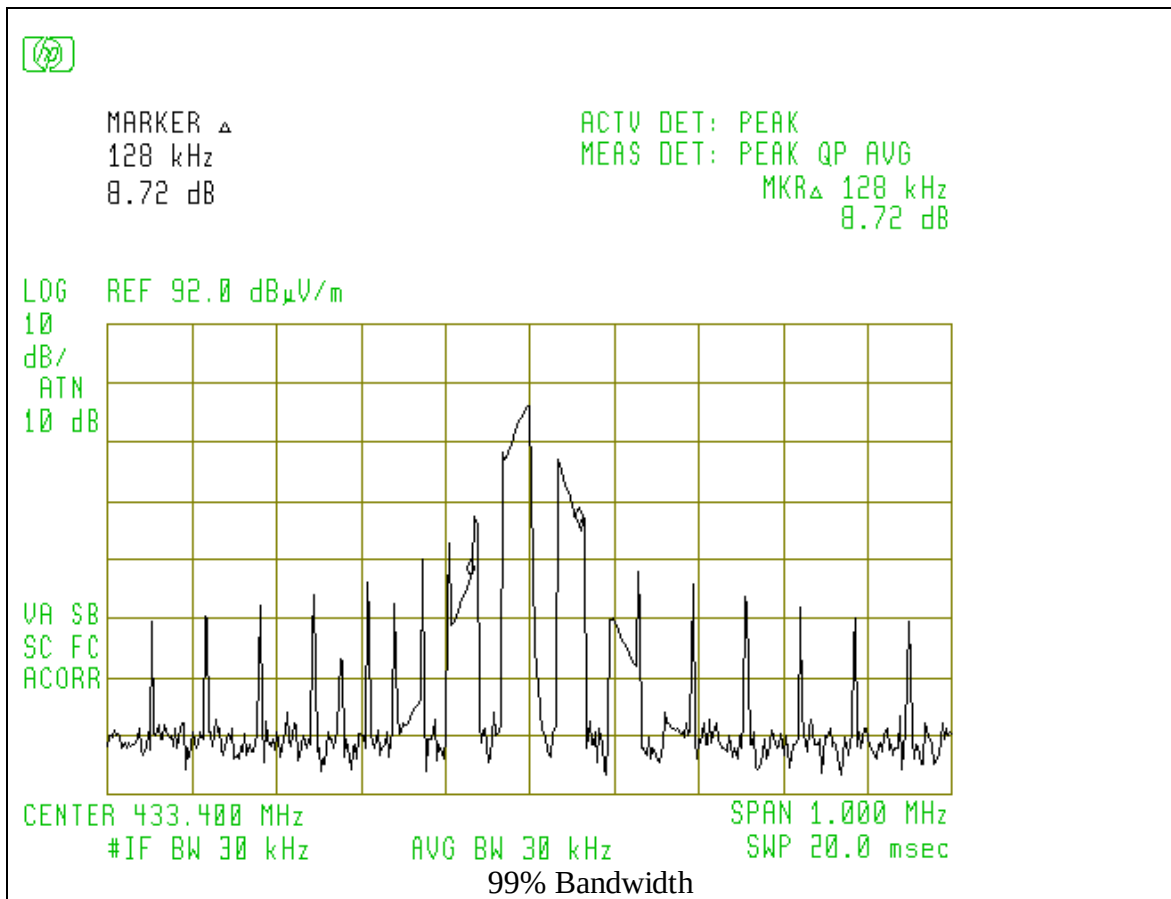


Figure 6.1 Occupied Bandwidth

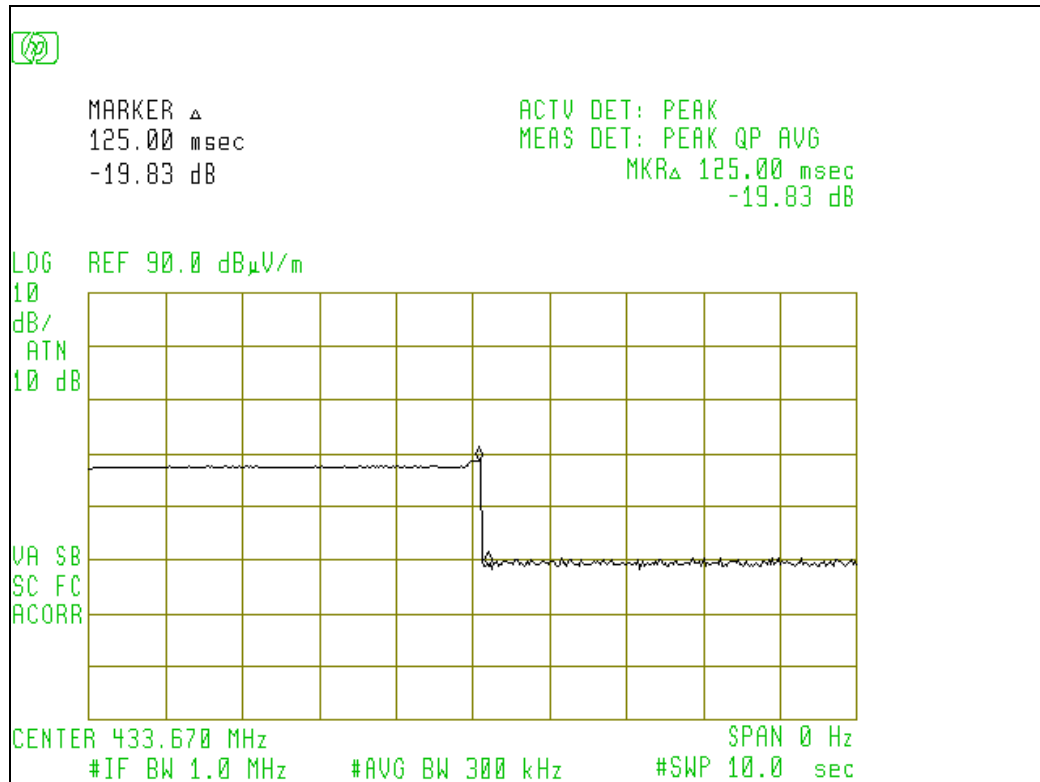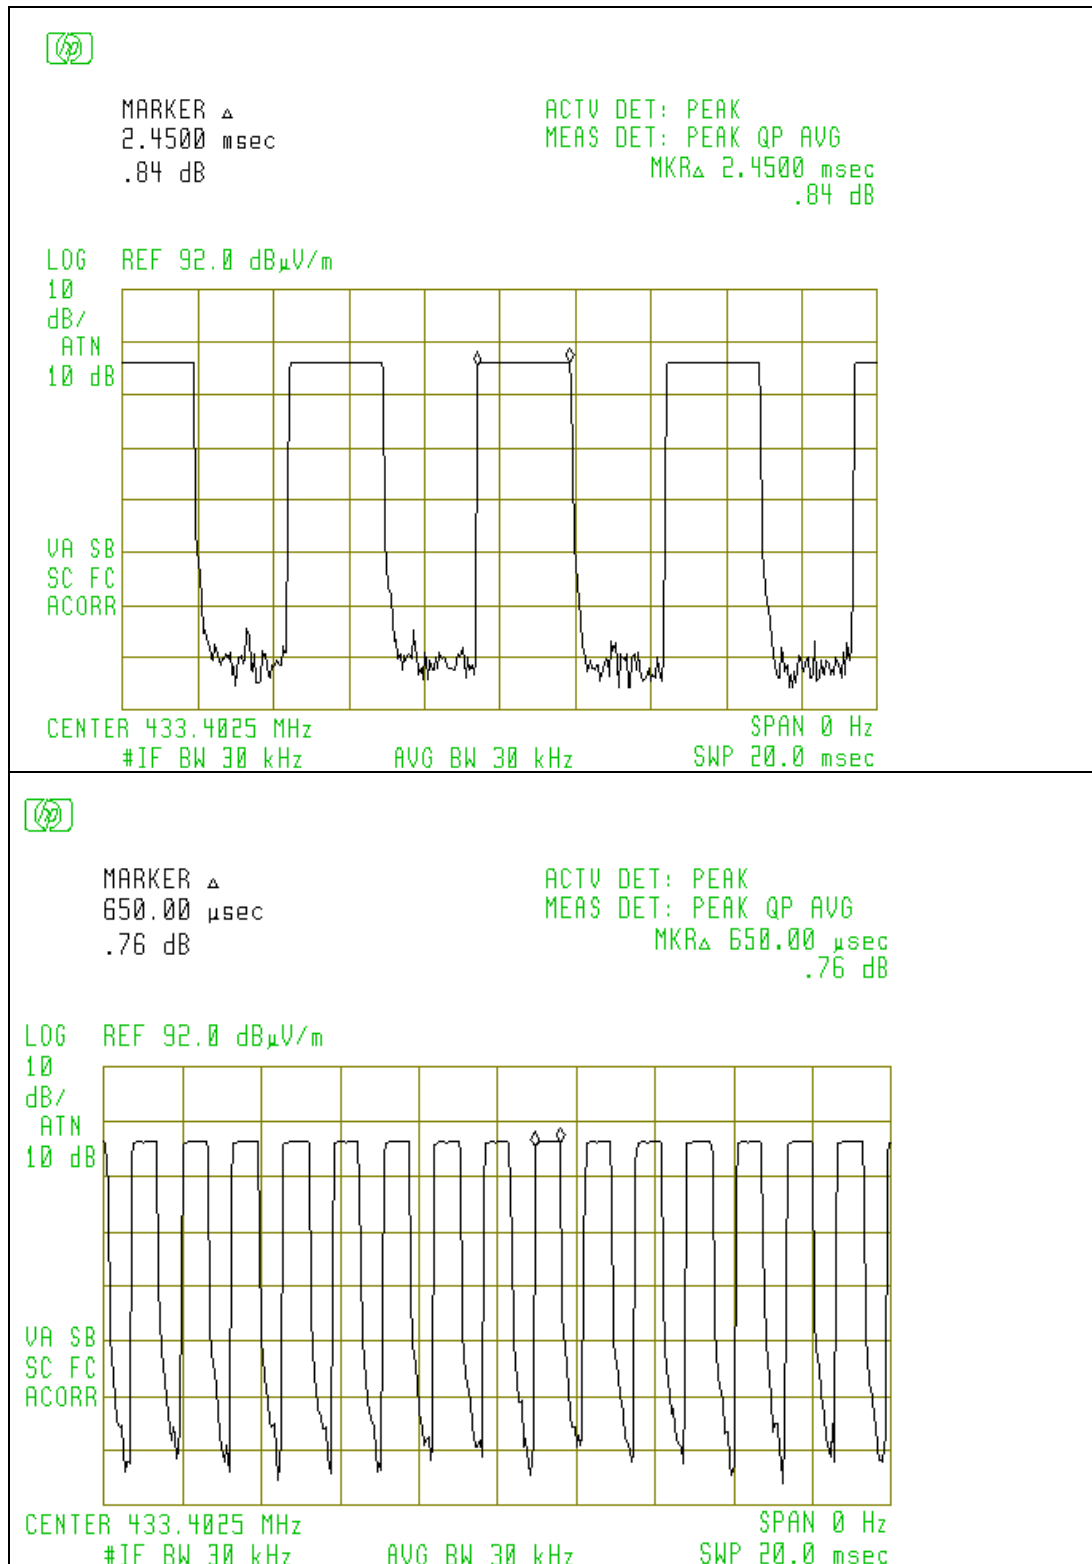

Tx stopped within 5s after deactivated



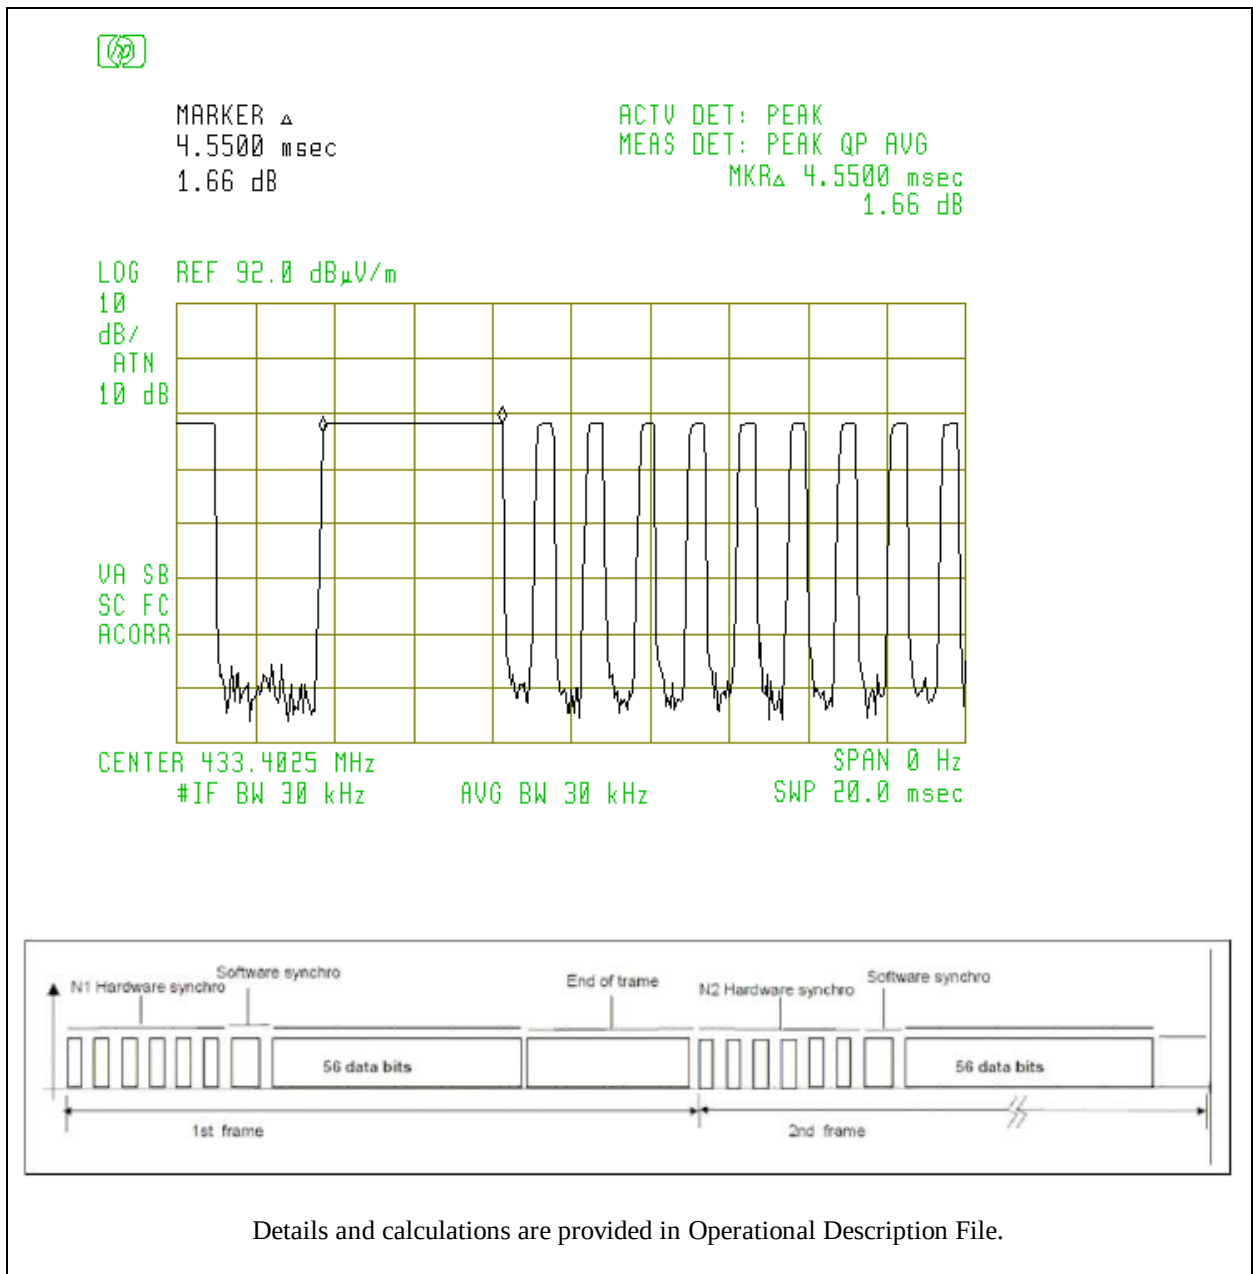


Figure 6.2 Pulse Train Timing