


R99 Removed
R6 Removed
R12 is connected to
Pin#25&31 are connected to VBAT

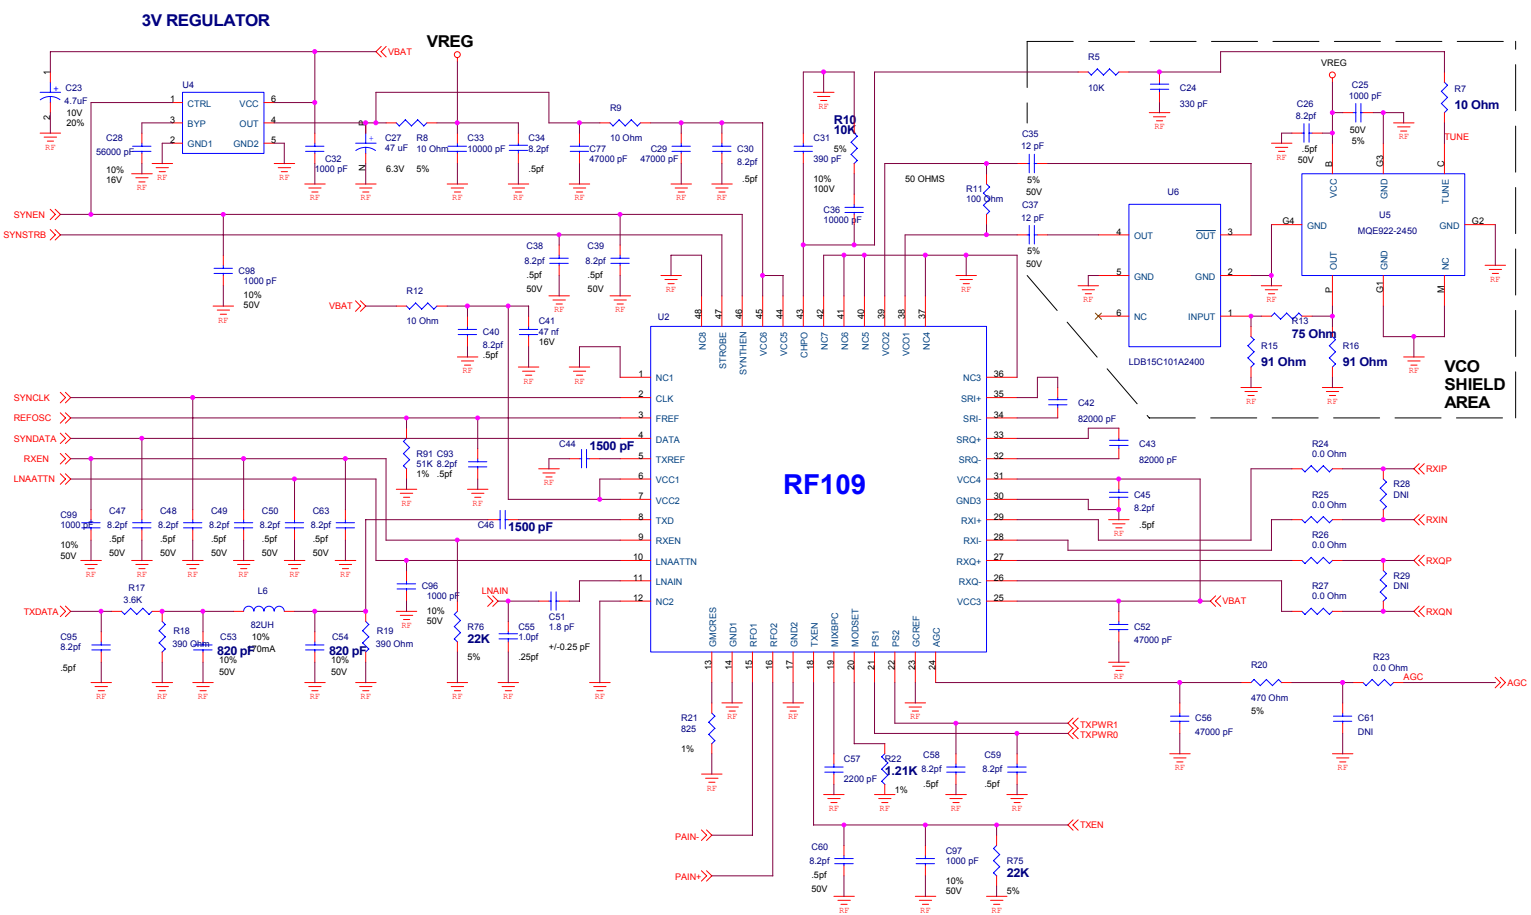


Note: All 8.2pF capacitors have tolerance of 0.5pF, The capacitors less than 2pF have tolerance of 0.25pF.

Schematic - Base Unit

FCC ID: DXACL2200
Teledex Corporation
2.4GHz DSS Cordless Telephone

Teledex			
CL2420 TRANSP			
Maxim Bakaleynik (408) 5742142	Size C	CAGE Code	DWG NO
Tuesday, September 02, 2003	Scale	Sheet	1 of 4


Schematic - Base Unit

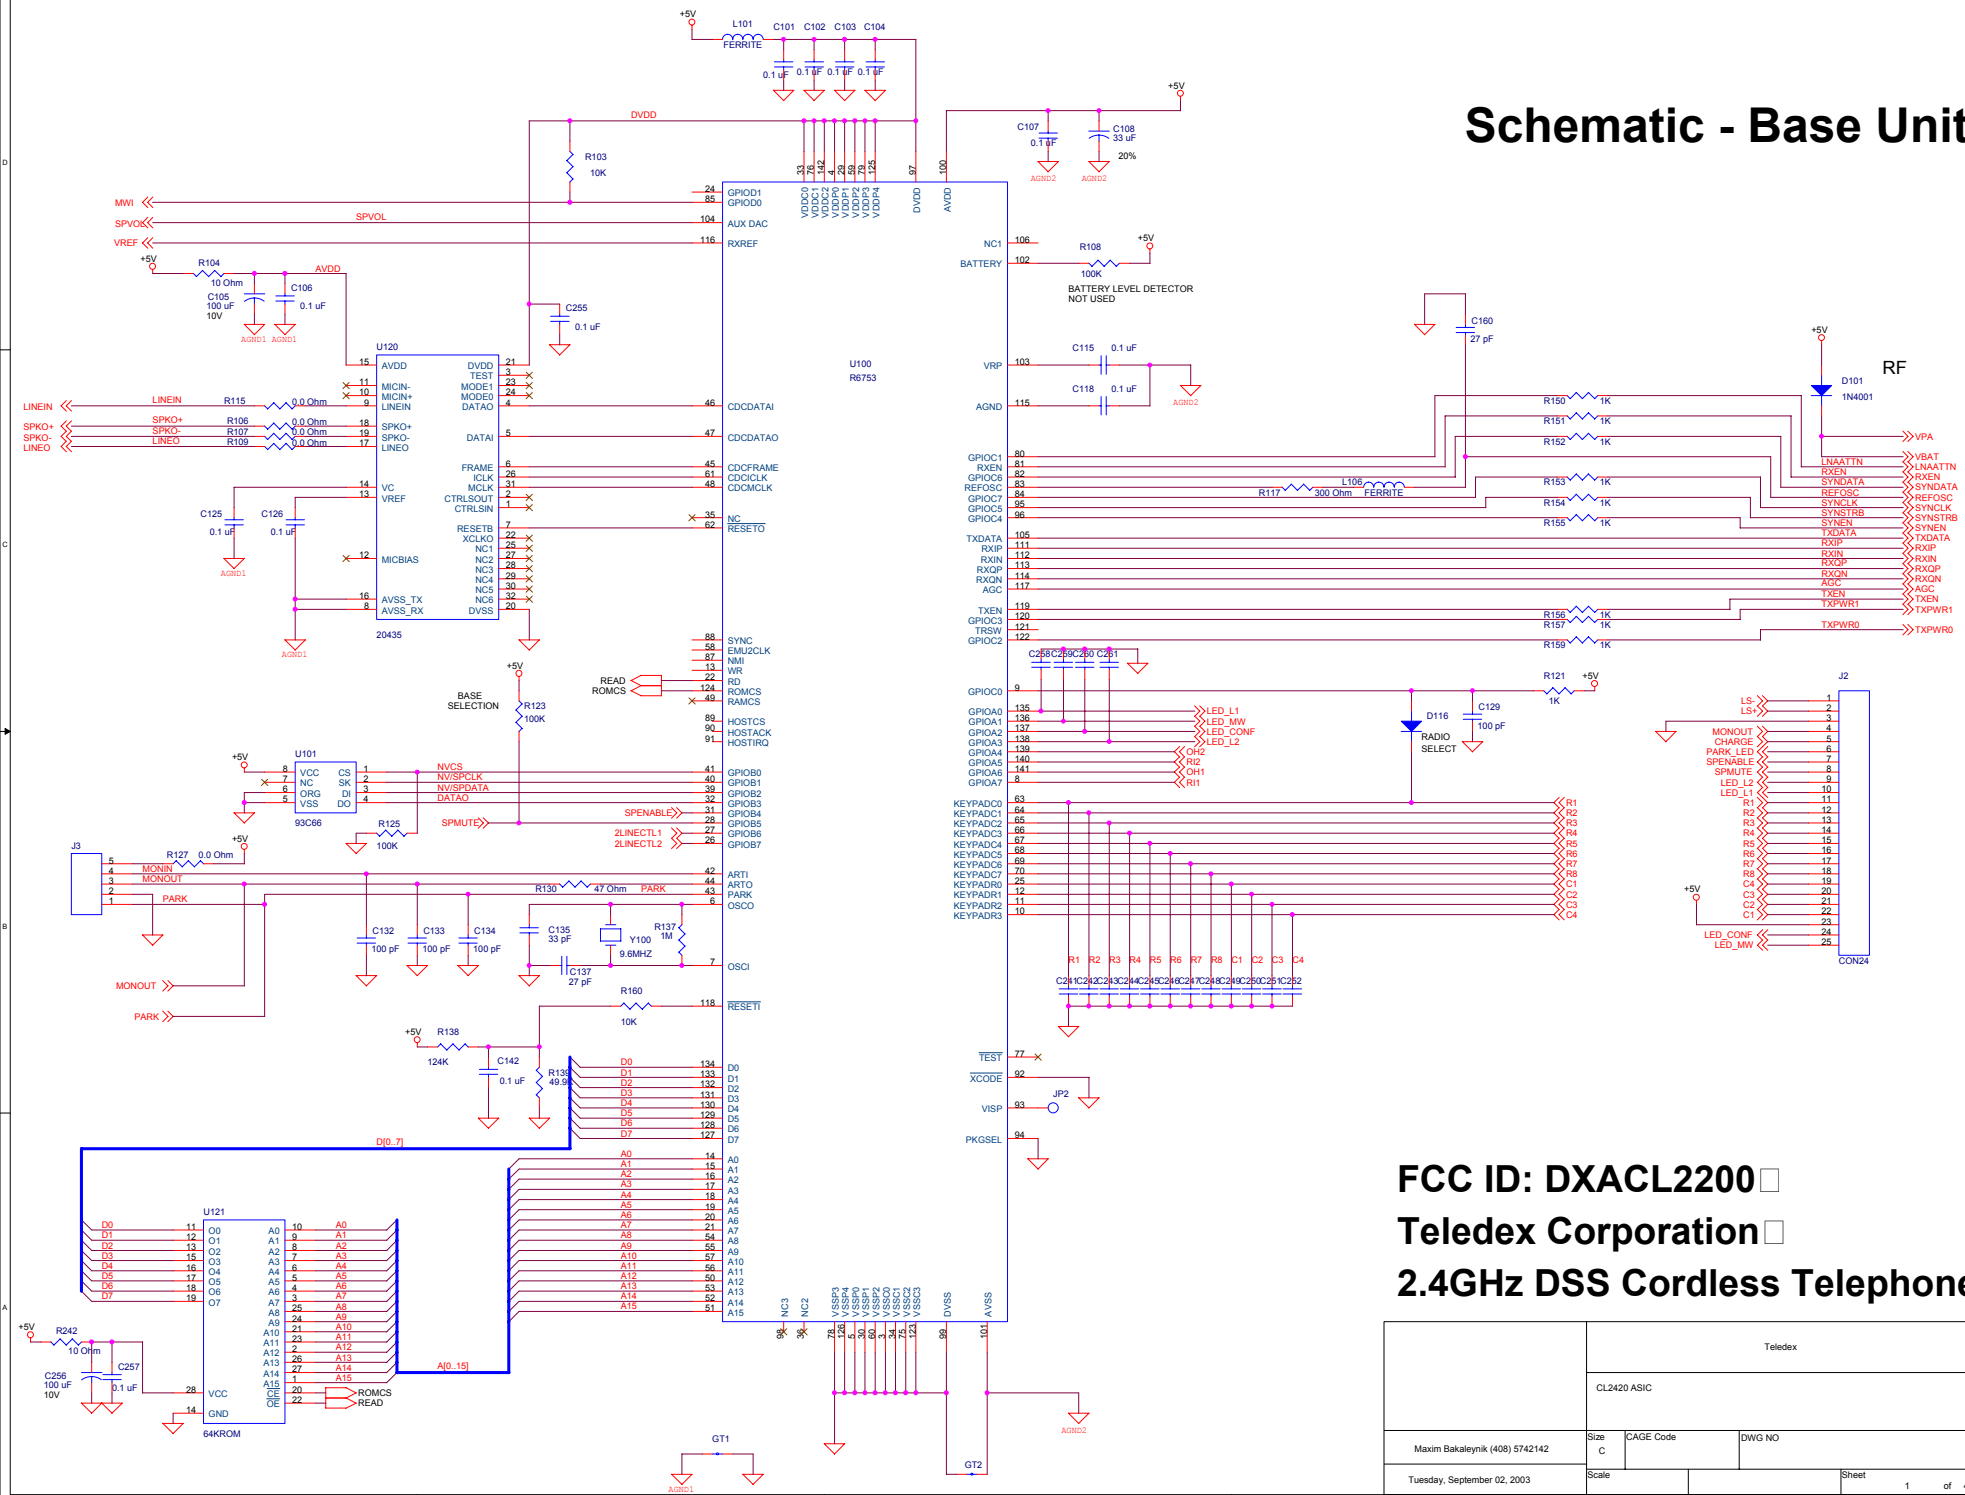

FCC ID: DXACL2200
Teledex Corporation
2.4GHz DSS Cordless Telephone


	Telex			
	CL2420 ASIC			
Maxim Bakaleynik (408) 5742142	Size C	CAGE Code	DWG NO	Rev 1 4B
Tuesday, September 02, 2003	Scale		Sheet	1 of 4

Schematic - Base Unit

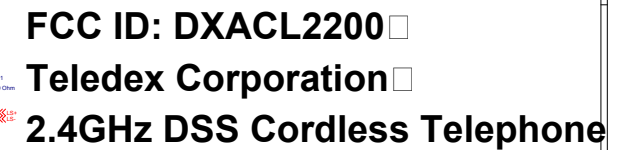

	Telex			
	CL2420 Line Interface			
Muzim Bakalyznik (406) 5742142	Size D	EAGE Code	OWING NO	Rev 4B
Tuesday, September 02, 2003	Scale		Sheet 2 of 4	

FCC ID: DXACL2200 ☐
Teledex Corporation ☐
2.4GHz DSS Cordless Telephone



	Telex			
	CL2420 Power AMP			
Maxim Bakaleynik (408) 5742142	Size C	CAGE Code	DWG NO	Rev 1 4B
Tuesday, September 02, 2003	Scale		Sheet	3 of 4