

Test Laboratory: Compliance Certification Services

1_L-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Left Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2404.8 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, Low/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.24 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.102 mW/g

Touch position, Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.056 mW/g

Reference Value = 7.24 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.107 mW/g

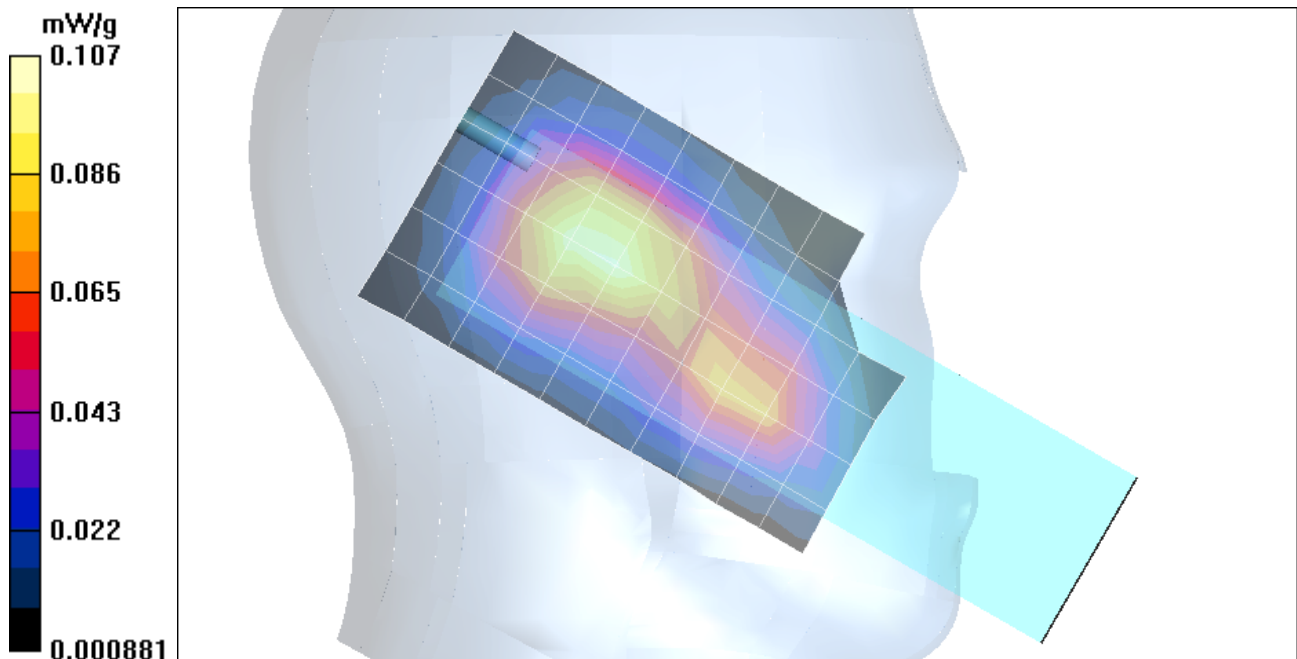

Test Laboratory: Compliance Certification Services

1_L-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Left Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2439 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Touch position, Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.047 mW/g

Reference Value = 6.69 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.091 mW/g

Touch position, Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.038 mW/g

Reference Value = 6.69 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.072 mW/g

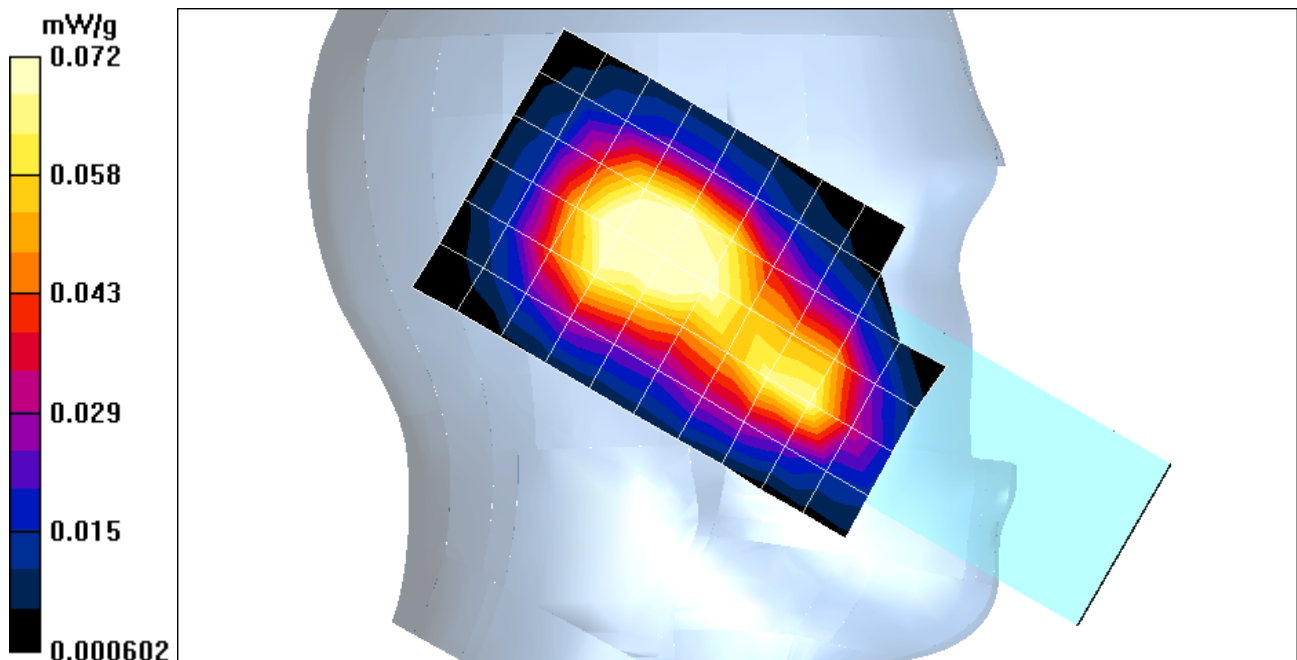

Test Laboratory: Compliance Certification Services

1_L-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Left Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2475 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, High/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Touch position, High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.057 mW/g

Reference Value = 7.15 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.109 mW/g

Touch position, High/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.044 mW/g

Reference Value = 7.15 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.086 mW/g

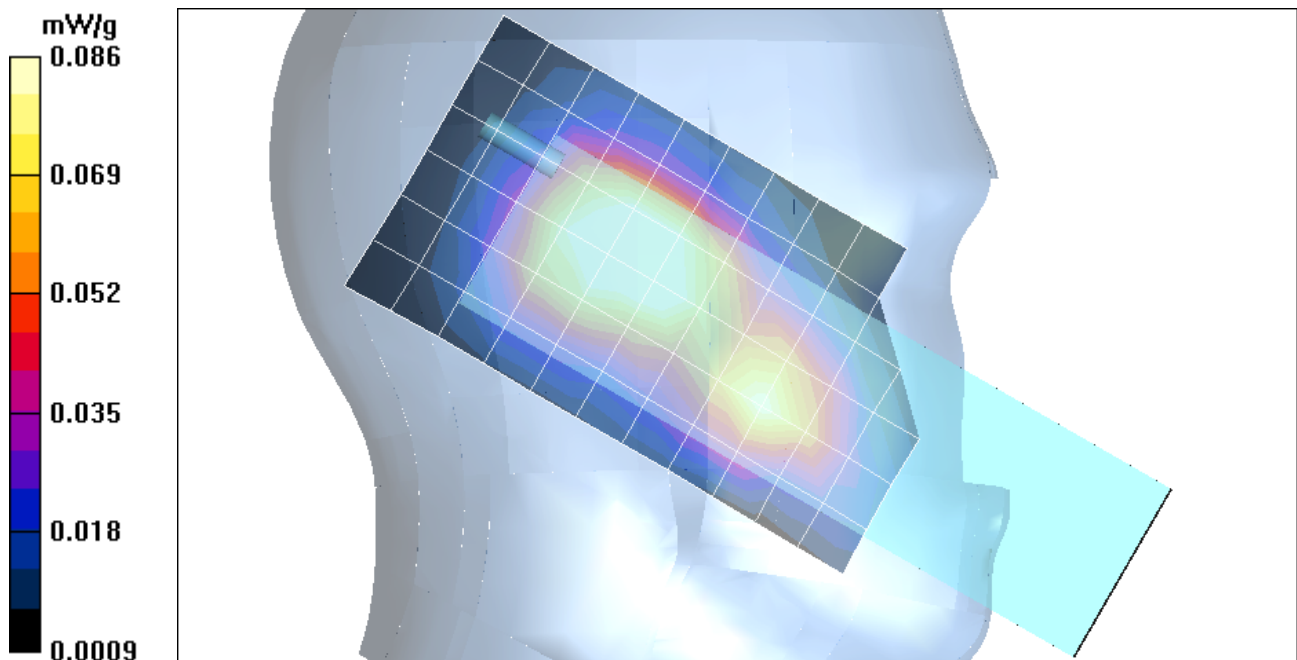

Test Laboratory: Compliance Certification Services

1_L-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

DASY4 Configuration:


- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, High/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 7.15 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.087 mW/g

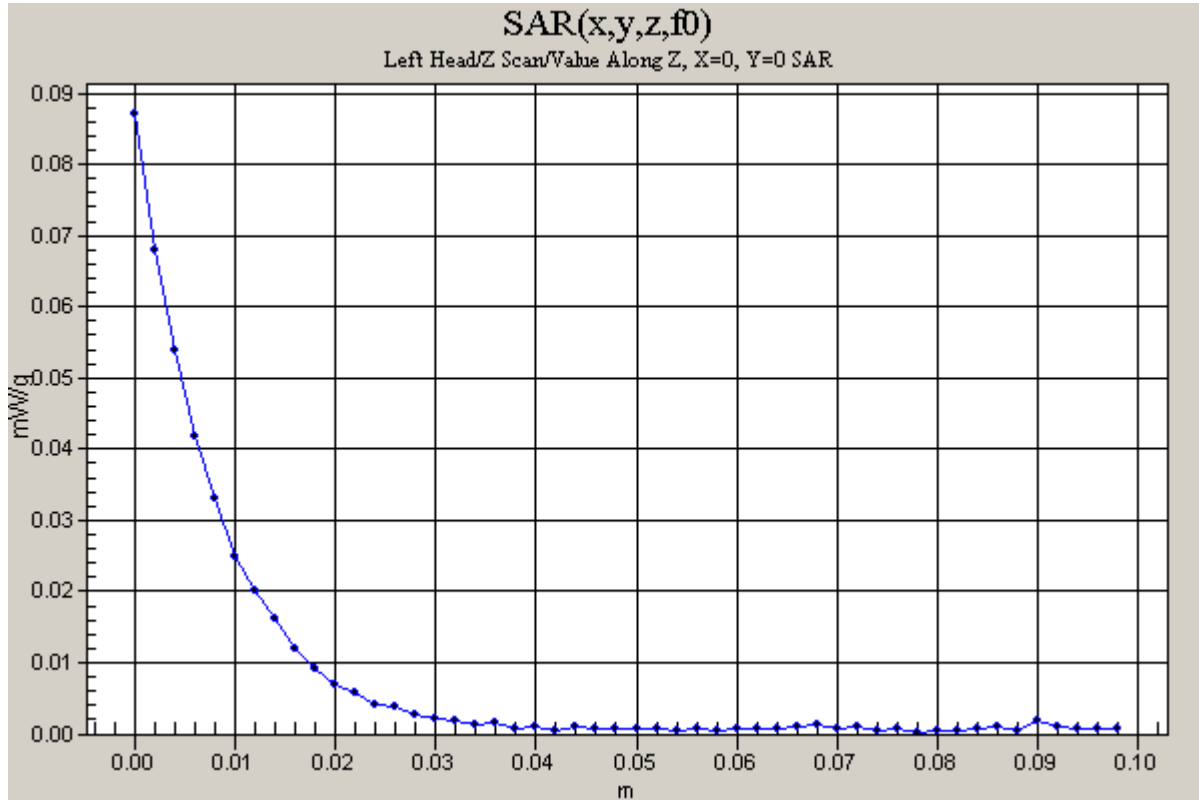

Test Laboratory: Compliance Certification Services

2_L-Tilt

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Left Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2439 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Tilt position, Middle/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.7 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.077 mW/g

Tilt position, Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.043 mW/g

Reference Value = 6.7 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.081 mW/g

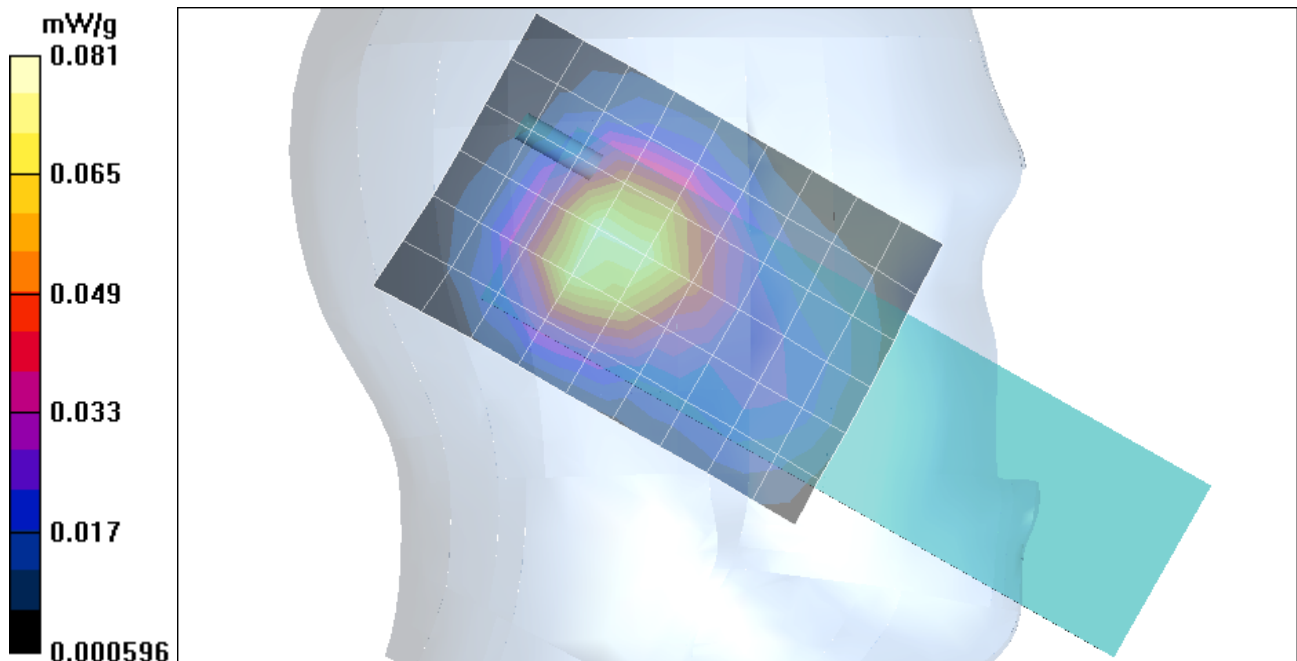

Test Laboratory: Compliance Certification Services

2_L-Tilt

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Left Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2475 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Tilt position, High/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.42 V/m

Power Drift = -0.13 dB

Maximum value of SAR = 0.098 mW/g

Tilt position, High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.053 mW/g

Reference Value = 7.42 V/m

Power Drift = -0.13 dB

Maximum value of SAR = 0.099 mW/g

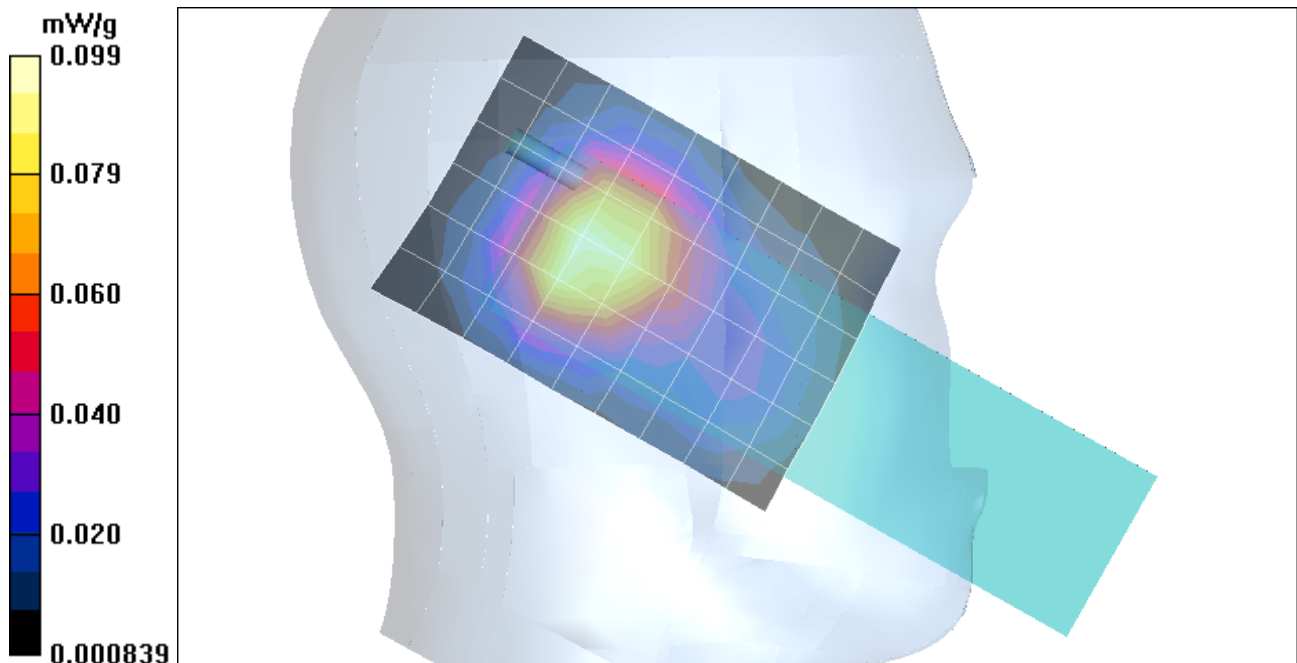

Test Laboratory: Compliance Certification Services

2_L-Tilt

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

DASY4 Configuration:


- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Tilt position, High/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 7.42 V/m

Power Drift = -0.13 dB

Maximum value of SAR = 0.081 mW/g

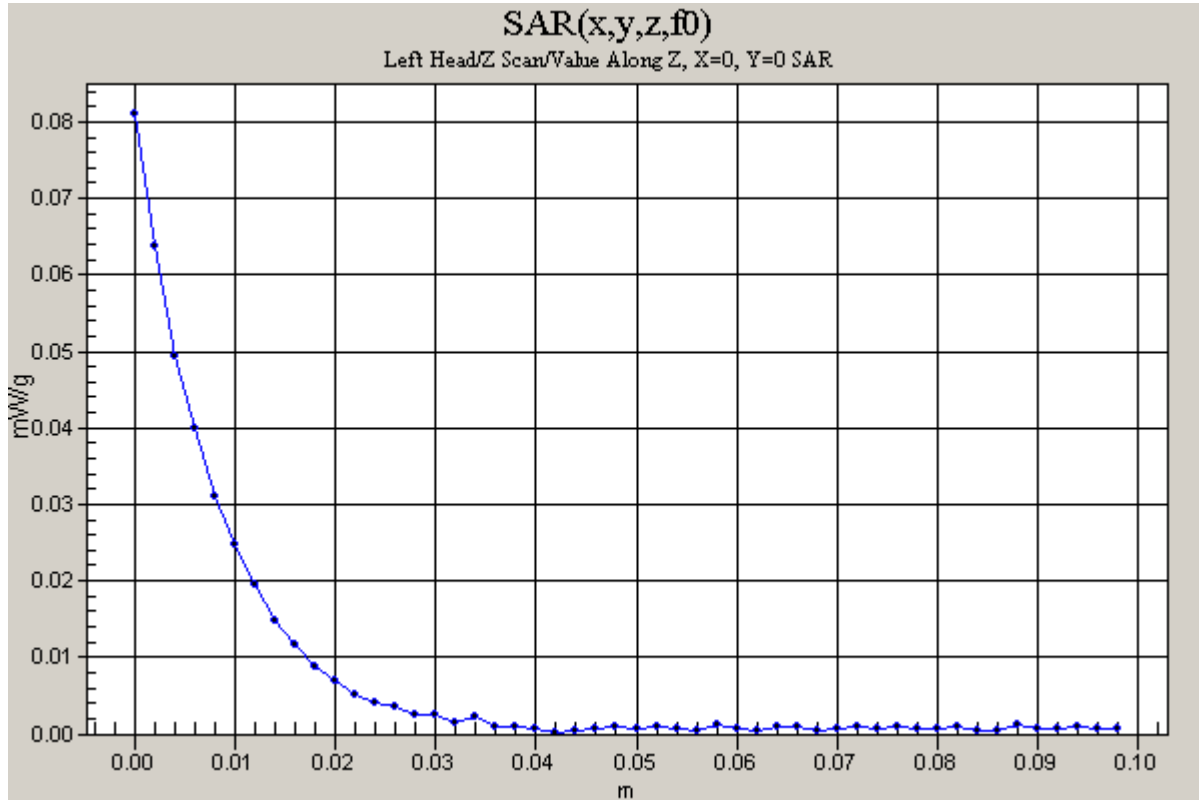

Test Laboratory: Compliance Certification Services

3_R-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Right Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2439 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, Middle/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Touch position, Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.041 mW/g

Reference Value = 6.4 V/m

Power Drift = -0.14 dB

Maximum value of SAR = 0.077 mW/g

Touch position, Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.032 mW/g

Reference Value = 6.4 V/m

Power Drift = -0.14 dB

Maximum value of SAR = 0.059 mW/g

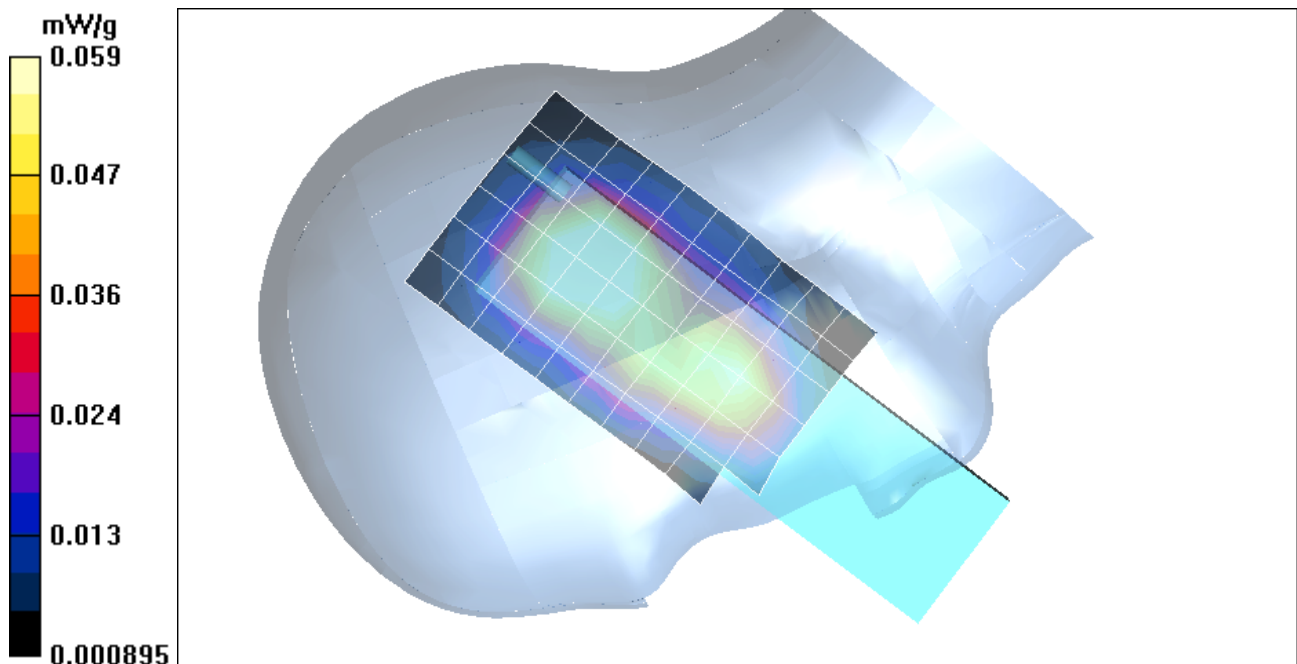

Test Laboratory: Compliance Certification Services

3_R-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Right Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2475 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, High/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.98 V/m

Power Drift = -0.005 dB

Maximum value of SAR = 0.096 mW/g

Touch position, High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.051 mW/g

Reference Value = 6.98 V/m

Power Drift = -0.005 dB

Maximum value of SAR = 0.095 mW/g

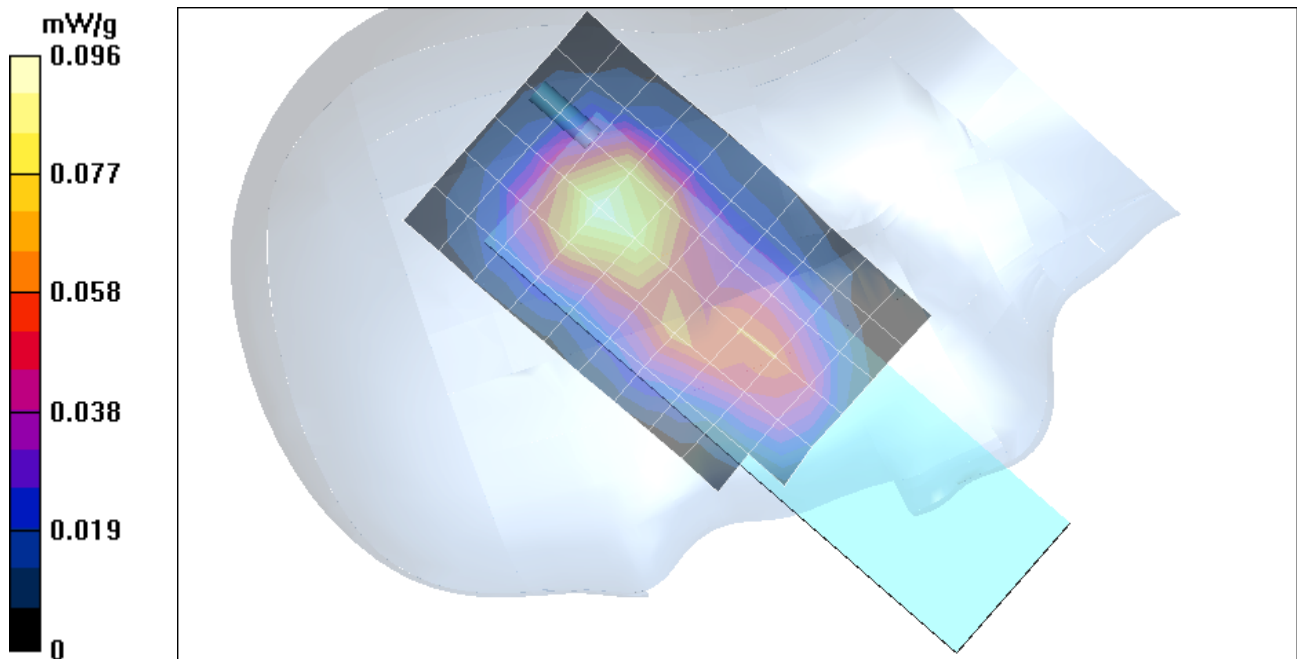

Test Laboratory: Compliance Certification Services

3_R-Touch

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

DASY4 Configuration:


- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Touch position, High/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 6.98 V/m

Power Drift = -0.0 dB

Maximum value of SAR = 0.073 mW/g

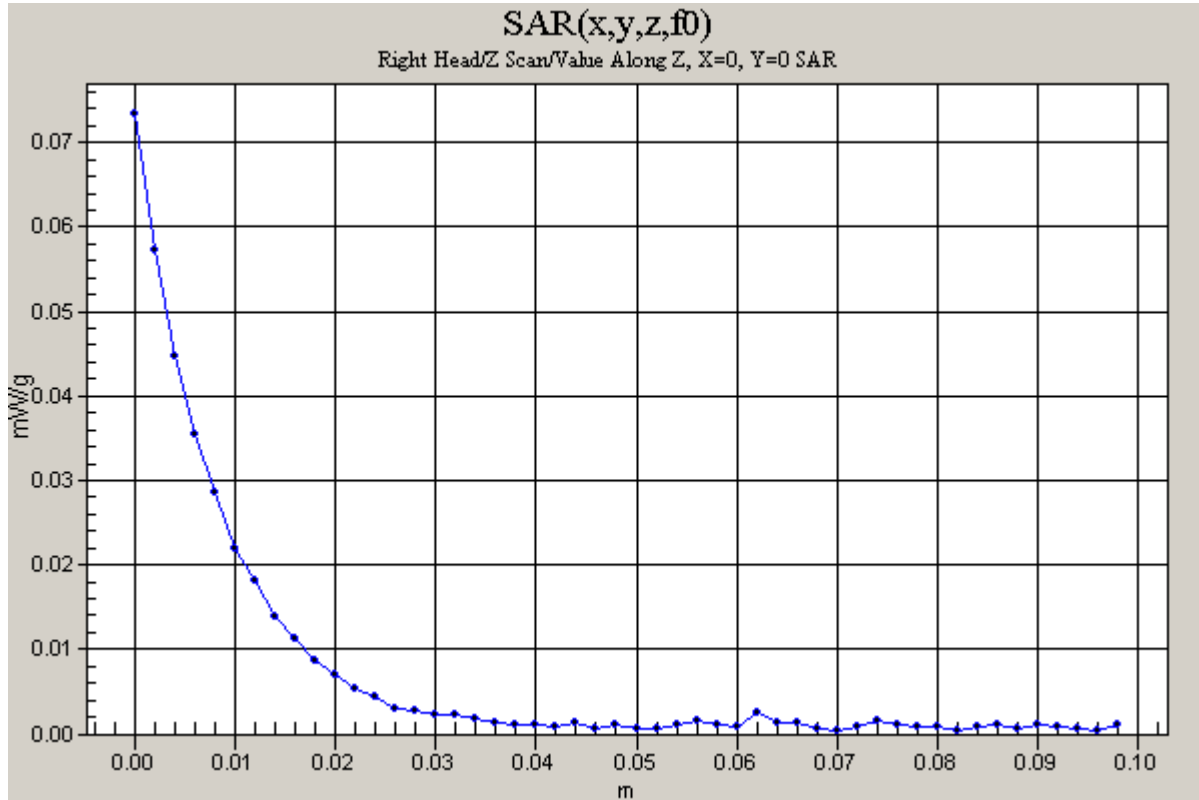

Test Laboratory: Compliance Certification Services

4_R-Tilt

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Right Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2439 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Tilt position, Middle/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.13 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.079 mW/g

Tilt position, Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.073 mW/g; SAR(10 g) = 0.041 mW/g

Reference Value = 6.13 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.078 mW/g

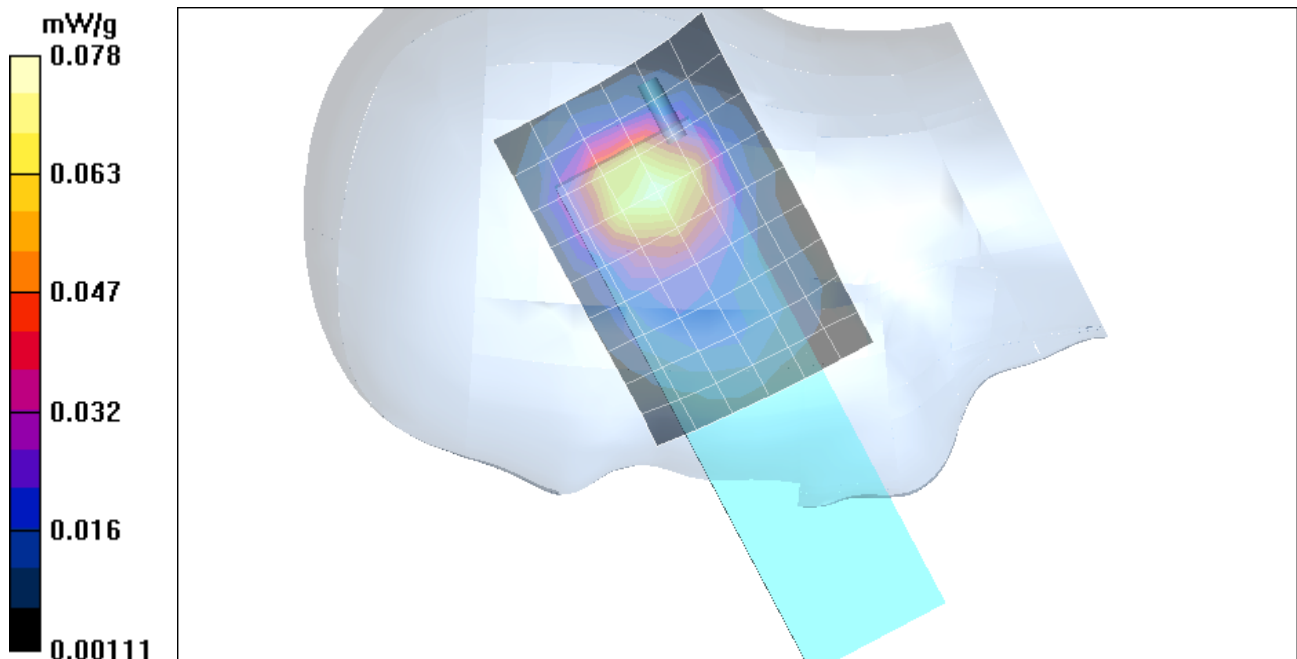

Test Laboratory: Compliance Certification Services

4_R-Tilt

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: Right Head

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2475 MHz; Duty Cycle: 1:1

Medium: Head 2450 MHz ($\sigma = 1.8891$ mho/m, $\epsilon_r = 39.5892$, $\rho = 1000$ kg/m³)

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Tilt position, High/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.61 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.089 mW/g

Tilt position, High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.046 mW/g

Reference Value = 6.61 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.087 mW/g

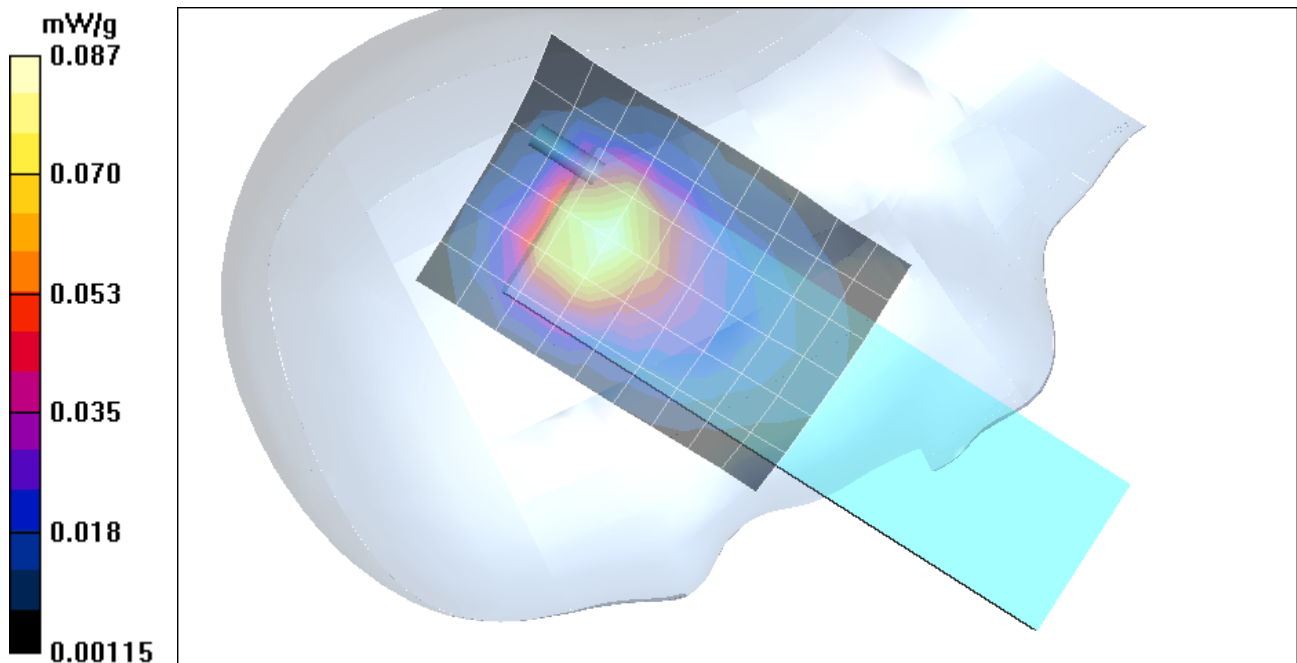

Test Laboratory: Compliance Certification Services

4_R-Tilt

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

DASY4 Configuration:


- Probe: ES3DV2 - SN3021; ConvF(4.5, 4.5, 4.5); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Tilt position, High/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 6.61 V/m

Power Drift = -0.12 dB

Maximum value of SAR = 0.064 mW/g

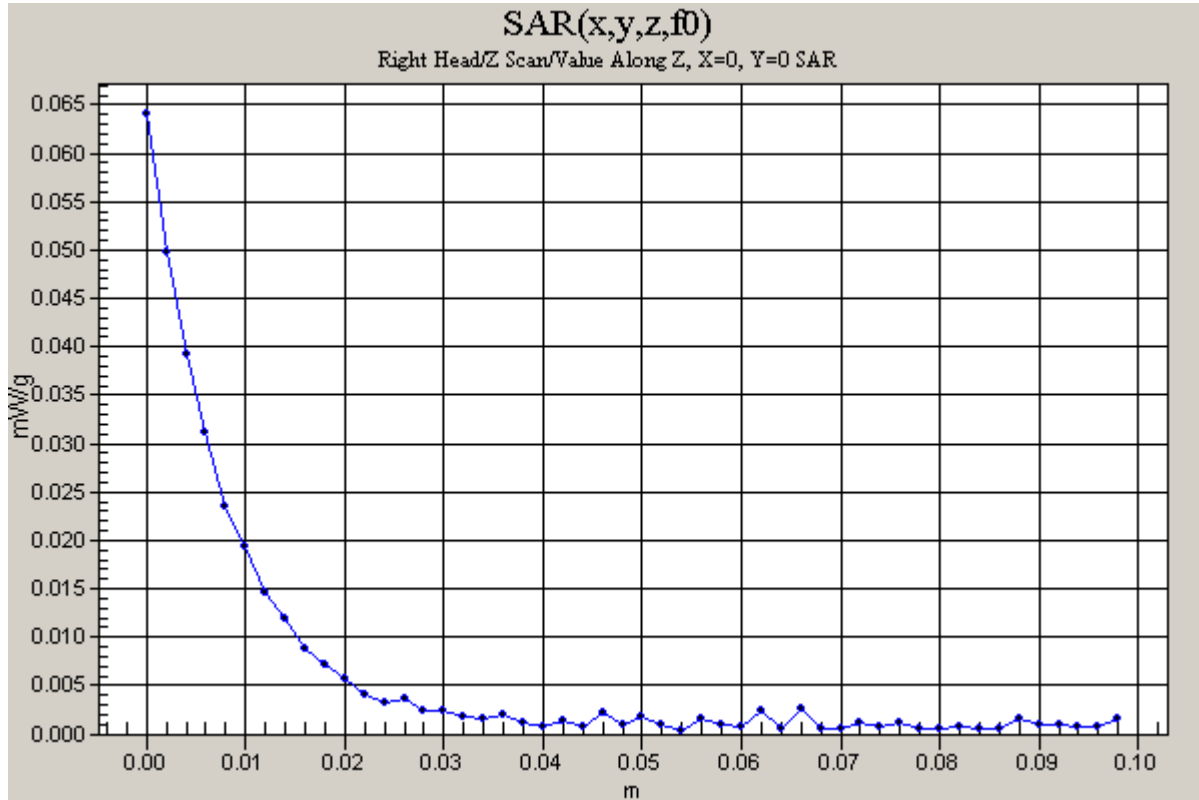

Test Laboratory: Compliance Certification Services

Body

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: 5_Body

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2404.8 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2.0176$ mho/m, $\epsilon_r = 52.2583$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.1, 4.1, 4.1); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Low, d=1.5cm/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.06 V/m

Power Drift = 0.13 dB

Maximum value of SAR = 0.075 mW/g

Low, d=1.5cm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.040 mW/g

Reference Value = 2.06 V/m

Power Drift = 0.13 dB

Maximum value of SAR = 0.074 mW/g

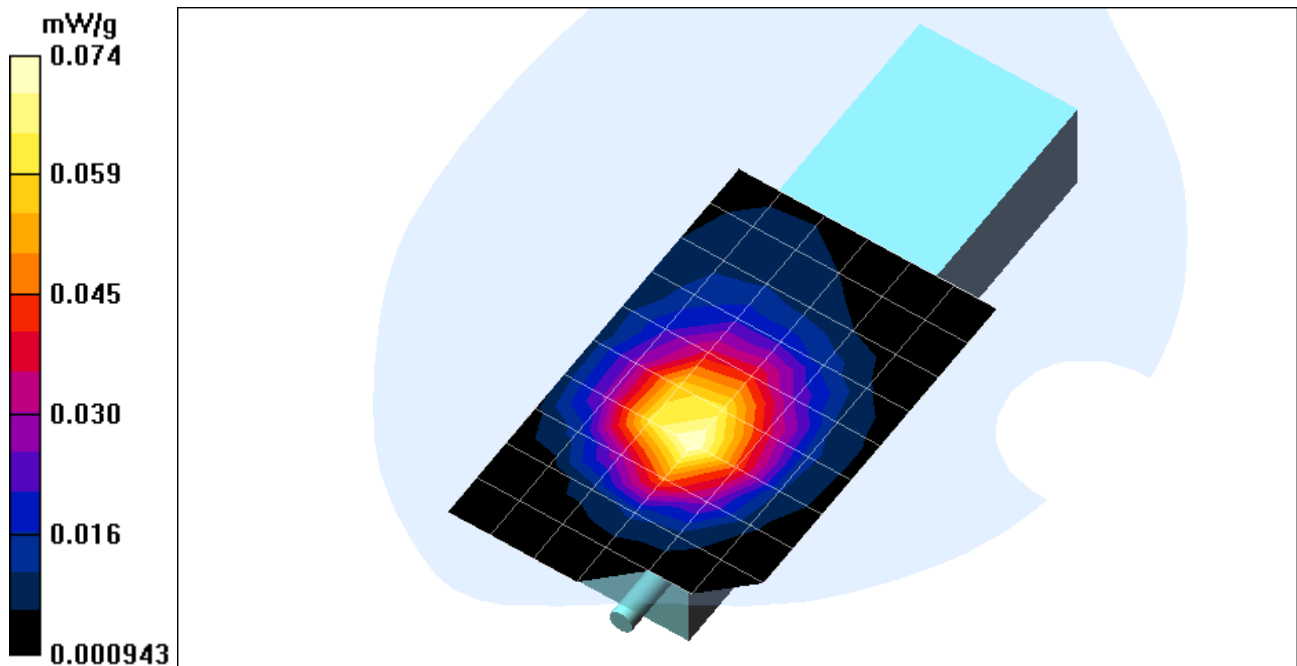

Test Laboratory: Compliance Certification Services

Body

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: 5_Body

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2439 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2.0176$ mho/m, $\epsilon_r = 52.2583$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.1, 4.1, 4.1); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

Middle, d=1.5cm/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.07 V/m

Power Drift = -0.16 dB

Maximum value of SAR = 0.081 mW/g

Middle, d=1.5cm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.044 mW/g

Reference Value = 2.07 V/m

Power Drift = -0.16 dB

Maximum value of SAR = 0.084 mW/g

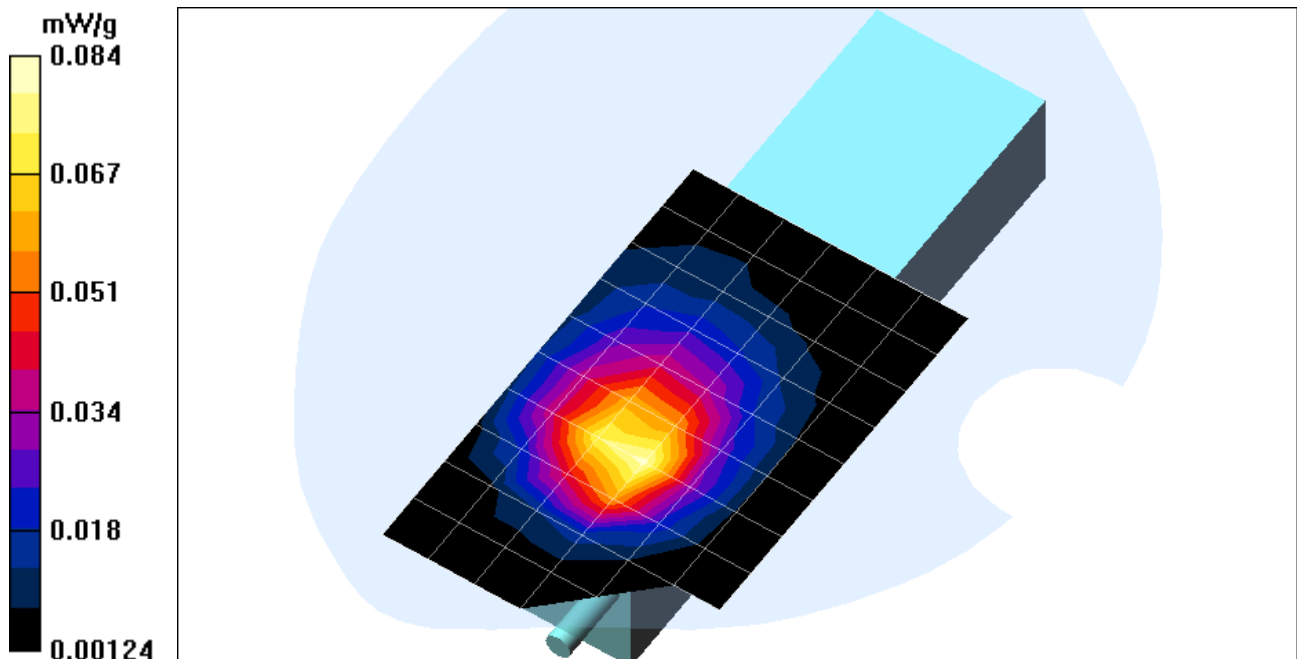

Test Laboratory: Compliance Certification Services

Body

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

Program Name: 5_Body

Ambient Temperature: 24.5 deg C; Liquid Temperature: 23.0 deg C

Communication System: 2450; Frequency: 2475 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2.0176$ mho/m, $\epsilon_r = 52.2583$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.1, 4.1, 4.1); Calibrated: 7/29/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

High, d=1.5cm/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2 V/m

Power Drift = 0.13 dB

Maximum value of SAR = 0.096 mW/g

High, d=1.5cm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.050 mW/g

Reference Value = 2 V/m

Power Drift = 0.13 dB

Maximum value of SAR = 0.093 mW/g

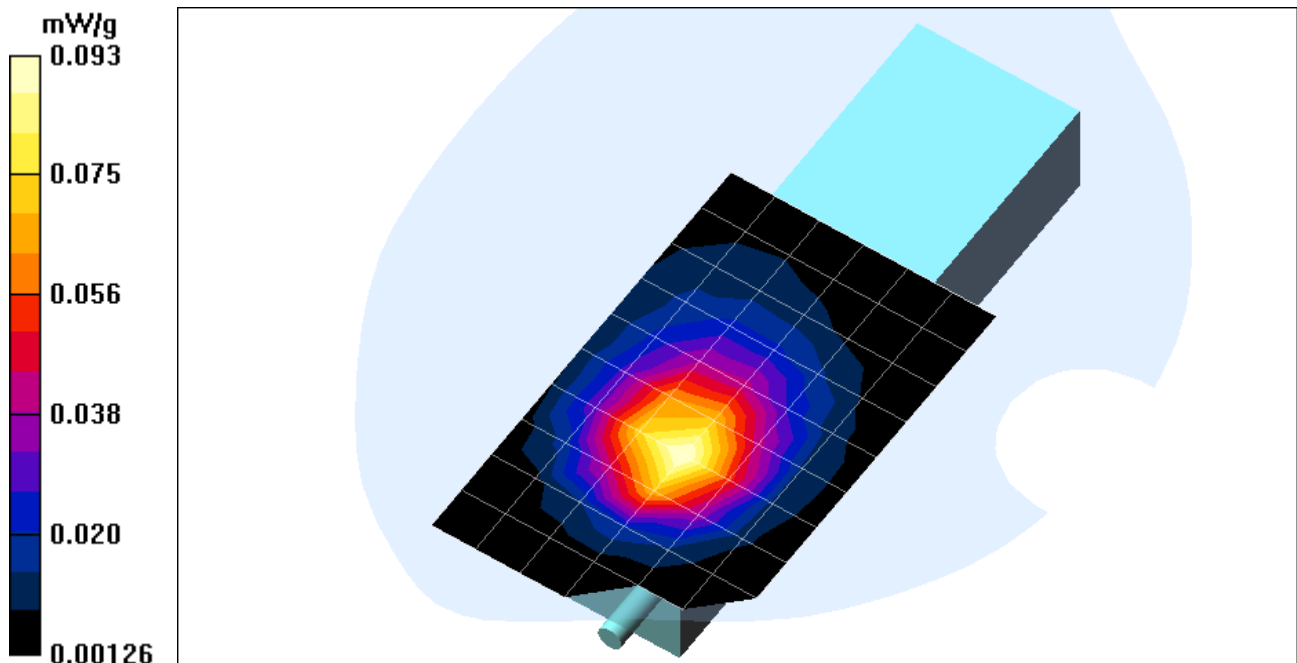

Test Laboratory: Compliance Certification Services

Body

DUT: Teledex ; Type: CL2200 Series; Serial: N/A

DASY4 Configuration:

- Probe: ES3DV2 - SN3021; ConvF(4.1, 4.1, 4.1); Calibrated: 7/29/2003
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.8 Build 62

High, d=1.5cm/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Reference Value = 2 V/m

Power Drift = 0.12 dB

Maximum value of SAR = 0.075 mW/g

