

## Appendix M

Random waiting interval

## Appendix N


Duration of Transmission

## Appendix O

Connection acknowledgement

**ANSI C63.17-1998 Rev. Draft ANSI 8.1.1 Access criteria test interval  
UPCS1900**

|                      |                                                                      |
|----------------------|----------------------------------------------------------------------|
| EUT                  | Cordless Telephone                                                   |
| Model                | DCT2910 Fixed Part                                                   |
| Applicant            | Teledex LLC                                                          |
| Temperature          | 23°C                                                                 |
| Test Site / Operator | ETS                                                                  |
| Test Specification   | ANSI C63.17-1998 Rev. Draft ANSI 8.1.1 Access criteria test interval |
| Comment 1            | The interval between access criteria tests                           |
| Comment 2            | Measurement result: 29.92 sec                                        |
| Comment 3            | Verdict: PASS                                                        |

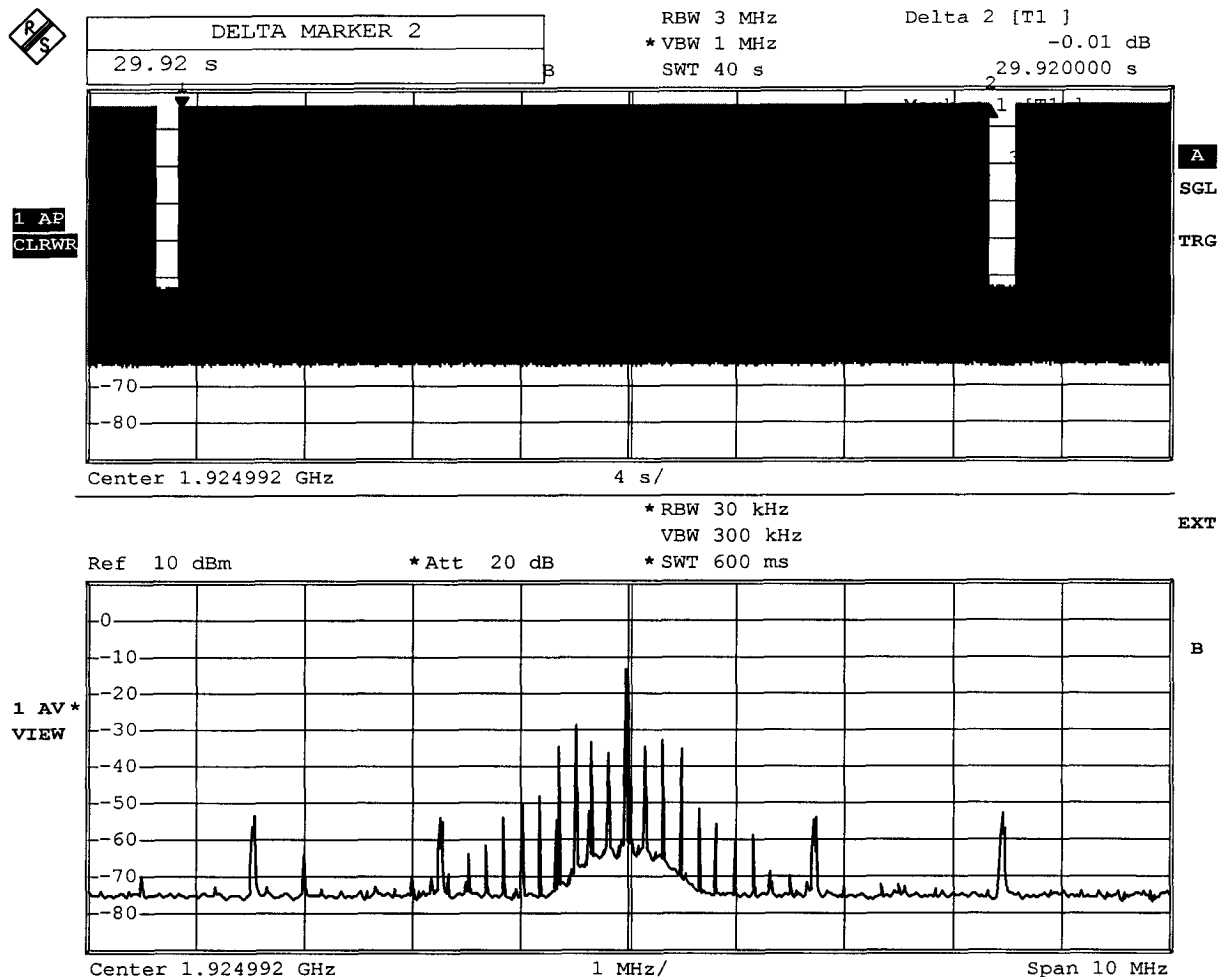


Date: 13.JUN.2006 12:30:46

Measurement diagram

**ANSI C63.17-1998 Rev. Draft ANSI 8.1.2 Access criteria functional test  
UPCS1900**

|                      |                                                                        |
|----------------------|------------------------------------------------------------------------|
| EUT                  | Cordless Telephone                                                     |
| Model                | DCT2910 Fixed Part                                                     |
| Applicant            | Teledex LLC                                                            |
| Temperature          | 23°C                                                                   |
| Test Site / Operator | ETS                                                                    |
| Test Specification   | ANSI C63.17-1998 Rev. Draft ANSI 8.1.2 Access criteria functional test |
| Comment 1            | initial condition                                                      |
| Comment 2            | Connection at channel 2 (1924,992 MHz), in time slot 2 (840 $\mu$ s)   |
| Comment 3            |                                                                        |

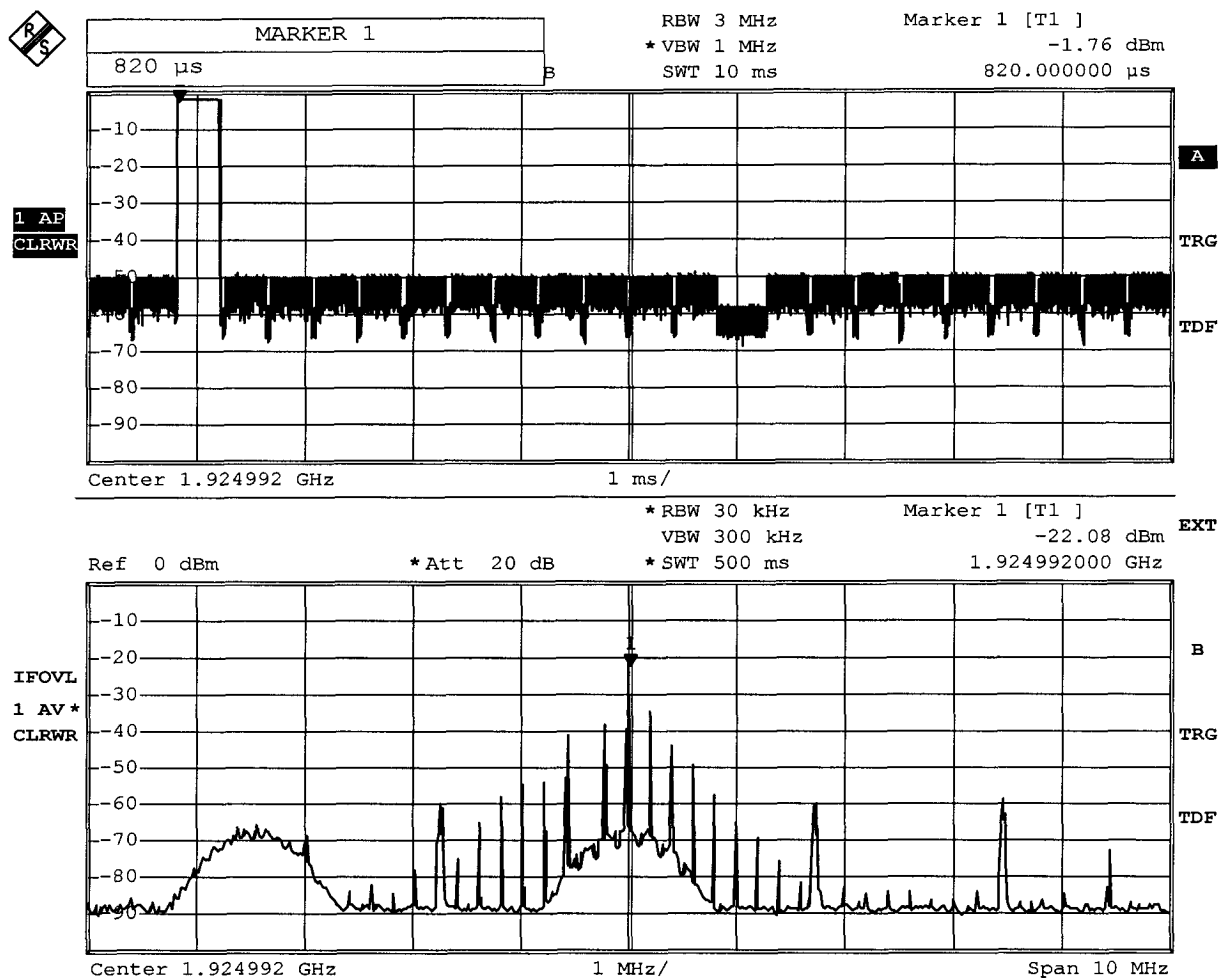


Date: 13.JUN.2006 12:43:18

Measurement diagram

**ANSI C63.17-1998 Rev. Draft ANSI 8.1.2 Access criteria functional test  
UPCS1900**

|                      |                                                                          |
|----------------------|--------------------------------------------------------------------------|
| EUT                  | Cordless Telephone                                                       |
| Model                | DCT2910 Fixed Part                                                       |
| Applicant            | Teledex LLC                                                              |
| Temperature          | 23°C                                                                     |
| Test Site / Operator | ETS                                                                      |
| Test Specification   | ANSI C63.17-1998 Rev. Draft ANSI 8.1.2 Access criteria functional test   |
| Comment 1            | CW interference on ch 2 (initial traffic channel)                        |
| Comment 2            | after the next pause                                                     |
| Comment 3            | New connection at channel 4 (1921,536 MHz), in time slot 2 (820 $\mu$ s) |


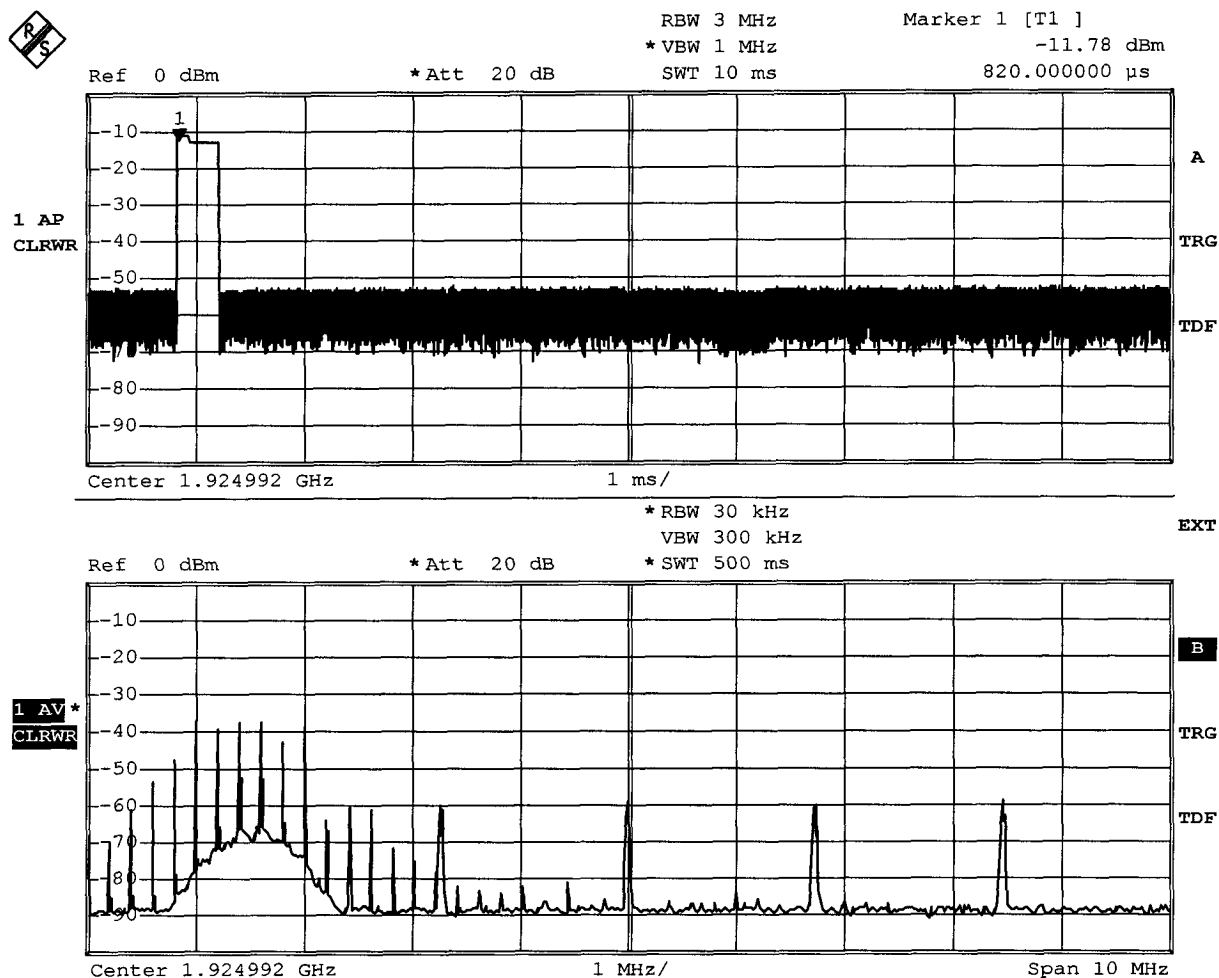


Date: 13.JUN.2006 12:46:41

Measurement diagram

**ANSI C63.17-1998 Rev. Draft ANSI 8.2.1 Acknowledgements  
UPCS1900**

|                      |                                                            |
|----------------------|------------------------------------------------------------|
| EUT                  | Cordless Telephone                                         |
| Model                | DCT2910 Fixed Part                                         |
| Applicant            | Teledex LLC                                                |
| Temperature          | 23°C                                                       |
| Test Site / Operator | ETS                                                        |
| Test Specification   | ANSI C63.17-1998 Rev. Draft ANSI 8.2.1(c) acknowledgements |
| Comment 1            | initial condition                                          |
| Comment 2            | connection link between fixed part and portable part       |
| Comment 3            |                                                            |

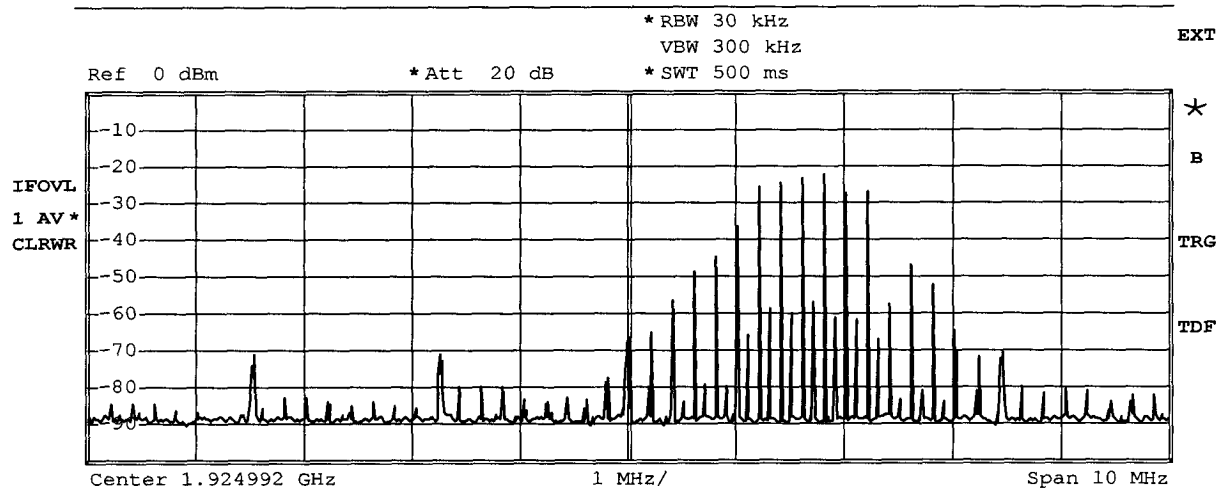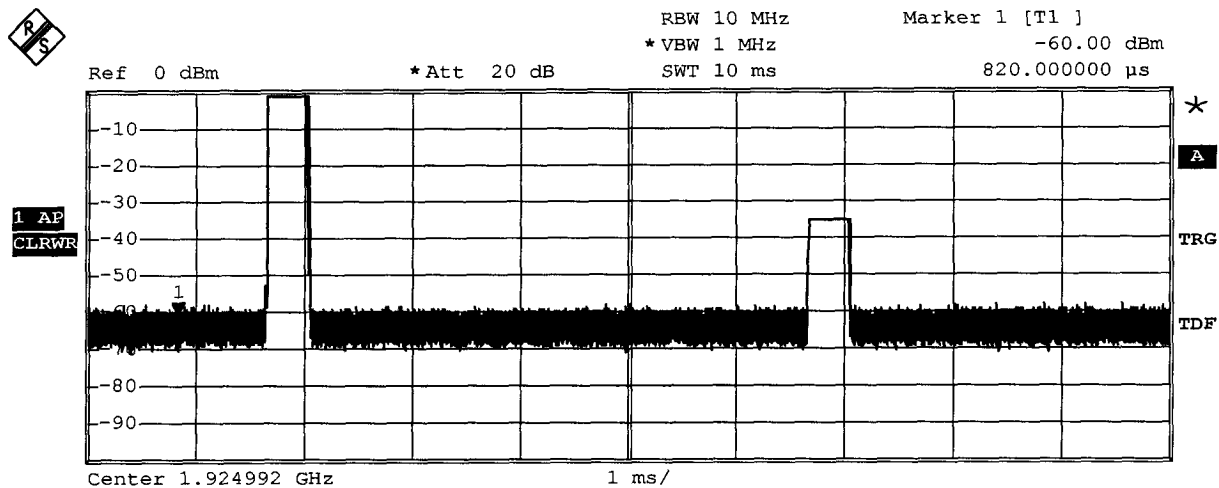


Date: 13.JUN.2006 13:11:09

Measurement diagram

**ANSI C63.17-1998 Rev. Draft ANSI 8.2.1 Acknowledgements  
UPCS1900**

|                      |                                                                        |
|----------------------|------------------------------------------------------------------------|
| EUT                  | Cordless Telephone                                                     |
| Model                | DCT2910 Fixed Part                                                     |
| Applicant            | Teledex LLC                                                            |
| Temperature          | 23°C                                                                   |
| Test Site / Operator | ETS                                                                    |
| Test Specification   | ANSI C63.17-1998 Rev. Draft ANSI 8.2.1(c) acknowledgements             |
| Comment 1            | blocked acknowledgements from the companion device                     |
| Comment 2            | EUT terminates transmission on the communication channel after 6,5 sec |
| Comment 3            | Limit: < 30second , Pass                                               |

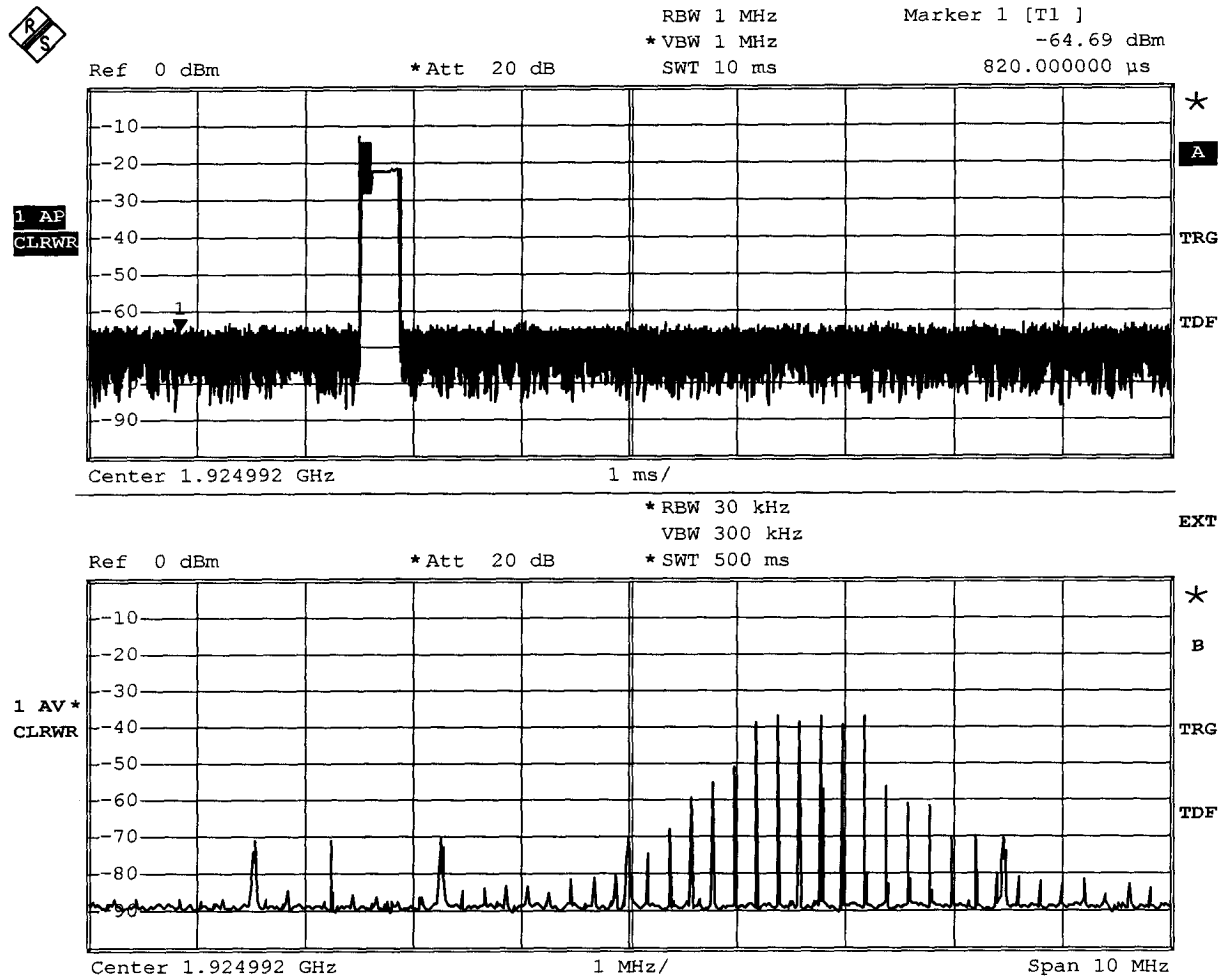

Date: 13.JUN.2006 13:12:42

Measurement diagram

## Appendix P

Selected channel, power accuracy, segment occupancy

Test case  
confirmation.xml

Rev. Draft ANSI\_7.3.4\_selected channel

Date 13.06.2006 10:32:02

Reference to the EUT

G0M20605-0545 / DCT2910 Fixed Part

Comment:

initial setup

Cordless Telephone  
Teledex LLC

The LOG table shows the level changes on each Channel of the transmission system

| Time stamp       | 1921.536<br>MHz           | 1923.264<br>MHz           | 1924.992<br>MHz           | 1926.720<br>MHz           | 1928.448<br>MHz           | Comment        |
|------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------|
|                  | Peak in dBm<br>RMS in dBm | Peak in dBm<br>RMS in dBm | Peak in dBm<br>RMS in dBm | Peak in dBm<br>RMS in dBm | Peak in dBm<br>RMS in dBm |                |
| 01:33:07.0625000 | -86,1<br>-95,8            | -87,1<br>-95,8            | -85,3<br>-96              | -86,5<br>-95,7            | -86<br>-95,6              | Interferer off |
| 01:33:11.5781250 | -57,9<br>-58,2            | -57,9<br>-58,1            | -57,9<br>-58,2            | -75,6<br>-77,9            | -75,9<br>-78,1            | Interferer on  |
| 01:33:39.4218750 | -58<br>-58,4              | -57,8<br>-58,3            | -53,9<br>-58,4            | -44,6<br>-70,2            | -22,3<br>-37,6            | OK 1           |
| 01:34:08.1406250 | -56,9<br>-58,4            | -53,2<br>-58,3            | -46,8<br>-58,3            | -22<br>-37,1              | -52,7<br>-76,2            | OK 2           |

Log file

## Appendix Q

Duplex connections

## Appendix R

Emissions inside and outside the sub-band


# FCC Part 15.323(d.2) In-band unwanted emission

## Testprocedure ANSI 63.17-1998 6.1.6.1

### UPCS

|                      |                                   |
|----------------------|-----------------------------------|
| EUT                  | Cordless Telephone                |
| Model                | DCT2910 Fixed Part                |
| Applicant            | Teledex LLC                       |
| Temperature          | 23°C                              |
| Test Site / Operator | ETS Reichenwalde                  |
| Test Specification   | 6.1.6.1 In-band unwanted emission |

2.15MHz

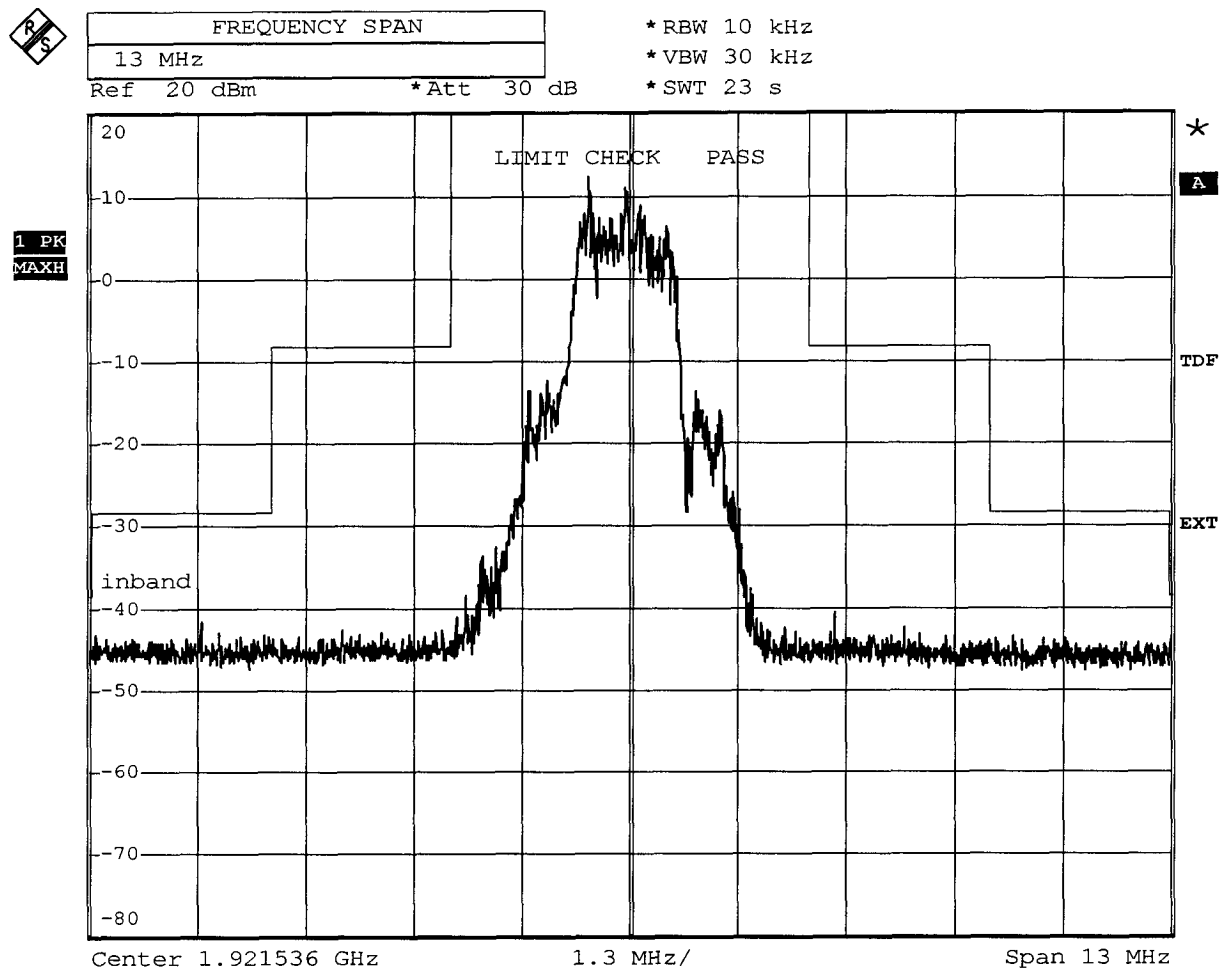

Comment: Ansi C63.17-1998 6.1.6.1

Date: 13.JUN.2006 07:43:16

Measurement diagram


# FCC Part 15.323(d.2) In-band unwanted emission

Testprocedure ANSI 63.17-1998 6.1.6.1

UPCS

|                      |                                   |
|----------------------|-----------------------------------|
| EUT                  | Cordless Telephone                |
| Model                | DCT2910 Fixed Part                |
| Applicant            | Teledex LLC                       |
| Temperature          | 23°C                              |
| Test Site / Operator | ETS Reichenwalde                  |
| Test Specification   | 6.1.6.1 In-band unwanted emission |

2.15MHz

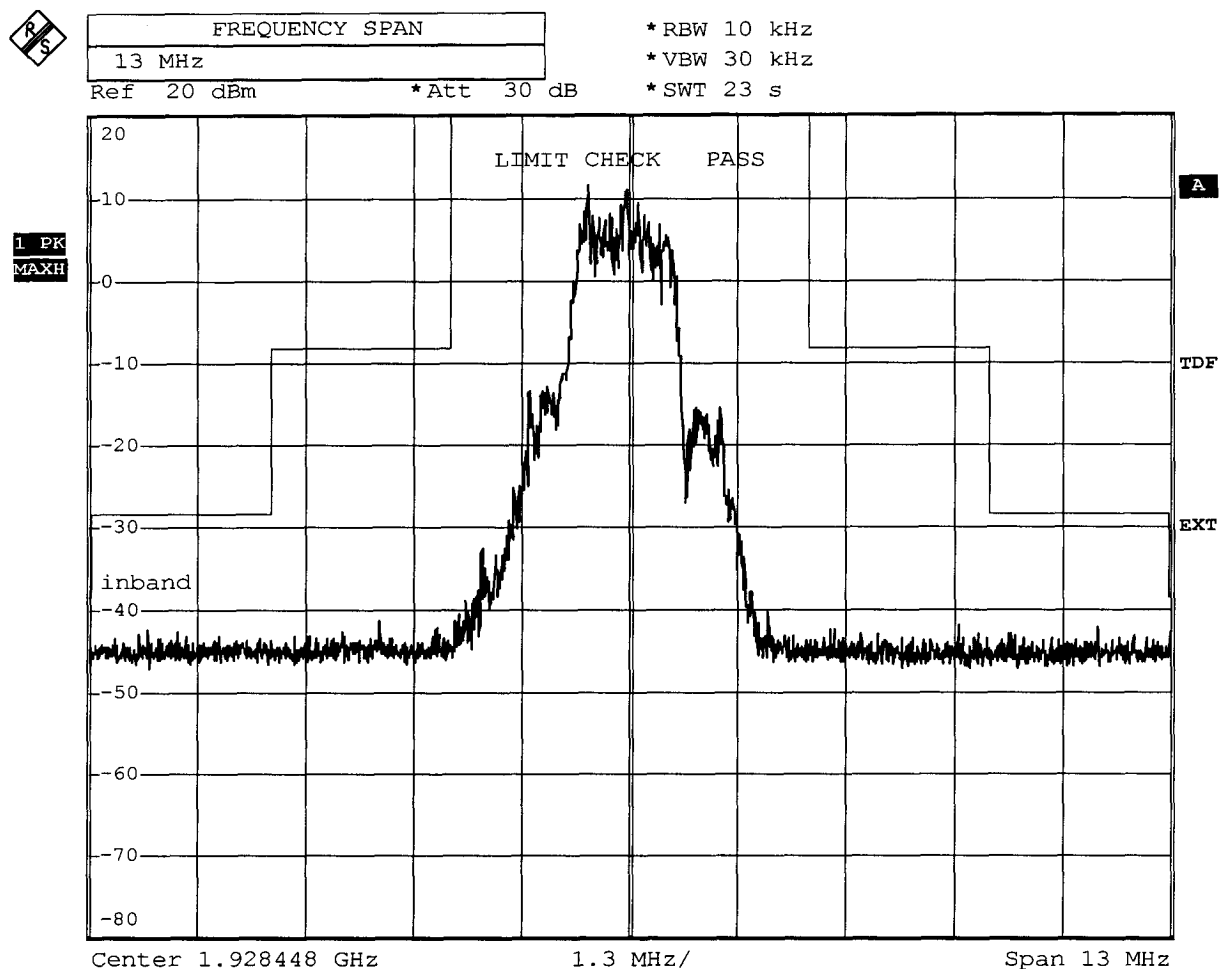

Comment: Ansi C63.17-1998 6.1.6.1

Date: 13.JUN.2006 07:45:22

Measurement diagram


# FCC Part 15.323(d.1) Out-of-band emission

## Testprocedure ANSI 63.17-1998 6.1.6.2

### UPCS

|                      |                              |
|----------------------|------------------------------|
| EUT                  | Cordless Telephone           |
| Model                | DCT2910 Fixed Part           |
| Applicant            | Teledex LLC                  |
| Temperature          | 23°C                         |
| Test Site / Operator | ETS Reichenwalde             |
| Test Specification   | 6.1.6.2 Out-of-band emission |

measurement on the lowest carrier  
Carrier=1921.536MHz

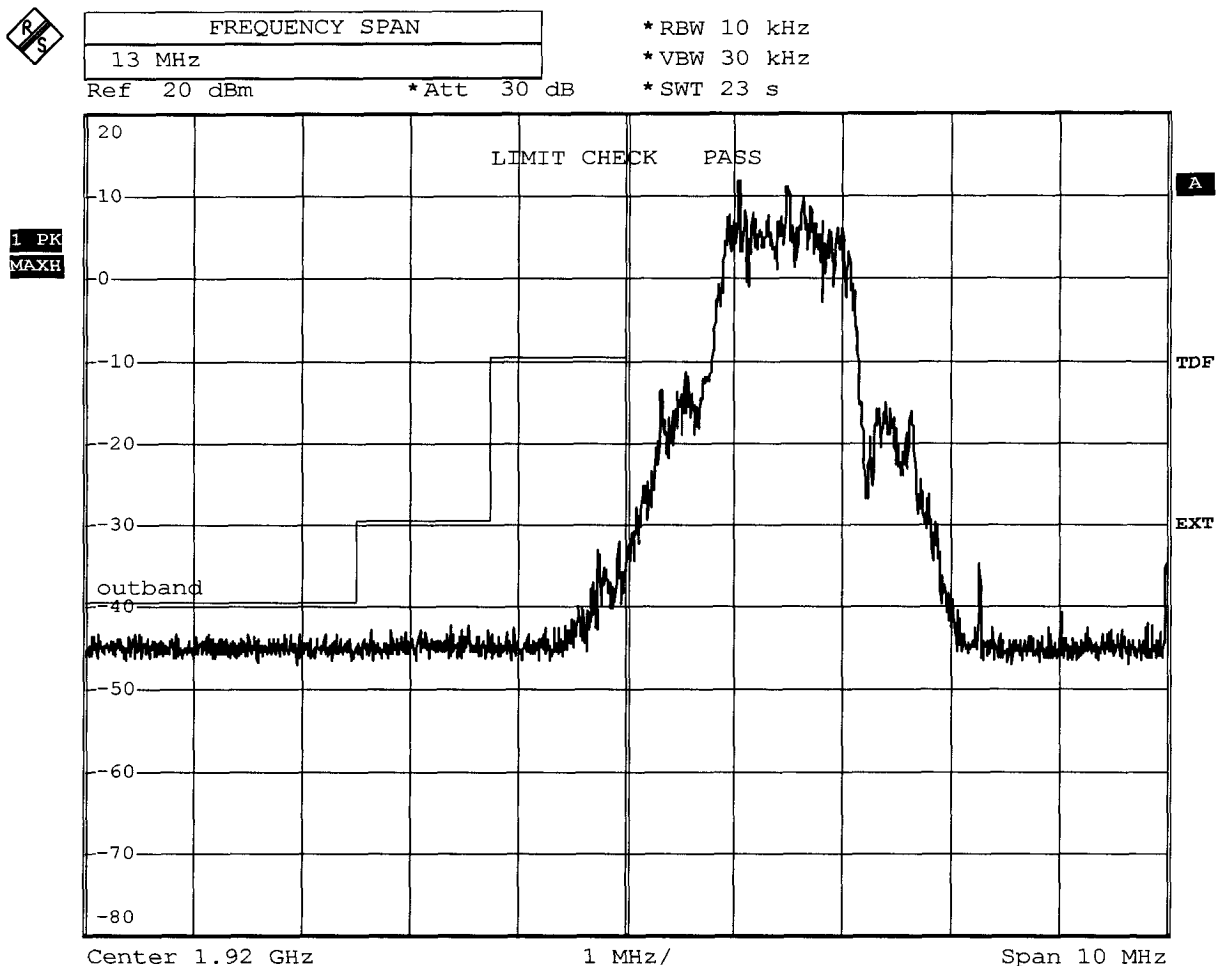

Comment: Ansi C63.17-1998 6.1.6.2  
Date: 13.JUN.2006 07:49:50

Measurement diagram


# FCC Part 15.323(d.1) Out-of-band emission

## Testprocedure ANSI 63.17-1998 6.1.6.2

### UPCS

|                      |                              |
|----------------------|------------------------------|
| EUT                  | Cordless Telephone           |
| Model                | DCT2910 Fixed Part           |
| Applicant            | Teledex LLC                  |
| Temperature          | 23°C                         |
| Test Site / Operator | ETS Reichenwalde             |
| Test Specification   | 6.1.6.2 Out-of-band emission |

measurement on the highest carrier  
Carrier=1928.448MHz

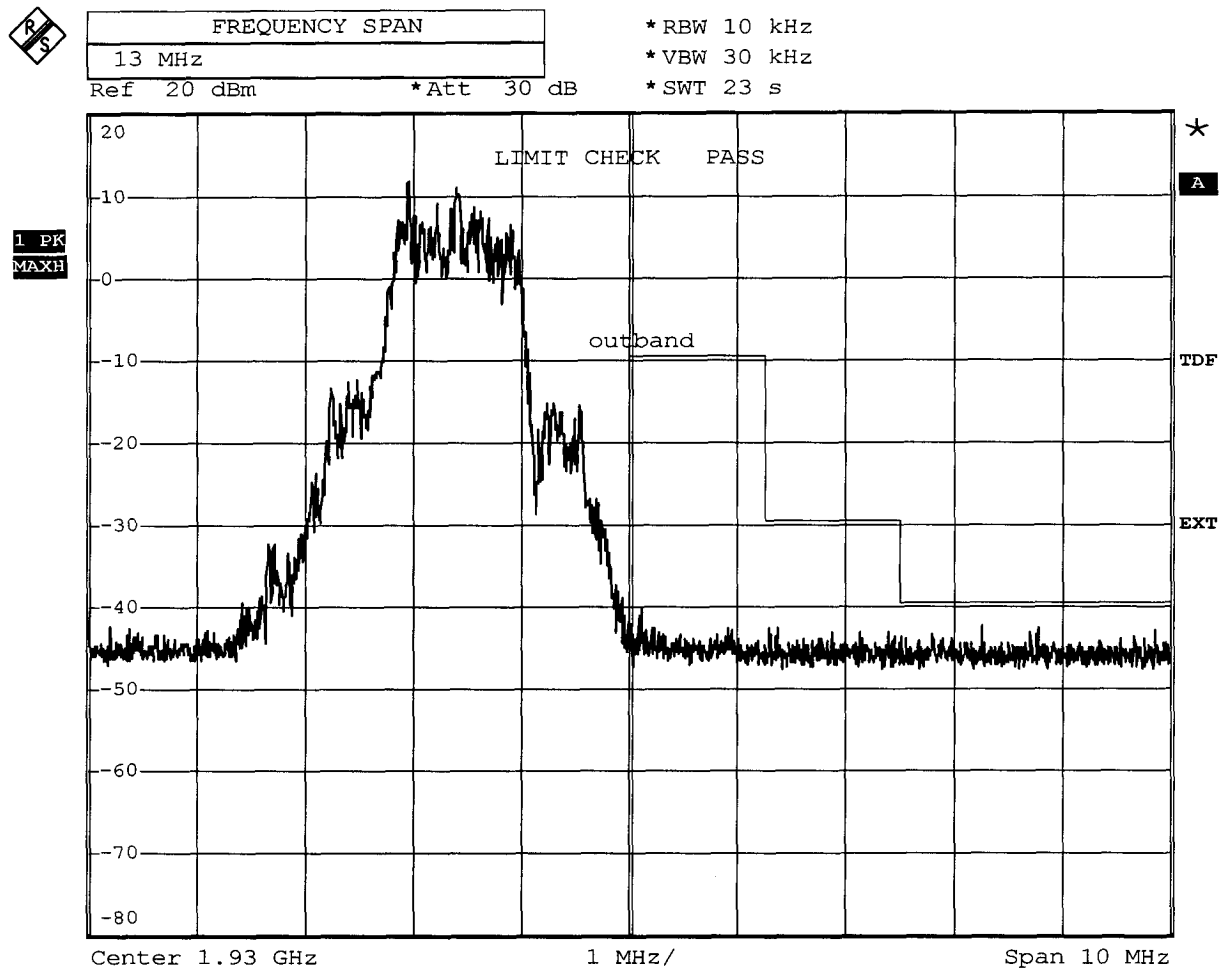

Comment: Ansi C63.17-1998 6.1.6.2


Date: 13.JUN.2006 07:51:11

Measurement diagram

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Schlaps  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116,  
Comment 2: Freq:197.275MHz Pmax:-60.83dBm RBW: 100 kHz

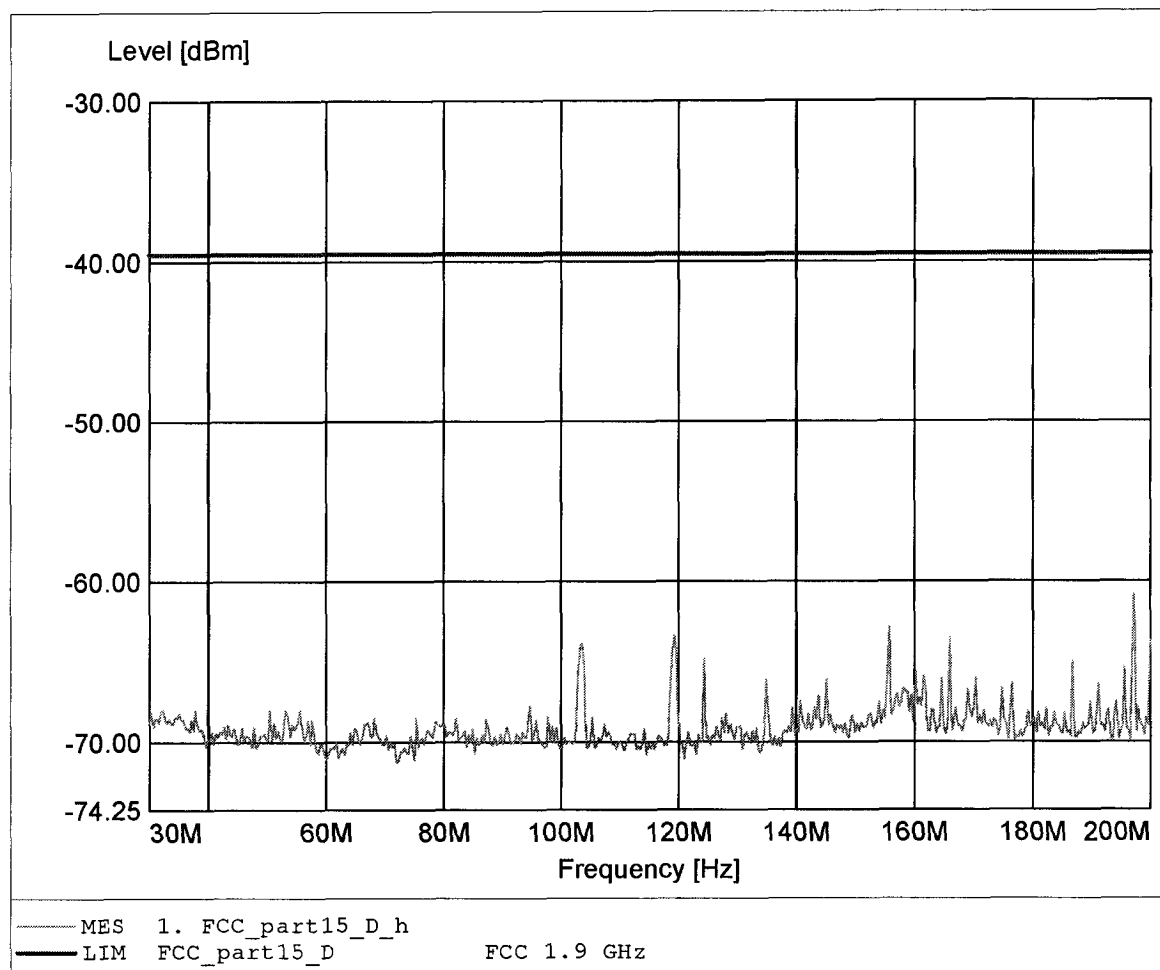

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Schlaps  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HK 116,  
Comment 2: Freq:124.369MHz Pmax:-60.97dBm RBW: 100 kHz

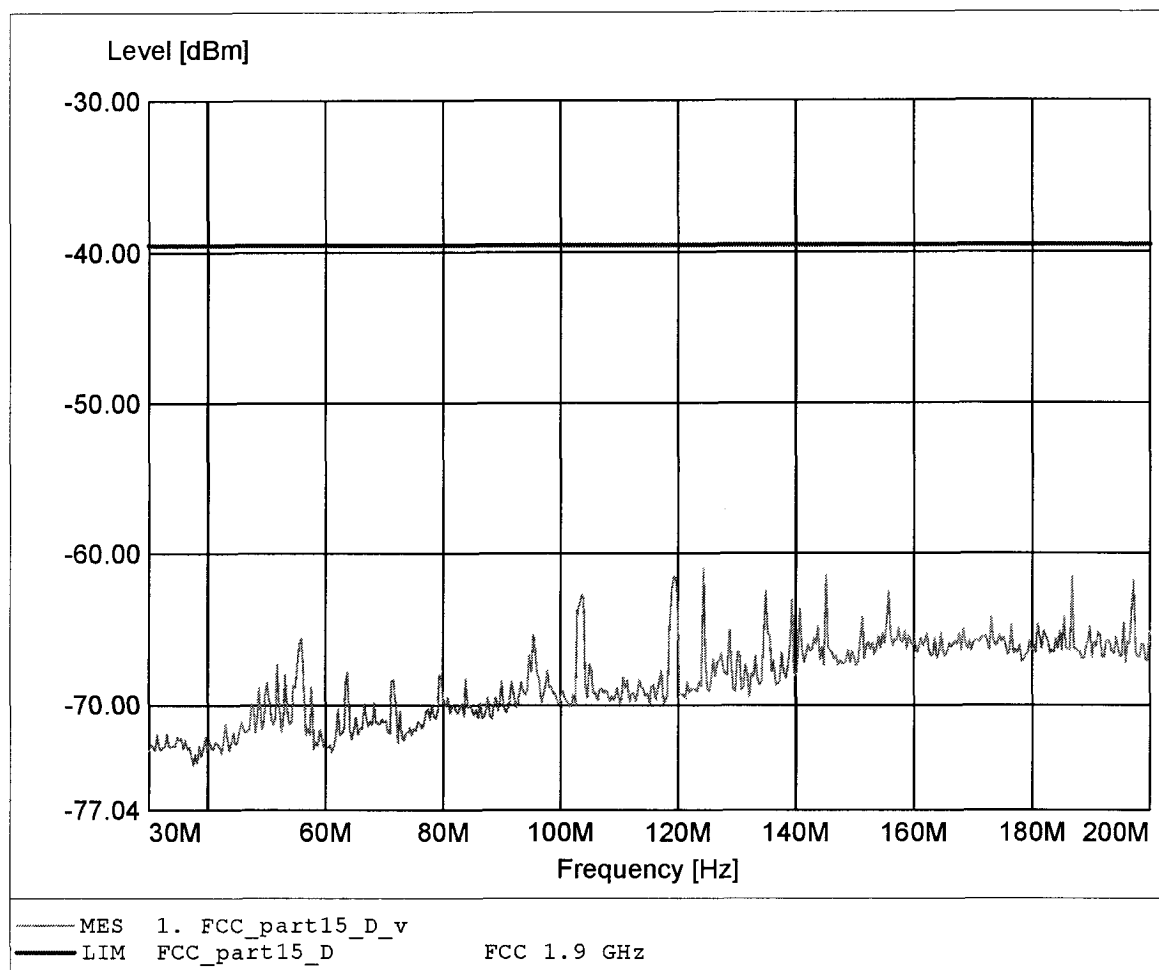

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Schlaps  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq: 964.729MHz Pmax: -78.11dBm RBW: 100 kHz

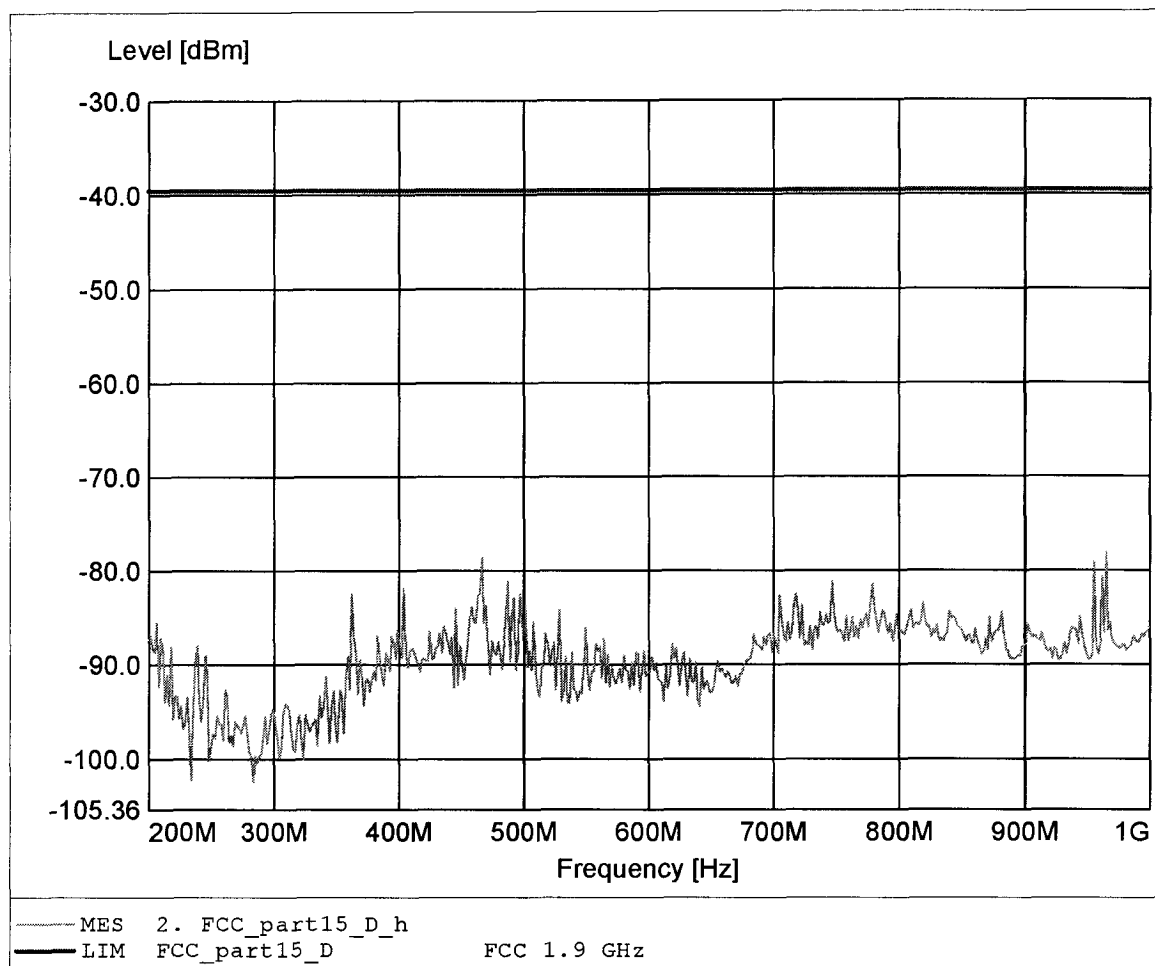

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Schlaps  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Comment 2: Freq: 961.523MHz Pmax: -83.11dBm RBW: 100 kHz

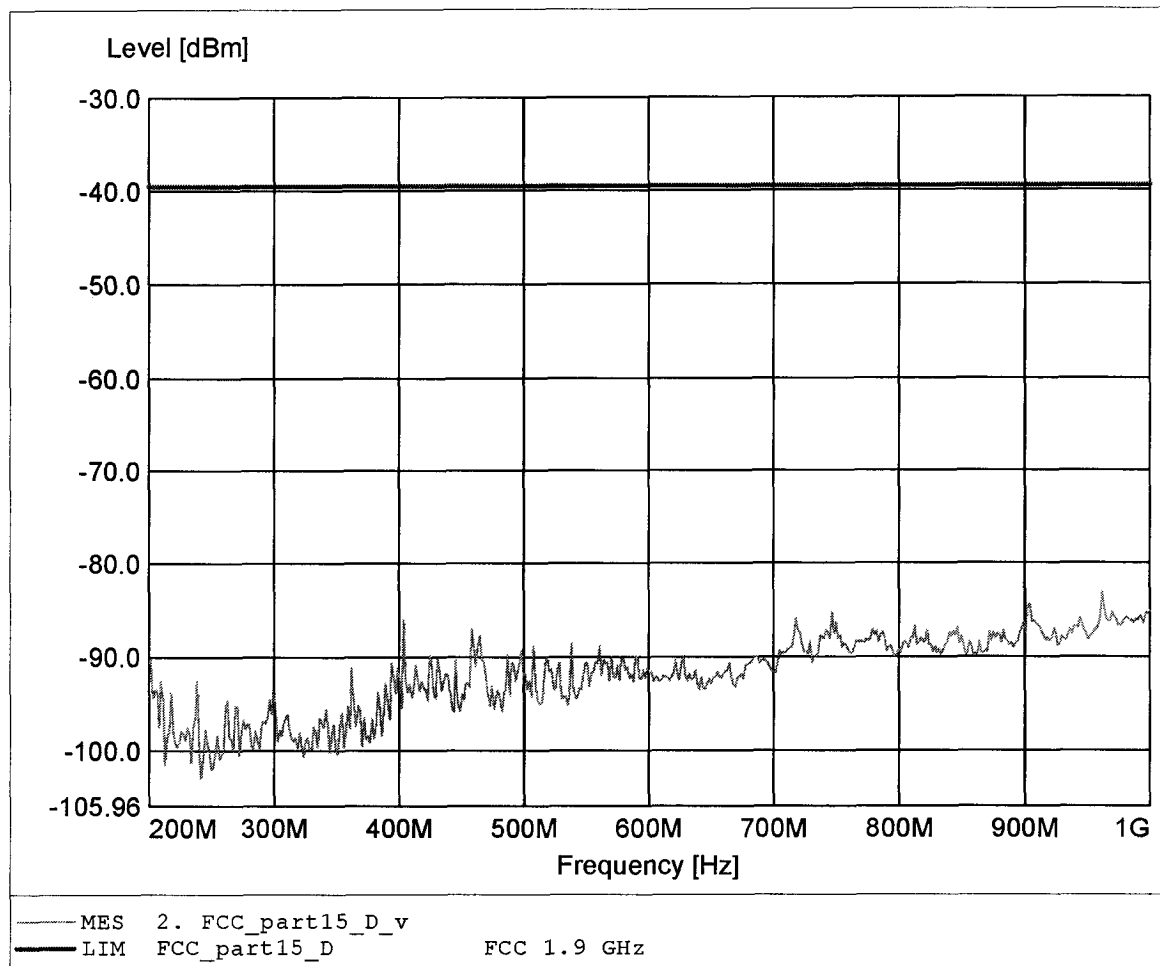

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 1.816GHz Pmax: -62.69dBm RBW: 100 kHz

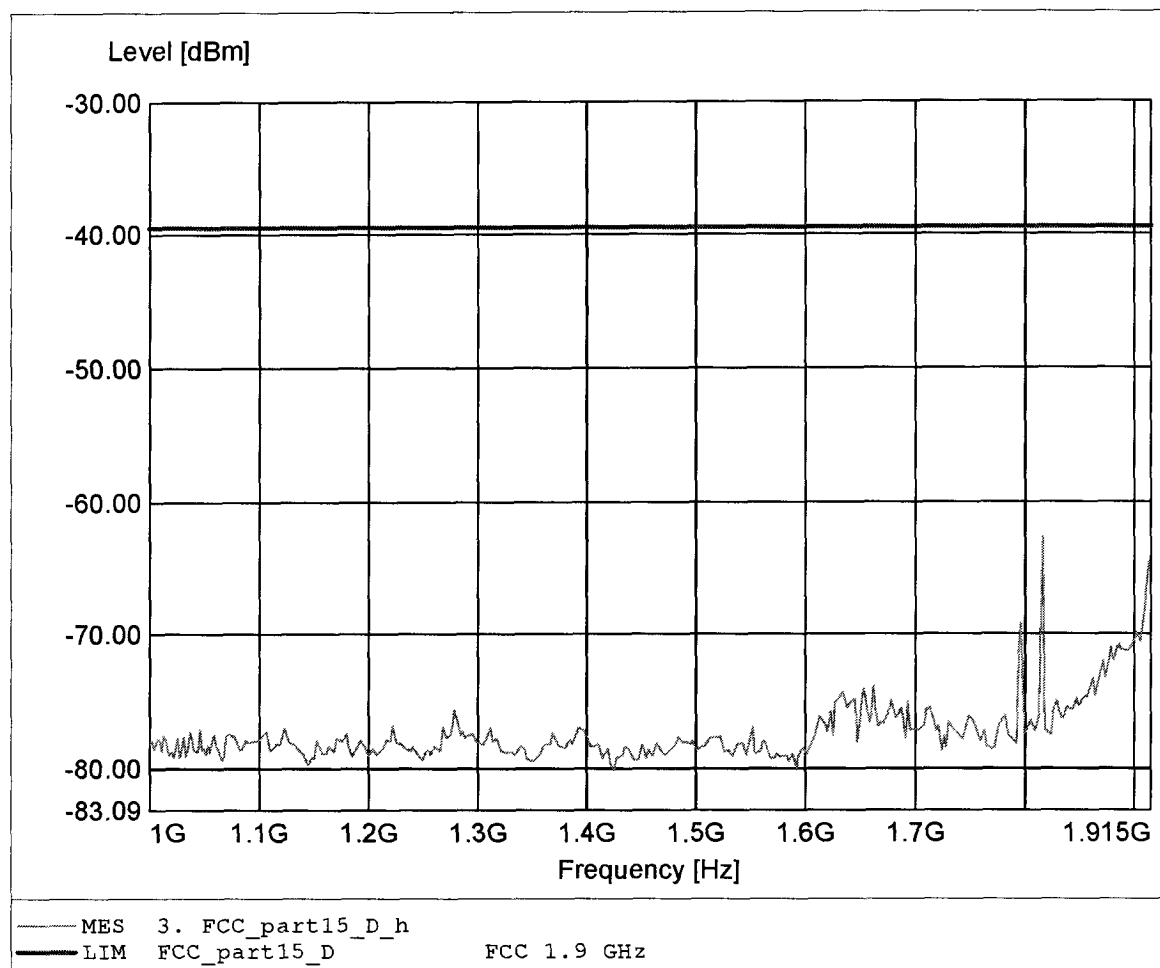

**Spurious emissions under normal conditions**

**FCC RULES PART 15, SUBPART D**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 1.911GHz Pmax: -66.68dBm RBW: 100 kHz

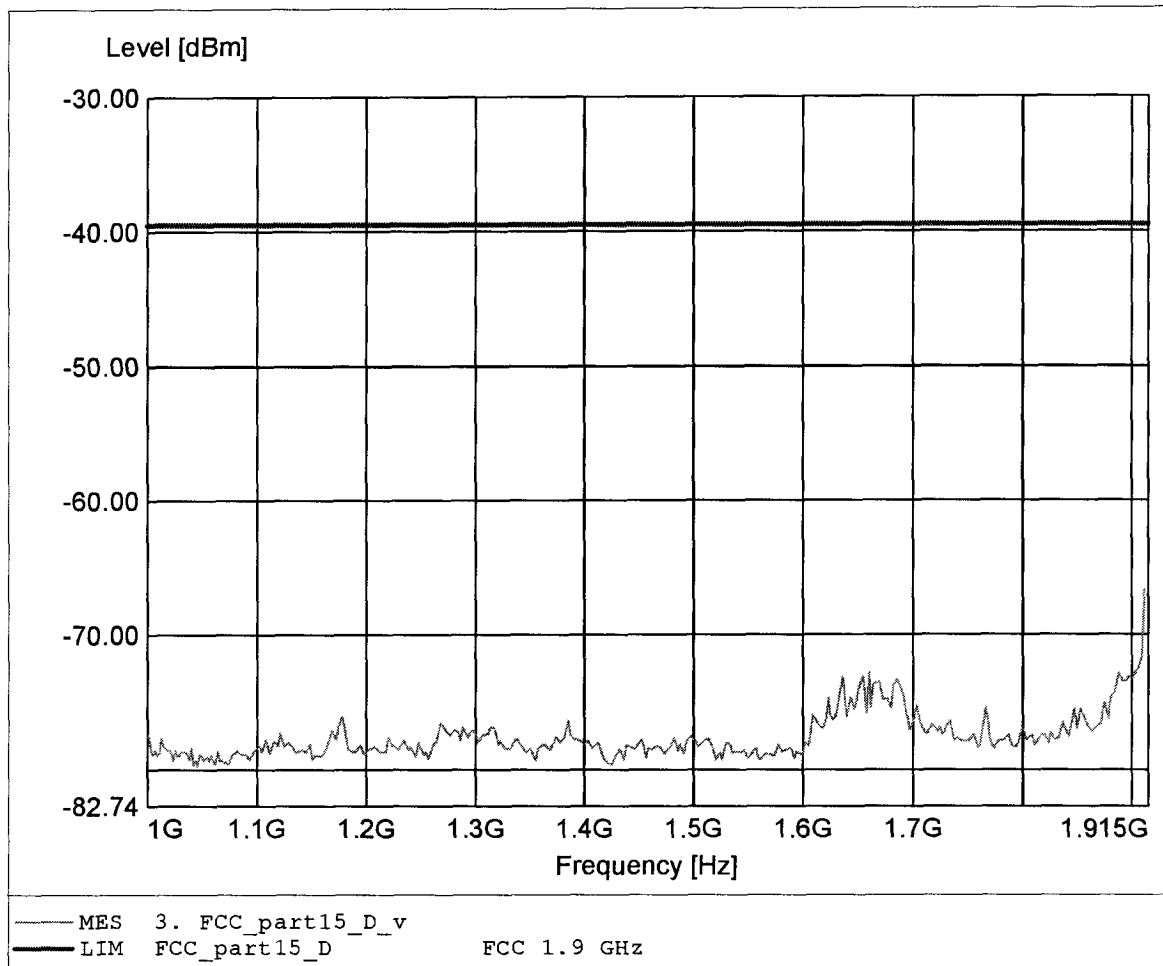

*Spurious emissions under normal conditions*

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:1.920GHz Pmax:-49.98dBm RBW: 10 kHz

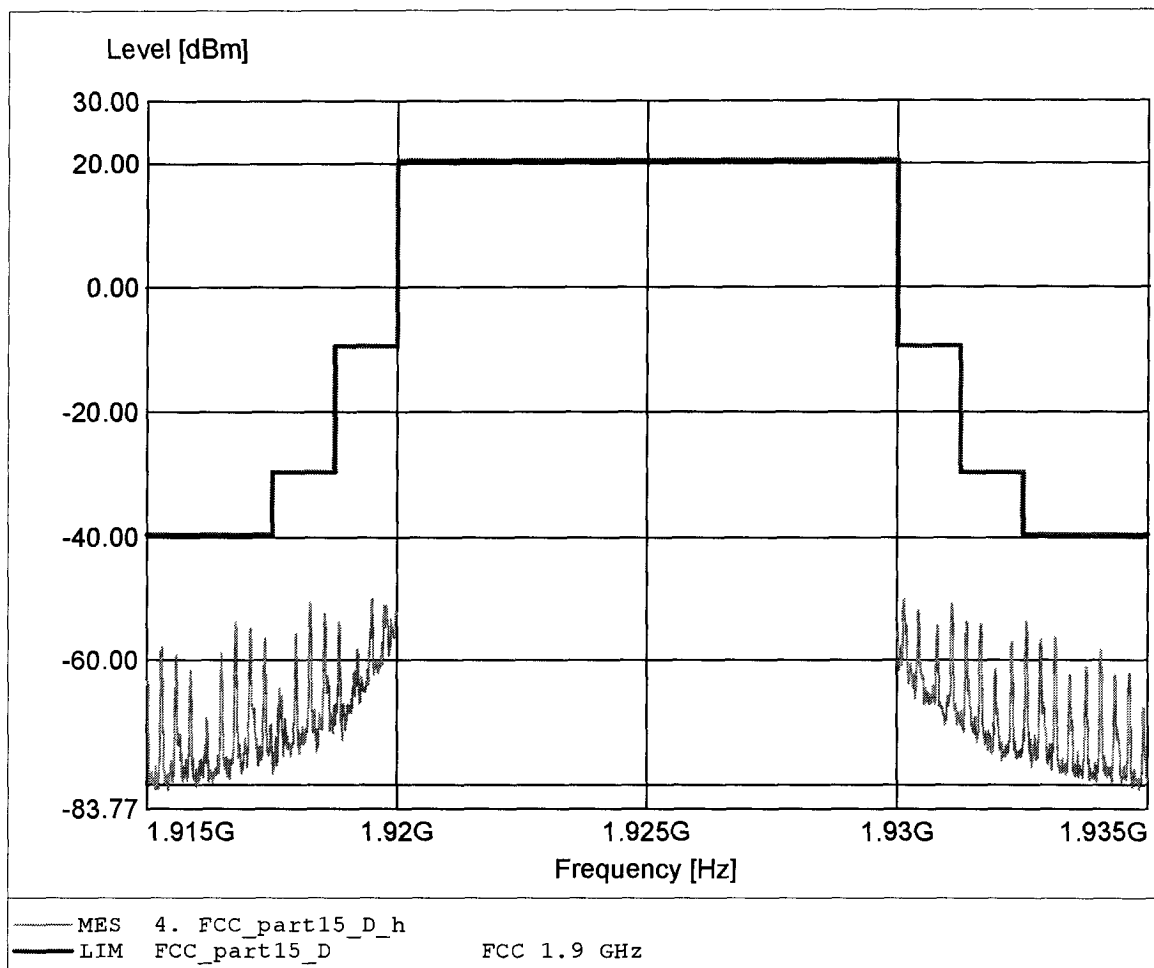

*Spurious emissions under normal conditions*

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:1.920GHz Pmax:-51.01dBm RBW: 10 kHz

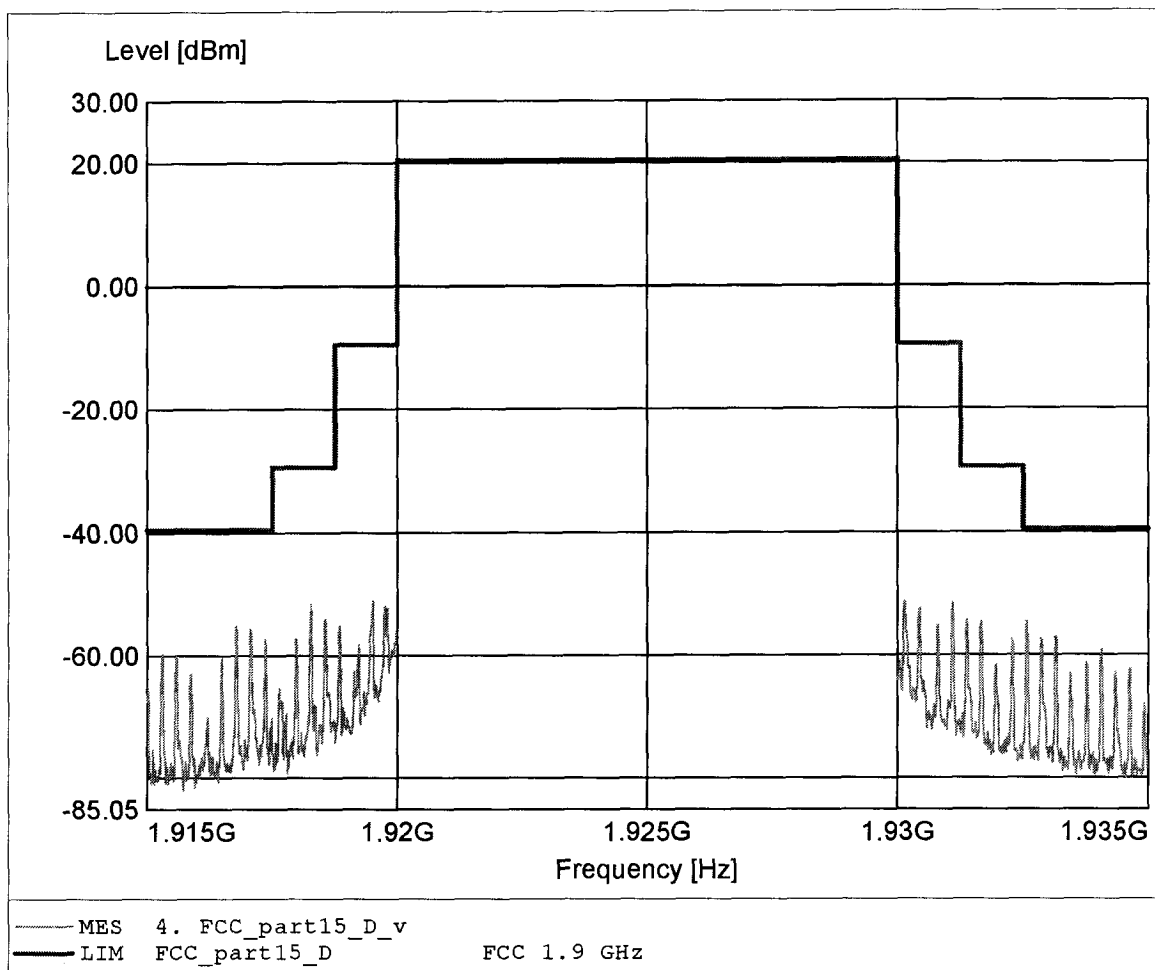

# Spurious emissions under normal conditions

## FCC RULES PART 15, SUBPART D


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 3.847GHz Pmax: -42.99dBm RBW: 100 kHz

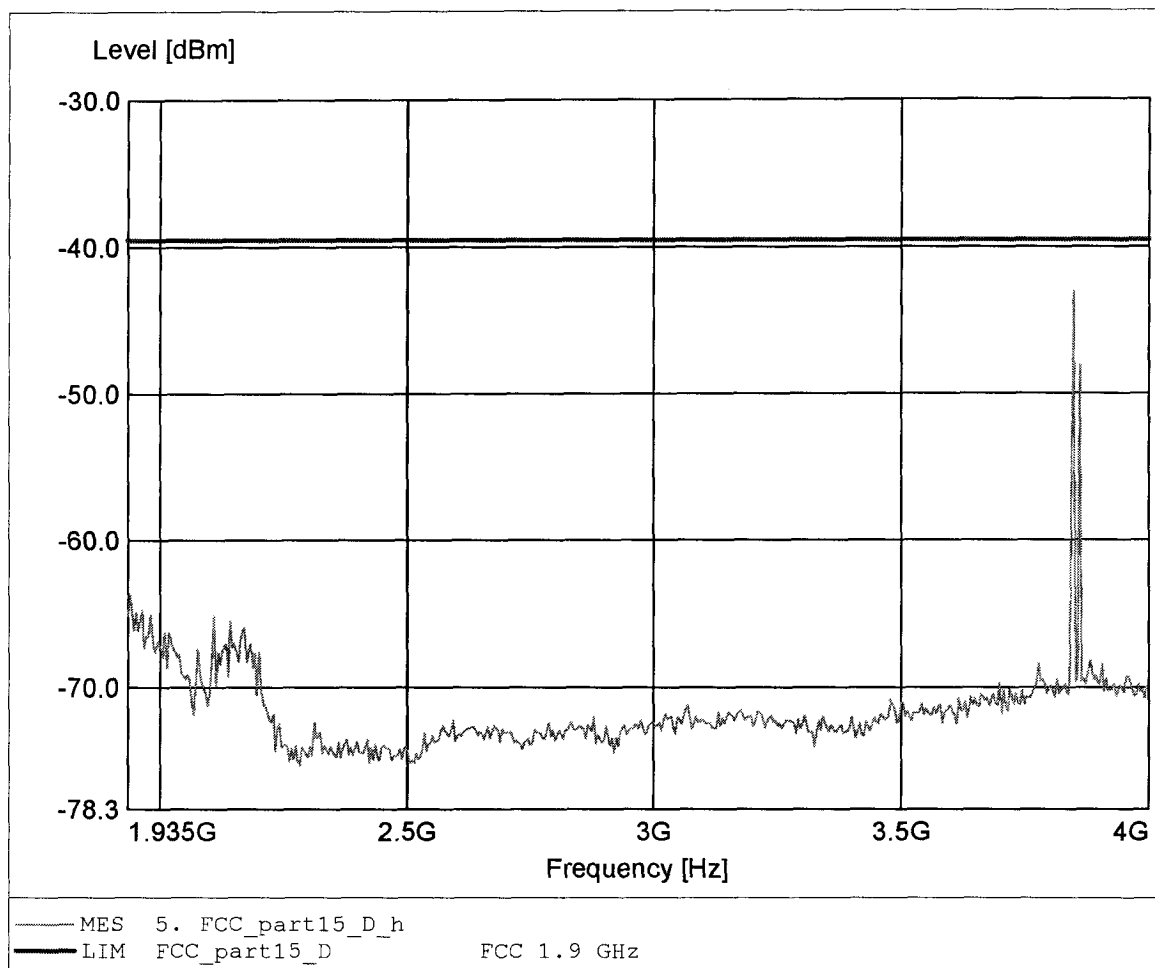

*Spurious emissions under normal conditions*

**FCC RULES PART 15, SUBPART D**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 3.843GHz Pmax: -42.37dBm RBW: 100 kHz

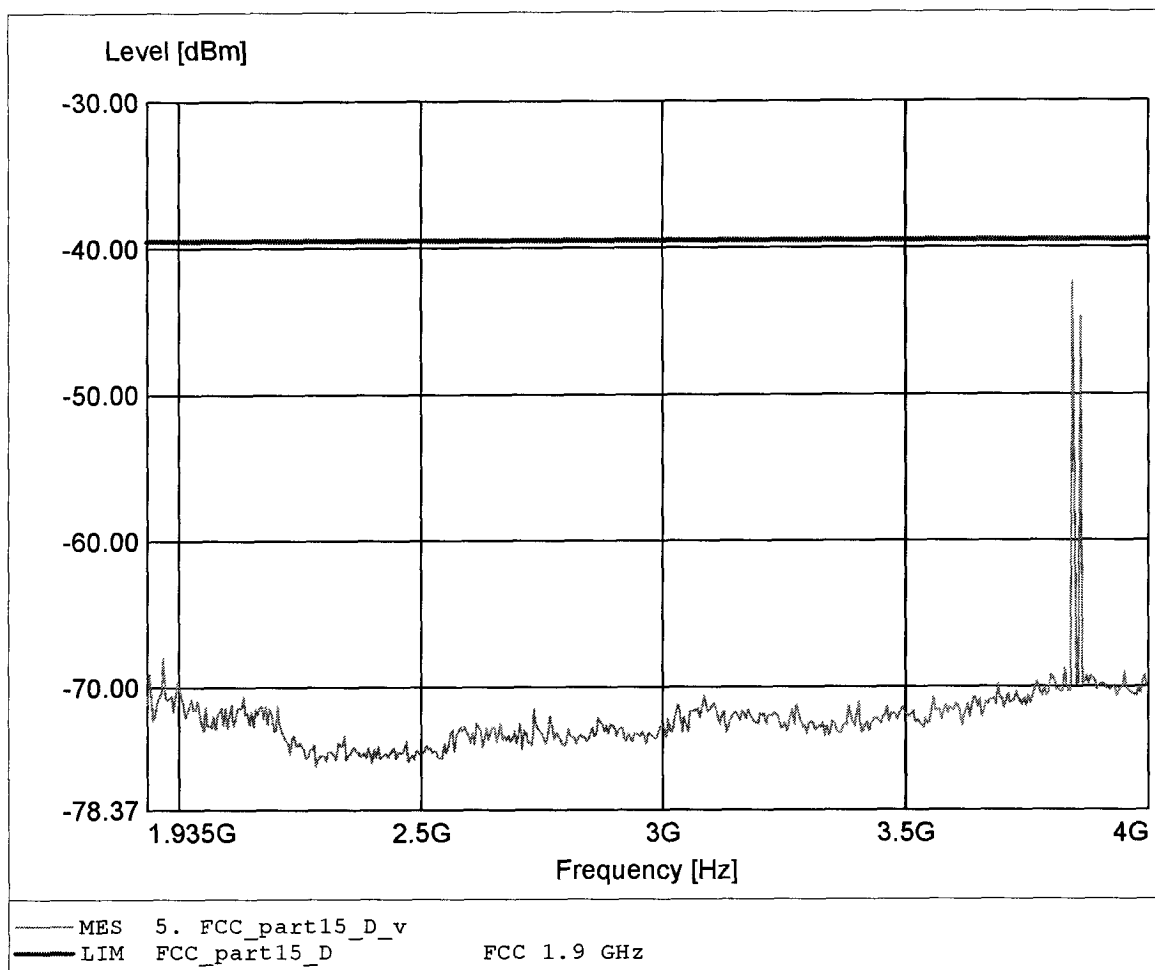

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:3.844GHz Pmax:-46.57dBm RBW:10 kHz

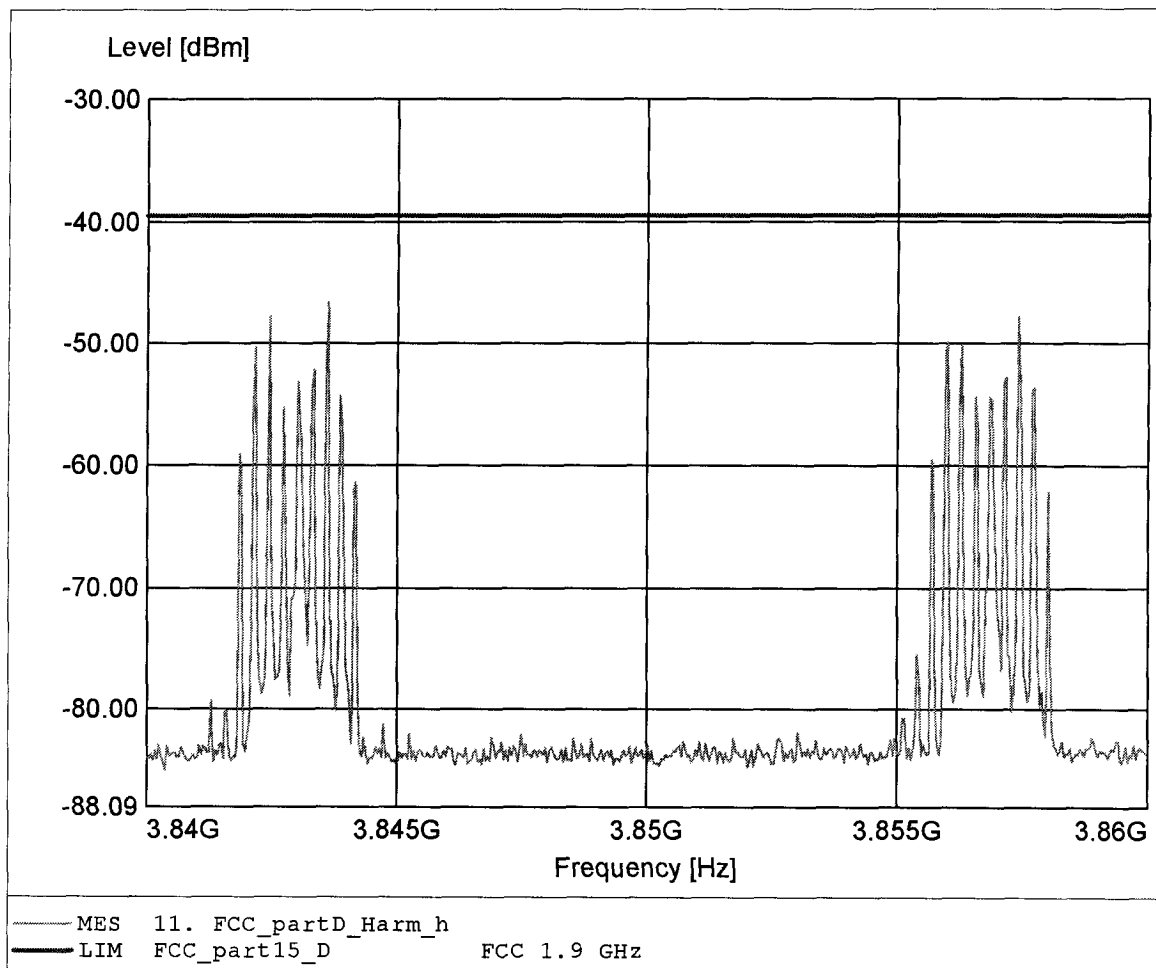

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:3.842GHz Pmax:-42.66dBm RBW:10 kHz

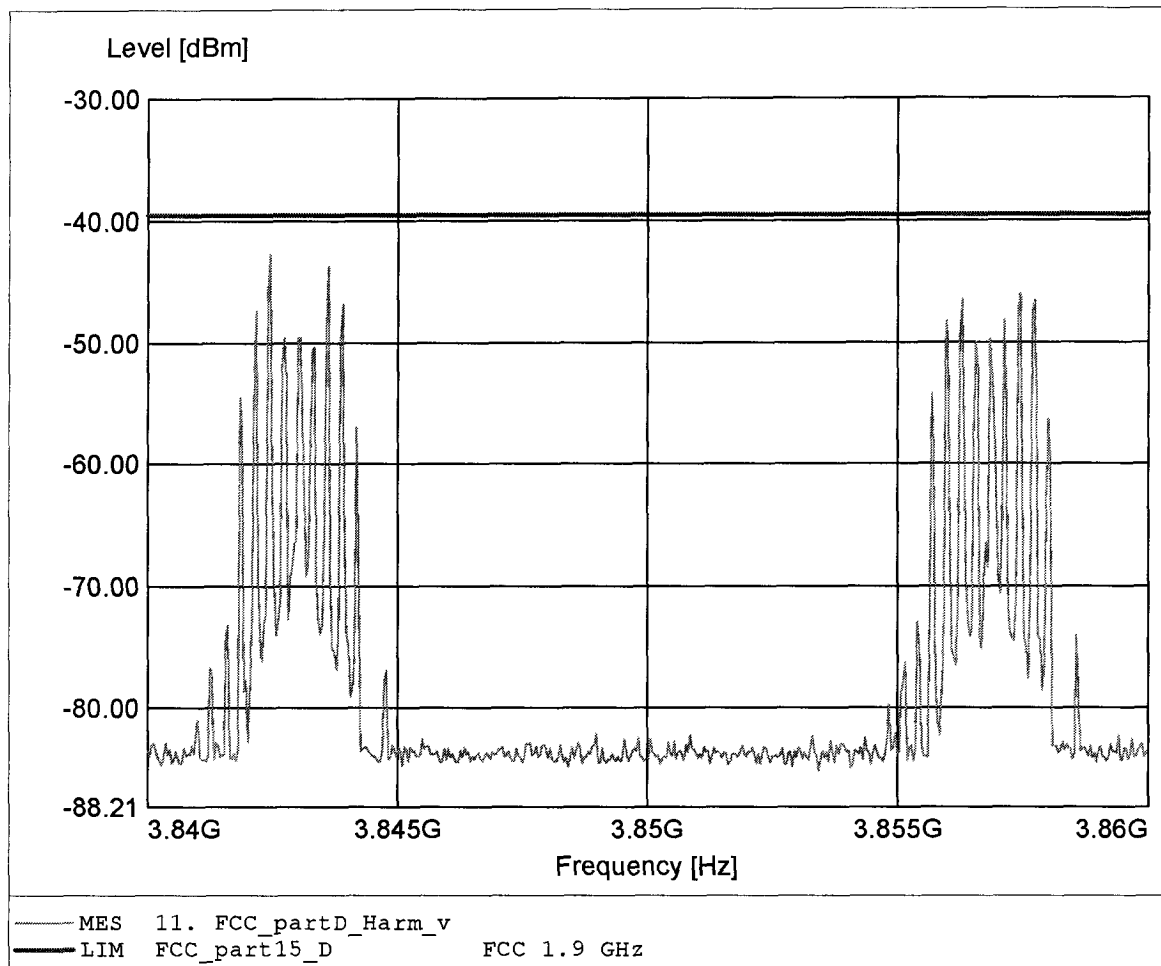

# Spurious emissions under normal conditions

## FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 5.786GHz Pmax: -51.81dBm RBW: 10 kHz

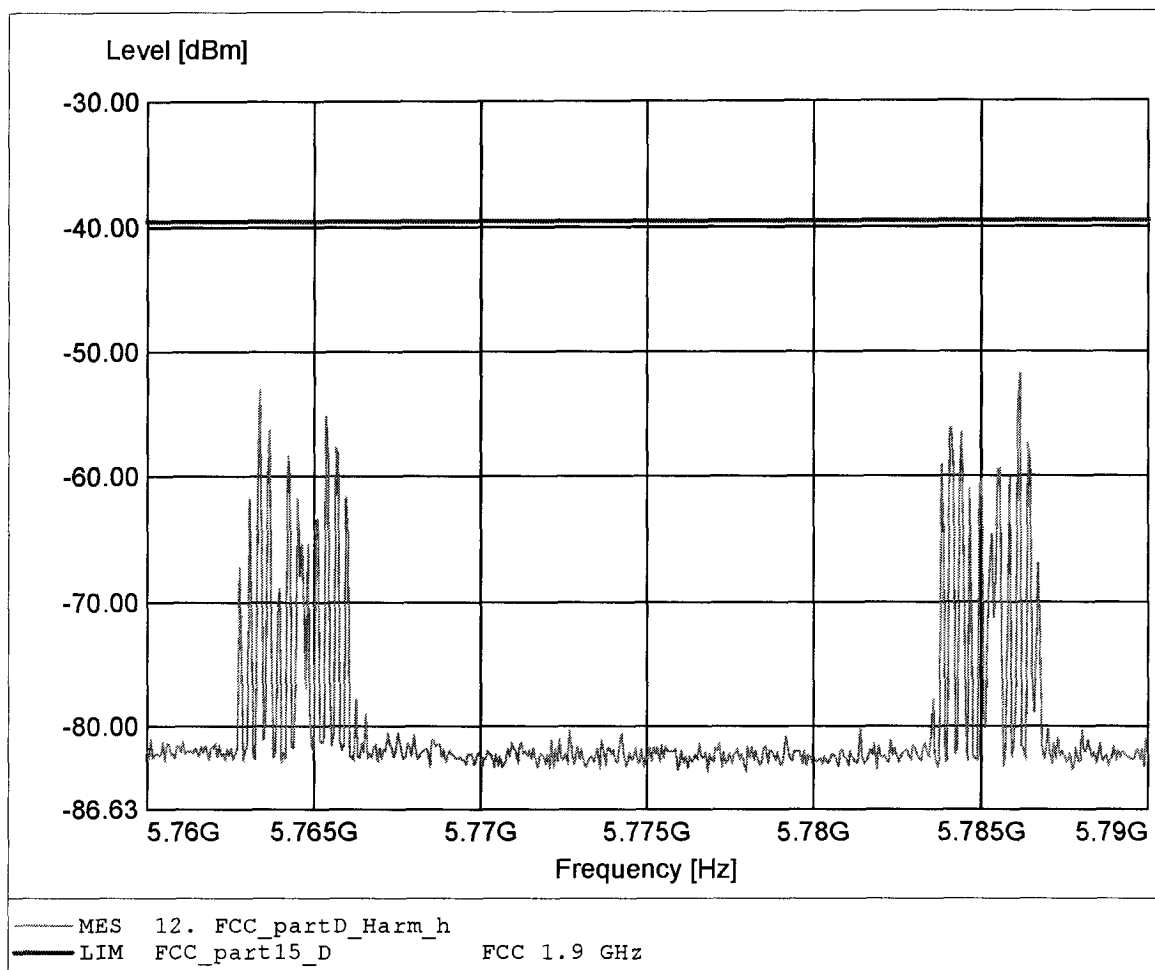

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 5.786GHz Pmax: -48.90dBm RBW: 10 kHz

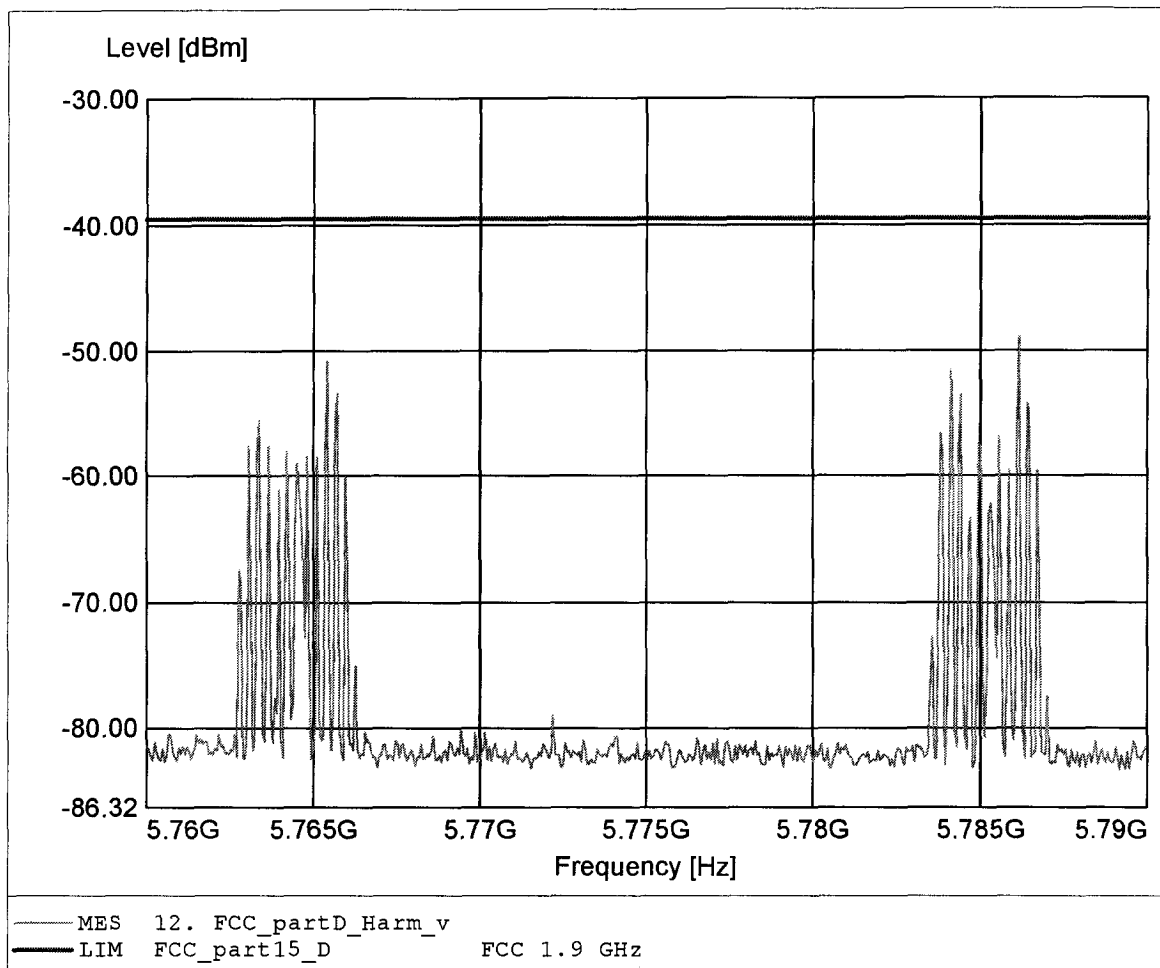

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 7.687GHz Pmax: -59.34dBm RBW: 10 kHz

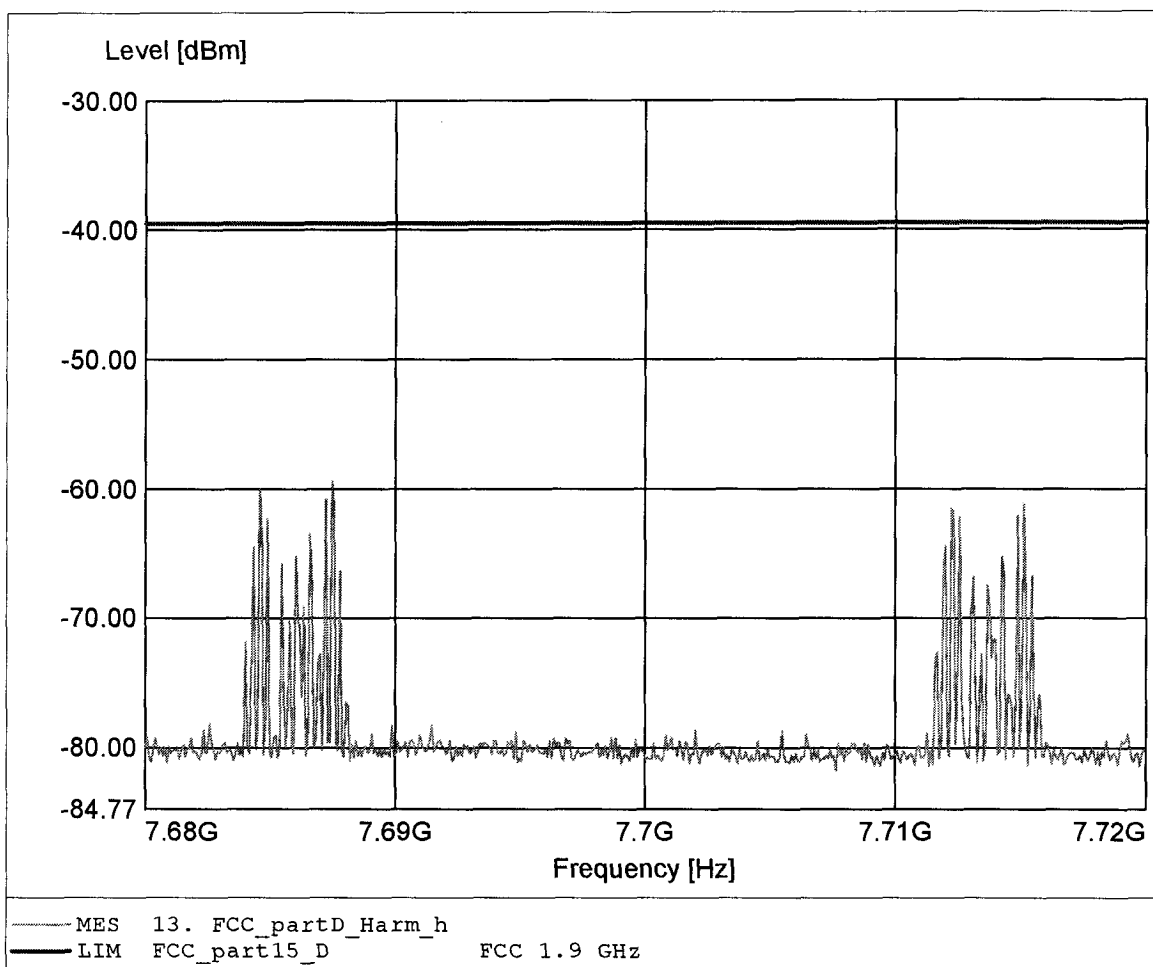

# Spurious emissions under normal conditions

## FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 7.715GHz Pmax:-52.28dBm RBW:10 kHz

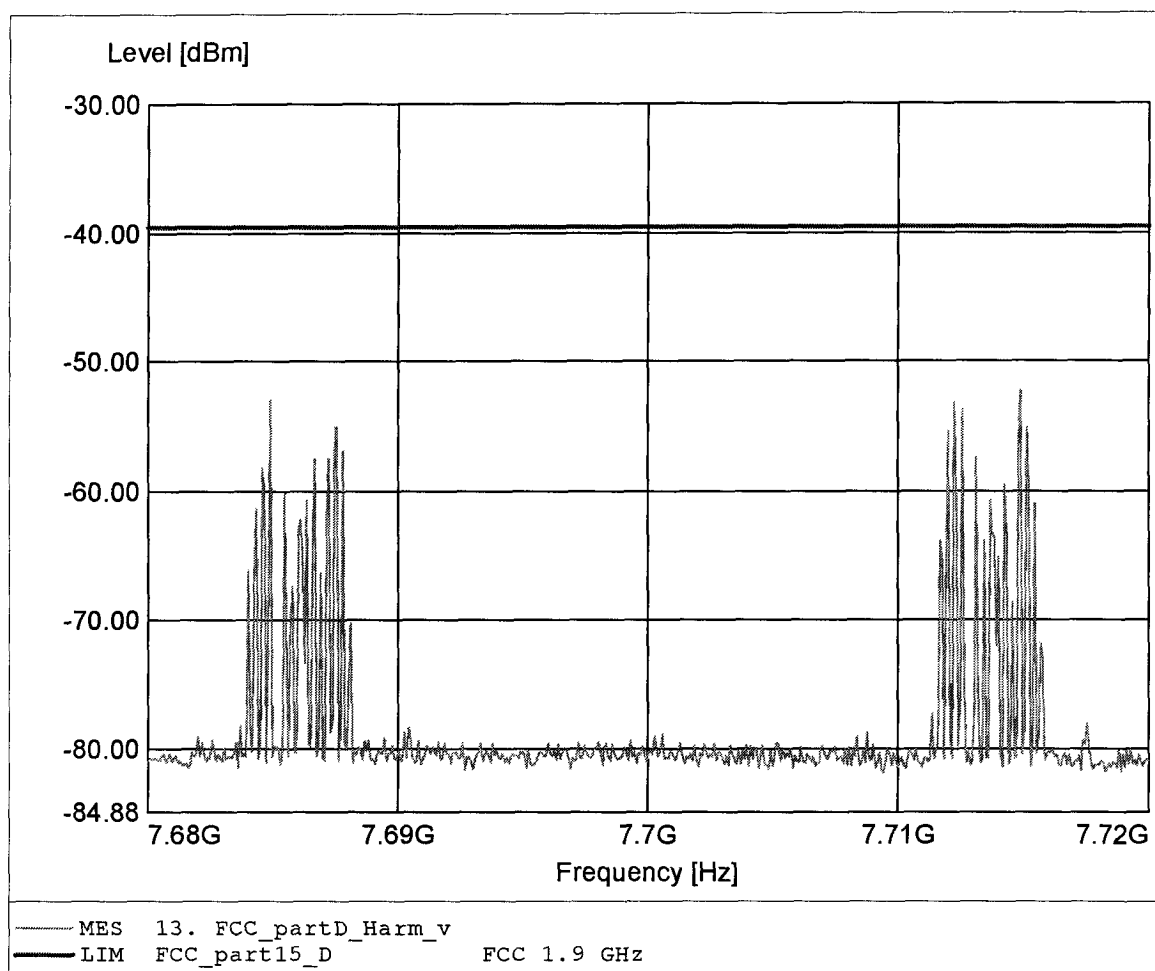

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 9.609GHz Pmax: -51.03dBm RBW: 10 kHz

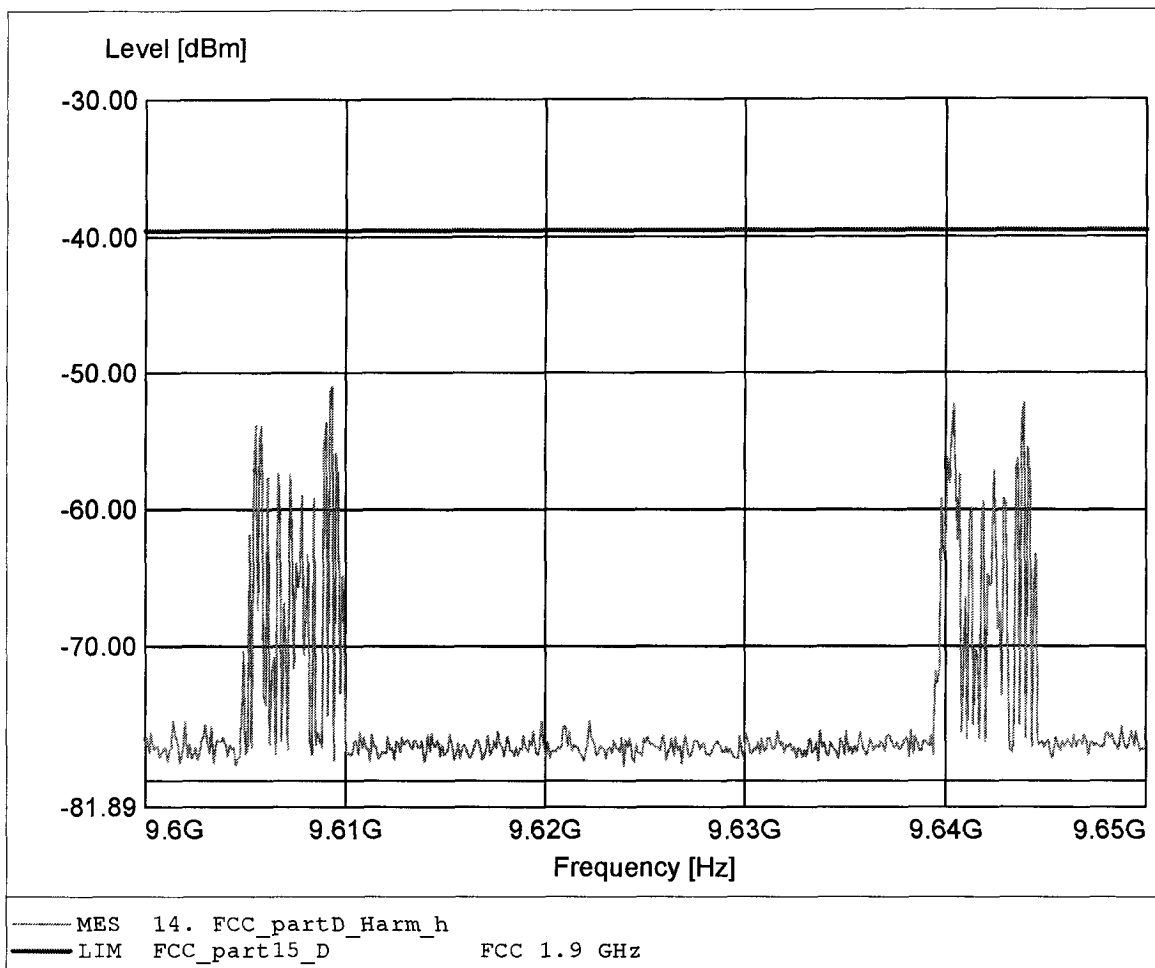

# Spurious emissions under normal conditions

## FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 9.609GHz Pmax: -42.90dBm RBW: 10 kHz

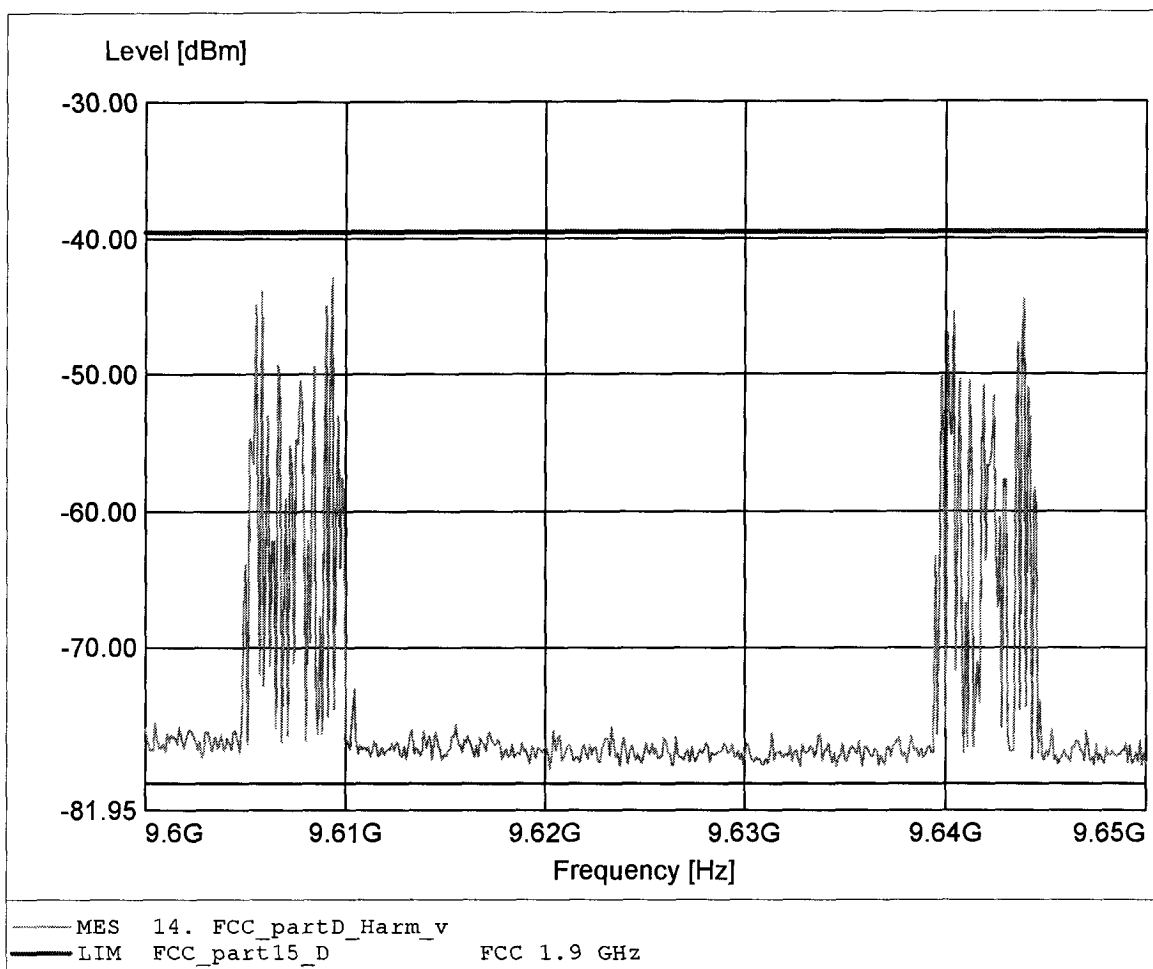

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:11.569GHz Pmax:-46.21dBm RBW:10 kHz

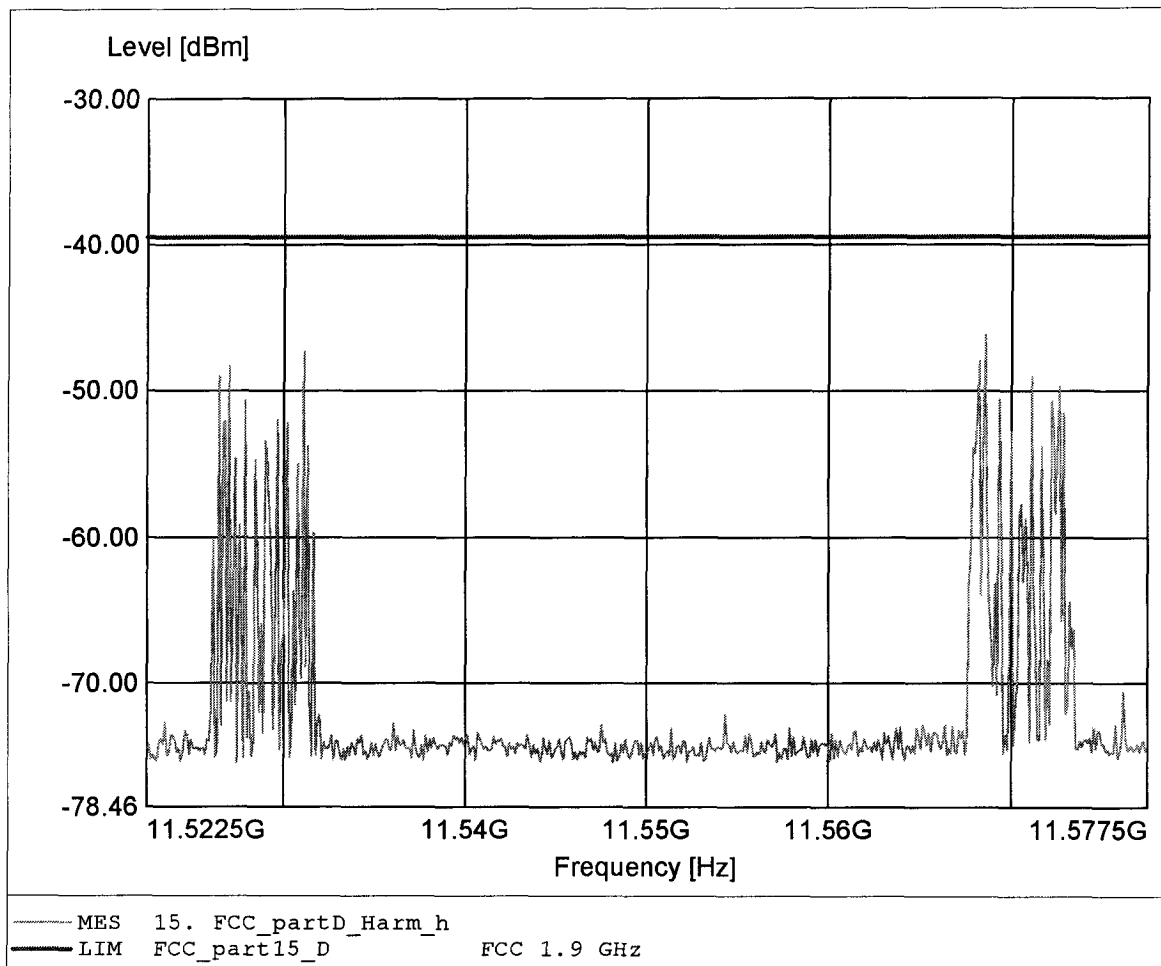

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq: 11.531GHz Pmax: -41.74dBm RBW: 10 kHz

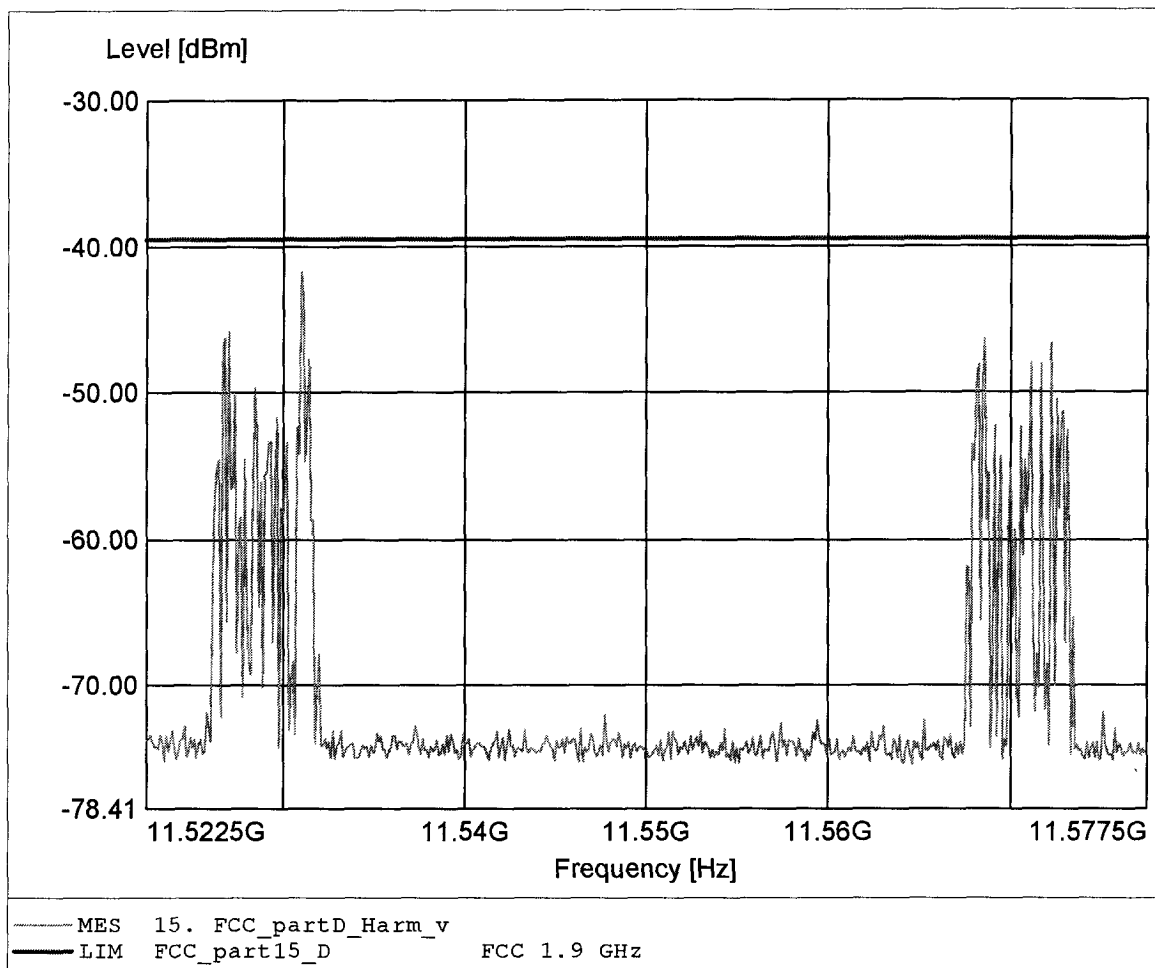

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:13.453GHz Pmax:-54.56dBm RBW:10 kHz

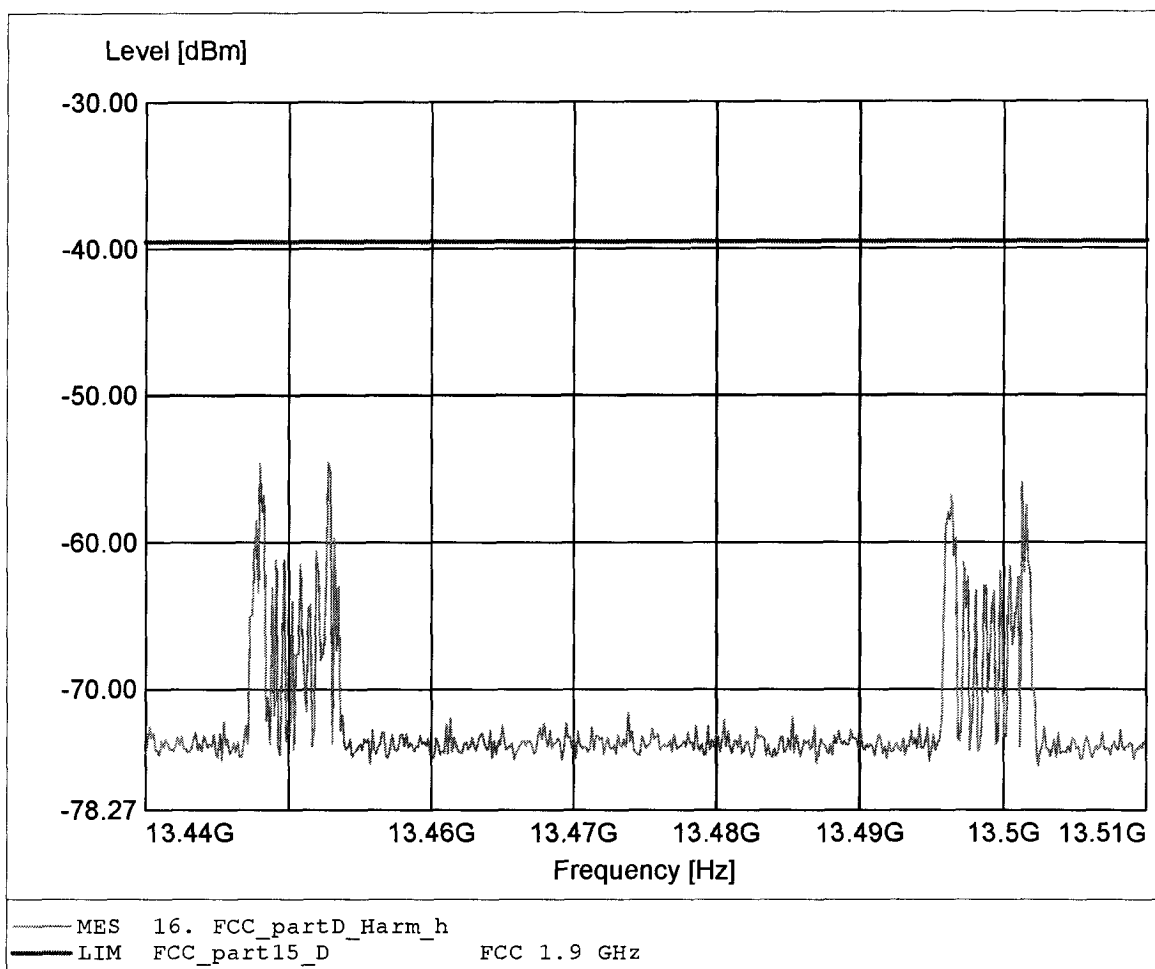

# Spurious emissions under normal conditions

## FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:13.497GHz Pmax:-53.12dBm RBW:10 kHz

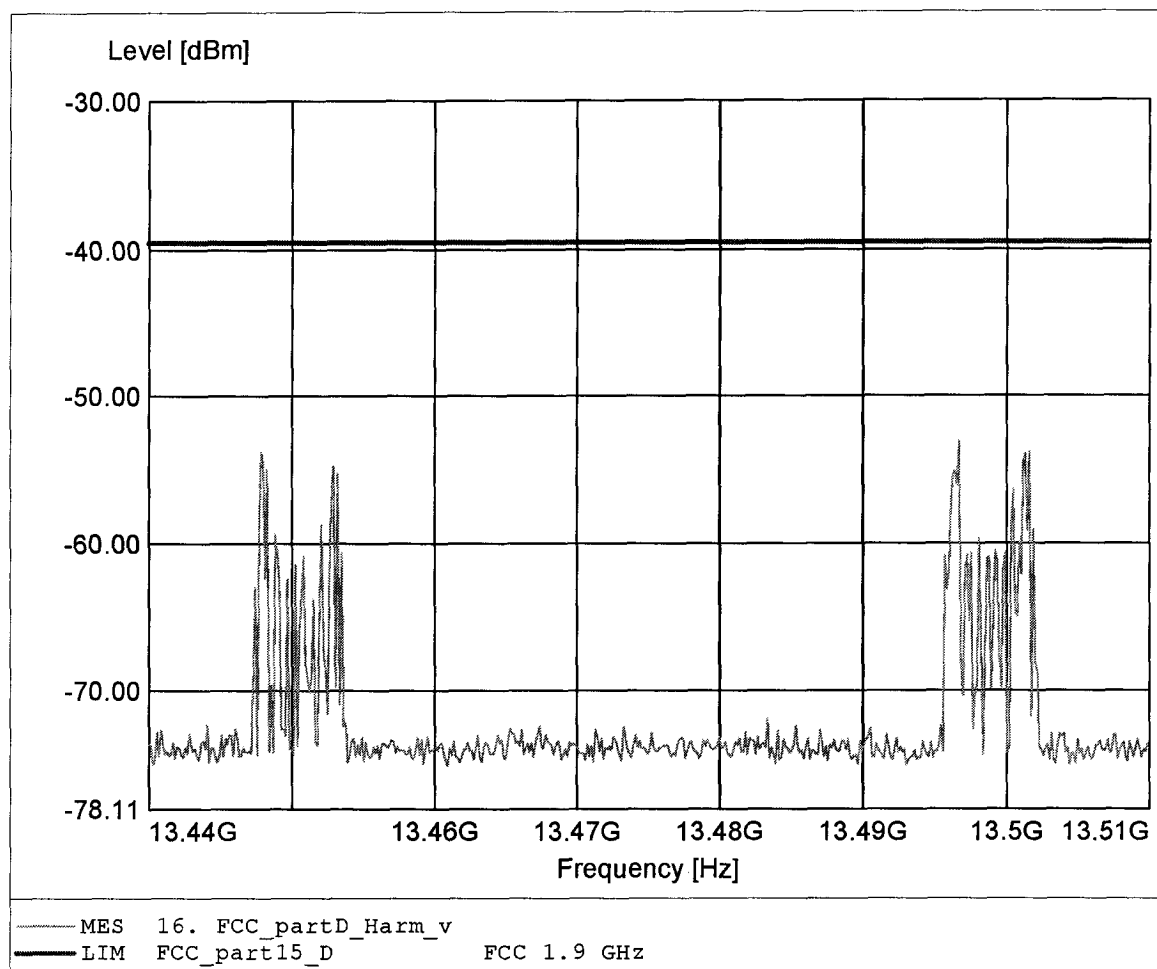

# Spurious emissions under normal conditions

## FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:15.387GHz Pmax:-70.07dBm RBW:10 kHz

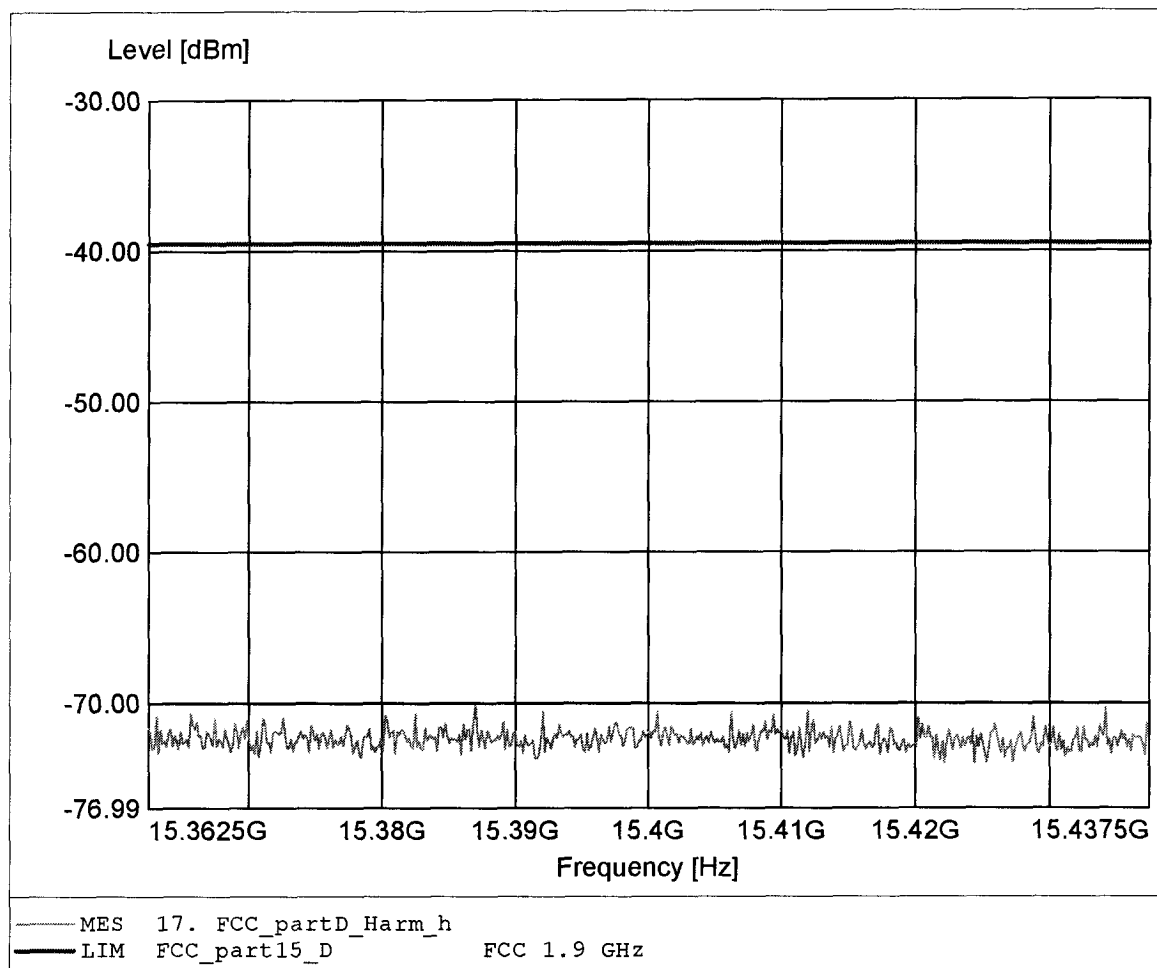

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:15.430GHz Pmax:-67.67dBm RBW:10 kHz

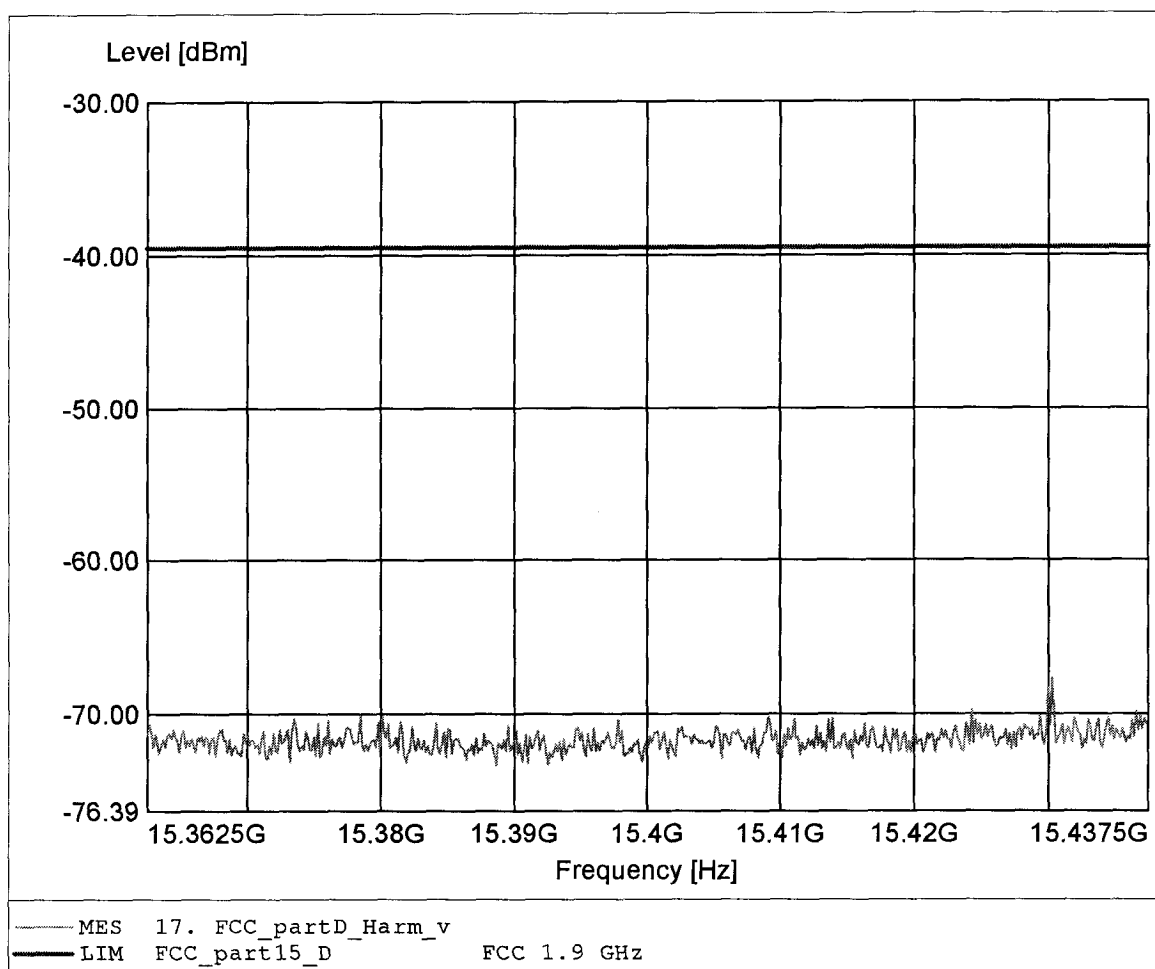

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:17.297GHz Pmax:-60.83dBm RBW:10 kHz

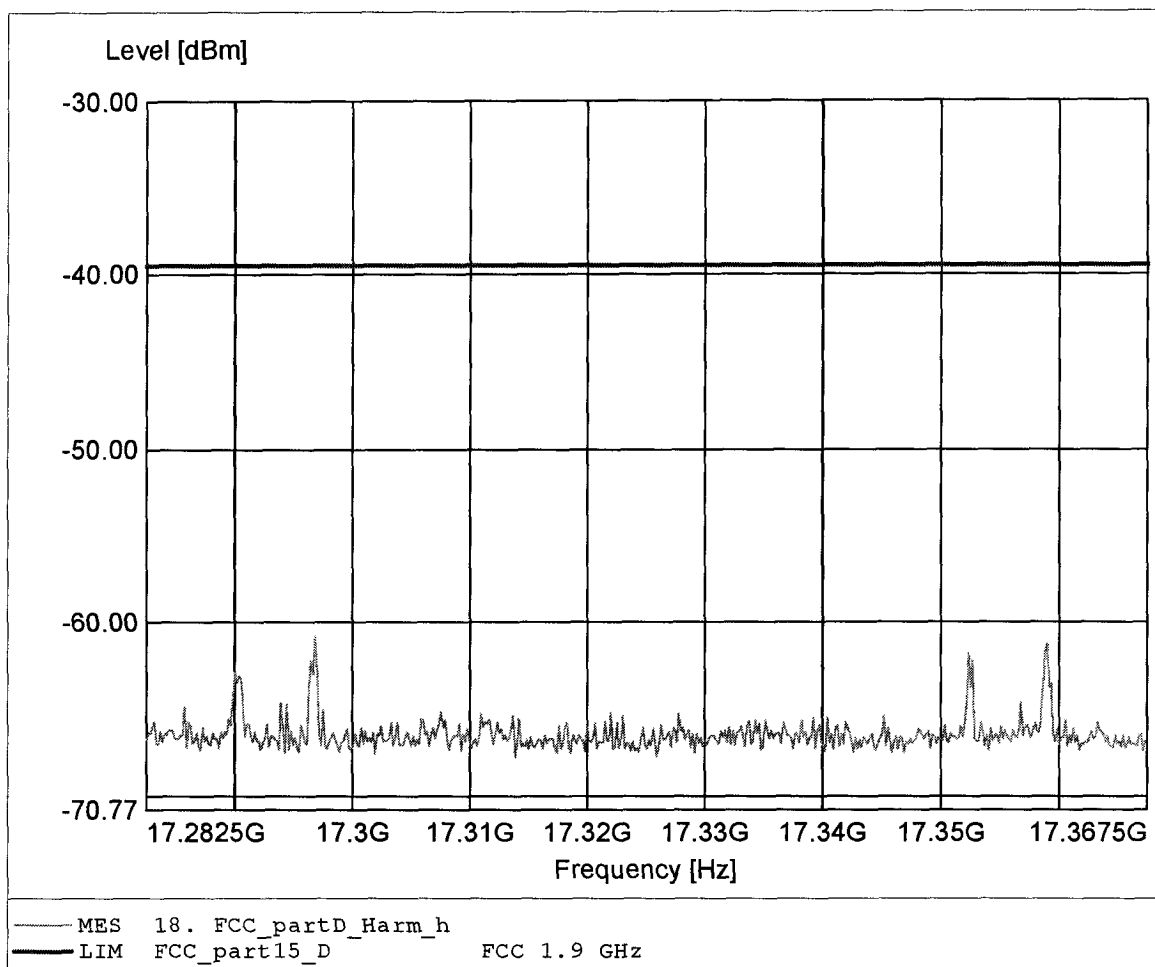

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**


Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.  
Comment 2: Freq:17.353GHz Pmax:-69.17dBm RBW:10 kHz

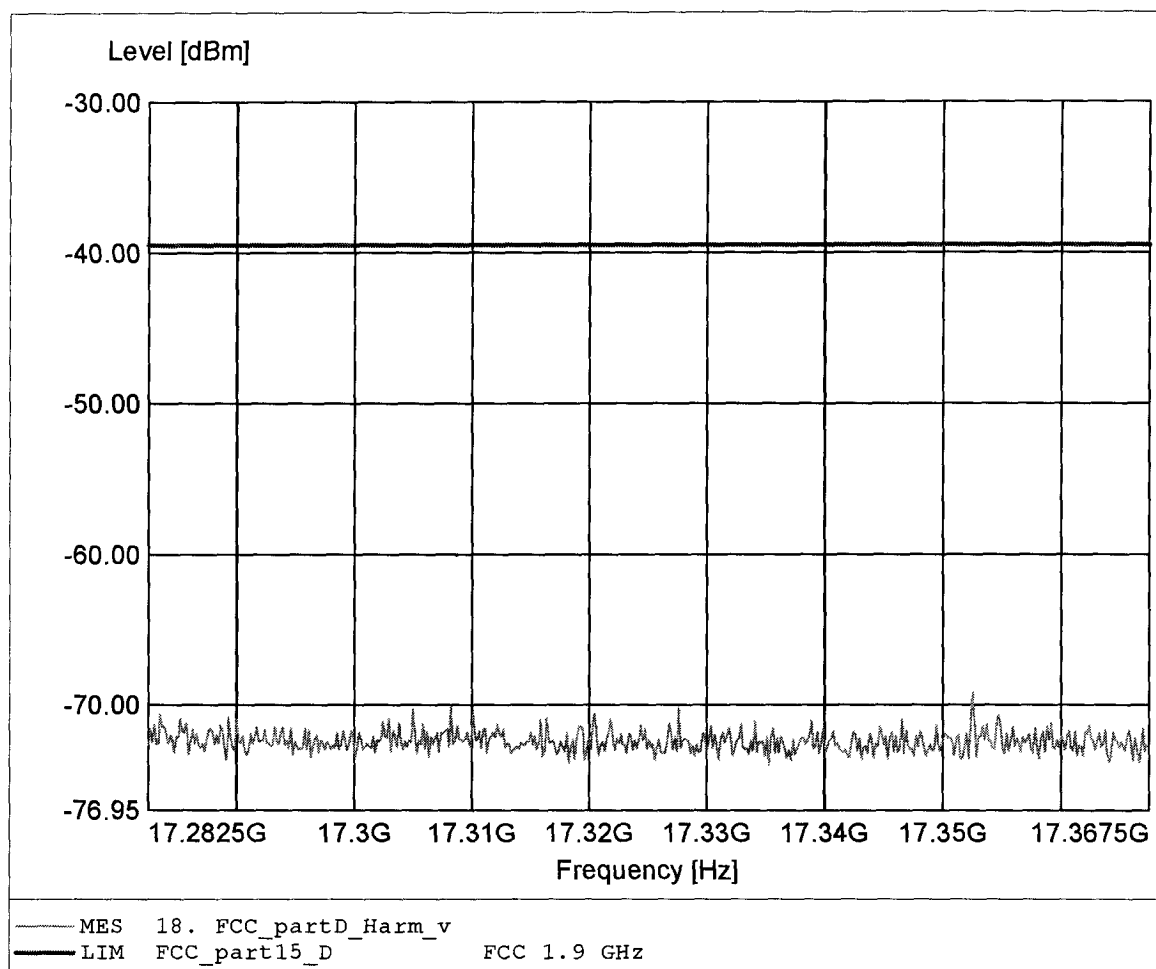

**Spurious emissions under normal conditions**

**FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)**

Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Schlaps  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:19.251GHz Pmax:-58.97dBm RBW:10 kHz

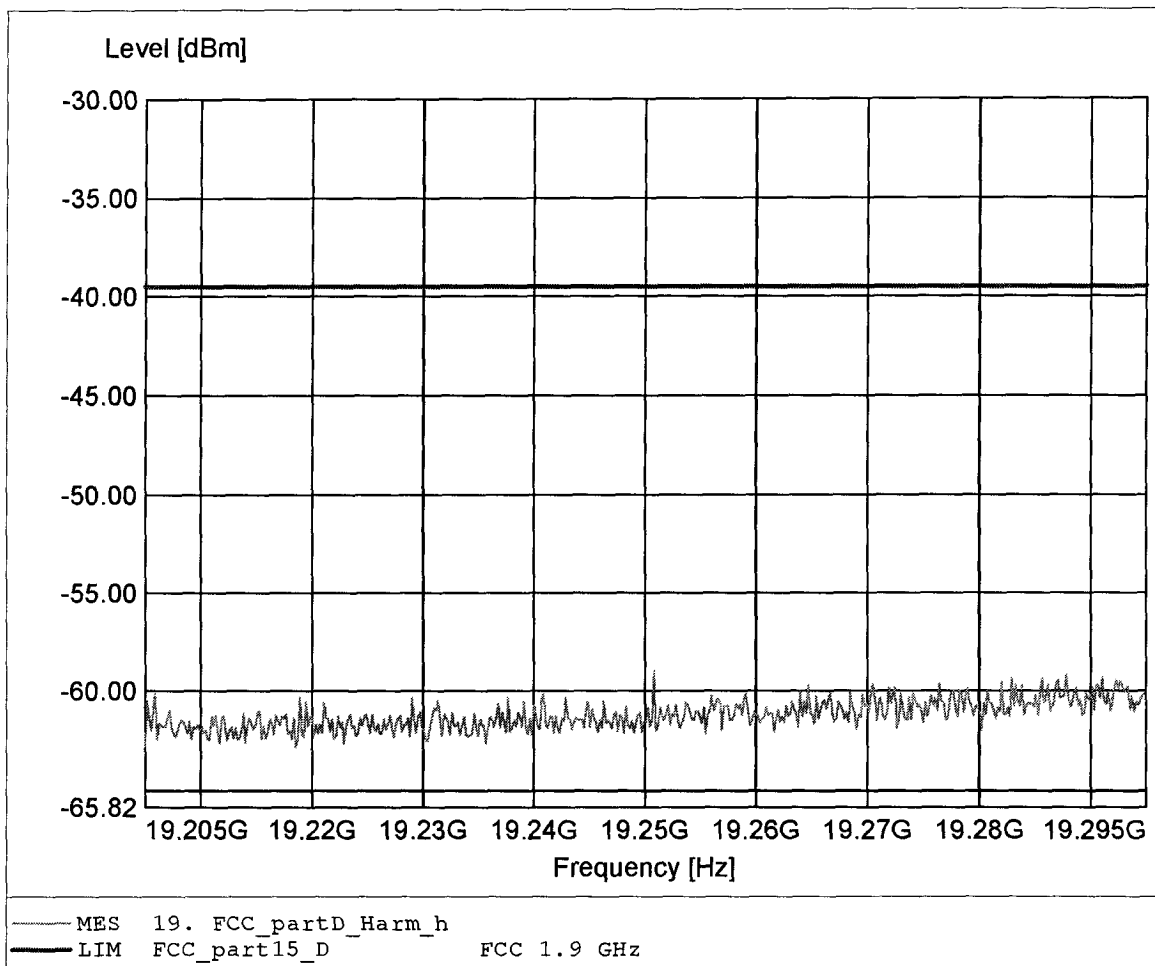

# Spurious emissions under normal conditions

## FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Approval Holder: Teledex  
EUT: Cordless Telephone / fixed part  
Model : DCT2910 / Ch.: 0/4 / antenna: 1  
Test Site / Operator: ETS / Mr. Handrik  
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)  
Test Specification: Fully anechoic chamber / mode: Tx  
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.  
Comment 2: Freq:19.280GHz Pmax:-59.38dBm RBW:10 kHz

