


Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:197.275MHz Pmax:-61.06dBm RBW: 100 kHz

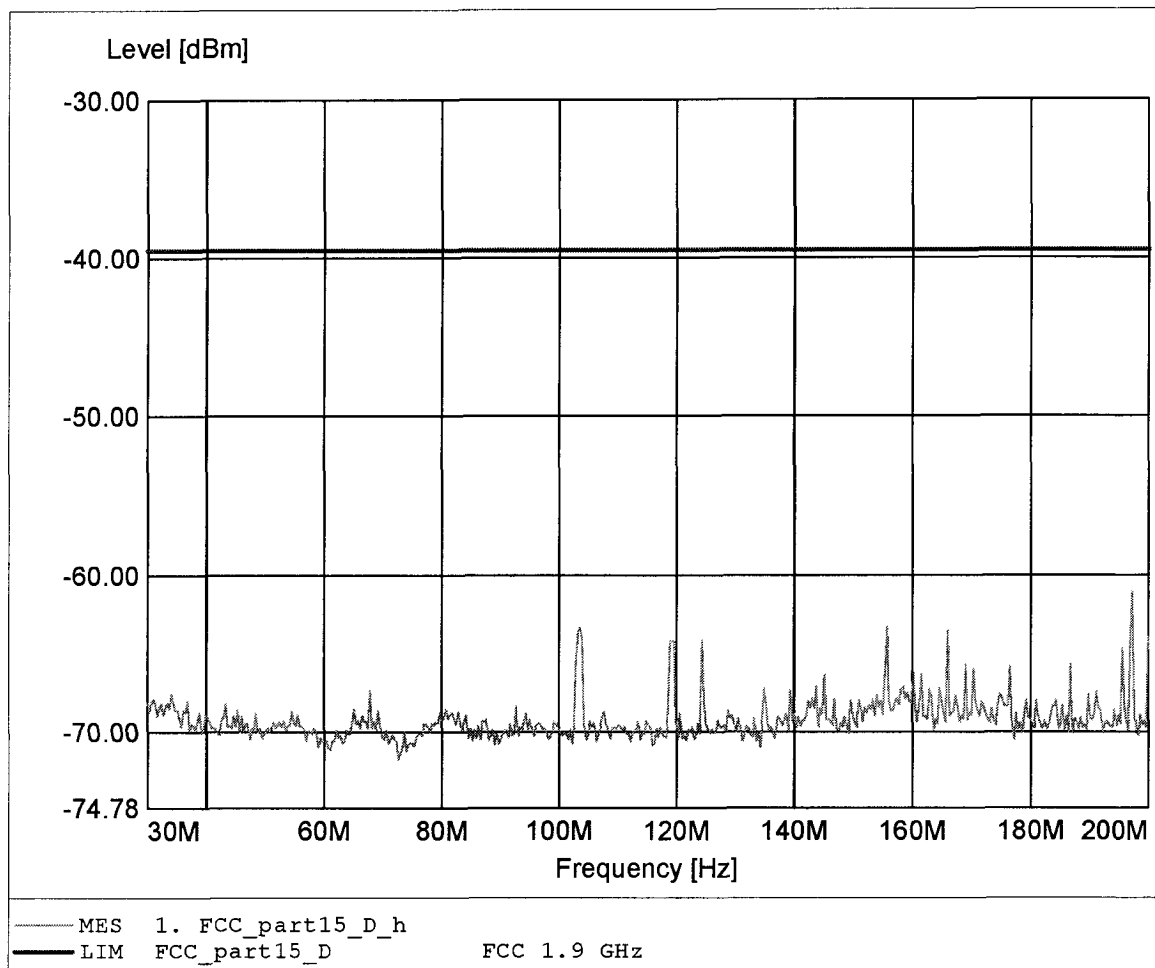

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:145.150MHz Pmax:-60.57dBm RBW: 100 kHz

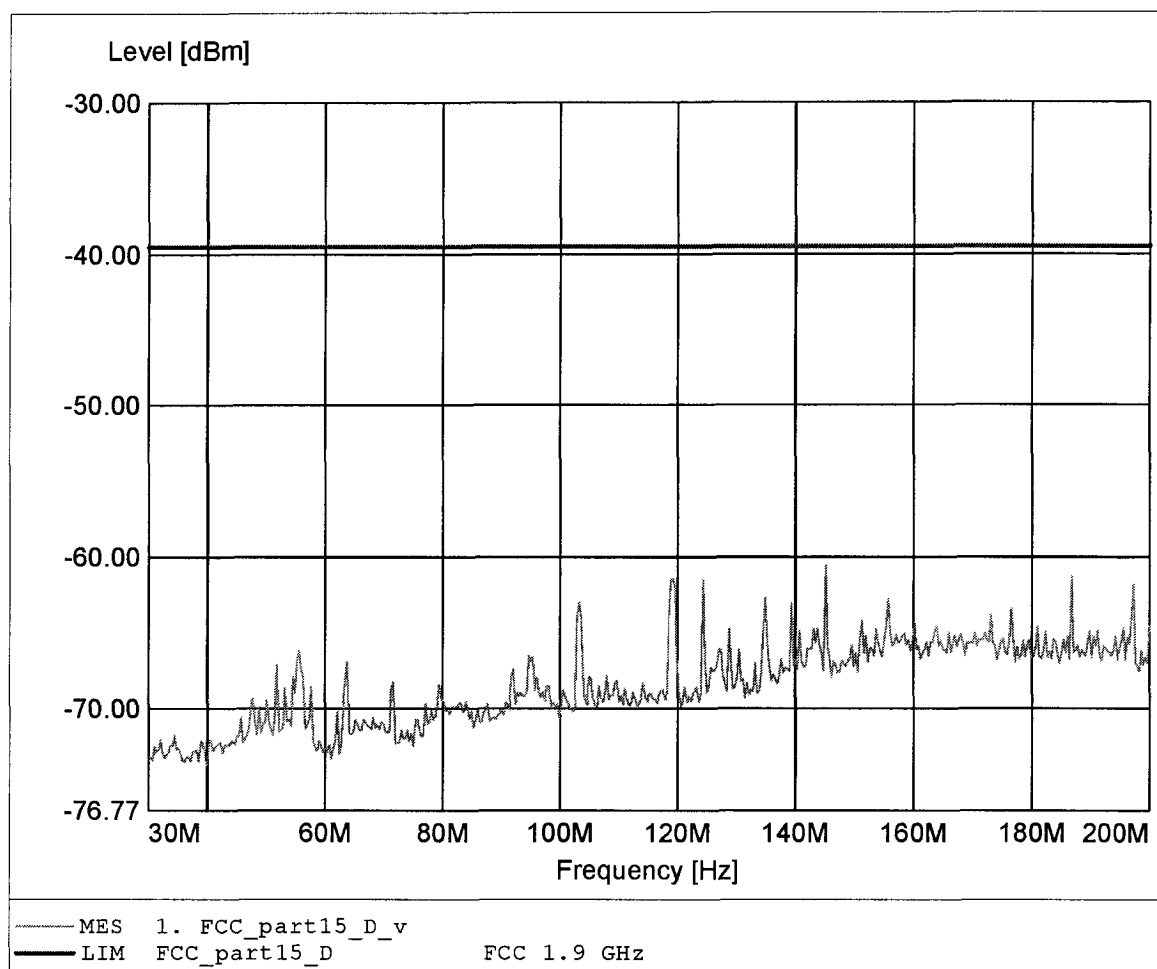

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 961.523MHz Pmax: -73.65dBm RBW: 100 kHz

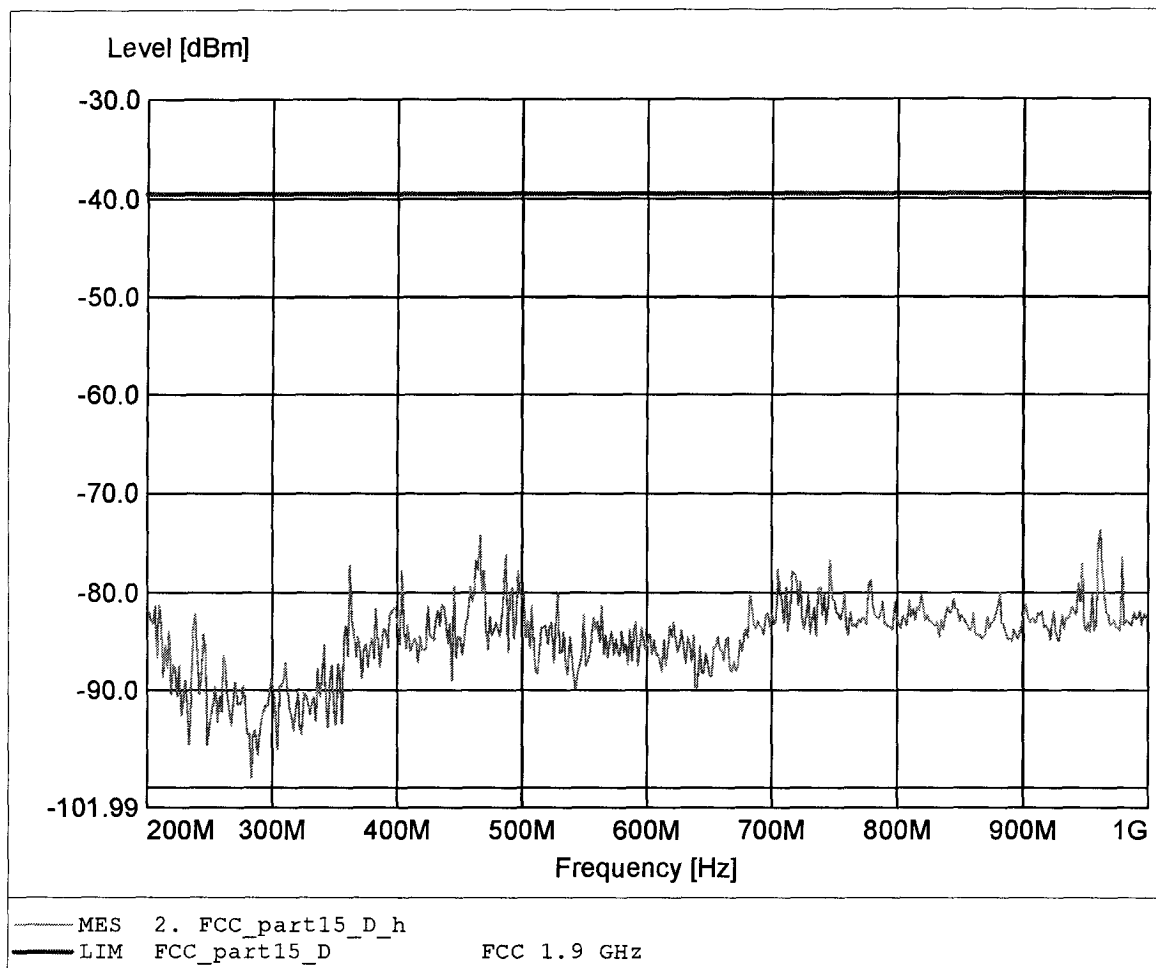

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 961.523MHz Pmax: -79.80dBm RBW: 100 kHz

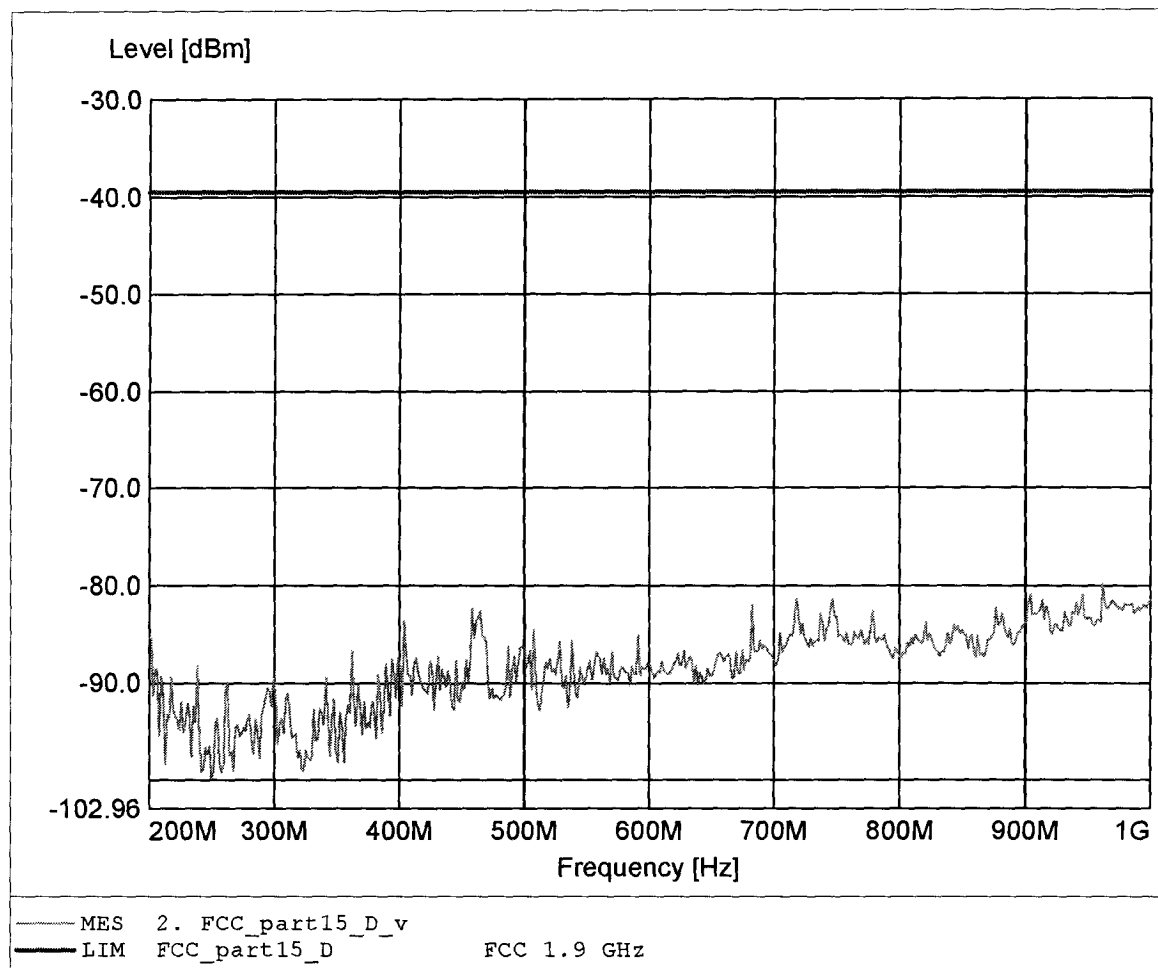

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.911GHz Pmax: -64.15dBm RBW: 100 kHz

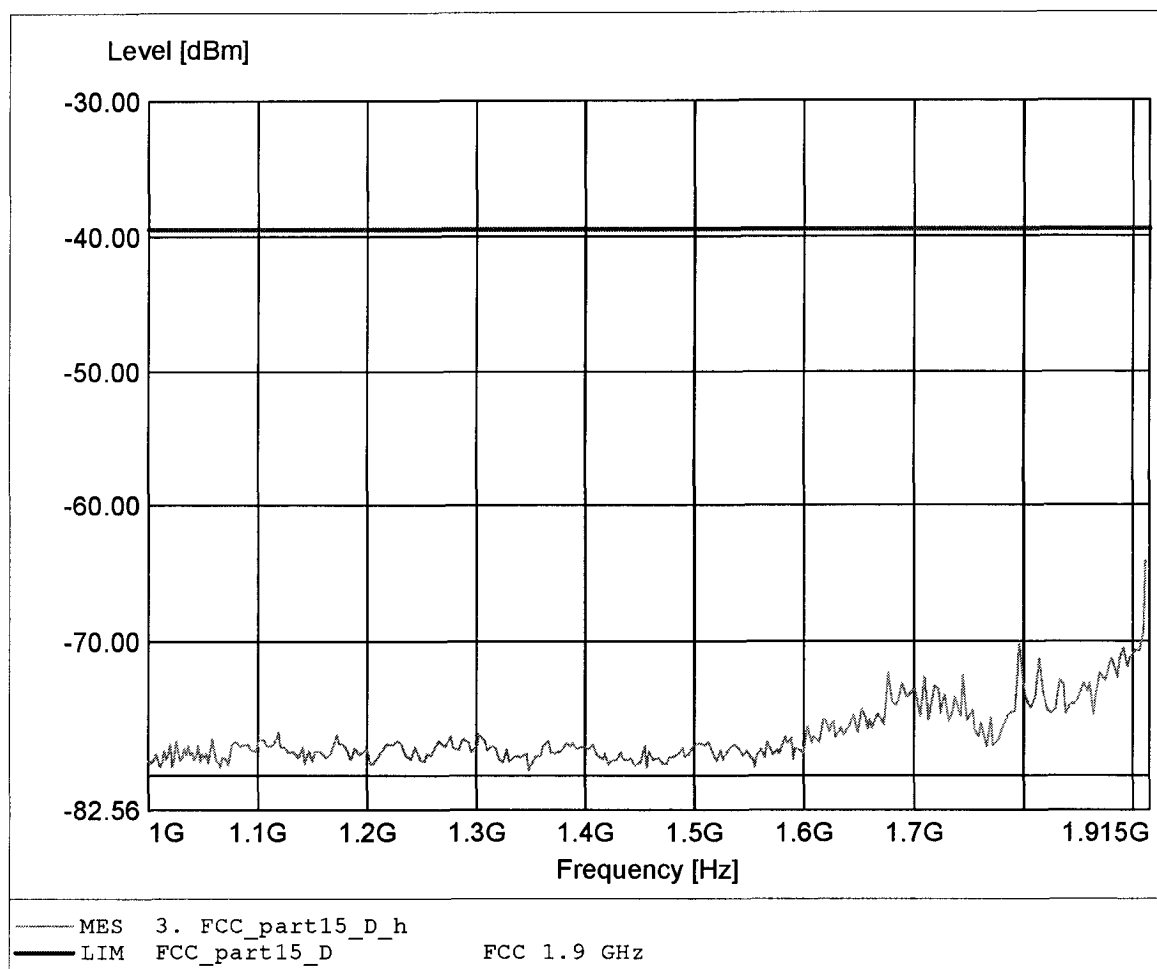

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.911GHz Pmax:-63.74dBm RBW: 100 kHz

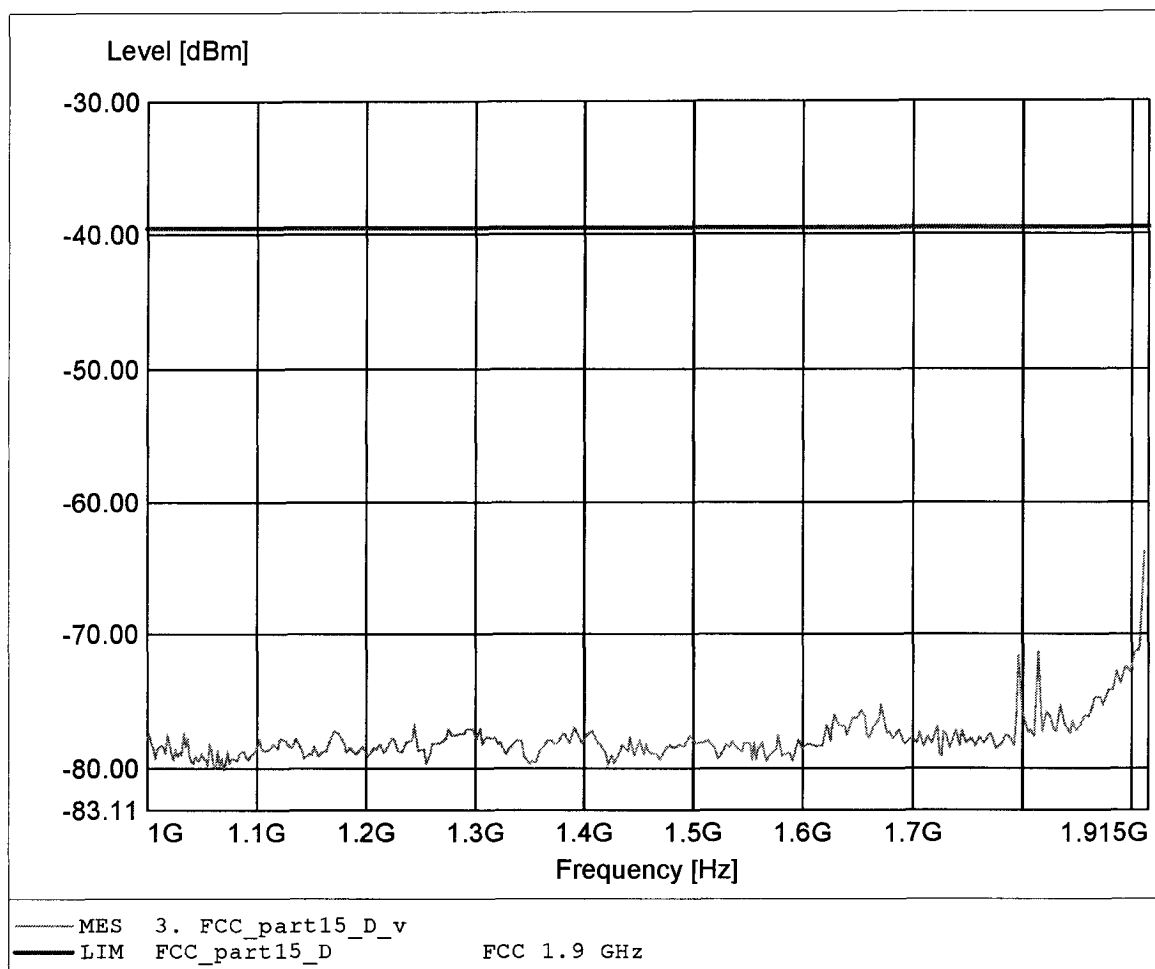

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.919GHz Pmax:-49.87dBm RBW: 10 kHz

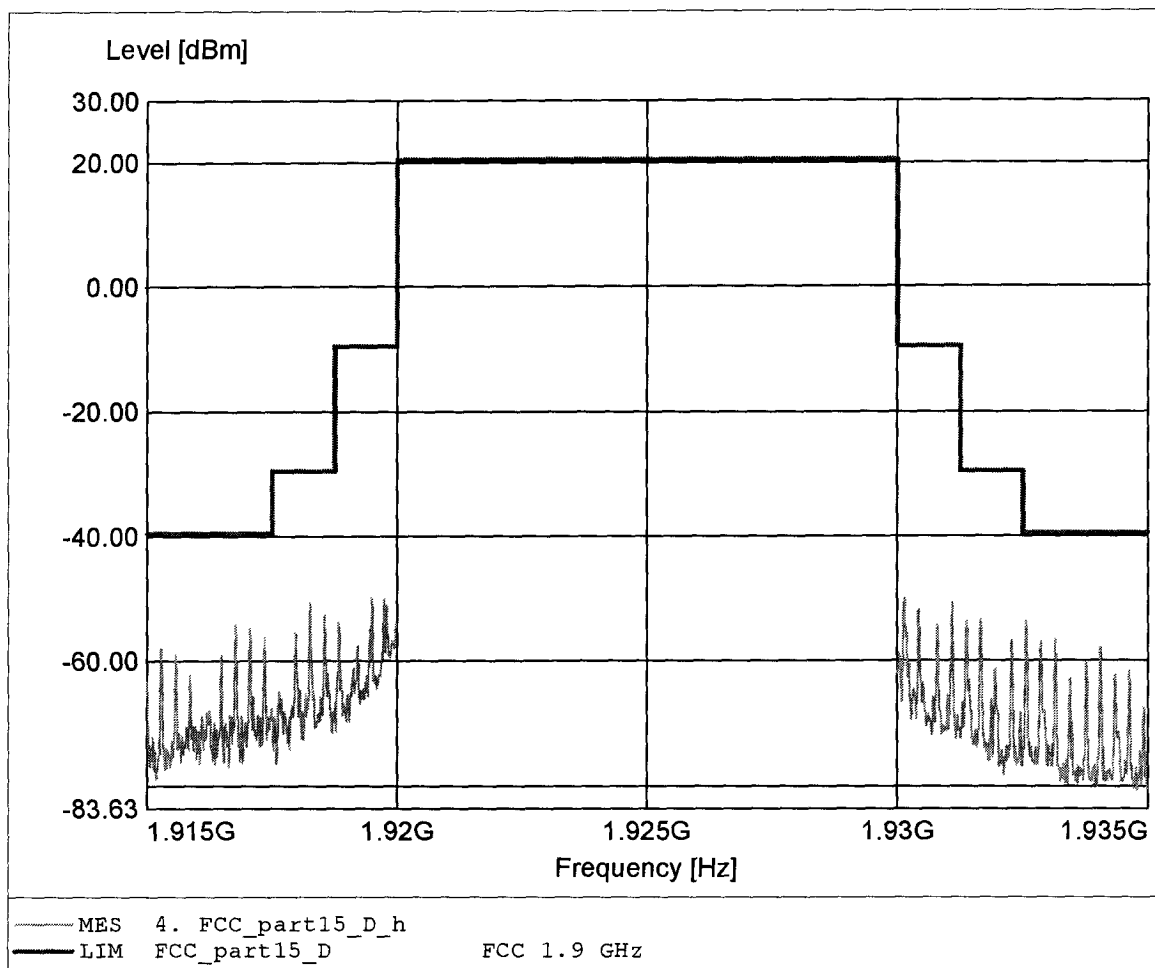

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.920GHz Pmax:-50.02dBm RBW: 10 kHz

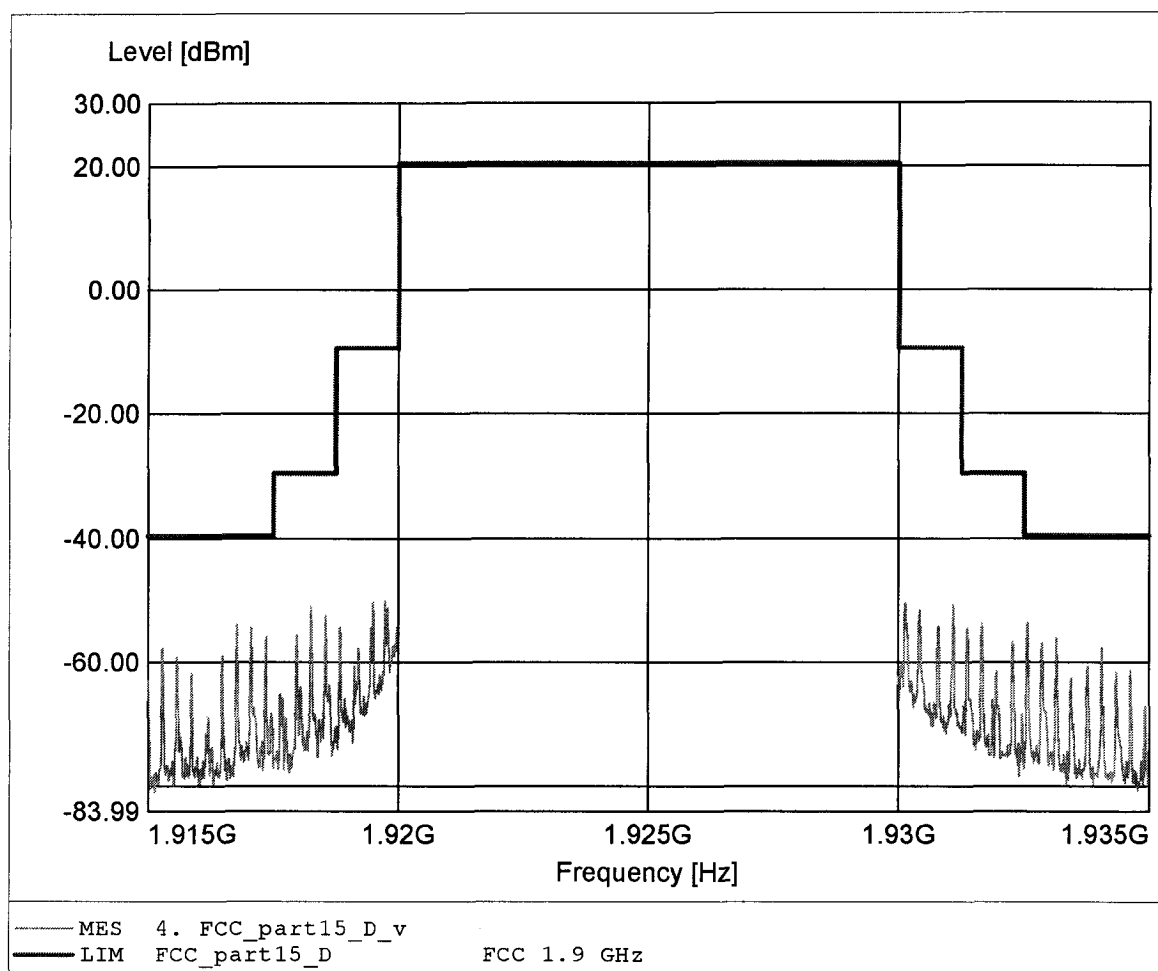

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.843GHz Pmax: -50.56dBm RBW: 100 kHz

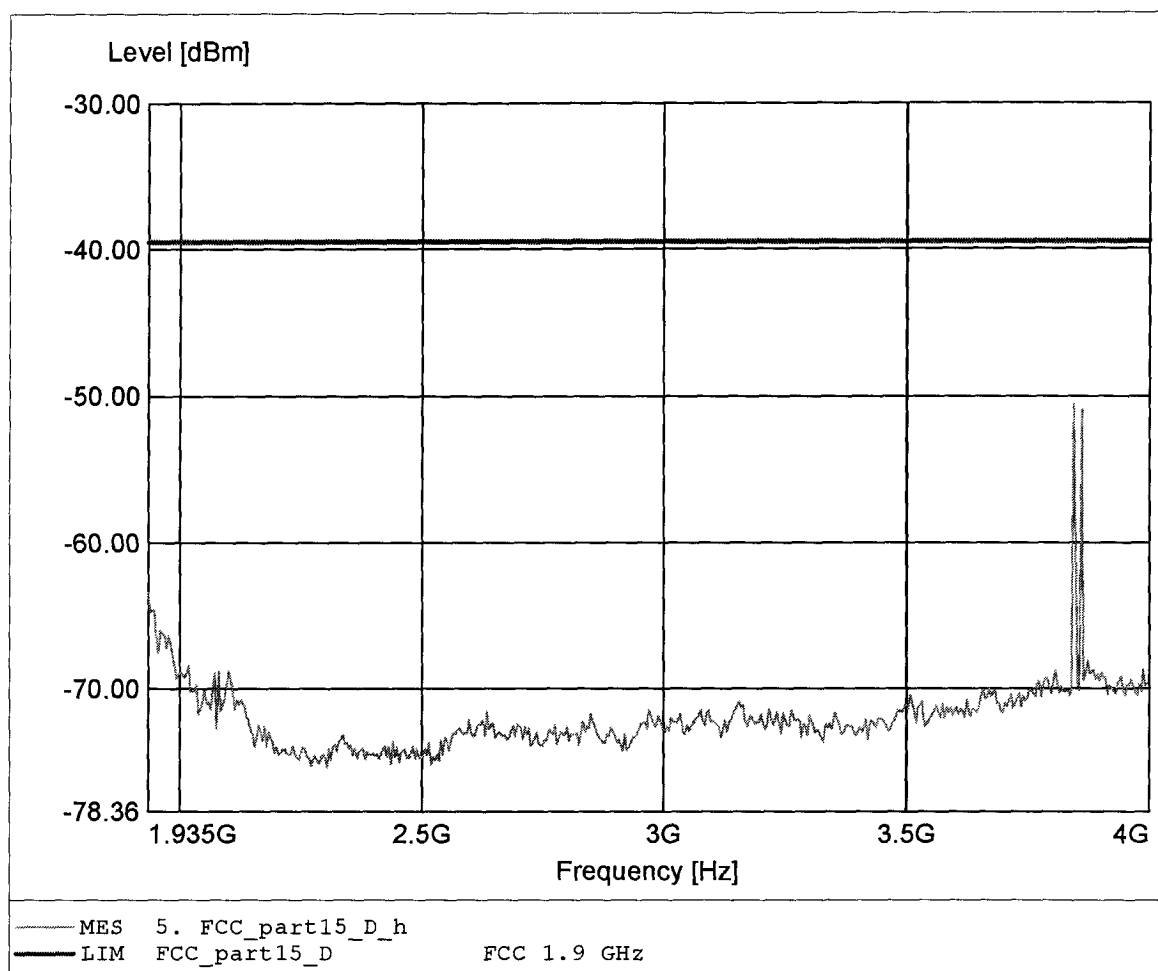

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.859GHz Pmax: -43.20dBm RBW: 100 kHz

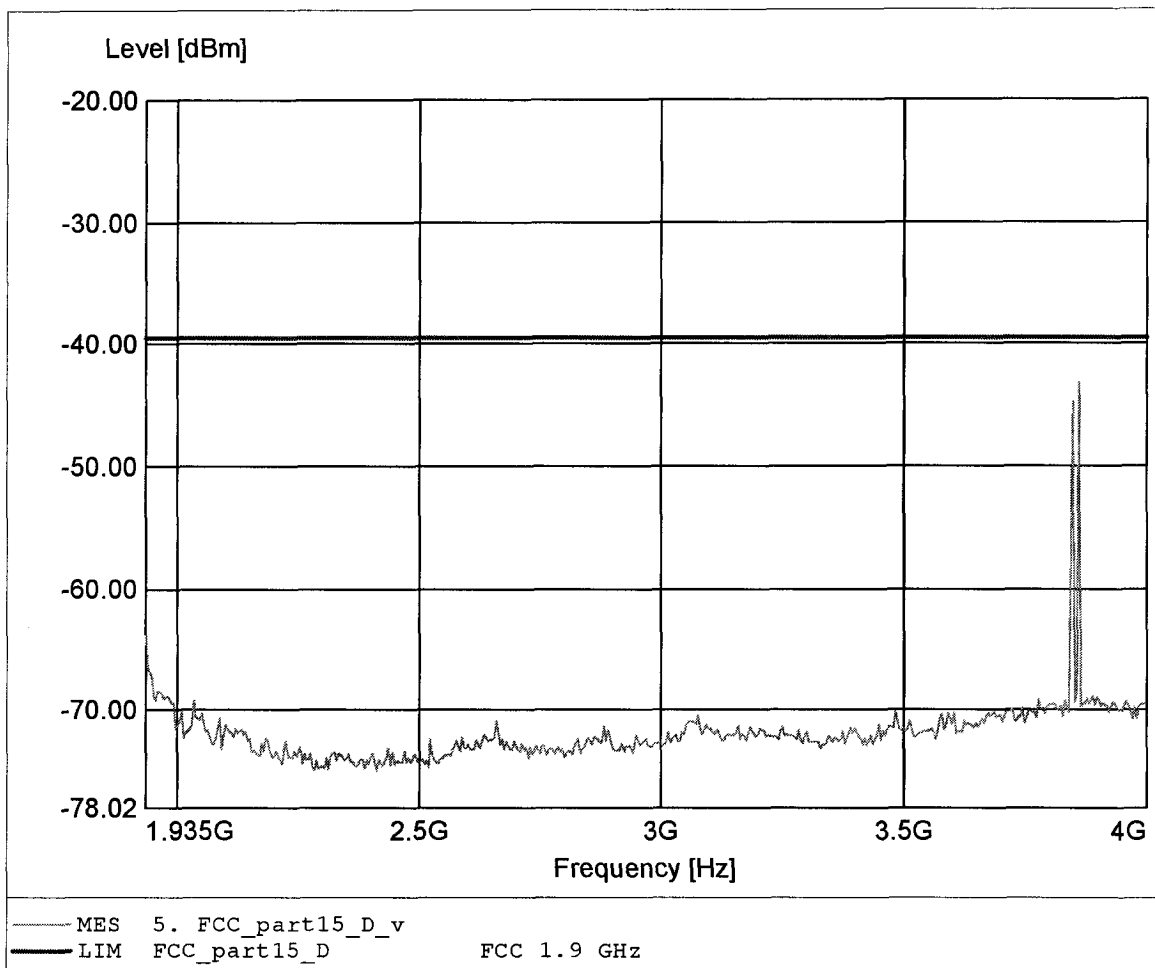

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:3.857GHz Pmax:-49.76dBm RBW:10 kHz

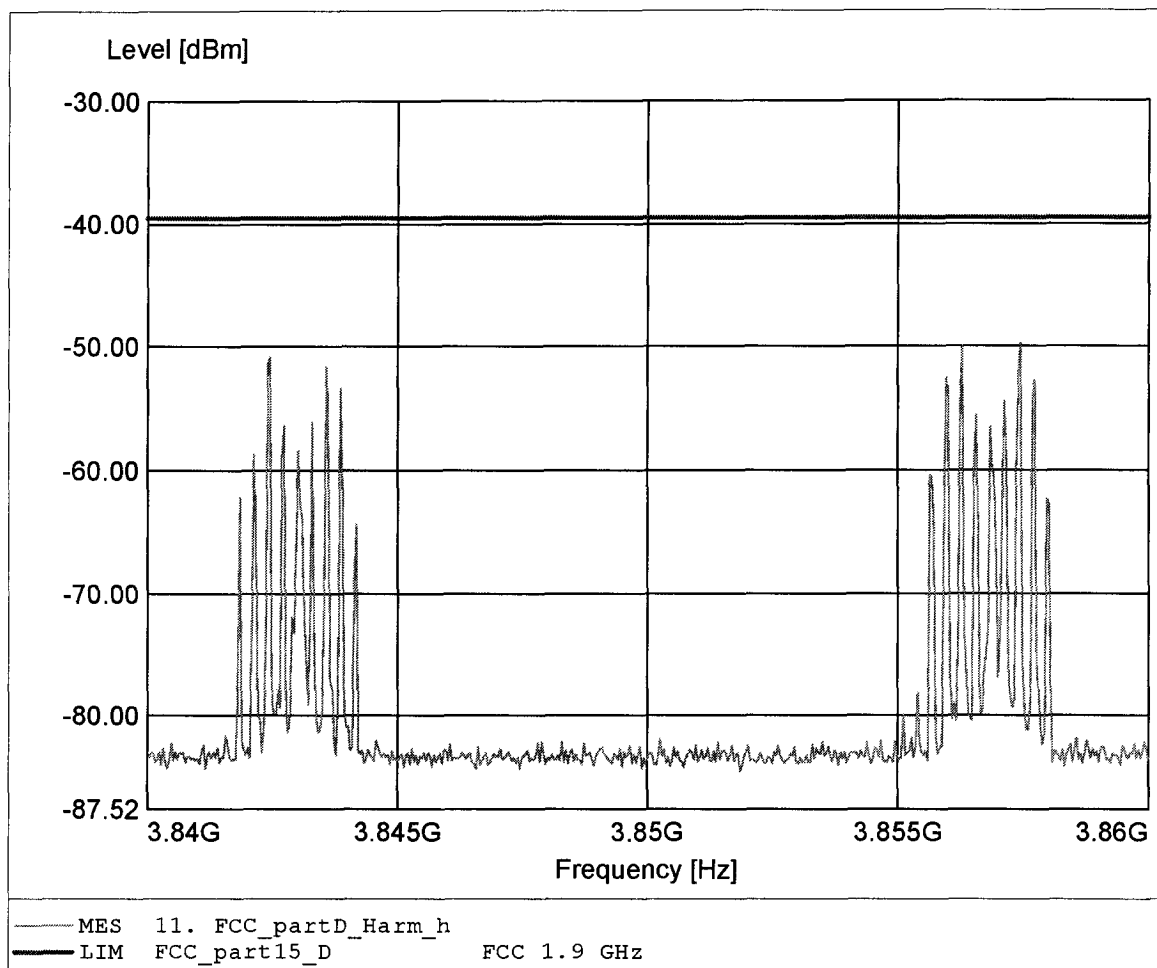

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:3.857GHz Pmax:-42.86dBm RBW:10 kHz

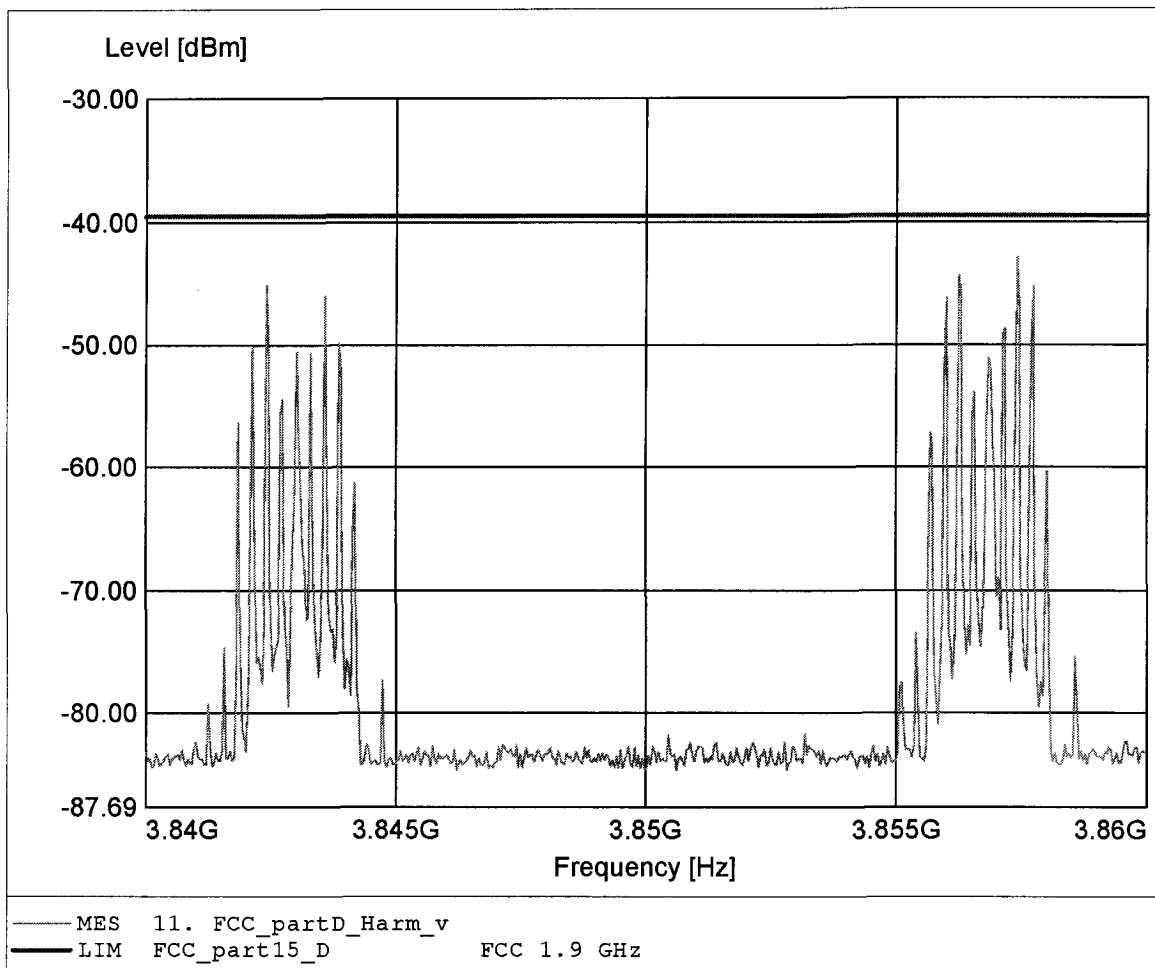

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 5.765GHz Pmax: -45.39dBm RBW: 10 kHz

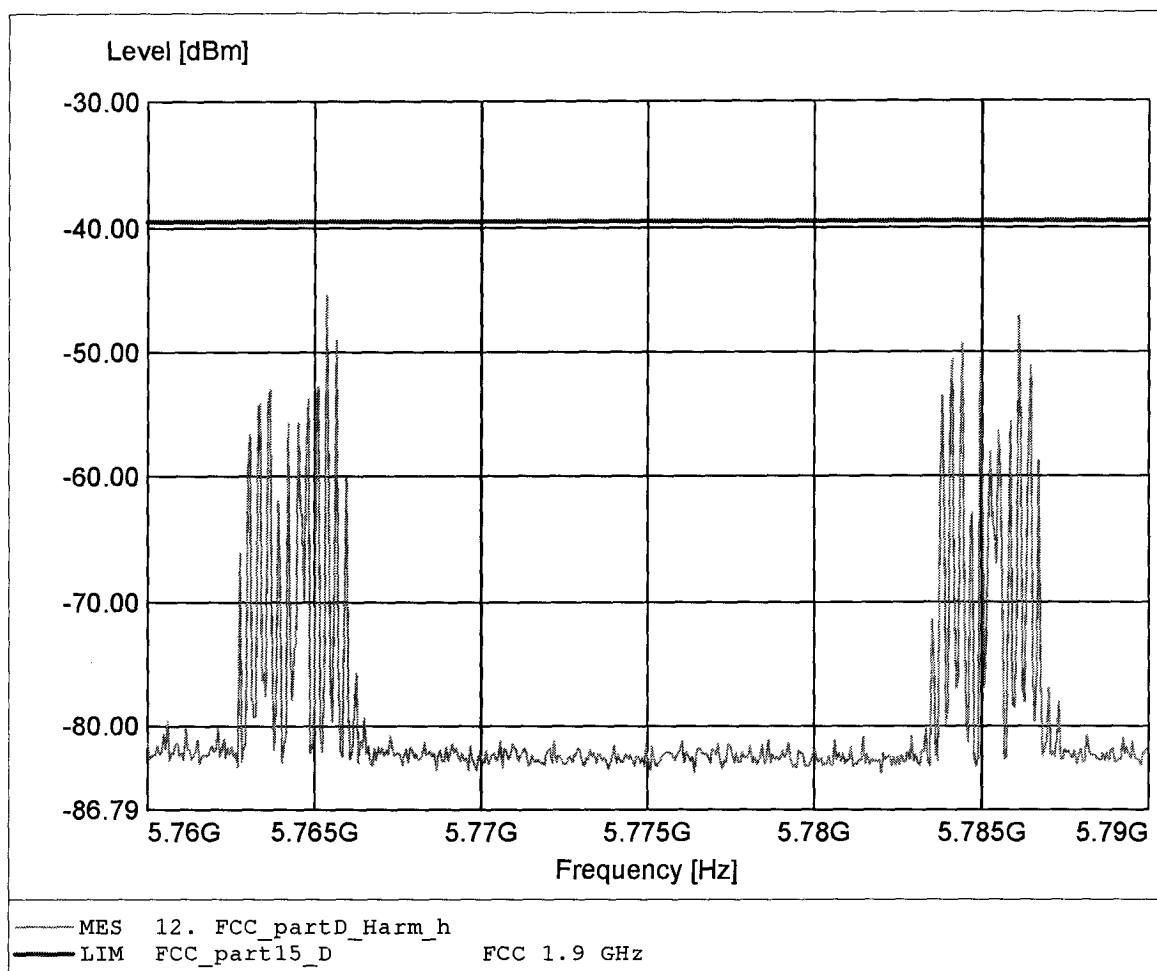

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 5.784GHz Pmax: -44.25dBm RBW: 10 kHz

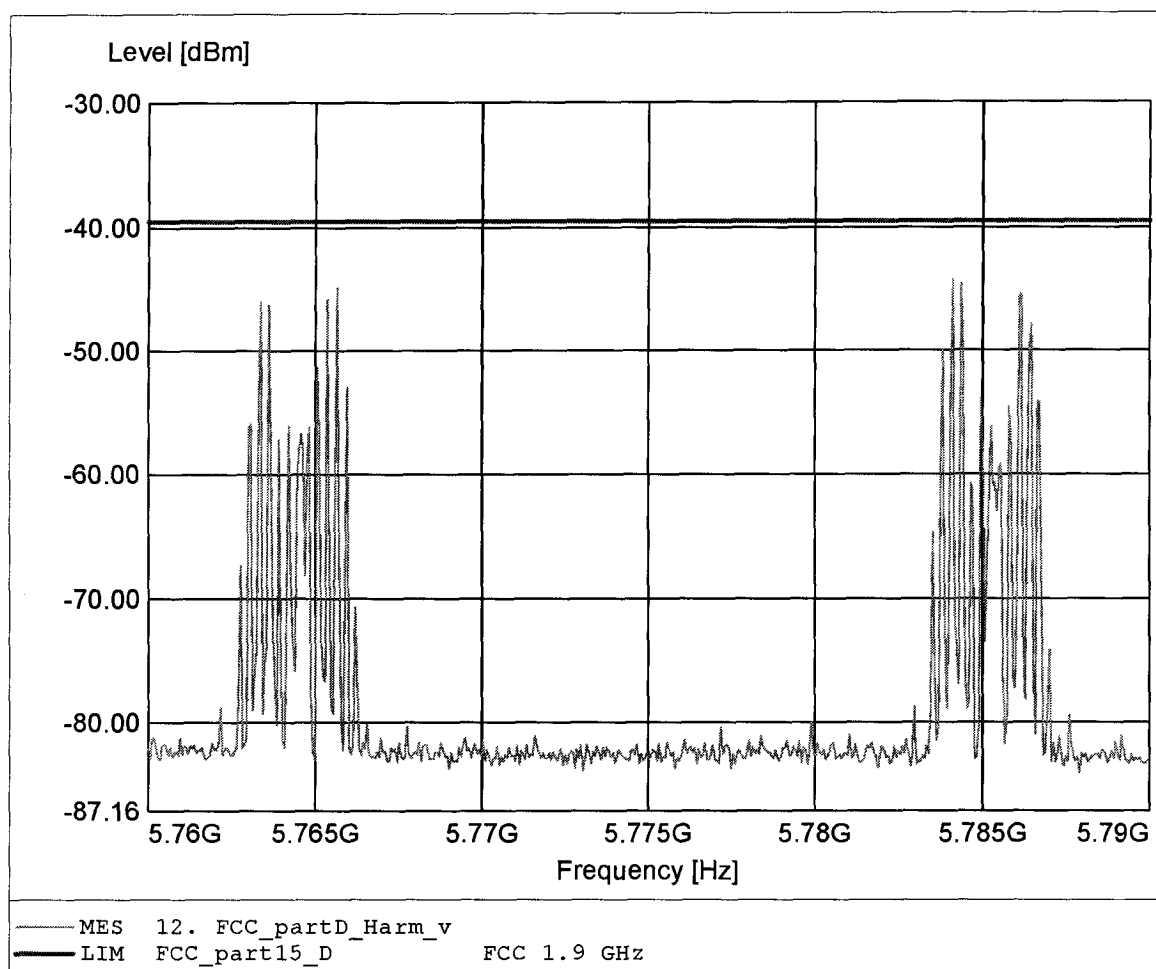

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 7.685GHz Pmax: -60.46dBm RBW: 10 kHz

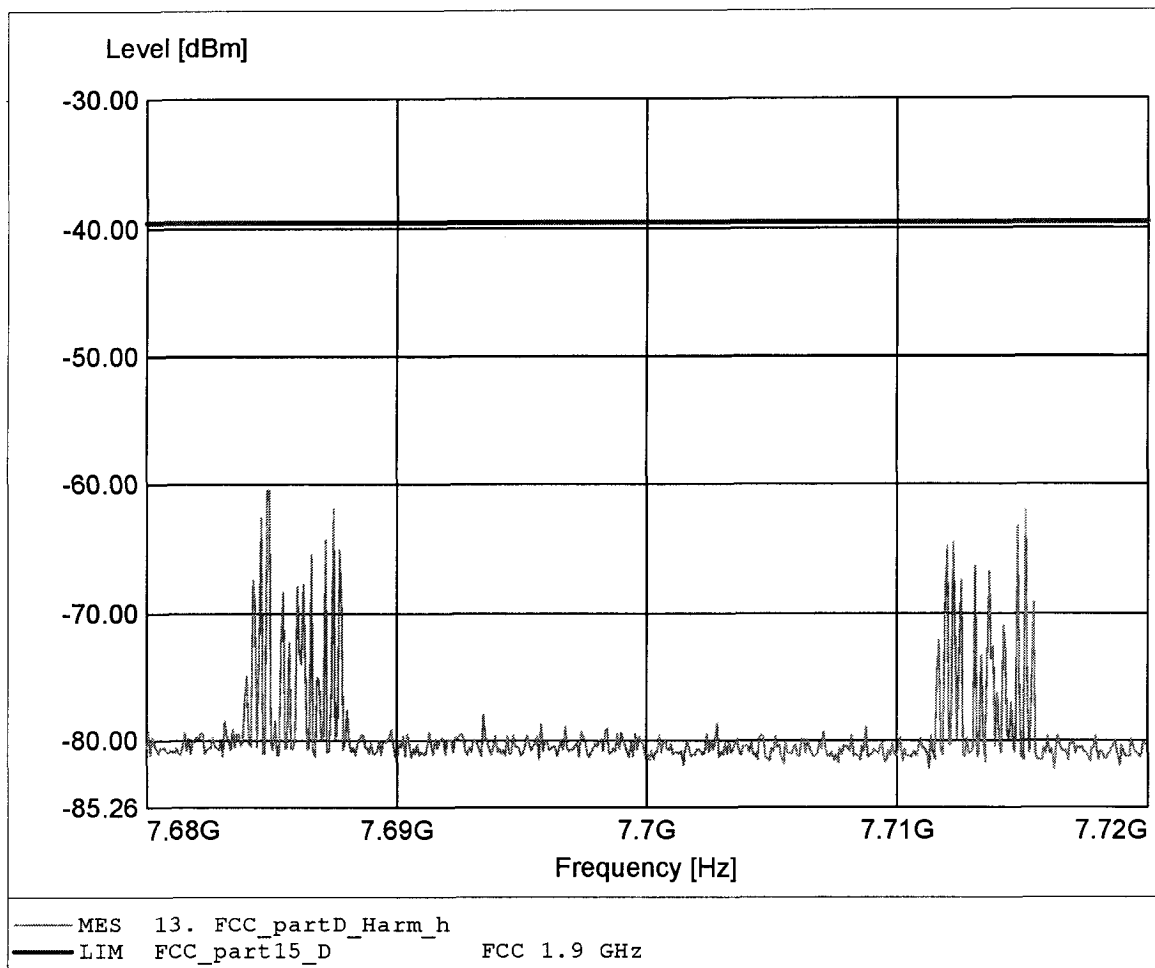

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 7.687GHz Pmax: -55.90dBm RBW: 10 kHz

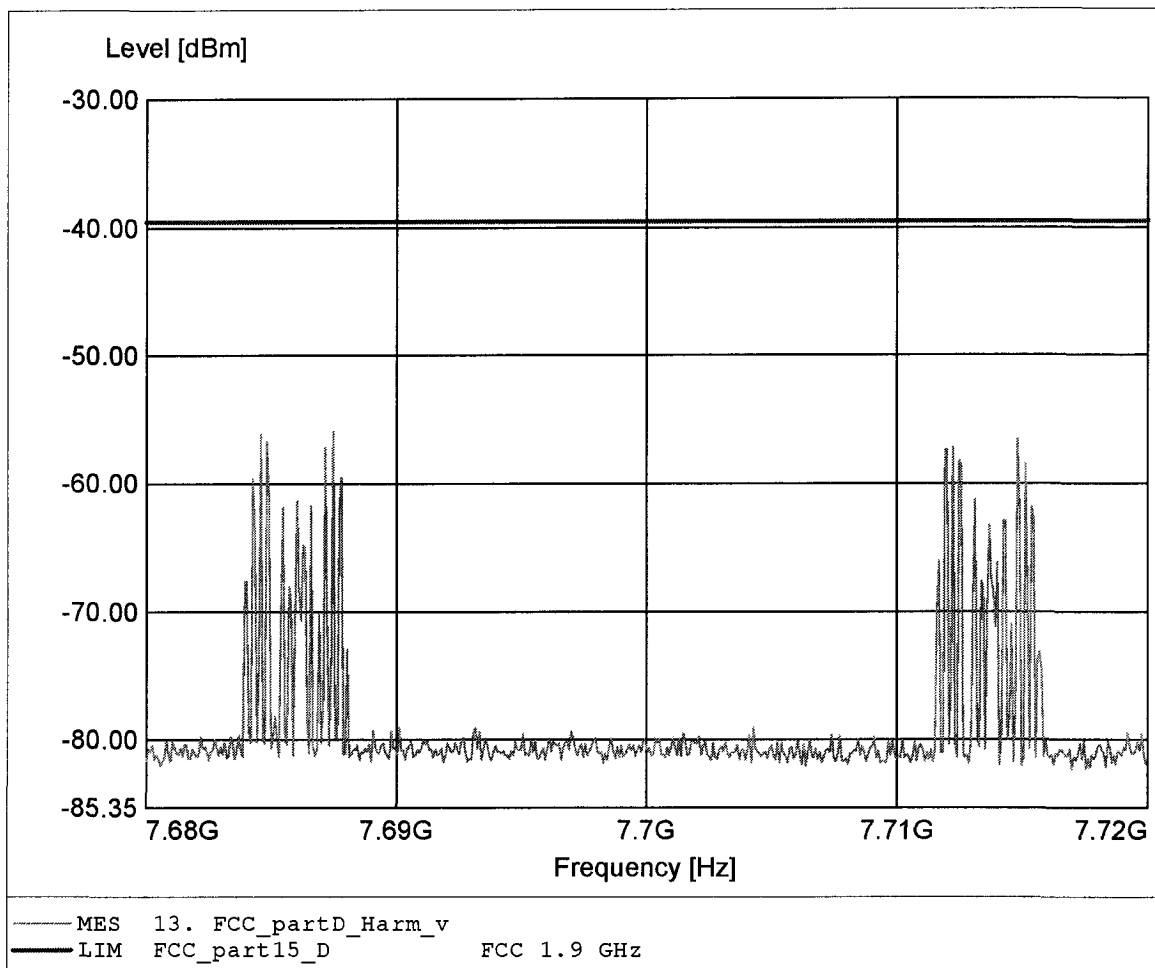

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 9.640GHz Pmax: -53.91dBm RBW: 10 kHz

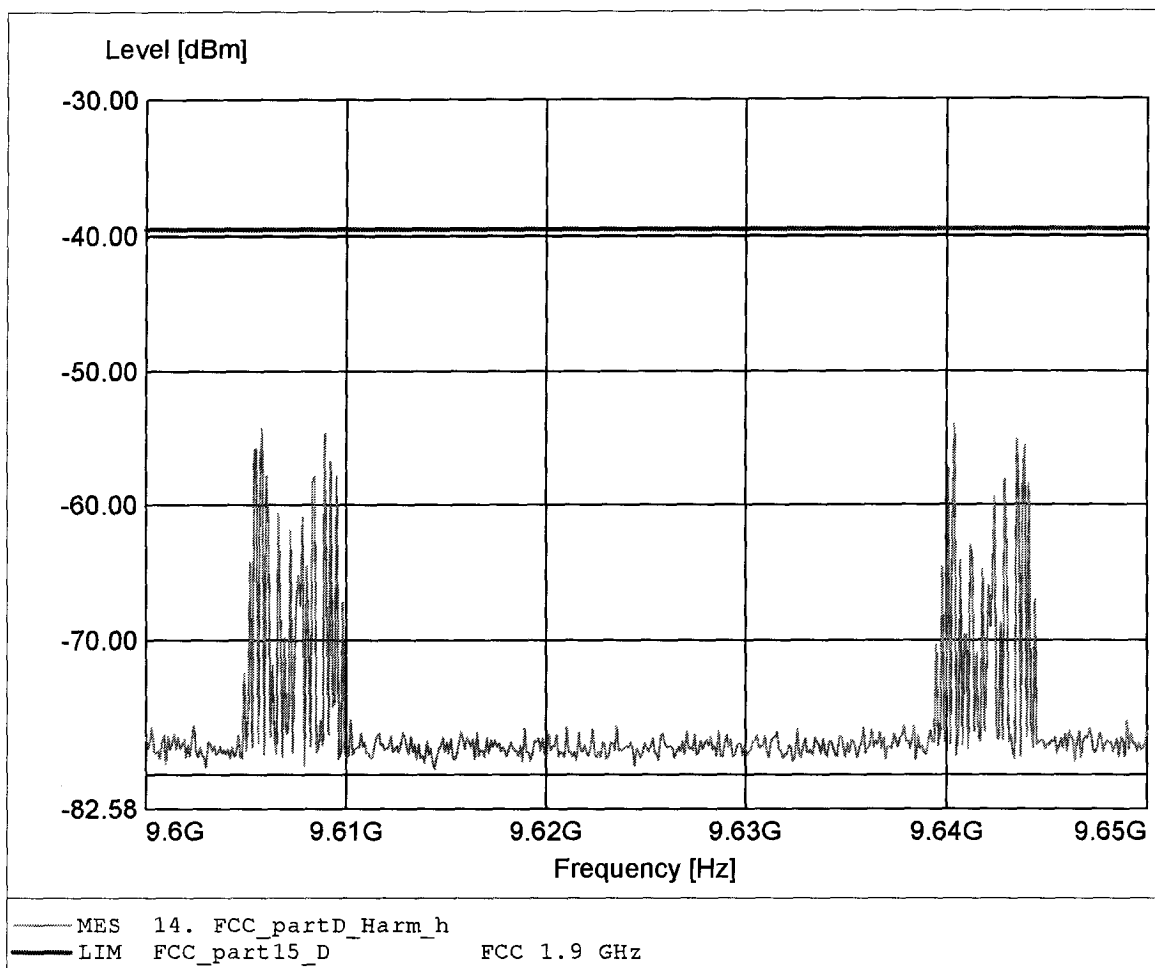

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 9.640GHz Pmax: -44.05dBm RBW: 10 kHz

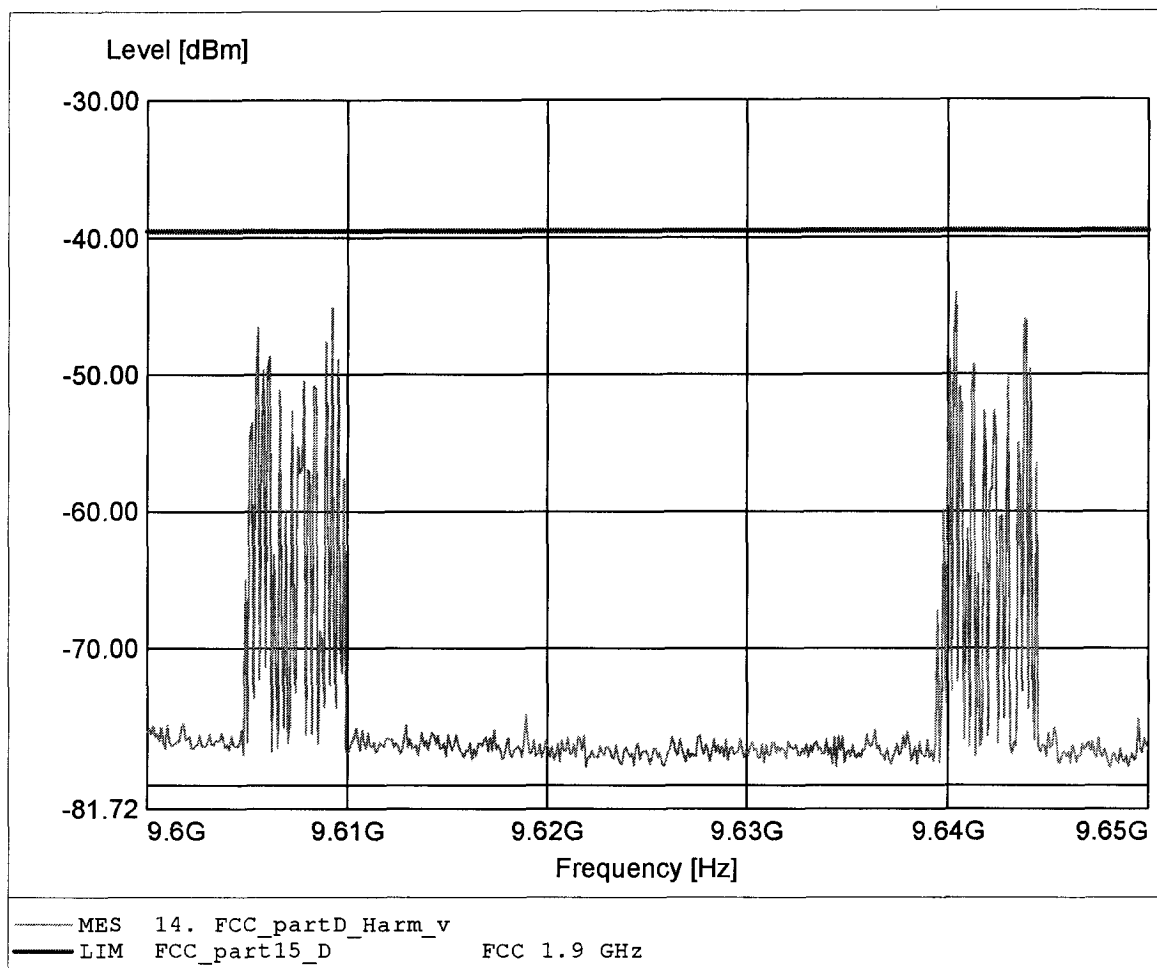

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 11.527GHz Pmax: -43.88dBm RBW: 10 kHz

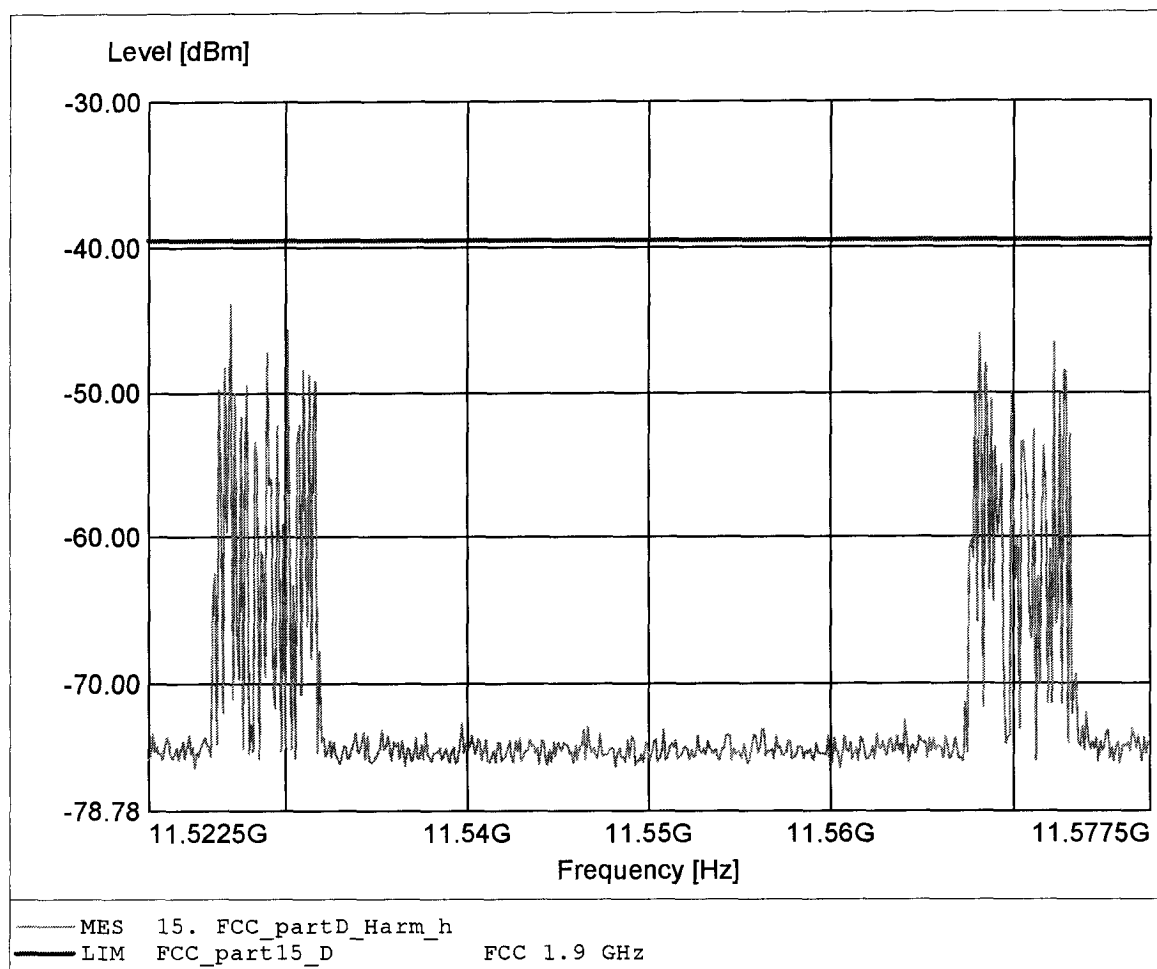

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 11.531GHz Pmax: -41.95dBm RBW: 10 kHz

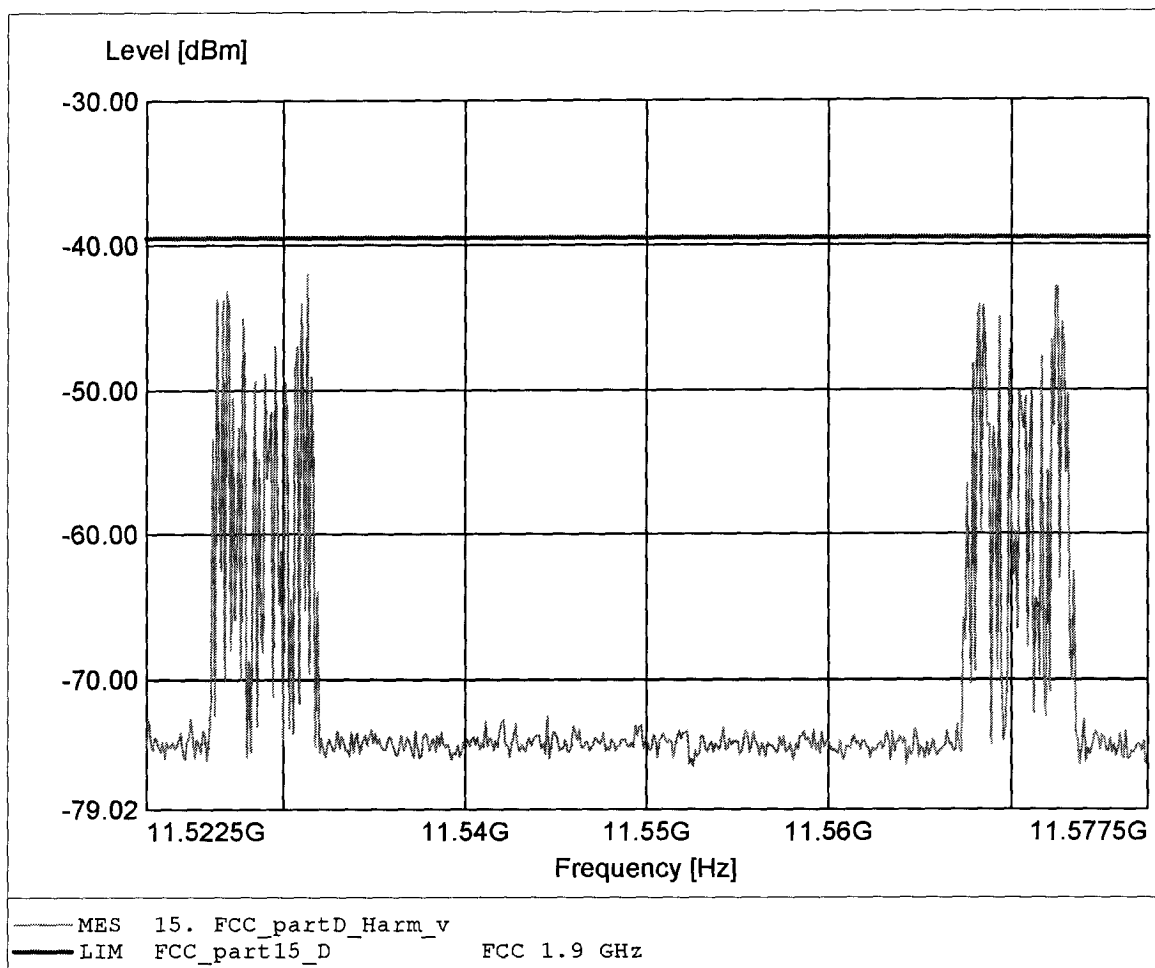

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:13.453GHz Pmax:-52.18dBm RBW:10 kHz

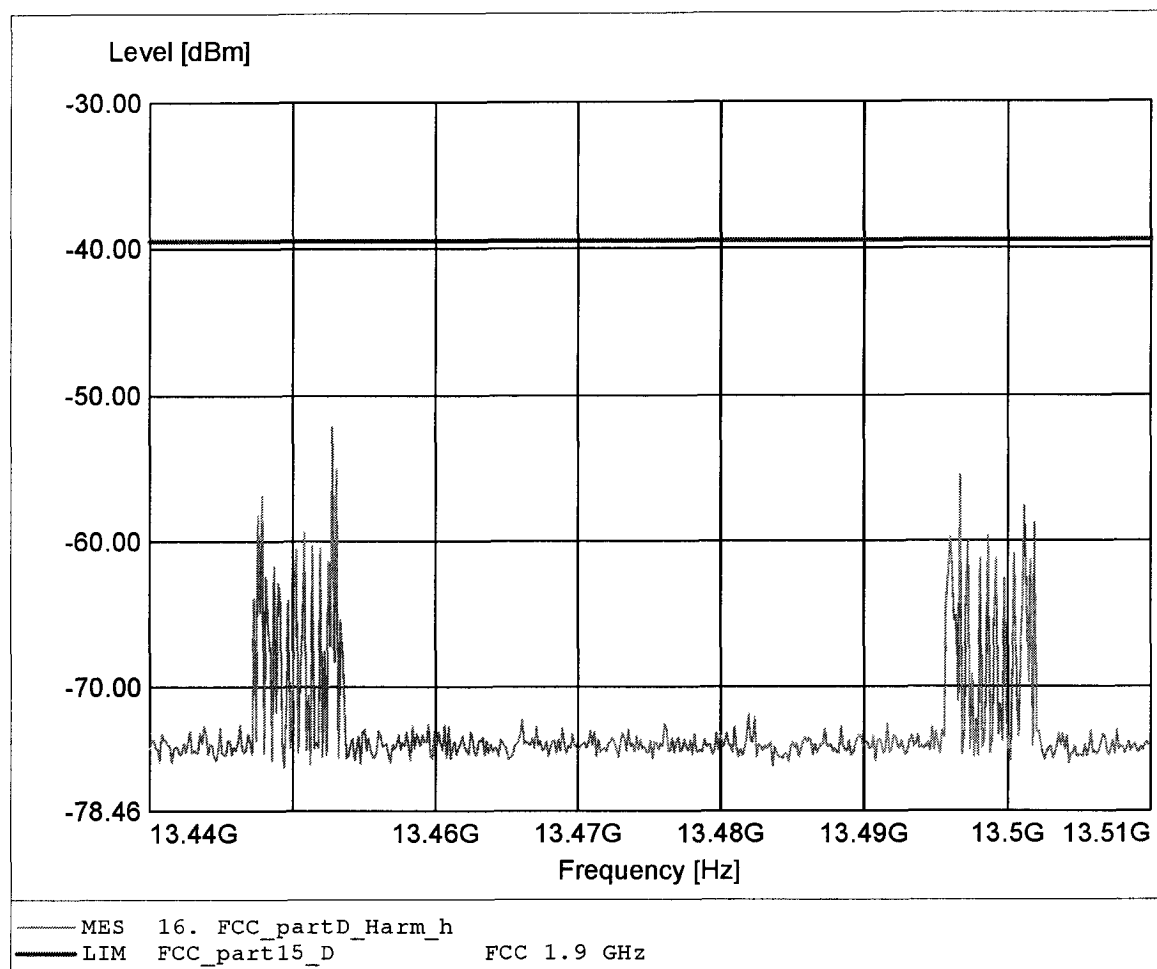

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:13.453GHz Pmax:-50.87dBm RBW:10 kHz

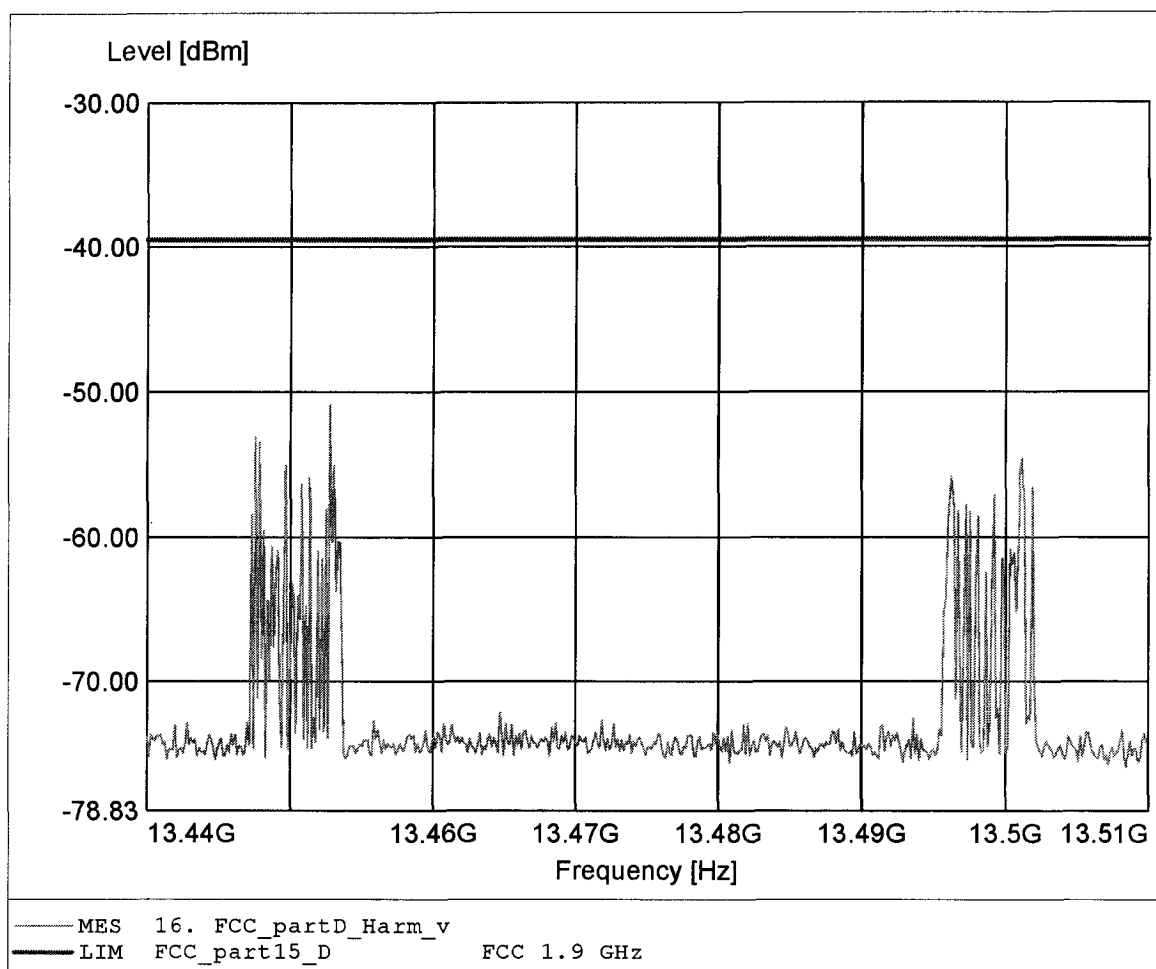

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:15.424GHz Pmax:-64.72dBm RBW:10 kHz

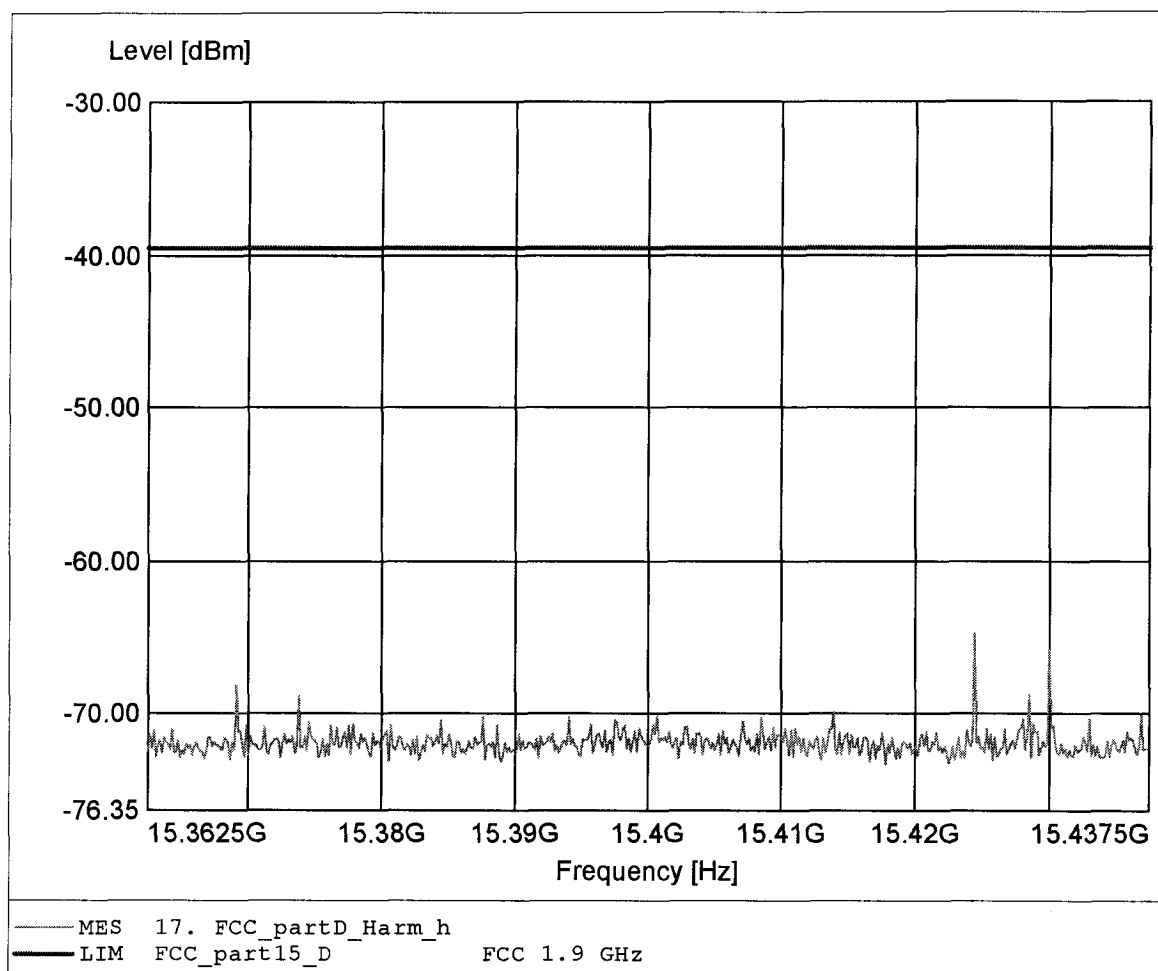

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 15.375GHz Pmax:-64.14dBm RBW:10 kHz

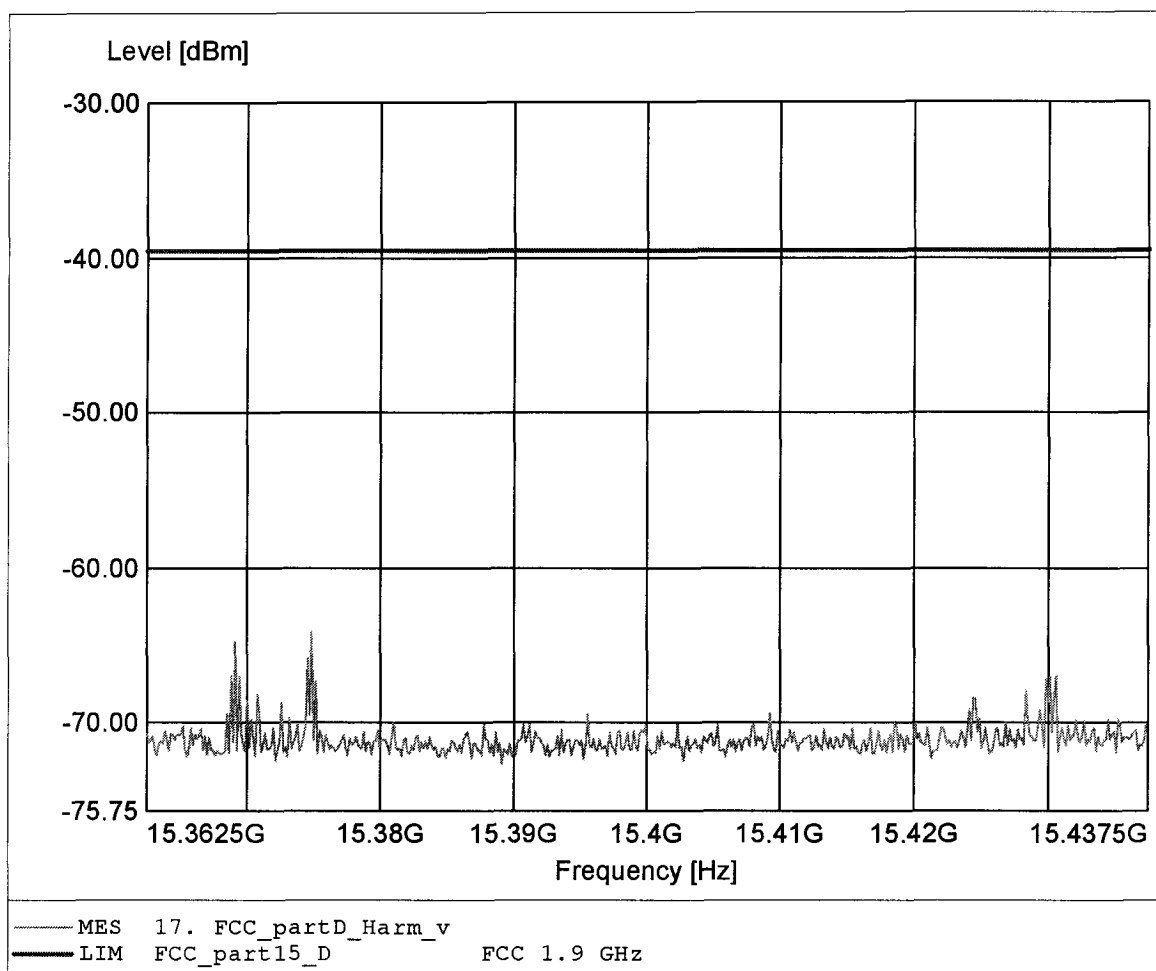

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:17.297GHz Pmax:-61.45dBm RBW:10 kHz

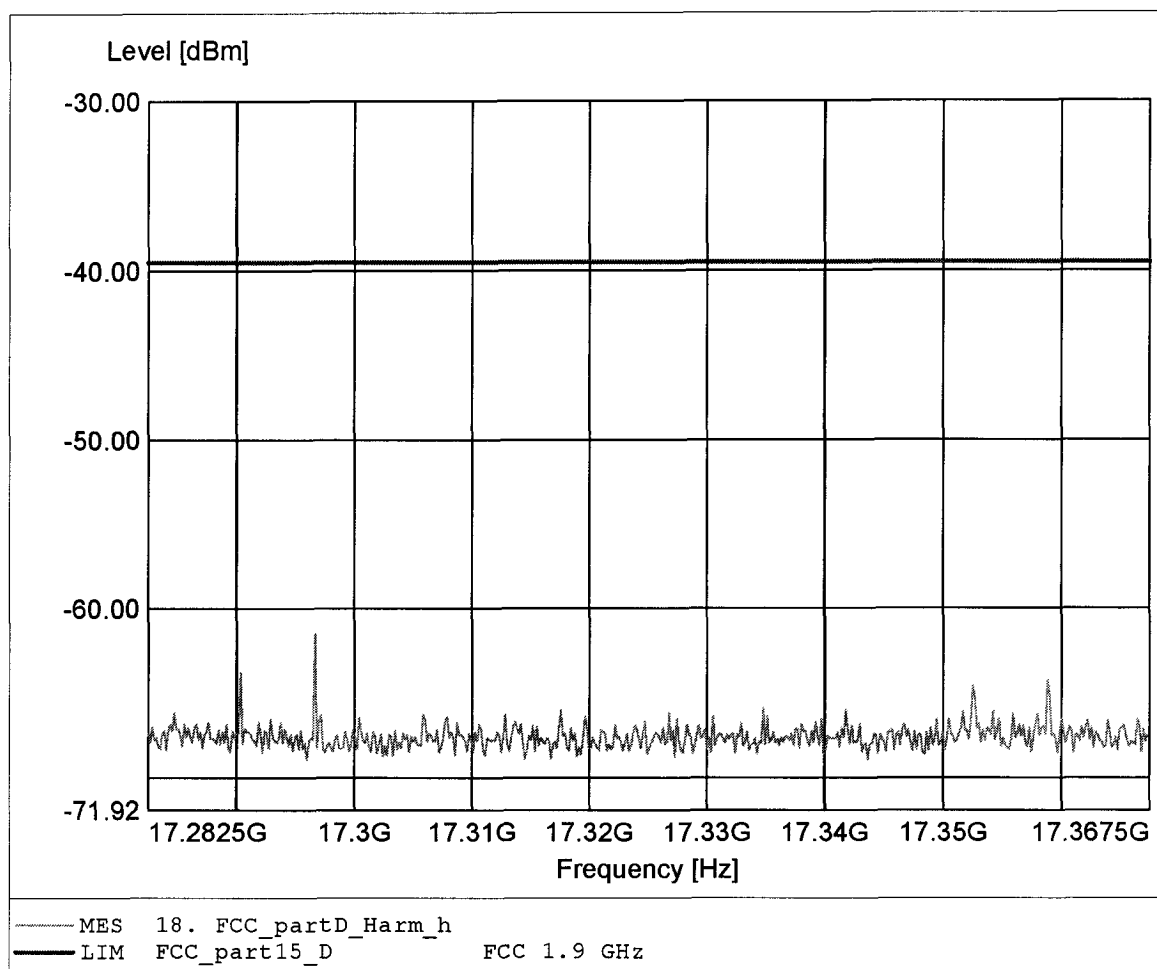

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 17.297GHz Pmax: -61.26dBm RBW: 10 kHz

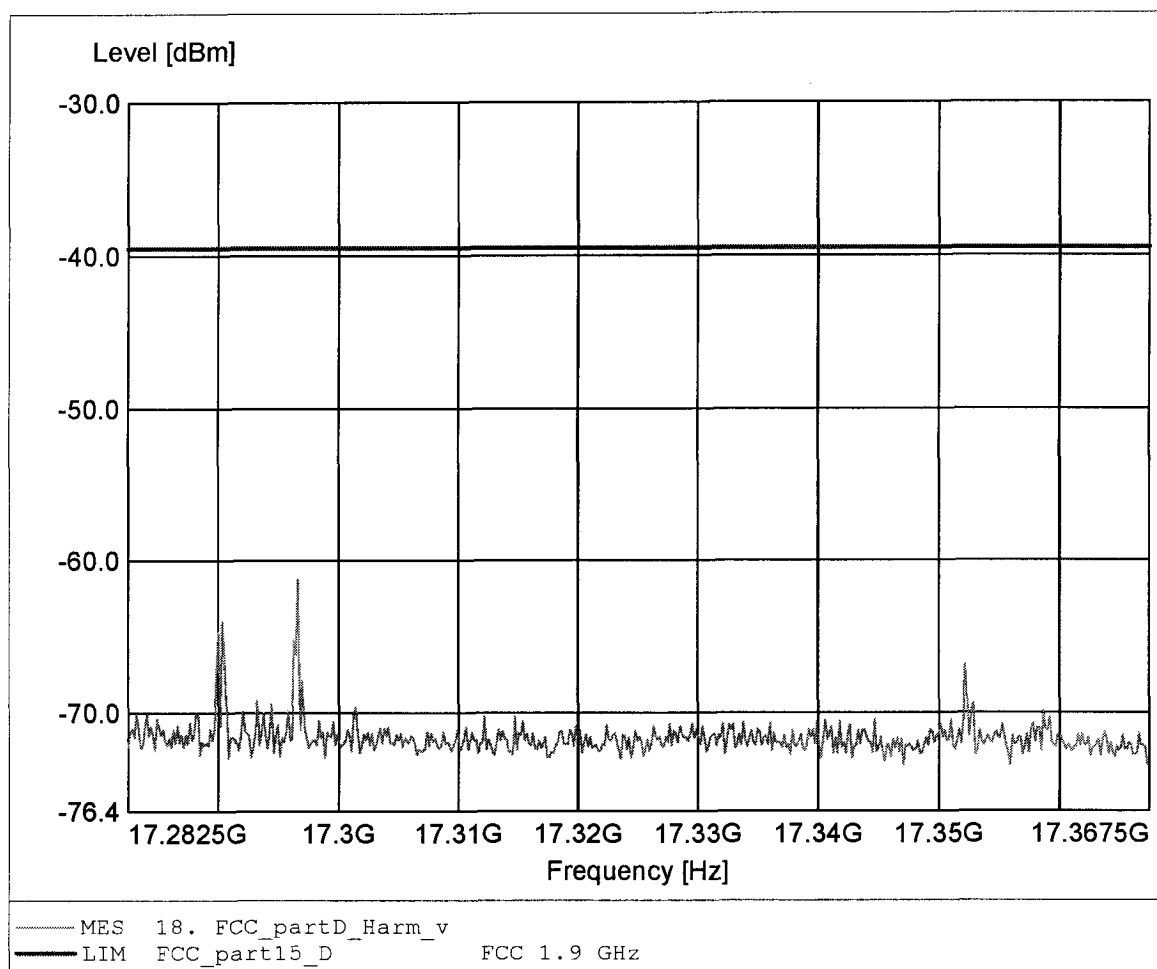

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.293GHz Pmax:-58.00dBm RBW:10 kHz

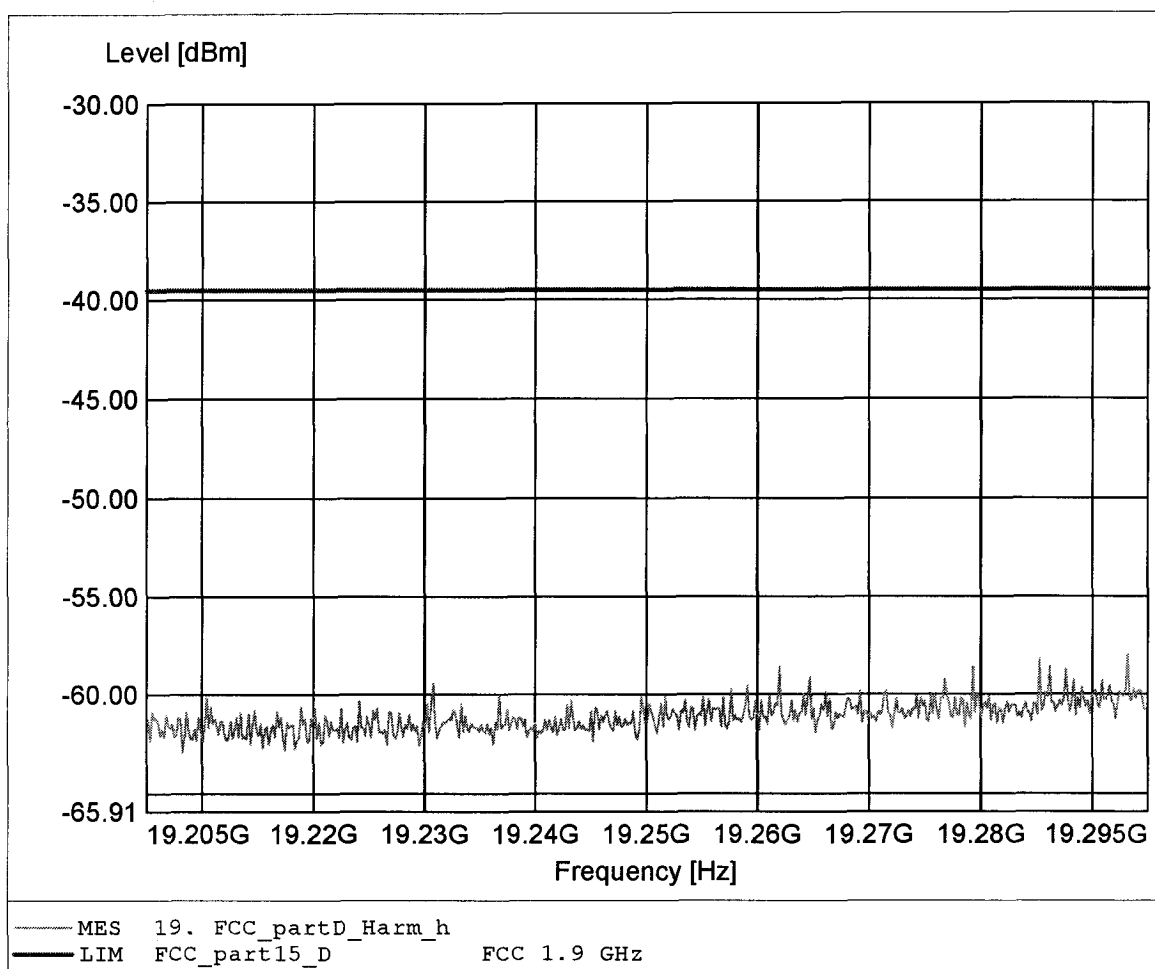

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910 / Ch.: 0/4 / antenna: 2
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.251GHz Pmax:-59.41dBm RBW:10 kHz

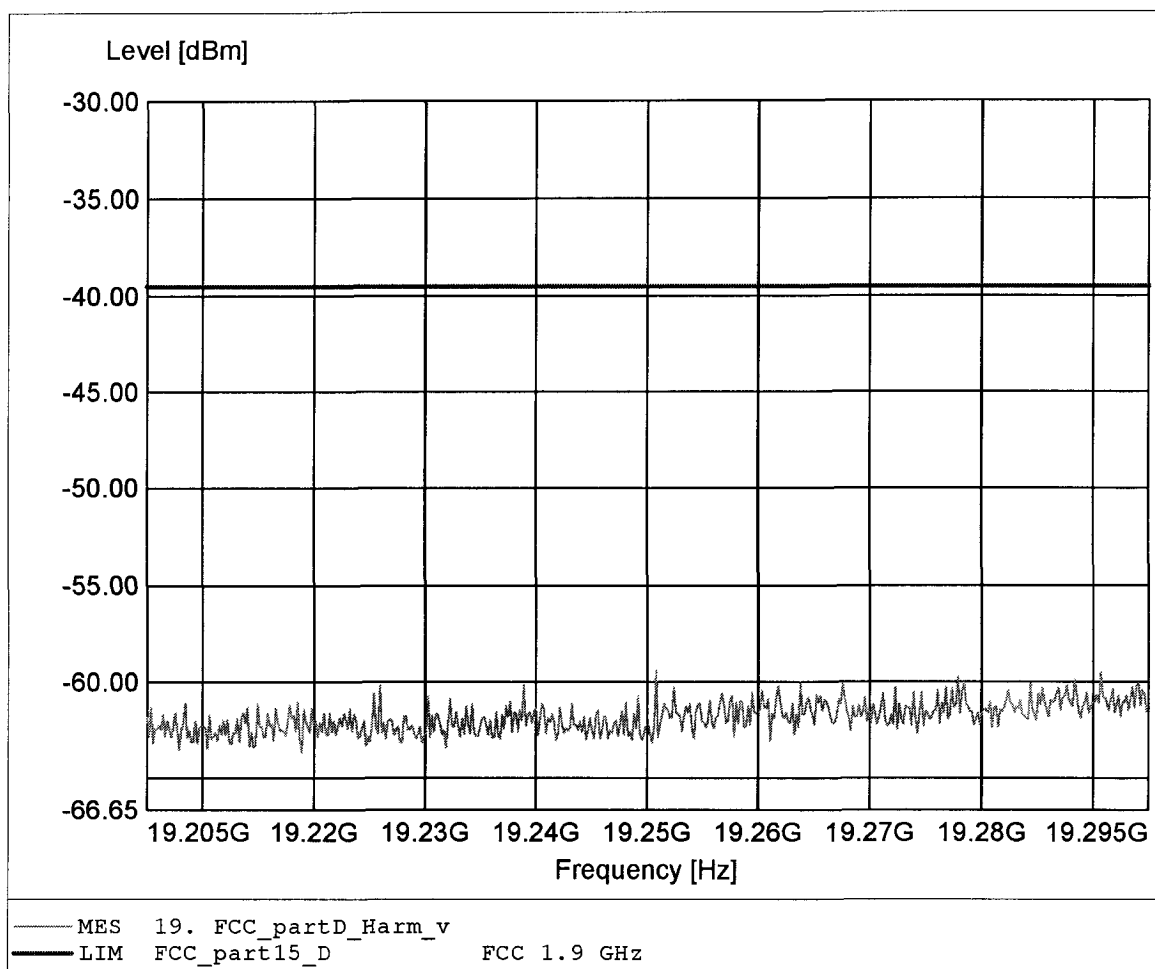

Appendix S

Frame period

FCC Part 15.323(e.1) Frame repetition


Testprocedure ANSI 63.17-1998 6.2.2

UCPS

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.2 Frame repetition

Width of the frequency class	0,000002 Hz
Mean	99,999747 Hz
Deviation	0,000011
Stability in ppm	0,327840 ppm
Test result	Verdict = PASS

Histogram

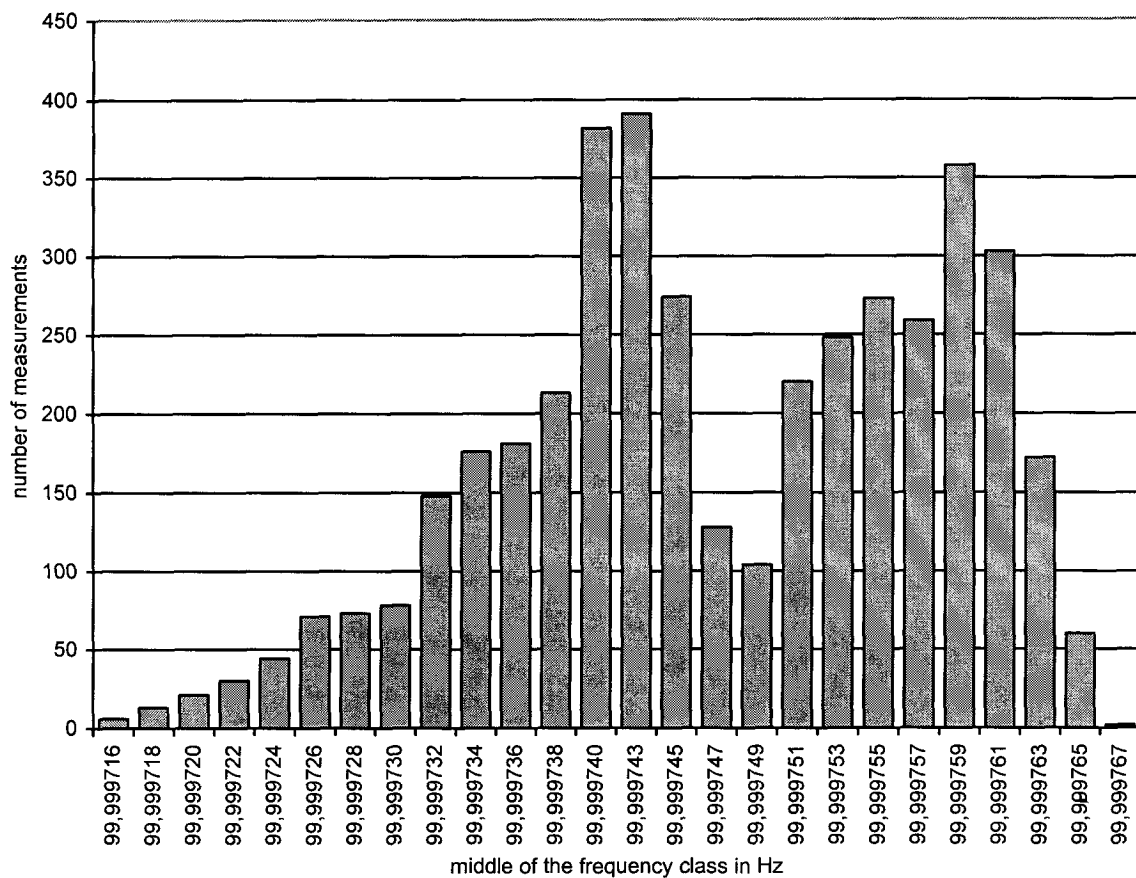

Measurement diagram

FCC Part 15.323(e.4) Frame Period and jitter


Testprocedure ANSI 63.17-1998 6.2.3

UCPS

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.3 Frame Period and jitter

Width of the time class	0,006407 μ s
Mean	9,999104 ms
Deviation	0,000031
Max-Min	0,160187 μ s
Test result	Verdict = PASS

Histogram

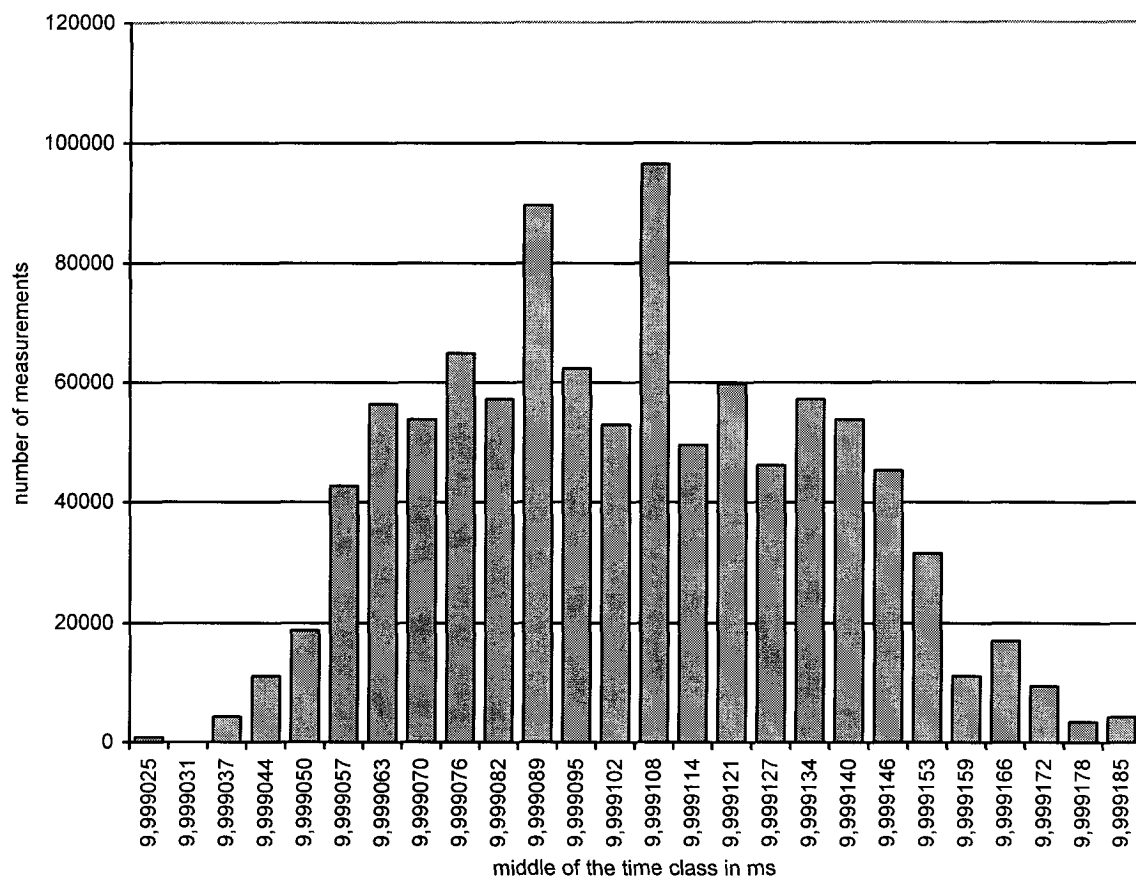

Measurement diagram

Appendix T

Frequency stability

FCC Part 15.323(f) Frequency Stability


Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	25 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability

Power supply	Vnom
Frequency of carrier	1924,992603 MHz
Measured mean	1924,992603 MHz
Stability (supply temp)	reference

Stability over time	fmax : 3,26 ppm fmin : 4,06 ppm
Result	Verdict = PASS

Histogram

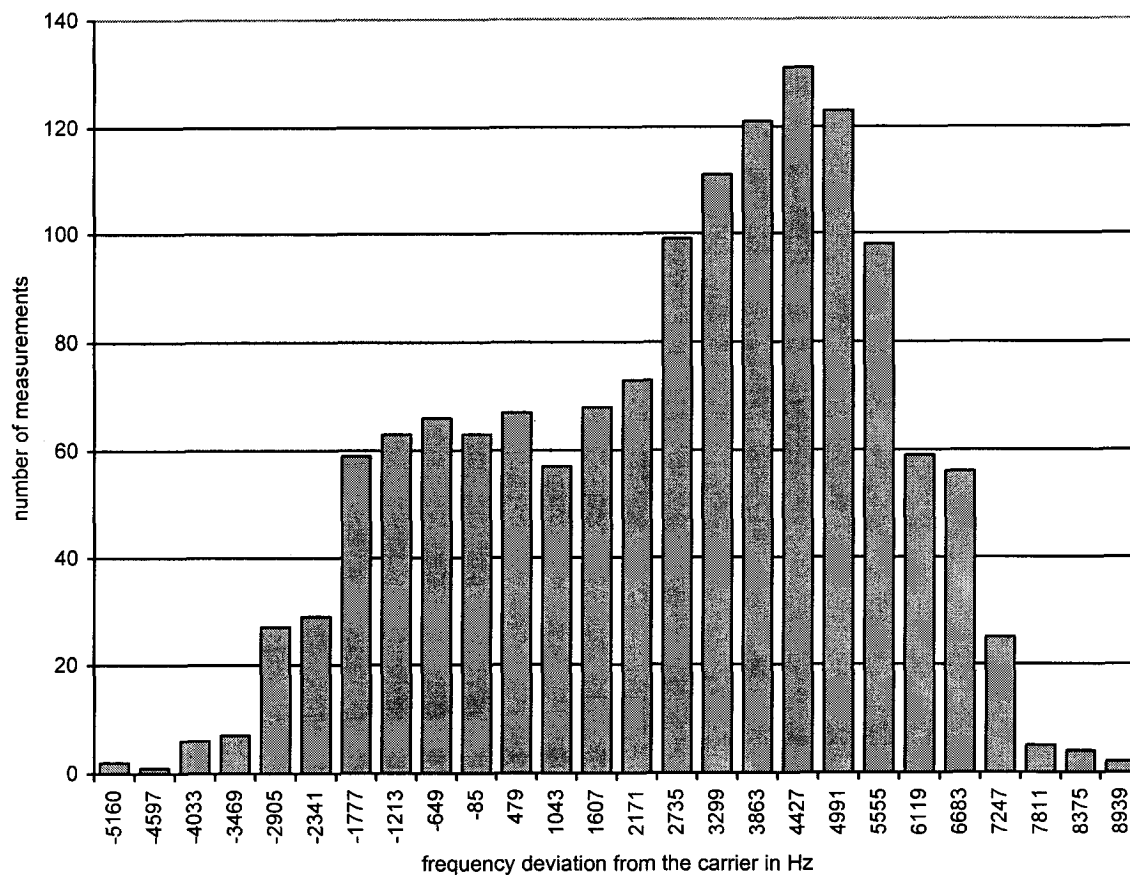


Measurement diagram

FCC Part 15.323(f) Frequency Stability

Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	25 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability
Power supply	Vmin
Frequency of carrier	1924,992603 MHz
Measured mean	1924,999826 MHz
Stability (supply temp)	-1,88 ppm
Result	Verdict = PASS
Stability over time	fmax : 3,36 ppm fmin : 4,59 ppm
Result	Verdict = PASS

Histogram

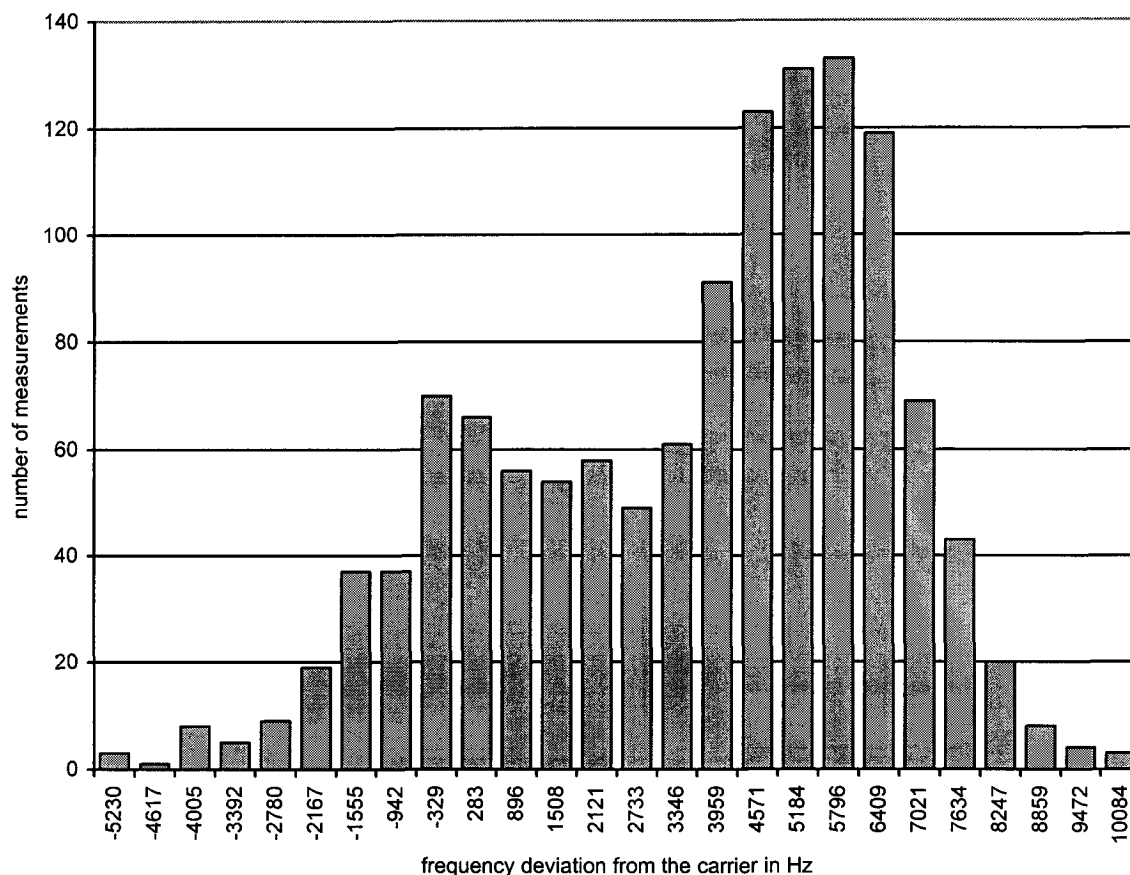


Measurement diagram

FCC Part 15.323(f) Frequency Stability

Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	25 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability
Power supply	Vmax
Frequency of carrier	1924,992603 MHz
Measured mean	1924,990580 MHz
Stability (supply temp)	-1,64 ppm
Result	Verdict = PASS
Stability over time	fmax : 3,99 ppm fmin : 4,43 ppm
Result	Verdict = PASS

Histogram

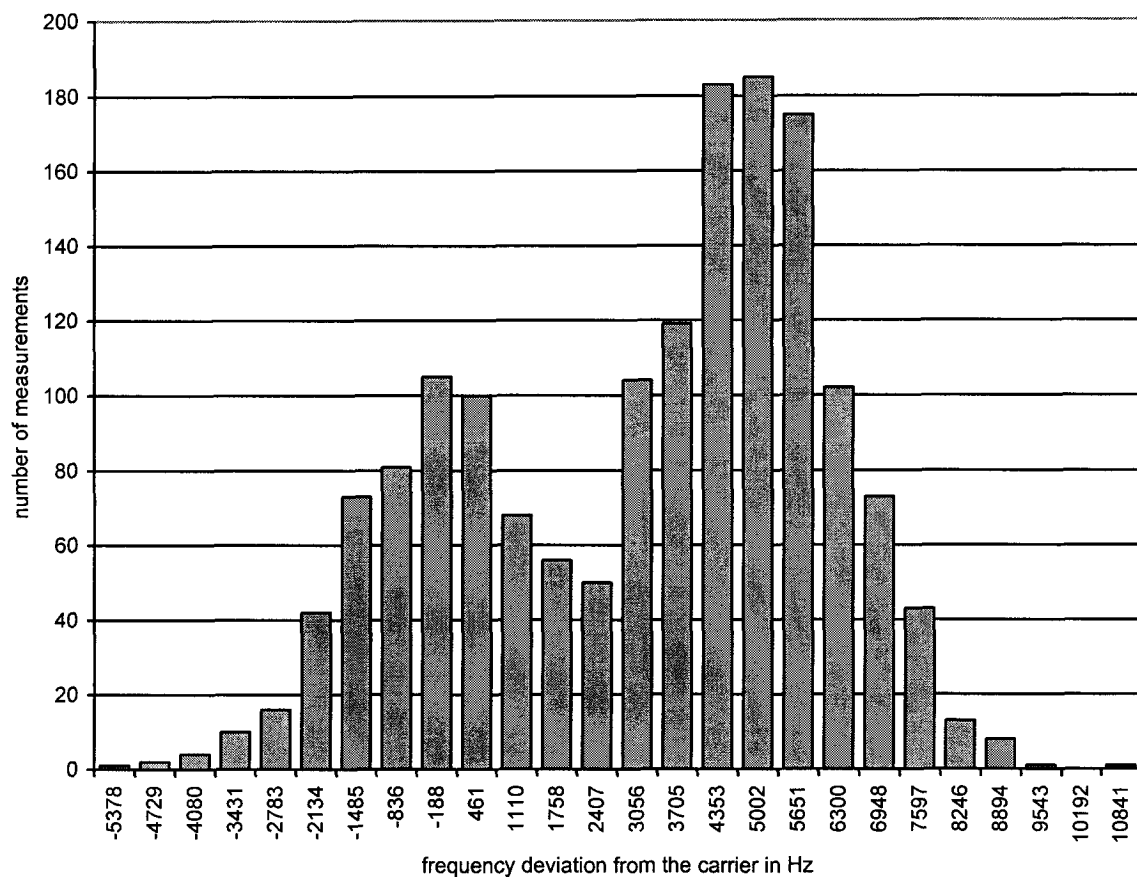


Measurement diagram

FCC Part 15.323(f) Frequency Stability

Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	0 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability
Power supply	Vnom
Frequency of carrier	1924,992603 MHz
Measured mean	1925,008057 MHz
Stability (supply temp)	-8,03 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,35 ppm fmin : 8,03 ppm
Result	Verdict = PASS

Histogram

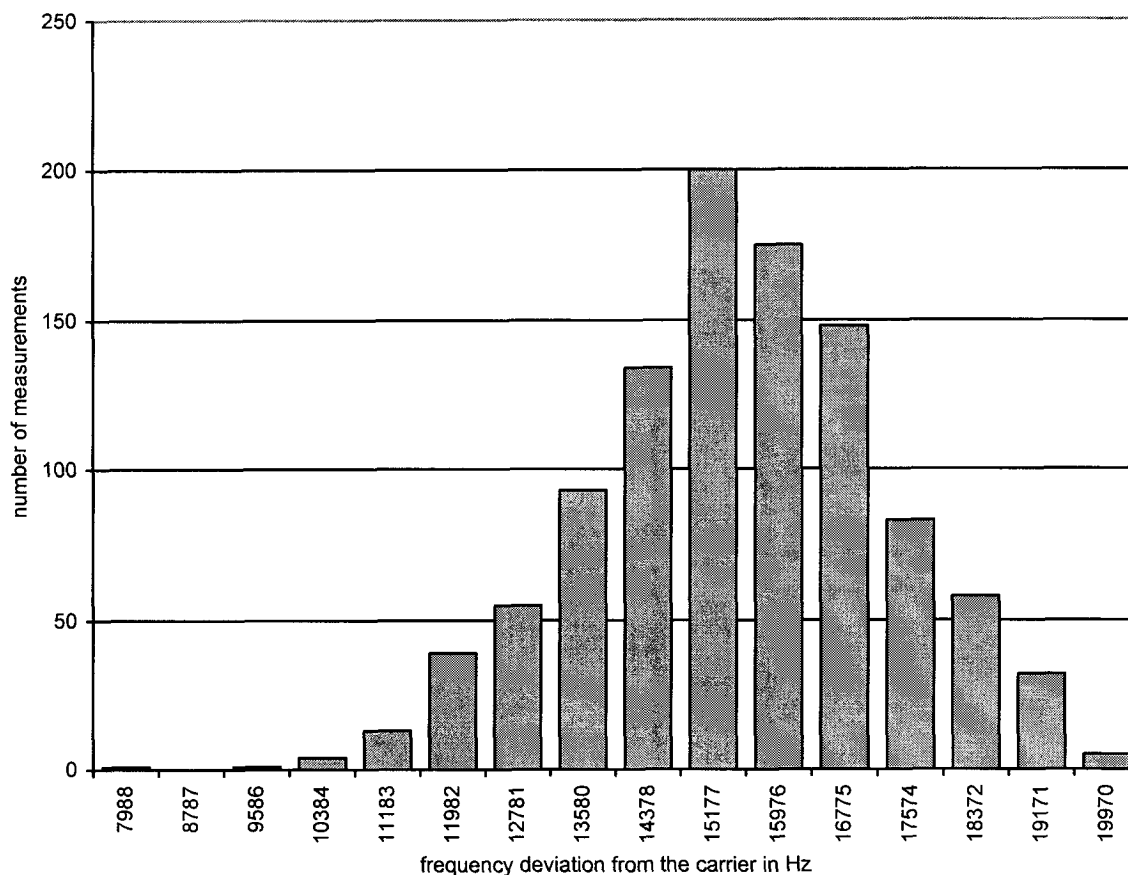


Measurement diagram

FCC Part 15.323(f) Frequency Stability

Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2910 Fixed Part
Applicant	Teledex LLC
Temperature	40 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability
Power supply	Vnom
Frequency of carrier	1924,992603 MHz
Measured mean	1924,998212 MHz
Stability (supply temp)	-1,04 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,25 ppm fmin : 4,15 ppm
Result	Verdict = PASS

Histogram

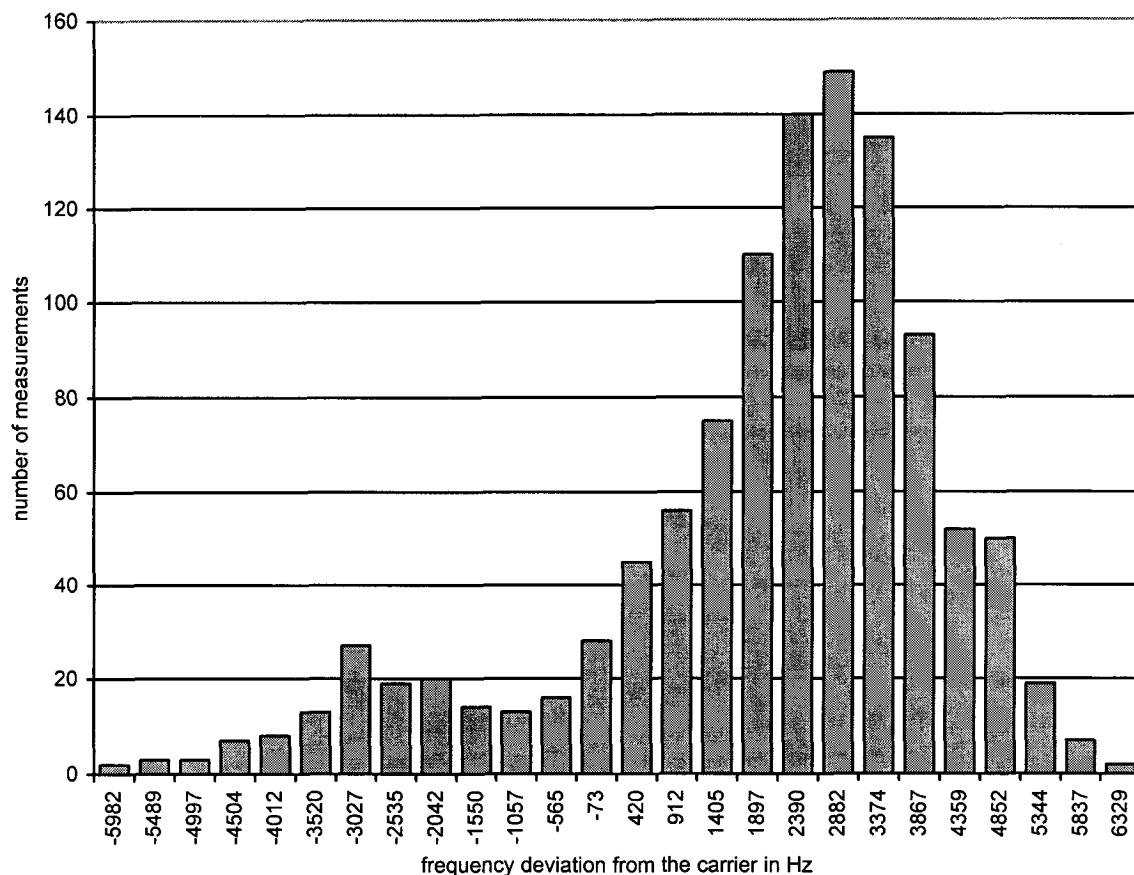

Measurement diagram


Appendix U

Receiver spurious emissions

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:197.275MHz Emax:36.65dBuV/m RBW: 100 kHz

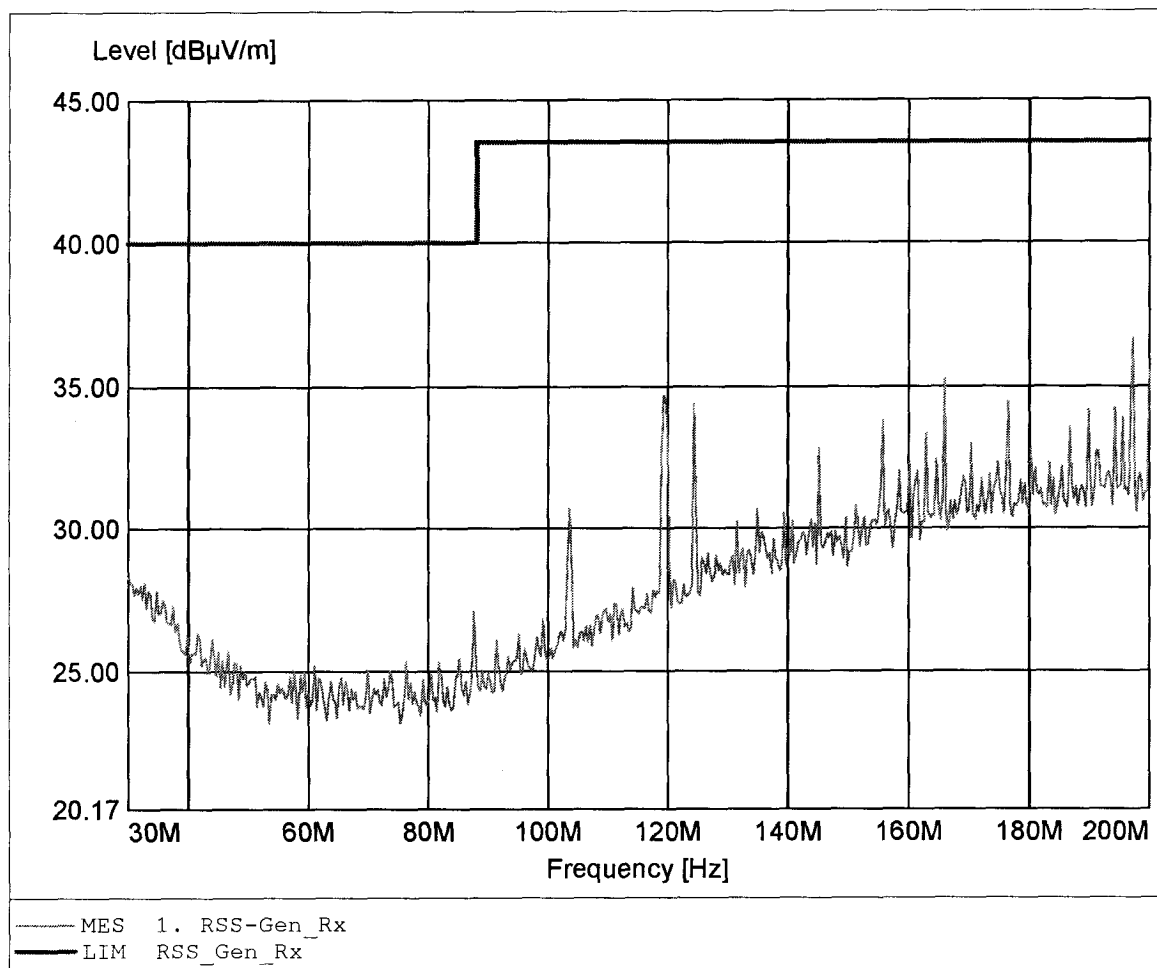

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:124.369MHz Emax:38.71dBµV/m RBW: 100 kHz

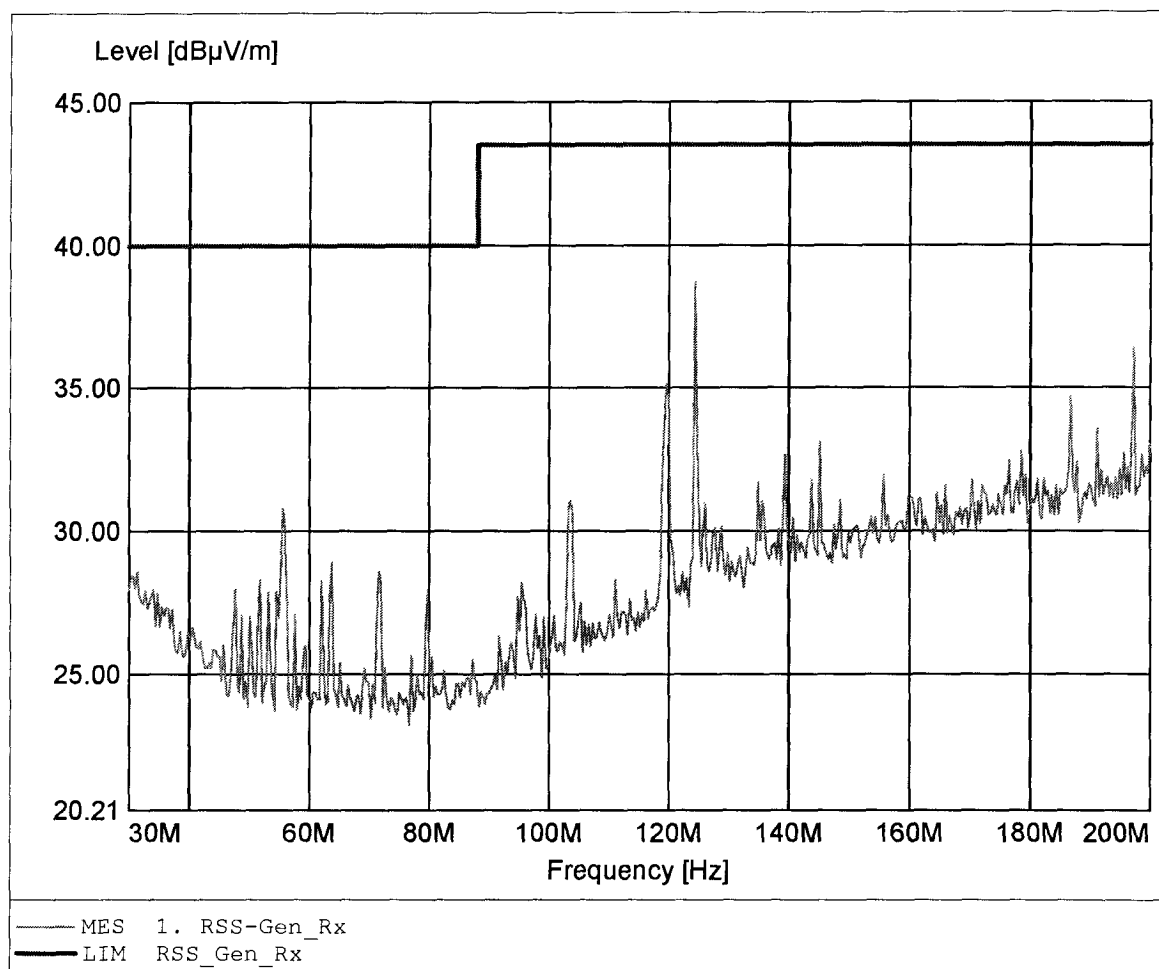

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 238.477MHz Emax: 34.36dBµV/m RBW: 100 kHz

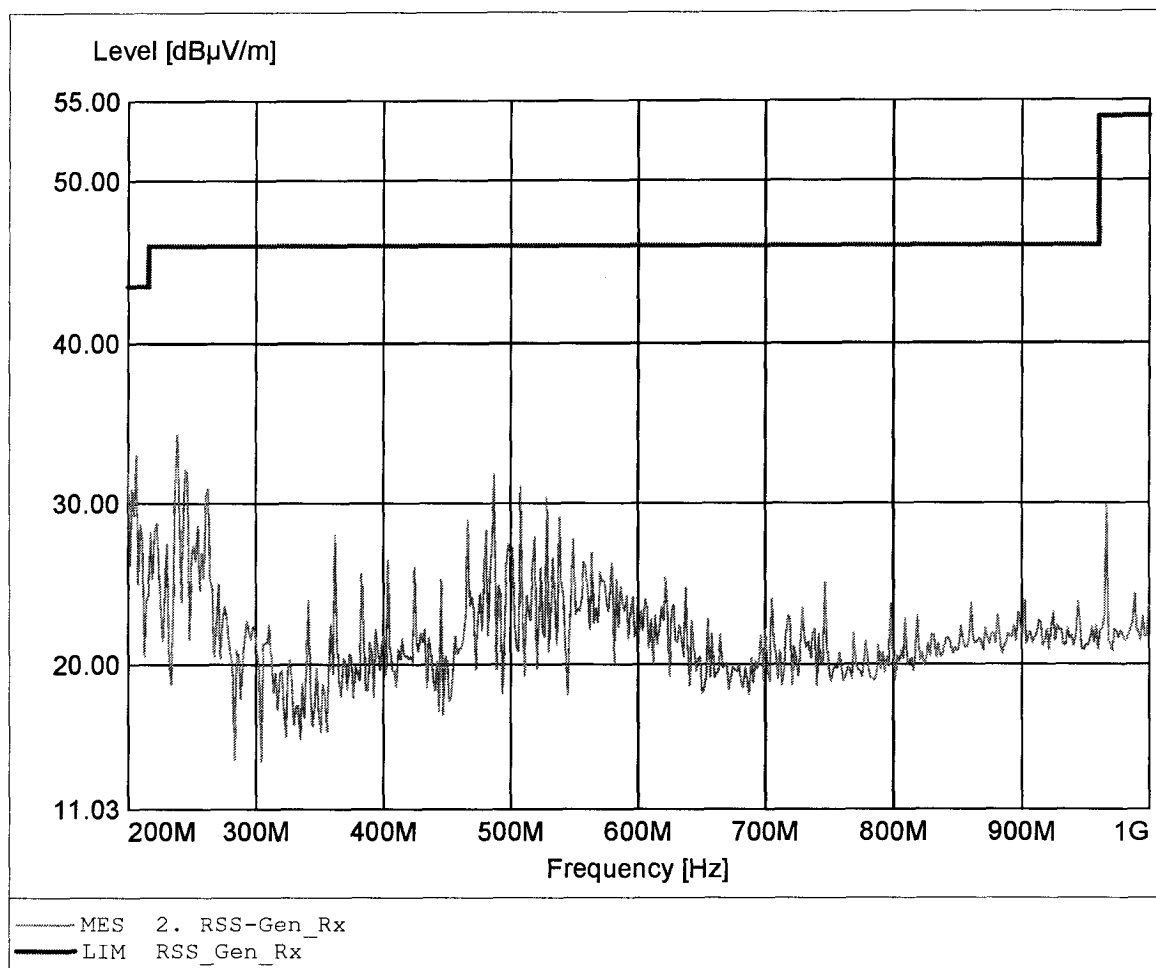

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:200.000MHz Emax:27.94dBµV/m RBW: 100 kHz

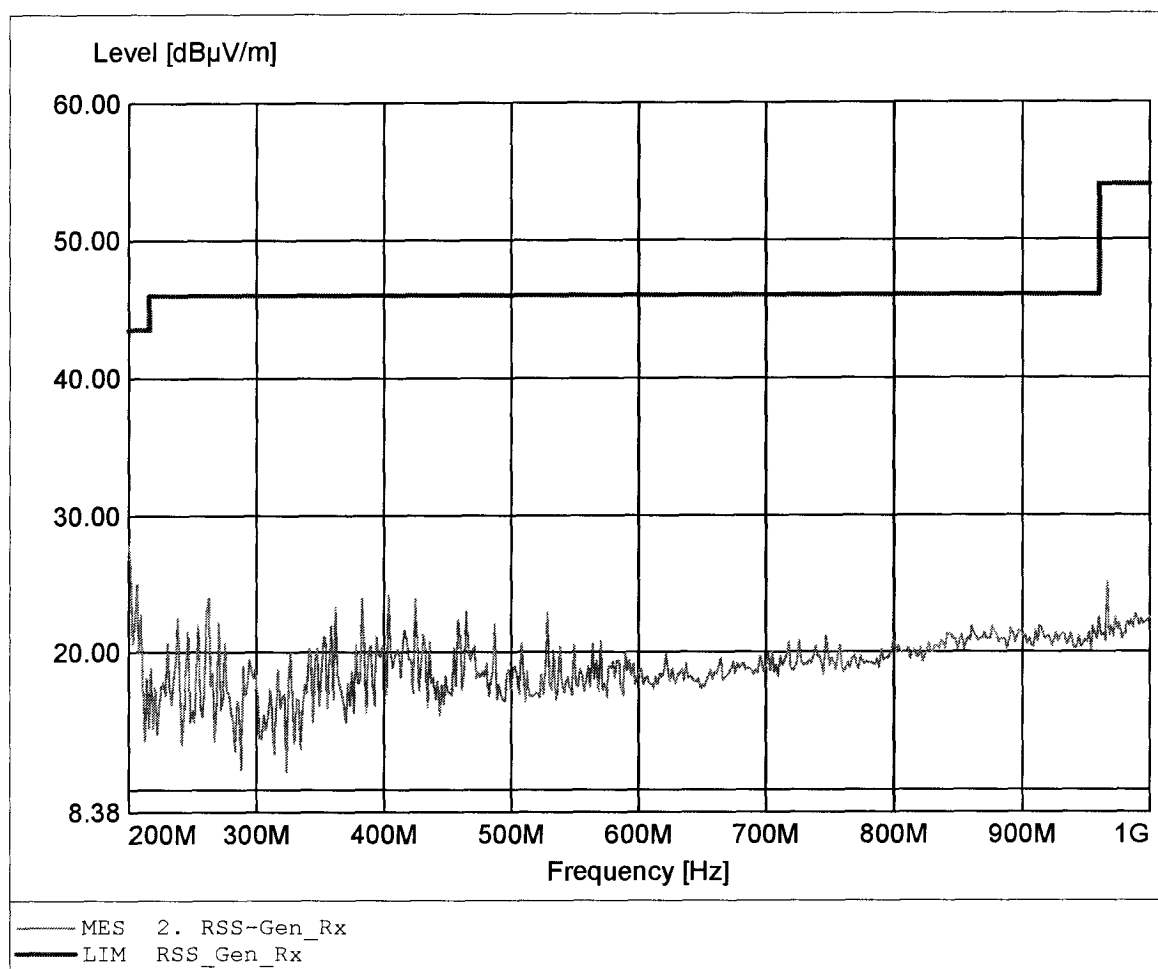

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:3.826GHz Emax:43.27dBμV/m RBW: 1 MHz

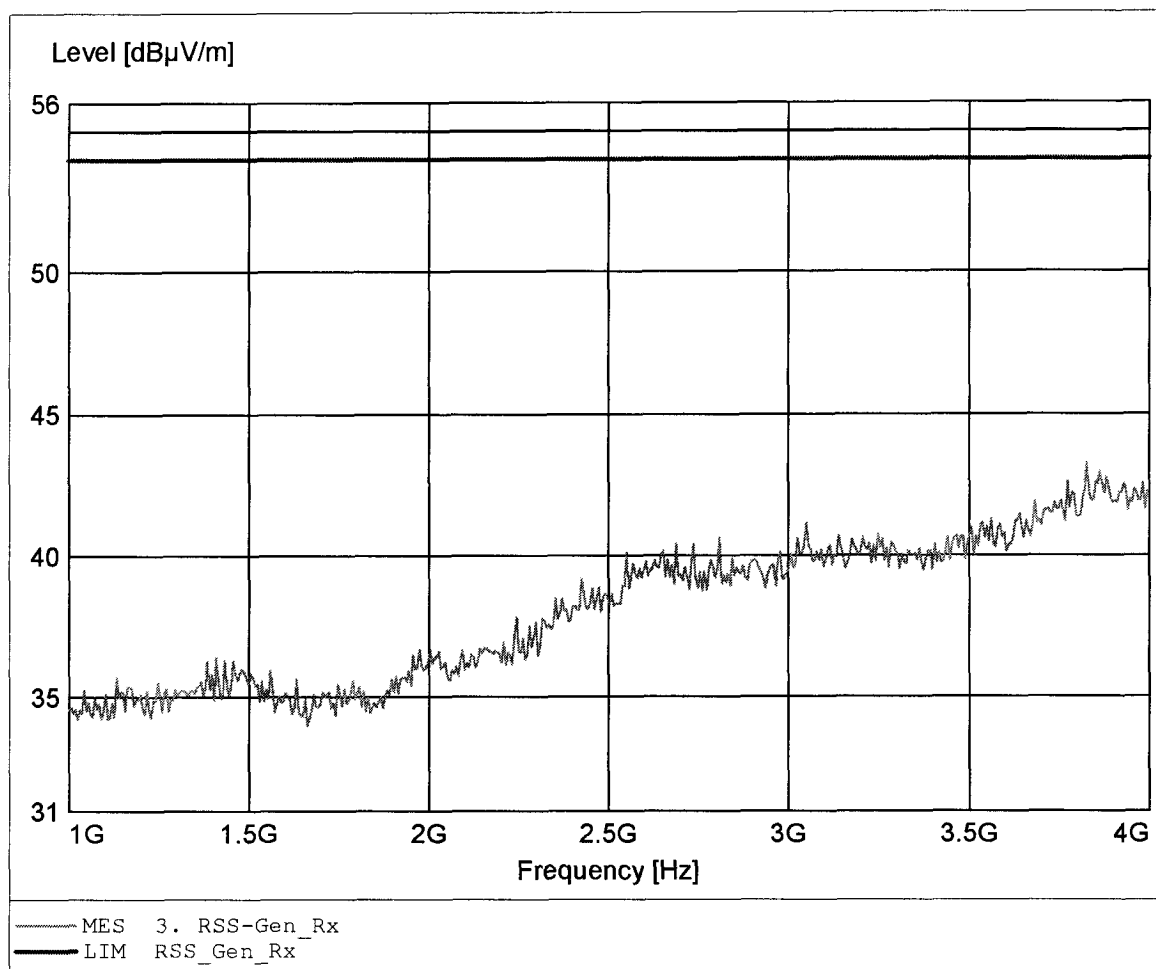

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:3.868GHz Emax:43.43dBμV/m RBW: 1 MHz

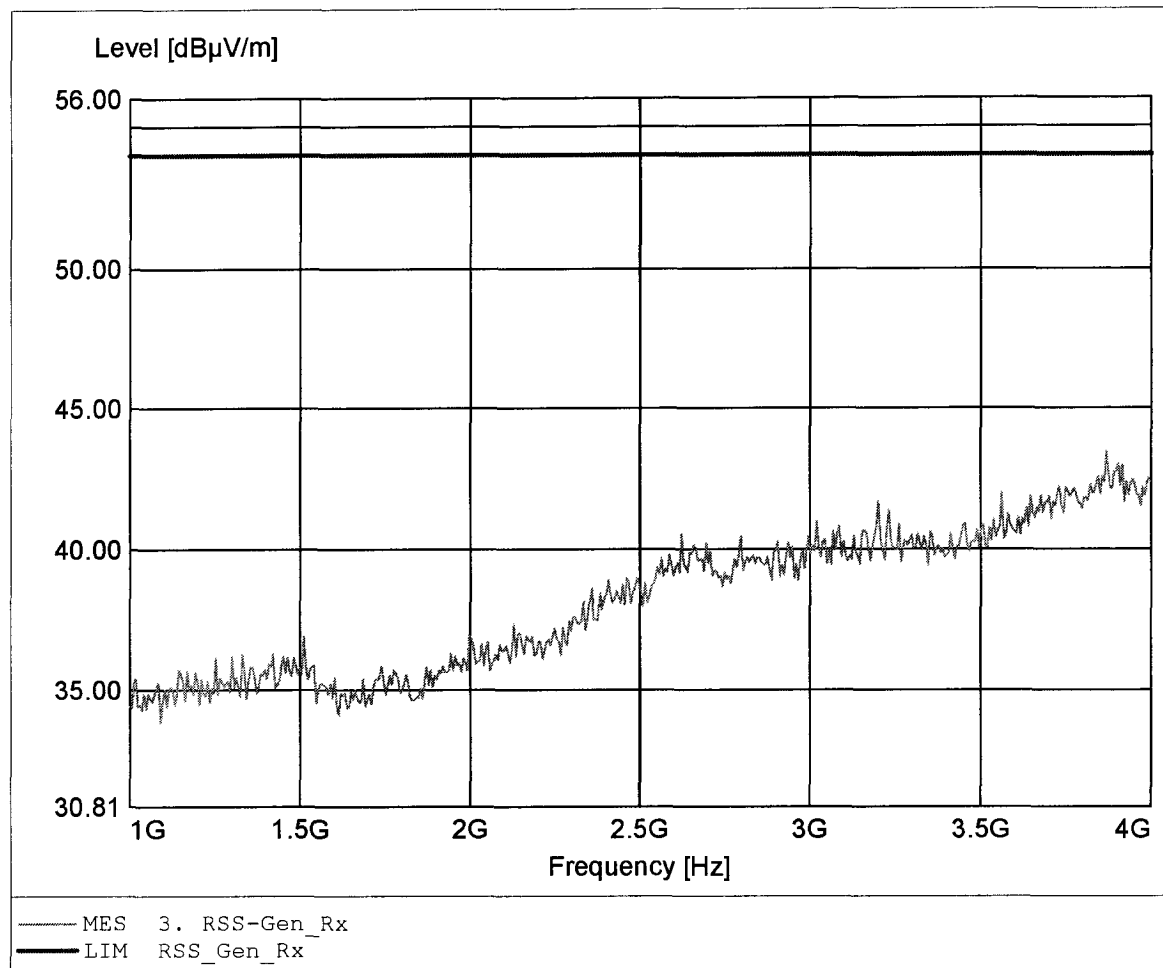

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq: 7.984GHz Emax: 43.03dB μ V/m RBW: 1 MHz

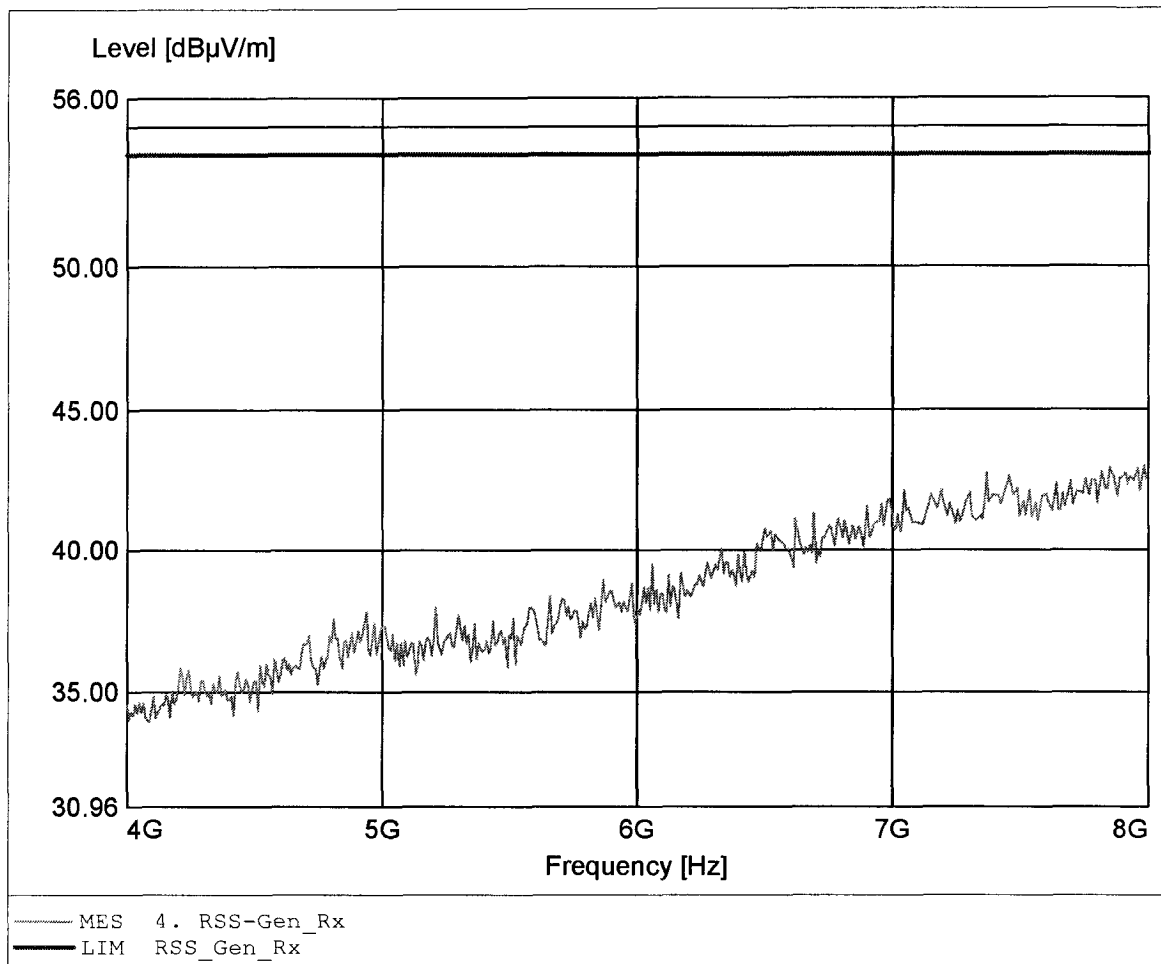

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:7.984GHz Emax:42.98dBμV/m RBW: 1 MHz

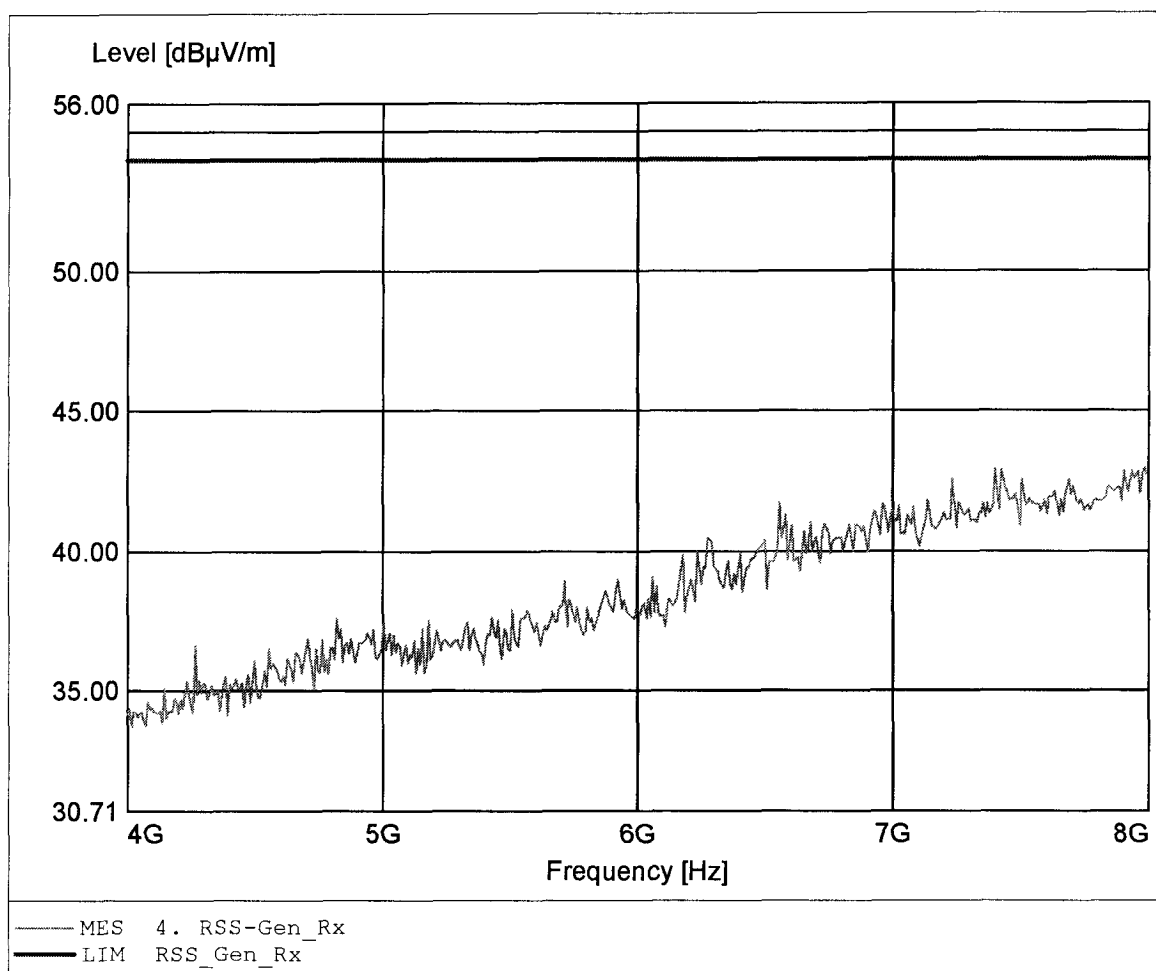

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:11.038GHz Emax:41.10dBμV/m RBW: 1 MHz

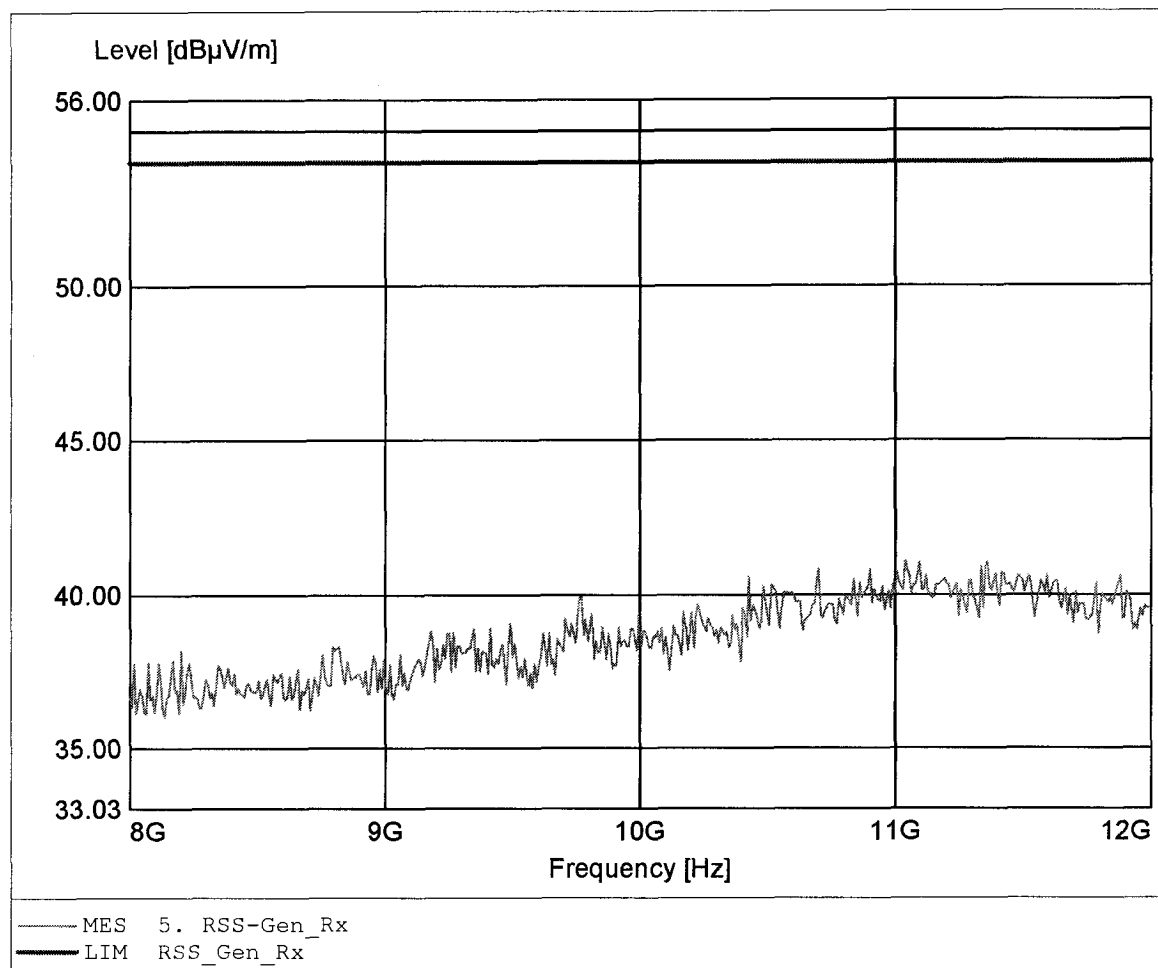

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: Teledex
EUT: Cordless Telephone / fixed part
Model : DCT2910
Test Site / Operator: ETS / Mr. Handrik
Test Condition: 25°C / Unom: 120 V AC (AC/DC adaptor)
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq: 11.695GHz Emax: 41.79dB μ V/m RBW: 1 MHz

