

Appendix R

Emissions inside and outside the sub-band

FCC Part 15.323(d.2) In-band unwanted emission

Testprocedure ANSI 63.17-1998 6.1.6.1

UPCS

EUT	Cordless Telephone
Model	DCT2910 Portable Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission

1.68MHz



In-band unwanted emis

*RBW 10 kHz


*VBW 30 kHz

*SWT 23 s

Ref 20 dBm

*Att 30 dB

1 PK
MAXH

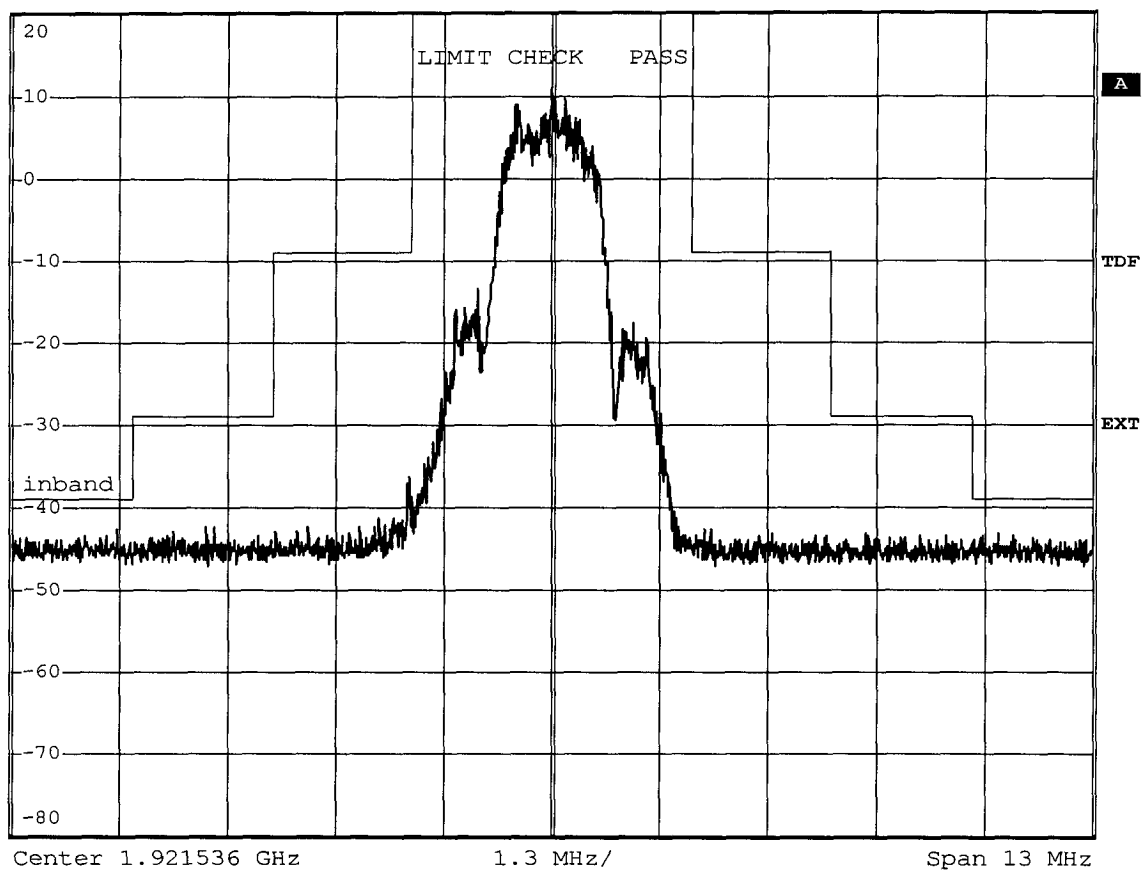

Comment: Ansi C63.17-1998 6.1.6.1

Date: 13.JUN.2006 14:32:03

Measurement diagram

FCC Part 15.323(d.2) In-band unwanted emission**Testprocedure ANSI 63.17-1998 6.1.6.1****UPCS**

EUT	Cordless Telephone
Model	DCT2910 Portable Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.1 In-band unwanted emission

1.68MHz



In-band unwanted emis


*RBW 10 kHz

*VBW 30 kHz

*SWT 23 s

Ref 20 dBm

*Att 30 dB

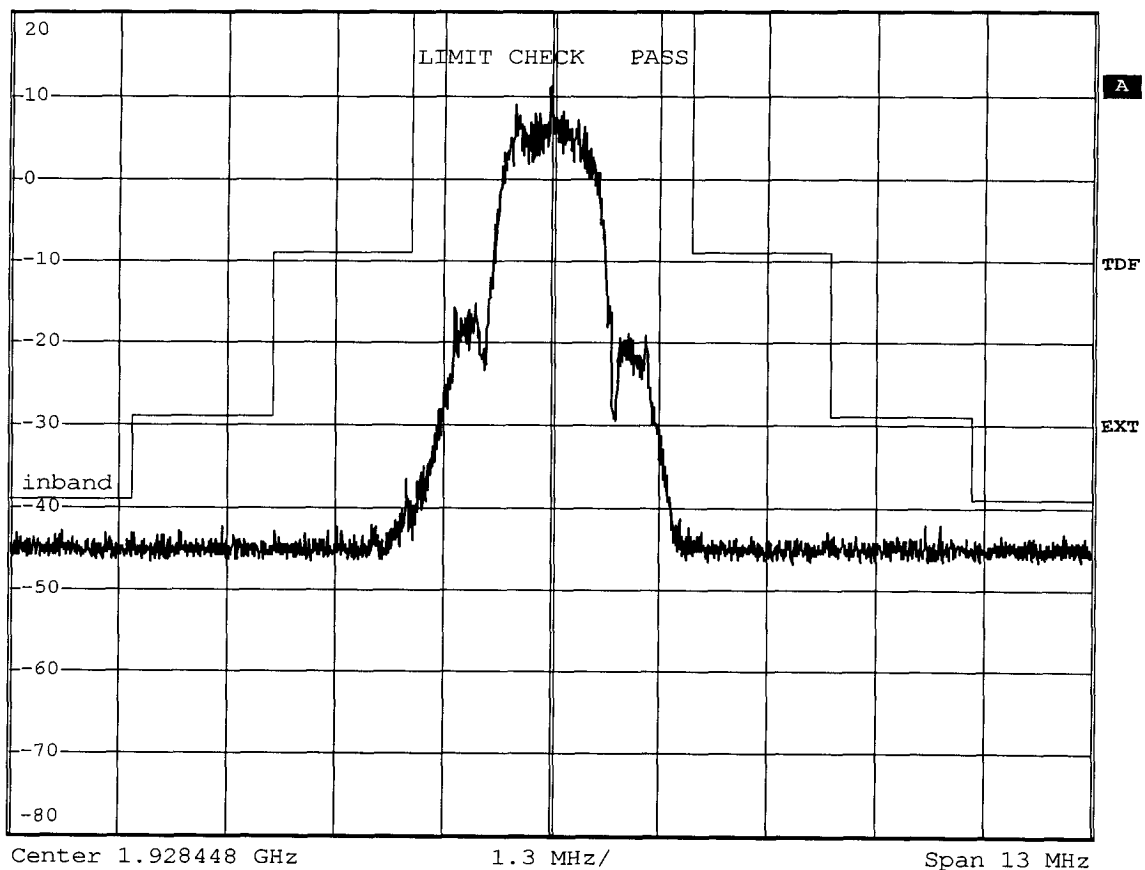1 PK
MAXH

Comment: Ansi C63.17-1998 6.1.6.1

Date: 13.JUN.2006 14:35:40

Measurement diagram

FCC Part 15.323(d.1) Out-of-band emission

Testprocedure ANSI 63.17-1998 6.1.6.2

UPCS

EUT	Cordless Telephone
Model	DCT2910 Portable Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.2 Out-of-band emission

measurement on the lowest carrier
Carrier=1921.536MHz



Out-of-band emission

*RBW 10 kHz


*VBW 30 kHz

*SWT 23 s

Ref 20 dBm

*Att 30 dB

1 PK
MAXH

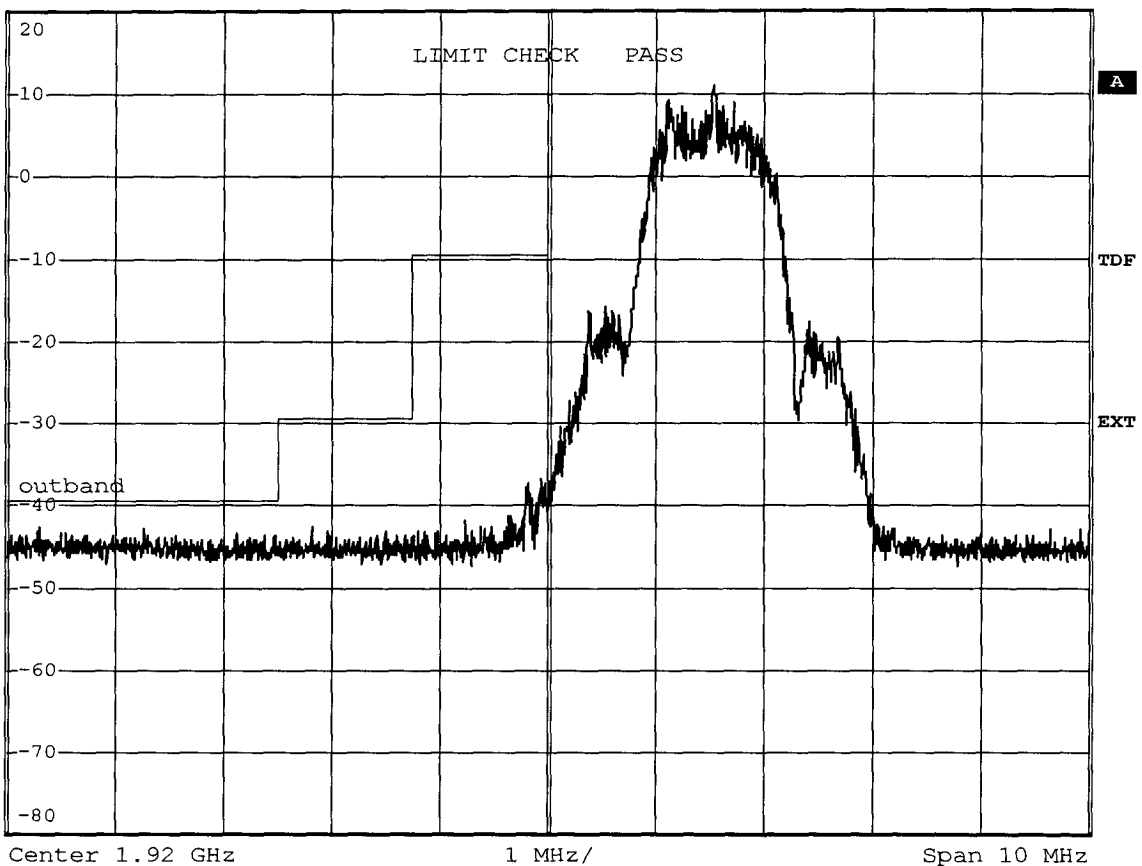

Comment: Ansi C63.17-1998 6.1.6.2

Date: 13.JUN.2006 14:39:25

Measurement diagram

FCC Part 15.323(d.1) Out-of-band emission

Testprocedure ANSI 63.17-1998 6.1.6.2

UPCS

EUT	Cordless Telephone
Model	DCT2910 Portable Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.6.2 Out-of-band emission

measurement on the highest carrier
Carrier=1928.448MHz



Out-of-band emission


*RBW 10 kHz

*VBW 30 kHz

Ref 20 dBm

*Att 30 dB

*SWT 23 s

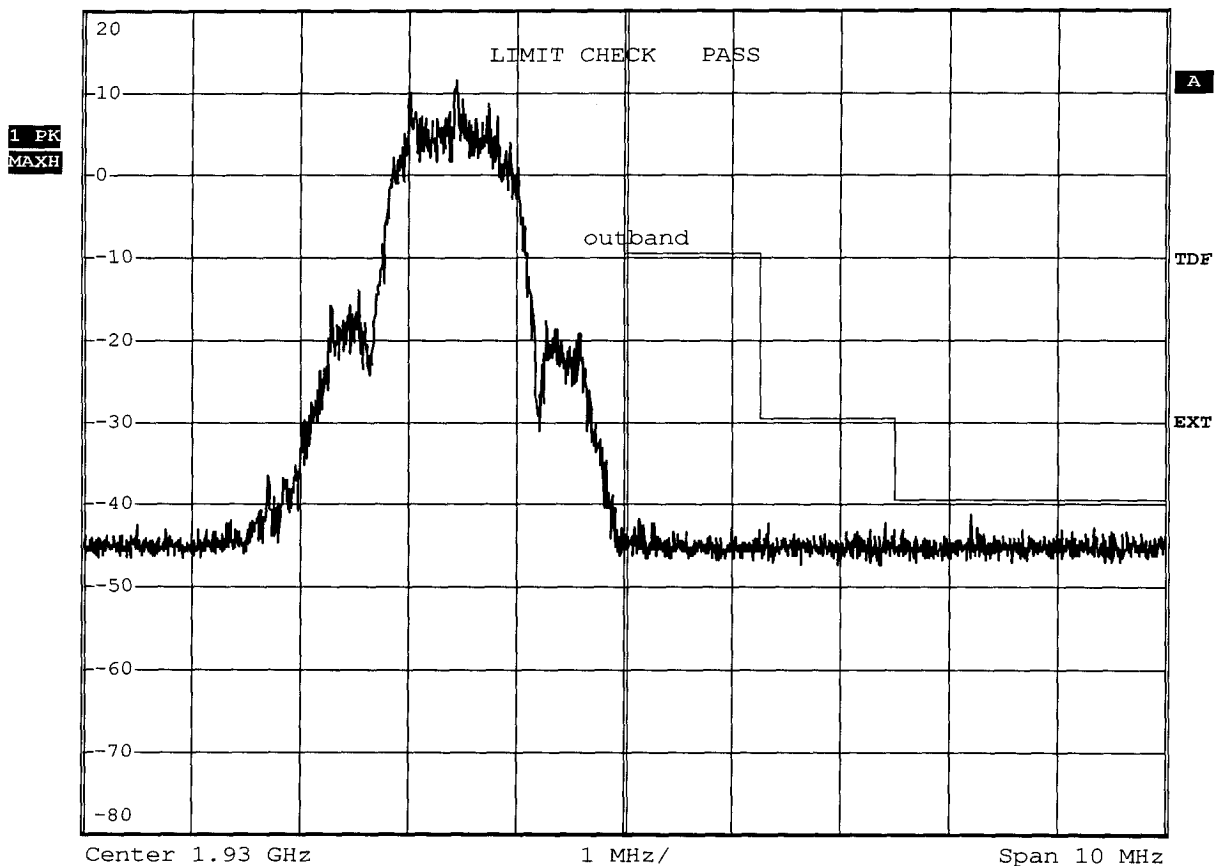

Comment: Ansi C63.17-1998 6.1.6.2


Date: 13.JUN.2006 14:37:53

Measurement diagram

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:156.393MHz Pmax:-66.81dBm RBW: 100 kHz

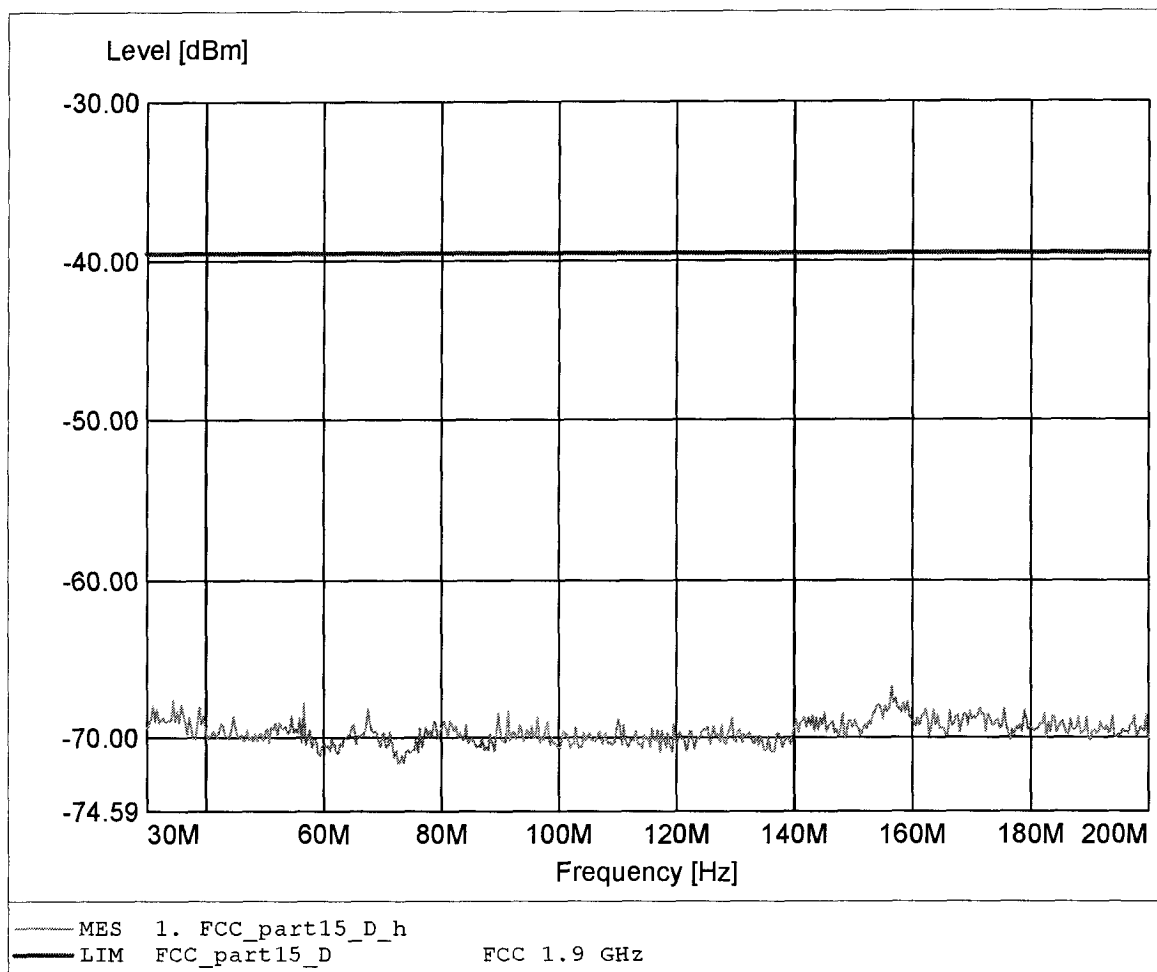

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:188.076MHz Pmax:-64.55dBm RBW: 100 kHz

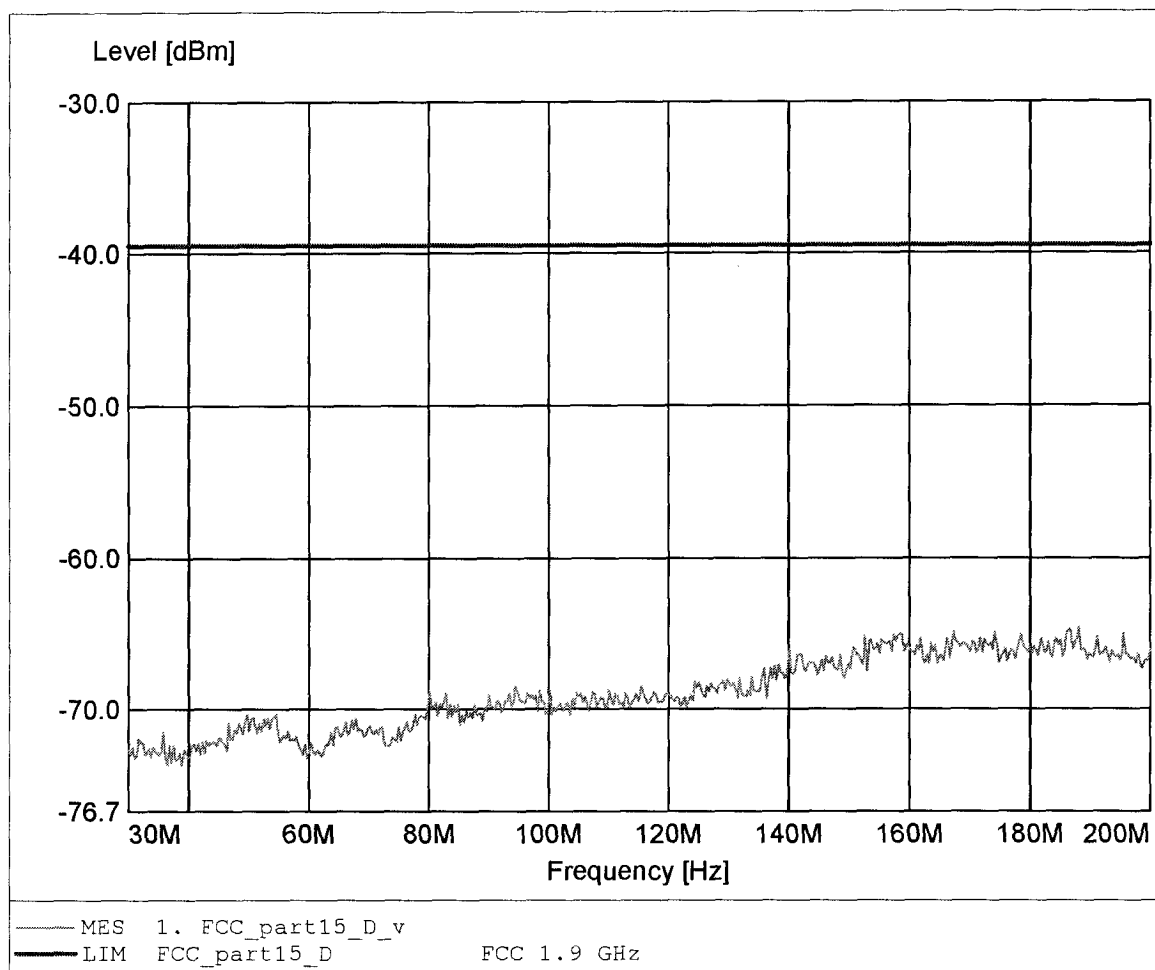

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 890.982MHz Pmax: -69.56dBm RBW: 100 kHz

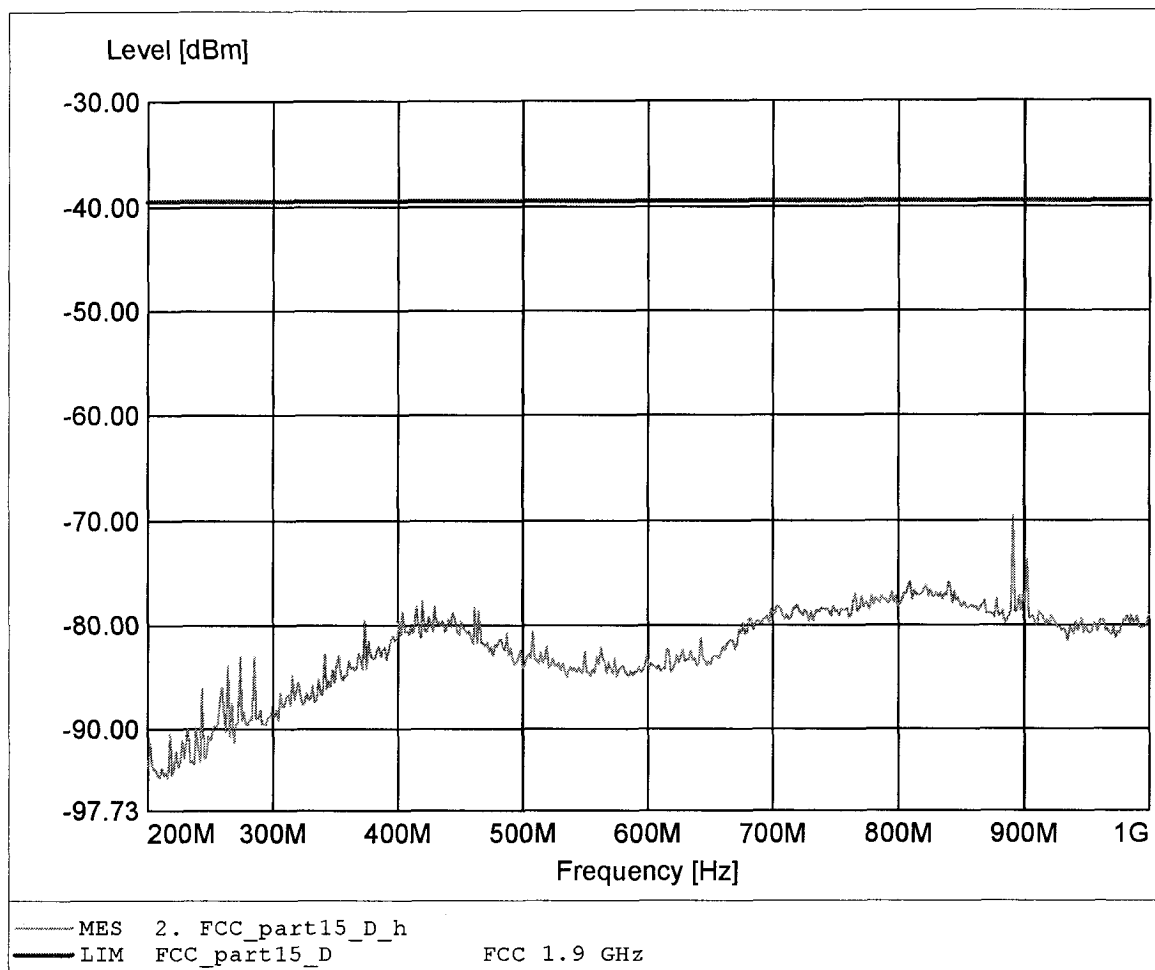

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:528.657MHz Pmax:-63.67dBm RBW: 100 kHz

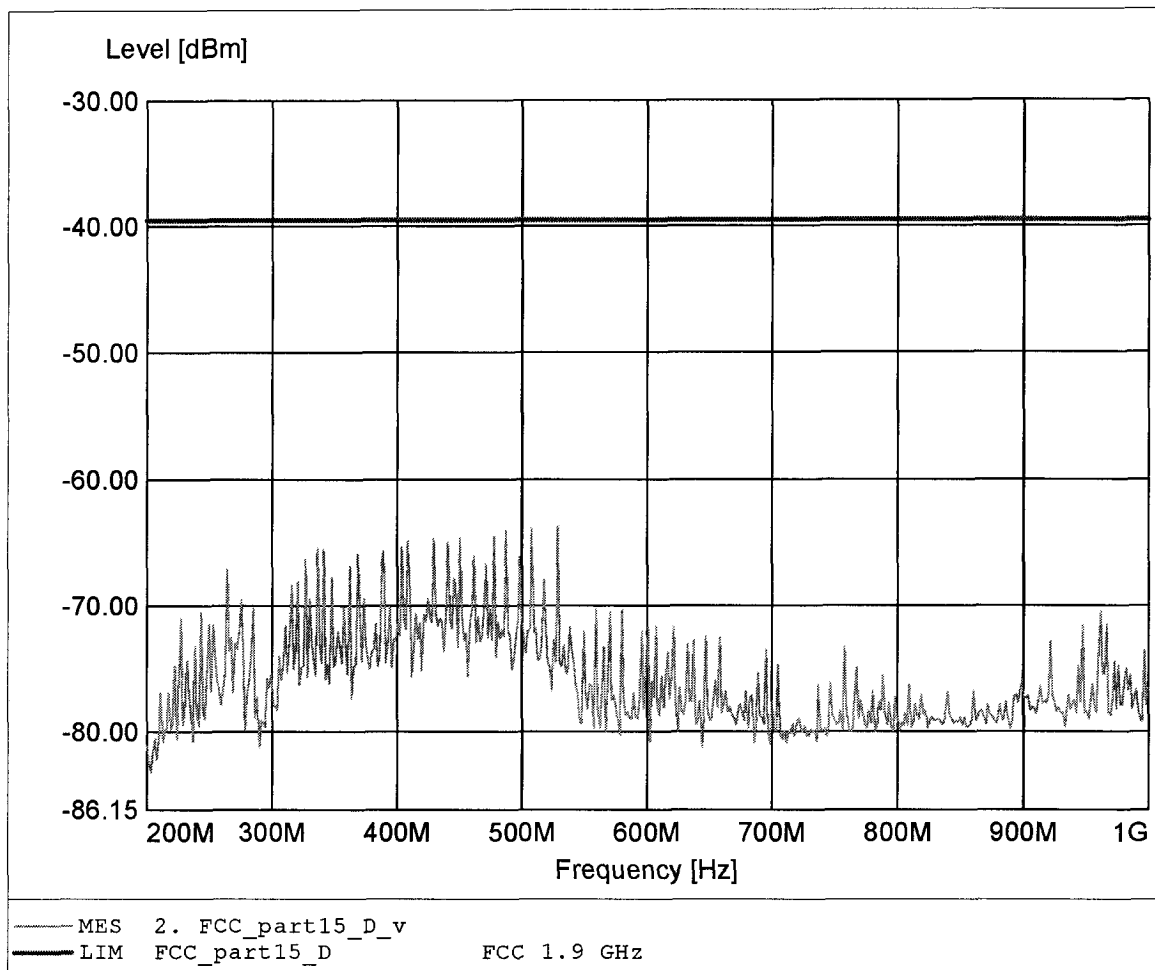

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.911GHz Pmax:-64.81dBm RBW: 100 kHz

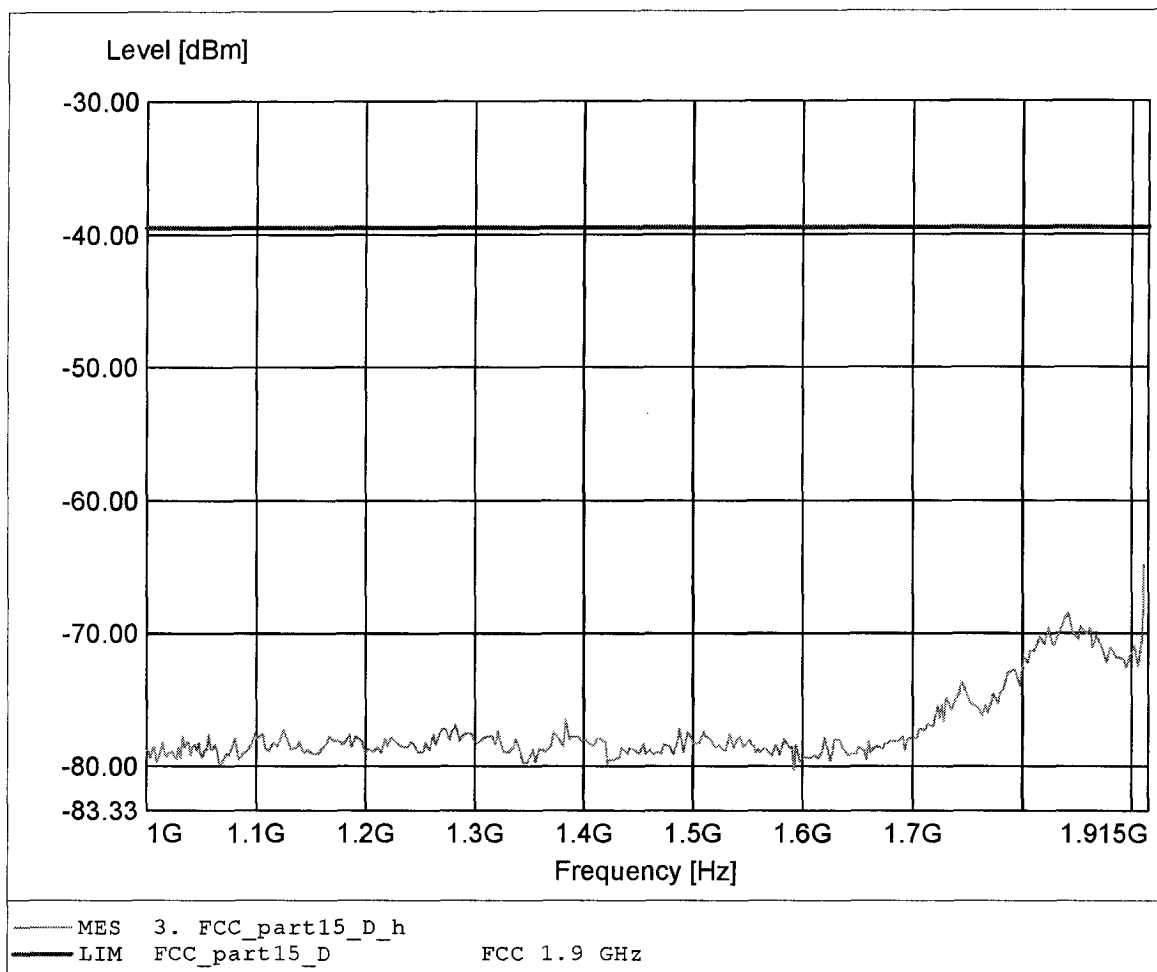

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.897GHz Pmax: -68.25dBm RBW: 100 kHz

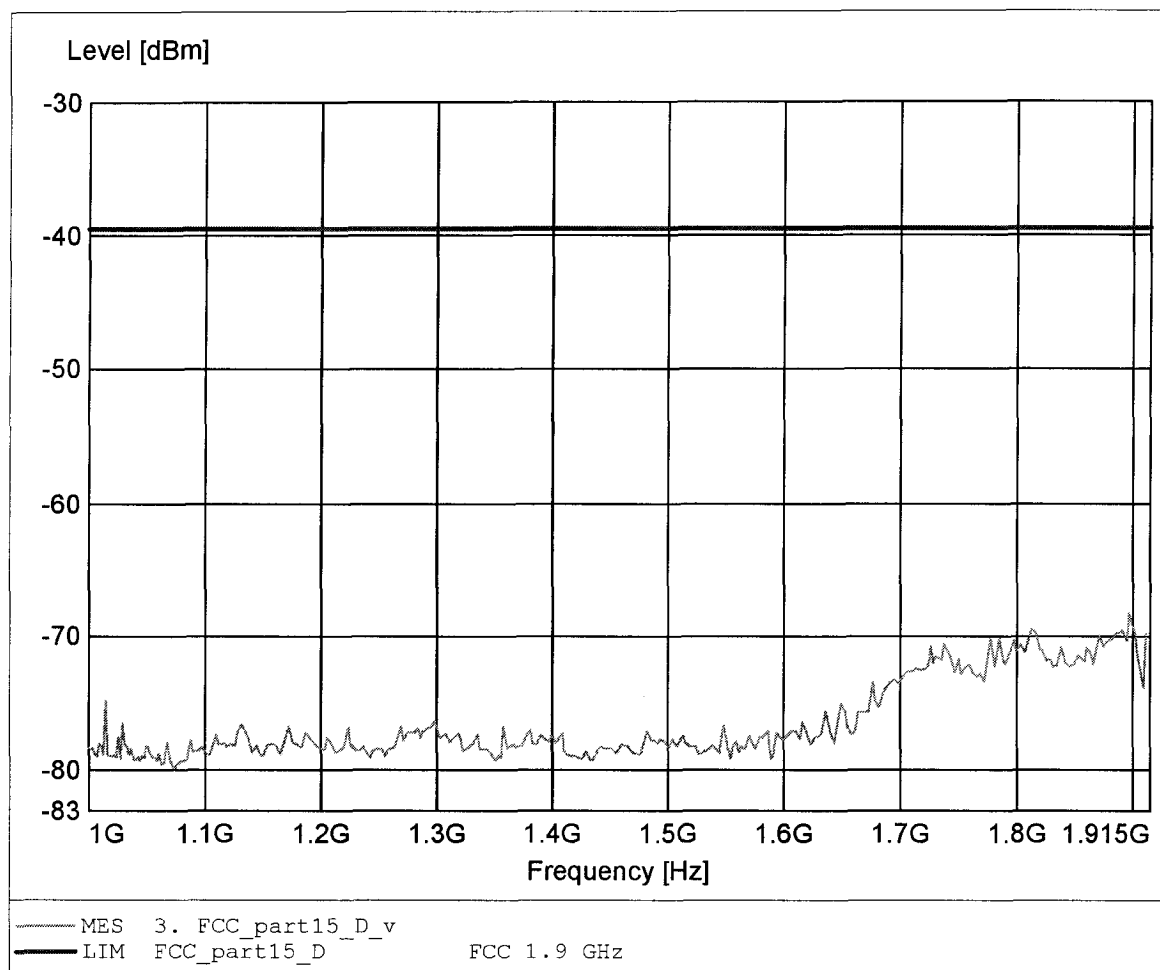

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.930GHz Pmax:-48.84dBm RBW: 10 kHz

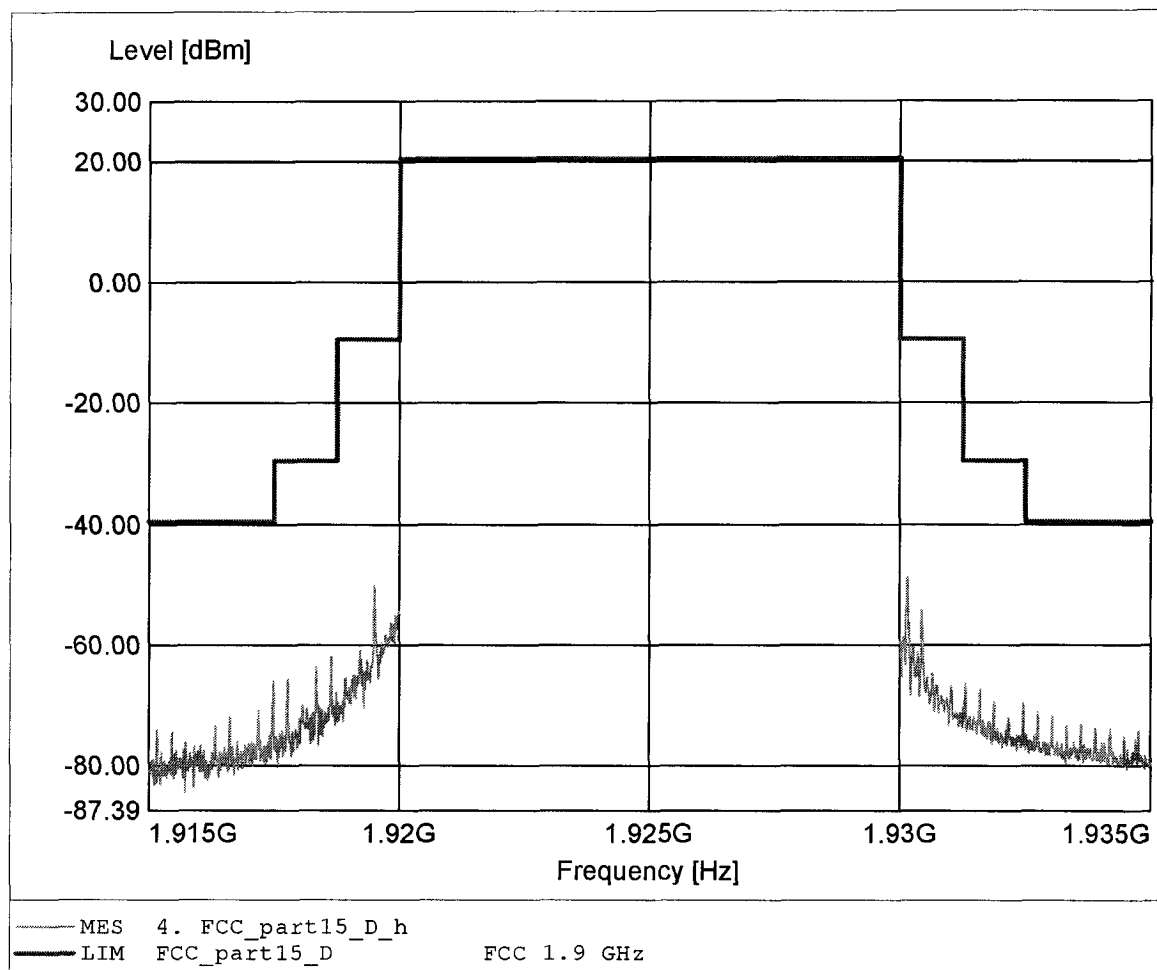

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.930GHz Pmax:-48.05dBm RBW: 10 kHz

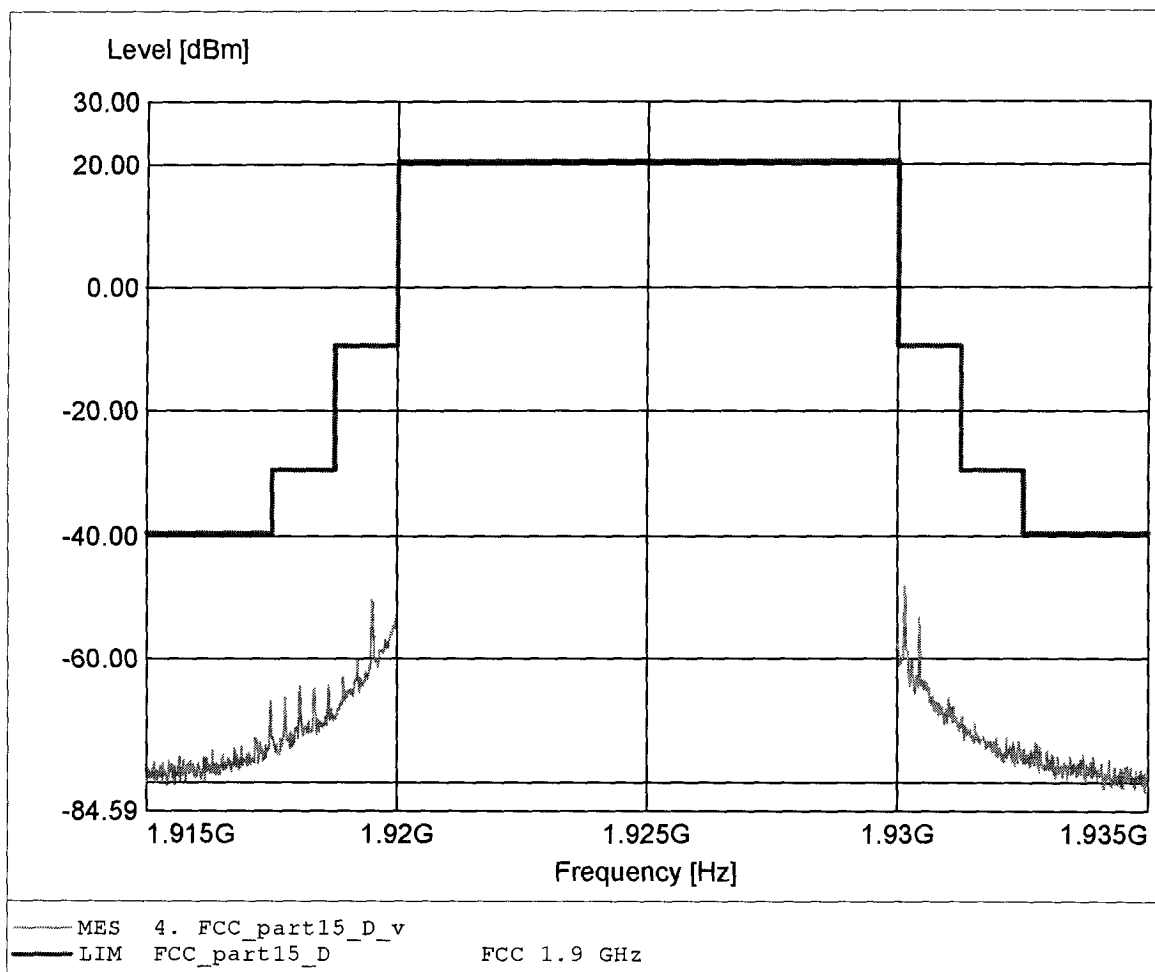

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:3.857GHz Pmax:-41.25dBm RBW:10 kHz

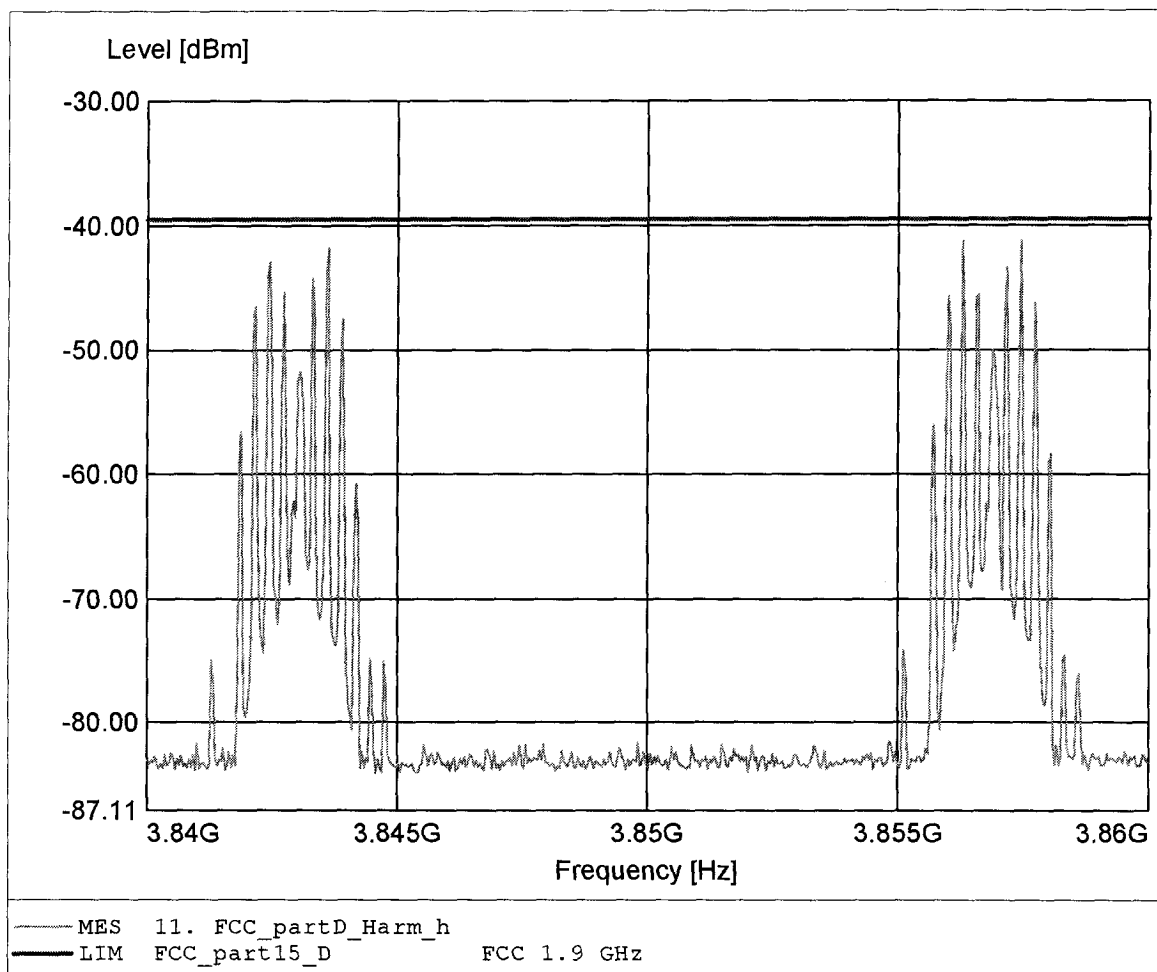

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:3.857GHz Pmax:-41.59dBm RBW:10 kHz

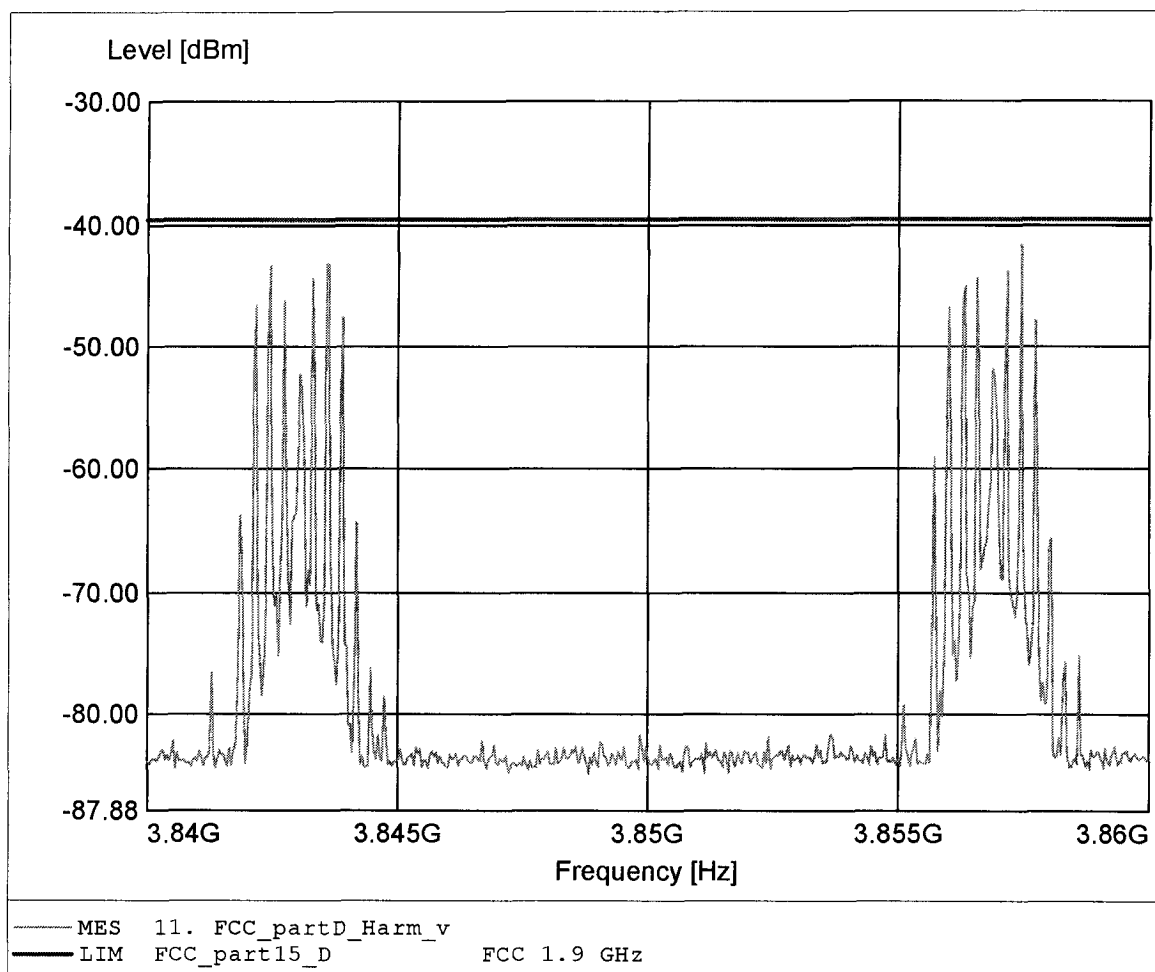

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 5.786GHz Pmax: -50.29dBm RBW: 10 kHz

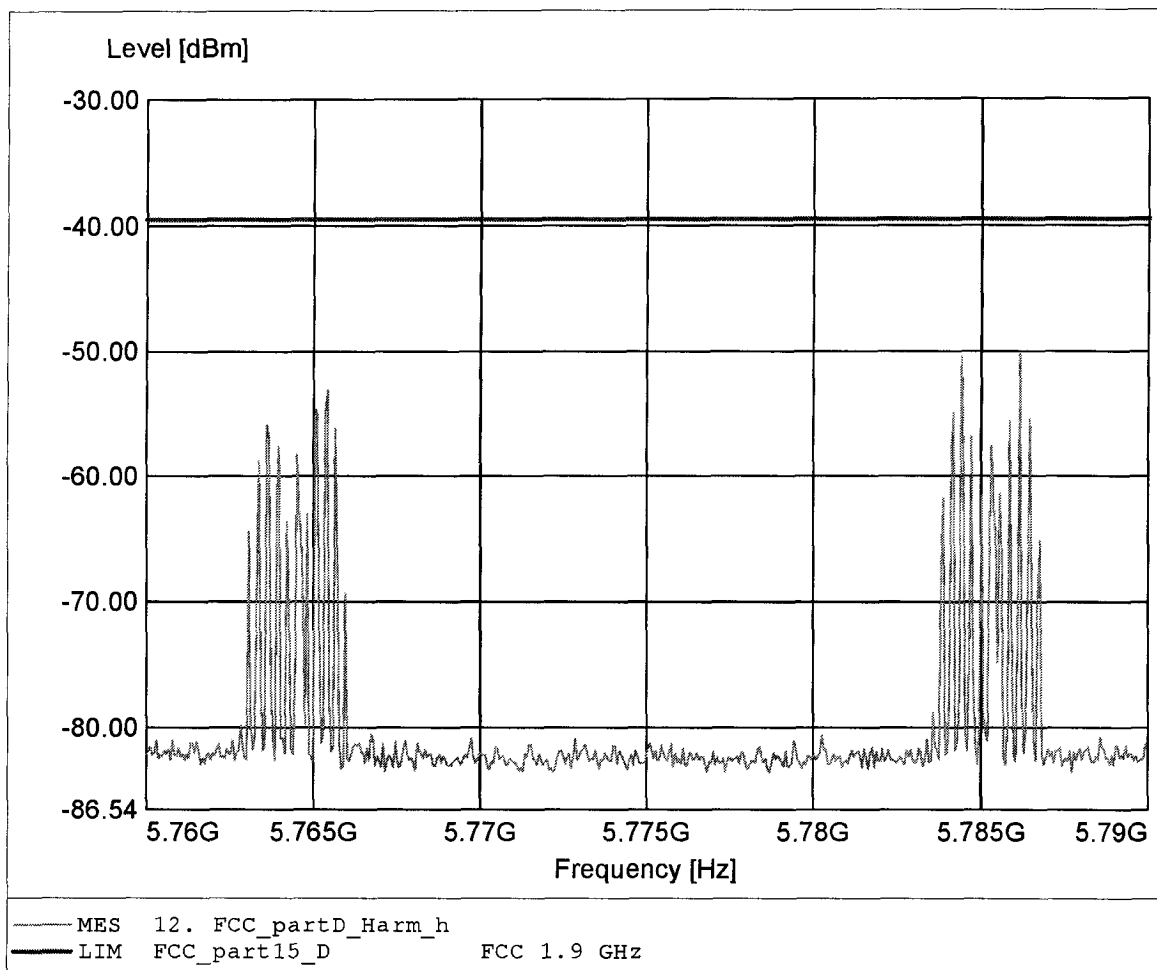

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 5.765GHz Pmax: -52.05dBm RBW: 10 kHz

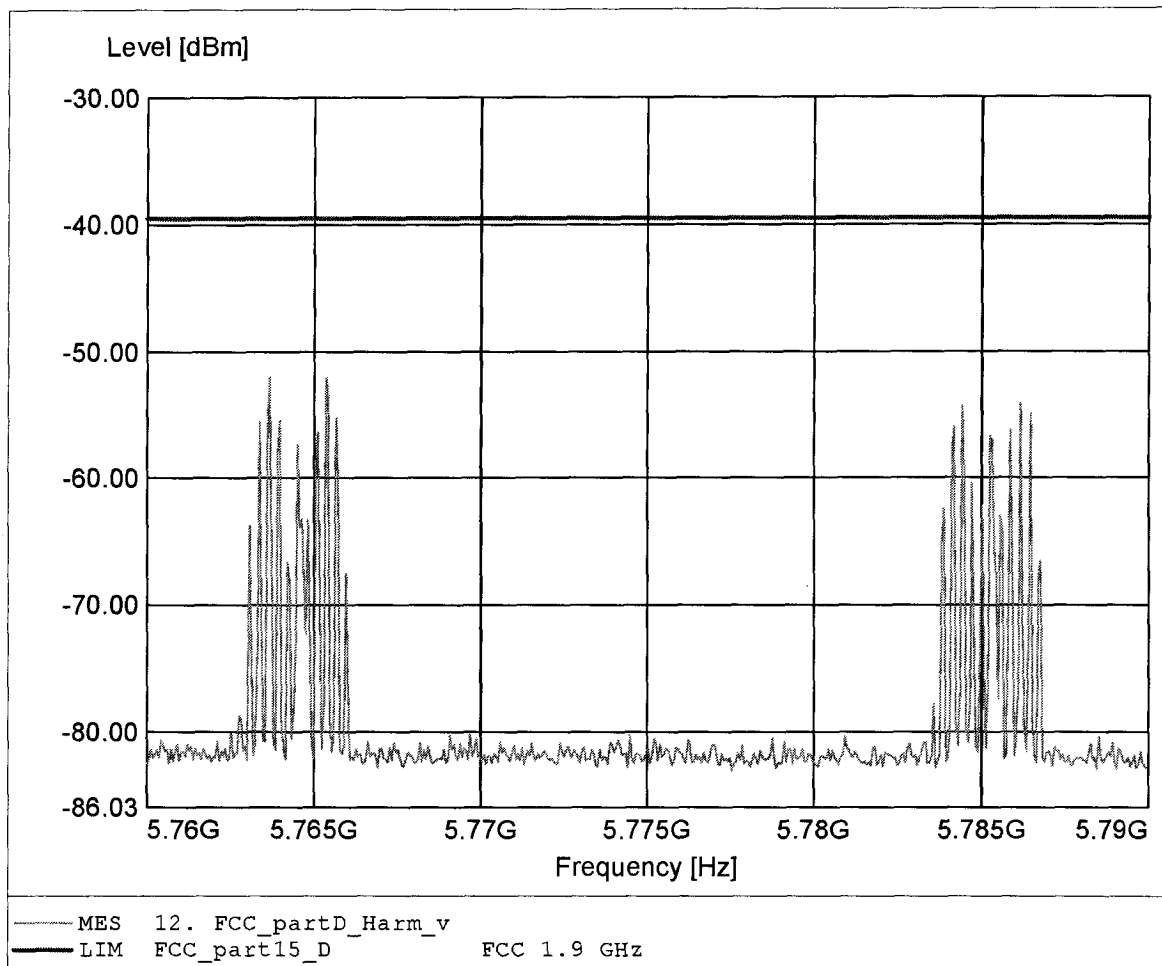

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 7.687GHz Pmax: -54.49dBm RBW: 10 kHz

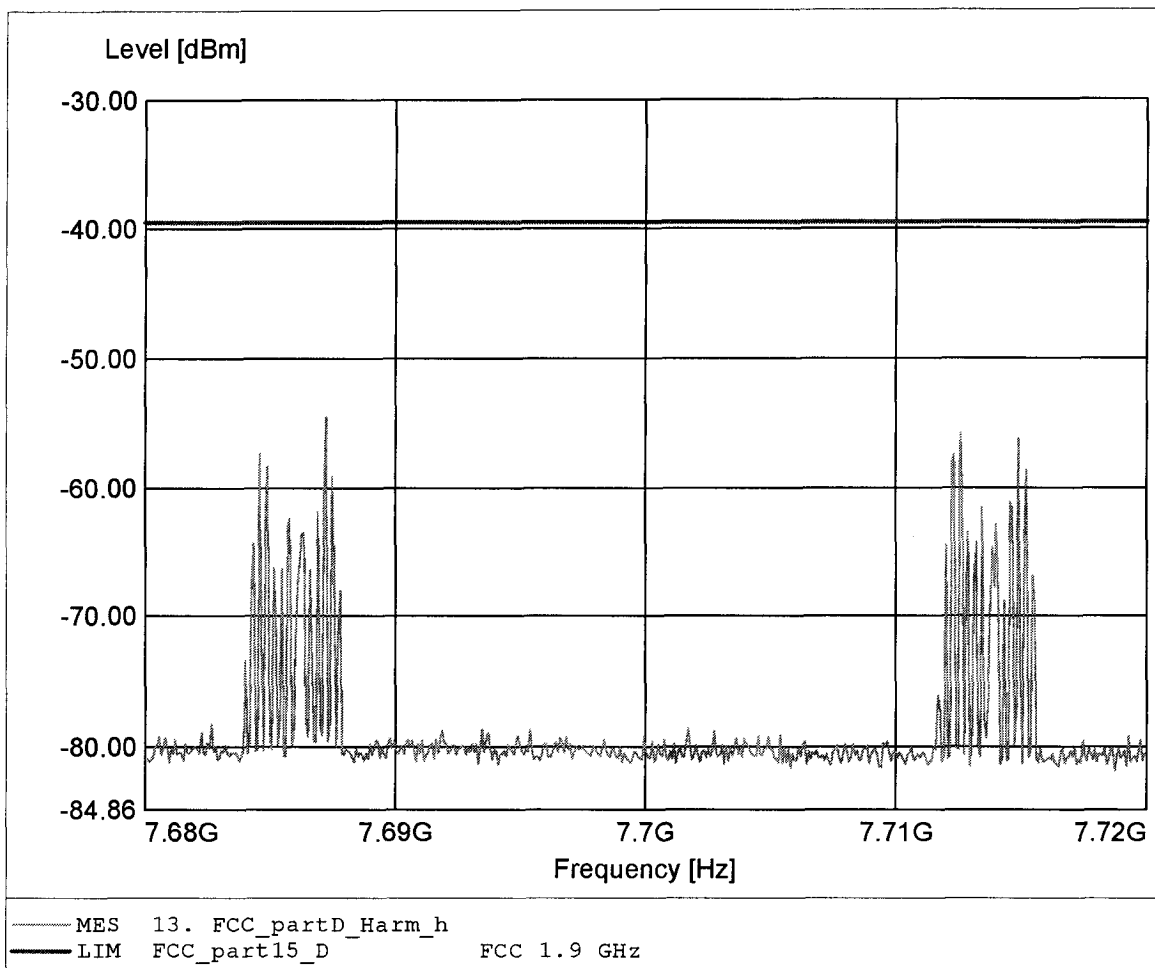

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 7.712GHz Pmax: -59.68dBm RBW: 10 kHz

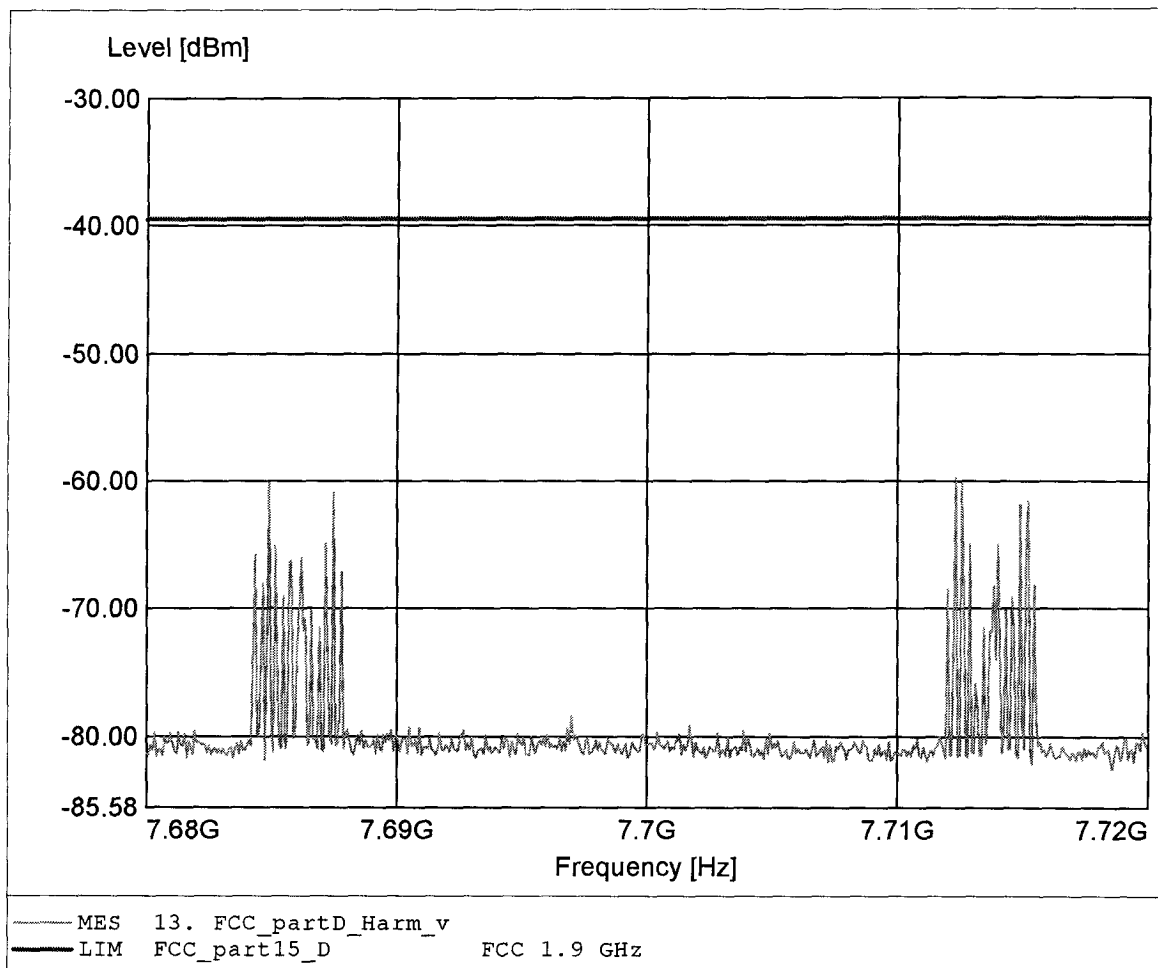

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 9.644GHz Pmax: -44.98dBm RBW: 10 kHz

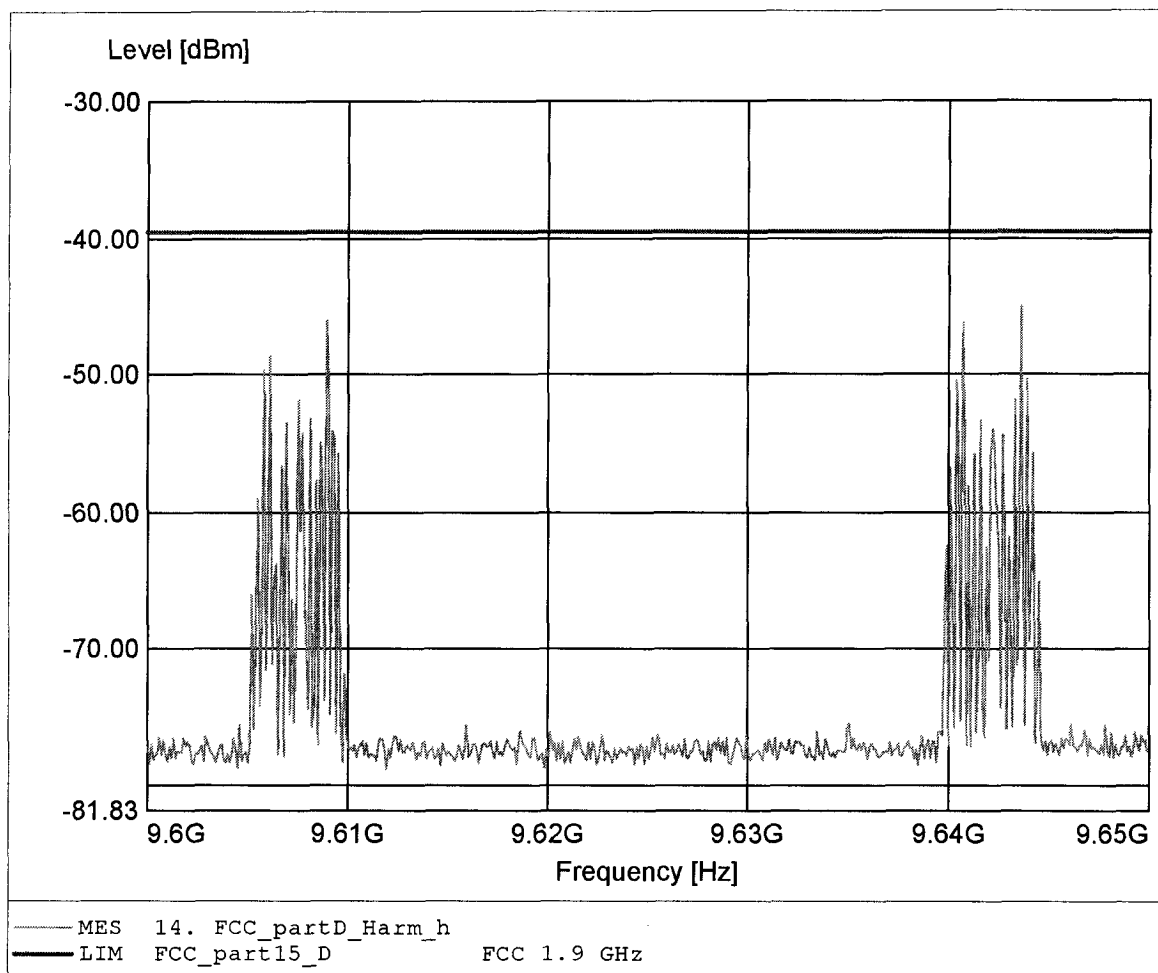

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 9.609GHz Pmax: -46.65dBm RBW: 10 kHz

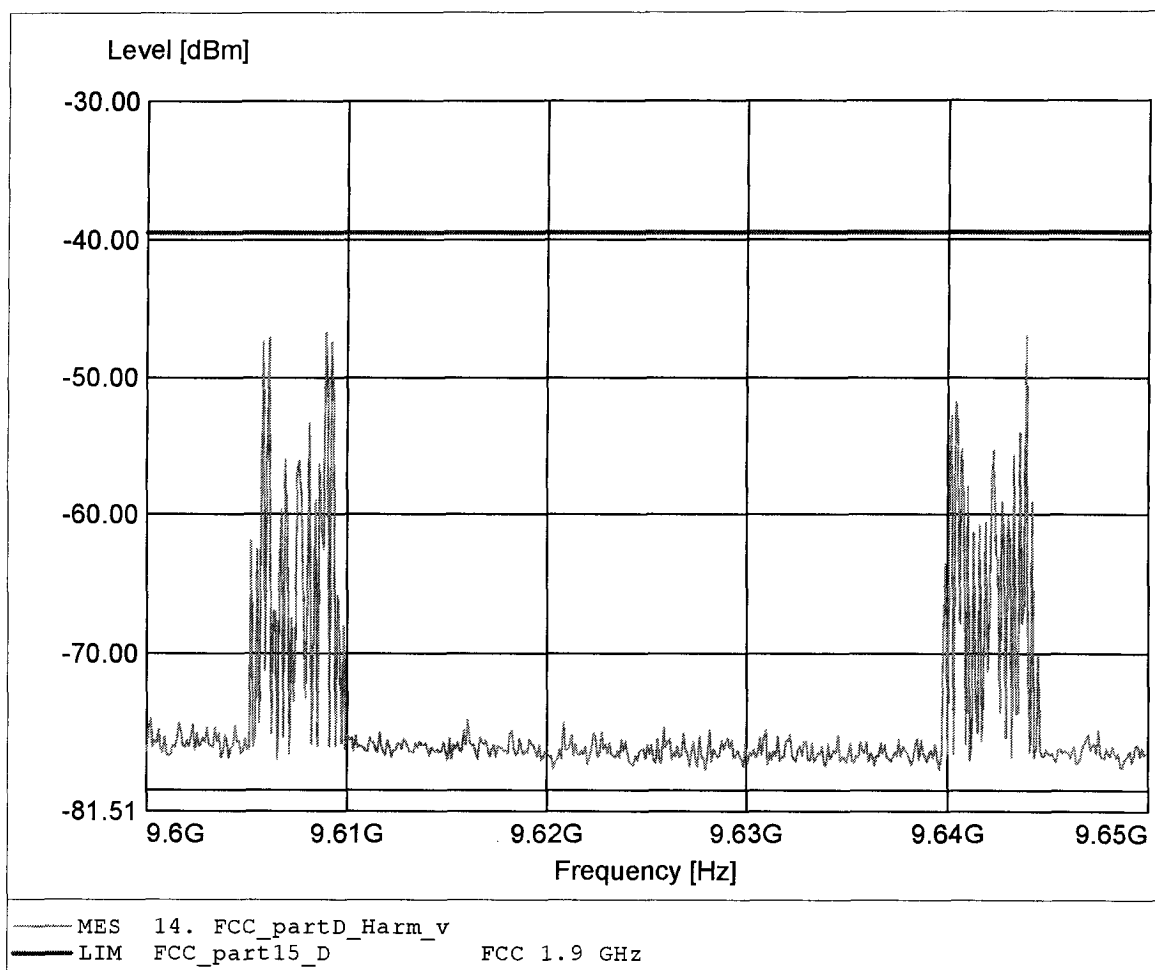

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:11.573GHz Pmax:-51.09dBm RBW:10 kHz

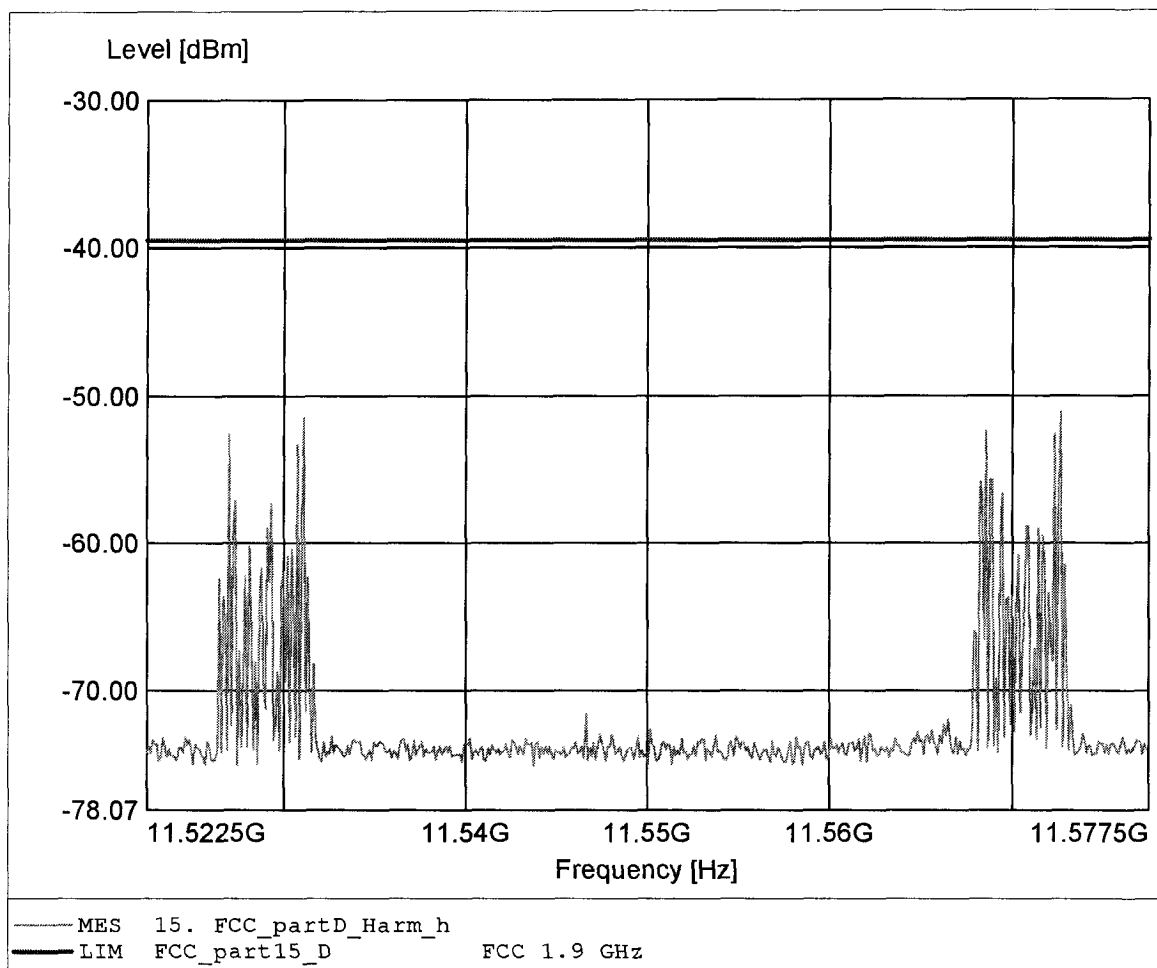

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:11.531GHz Pmax:-55.95dBm RBW:10 kHz

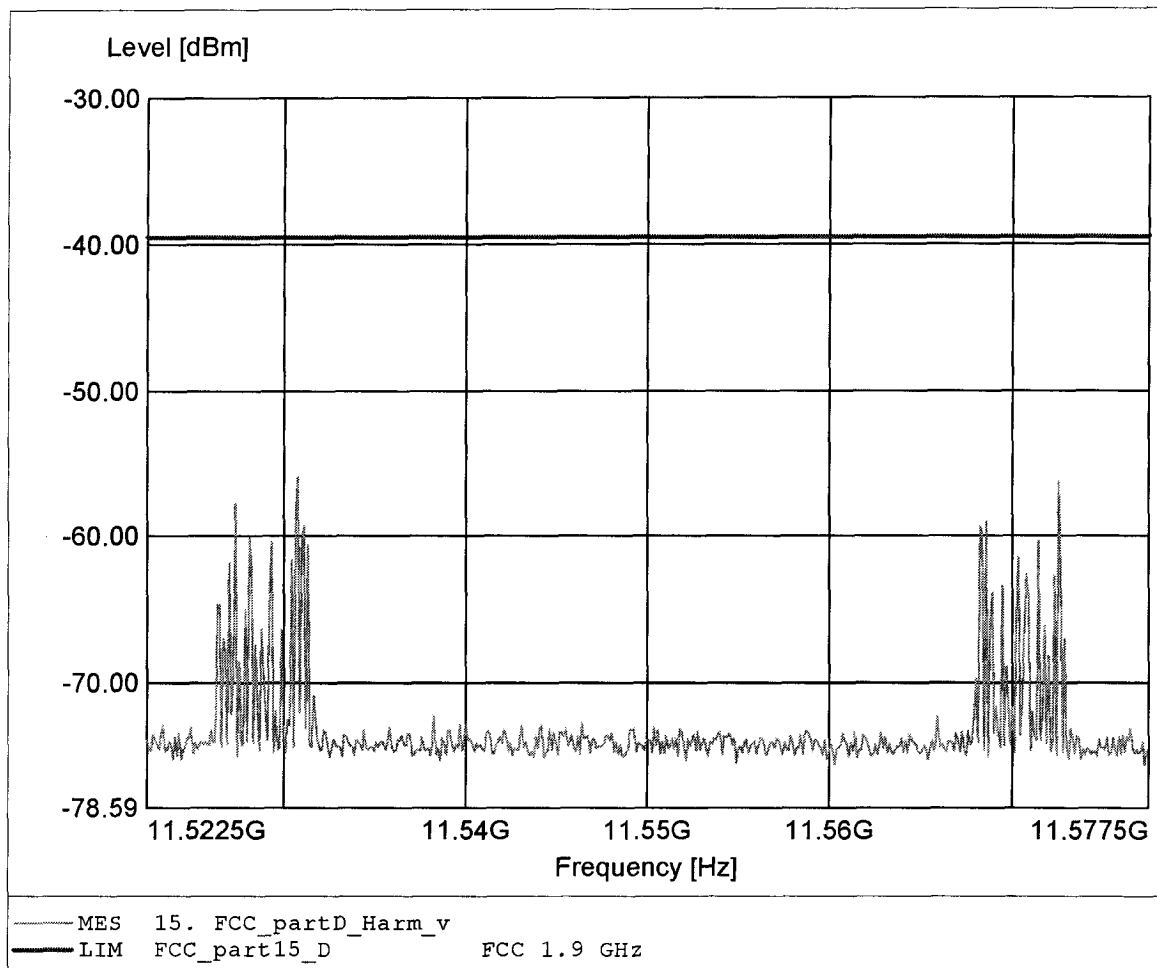

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:13.501GHz Pmax:-52.17dBm RBW:10 kHz

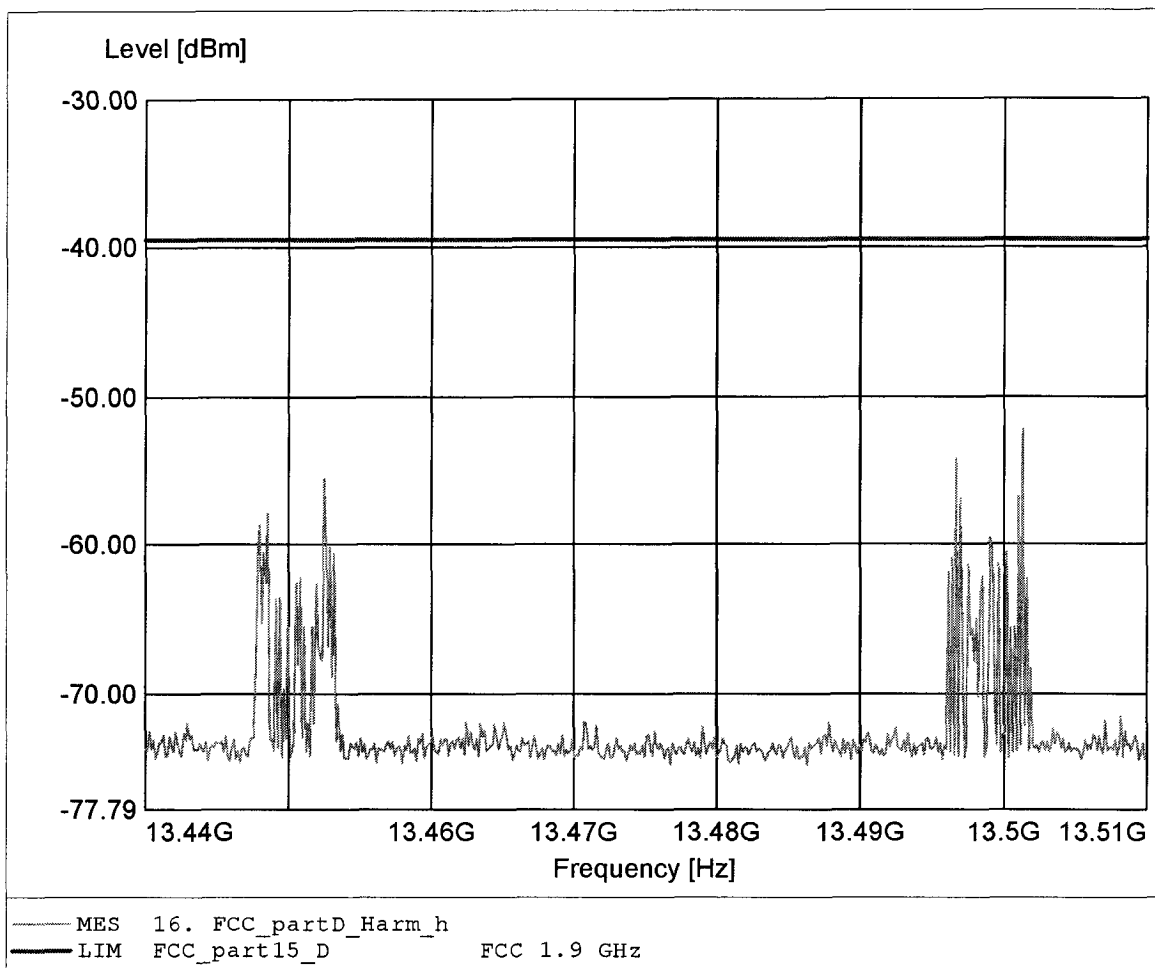

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:13.497GHz Pmax:-54.17dBm RBW:10 kHz

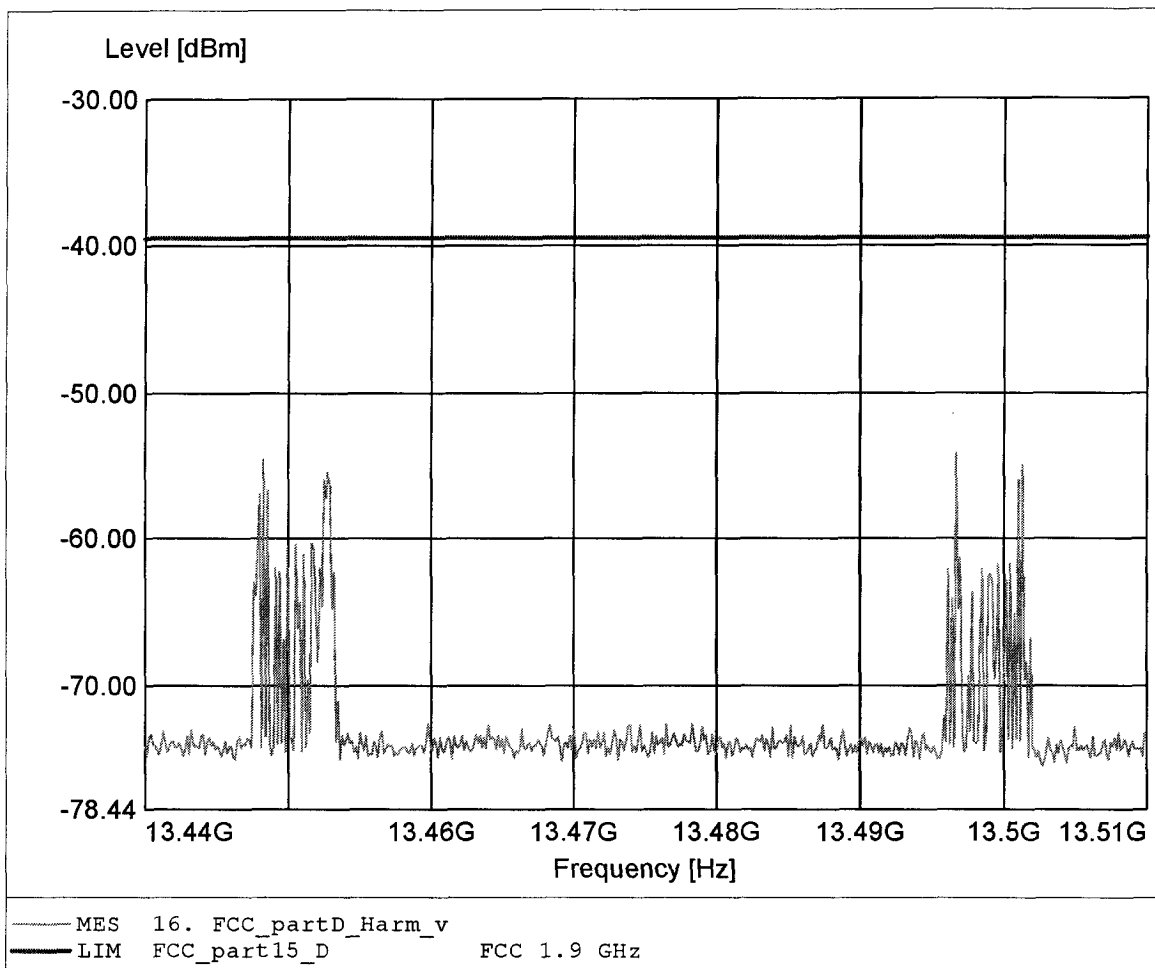

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 15.369GHz Pmax: -56.55dBm RBW: 10 kHz

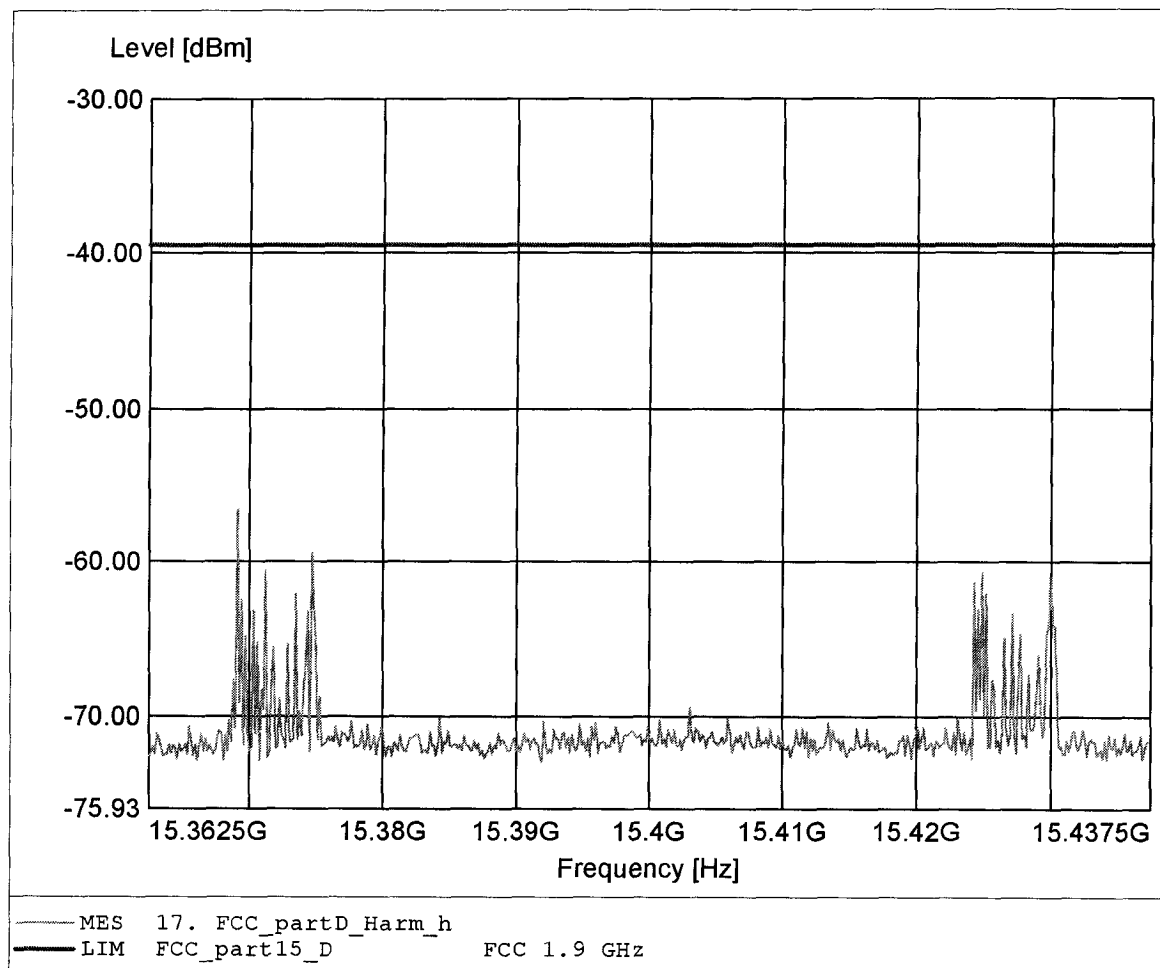

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 15.430GHz Pmax: -59.83dBm RBW: 10 kHz

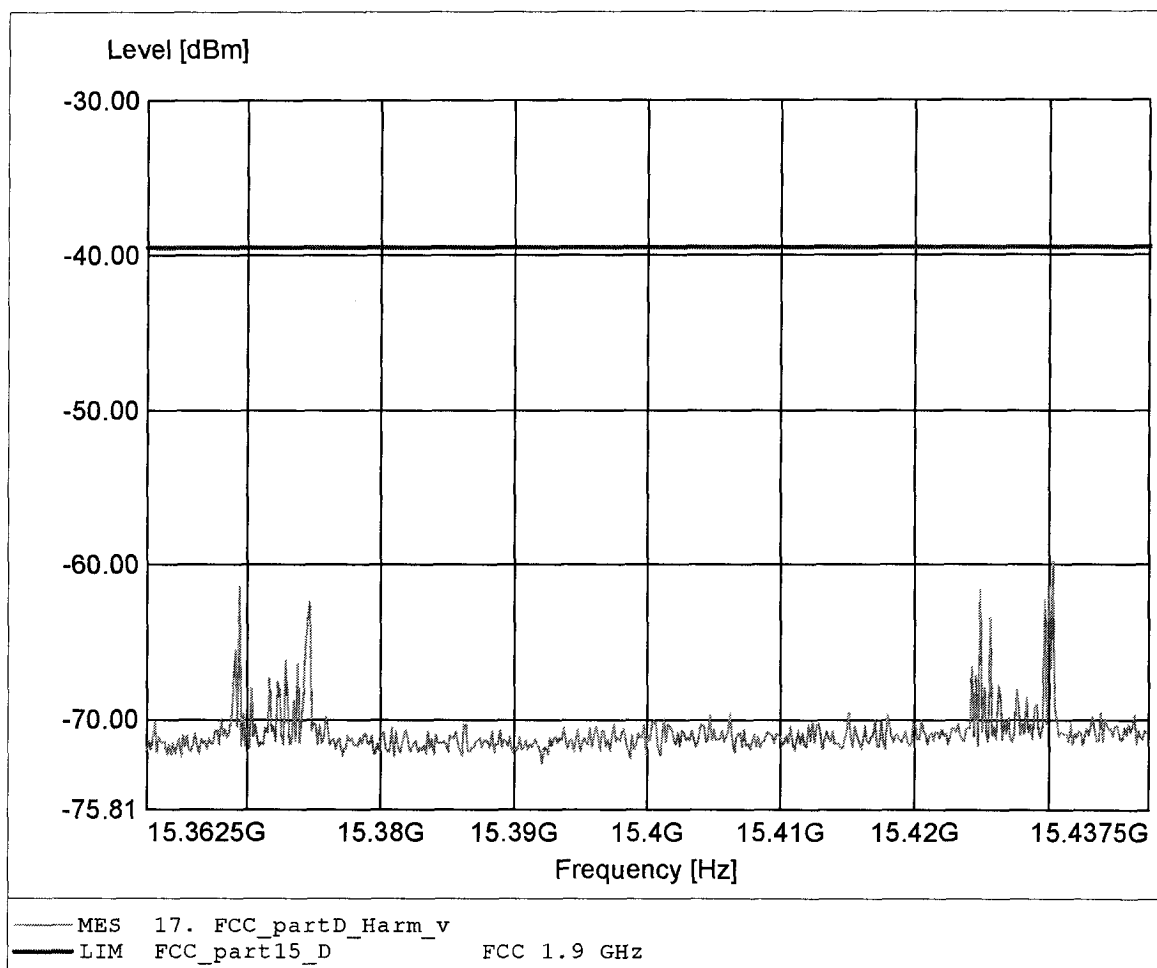

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:17.291GHz Pmax:-55.73dBm RBW:10 kHz

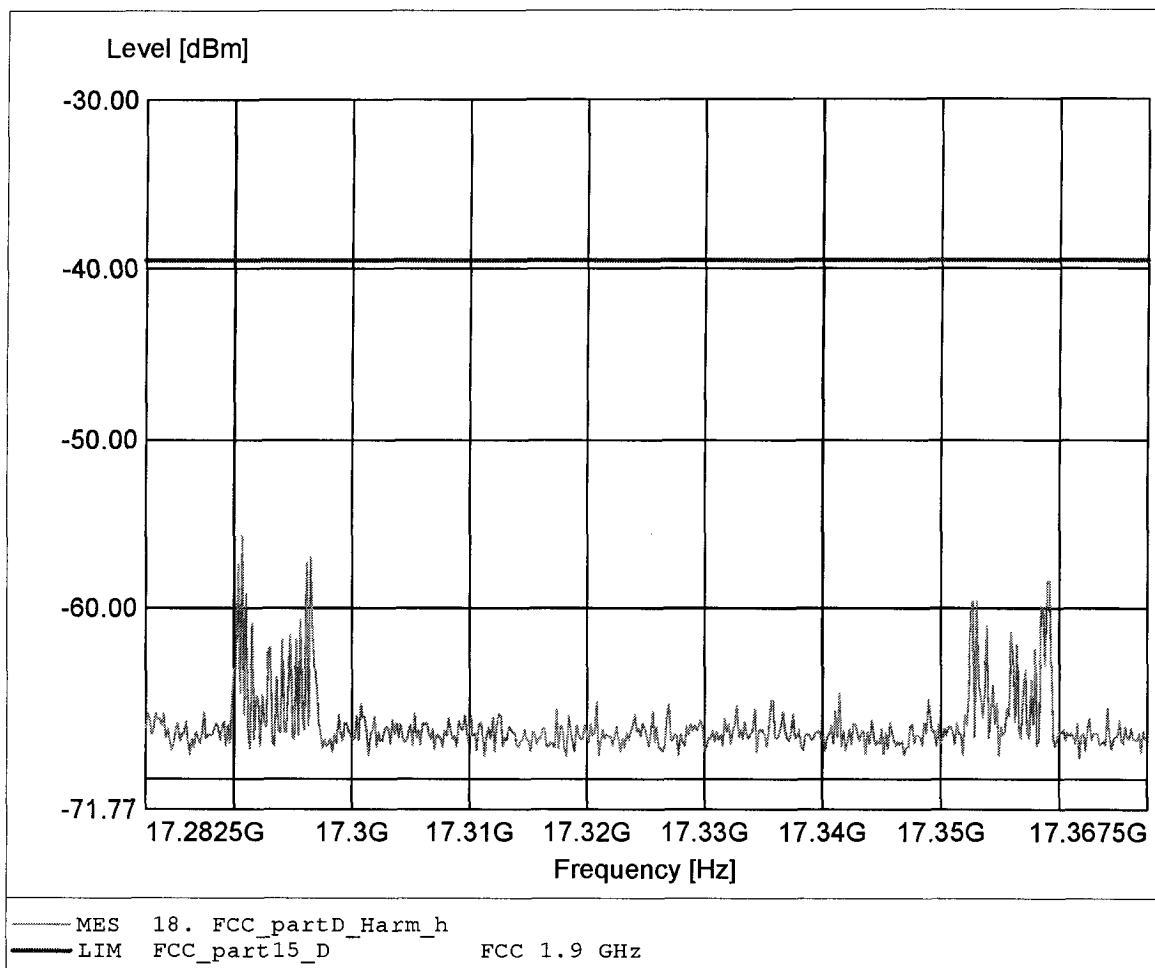

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:17.296GHz Pmax:-61.63dBm RBW:10 kHz

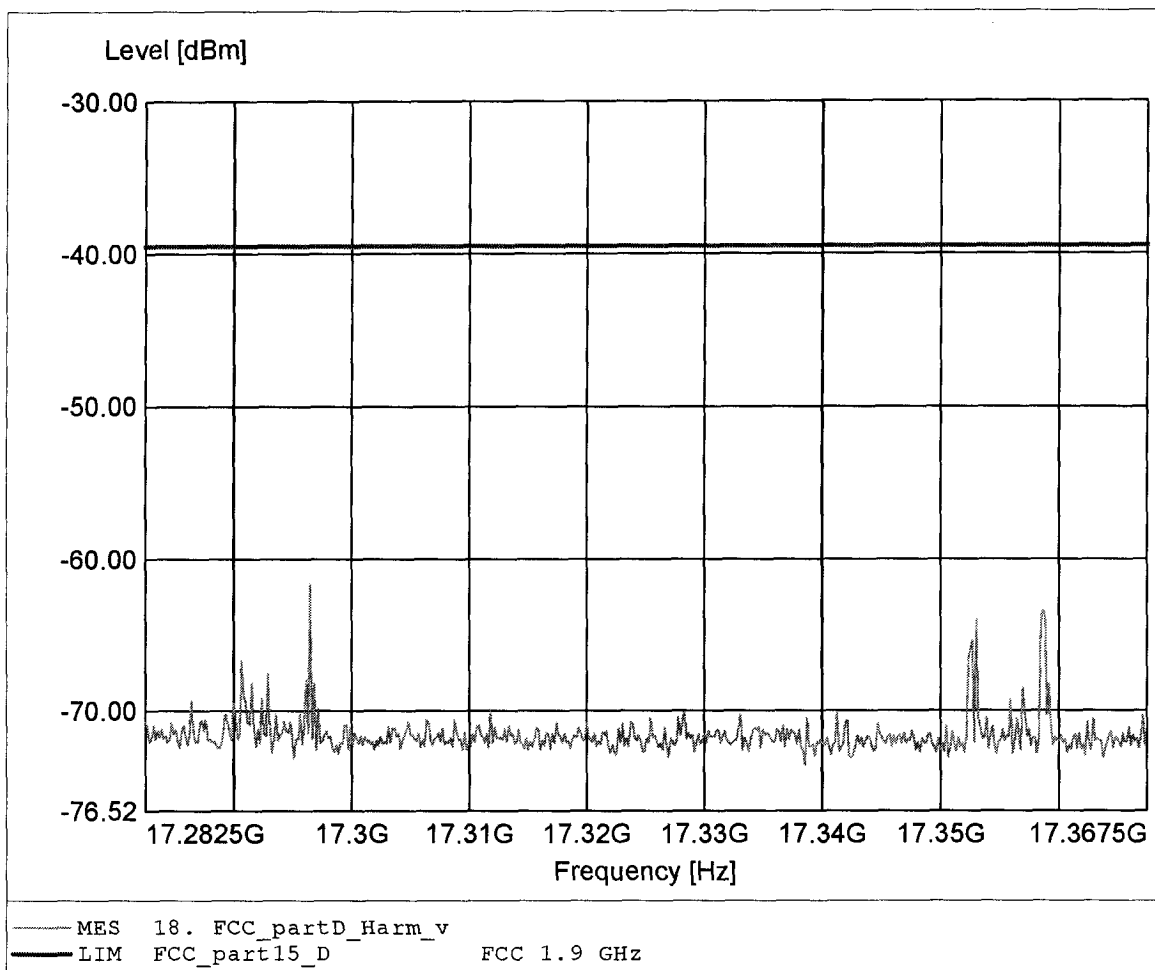

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.287GHz Pmax:-54.58dBm RBW:10 kHz

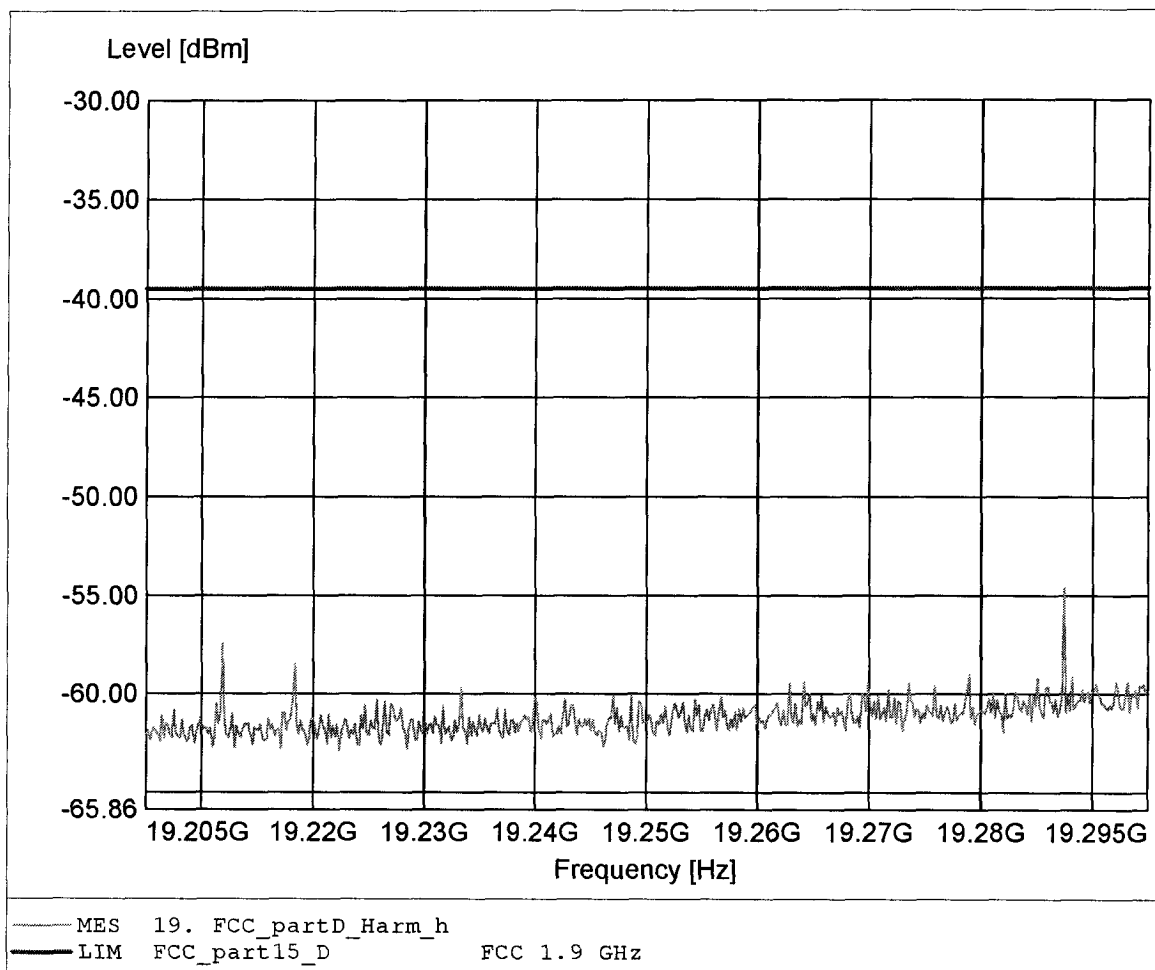

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 0 & 4
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom: 3.60 V DC (battery)
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.
Comment 2: Freq:19.294GHz Pmax:-58.53dBm RBW:10 kHz

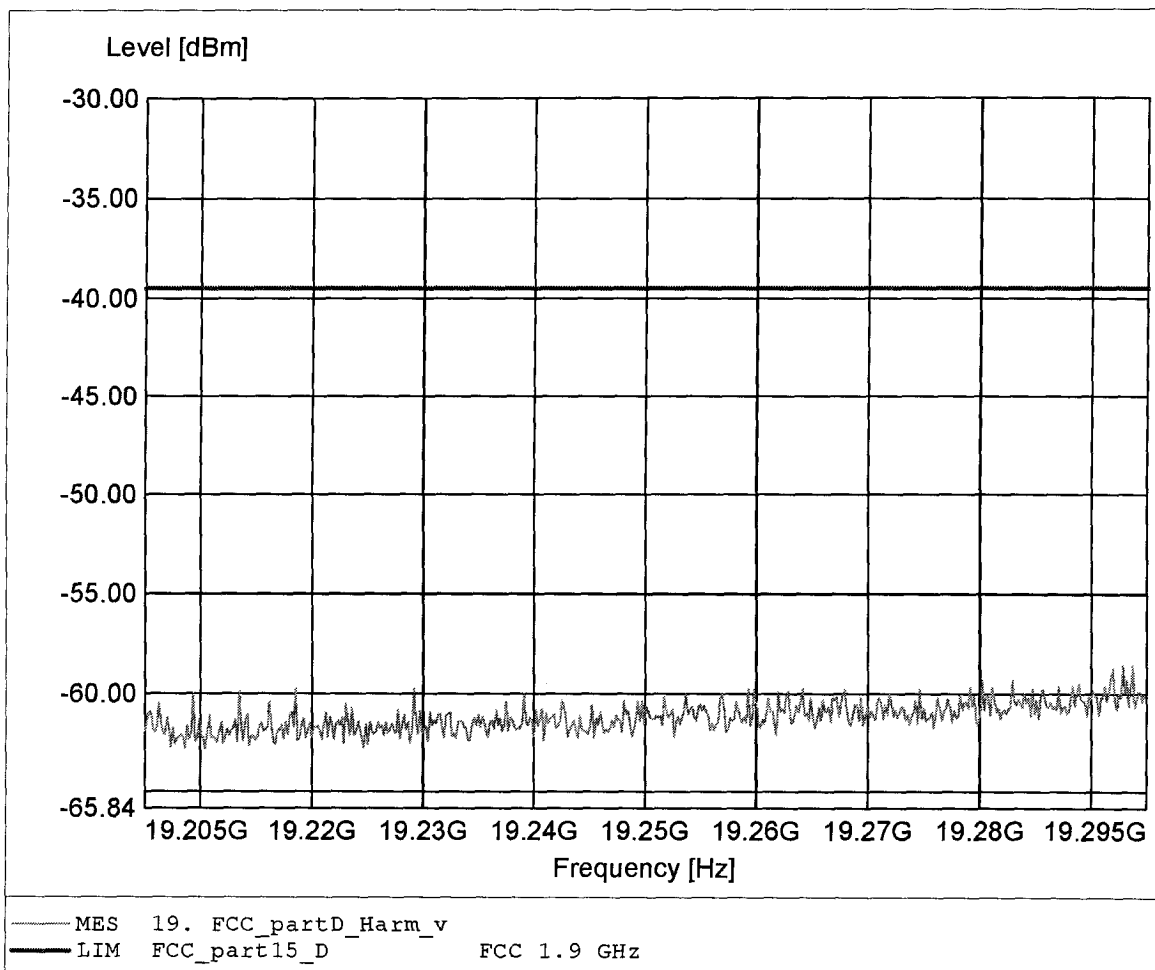

Appendix S

Frame period

FCC Part 15.323(e.1) Frame repetition


Testprocedure ANSI 63.17-1998 6.2.2

UCPS

EUT	Cordless Telephone
Model	DCT2900 Portable Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.2 Frame repetition

Width of the frequency class	0,000004 Hz
Mean	99,999937 Hz
Deviation	0,000040
Stability in ppm	1,213818 ppm
Test result	Verdict = PASS

Histogram

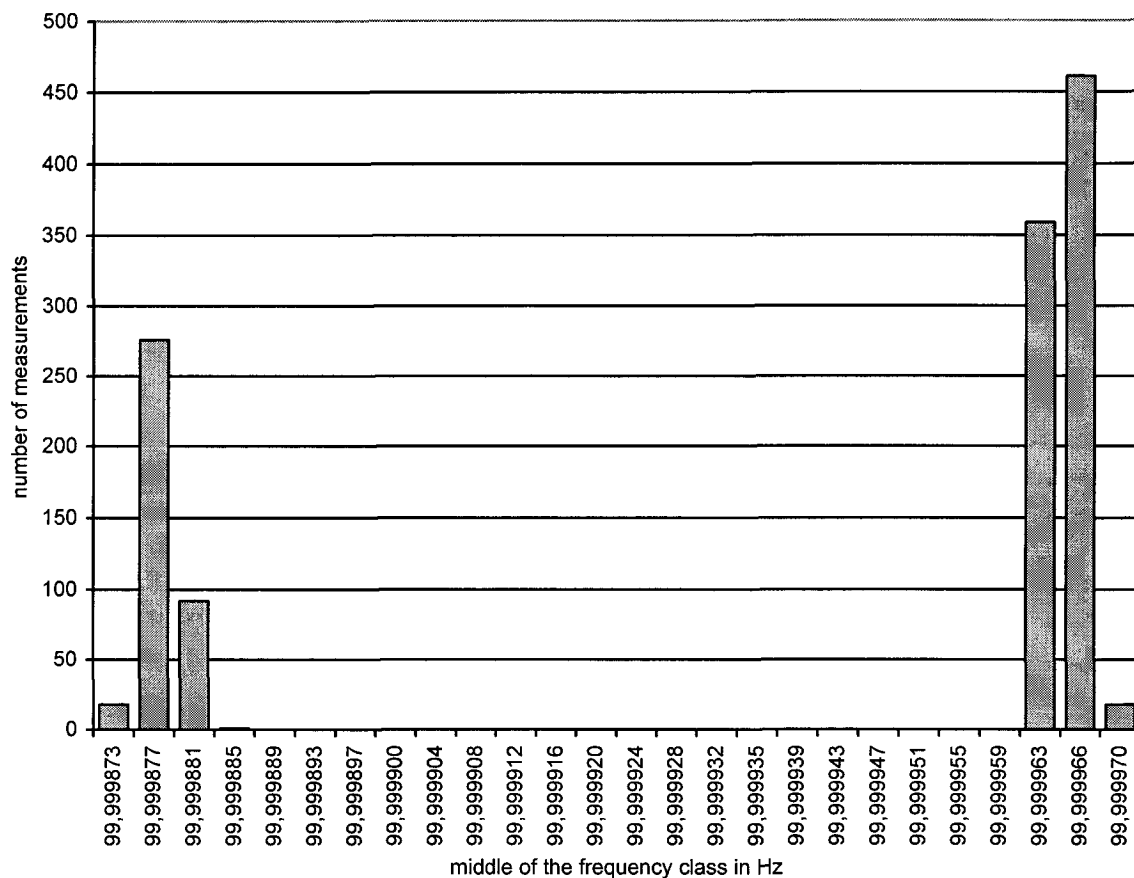

Measurement diagram

FCC Part 15.323(e.4) Frame Period and jitter


Testprocedure ANSI 63.17-1998 6.2.3

UCPS

EUT	Cordless Telephone
Model	DCT2900 Portable Part
Applicant	Teledex LLC
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.3 Frame Period and jitter

Width of the time class	0,007920 μ s
Mean	9,998718 ms
Deviation	0,000032
Max-Min	0,198000 μ s
Test result	Verdict = PASS

Histogram

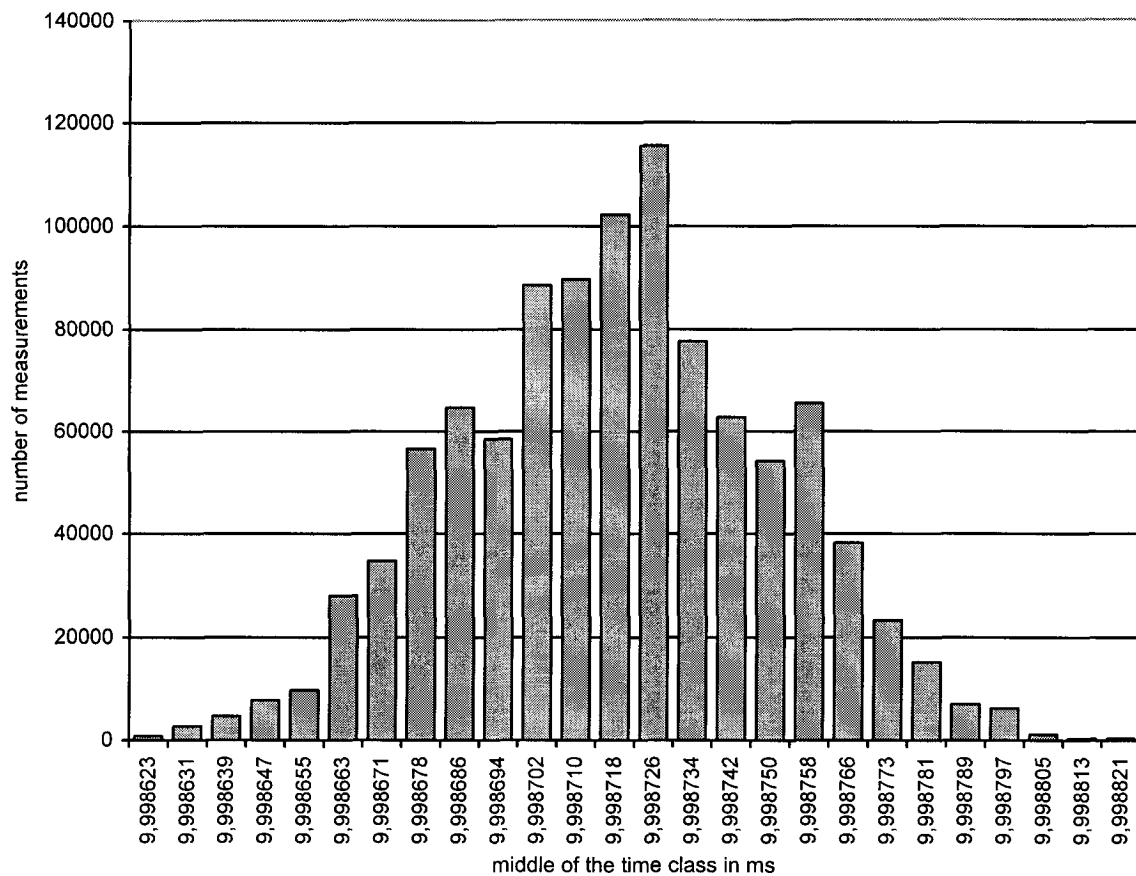

Measurement diagram

Appendix T

Frequency stability

FCC Part 15.323(f) Frequency Stability


Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2900 Portable Part
Applicant	Teledex LLC
Temperature	25 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability

Power supply	Vnom
Frequency of carrier	1924,980192 MHz
Measured mean	1924,980192 MHz
Stability (supply temp)	reference

Stability over time	fmax : 2,95 ppm fmin : 5,08 ppm
Result	Verdict = PASS

Histogram

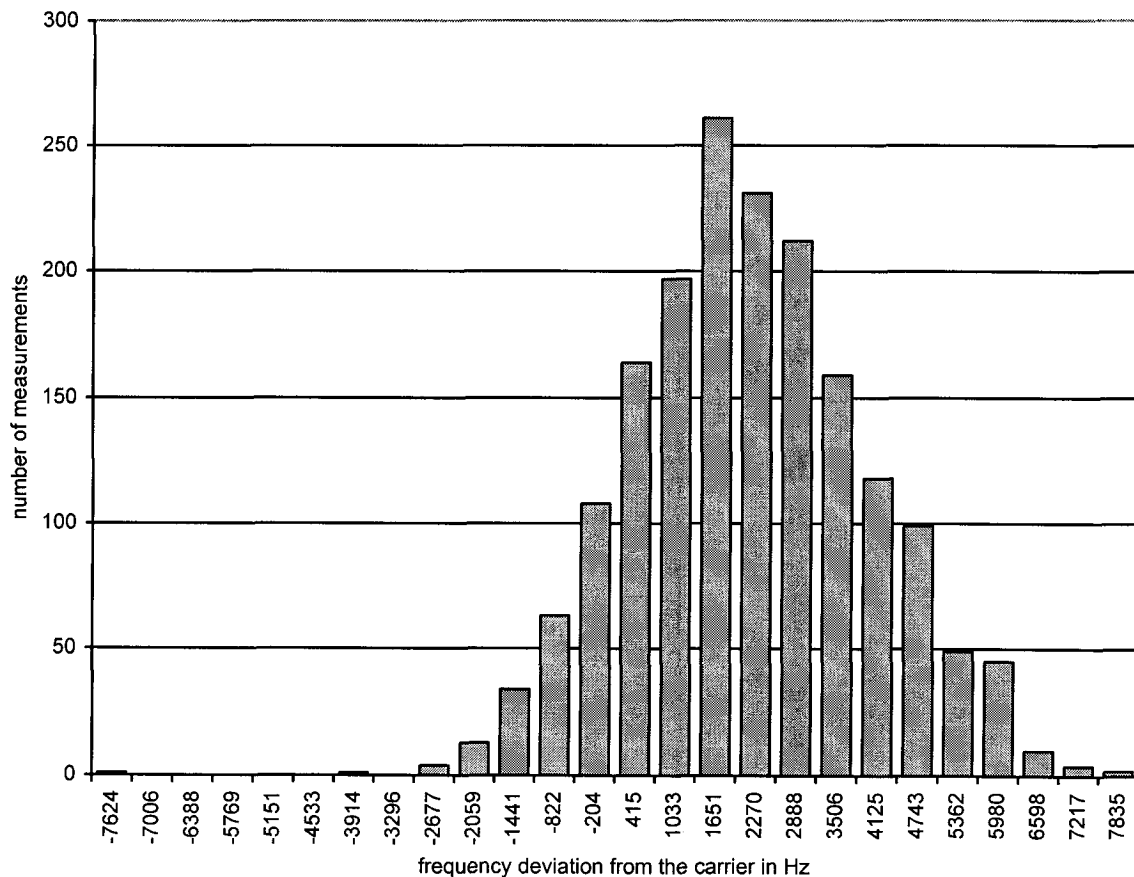


Measurement diagram

FCC Part 15.323(f) Frequency Stability

Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2900 Portable Part
Applicant	Teledex LLC
Temperature	40 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability
Power supply	Vnom
Frequency of carrier	1924,982901 MHz
Measured mean	1924,970530 MHz
Stability (supply temp)	6,43 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,33 ppm fmin : 2,09 ppm
Result	Verdict = PASS

Histogram

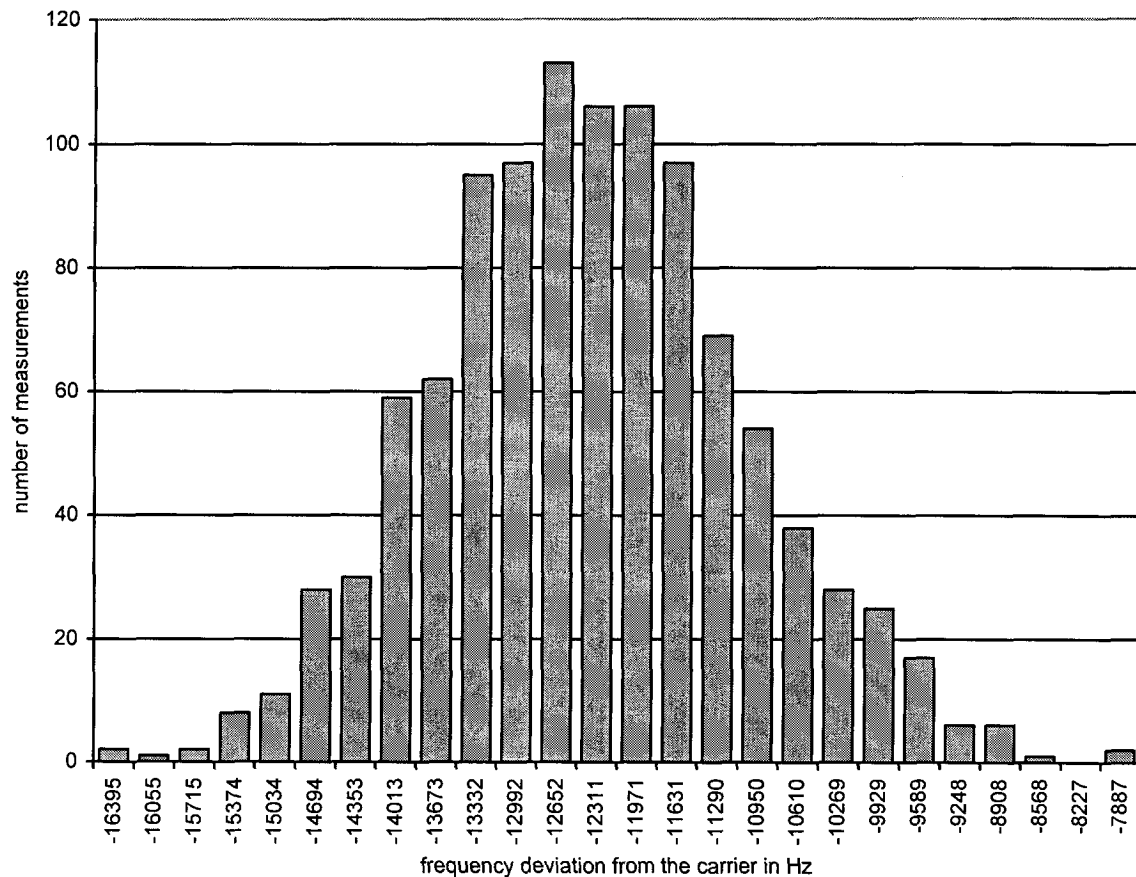


Measurement diagram

FCC Part 15.323(f) Frequency Stability

Testprocedure ANSI 63.17-1998 6.2.1

EUT	Cordless Telephone
Model	DCT2900 Portable Part
Applicant	Teledex LLC
Temperature	-10 °C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.1 Frequency stability
Power supply	Vnom
Frequency of carrier	1924,990791 MHz
Measured mean	1924,995693 MHz
Stability (supply temp)	-2,55 ppm
Result	Verdict = PASS
Stability over time	fmax : 4,61 ppm fmin : 3,91 ppm
Result	Verdict = PASS

Histogram

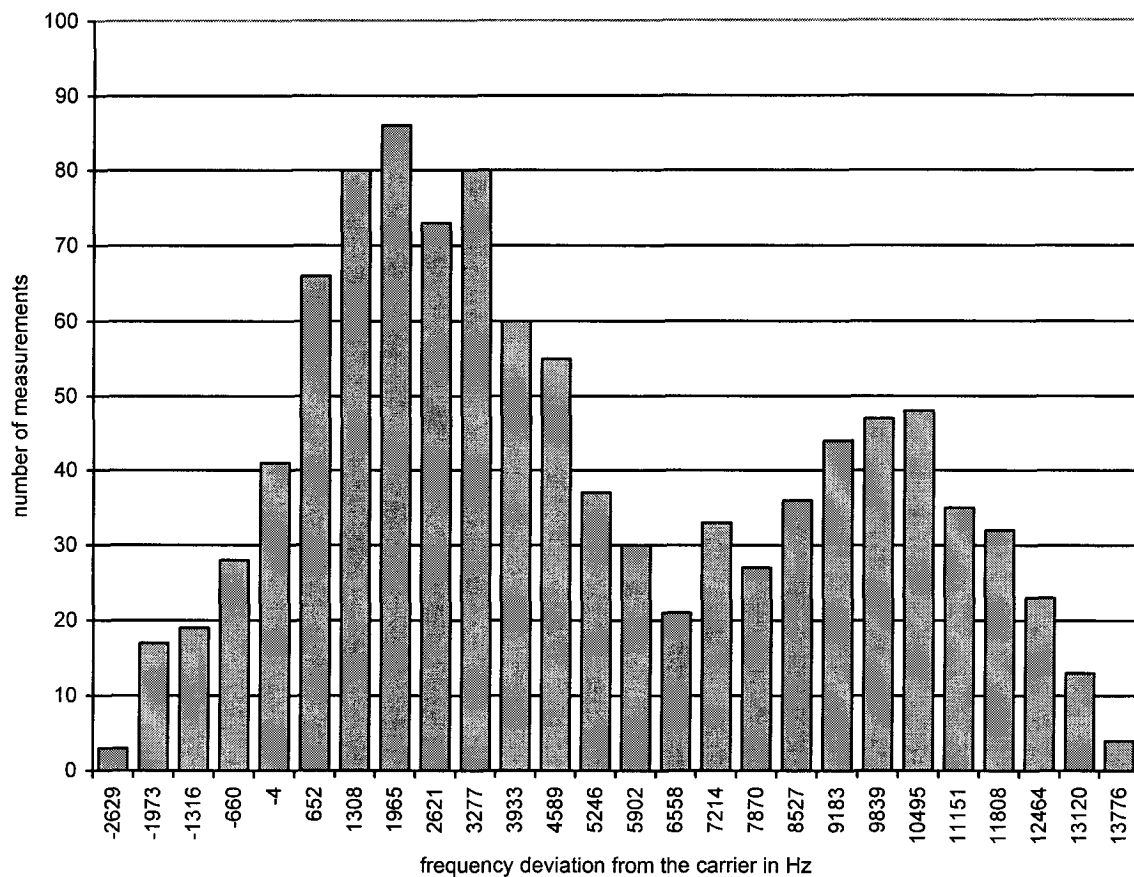


Measurement diagram

Appendix U

Receiver spurious emissions


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:192.505MHz Emax:32.06dBµV/m RBW: 100 kHz

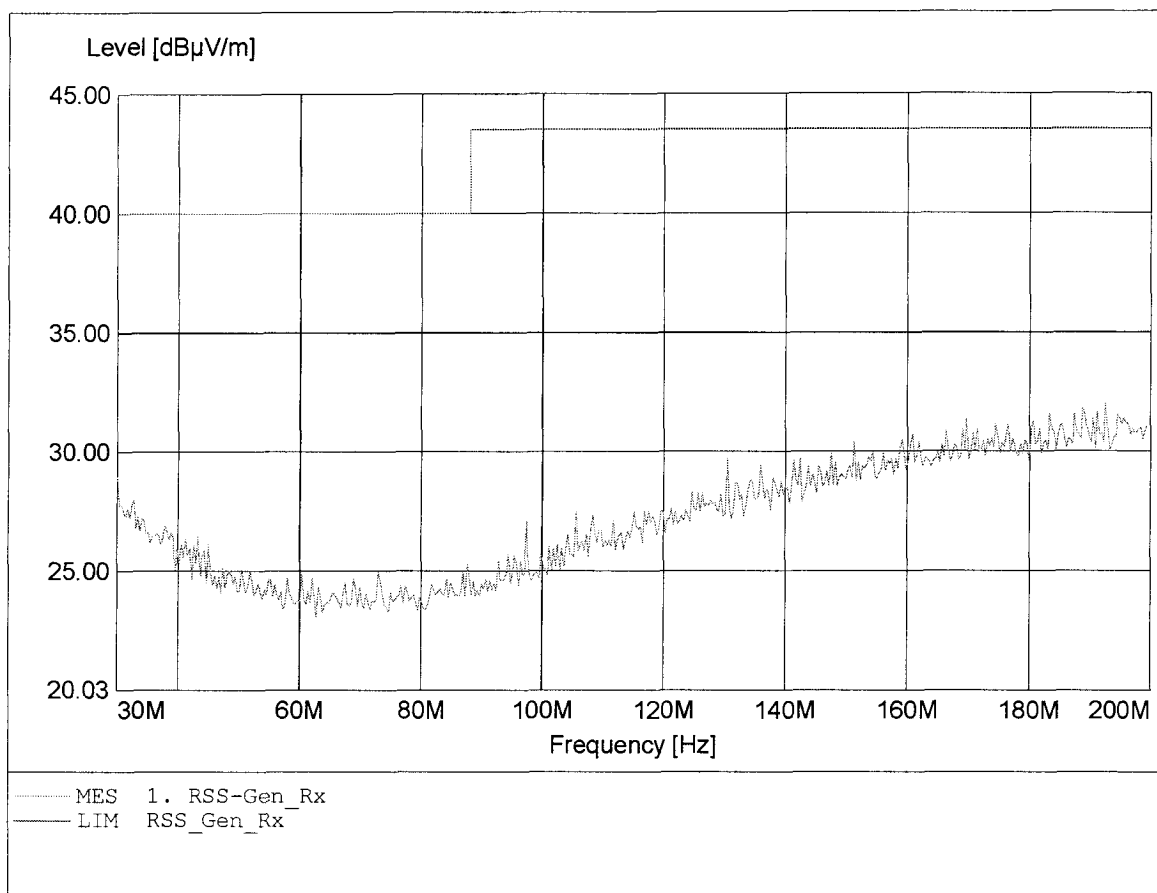


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:192.164MHz Emax:32.18dBµV/m RBW: 100 kHz

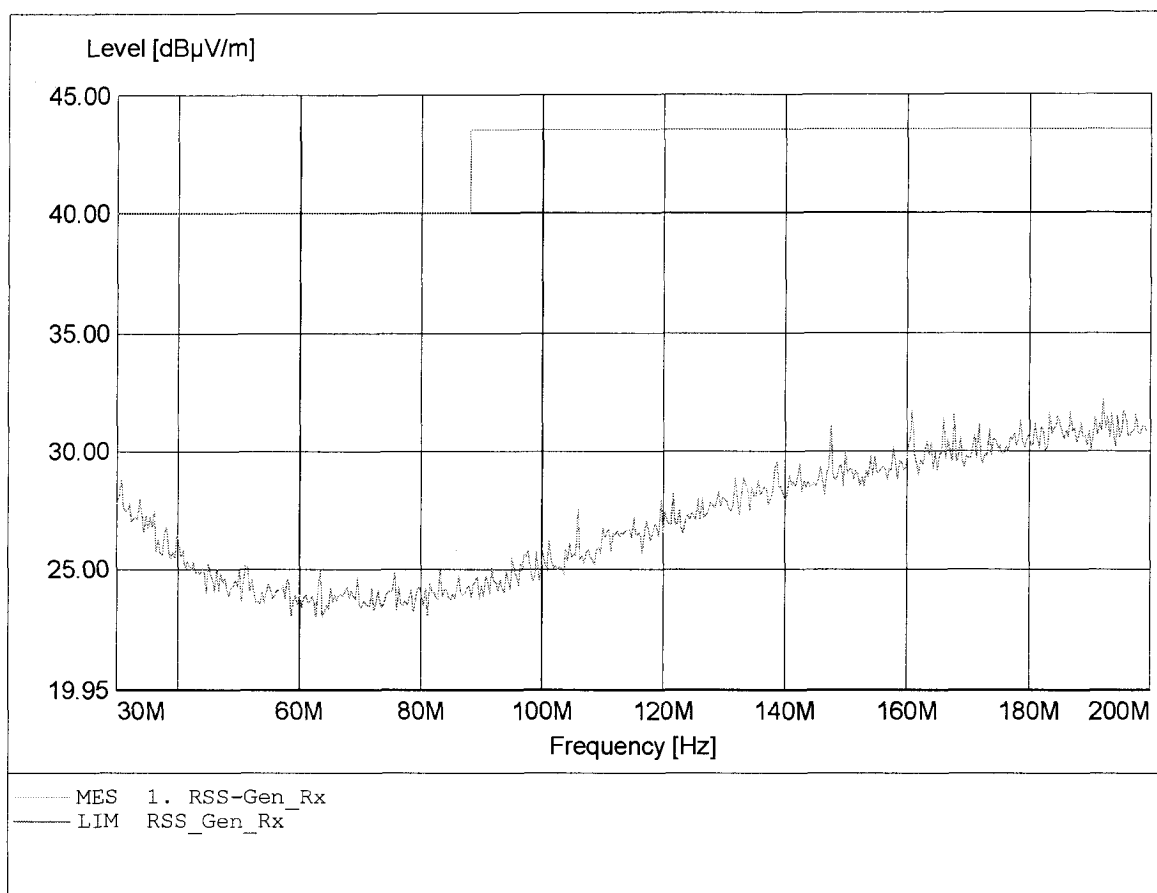


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:865.331MHz Emax:23.57dBµV/m RBW: 100 kHz

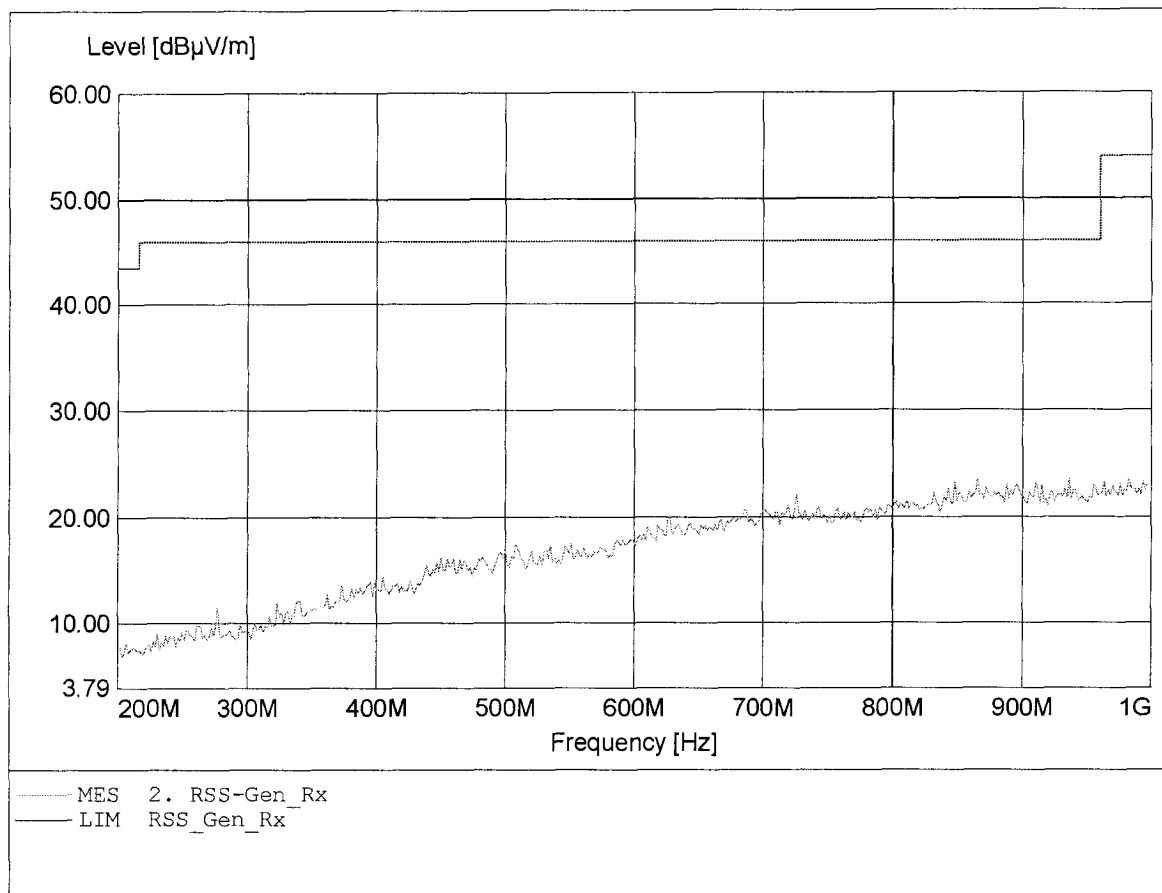


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 969.539MHz Emax: 23.53dB μ V/m RBW: 100 kHz

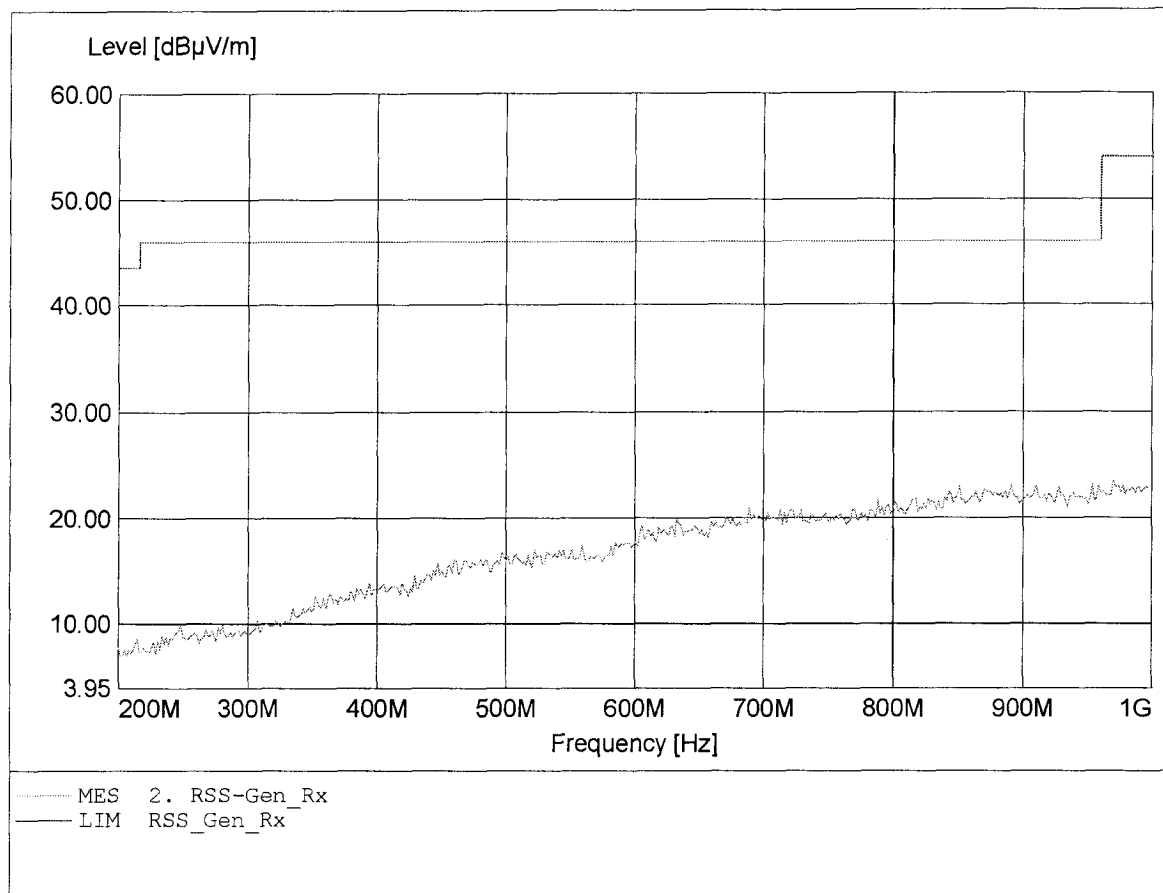


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.940GHz Emax:50.30dBμV/m RBW: 1 MHz

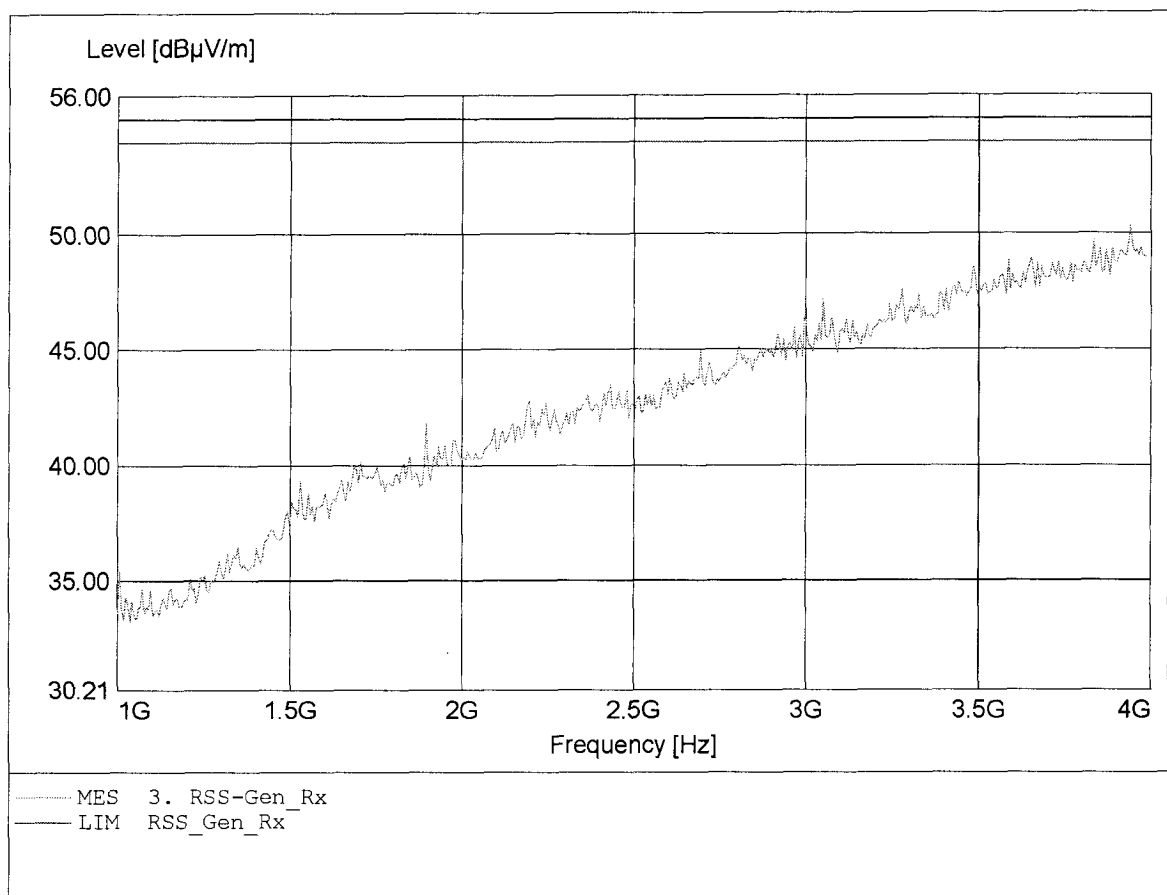


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:3.970GHz Emax:49.57dBμV/m RBW: 1 MHz

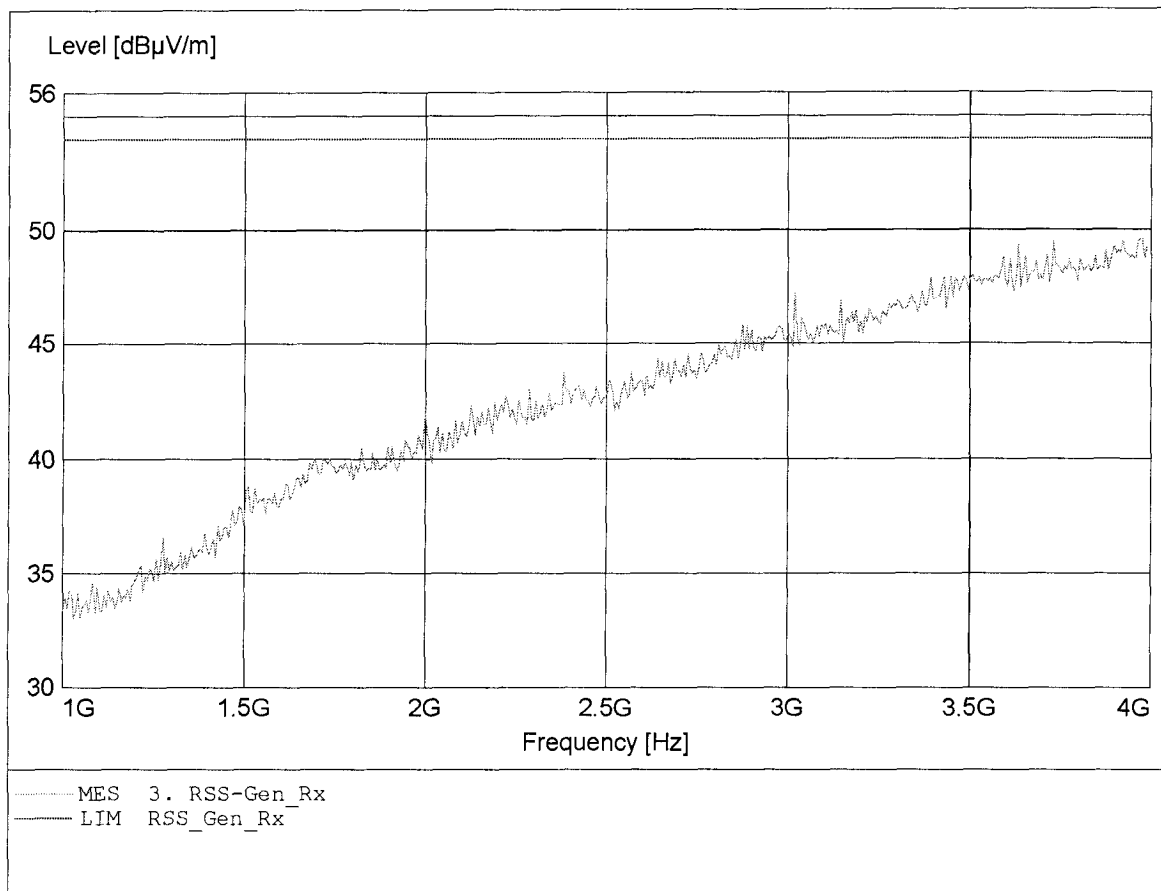


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.928GHz Emax:47.23dBuV/m RBW: 1 MHz

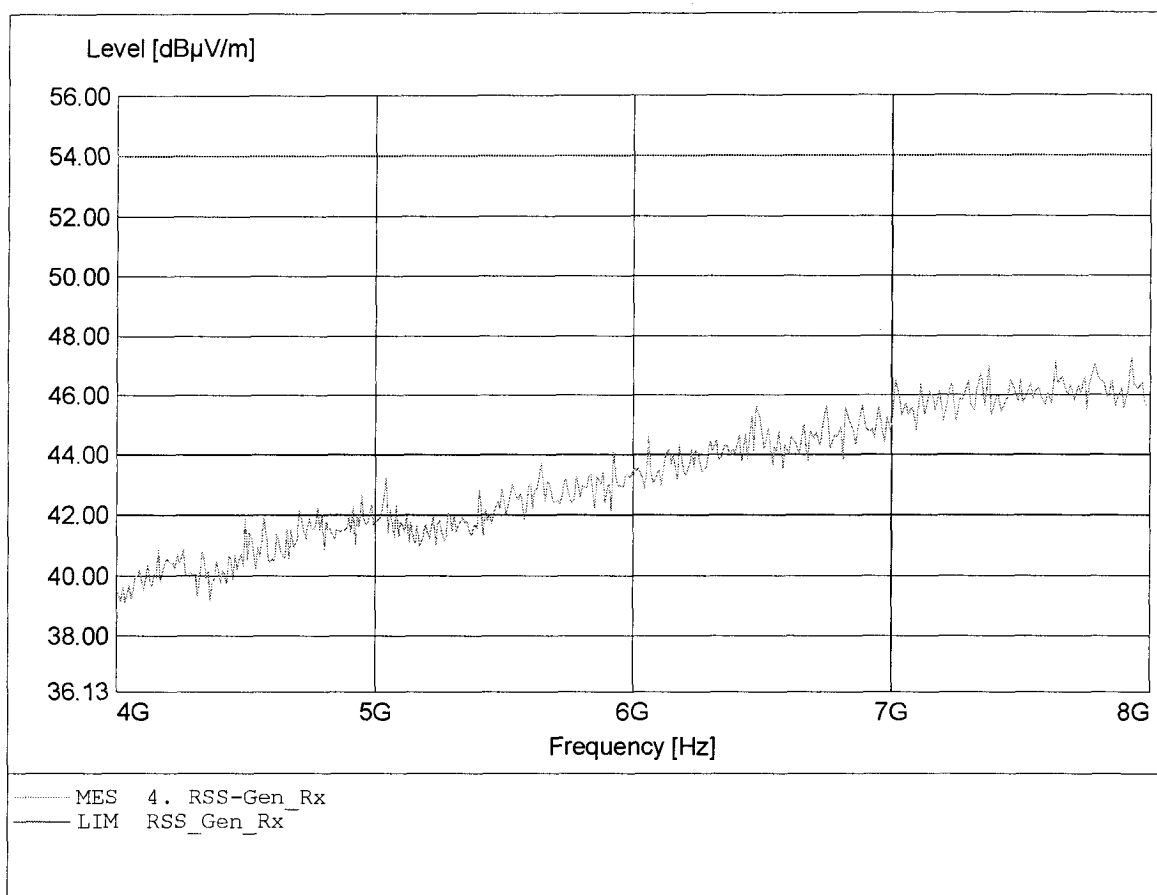


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:7.896GHz Emax:48.02dBμV/m RBW: 1 MHz

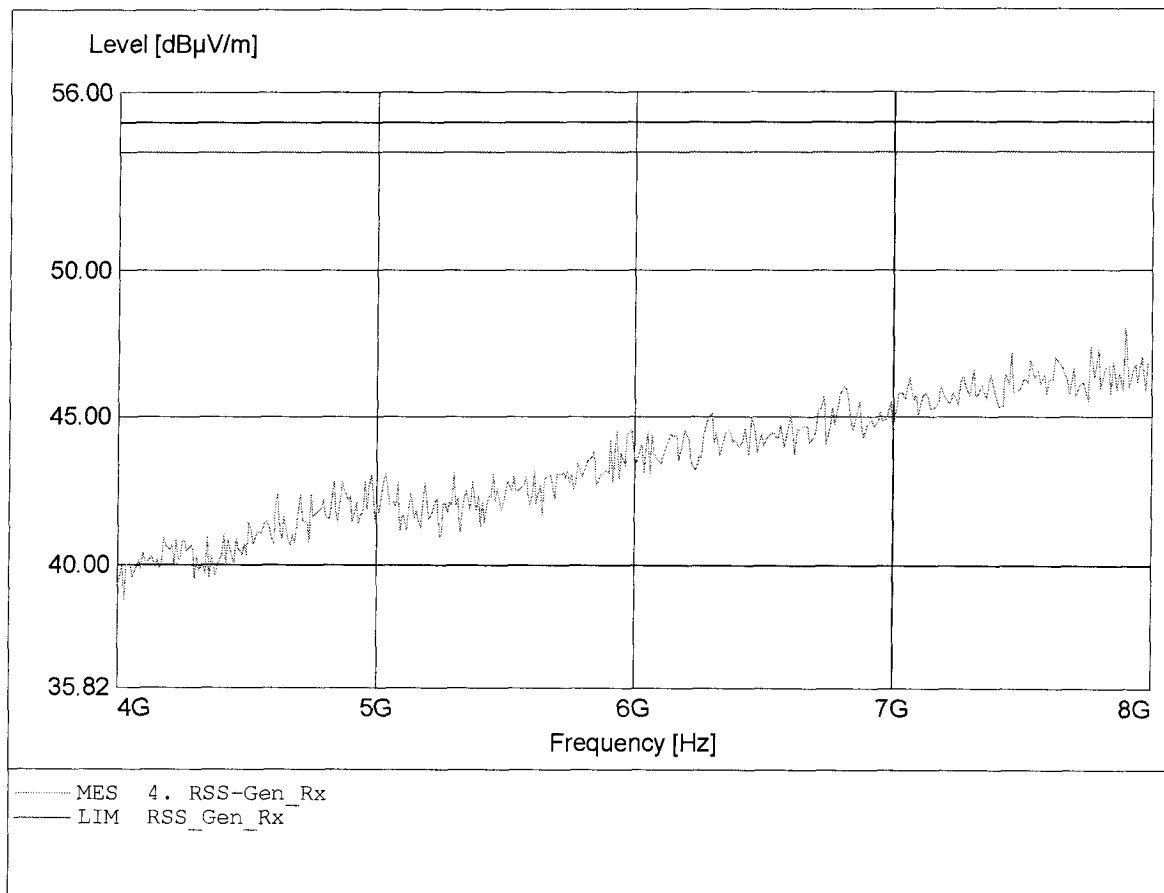


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:11.848GHz Emax:46.70dBμV/m RBW: 1 MHz

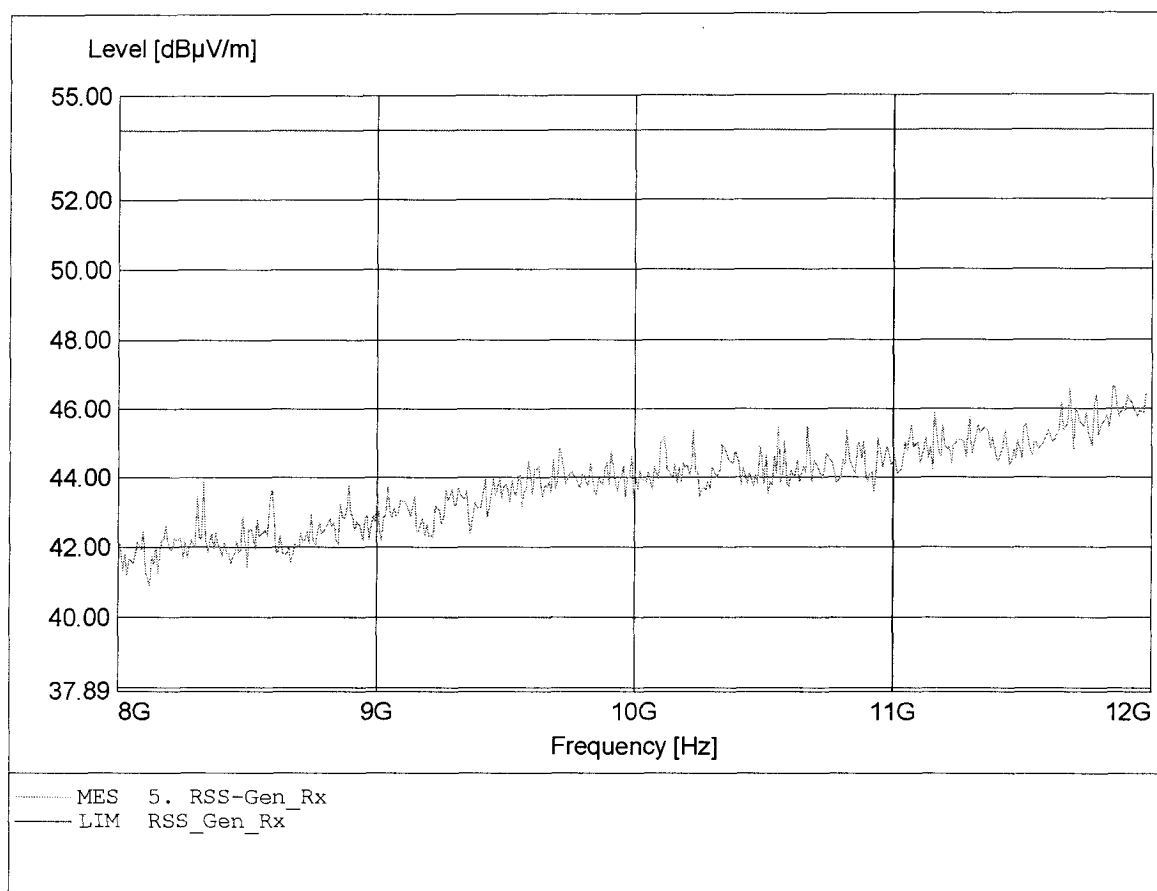


Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq: 11.952GHz Emax: 46.28dBμV/m RBW: 1 MHz

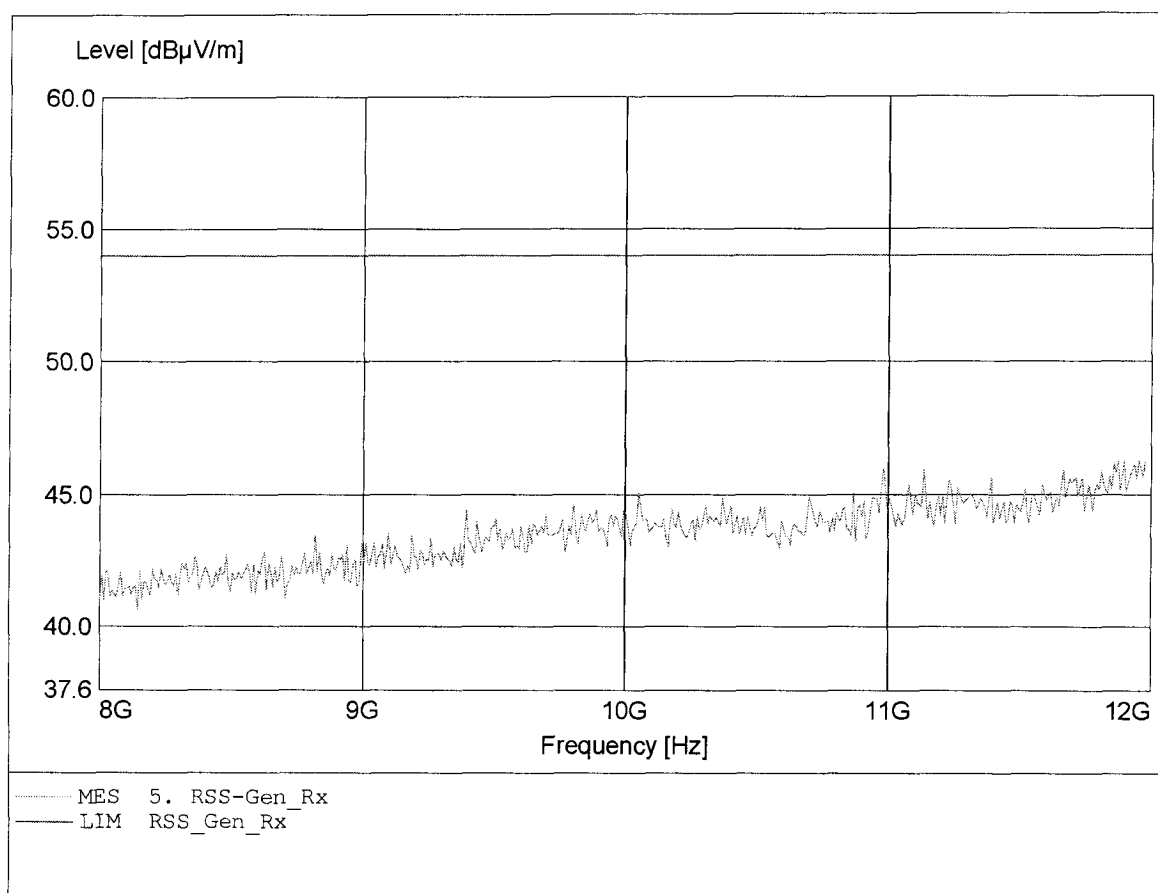

Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:15.727GHz Emax:51.31dBμV/m RBW: 1 MHz

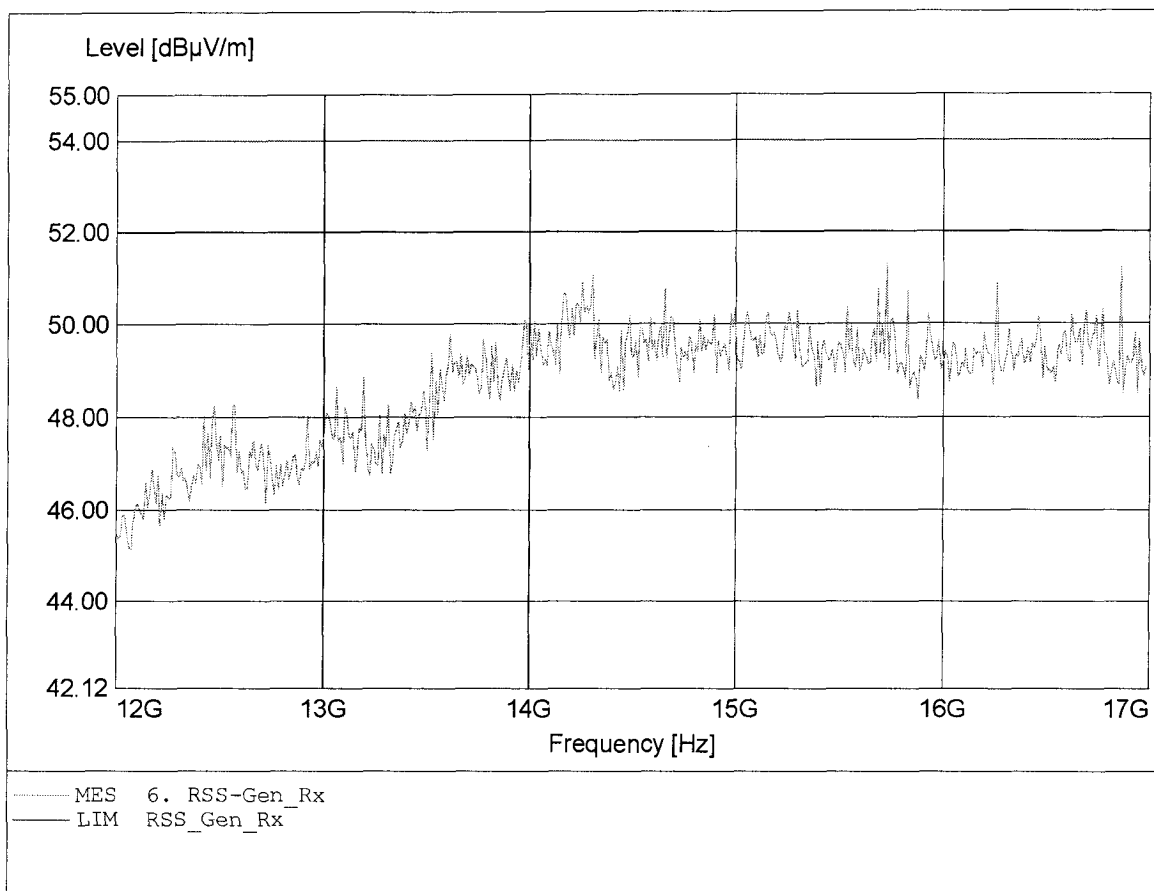

Field Strength under normal conditions
Standards Industry Canada, RSS-GEN

Approval Holder: TELEDEX LLC
EUT: CORDLESS TELEPHONE
Model / Channel: DCT2910 PORTABLE PART / 2
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.60 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL025, ampl.
Comment 2: Freq:14.445GHz Emax:51.99dBµV/m RBW: 1 MHz

