

Report No.: 0606266
PC Live Mode
PC Mains 'L'
Model: C18

Tested By:Hong, Report No.:0606266

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s


Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

2	1	9k	30M	EW0699
---	---	----	-----	--------

12	9k	30M	EW0192
----	----	-----	--------

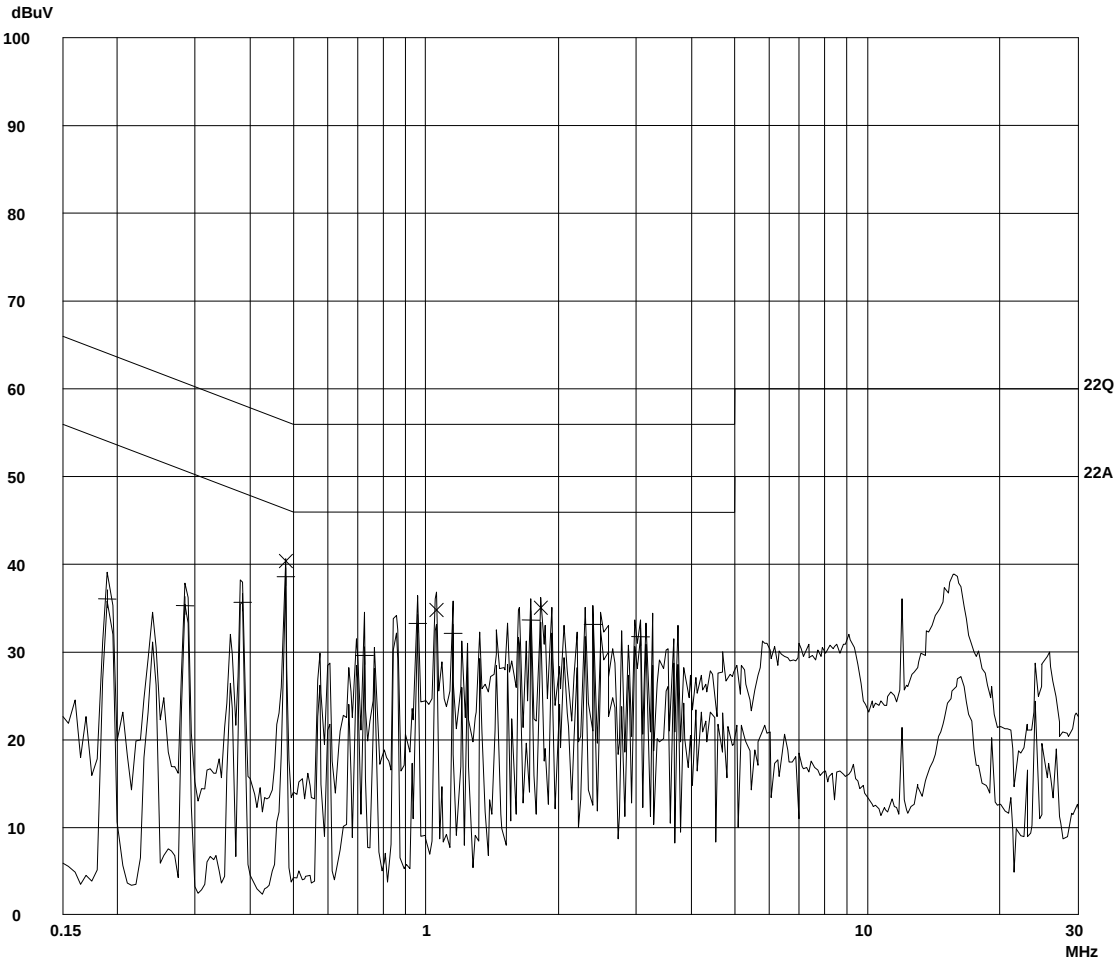

Report No.: 0606266
 PC Live Mode
 PC Mains 'L'
 Model: C18

Tested By: Hong, Report No.: 0606266

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.48000	40.3	56.4
1.05500	34.7	56.0
1.82000	35.0	56.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

0.19000	36.0	54.1
0.28500	35.3	50.7
0.38500	35.6	48.1
0.48000	38.5	46.4
0.72500	29.6	46.0
0.95500	33.2	46.0
1.15000	32.0	46.0
1.72500	33.6	46.0
2.39500	33.1	46.0
3.06500	31.7	46.0

* limit