



Test Report

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No ER3437-1

Client OSRAM SYLVANIA INC
Sivakumar Thangavelu

Address 200 Ballardvale Street
Wilmington, MA 01887

Phone 978-750-3865

Items tested iQ ZigBee RF Controller
FCC ID DZO-OSREFRMG13W
IC ID 23566 -OSREFRMG13W
FRN 0021513163

Equipment Type Digital Transmission System
Equipment Code DTS

FCC/IC Rule Parts 47 CFR 15.247, RSS-247 Issue 2

Test Dates November 17th and December 1st, 2017

Results As detailed within this report

Prepared by 
Zachary Johnson – EMC Engineer

Authorized by 
Chris Reynolds – EMC Supervisor

Issue Date 2/16/2018

Conditions of Issue This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 32 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation	5
<i>Statement of Conformity</i>	6
Modifications Required for Compliance	6
Test Results	7
<i>Bandwidth</i>	7
<i>Radiated Spurious Emissions</i>	13
<i>Conducted Spurious Emissions</i>	17
<i>AC Line Conducted Emissions</i>	26
<i>Occupied Bandwidth</i>	28
Measurement Uncertainty.....	31
Conditions Of Testing.....	32

Form Final Report REV 12-07-15



Summary

This test report supports an application for certification of a transmitter operating pursuant to 47 CFR 15.247 and RSS-247. The product is the iQ ZigBee RF Controller. It is a transmitter that operates in the range 2405-2480MHz.

We found that the product met the above requirements without modifications. The test sample was received in good condition on November 17th, 2017.

Test Methodology

All testing was performed according to the following rules/procedures/documents;
CFR 47 Part 15.247, RSS-247 Issue 2, RSS-Gen Issue 4, FCC KDB 558074 D01 DTS
Measurement Guidance v04 and ANSI C63.10-2013.

Radiated emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. AC line conducted emissions testing was performed with a 50 Ω /50 μ H LISN. The EUT operating voltage was 120VAC at 60Hz.

RF measurements were performed at the antenna port.

The environmental conditions were as shown below.

Date	Temperature	Humidity
November 17, 2017	25°C	21%RH
December 1, 2017	22°C	29%RH

The following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

Product Tested - Configuration Documentation

EUT Configuration										
Work Order:	R3437									
Company:	OSRAM SYLVANIA INC									
Company Address:	200 Ballardvale Street									
	Wilmington, MA, 01887									
Contact:	Sivakumar Thangavelu (3)									
	MN			PN			SN			
EUT:	ZigBee 2.5 GHz RF Module			--			Sample 1			
EUT Description:	ZigBee 2.5 GHz RF Module for Lighting									
EUT Max Frequency:	2488 MHz									
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under test	comment
DC/Battery	Power DC	1	1	Power DC	No	No	0.05	in	yes	
I/O	3 Wire	1	1	Twisted Pair	No	No	0.05	in	yes	
Software Operating Mode Description:										
Constantly transmitting. Channels tested 11, 18, 26 (2405, 2440, and 2480MHz respectively)										

Statement of Conformity

The iQ ZigBee RF Controller has been found to conform to the following parts of 47 CFR and RSS 247 as detailed below:

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	The antenna for this device is integrated hardwired to the PCB with a gain of -0.5dBi.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	EUT meets the AC Line conducted emissions requirements of this section.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.6				Occupied Bandwidth measurements were made.

Modifications Required for Compliance

No modifications required for Compliance

Test Results

Bandwidth


LIMIT

The minimum 6 dB bandwidth shall be at least 500 kHz. [15.247(a) (2)]


MEASUREMENTS / RESULTS

6dB Bandwidth					
Date: 12/1/2017		Company: OSRAM SYLVANIA INC		Work Order: R3437	
Engineer: Arik Zwirmer		EUT: ZigBee 2.5 GHz RF Module		Operating Voltage/Frequency: 120V / 60Hz	
Temp: 22°C		Humidity: 29%	Pressure: 1010mBar		
Frequency Range: 2402-2480 MHz		Measurement Type: Conducted			
Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04					
Notes:					
Frequency (MHz)	Reading (kHz)		6dB Bandwidth		
			Limit (kHz)	Margin (kHz)	Result (Pass/Fail)
			≥500	1175	Pass
			≥500	1160	Pass
			≥500	1135	Pass
Test Site: CEMI 6		Cable: None	Attenuator: 2121 30dB Pad		
Analyzer: 2093 SA		Copyright Curtis-Straus LLC 2000			


PLOTS

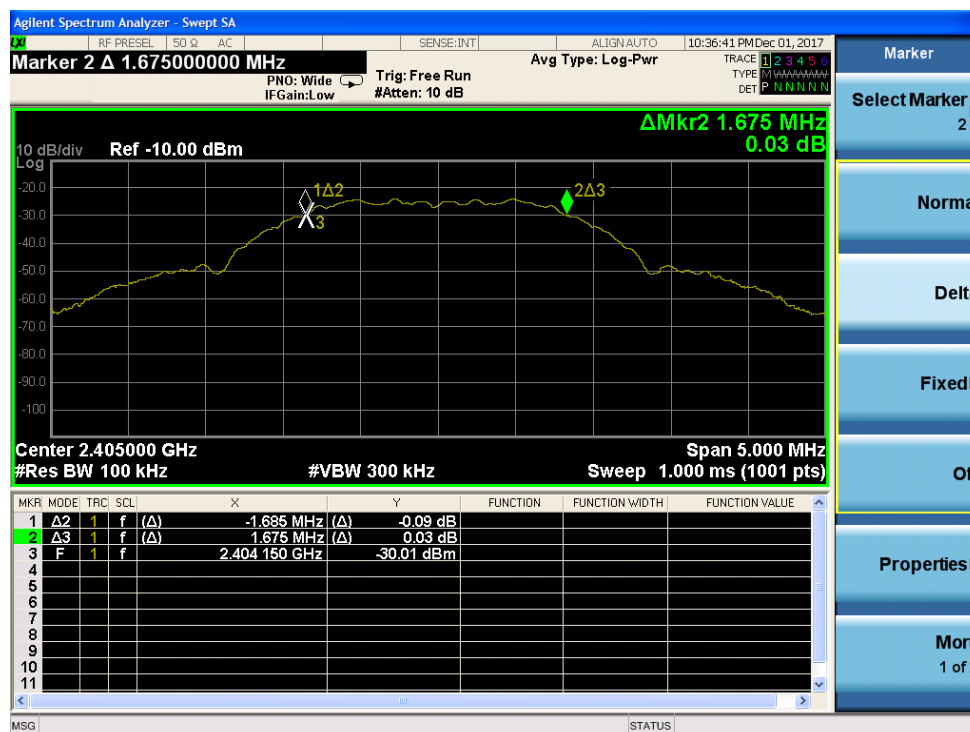

DTS Bandwidth, Low Channel

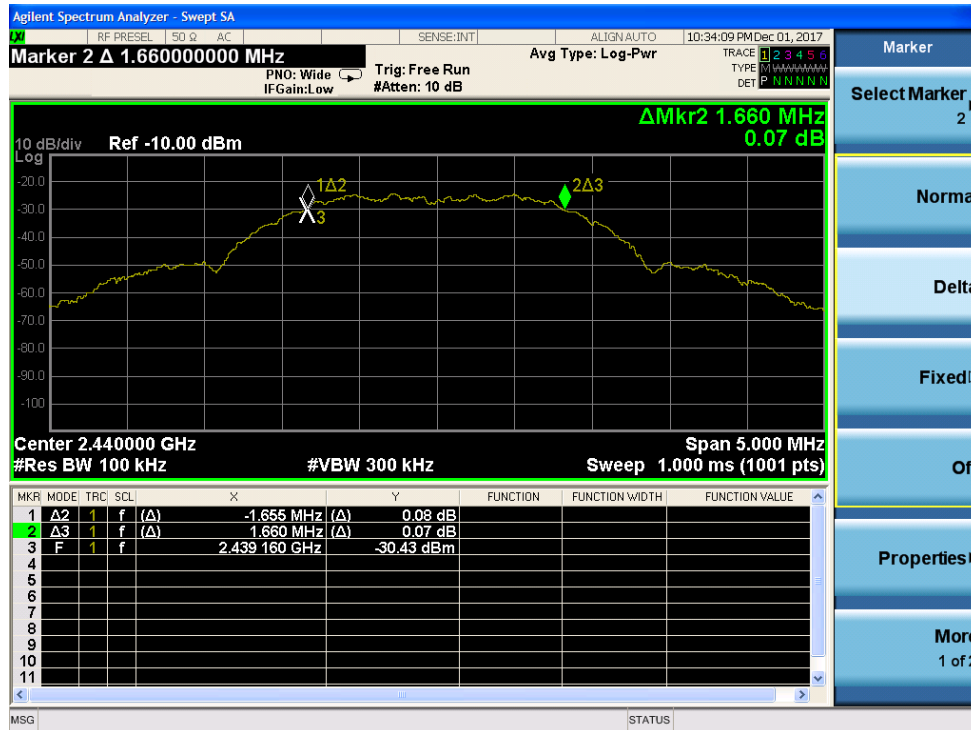

DTS Bandwidth, Mid Channel

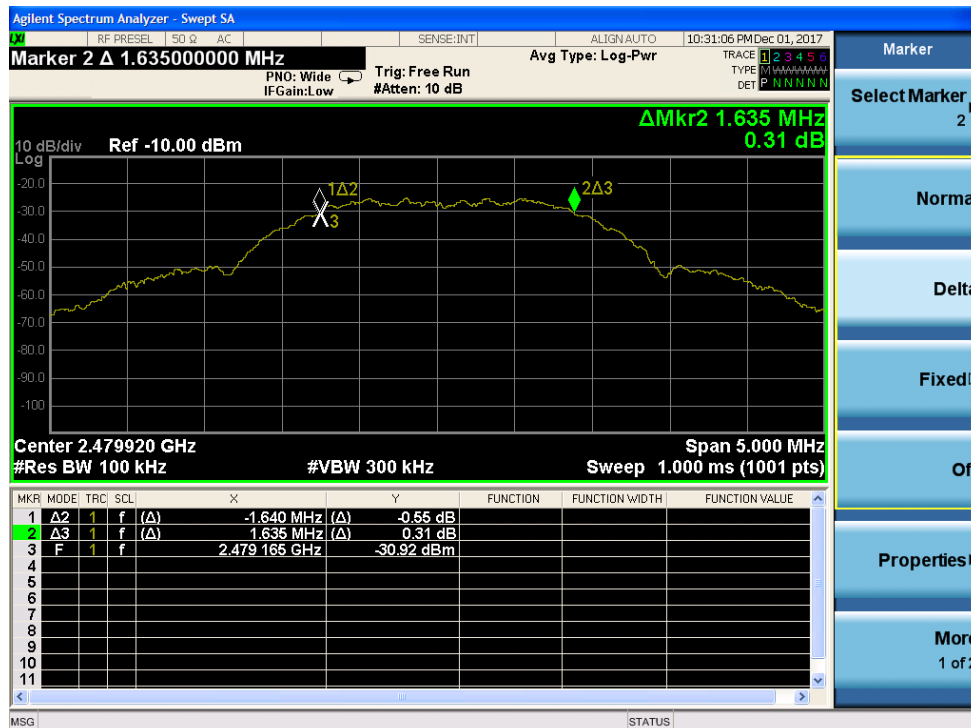

DTS Bandwidth, High Channel

Rev. 2/12/2018

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Preamps / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
API - 30dB 20W Attenuator	9KHz-40GHz	89-30-11	API Weinschel	703	2121	I	3/22/2018	3/22/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 9 of 33

Peak Power

LIMIT

Conducted Output Power


1 Watt

[15.247(b) (3)]


MEASUREMENTS / RESULTS

Peak Output Power							
Date: 12/1/2017		Company: OSRAM SYLVANIA INC			Work Order: R3437		
Engineer: Arik Zwirmer		EUT: ZigBee 2.5 GHz RF Module			Operating Voltage/Frequency: 120V / 60Hz		
Temp: 22°C		Humidity: 29%		Pressure: 1010mBar			
Frequency Range: 2405-2480 MHz				Measurement Type: Conducted			
Notes:							
Frequency	Adjusted Peak Reading	Correction Factor Added to Spectrum Analyzer (Attenuator + Dongle)	---	---	Limit	Margin	Result
(MHz)	(dBm)	(dB)	---	---	(dBm)	(dB)	(Pass/Fail)
2405	9.744	30.00	---	---	30.0	-20.26	Pass
2440	9.435	30.00	---	---	30.0	-20.57	Pass
2480	8.664	30.00	---	---	30.0	-21.34	Pass
Test Site: CEMI 6		Cable: None		Attenuator: 2121 30dB Pad			
Analyzer: 2093 SA							
Peak Output Power (dBm)= Peak Reading (dBm)+ Cable Loss (dB) + Attenuator Loss (dB)							


PLOTS

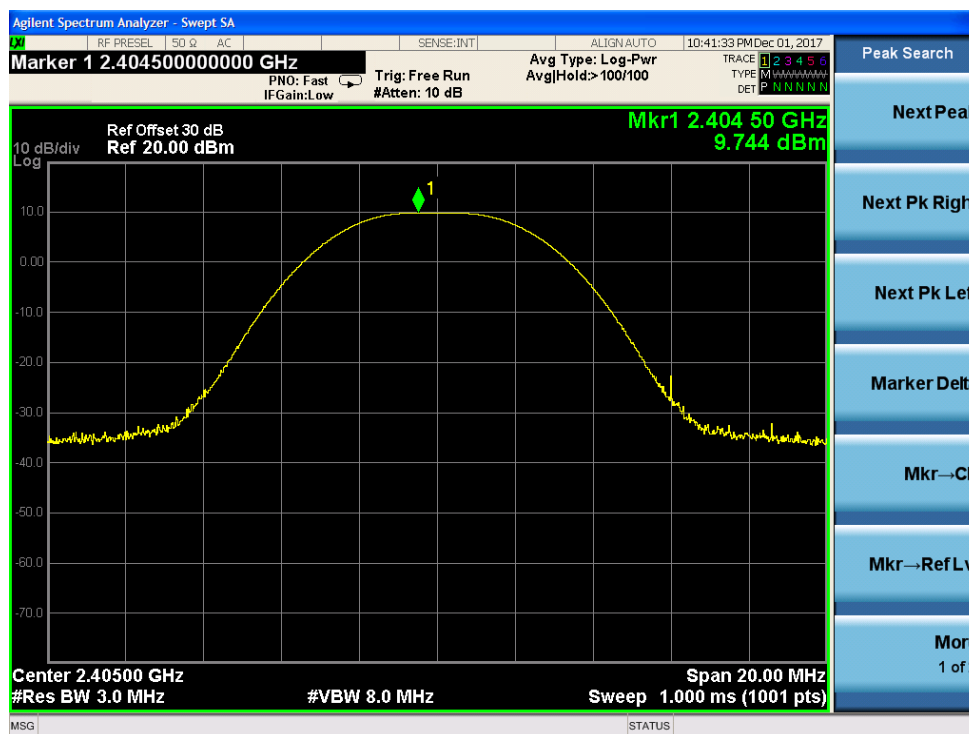

Peak Output Power, Low Channel

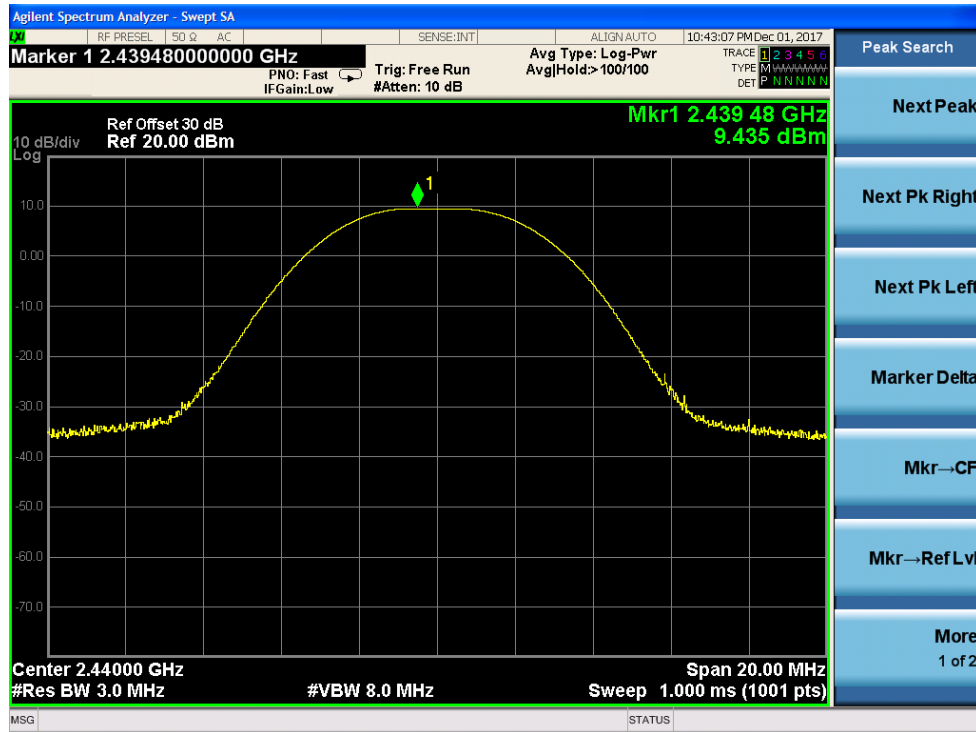

Peak Output Power, Mid Channel

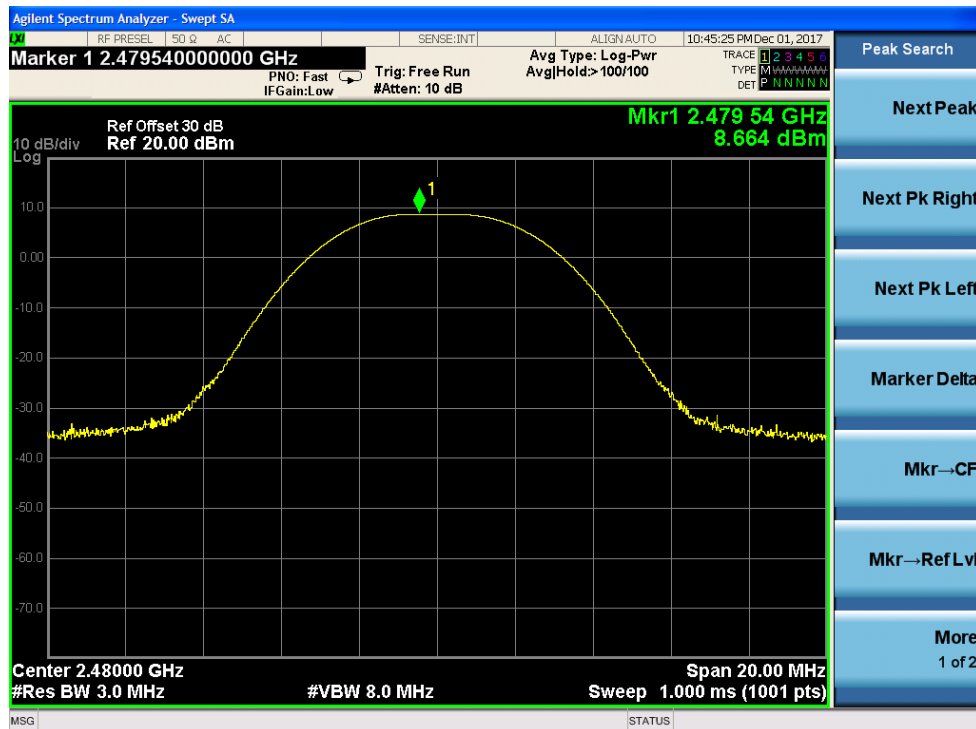

Peak Output Power, High Channel

Rev. 2/12/2018

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Preamps / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
API - 30dB 20W Attenuator	9KHz-40GHz	89-30-11	API Weinschel	703	2121	I	3/22/2018	3/22/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
[15.247(d)]

Testing has been performed on 3 channels (low, middle and high) when a harmonic of the transmitter was seen, otherwise center channel was tested. Worst case results are shown in the following data tables.

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company				Work Order - R3437					
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 3V Battery Powered					
Top Peaks Vertical 30-1000MHz				Test Site - CH-2					
Operator: ZJ				Conditions - 22.2°C; 27%RH; 996mBar					
Center Channel									
Frequency	Peak Reading	Correction Factor	Adjusted Peak Amplitude	Lim1: FCC_pt15_109_Class_B	Lim1 Margin	Lim1 Test Results	Worst Margin Lim1	Antenna Height	Turntable Azimuth
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
30	31.8	-7.7	24.1	40	-15.9	PASS	-15.9	100	225
120.137	33.6	-14.9	18.7	43.5	-24.8	PASS		150	225
196.355	35.3	-16.5	18.8	43.5	-24.7	PASS		200	0
466.33	35.7	-10	25.7	46	-20.3	PASS		200	135
825.473	33.4	-3.9	29.4	46	-16.6	PASS		100	135
983.413	31.8	-2.1	29.7	54	-24.3	PASS		200	315

Curtis Straus - a Bureau Veritas Company				Work Order - R3437					
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 3V Battery Powered					
Top Peaks Horizontal 30-1000MHz				Test Site - CH-2					
Operator: ZJ				Conditions - 22.2°C; 27%RH; 996mBar					
Center Channel									
Frequency	Peak Reading	Correction Factor	Adjusted Peak Amplitude	Lim1: FCC_pt15_109_Class_B	Lim1 Margin	Lim1 Test Results	Worst Margin Lim1	Antenna Height	EUT Azimuth
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
30	31.4	-7.7	23.7	40	-16.3	PASS		250	135
122.756	35.2	-14.8	20.4	43.5	-23.1	PASS		250	270
184.06	37.5	-17.5	20	43.5	-23.5	PASS		150	180
466.379	37.2	-10	27.2	46	-18.8	PASS		100	45
910.784	32.5	-2.7	29.8	46	-16.2	PASS	-16.2	100	315
994.447	32.2	-1.9	30.3	54	-23.7	PASS		250	90

30-1000MHz

Curtis Straus - a Bureau Veritas Company

Radiated Emissions Electric Field 3m Distance

1-6GHz Horizontal Data

Operator: AKZ

Notes:

E-ETH Channel 28 10dBm

Work Order - R3437

EUT Power Input - 3V (battery powered)

Test Site - CH-1

Conditions - 23°C; 23%RH; 1005mBar

EUT Maximum Frequency - 2480MHz

Data Taken at 01:14:14 PM, Friday, November 17, 2017

Frequency (MHz)	Raw Peak Reading (dBμV)	Raw Avg Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_1 09_ClassB_ Peak (dBμV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBμV/m)	Av Lim: FCC_pt15_1 09_ClassB_ AVG (dBμV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Average Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1288.9	47.6	38.3	-8.4	39.2	74	-34.7	PASS		29.9	54	-24.1	PASS		385	20
2201.9	45.9	37.2	-106.5	-60.6	74	-134.5	PASS		-69.3	54	-123.3	PASS		275	25
2487.8	48.1	40.3	-105.8	-57.7	74	-131.7	PASS		-65.5	54	-119.5	PASS		275	9
2810.3	48.1	39	-0.4	47.6	74	-26.3	PASS	-26.3	38.6	54	-15.4	PASS	-15.4	386	281
3606.8	44.3	36.4	-3.7	40.6	74	-33.4	PASS		32.7	54	-21.3	PASS		220	388
5800	43.5	34.7	0.7	44.2	74	-29.8	PASS		35.4	54	-18.6	PASS		203	227

Curtis Straus - a Bureau Veritas Company

Radiated Emissions Electric Field 3m Distance

Top Peaks Vertical 1-6GHz

Operator: Chris Bramley

Notes:

2440MHz

Work Order - R3366

EUT Power Input - 3V (battery powered)

Test Site - Chamber 1

Conditions - 25.2°C; 21%RH; 1006mBar

Witnessed by - Siv Thangavelu

EUT Maximum Frequency - 2480MHz

Data Taken at 05:52:55 PM, Friday, November 17, 2017

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_109 _ClassB_Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109 _ClassB_AVG (dBμV/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2191.25	49.5	-3.7	45.8	74	-28.2	PASS		54	-8.2	PASS		100	128
2808.75	48.8	-0.4	48.5	74	-25.5	PASS		54	-5.5	PASS		300	240
5851.88	49.7	0.7	50.4	74	-23.6	PASS	-23.6	54	-3.6	PASS	-3.6	300	134

1-6GHz Mid Channel



Curtis Straus - a Bureau Veritas Company
Radiated Emissions Electric Field 1m Distance
Top Peaks Horizontal 6-18GHz
Operator: AKZ
Notes:
Work Order - R3366
EUT Power Input - 3V (battery powered)
Test Site - CH
Conditions - 23°C; 23%RH; 1005mBar
EUT Maximum Frequency - 2480MHz

Data Taken at 01:28:38 PM, Friday, November 17, 2017

Frequency (MHz)	Raw Peak Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	PK Lim: FCC_pt15_1 09_ClassB_ Peak (dBμV/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_1 09_ClassB_ AVG (dBμV/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
12694.5	44.7	10.6	55.4	83.5	-28.1	PASS		63.5	-8.1	PASS		175	73
13299	44.9	11.2	56.1	83.5	-27.4	PASS		63.5	-7.4	PASS		100	209
14579.1	46.8	10	56.8	83.5	-26.7	PASS		63.5	-6.7	PASS		150	172
15107.1	45.8	10.8	56.6	83.5	-26.9	PASS		63.5	-6.9	PASS		200	29
17013.6	45.8	16.2	62.1	83.5	-21.4	PASS	-21.4	63.5	-1.4	PASS	-1.4	200	208
17970.9	43.7	17.5	61.2	83.5	-22.3	PASS		63.5	-2.3	PASS		200	243

Curtis Straus - a Bureau Veritas Company
Radiated Emissions Electric Field 3m Distance
6-18GHz Vertical Data
Operator: Chris Bramley
Notes:
Work Order - R3366
EUT Power Input - 3V (battery powered)
Test Site - Chamber 1
Conditions - 25.2°C; 21%RH; 1006mBar
Witnessed by - Siv Thangavelu
EUT Maximum Frequency - 2480MHz
2440MHz

Frequency (MHz)	Raw Peak Reading (dBμV)	Raw Avg Reading (dBμV)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dBμV/m)	Pk Lim: FCC_pt15_109 _ClassB_Peak (dBμV/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dBμV/m)	Av Lim: FCC_pt15_109 _ClassB_AVG (dBμV/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
17920.5	46.9	46.9	13.6	60.5	83.5	-23	PASS	-23	60.5	63.5	-3	PASS	-3	125	290

6-18GHz Center Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Emissions Table

Date: 17-Nov-17				Company: OSRAM				Work Order: R3437							
Engineer: Chris Bramley				EUT Desc: E-ETH				EUT Operating Voltage/Frequency: 3Vdc Battery							
Temp: 25.2°C				Humidity: 21%				Pressure: 1006mBar							
Frequency Range: 18-25GHz								Measurement Distance: 0.1 m							
Notes: Channel 11(2405MHz), Channel 18(2440MHz), Channel 26(2480MHz)								EUT Max Freq: 2480MHz							
Power 10dBm															
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
No emissions found within 25dB of the limit															
Table Result:				--- by --- dB				Worst Freq:				--- MHz			
Test Site: EMI Chamber 1				Cable 1: Asset #2328											
Analyzer: Gold				Preamp: 18-26.5GHz				Antenna: 18-26.5GHz Horn							
CSsoft Radiated Emissions Calculator v1.017.197												Copyright Curtis-Straus LLC 2000			
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															

18-25GHz

Radiated Emissions Table

Date: 17-Nov-17		Company: Osram				Work Order: R3437									
Engineer: Arik Zwimer		EUT Desc: E-ETH				EUT Operating Voltage/Frequency: 3V (battery)									
Temp: 23°C		Humidity: 23%				Pressure: 1005mbar									
Frequency Range: 2390MHz and 2483.5MHz						Measurement Distance: 1 m									
Notes: High and Low Band Edge Readings						EUT Max Freq: 2480MHz									
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
H	2390.0	52.5	52.5	37.5	32.6	3.1	50.7	50.7	83.5	-32.8	Pass	63.5	-12.8	Pass	
V	2483.5	62.4	62.4	37.5	32.8	3.2	60.9	60.9	83.5	-22.6	Pass	63.5	-2.6	Pass	
Table Result:		Pass		by		-2.6 dB		Worst Freq:		2483.5 MHz					
Test Site: EMI Chamber 1				Cable 1: Asset #2457				Cable 2: Asset #2456				Cable 3: ---			
Analyzer: ---				Preamp: Asset #2111				Antenna: Blue Horn				Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.197															
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor															
Copyright Curtis-Straus LLC 2000															

Radiated Bandedges

Rev. 11/9/2017

Spectrum Analyzers / Receivers/Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental EXA Signal Analyzer(1118472)		9KHz-26.5GHz	N9010A-526;K	AT	MY51170010	1118472	I	7/25/2018	7/25/2017
Gold		100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/28/2018	2/28/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 1		719150	2762A-6	A-0015	30-1000MHz	1685	I	12/21/2018	12/21/2016
EMI Chamber 1		719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018	12/21/2016
Preamps/Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2311 PA		1-1000MHz	PAM-103	COM-POWER	441174	2311	II	10/29/2018	10/29/2017
2111 HF Preamp		0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II	10/29/2018	10/29/2017
HF (Yellow)		18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	10/16/2018	10/16/2017
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-Black Bilog		30-2000MHz	JB1	Sunol	A091604-2	1106	I	2/28/2019	2/28/2017
HF (White) Horn		18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test
Blue Horn		1-18Ghz	3117	ETS	157647	1861	I	2/14/2019	2/14/2017
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016	
TH A#2084		HTC-1	HDE		2084	II	3/23/2018	3/23/2017	
Cables		Range	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Asset #2456		9KHz-18GHz	MegaPhase			II	10/29/2018	10/29/2017	
Asset #2457		9KHz-18GHz	MegaPhase			II	10/29/2018	10/29/2017	
Asset #2466		9KHz-18GHz	MegaPhase			II	10/29/2018	10/29/2017	
Asset #2328		1 - 26.5GHz	PE350-72	Pasternack	1539	II	2/12/2019	2/12/2018	
Attenuators		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2489(6dB)		9KHz-18GHz				II	11/27/2018	11/27/2017	

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 16 of 33


Conducted Spurious Emissions

LIMITS


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth that contains the highest level of desired power based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.
[15.247(d)]


MEASUREMENTS / RESULTS

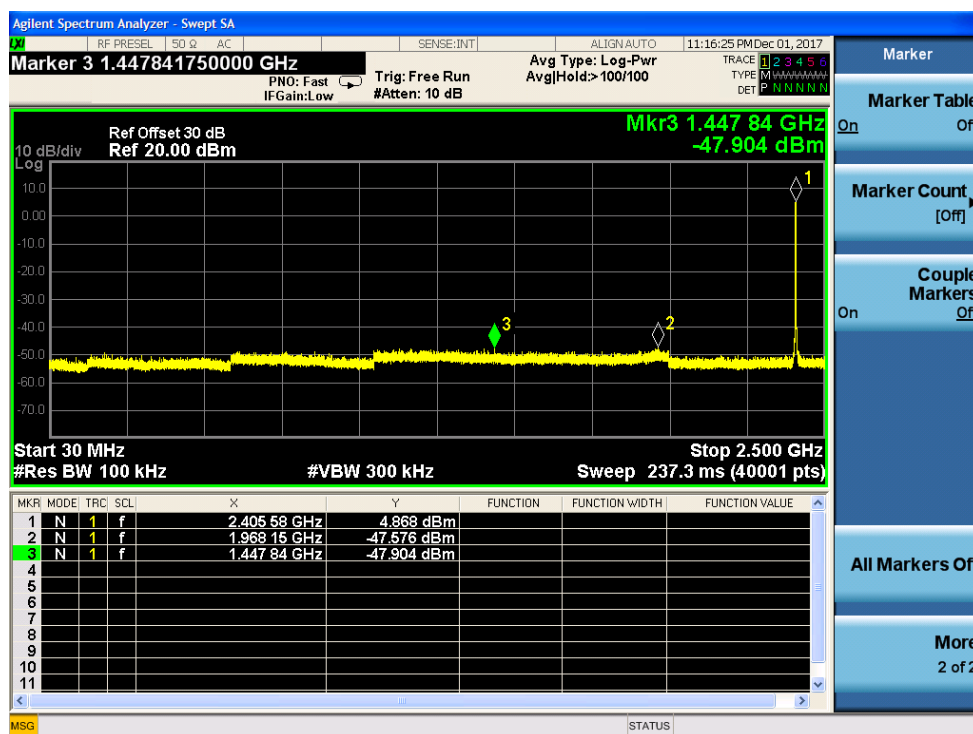

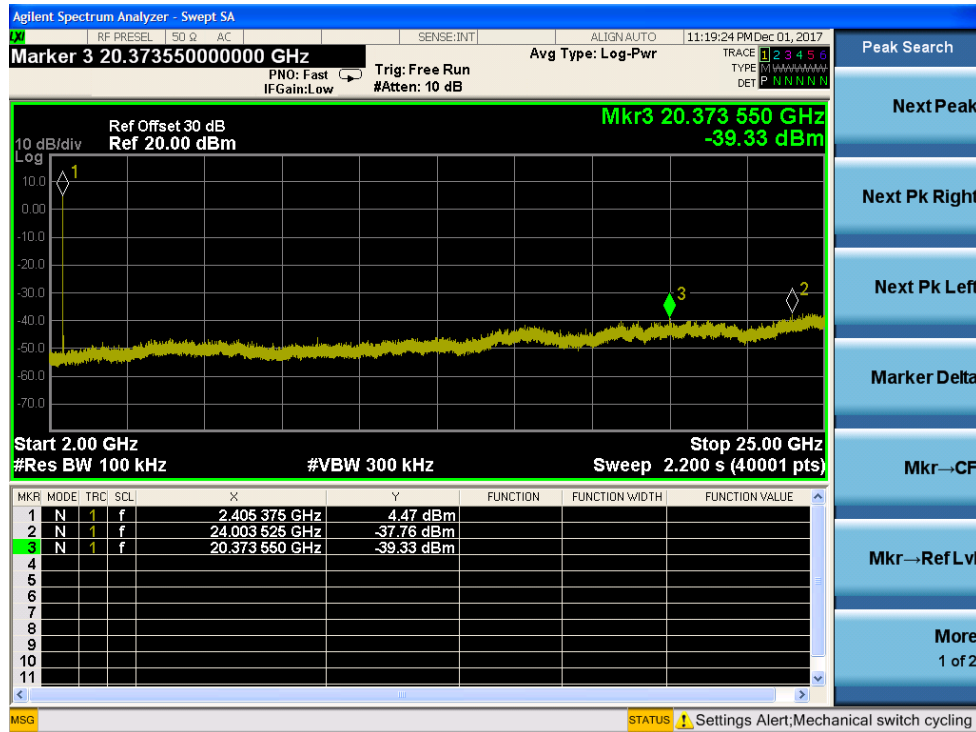



Channel 11

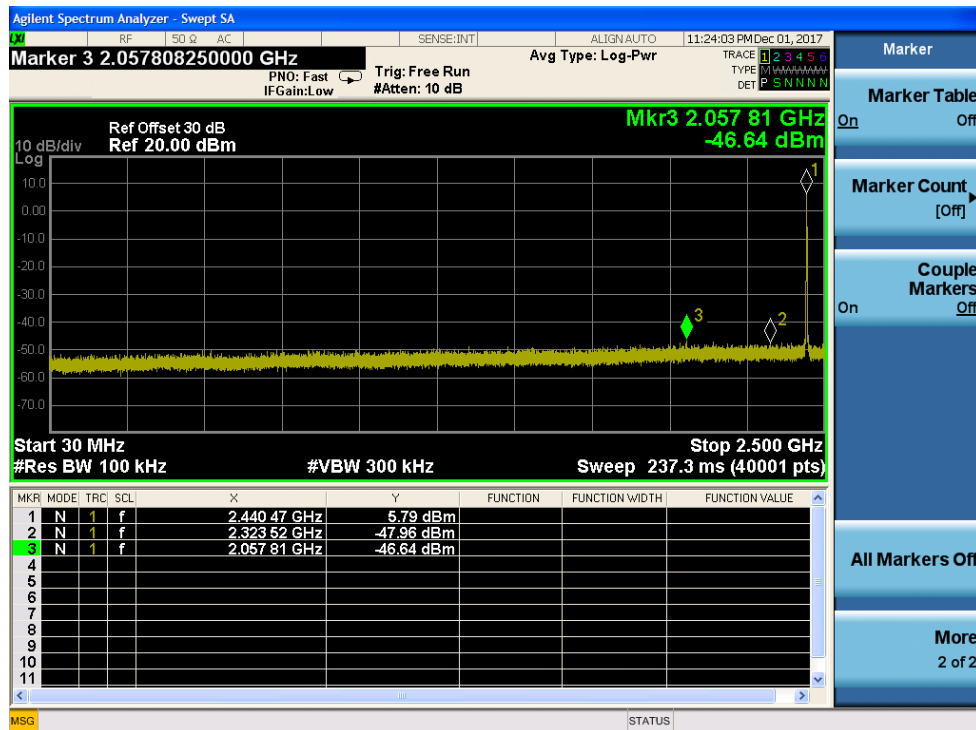

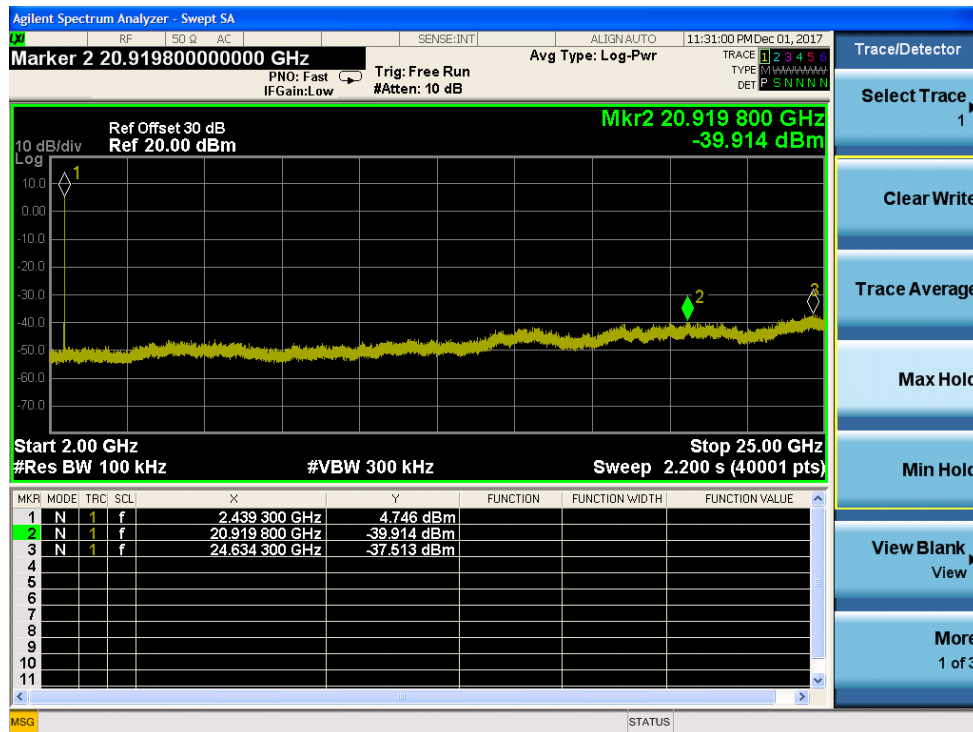

Channel 18

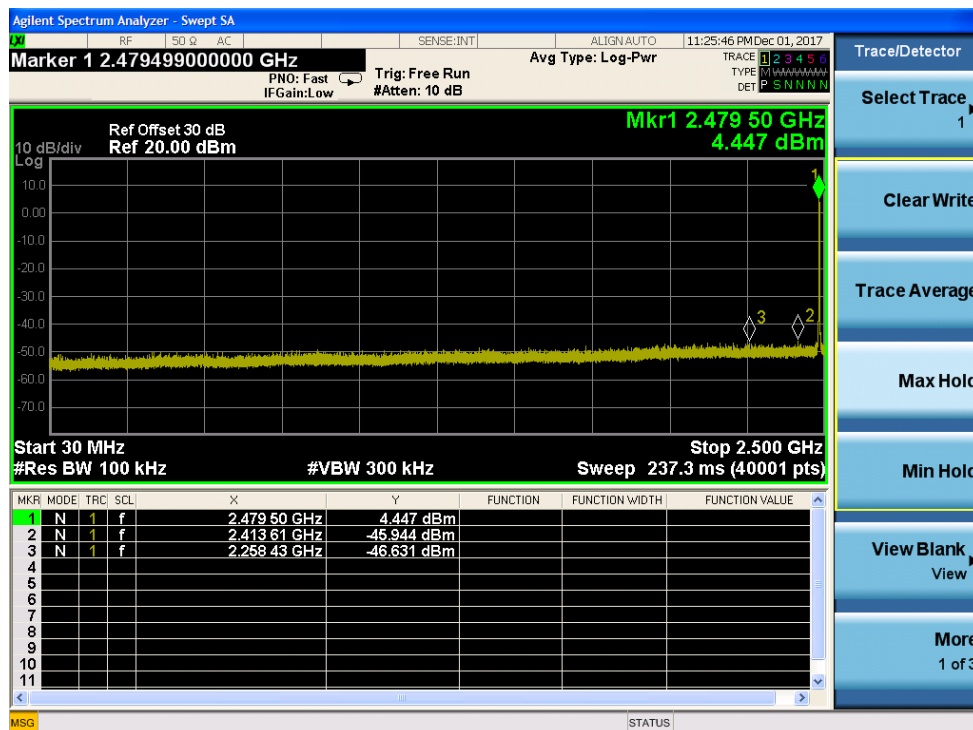

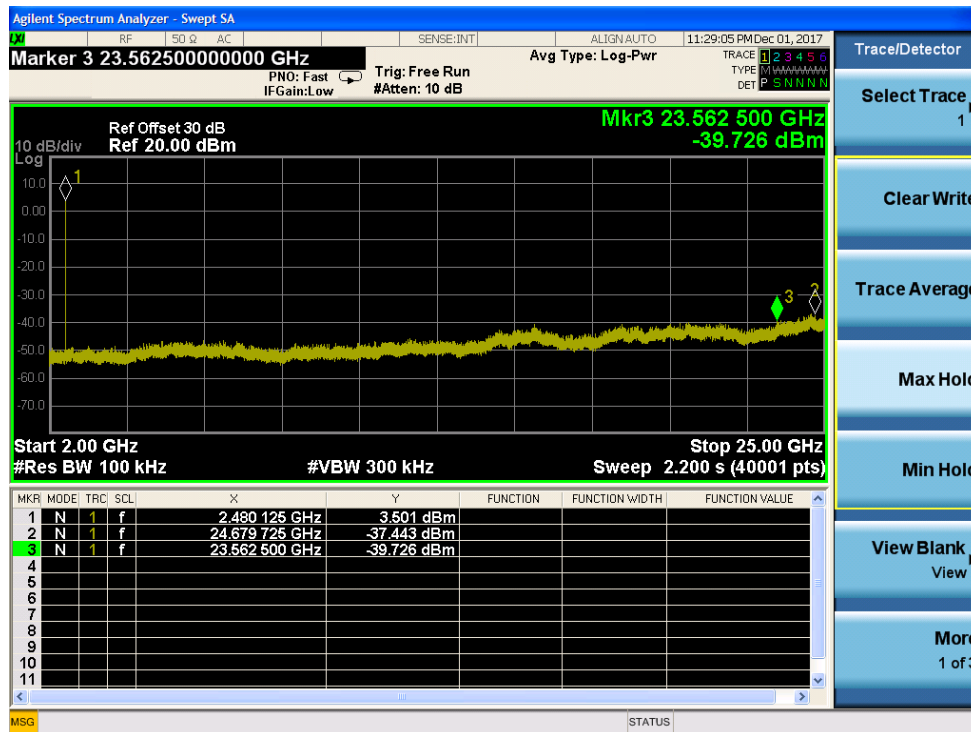

Channel 26

Rev. 2/12/2018

Spectrum Analyzers / Receivers / Preselectors
2093 MXE EMI Receiver

Range
20Hz-26.5GHz

MN
N9038A

Mfr
Agilent

SN
MY51210181

Asset
2093

Cat
I

Calibration Due
11/16/2018

Calibrated on
11/16/2017

Preamps / Couplers Attenuators / Filters
API - 30dB 20W Attenuator

Range
9KHz-40GHz

MN
89-30-11

Mfr
API Weinschel

SN
703

Asset
2121

Cat
I

Calibration Due
3/22/2018

Calibrated on
3/22/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Band Edge Measurements


Conducted Bandedge				
Date: 12/1/2017		Company: OSRAM SYLVANIA INC		Work Order: R3437
Engineer: Arik Zwirmer		EUT: ZigBee 2.5 GHz RF Module		Operating Voltage/Frequency: 120V / 60Hz
Temp: 22°C		Humidity: 29%		Pressure: 1010mBar
Frequency Range: 2405-2480 MHz		Measurement Type: Conducted		
Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04				
Notes:				
	Adjusted Bandedge (dBm)	Delta to Peak (dB)	Limit	
			(dB)	(Pass/Fail)
Low Bandedge	2390	55.49	≥ 20	Pass
High Bandedge	2483.5	46.4	≥ 20	Pass
Test Site: CEMI 6		Cable: None		Attenuator: 2121 30dB Pad
Analyzer: 2093 SA		Copyright Curtis-Straus LLC 2000		




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



PLOTS

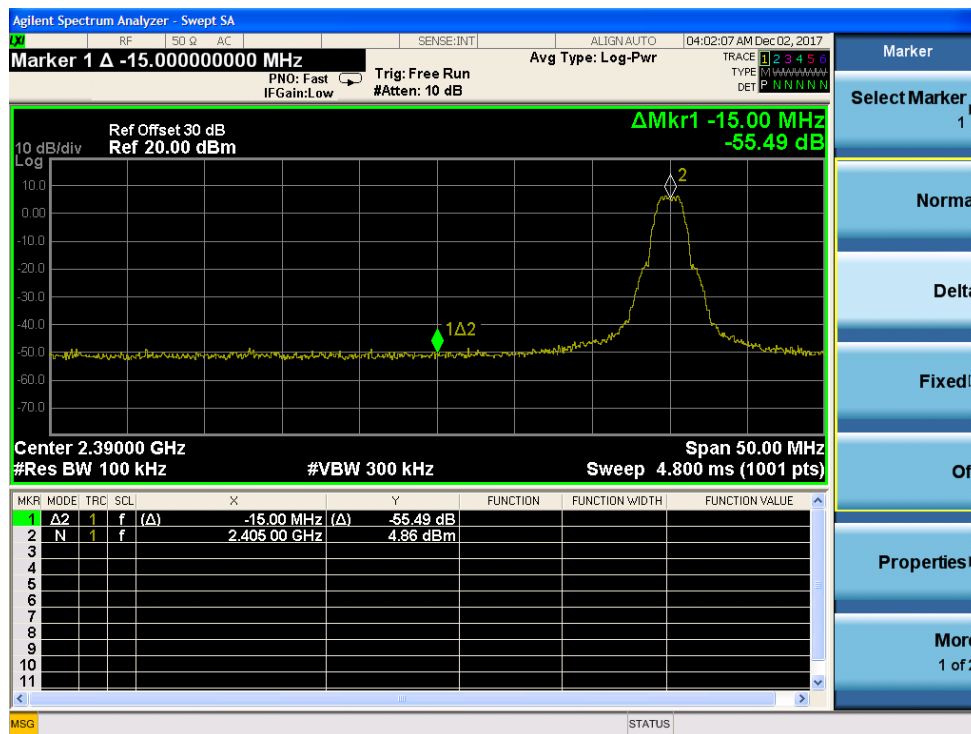

Band Edge, Lower Channel

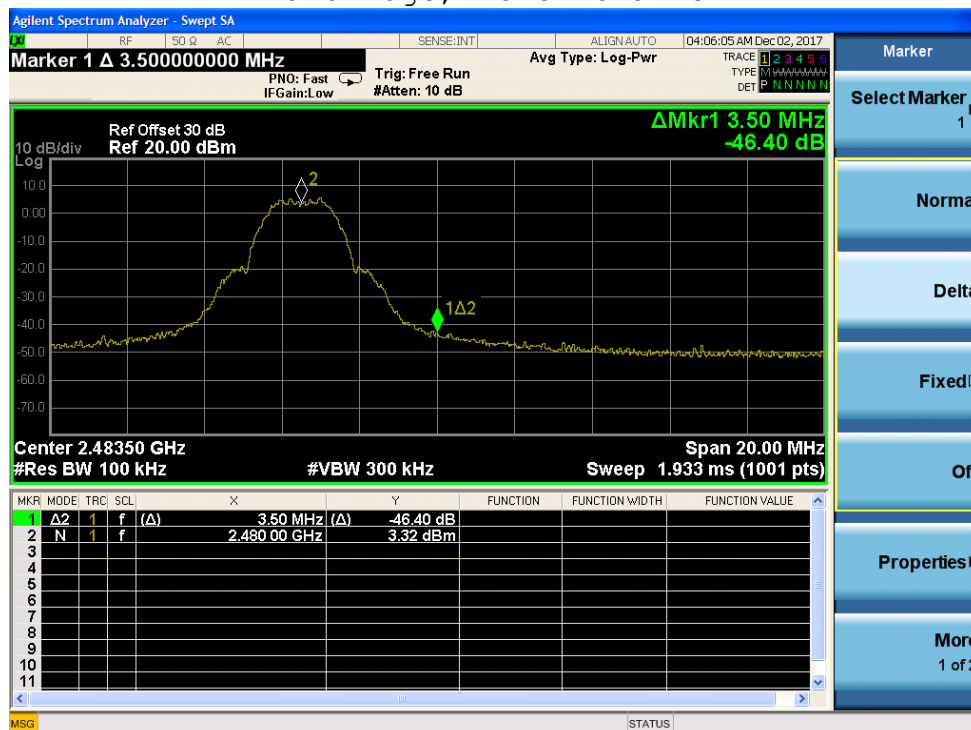

Band Edge, Upper Channel

Rev. 2/12/2018

Spectrum Analyzers / Receivers / Preselectors
2093 MXE EMI Receiver

Range
20Hz-26.5GHz

MN
N9038A

Mfr
Agilent

SN
MY51210181

Asset
2093

Cat
I

Calibration Due
11/16/2018

Calibrated on
11/16/2017

Preamps / Couplers Attenuators / Filters
API - 30dB 20W Attenuator

Range
9KHz-40GHz

MN
89-30-11

Mfr
API Weinschel

SN
703

Asset
2121

Cat
I

Calibration Due
3/22/2018

Calibrated on
3/22/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 22 of 33

Power Spectral Density


LIMIT

...the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
[15.247(e)]


MEASUREMENTS / RESULTS

Peak Power Spectral Density							
Date: 12/1/2017		Company: OSRAM SYLVANIA INC			Work Order: R3437		
Engineer: Arik Zwirmer		EUT: ZigBee 2.5 GHz RF Module			Operating Voltage/Frequency: 120V / 60Hz		
Temp: 22°C		Humidity: 29%		Pressure: 1010mBar			
Frequency Range: 2405-2480 MHz				Measurement Type: Conducted			
Notes:							
Frequency	Adjusted Peak Reading	Correction Factor Added to Spectrum Analyzer (Attenuuator + Dongle)	---	---	Limit	Margin	Result
(MHz)	(dBm)	(dB)	---	---	(dBm)	(dB)	
2405	1.58	30.00	---	---	8.0	-6.42	Pass
2440	1.15	30.00	---	---	8.0	-6.85	Pass
2480	0.51	30.00	---	---	8.0	-7.49	Pass
Test Site: CEMI 6		Cable: None		Attenuator: 2121 30dB Pad			
Analyzer: 2093 SA							
PSD(dBm) = Reading (dBm) + Cable Loss (dB) + Attenuuator Loss (dBm)							


PLOTS

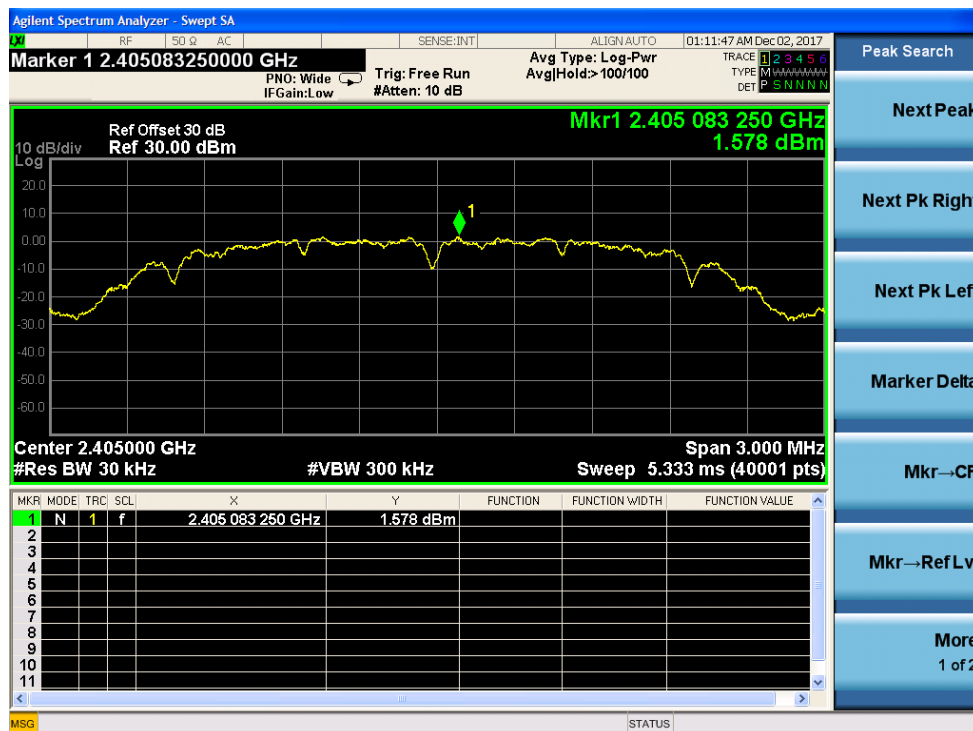

Power Spectral Density, Low Channel

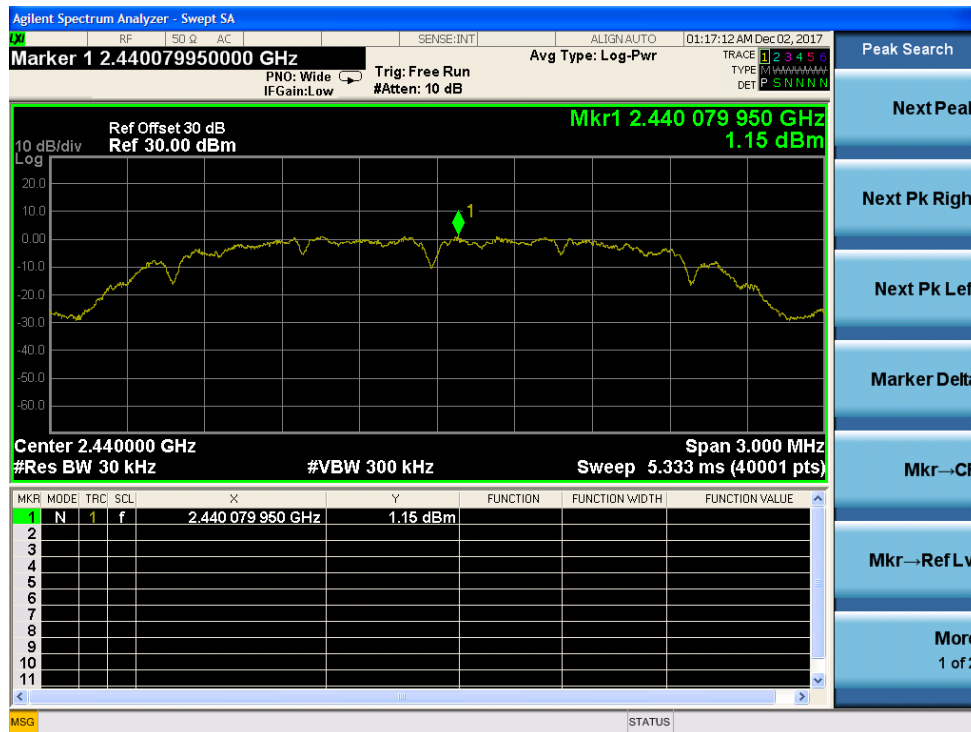

Power Spectral Density, Mid Channel

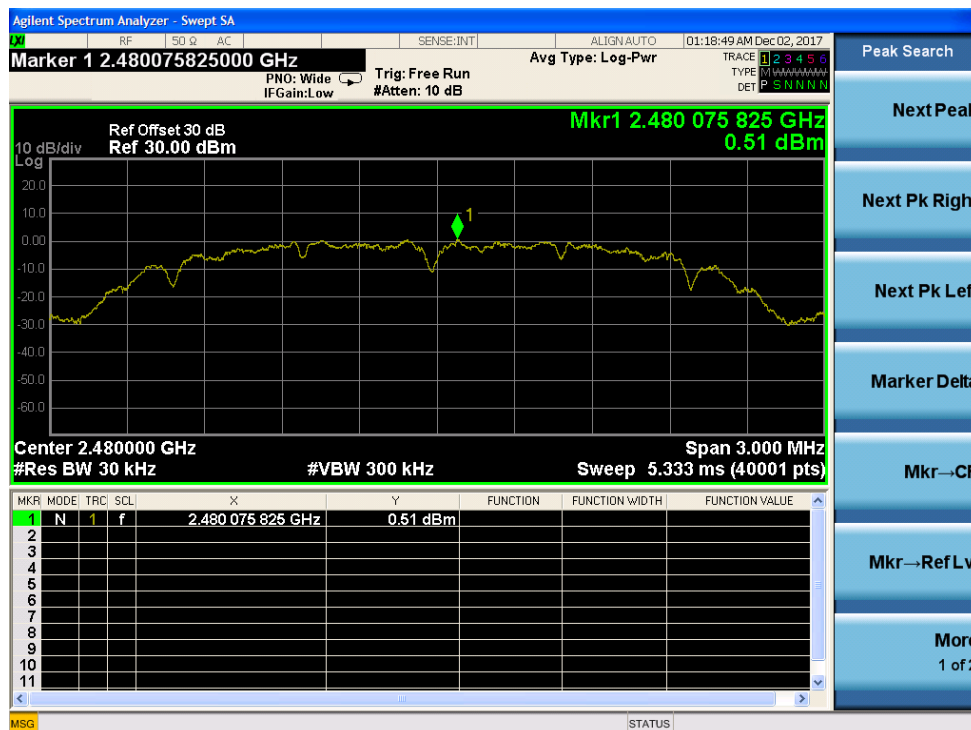

Power Spectral Density, High Channel

Rev. 2/12/2018

Spectrum Analyzers / Receivers / Preselectors
2093 MXE EMI Receiver

Range
20Hz-26.5GHz

MN
N9038A

Mfr
Agilent

SN
MY51210181

Asset
2093

Cat
I

Calibration Due
11/16/2018

Calibrated on
11/16/2017

Preamps / Couplers Attenuators / Filters
API - 30dB 20W Attenuator

Range
9KHz-40GHz

MN
89-30-11

Mfr
API Weinschel

SN
703

Asset
2121

Cat
I

Calibration Due
3/22/2018

Calibrated on
3/22/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 25 of 33

AC Line Conducted Emissions LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

Work Order# R3437

EUT Power Input - 120VAC/ 60Hz

Test Site - CEMI-3

Conditions: - 22°C; 29%RH; 1010mBar

Test Engineer - AKZ

Data Taken at 02:32:34 PM, Friday, December 01, 2017

Frequency (MHz)	Raw Pk Reading (dBμV)	Correction Factor (dB)	Adjusted Pk Amplitude (dBμV)	QP Lim: Mains_FCC&CISPR_QP_Class_B (dBμV)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)	Av Lim: Mains_FCC&CISPR_Avg_Class_B (dBμV)	Margin to Avg Limit (dB)	Pk to Avg Limit Results (Pass/Fail)	Worst Margin (Avg Limit) (dB)
0.157	21.2	20.5	41.7	65.6	-23.9	PASS	-23.9	55.6	-13.9	PASS	-13.9
0.19	18.7	20.6	39.3	64.1	-24.8	PASS		54.1	-14.8	PASS	
0.237	15.6	20.6	36.1	62.2	-26.1	PASS		52.2	-16.1	PASS	
3.665	7.5	20.7	28.2	56	-27.8	PASS		46	-17.8	PASS	
21.755	10.8	21	31.8	60	-28.2	PASS		50	-18.2	PASS	
21.782	12.3	21	33.3	60	-26.7	PASS		50	-16.7	PASS	

Hot Lead

Curtis Straus - a Bureau Veritas Company

Conducted Emissions per CISPR 16-2-1

Peak Detector Data

Notes:

Neutral Phase

Work Order# R3437

EUT Power Input - 120VAC/ 60Hz

Test Site - CEMI-3

Conditions: - 22°C; 29%RH; 1010mBar

Test Engineer - AKZ

Data Taken at 02:19:48 PM, Friday, December 01, 2017

Frequency (MHz)	Raw Pk Reading (dBμV)	Correction Factor (dB)	Adjusted Pk Amplitude (dBμV)	QP Lim: Mains_FCC&CISPR_QP_Class_B (dBμV)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)	Av Lim: Mains_FCC&CISPR_Avg_Class_B (dBμV)	Margin to Avg Limit (dB)	Pk to Avg Limit Results (Pass/Fail)	Worst Margin (Avg Limit) (dB)
0.15	20.1	20.5	40.6	66	-25.4	PASS		56	-15.4	PASS	
0.169	20.4	20.6	41	65	-24	PASS	-24	55	-14	PASS	-14
0.204	16.6	20.6	37.2	63.5	-26.3	PASS		53.5	-16.3	PASS	
0.52	8.3	20.5	28.8	56	-27.2	PASS		46	-17.2	PASS	
1.142	7.9	20.5	28.4	56	-27.6	PASS		46	-17.6	PASS	
21.784	12.4	21	33.4	60	-26.6	PASS		50	-16.6	PASS	

Neutral Lead



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Rev. 11/26/2017

Spectrum Analyzers / Receivers / Preselectors Rental EXA Signal Analyzer(1118472)	Range 9KHz-26.5GHz	MN N9010A-526;K	Mfr AT	SN MY51170010	Asset 1118472	Cat I	Calibration Due 7/25/2018	Calibrated on 7/25/2017
LISNs/Measurement Probes LISN Asset 1732	Range 150kHz-30MHz	MN LI-150A	Mfr Com-Power	SN 201094	Asset 1732	Cat I	Calibration Due 3/8/2018	Calibrated on 3/8/2017
LISN Asset 1733	150kHz-30MHz	LI-150A	Com-Power	201095	1733	I	3/8/2018	3/8/2017
Conducted Test Sites (Mains / Telco) CEMI 3	FCC Code 719150		VCCI Code A-0015			Cat III	Calibration Due NA	Calibrated on N/A
Meteorological Meters/Chambers Weather Clock (Pressure Only) TH A#2078		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1	Asset 831 2078	Cat I II	Calibration Due 4/28/2018 3/23/2018	Calibrated on 4/28/2016 3/23/2017
Cables CEMI-02	Range 9kHz - 2GHz		Mfr C-S			Cat II	Calibration Due 4/13/2018	Calibrated on 4/13/2017
Attenuators 20dB Attenuator-60	Range 9kHz-2GHz	MN	Mfr	SN N/A	Asset	Cat II	Calibration Due 9/23/2018	Calibrated on 9/23/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Occupied Bandwidth


REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.
[RSS-GEN 6.6]


MEASUREMENTS / RESULTS

Occupied Bandwidth Table			
Date: 01-Dec-17		Company: Osram	Work Order: R3437
Engineer: Arik Zwirner		EUT Operating Voltage/Frequency: 120V/60Hz	
Temp: 22°C		Humidity: 29%	Pressure: 1010mBar
Frequency Range: Fundamental			
Notes:			
Channel	Frequency	Occupied Bandwidth	
Low	2405.0	2.2111	
Middle	2440	2.2180	
High	2480.0	2.2170	


PLOTS

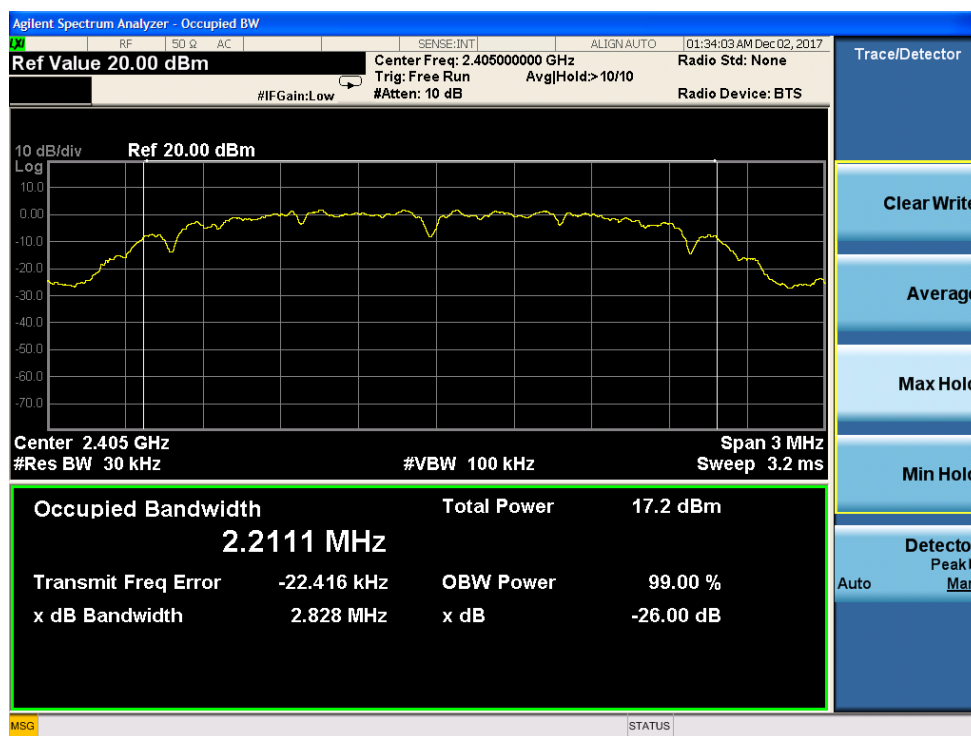

Occupied Bandwidth, Low Channel

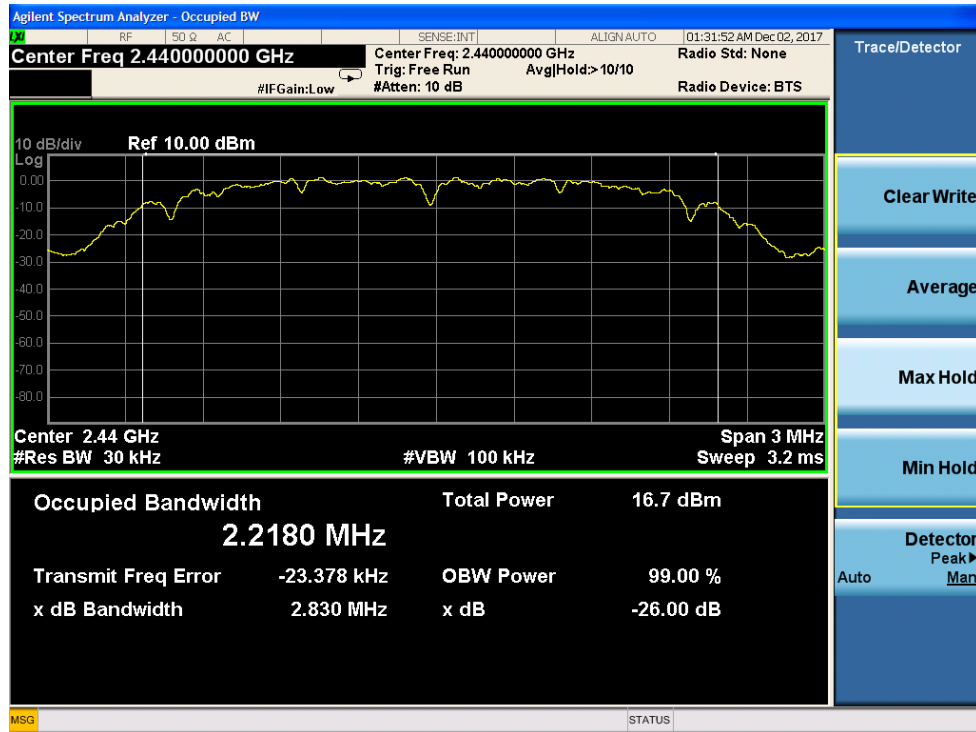

Occupied Bandwidth, Mid Channel

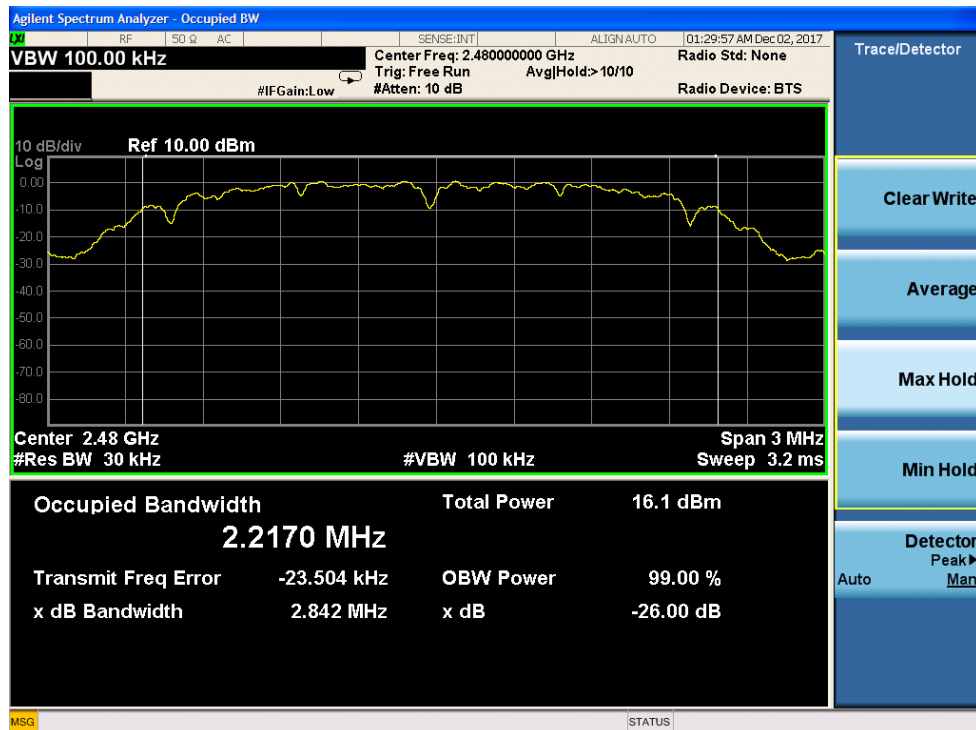

Occupied Bandwidth, High Channel

Rev. 2/12/2018

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Preamps / Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
API - 30dB 20W Attenuator	9KHz-40GHz	89-30-11	API Weinschel	703	2121	I	3/22/2018	3/22/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 30 of 33

Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)	5.6dB	N/A
NIST	4.6dB	5.2dB (Ucisprr)
CISPR		
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisprr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4%	5%
	0.3dB	3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 32 of 33

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS

