



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Test Report

Report No ES1587-1

Client OSRAM SYLVANIA INC
Sivakumar Thangavelu

Address 200 Ballardvale Street
Wilmington, MA 01887

Phone 978-750-3865

Items tested iQ ZigBee RF PCB Trace Controller
FCC ID DZO-OSREFRMG1PP
IC ID 23566-OSREFRMG1PP
FRN 0021513163

Equipment Type Digital Transmission System
Equipment Code DTS

FCC/IC Rule Parts CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2

Test Dates July 10th to July 16th, 2018

Results As detailed within this report

Prepared by

Zachary Johnson, EMC Engineer

Authorized by

Yunus Faziloglu, Sr. Engineer

Issue Date 10/19/2018

Conditions of Issue

This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 36 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation	5
<i>Statement of Conformity</i>	6
Modifications Required for Compliance	6
Test Results	7
<i>Bandwidth</i>	7
<i>Radiated Spurious Emissions</i>	13
<i>Conducted Spurious Emissions</i>	21
<i>AC Line Conducted Emissions</i>	29
<i>Occupied Bandwidth</i>	32
Measurement Uncertainty.....	35
Conditions Of Testing	36

Form Final Report REV 12-07-15



Summary

This test report supports an application for certification of a transmitter operating pursuant to CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2.

The product is the iQ ZigBee RF PCB Trace Controller. It is a transmitter that operates in the 2405-2480MHz frequency range. It has a PCB trace antenna with -0.58dBi gain and powered by 3VDC.

We found that the product met the above requirements without modifications. The test sample was received in good condition on July 10th, 2018.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

page 3 of 37



Test Methodology

All testing was performed according to the following rules/procedures/documents:
CFR 47 FCC Part 15.247, RSS-247 Issue 2, RSS-Gen Issue 4, FCC KDB 558074 D01 DTS
Measurement Guidance v04 and ANSI C63.10-2013.

Radiated emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. AC line conducted emissions testing was performed with a 50Ω/50µH LISN on AC side of a DC supply.

RF measurements were performed at the antenna port.

The environmental conditions were as shown below.

Date	Temperature	Humidity
July 10, 2017	23.1°C	48%RH
July 16, 2018	22.8°C	47%RH

The following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz



Product Tested - Configuration Documentation

EUT Configuration																	
Work Order:	S1587																
Company:	OSRAM SYLVANIA INC																
Company Address:	200 Ballardvale Street																
	Wilmington, MA, 01887																
Contact:	Sivakumar Thangavelu (3)																
EUT:	MN OSREFRMG1PP			PN --			SN SK01BP										
EUT Description:	ZigBee device																
EUT Max Frequency:	2480 MHz																
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under test	comment							
DC Power	Power DC	1	1	Power DC	No	No	0.1	in	yes	short cable to battery, 3V							
Software Operating Mode Description: Test Firmware																	



Statement of Conformity

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	The antenna of this device is a PCB trace antenna with -0.5dBi gain.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	EUT meets the AC Line conducted emissions requirements of this section.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.6				Occupied Bandwidth measurements were made.

Modifications Required for Compliance

No modifications required for Compliance



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 6 of 37

Test Results

Bandwidth


LIMIT


The minimum 6 dB bandwidth shall be at least 500 kHz. [15.247(a) (2)]

MEASUREMENTS / RESULTS


6dB Bandwidth									
Date: 7/16/2018	Company: Osram		Work Order: S1587						
Engineer: Zac Johnson	EUT: iQ ZigBee Controller – PCB Antenna		Operating Voltage/Frequency: 3V DC						
Temp: 22.8°C	Humidity: 48%		Pressure: 1000mBar						
Frequency Range: 2405-2480 MHz		Measurement Type: Conducted							
Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04									
Notes:									
Frequency (MHz)	Reading (kHz)	6dB Bandwidth			Result (Pass/Fail)				
		Limit (kHz)	Margin (kHz)	Result (Pass/Fail)					
2405	1644	≥500	1144	Pass					
2440	1646	≥500	1146	Pass					
2475	1649	≥500	1149	Pass					
2480	1648	≥500	1148	Pass					
Test Site: CEMI-5	Cable: 2286 Cbl		Attenuator: 2107 40dB		Copyright Curtis-Straus LLC 2000				
Analyzer: 1118472 SA									

PLOTS

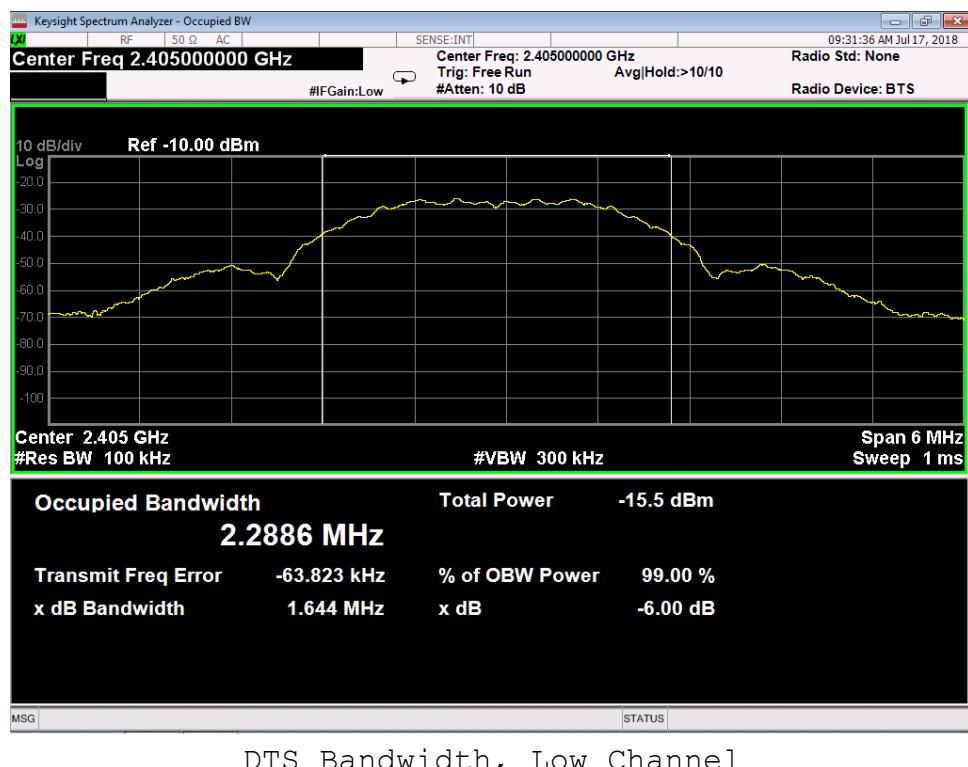

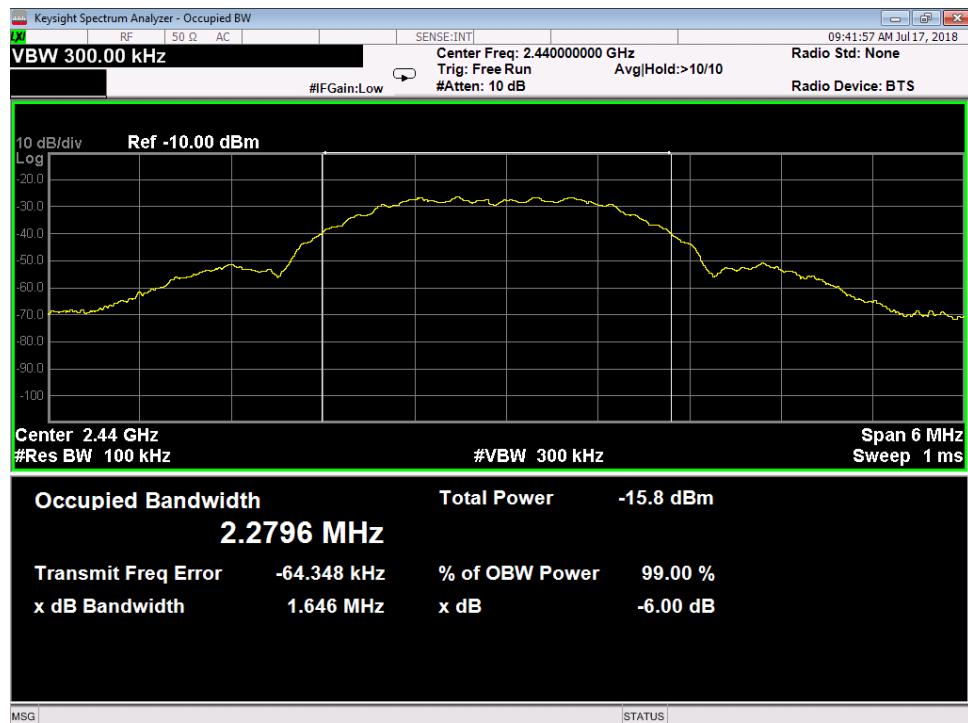

DTS Bandwidth, Mid Channel

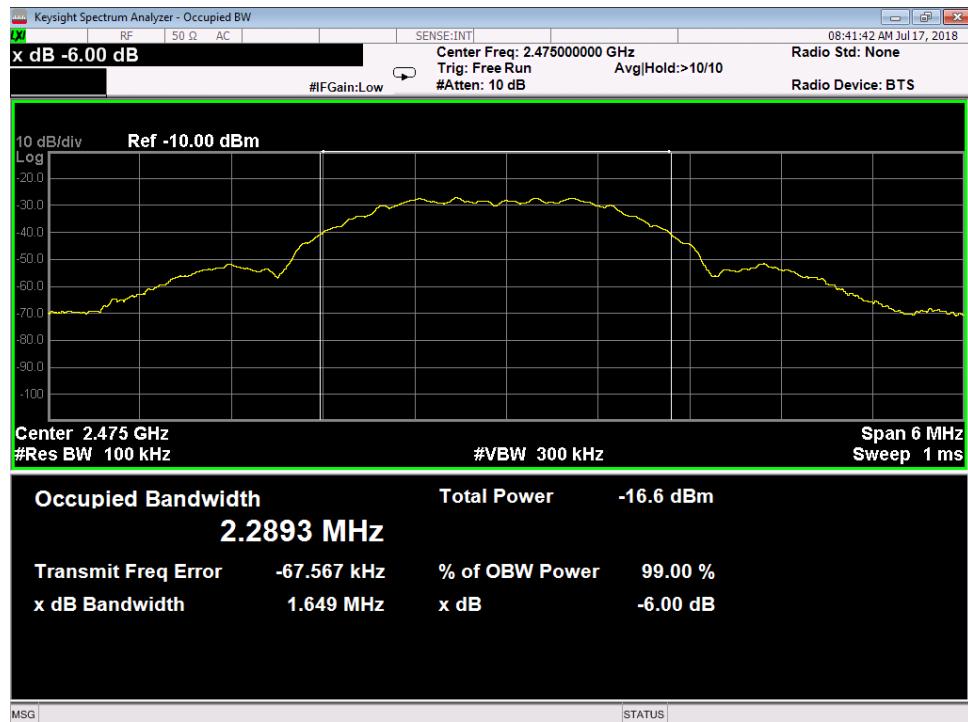


DTS Bandwidth, High Channel 25 (19dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 8 of 37

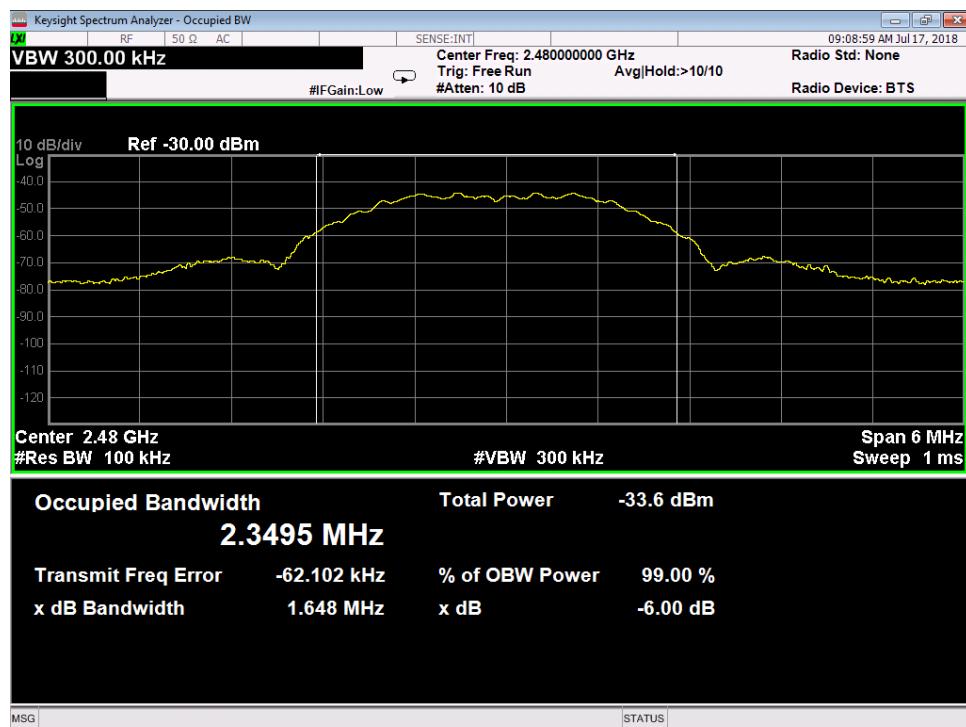

DTS Bandwidth, High Channel 26 (0dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 9 of 37

Testing Cert. No. 1627-01

Peak Power

LIMIT

Conducted Output Power


1 Watt

[15.247(b) (3)]

MEASUREMENTS / RESULTS

Peak Output Power													
Date: 7/16/2018	Company: Osram		Work Order: S1587										
Engineer: Zac Johnson	EUT: iQ ZigBee Controller – PCB Antenna		Operating Voltage/Frequency: 3V DC										
Temp: 22.8°C	Humidity: 48%		Pressure: 1000mBar										
Frequency Range: 2405-2480 MHz		Measurement Type: Conducted											
Notes: 19dBm output power for all channels except Ch26 at 0dBm													
Frequency	Peak Reading	Cable Loss	Attenuator Loss	Peak Output Power	Limit	Margin	Result						
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)	(Pass/Fail)						
2405	-22.51	0.38	39.42	17.29	30.0	-12.71	Pass						
2440	-22.83	0.38	39.42	16.97	30.0	-13.03	Pass						
2475	-23.59	0.38	39.42	16.21	30.0	-13.79	Pass						
2480	-40.16	0.38	39.42	-0.36	30.0	-30.36	Pass						
Test Site: CEMI-5		Cable: 2286 Cbl		Attenuator: 2107 40dB									
Analyzer: 1118472 SA													
Peak Output Power (dBm)= Peak Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dB)													

PLOTS

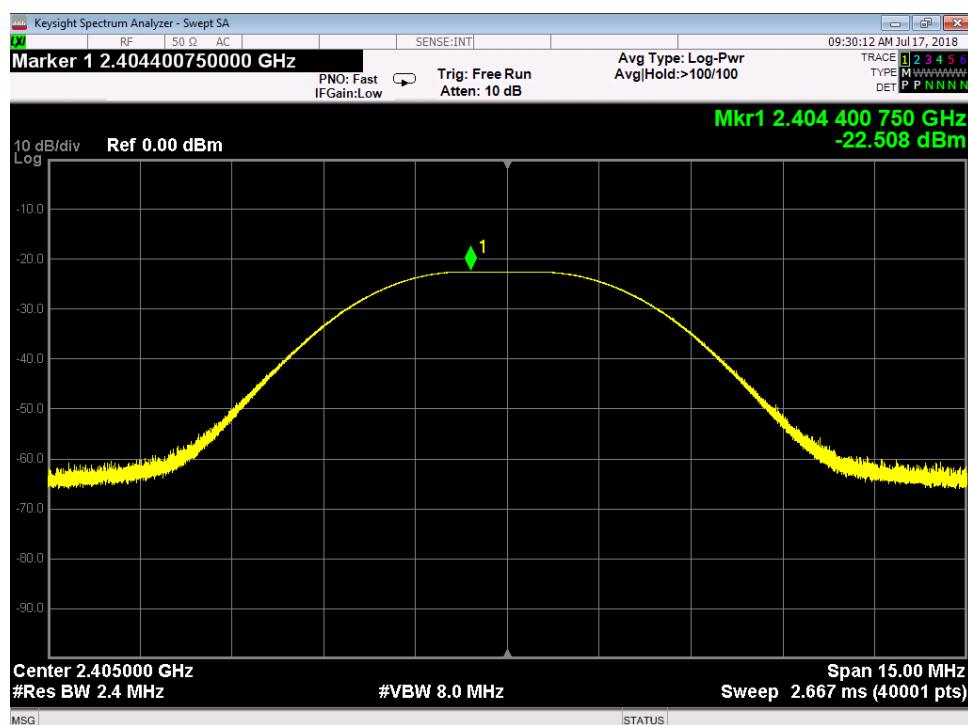


Peak Output Power, Low Channel




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



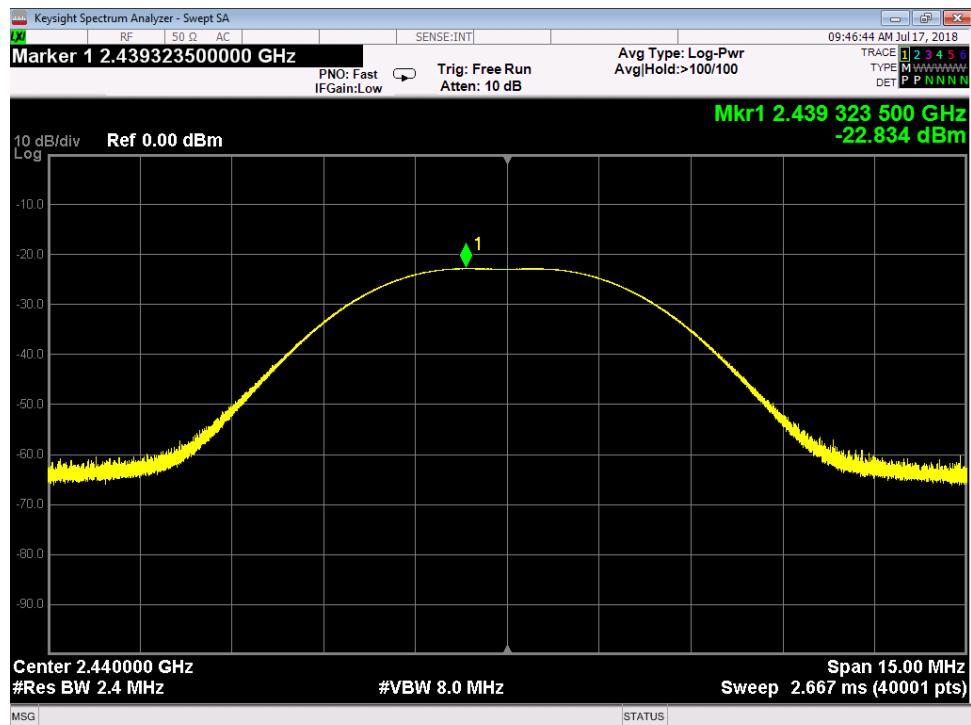


Peak Output Power, Mid Channel

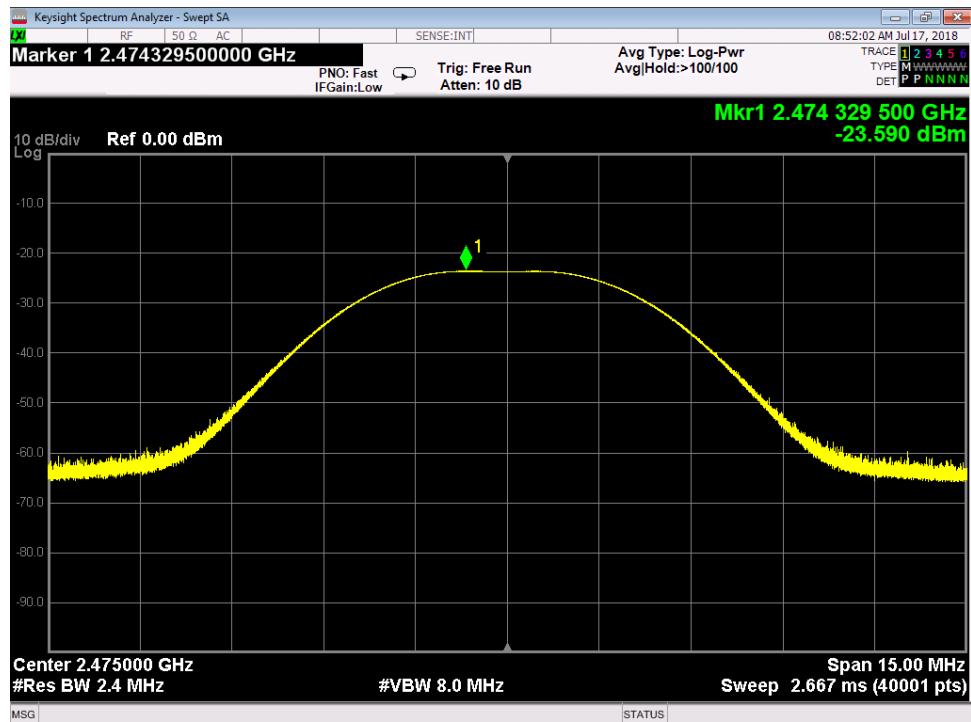

Peak Output Power, High Channel 25 (19dBm)



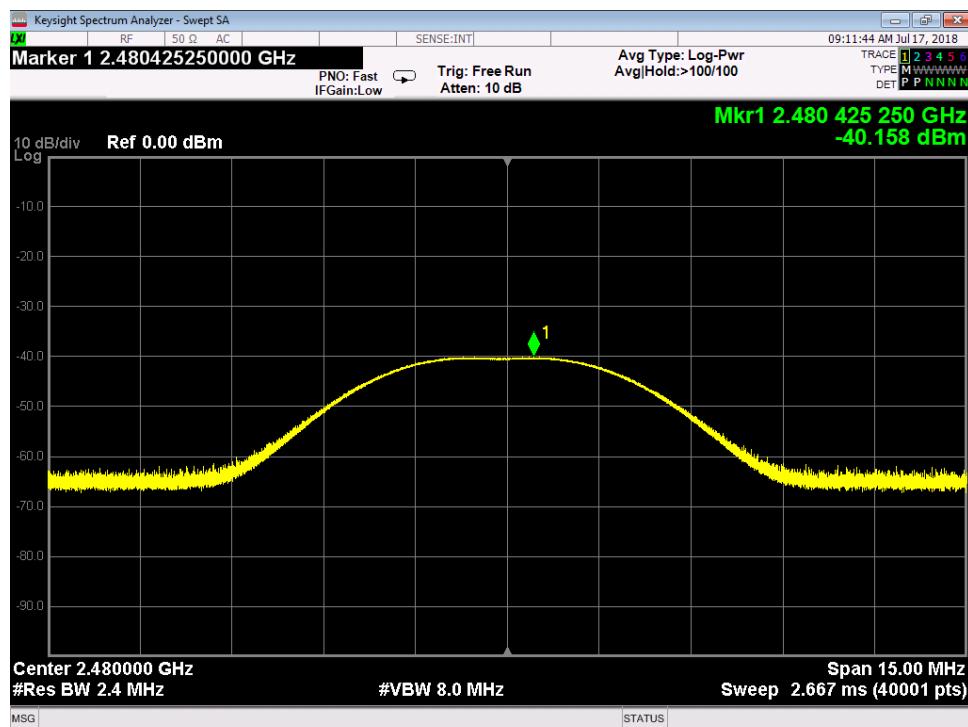

Peak Output Power, High Channel 26 (0dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 12 of 37

Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
[15.247(d)]

Testing has been performed on 3 channels (low, middle and high). The worst case channel from each range is shown in the following data tables.

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company	Work Order - S1587
Radiated Emissions Electric Field 3m Distance	EUT Power Input - 3V DC battery
Top Peaks Vertical 30-1000MHz	Test Site - CH-2
Operator: ZJ	Conditions - 23.1°C; 48%RH; 1005mBar
Notes:	Witnessed by - Sivakumar Thangavelu
Channel 11, 19dBm power setting	EUT Maximum Frequency - 2480MHz

Data Taken at 03:16:57 PM, Tuesday, July 10, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_1 09_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
30.097	32.6	-6.6	26	40	-14	PASS		150	180
444.796	34.3	-9.8	24.5	46	-21.5	PASS		200	180
469.652	34.9	-8.8	26	46	-20	PASS		200	180
713.147	40.3	-4.8	35.4	46	-10.6	PASS	-10.6	150	0
910.518	32.2	-1.9	30.4	46	-15.7	PASS		200	135
975.774	32.1	-1	31.1	54	-22.8	PASS		150	90



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 30-1000MHz Operator: ZJ Notes: Channel 11, 19dBm power setting	Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz
---	---

Data Taken at 03:16:57 PM, Tuesday, July 10, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_1 09_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
462.208	39.8	-9.4	30.4	46	-15.6	PASS		200	315
476.782	38.8	-8.5	30.4	46	-15.6	PASS		200	135
482.408	39.1	-8.5	30.6	46	-15.4	PASS		200	315
830.808	38.4	-3.2	35.3	46	-10.7	PASS	-10.7	150	180
832.893	38.1	-3.1	35	46	-11	PASS		150	180
996.241	31.5	-0.2	31.4	54	-22.6	PASS		200	270

30-1000MHz Low Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 30-1000MHz Operator: ZJ Notes: Channel 18, 19dBm power setting	Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz
---	---

Data Taken at 03:27:46 PM, Tuesday, July 10, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_1 09_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
31.479	33.3	-7.6	25.7	40	-14.3	PASS	-14.3	150	225
132.674	33.6	-14	19.6	43.5	-23.9	PASS		150	270
475.691	34.4	-8.5	25.9	46	-20.1	PASS		200	225
933.288	32.7	-1.5	31.2	46	-14.8	PASS		150	315
994.519	31.5	-0.2	31.2	54	-22.7	PASS		100	225



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 30-1000MHz Operator: ZJ Notes: Channel 18, 19dBm power setting	Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz
---	---

Data Taken at 03:37:12 PM, Tuesday, July 10, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
462.765	40.1	-9.4	30.7	46	-15.3	PASS		200	135
469.022	39.1	-8.9	30.2	46	-15.9	PASS		200	270
482.82	38.6	-8.5	30.1	46	-15.9	PASS		200	135
489.004	39.7	-8.7	31.1	46	-15	PASS		200	315
779.01	39.9	-3.4	36.5	46	-9.5	PASS	-9.5	200	0
959.308	32.8	-1.5	31.3	46	-14.7	PASS		150	0

30-1000MHz Center Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 30-1000MHz Operator: ZJ Notes: Channel 26, 19dBm power setting	Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz
---	---

Data Taken at 03:47:20 PM, Tuesday, July 10, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	Turntable Azimuth (degrees)
32.449	34.9	-8.4	26.4	40	-13.6	PASS		150	135
39.433	43.3	-13.8	29.5	40	-10.5	PASS	-10.5	150	225
40.694	41.9	-14.7	27.2	40	-12.8	PASS		100	225
43.629	43.4	-17	26.5	40	-13.5	PASS		200	270
907.317	32.3	-1.9	30.4	46	-15.6	PASS		200	270
994.229	31.4	-0.2	31.2	54	-22.8	PASS		200	180



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 30-1000MHz Operator: ZJ Notes: Channel 26, 19dBm power setting					Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz				
---	--	--	--	--	---	--	--	--	--

Data Taken at 04:01:20 PM, Tuesday, July 10, 2018

Frequency (MHz)	Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Lim1: FCC_pt15_109_Class_B (dB μ V/m)	Lim1 Margin (dB)	Lim1 Test Results (Pass/Fail)	Worst Margin Lim1 (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
462.135	37.8	-9.4	28.3	46	-17.7	PASS		200	135
469.677	36.8	-8.8	27.9	46	-18.1	PASS		200	315
481.002	36.4	-8.4	28	46	-18	PASS		200	135
488.446	36.7	-8.7	28.1	46	-17.9	PASS		200	315
899.411	32.5	-1.7	30.8	46	-15.2	PASS	-15.2	200	0
990.712	31.7	-0.4	31.3	54	-22.6	PASS		150	180

30-1000MHz High Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 1-6GHz Operator: ZJ Notes: Channel 11, 19dBm power setting					Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz				
---	--	--	--	--	---	--	--	--	--

Data Taken at 10:55:13 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1724.63	53.5	-5.6	47.9	74	-26.1	PASS		54	-6.1	PASS		200	297
2181.75	44.4	-2	42.4	74	-31.6	PASS		54	-11.6	PASS		200	198
5806.38	43.4	5.1	48.5	74	-25.4	PASS	-25.4	54	-5.4	PASS	-5.4	100	0

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 1-6GHz Operator: ZJ Notes: Channel 11, 19dBm power setting					Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz				
---	--	--	--	--	---	--	--	--	--

Data Taken at 10:55:13 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Margin to Avg Limit (dB)	Avg Limit Test Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2179.88	44.2	-2	42.1	74	-31.8	PASS		54	-11.8	PASS		100	39
3129.75	45.2	0	45.2	74	-28.8	PASS		54	-8.8	PASS		300	256
5704.38	43.2	4.9	48.1	74	-25.8	PASS	-25.8	54	-5.8	PASS	-5.8	300	78

1-6GHz Low Channel

	Curtis-Straus LLC, a wholly owned subsidiary of BV CPS One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828												
BUREAU VERITAS 1828													

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Vertical 1-6GHz Operator: ZJ Notes: Channel 18, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz						
---	--	--	--	--	--	--	---	--	--	--	--	--	--

Data Taken at 11:45:15 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Test Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_Clas sB_AVG (dB μ V/m)	Margin to Average Limit (dB)	Average Limit Test Result (Pass/Fail)	Average Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1729	54.1	-5.6	48.6	74	-25.4	PASS		54	-5.4	PASS		100	26
2129.13	44.1	-2.1	42.1	74	-31.9	PASS		54	-11.9	PASS		200	84
3210.5	45	0.2	45.2	74	-28.8	PASS		54	-8.8	PASS		200	260
5681	44.5	4.8	49.3	74	-24.7	PASS	-24.7	54	-4.7	PASS	-4.7	100	260

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 1-6GHz Operator: ZJ Notes: Channel 18, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz						
---	--	--	--	--	--	--	---	--	--	--	--	--	--

Data Taken at 11:45:15 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla ssB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_Clas sB_AVG (dB μ V/m)	Margin to Avg Limit (dB)	Avg Limit Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2165.88	44.1	-2	42	74	-32	PASS		54	-12	PASS		100	55
3187	44.8	0.3	45.1	74	-28.9	PASS		54	-8.9	PASS		300	206
5851.25	42.8	5.1	47.8	74	-26.1	PASS	-26.1	54	-6.1	PASS	-6.1	200	259

1-6GHz Center Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance 1-6GHz Vertical Data Operator: ZJ Notes: Channel 26, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz						
--	--	--	--	--	--	--	---	--	--	--	--	--	--

Data Taken at 01:09:28 PM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla ssB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Clas sB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
1710.8	41.1	32.4	-5.6	35.5	74	-38.4	PASS	-38.4	26.8	54	-27.2	PASS	-27.2	100	235

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 3m Distance Top Peaks Horizontal 1-6GHz Operator: ZJ Notes: Channel 26, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz						
---	--	--	--	--	--	--	---	--	--	--	--	--	--

Data Taken at 11:58:22 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla ssB_Peak (dB μ V/m)	Margin to Peak Limit (dB)	Peak Limit Results (Pass/Fail)	Peak Limit Worst Margin (dB)	Av Lim: FCC_pt15_109_Clas sB_AVG (dB μ V/m)	Margin to Avg Limit (dB)	Avg Limit Results (Pass/Fail)	Avg Limit Worst Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
2122.88	44.1	-2.1	42	74	-32	PASS		54	-12	PASS		300	259
3189.88	45.4	0.3	45.7	74	-28.3	PASS		54	-8.3	PASS		300	55
5761.88	43.6	5.1	48.7	74	-25.3	PASS	-25.3	54	-5.3	PASS	-5.3	100	261



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

BUREAU
VERITAS
1828



1-6GHz High Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Notes: Channel 11, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz								
Data Taken at 02:18:45 PM, Tuesday, July 10, 2018															
Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
17919.9	40.1	30.4	24.5	64.6	83.5	-18.9	PASS	-18.9	54.9	63.5	-8.6	PASS	-8.6	163	222

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Notes: Channel 11, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz								
Data Taken at 02:24:08 PM, Tuesday, July 10, 2018															
Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
17748.9	39.7	30.7	24.4	64.1	83.5	-19.4	PASS	-19.4	55.1	63.5	-8.4	PASS	-8.4	100	229

6-18GHz Low Channel

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Notes: Channel 18, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz								
Data Taken at 09:48:01 AM, Tuesday, July 10, 2018															
Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
14070.8	40.2	31	17.6	57.8	83.5	-25.7	PASS		48.6	63.5	-14.9	PASS		100	13
17660.4	41.3	31.1	24	65.4	83.5	-18.1	PASS	-18.1	55.1	63.5	-8.4	PASS		100	172
17978.3	39.2	30.4	25.3	64.5	83.5	-19	PASS		55.6	63.5	-7.9	PASS	-7.9	200	322

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Notes: Channel 18, 19dBm power setting							Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz								
Data Taken at 09:54:13 AM, Tuesday, July 10, 2018															
Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_ClassB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_ClassB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
17740.4	39.5	30.6	24.4	63.9	83.5	-19.6	PASS	-19.6	55	63.5	-8.5	PASS	-8.5	143	121

6-18GHz Center Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Vertical Data Operator: ZJ Notes: Channel 26, 19dBm power setting		Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz												
---	--	---	--	--	--	--	--	--	--	--	--	--	--	--

Data Taken at 10:17:10 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla ssB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cla ssB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
17816.2	39.6	30.9	24.1	63.7	83.5	-19.8	PASS	-19.8	55	63.5	-8.5	PASS	-8.5	100	13

Curtis Straus - a Bureau Veritas Company Radiated Emissions Electric Field 1m Distance 6-18GHz Horizontal Data Operator: ZJ Notes: Channel 26, 19dBm power setting		Work Order - S1587 EUT Power Input - 3V DC battery Test Site - CH-2 Conditions - 23.1°C; 48%RH; 1005mBar Witnessed by - Sivakumar Thangavelu EUT Maximum Frequency - 2480MHz												
---	--	---	--	--	--	--	--	--	--	--	--	--	--	--

Data Taken at 10:23:59 AM, Tuesday, July 10, 2018

Frequency (MHz)	Raw Peak Reading (dB μ V)	Raw Avg Reading (dB μ V)	Correction Factor (dB/m)	Adjusted Peak Amplitude (dB μ V/m)	Pk Lim: FCC_pt15_109_Cla ssB_Peak (dB μ V/m)	Peak Margin (dB)	Peak Test Results (Pass/Fail)	Worst Peak Margin (dB)	Adjusted Avg Amplitude (dB μ V/m)	Av Lim: FCC_pt15_109_Cla ssB_AVG (dB μ V/m)	Avg Margin (dB)	Avg Test Results (Pass/Fail)	Worst Avg Margin (dB)	Antenna Height (cm)	EUT Azimuth (degrees)
17961.1	37.4	30.5	25.1	62.5	83.5	-21	PASS	-21	55.5	63.5	-8	PASS	-8	123	26

6-18GHz High Channel

Radiated Emissions Table																								
Date: 10-Jul-18	Company: Osram										Work Order: S1587													
Engineer: Zac Johnson	EUT Desc: IQ Zigbee Antenna										EUT Operating Voltage/Frequency: 3V DC													
Temp: 23.1°C	Humidity: 48%										Pressure: 1005mBar													
Frequency Range: 18-26.5GHz														Measurement Distance: 0.1 m										
Notes: EUT Max Freq: 2480MHz																								
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dB μ V)	Average Reading (dB μ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB μ V/m)	Adjusted Avg Reading (dB μ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average												
H / V	No emissions found within 20dB of the limit	---	---	---	---	---	---	---	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)										
Table Result: Pass by --- dB																								
Test Site: EMI Chamber 2	Cable 1: Asset #2324										Worst Freq: --- MHz													
Analyzer: 1860 SA	Cable 2: ---										Cable 3: ---													
CSsoft Radiated Emissions Calculator v 1.017.203	Antenna: 18-26.5GHz Horn										Preselector: ---													
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor	Copyright Curtis-Straus LLC 2000																							

18-26.5GHz All Channels



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Emissions Table

Date: 10-Jul-18		Company: Osram							Work Order: S1587					
Engineer: Zac Johnson		EUT Desc: iQ Zigbee Antenna							EUT Operating Voltage/Frequency: 3V DC					
Temp: 23.1°C		Humidity: 48%							Pressure: 1005mBar					
Frequency Range: 2390-2483.5MHz							Measurement Distance: 3 m							
Notes:							EUT Max Freq: 2480MHz							
Antenna Polarization	Frequency (MHz)	Peak Reading (dB μ V)	Average Reading (dB μ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB μ V/m)	Adjusted Avg Reading (dB μ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
(H/V)									Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)
Channel 11	2390.0	37.8	18.2	0.0	28.4	4.1	70.3	50.7	74.0	-3.7	Pass	54.0	-3.3	Pass
	2390.0	36.6	18.1	0.0	28.4	4.1	69.1	50.6	74.0	-4.9	Pass	54.0	-3.4	Pass
Channel 25	2483.5	36.5	18.4	0.0	28.6	3.9	69.0	50.9	74.0	-5.0	Pass	54.0	-3.1	Pass
	2483.5	34.2	18.3	0.0	28.6	3.9	66.7	50.8	74.0	-7.3	Pass	54.0	-3.2	Pass
Table Result:		Pass	by	-3.1	dB				Worst Freq: 2483.5 MHz					
Test Site: EMI Chamber 2			Cable 1: Asset #2051			Cable 2: Asset #2459			Cable 3: Asset #2467					
Analyzer: 2093 SA			Preamp: None			Antenna: Black Horn			Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.203									Copyright Curtis-Straus LLC 2000					
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Radiated Bandedges CH11 and CH25 at 19dBm**Radiated Emissions Table**

Date: 19-Sep-18		Company: Osram							Work Order: S1587					
Engineer: Dara Seng		EUT Desc: iQ ZigBee Controller							EUT Operating Voltage/Frequency: 3V DC					
Temp: 23.2°C		Humidity: 32%							Pressure: 1006mBar					
Frequency Range: 2390-2483.5MHz							Measurement Distance: 3 m							
Notes:							EUT Max Freq: 2480MHz							
Antenna Polarization	Frequency (MHz)	Peak Reading (dB μ V)	Average Reading (dB μ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB μ V/m)	Adjusted Avg Reading (dB μ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
(H/V)									Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)
Channel 26 at 0dBm	2483.5	15.8	15.8	0.0	32.4	3.1	51.3	51.3	74.0	-22.7	Pass	54.0	-2.7	Pass
	2483.5	19.8	11.8	0.0	32.4	3.1	55.3	47.3	74.0	-18.7	Pass	54.0	-6.7	Pass
Table Result:		Pass	by	-2.7	dB				Worst Freq: 2483.5 MHz					
Test Site: EMI Chamber 1			Cable 1: Asset #2456			Cable 2: Asset #2480			Cable 3: ---					
Analyzer: Rental SA#1			Preamp: None			Antenna: Blue Horn			Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.203									Copyright Curtis-Straus LLC 2000					
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Radiated Bandedges CH26 at 0dBm

Rev. 6/27/2018

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SA #2 (1860)		9kHz-26.5 GHz	E7405A	Agilent	MY45104916	1860	I	3/15/2019	3/15/2018
2093 MXE EMI Receiver		20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Radiated Emissions Sites									
EMI Chamber 2									
EMI Chamber 2									
Preamps /Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2311 PA		1-1000MHz	PAM-103	COM-POWER	441174	2311	II	10/29/2018	10/29/2017
2111 HF Preamp		0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II	11/19/2018	11/19/2017
HF (Yellow)		18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	10/16/2018	10/16/2017
2116 BRF		0.009-18000MHz	BRM50702	Micro-Tronics	G226	2116	II	11/8/2018	11/8/2017
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-White Biolog		30-2000MHz	JB1	Sunol	A091604-1	1105	I	8/21/2019	8/21/2017
Black Horn		1-18GHz	3115	EMCO	9703-5148	56	I	8/29/2018	8/29/2016
HF (White) Horn		18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018	
TH #A2080		HTC-1	HDE		2080	II	3/22/2019	3/22/2018	
Cables		Range	Mfr			Cat	Calibration Due	Calibrated on	
Asset #2051		9kHz - 18GHz	Florida RF			II	3/7/2019	3/7/2018	
Asset #2459		9kHz-18GHz	MegaPhase			II	10/29/2018	10/29/2017	
Asset #2467		9kHz-18GHz	MegaPhase			II	10/29/2018	10/29/2017	
Asset #2324		1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 001	2324	II	8/19/2018	8/19/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

REMI TEU



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 20 of 37


Conducted Spurious Emissions

LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth that contains the highest level of desired power based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

[15.247(d)]

MEASUREMENTS / RESULTS

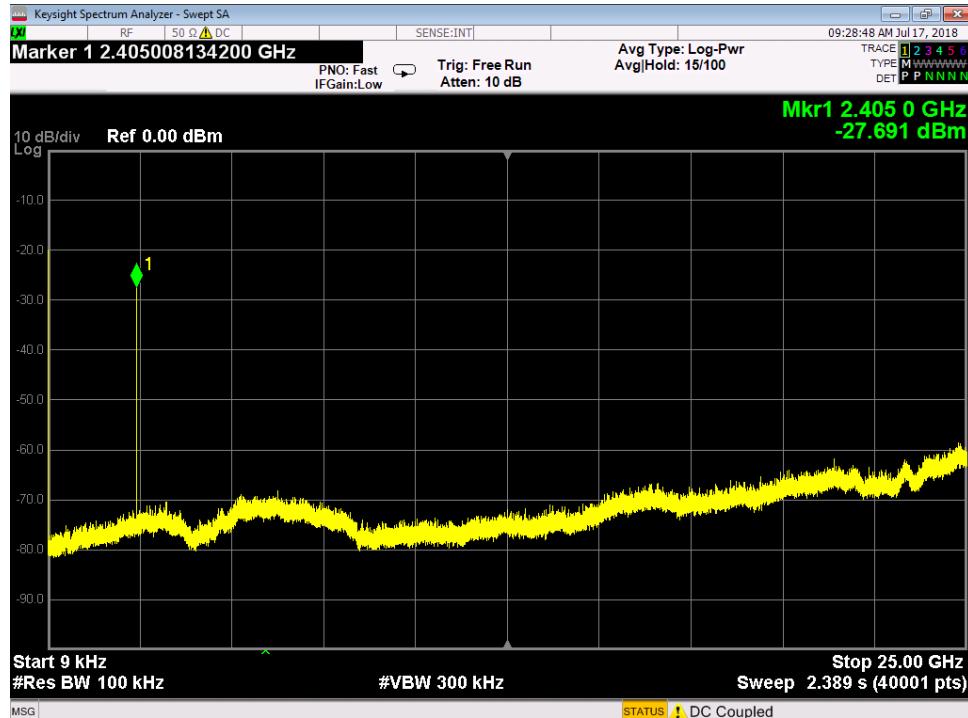


Low Channel




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 21 of 37

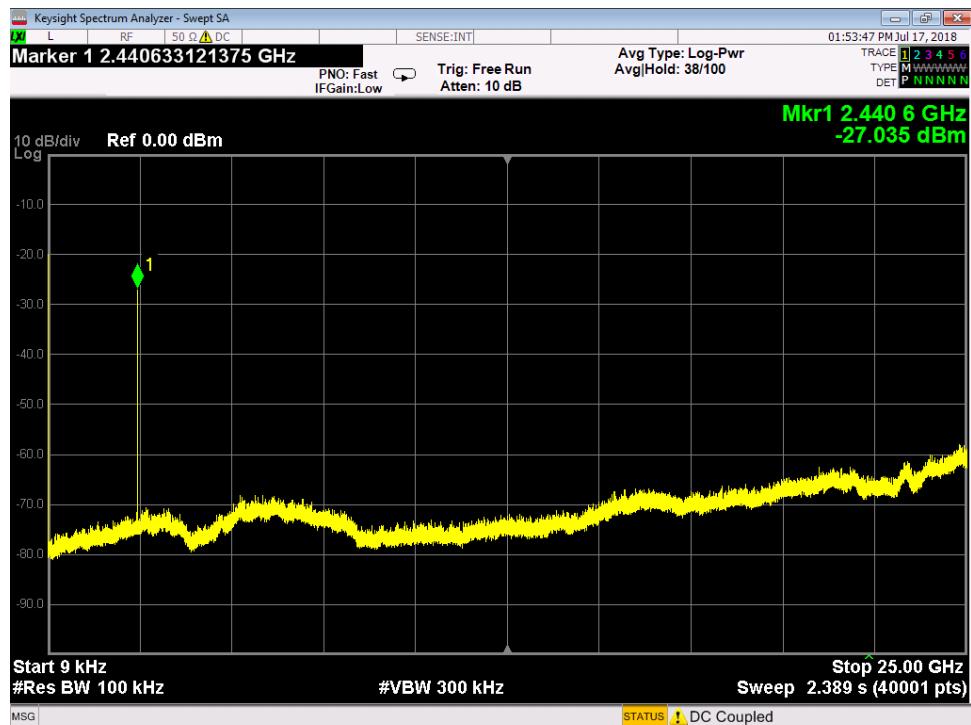

Mid Channel

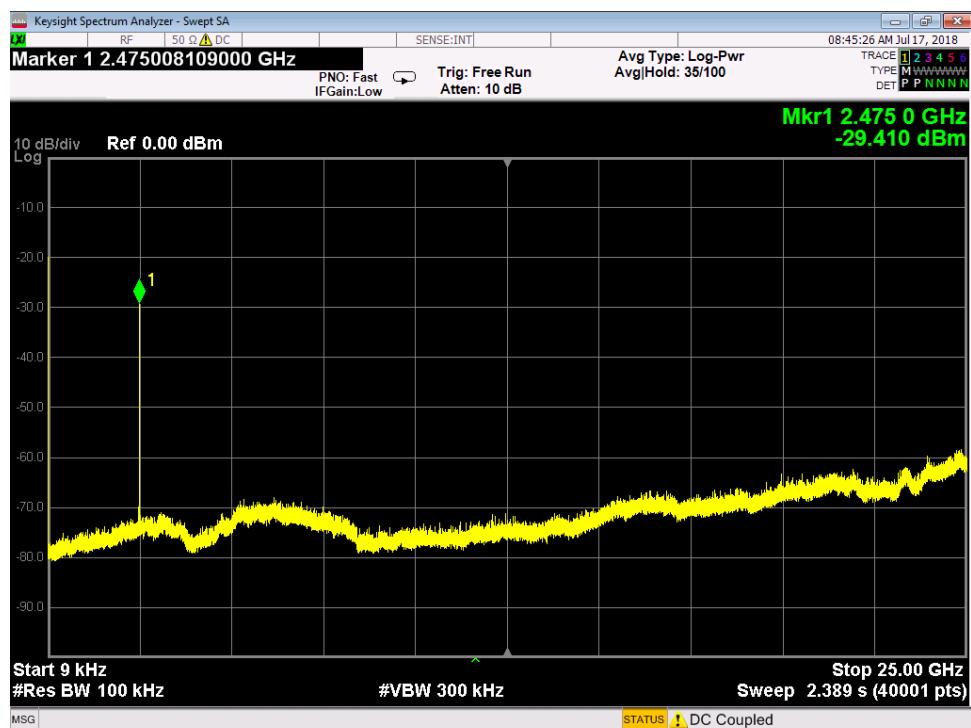

High Channel 25

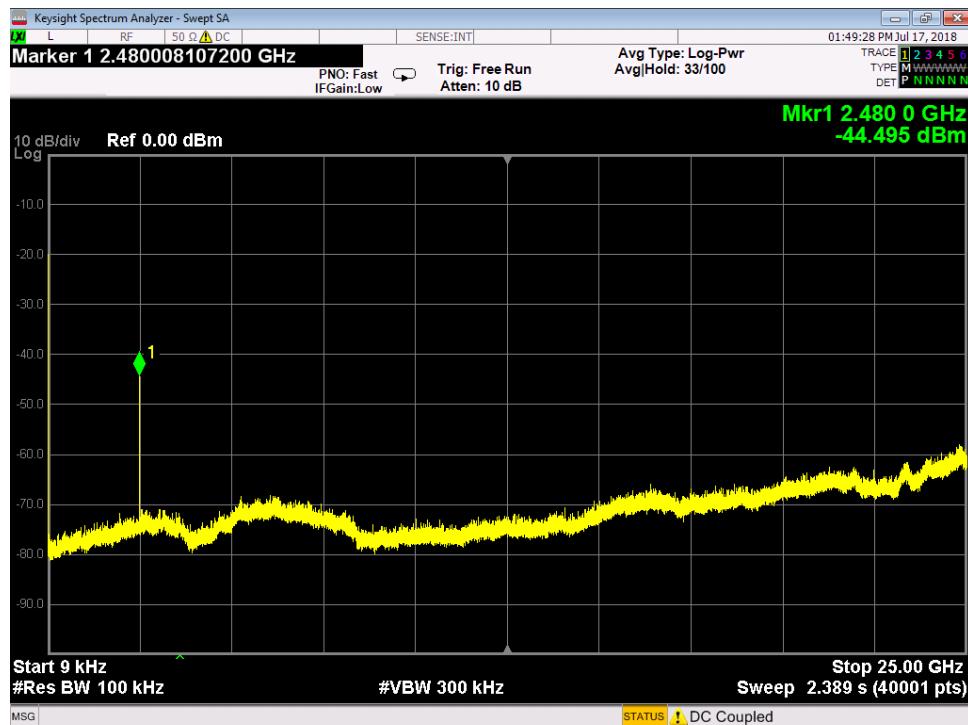

High Channel 26

Band Edge Measurements

Conducted Bandedge

Date: 7/16/2018	Company: Osram	Work Order: S1587			
Engineer: Zac Johnson	EUT: iQ ZigBee Controller – PCB Antenna	Operating Voltage/Frequency: 3V DC			
Temp: 22.8°C	Humidity: 48%	Pressure: 1000mBar			
Frequency Range: 2405-2480 MHz		Measurement Type: Conducted			
Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04					
Notes:					
	Channel Frequency (MHz)	Bandedge Frequency (MHz)	Delta to Peak (dB)	Limit	
Low Bandedge	2405	2390	52.522	≥ 20	Pass
High Bandedge Ch 25	2475	2483.5	51.624	≥ 20	Pass
High Bandedge Ch 26	2480	2483.5	34.374	≥ 20	Pass
Test Site: CEMI-5	Cable: 2286 Cbl		Attenuator: 2107 40dB		
Analyzer: 1118472 SA				Copyright Curtis-Straus LLC 2000	




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 23 of 37

Testing Cert. No. 1627-01

PLOTS

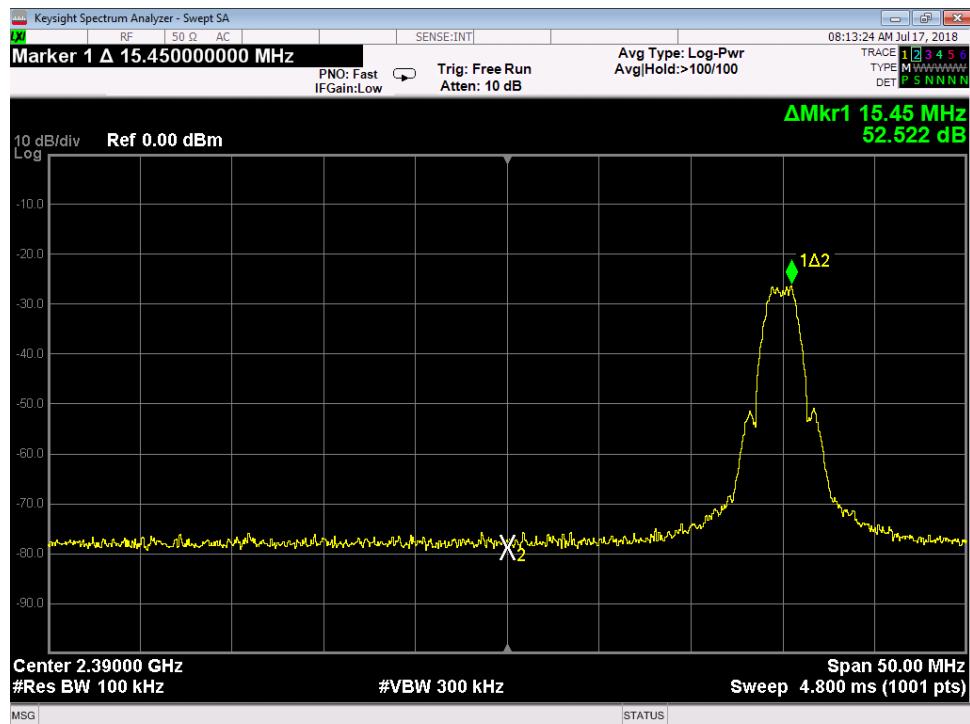

Band Edge, Lower Channel

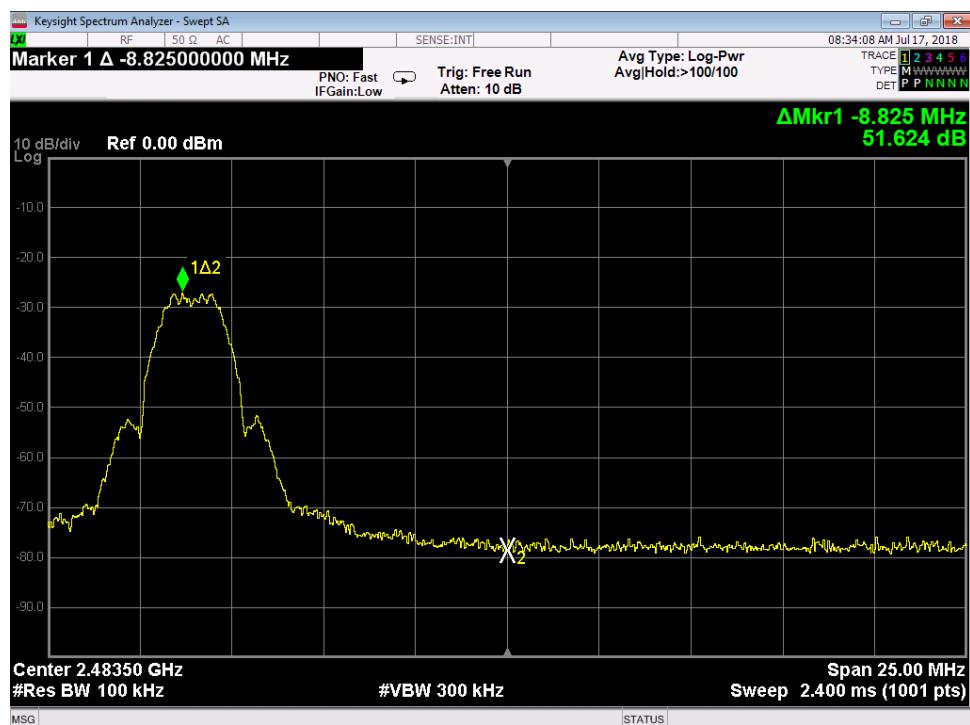


Band Edge, High Channel 25 (19dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



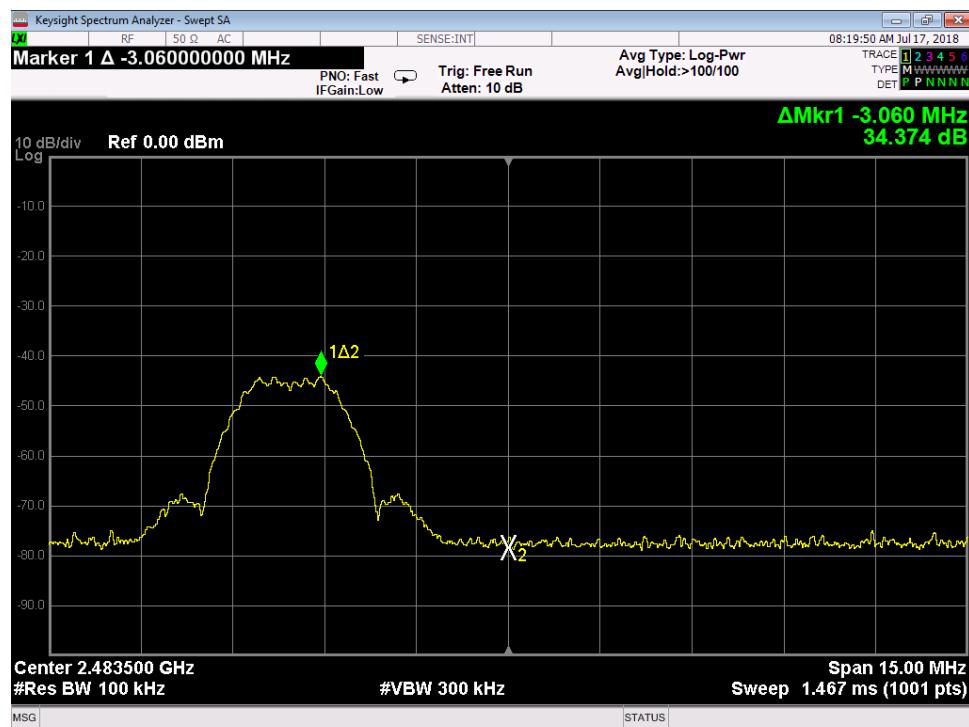

Band Edge, High Channel 26 (0dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 25 of 37

Power Spectral Density


LIMIT

...the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
[15.247(e)]

MEASUREMENTS / RESULTS

Peak Power Spectral Density												
Date: 7/16/2018	Company: Osram				Work Order: S1587							
Engineer: Zac Johnson	EUT: iQ ZigBee Controller – PCB Antenna				Operating Voltage/Frequency: 3V DC							
Temp: 22.8°C	Humidity: 48% Pressure: 1000mBar											
Frequency Range: 2405-2480 MHz		Measurement Type: Conducted										
Notes: 19dBm output power for all channels except Ch26 at 0dBm												
Frequency	Peak Reading	Cable Loss	Attenuator Loss	Peak PSD	Limit	Margin	Result					
(MHz)	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)						
2405	-38.06	0.38	39.42	1.75	8.0	-6.26	Pass					
2440	-38.04	0.38	39.42	1.76	8.0	-6.24	Pass					
2475	-38.88	0.38	39.42	0.92	8.0	-7.08	Pass					
2480	-55.84	0.38	39.42	-16.04	8.0	-24.04	Pass					
Test Site: CEMI-5	Cable: 2286 Cbl		Attenuator: 2107 40dB									
Analyzer: 1118472 SA												
PSD(dBm) = Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dBm)												

PLOTS

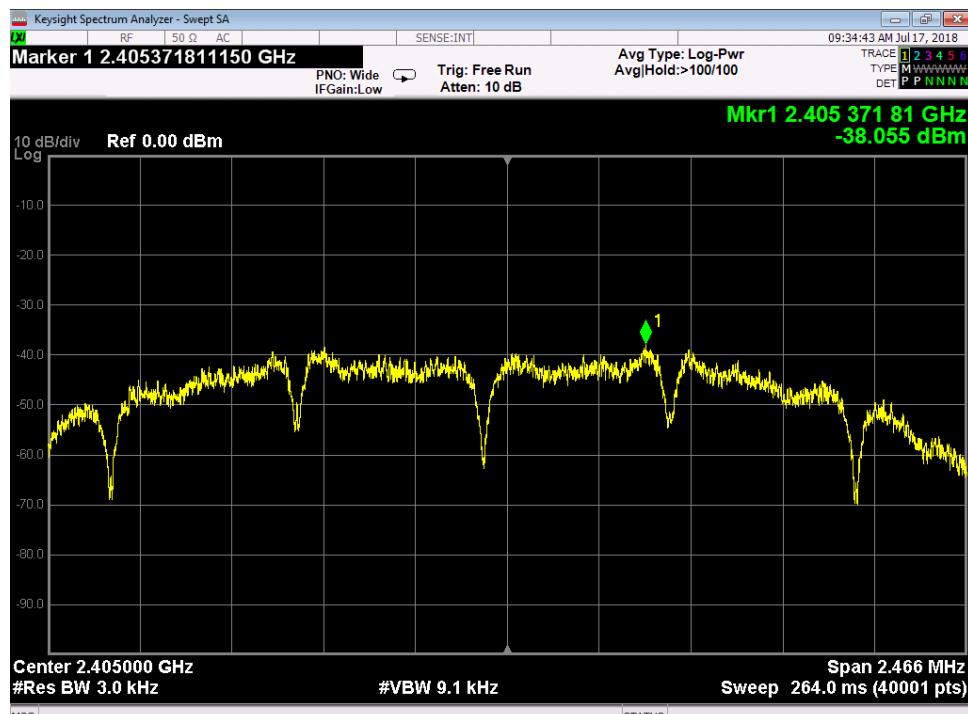

Power Spectral Density, Low Channel




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828




page 26 of 37

Testing Cert. No. 1627-01

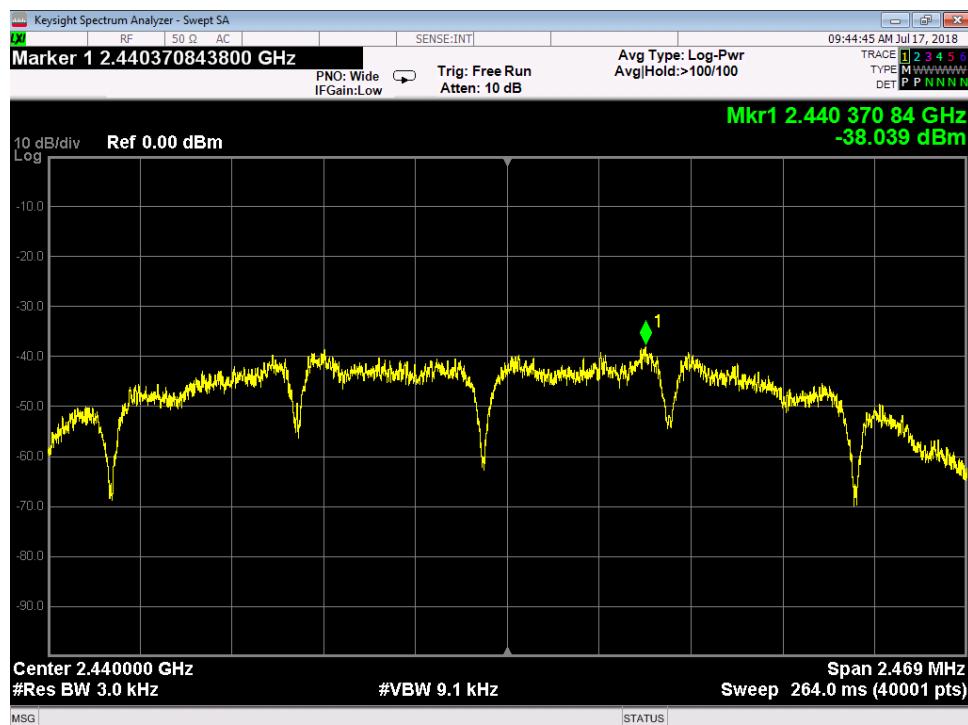


Power Spectral Density, Mid Channel

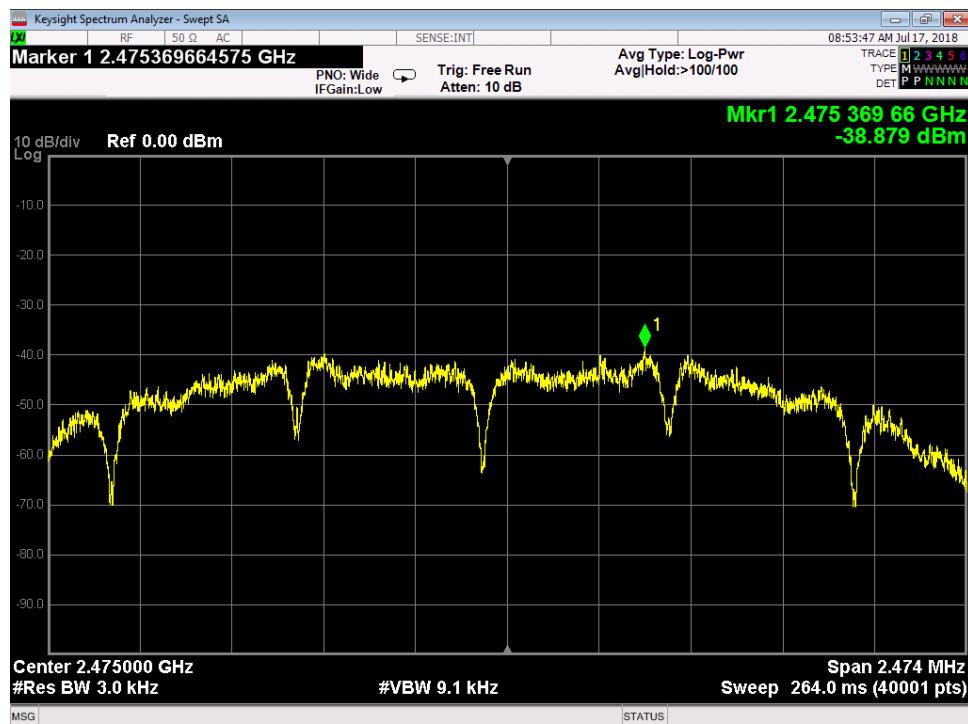

Power Spectral Density, High Channel 25 (19dBm)



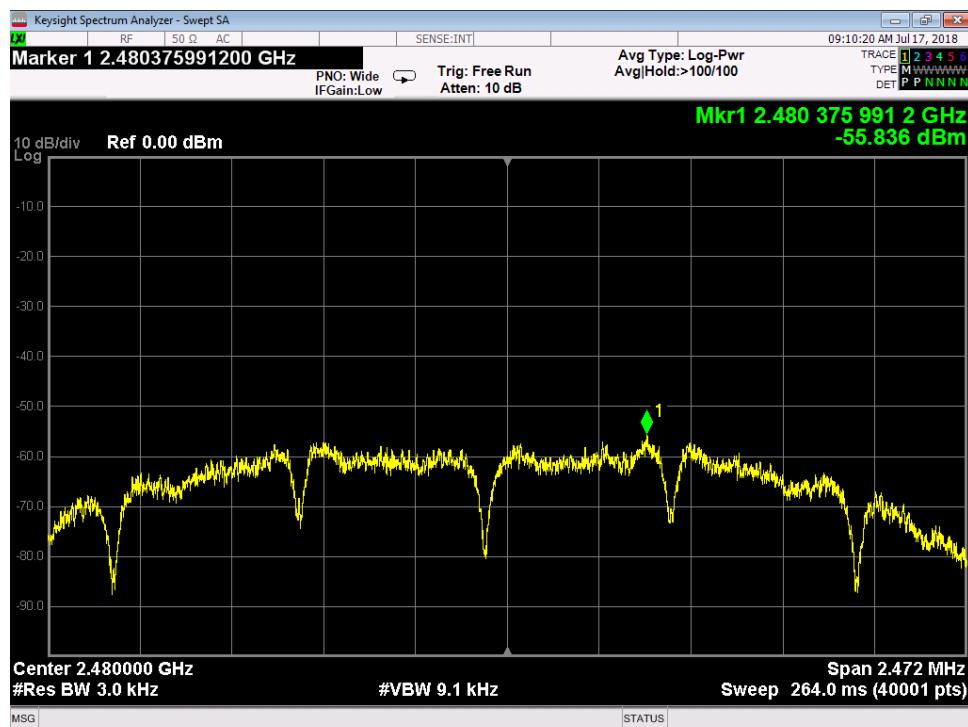

Power Spectral Density, High Channel 26 (0dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



AC Line Conducted Emissions

LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dB μ V)	Average limit (dB μ V)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company
 Conducted Emissions per CISPR 16-2-1
 Peak Detector Data
 Notes:
 EUT Line tested: 120VAC/60Hz; Hot Phase
 EUT Power: 3V DC

Work Order # - S1587
 EUT Power Input - 120VAC/ 60Hz
 Test Site - CEMI-5
 Conditions: - 22.8°C; 47%RH; 1000mBar
 Test Engineer - Zac Johnson
 Witnessed by - Sivakumar Thangavelu

Data Taken at 02:05:50 PM, Monday, July 16, 2018

Frequency (MHz)	Raw Pk Reading (dB μ V)	Correction Factor (dB)	Adjusted Pk Amplitude (dB μ V)	QP Lim: Mains_FCC&CISP R_QP_Class_B (dB μ V)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)
0.15	36.2	20.9	57.1	66	-8.9	PASS	
0.163	39.2	20.9	60	65.3	-5.2	PASS	-5.2
0.256	31.8	20.9	52.7	61.6	-8.9	PASS	
0.281	29.4	20.8	50.3	60.8	-10.5	PASS	
0.328	26.8	20.8	47.6	59.5	-11.9	PASS	
0.362	25.5	20.8	46.4	58.7	-12.3	PASS	

Hot Lead – Peak



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 29 of 37

Testing Cert. No. 1627-01

Curtis Straus - a Bureau Veritas Company
 Conducted Emissions per CISPR 16-2-1, CISPR Average Detector
 Final Average Detector Data
 Notes:
 EUT Line tested: 120VAC/60Hz; Hot Phase
 EUT Power: 3V DC

Work Order # - S1587
 EUT Power Input - 120VAC/ 60Hz
 Test Site - CEMI-5
 Conditions: - 22.8°C; 47%RH; 1000mBar
 Test Engineer - Zac Johnson
 Witnessed by - Sivakumar Thangavelu

Data Taken at 02:05:50 PM, Monday, July 16, 2018

Frequency (MHz)	Raw Avg Reading (dB μ V)	Correction Factor (dB)	Adjusted Avg Amplitude (dB μ V)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dB μ V)	Avg Margin (dB)	Avg Results (Pass/Fail)	Worst Avg Margin (dB)
0.154	12.7	20.9	33.5	55.8	-22.2	PASS	
0.16	12.7	20.9	33.6	55.5	-21.9	PASS	
0.175	12.7	20.8	33.5	54.7	-21.3	PASS	
0.203	11.5	20.9	32.4	53.5	-21	PASS	-21
0.204	11.5	20.9	32.4	53.5	-21.1	PASS	
0.338	6.8	20.8	27.6	49.2	-21.7	PASS	

Hot Lead - Average

Curtis Straus - a Bureau Veritas Company
 Conducted Emissions per CISPR 16-2-1
 Peak Detector Data
 Notes:
 EUT Line tested: 120VAC/60Hz; Neutral Phase
 EUT Power: 3V DC

Work Order # - S1587
 EUT Power Input - 120VAC/ 60Hz
 Test Site - CEMI-5
 Conditions: - 22.8°C; 47%RH; 1000mBar
 Test Engineer - Zac Johnson
 Witnessed by - Sivakumar Thangavelu

Data Taken at 01:46:57 PM, Monday, July 16, 2018

Frequency (MHz)	Raw Pk Reading (dB μ V)	Correction Factor (dB)	Adjusted Pk Amplitude (dB μ V)	QP Lim: Mains_FCC&CISP R_QP_Class_B (dB μ V)	Margin to the QP Limit (dB)	Pk to QP Limit Results (Pass/Fail)	Worst Margin (QP Limit) (dB)	Av Lim: Mains_FCC&CISP R_Avg_Class_B (dB μ V)	Margin to Avg Limit (dB)	Pk to Avg Limit Results (Pass/Fail)	Worst Margin (Avg Limit) (dB)
0.16	24.9	20.9	45.8	65.4	-19.6	PASS	-19.6	55.4	-9.6	PASS	-9.6
0.213	20.4	20.9	41.3	63.1	-21.8	PASS		53.1	-11.8	PASS	
0.246	18.8	20.9	39.7	61.9	-22.2	PASS		51.9	-12.2	PASS	
0.279	12.7	20.9	33.5	60.8	-27.3	PASS		50.8	-17.3	PASS	
0.304	15.2	20.9	36.1	60.1	-24	PASS		50.1	-14	PASS	
0.362	12.1	20.9	33	58.7	-25.7	PASS		48.7	-15.7	PASS	

Neutral Lead - Peak



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 30 of 37

Testing Cert. No. 1627-01

Rev. 7/10/2018

Spectrum Analyzers / Receivers /Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Rental EXA Signal Analyzer(1118472)		9KHz-26.5GHz	N9010A-526;K	AT	MY51170010	1118472	I	7/25/2018	7/25/2017
LISNs/Measurement Probes		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
LISN Asset 1730		150kHz-30MHz	LI-150A	Com-Power	201090	1730	I	4/19/2019	4/19/2018
LISN Asset 1731		150kHz-30MHz	LI-150A	Com-Power	201091	1731	I	4/19/2019	4/19/2018
Conducted Test Sites (Mains / Telco)		FCC Code		VCCI Code			Cat	Calibration Due	Calibrated on
CEMI 5		719150		A-0015			III	NA	N/A
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on	
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	5/15/2020	5/15/2018	
TH A#2079		HTC-1	HDE		2079	II	3/22/2019	3/22/2018	
Cables		Range	Mfr			Cat	Calibration Due	Calibrated on	
CEMI-14		9kHz - 2GHz	C-S			II	10/2/2018	10/2/2017	
Attenuators		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
20dB Attenuator-64		9kHz-2GHz			N/A	II		11/6/2018	11/8/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 31 of 37

Occupied Bandwidth


REQUIREMENT


When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. [RSS-GEN 6.6]

MEASUREMENTS / RESULTS


99% Occupied Bandwidth		
Date: 7/16/2018	Company: Osram	Work Order: S1587
Engineer: Zac Johnson	EUT: iQ ZigBee Controller – PCB Antenna	Operating Voltage/Frequency: 3V DC
Temp: 22.8°C	Humidity: 48%	Pressure: 1000mBar
Frequency Range: 2405-2480 MHz		Measurement Type: Conducted
Notes:		
Frequency (MHz)		99% OBW (MHz)
2405		2.292
2440		2.283
2475		2.291
2480		2.339
Test Site: CEMI-5	Cable: 2286 Cbl	Attenuator: 2107 40dB
Analyzer: 1118472 SA		Copyright Curtis-Straus LLC 2000

PLOTS

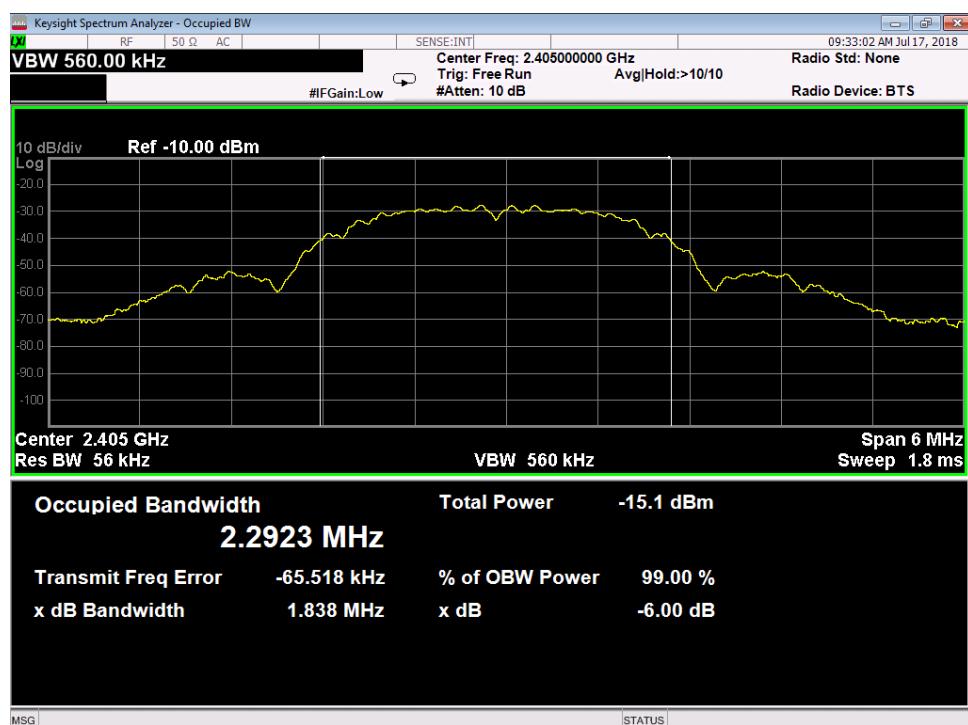

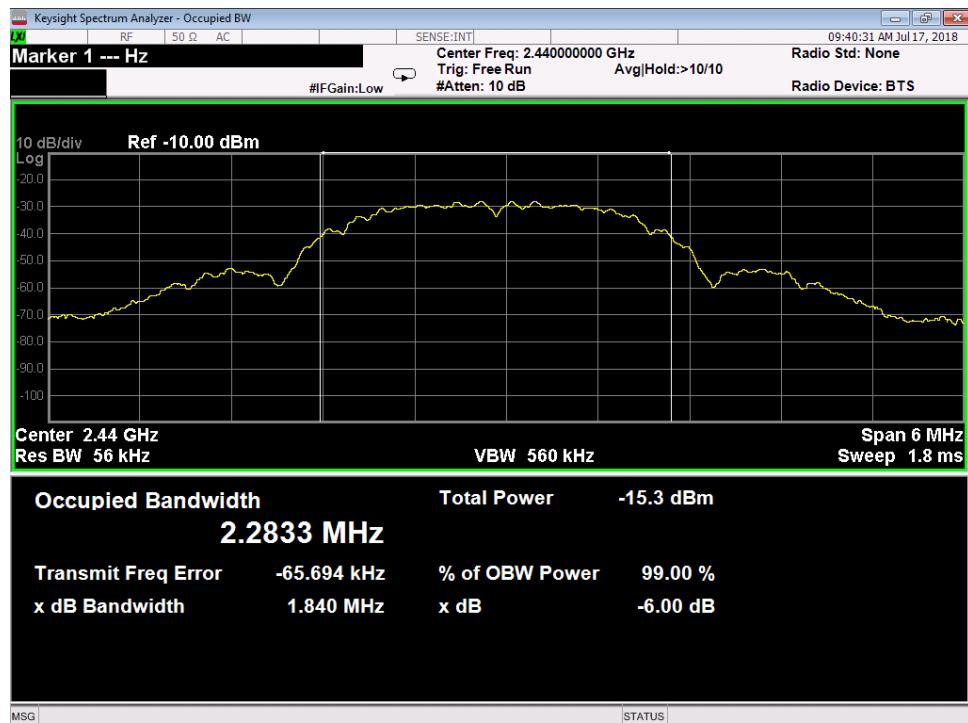

Occupied Bandwidth, Mid Channel

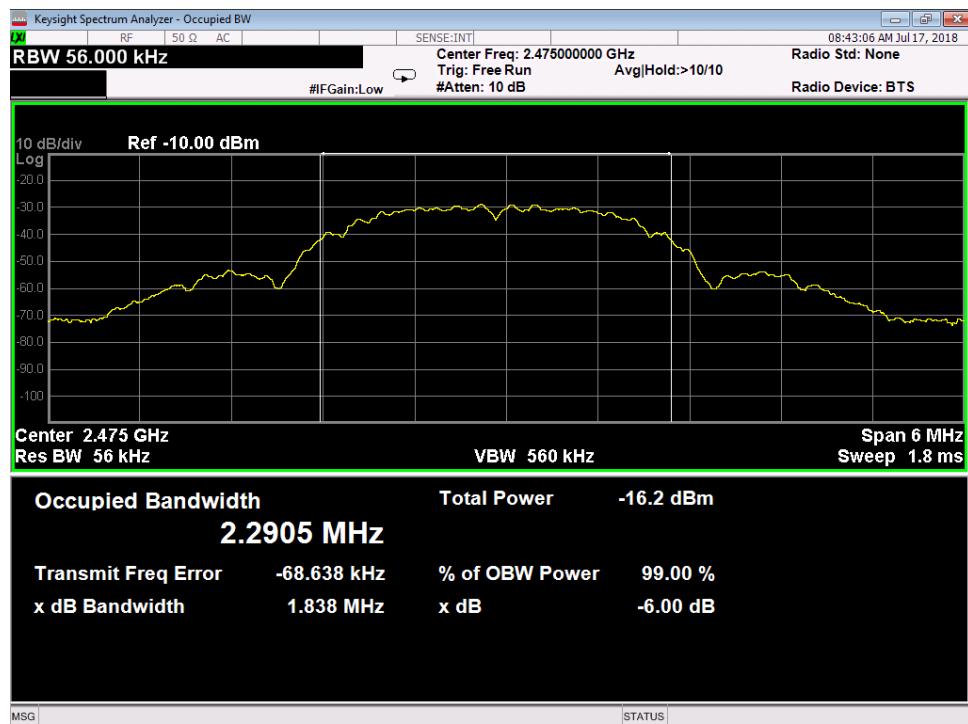


Occupied Bandwidth, High Channel 25 (19dBm)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



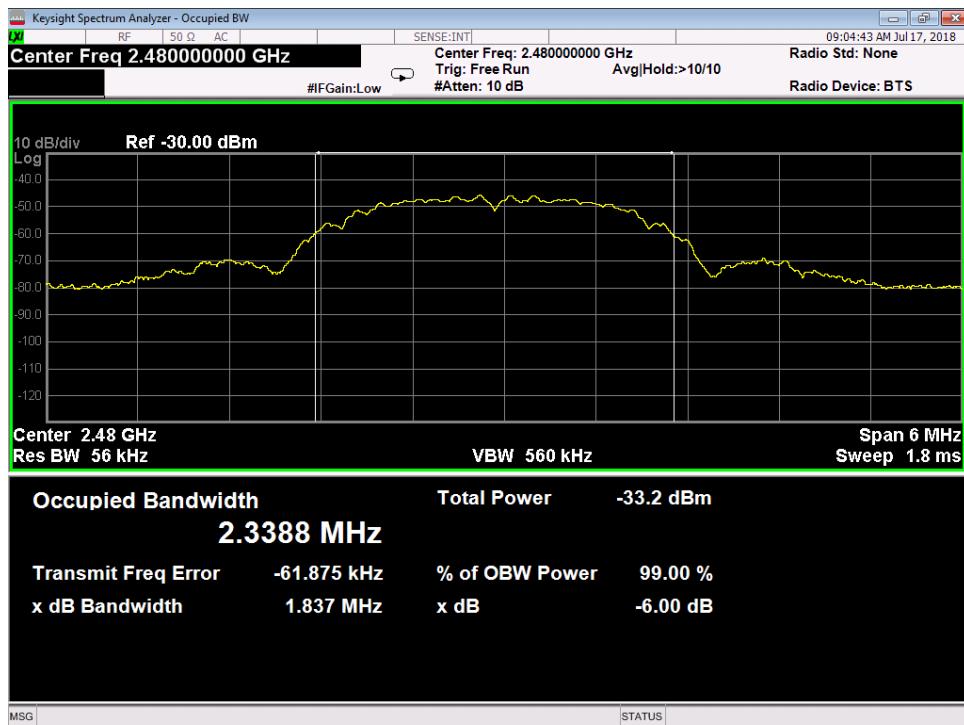

Occupied Bandwidth, High Channel 26 (0dBm)

Rev. 7/10/2018

Spectrum Analyzers / Receivers /Preselectors Rental EXA Signal Analyzer(1118472)	Range 9KHz-26.5GHz	MN N9010A-526;K	Mfr AT	SN MY51170010	Asset 1118472	Cat I	Calibration Due 7/25/2018	Calibrated on 7/25/2017
Conducted Test Sites (Mains / Telco) CEMI 5	FCC Code 719150		VCCI Code A-0015			Cat III	Calibration Due NA	Calibrated on N/A
Preamps /Couplers Attenuators / Filters API - 40dB 100W Attenuator	Range 0.009-18GHz	MN 48-40-34	Mfr API Weinschel	SN CG7990	Asset 2107	Cat II	Calibration Due 10/4/2018	Calibrated on 10/4/2017
Cables Asset #2286	Range 9KHz-26.5GHz	FLC-1.5FT-SMSM+	Mfr Mini-Circuits	16021030		Cat II	Calibration Due 1/29/2019	Calibrated on 1/29/2018

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

TEU for all conducted antenna port measurements



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 34 of 37

Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucispqr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucispqr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "**BUREAU VERITAS**," "**BUREAU VERITAS CONSUMER PRODUCTS SERVICES**," "**BVCPs**," "**MTL**," "**ACTS**," "**MTL-ACTS**" and **CURTIS-STRAUS** (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 36 of 37

Testing Cert. No. 1627-01

15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND INrecognition of the relative risks and benefits to Client and the Company associated with the testing services contemplated hereby, the risks have been allocated such that under no circumstances whatsoever shall the liability of the Company to Client or any third party in respect of any claim for loss, damage or expense, of whatsoever nature or magnitude, and howsoever arising, exceed an amount equal to five (5) times the amount of the fees paid to the Company for the specific services which gave rise to such claim or U.S.\$10,000, whichever is the lesser amount.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request. Rev.160009121(2)_#684340 v14CS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

