

Variant FCC RF Test Report


APPLICANT : DELL Inc.
EQUIPMENT : Tablet PC
BRAND NAME : Dell
MODEL NAME : T01C; T01C003
TYPE NAME : T01C003
FCC ID : E2K-T01C003
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

This is a variant report which is only valid together with the original test report. The product was received on May 30, 2014 and testing was completed on Sep. 13, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 EUT Operation Test Setup	9
3 TEST RESULT	10
3.1 Radiated Band Edges and Spurious Emission Measurement	10
4 LIST OF MEASURING EQUIPMENT.....	19
5 UNCERTAINTY OF EVALUATION.....	20
APPENDIX A. SETUP PHOTOGRAPHS	
APPENDIX B. PRODUCT EQUALITY DECLARATION	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR422417-01A	Rev. 01	This is a variant report for T01C; T01C003. The product equality declaration could be referred to Appendix B. Based on the similarity between two models, only the worst case of Radiated Spurious Emission from original test report (Sporton Report Number FR422417A) was verified.	Oct. 31, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.39 dB at 191.020 MHz

1 General Description

1.1 Applicant

DELL Inc.

One Dell Way, Round Rock, Texas 78682, United States

1.2 Manufacturer

DELL Inc.

One Dell Way, Round Rock, Texas 78682, United States

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	Dell
Model Name	T01C; T01C003
Type Name	T01C003
FCC ID	E2K-T01C003
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR/Bluetooth v4.0 LE
HW Version	B2
SW Version	Venue7 3740_V1.84_140916-NoModem
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Antenna Type	IFA Antenna
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are five types of EUT for this project. The differences between them are summary below:

Sample List	RAM	ROM	CPU	Front Camera	Rear Camera	LCD	PCBA	Color
Sample 1	1G	16G	1.6 PRQ	OV	Liteon	CPT without EMI coating	Chinabuild	Black
Sample 2	2G	16G	1.6 QS	OV	Liteon	AUO with EMI coating	Tripod	Red
Sample 3	2G	16G	1.6 QS	OV	Liteon	CPT with EMI coating	Chinabuild	Black
Sample 4	2G	16G	1.6 QS	OV	Liteon	AUO without EMI coating	Chinabuild	Red
Sample 5	2G	16G	1.6 QS	OV	Liteon	AUO without EMI coating	Tripod	Red

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.	
	TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH01-KS	149928/4086E-1

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.


2 Test Configuration of Equipment Under Test

2.1 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated	Bluetooth BR 1Mbps GFSK
Test Cases	Mode 1: CH78_2480 MHz
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable for Sample 1.	

2.2 Connection Diagram of Test System

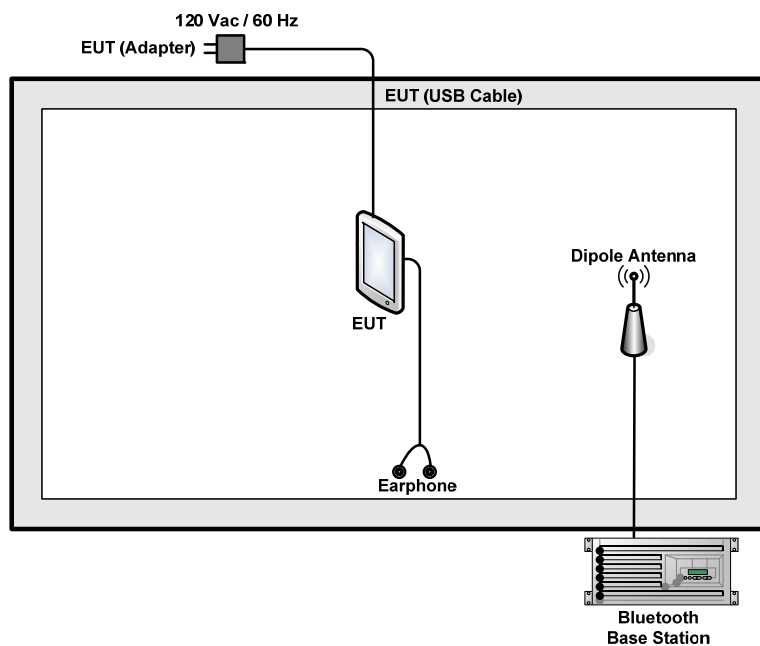

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.4 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.1.4 Test Setup


For radiated emissions below 30MHz

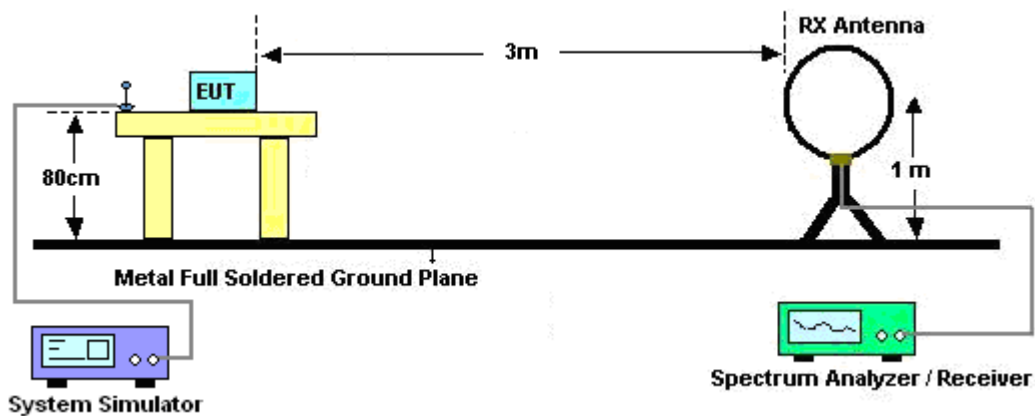

For radiated emissions from 30MHz to 1GHz

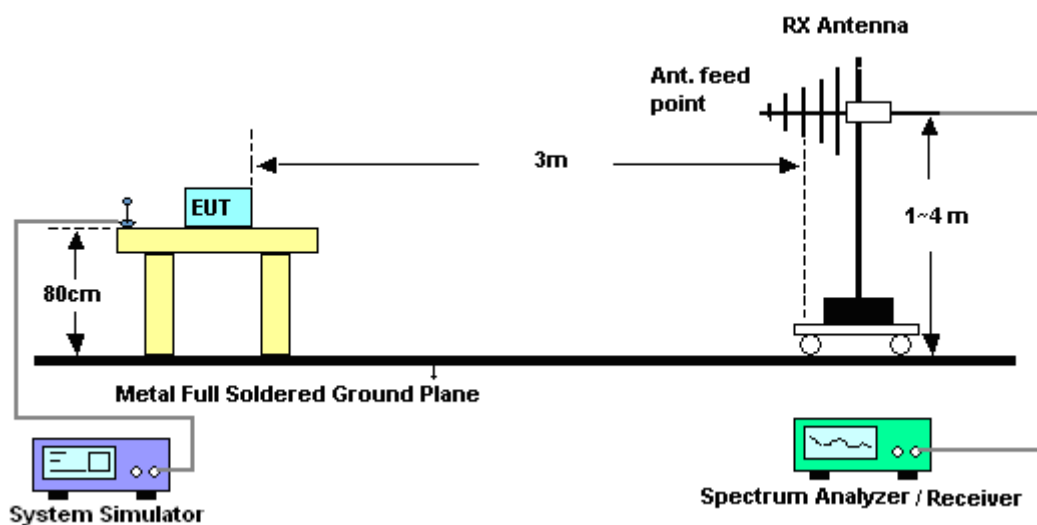

For radiated emissions above 1GHz

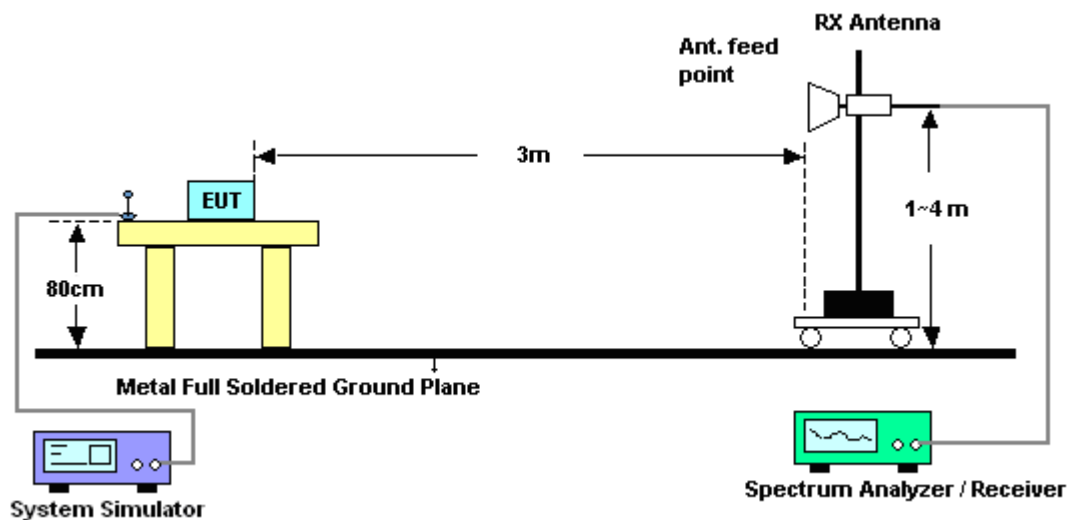


3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.1.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

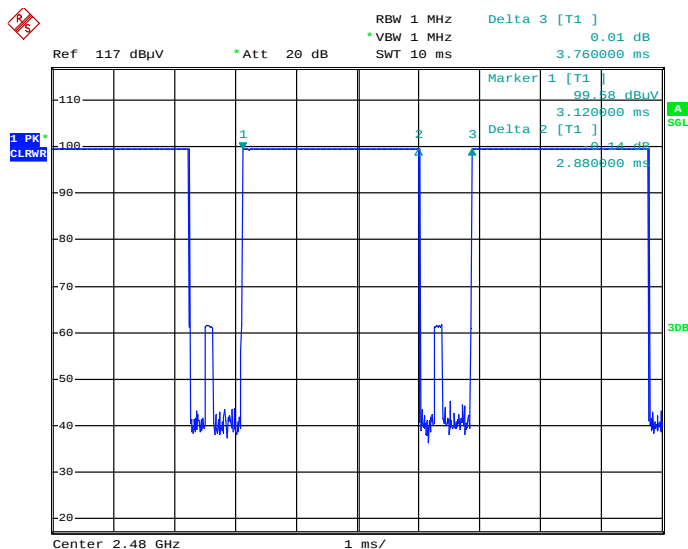

Date: 13.SEP.2014 10:35:45

DH5 on time (Count Pulses) Plot on Channel 39

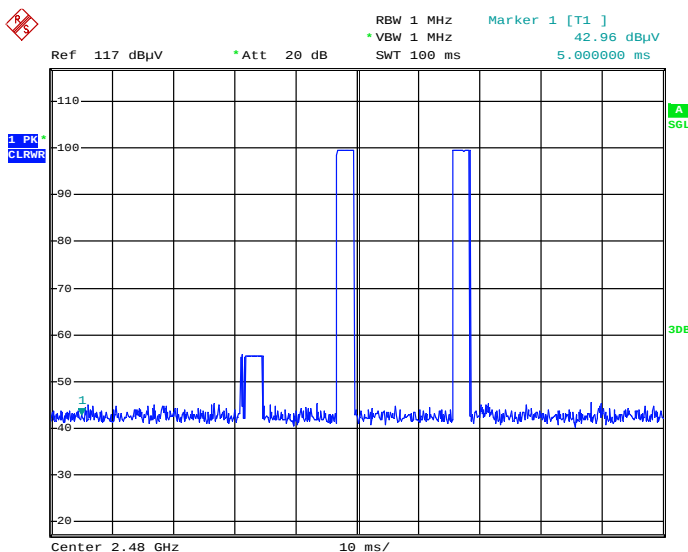

Date: 13.SEP.2014 10:32:28

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

3.1.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	78	Relative Humidity :	42~43%
		Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	61.86	-12.14	74	58.49	33.01	3.65	33.29	165	40	Peak
2483.5	37.07	-16.93	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	58.51	-15.49	74	55.14	33.01	3.65	33.29	100	148	Peak
2483.5	33.72	-20.28	54	-	-	-	-	-	-	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	78	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
97.9	27.47	-16.03	43.5	50.03	10.15	0.91	33.62	-	-	Peak
191.02	34.11	-9.39	43.5	57.86	8.55	1.26	33.56	100	120	Peak
280.26	24.86	-21.14	46	44.05	12.66	1.55	33.4	-	-	Peak
378.23	21.78	-24.22	46	37.96	15.38	1.77	33.33	-	-	Peak
551.86	23.34	-22.66	46	35.75	18.5	2.1	33.01	-	-	Peak
800.18	23.91	-22.09	46	34.12	19.85	2.56	32.62	-	-	Peak
2480	102.55	-	-	99.18	33.01	3.65	33.29	165	48	Peak
2480	77.76	-	-	-	-	-	-	165	48	Average
4960	46.63	-27.37	74	39.9	35.2	5.33	33.8	100	154	Peak
7440	49.41	-24.59	74	40.57	36.27	6.75	34.18	100	10	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

Test Mode :	1Mbps	Temperature :	22~23°C
Test Channel :	78	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
46.49	30.11	-9.89	40	54.2	8.88	0.64	33.61	112	120	Peak
188.11	29.83	-13.67	43.5	53.66	8.48	1.25	33.56	-	-	Peak
286.08	23.39	-22.61	46	42.44	12.78	1.56	33.39	-	-	Peak
461.65	23.31	-22.69	46	38.08	16.46	1.96	33.19	-	-	Peak
558.65	23.23	-22.77	46	35.58	18.51	2.15	33.01	-	-	Peak
744.89	22.18	-23.82	46	32.66	19.86	2.45	32.79	-	-	Peak
2480	98.92	-	-	95.55	33.01	3.65	33.29	100	146	Peak
2480	74.13	-	-	-	-	-	-	100	146	Average
4960	47.88	-26.12	74	41.15	35.2	5.33	33.8	100	120	Peak
7440	48.2	-25.8	74	39.36	36.27	6.75	34.18	145	226	Peak

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Sep. 13, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Sep. 13, 2014	May 03, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Sep. 13, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Sep. 13, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Sep. 13, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Sep. 13, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Mar. 10, 2014	Sep. 13, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Sep. 13, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Dec. 10, 2013	Sep. 13, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Sep. 13, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Sep. 13, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Sep. 13, 2014	NCR	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5
---	-----



Appendix B. Product Equality Declaration

Product Equality Declaration

(Declaration of equality of a product variant with a previously assessed original product. To be signed in the name of the company that is responsible for the product variant)

We, **BYD Precision Manufacture CO., LTD**, declare on our sole responsibility for the product --
Model Name: T01C003 (FCC ID: E2K-T01C003) as below:

The main differences conducted to 2nd source are:

1. Add 2nd source of Adapter , P/N: LA10EUNM130 & LA10USNM130
2. Add 2nd source of DDR3, P/N: 11143382-00 & 11212957-00
3. Add 2nd source of EMMC, P/N: 11147188-00 & 11169784-00
4. Add 2nd source of LCD, P/N: 11218030-00 & 11170378-00 & 11218117-00
5. SW differences as below:

Change from YTP802A110830 to Venue7 3740_V1.84_140916-NoModem


6. HW differences as below:

1. Fuel Gauge IC upgrade from BQ27441DRZR-G 1A to BQ27441DRZR-G1B.

SCH location:

P708-B1-BOT

B2

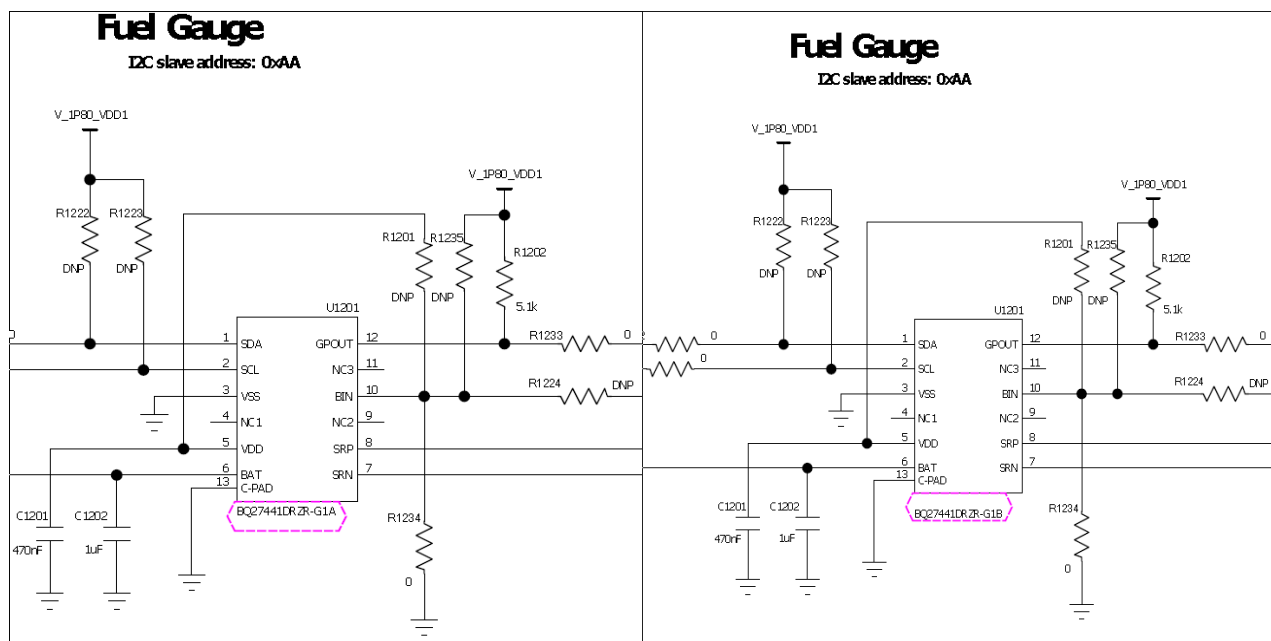



2. BT/WIFI antenna matching optimization.

C2149 change from 0402 0.75 PF to 0402 0.9 PF;
C2150 change from 0402 0.5 PF to 0402 DNP;
C2148 change from 0402 9 PF to 0402 1.2NH;
J2101 change from MM8030-2610B/RJ3/RK0 to DNP;
R2101 change from DNP to 0201 0R.

SCH location:

P708-B1-BOT

B2

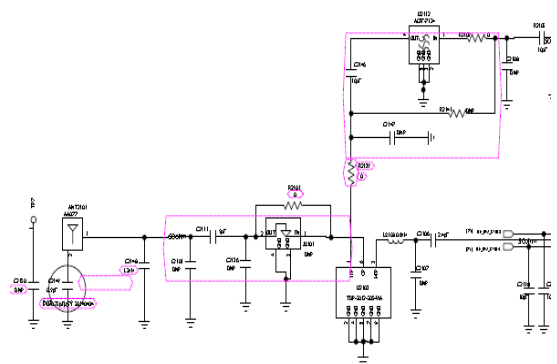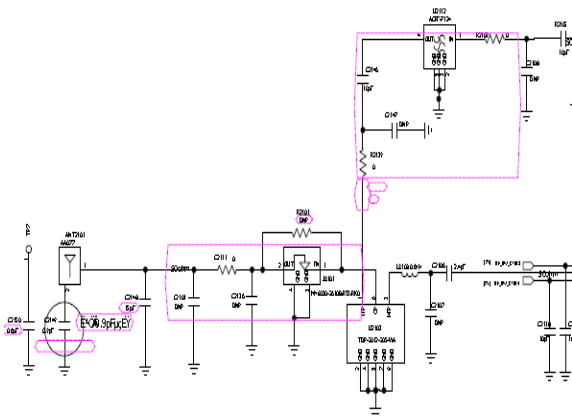



3. Optimization of audio circuit.

Add R2457 0R 0201 L2410;
Delete R2456, L2401, L2402, L2409.

SCH location:

P708-B1-BOT

B2

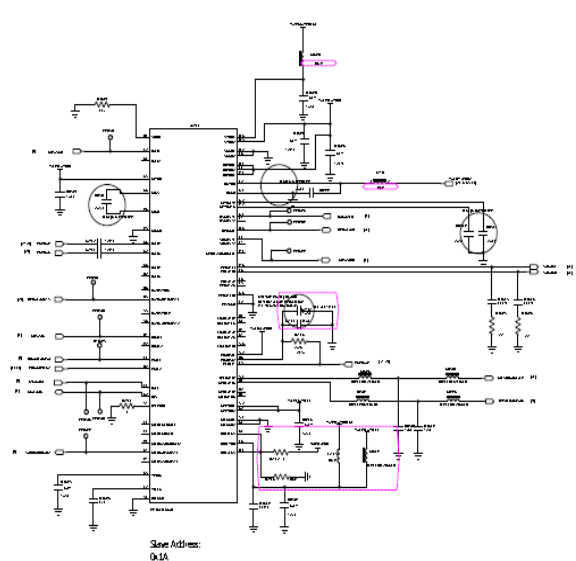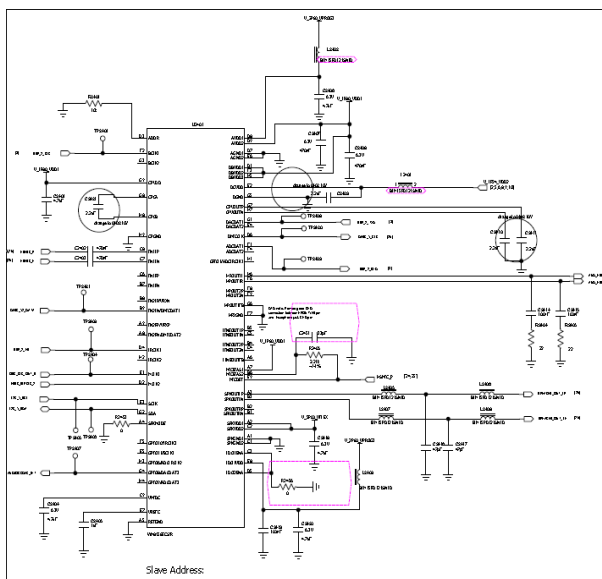


4. Optimization Headset interface circuit.


Add C2452 4.7uF 0402;
 R2506 change from 0R 0402 to BLM15AG601SN1D;
 R2507 change from 0R 0402 to BLM15AG601SN1D;
 C2506 change from 0201 DNP to 0201 100nF;
 R2504 change from 10R 0201 to 33R 0201;
 R2505 change from 10R 0201 to 33R 0201;
 Add C2515 33pF 0201.

SCH location:

P708-B1-BOT

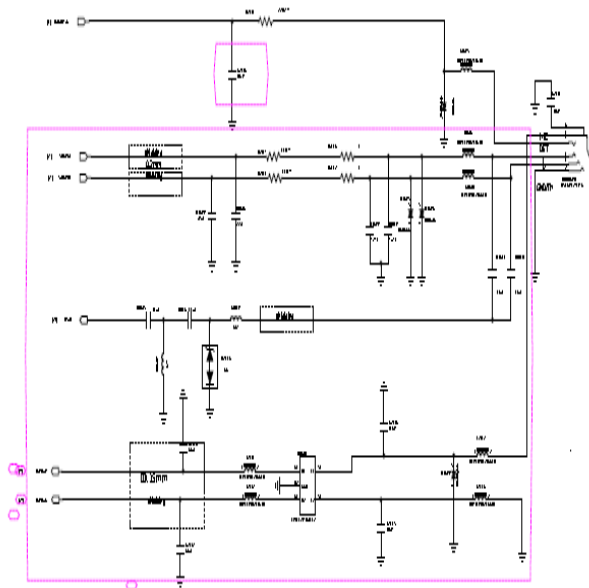

B2

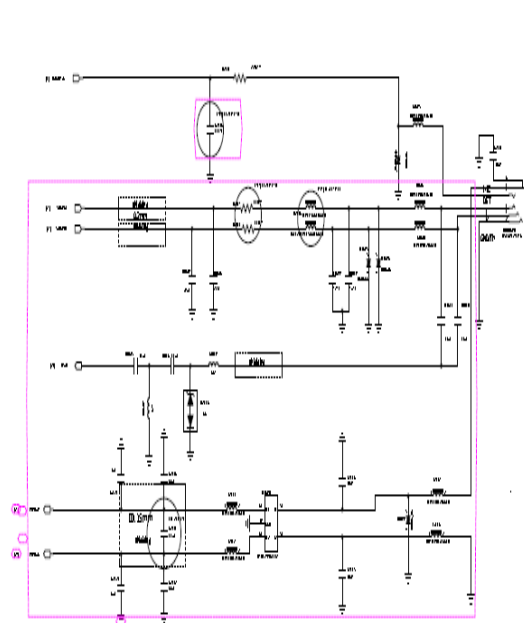


5. Replacing the USB connector.

Connector changed from CON3001 MCB03-5K1200C to 3FU005S-7W200CR007.


SCH location:

P708-B1-BOT

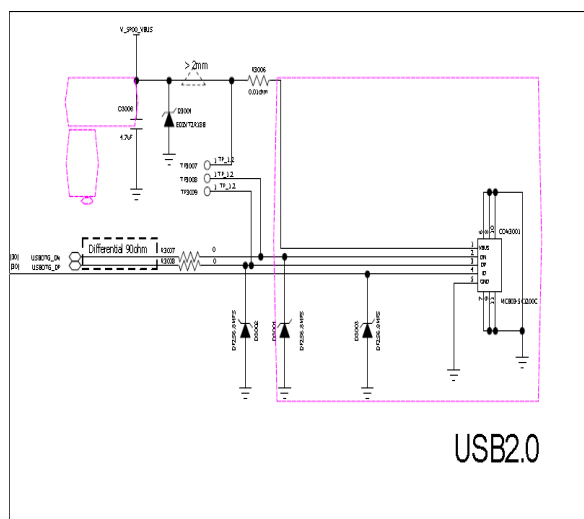

USB2.0

B2

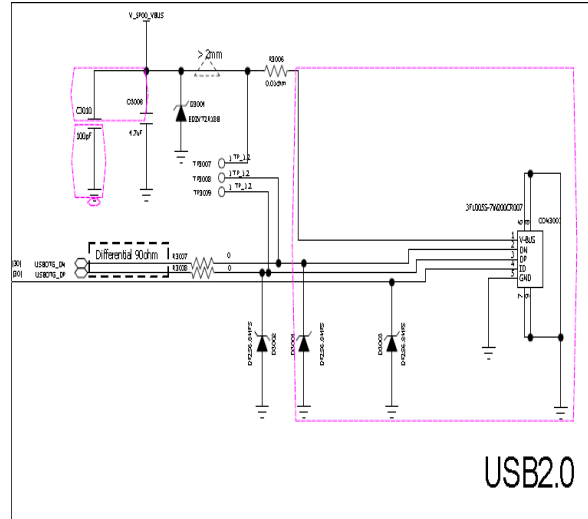

USB2.0

6. Optimization of LED lamp control circuit.


Q3101 change from RUE003N02GZTL to DNP;

R3148 change from 750 R to DNP;


R3140 change from 220K to DNP.

SCH location:

P708-B1-BOT

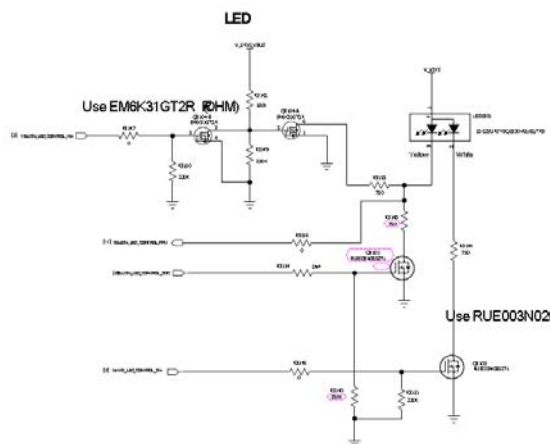

B2

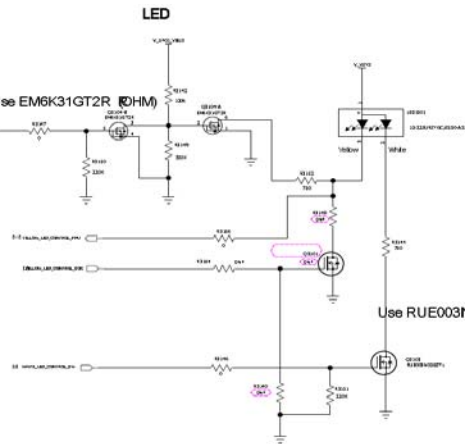


7. Delete Debug connector DNP J3201.

SCH location:


P708-B1-BOT

Debug connector

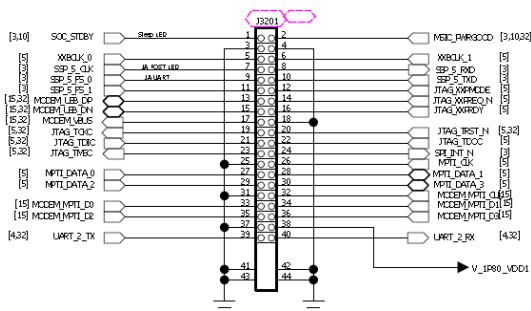

B2

Debug connector

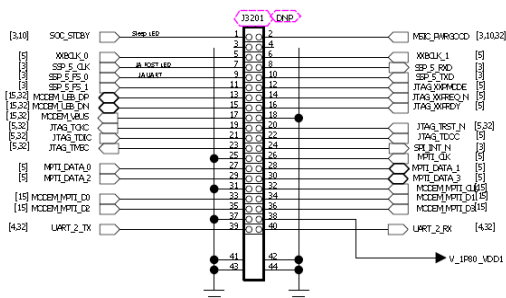

All of these changes listed above have been applied to the samples used for lab tests.

Contact Person:

Zeli Tao

Company: BYD Precision Manufacture CO.,LTD

Tel: : +86-10-58018888-71774

Fax: +86-10-58018888-73000

E-Mail: tao.zeli@byd.com.