

**#01\_WCDMA II\_RMC 12.2Kbps\_Edge 1\_0mm\_Ch9262**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_231126 Medium parameters used :  $f = 1852.4$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(8.37, 8.37, 8.37) @ 1852.4 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.70 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.63 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.05 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.482 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 1.45 W/kg

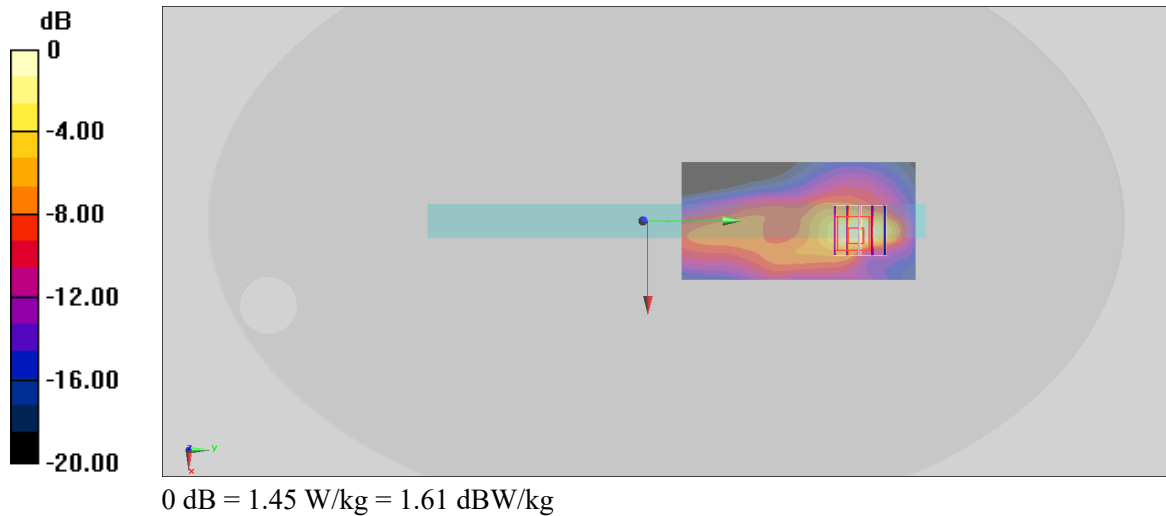

**#02\_WCDMA IV\_RMC 12.2Kbps\_Edge 1\_0mm\_Ch1312**

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_231127 Medium parameters used :  $f = 1712.4$  MHz;  $\sigma = 1.33$  S/m;  $\epsilon_r = 40.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(8.56, 8.56, 8.56) @ 1712.4 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.33 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.420 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.29 W/kg

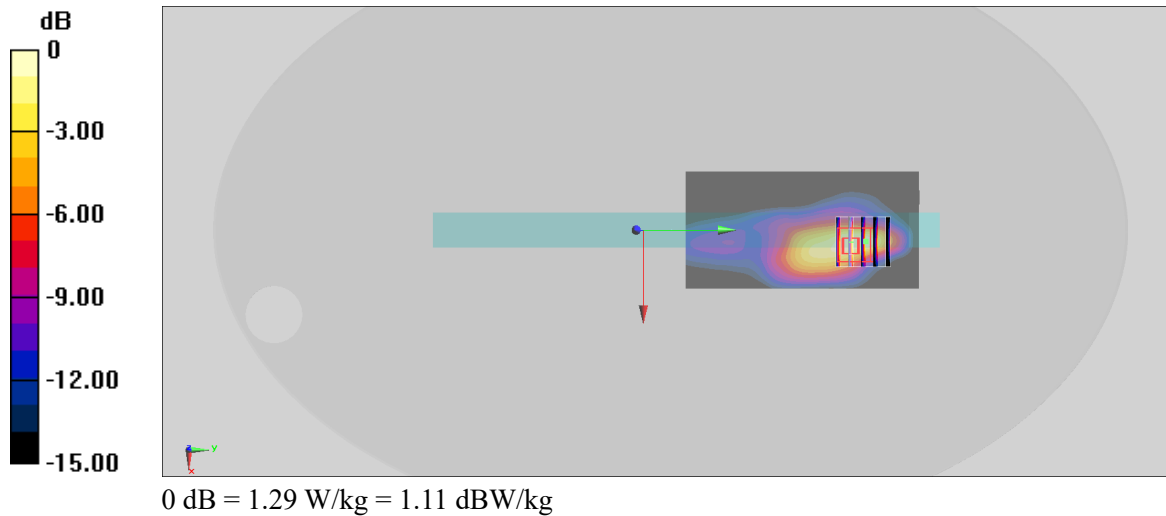

**#03\_WCDMA V\_RMC 12.2Kbps\_Edge 1\_0mm\_Ch4233**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_231125 Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.923$  S/m;  $\epsilon_r = 42.15$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(9.89, 9.89, 9.89) @ 846.6 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.12 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.491 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 1.58 W/kg

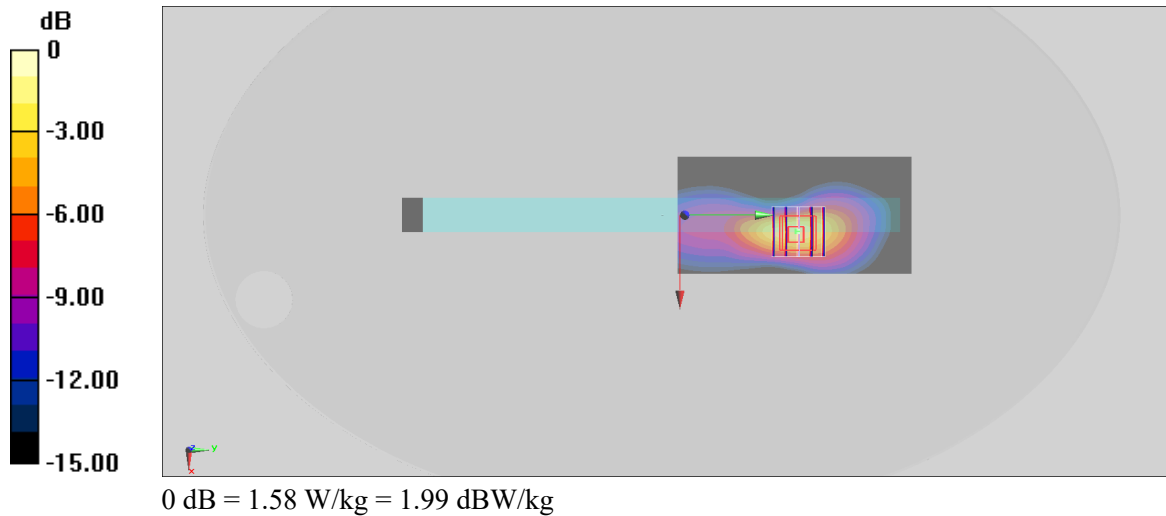

**#04\_LTE Band 7\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch20850**

Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_231122 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.908$  S/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(7.56, 7.56, 7.56) @ 2510 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.15 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.49 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.57 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.383 W/kg**

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 43.5%

Maximum value of SAR (measured) = 2.03 W/kg

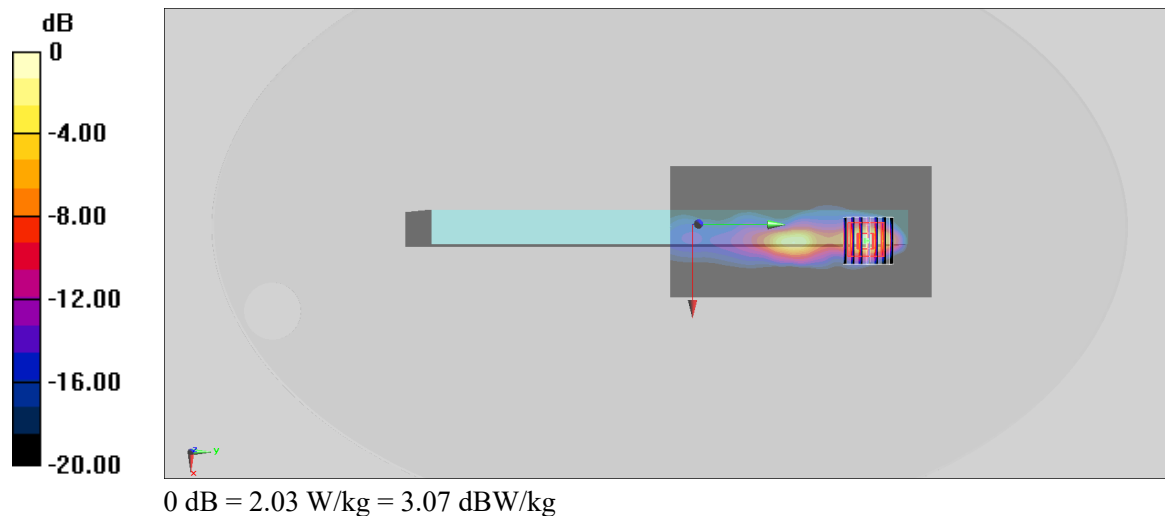

**#05\_LTE Band 12\_10M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch23095**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_231124 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.875$  S/m;  $\epsilon_r = 43.031$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(10.31, 10.31, 10.31) @ 707.5 MHz; Calibrated: 2023/7/18

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn853; Calibrated: 2023/7/14

- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.48 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.430 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 1.27 W/kg

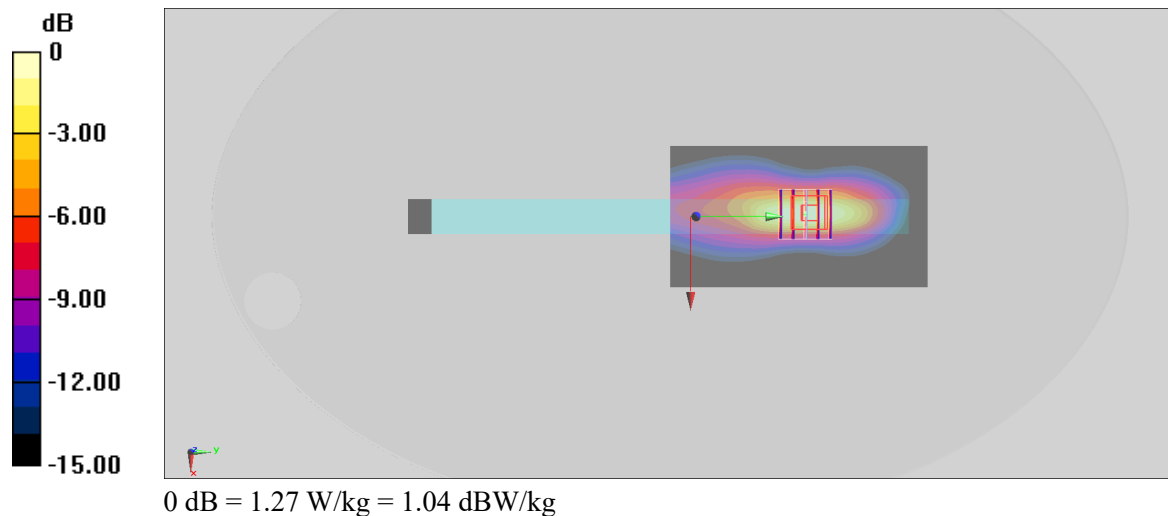

**#06\_LTE Band 13\_10M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch23230**

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_231124 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.899 \text{ S/m}$ ;  $\epsilon_r = 42.735$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.3 \text{ }^\circ\text{C}$

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(10.31, 10.31, 10.31) @ 782 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $1.39 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $39.58 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$


Peak SAR (extrapolated) =  $1.66 \text{ W/kg}$

**SAR(1 g) =  $0.882 \text{ W/kg}$ ; SAR(10 g) =  $0.490 \text{ W/kg}$**

Smallest distance from peaks to all points 3 dB below =  $8 \text{ mm}$

Ratio of SAR at M2 to SAR at M1 =  $52.9\%$

Maximum value of SAR (measured) =  $1.39 \text{ W/kg}$

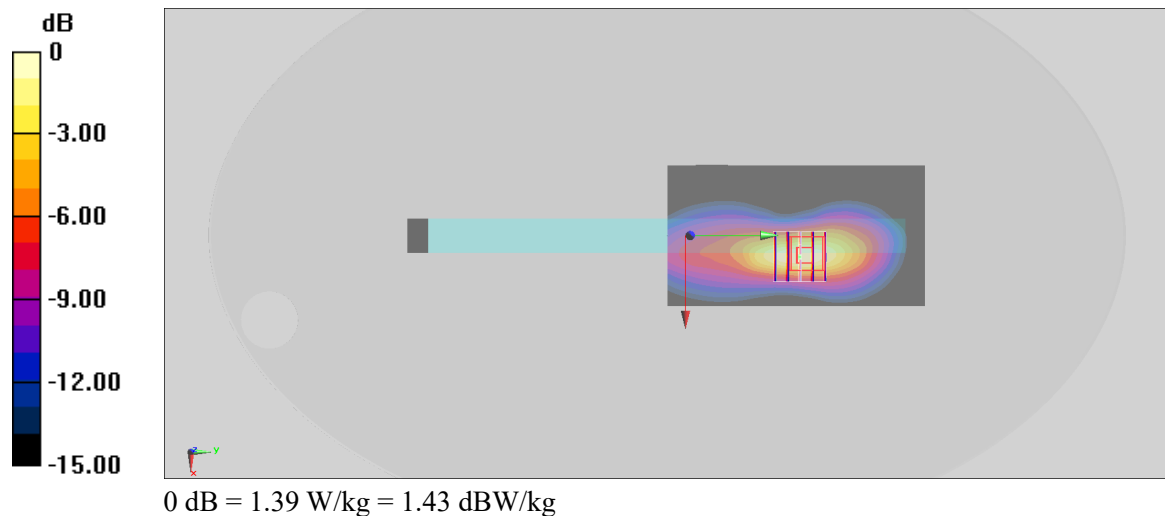

**#07\_LTE Band 14\_10M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch23330**

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_231124 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 42.347$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(10.31, 10.31, 10.31) @ 793 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.14 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.432 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 1.30 W/kg

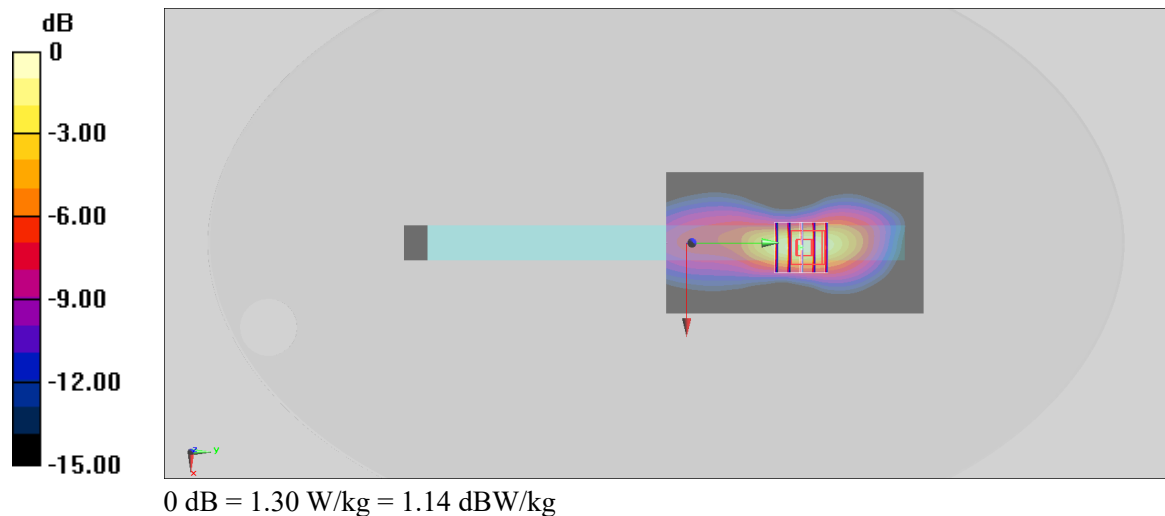

**#08\_LTE Band 25\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch26140**

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_231126 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 39.954$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(8.37, 8.37, 8.37) @ 1860 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.89 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.96 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.17 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.518 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 1.80 W/kg

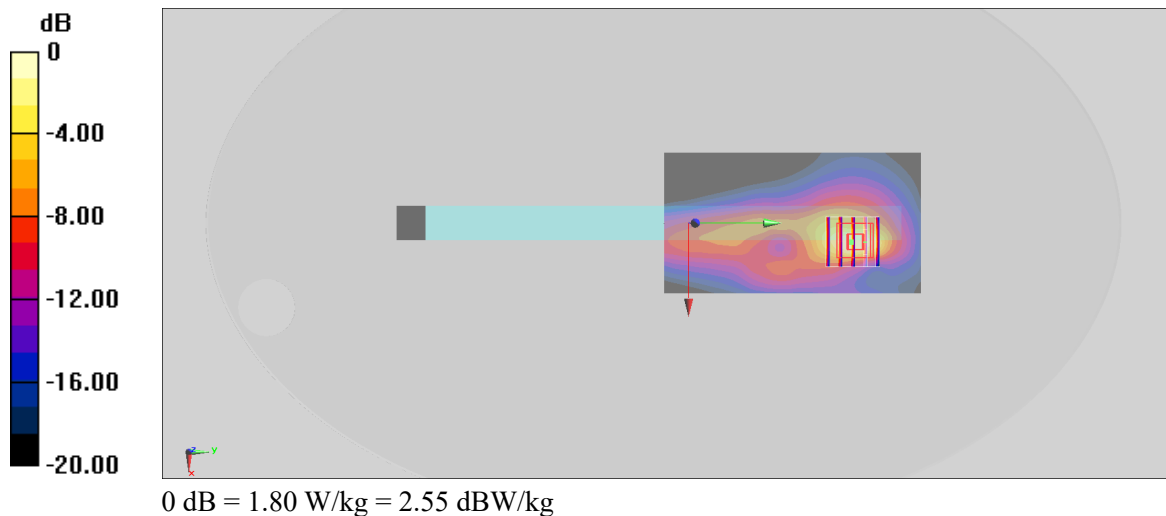



**#09\_LTE Band 26\_15M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch26865**

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_231125 Medium parameters used :  $f = 831.5$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 42.385$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(9.89, 9.89, 9.89) @ 831.5 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.79 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.84 W/kg

**SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.504 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.53 W/kg

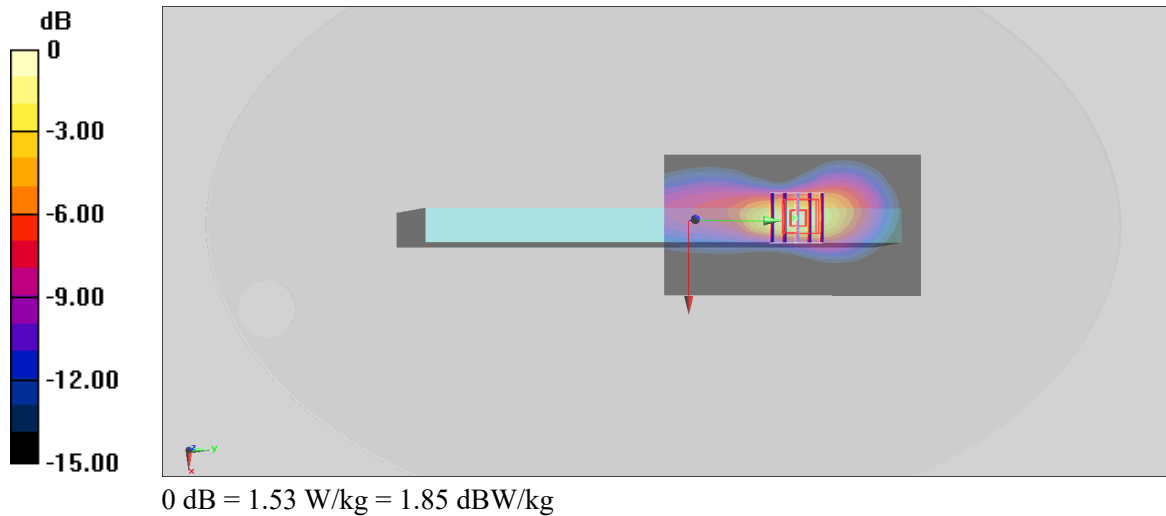

**#11\_LTE Band 30\_10M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch27710**

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL\_2300\_231123 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.673$  S/m;  $\epsilon_r = 39.636$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(7.92, 7.92, 7.92) @ 2310 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.59 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.33 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.311 W/kg**

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 1.52 W/kg

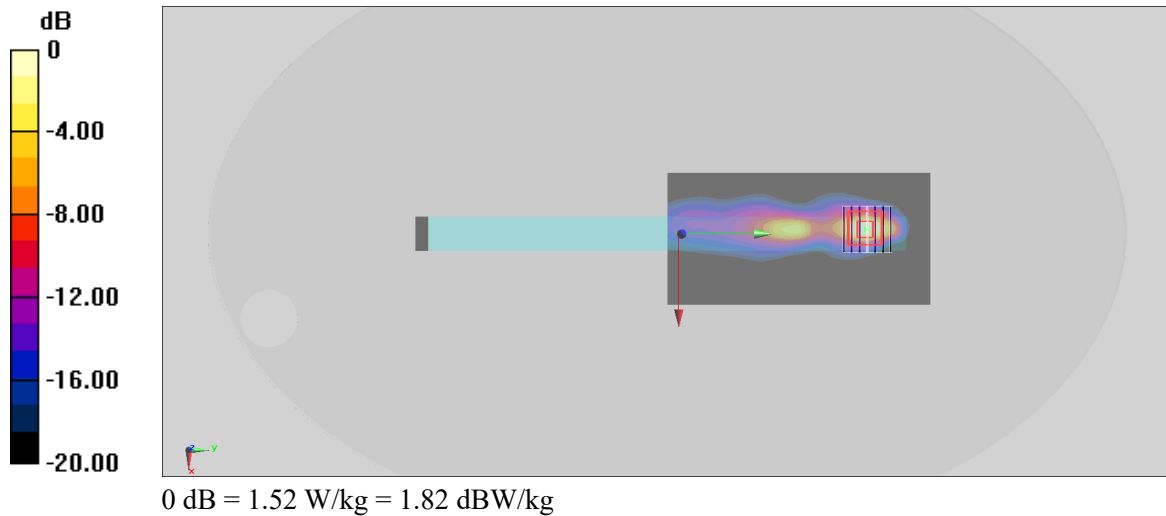

**#12\_LTE Band 66\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch132072**

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_231127 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.329$  S/m;  $\epsilon_r = 40.262$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(8.56, 8.56, 8.56) @ 1720 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.17 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.39 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.375 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 1.13 W/kg

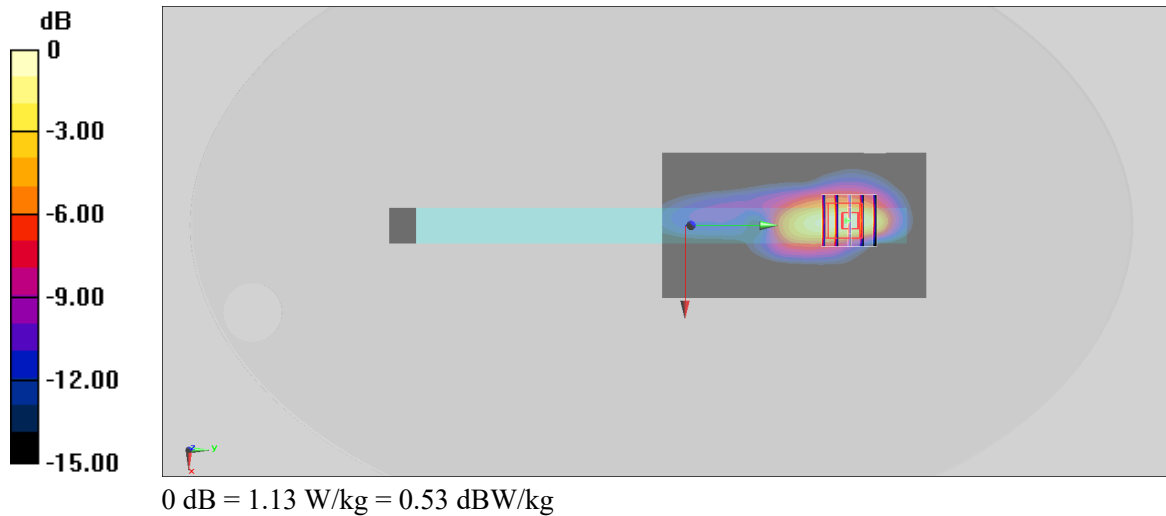

**#13\_LTE Band 71\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch133297**

Communication System: LTE; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_231125 Medium parameters used :  $f = 680.5$  MHz;  $\sigma = 0.858$  S/m;  $\epsilon_r = 42.947$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(10.31, 10.31, 10.31) @ 680.5 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x111x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.43 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 41.96 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.508 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 1.53 W/kg

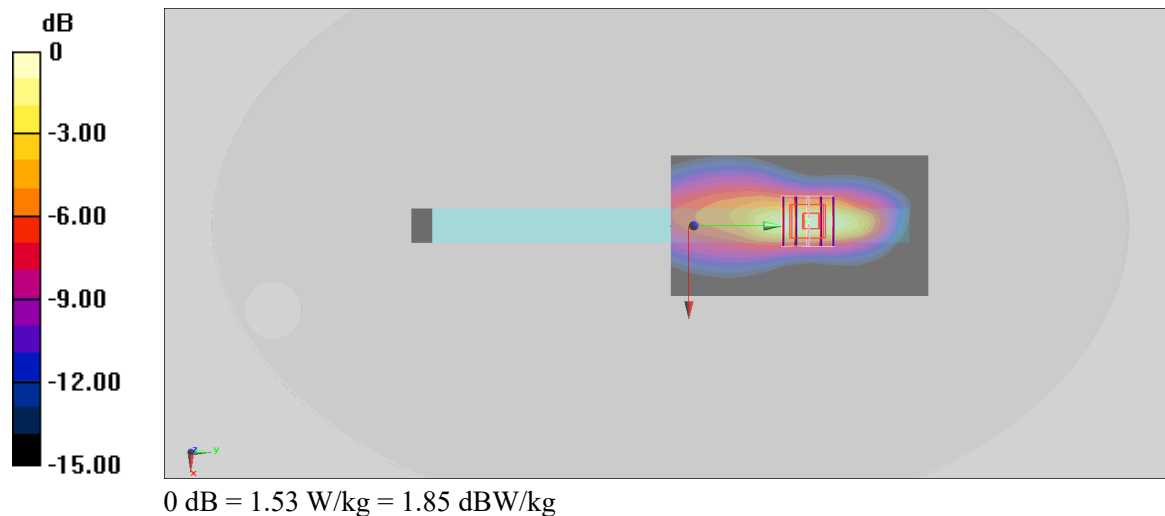

**#14\_LTE Band 41\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch41490**

Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600\_231122 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.105$  S/m;  $\epsilon_r = 38.502$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(7.56, 7.56, 7.56) @ 2680 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.13 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.397 W/kg**

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 2.15 W/kg

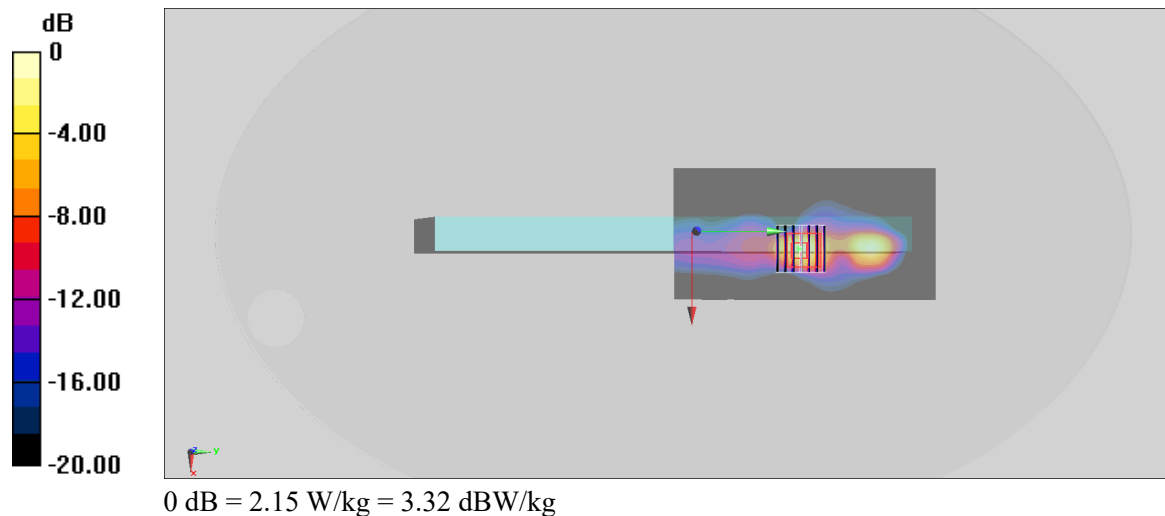

**#15\_LTE Band 48\_20M\_QPSK\_1\_0\_Edge 1\_0mm\_Ch56150**

Communication System: LTE; Frequency: 3641 MHz; Duty Cycle: 1:1.59

Medium: HSL\_3700\_231123 Medium parameters used :  $f = 3641$  MHz;  $\sigma = 3.114$  S/m;  $\epsilon_r = 38.068$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN7306; ConvF(6.98, 6.98, 6.98) @ 3641 MHz; Calibrated: 2023/7/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2023/7/14
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1026
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 19.99 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.237 W/kg**

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 1.32 W/kg

