

Annex A. SAR Plots of System Verification

The plots for system verification are shown as follows.

S01 System Check_H1900_210921

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0921 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.786$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.03 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.24 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 1.88 W/kg; SAR(10 g) = 0.983 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.03 W/kg

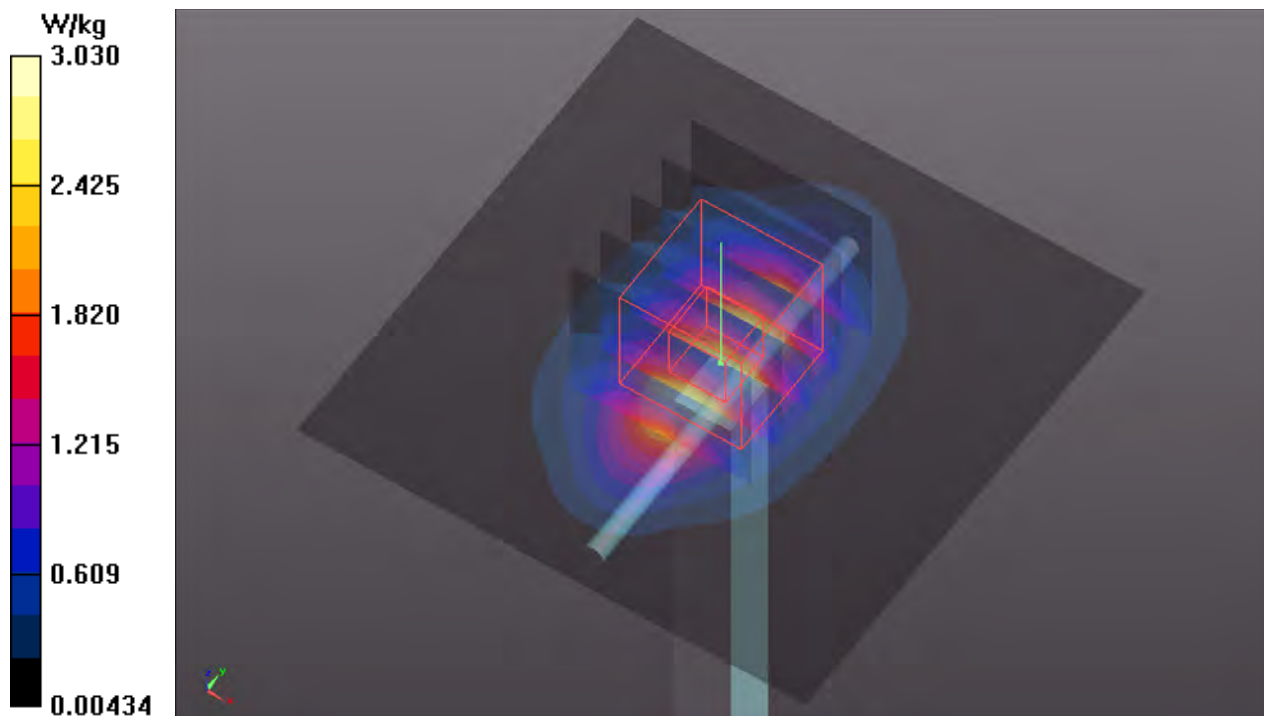

S02 System Check_H1750_210921

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0921 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.052$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.49 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.45 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 1.74 W/kg; SAR(10 g) = 0.862 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.77 W/kg

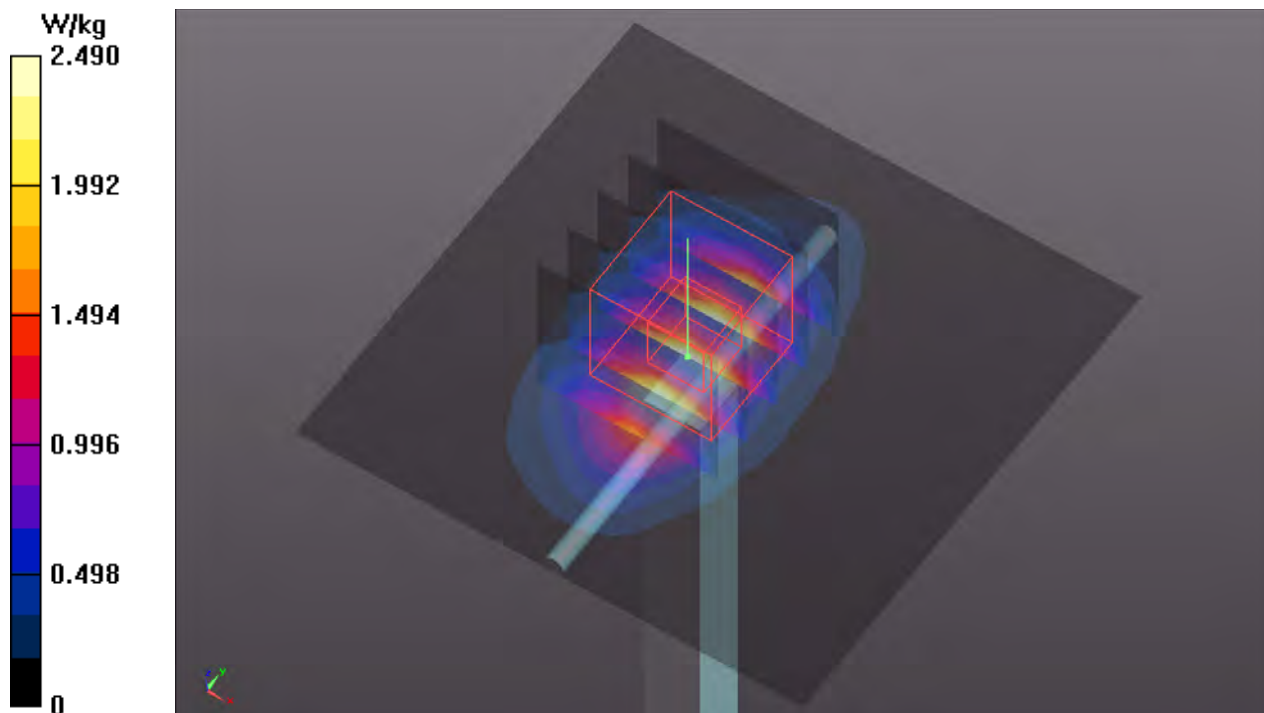

S03 System Check_H835_210921

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0921 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 40.321$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $23.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.671 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.11 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.488 W/kg ; SAR(10 g) = 0.320 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.675 W/kg

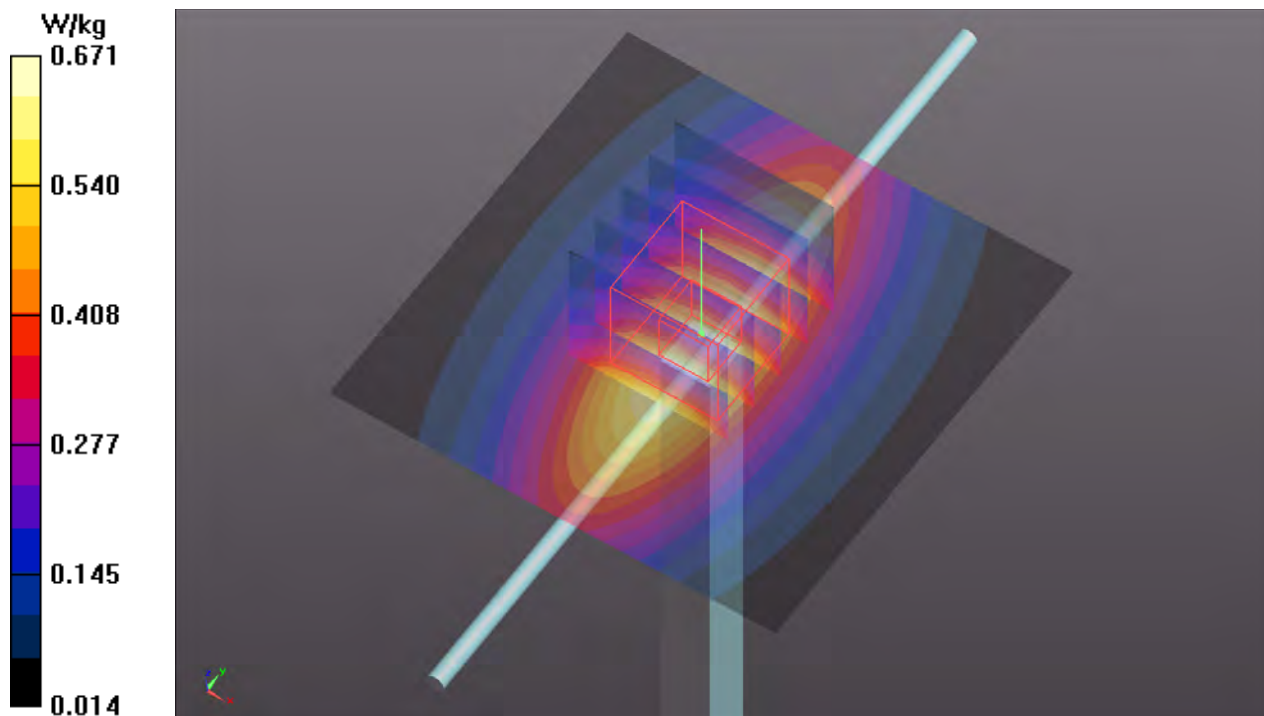

S04 System Check_H1900_210921

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0921 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.786$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.03 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.24 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 1.88 W/kg; SAR(10 g) = 0.983 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.03 W/kg

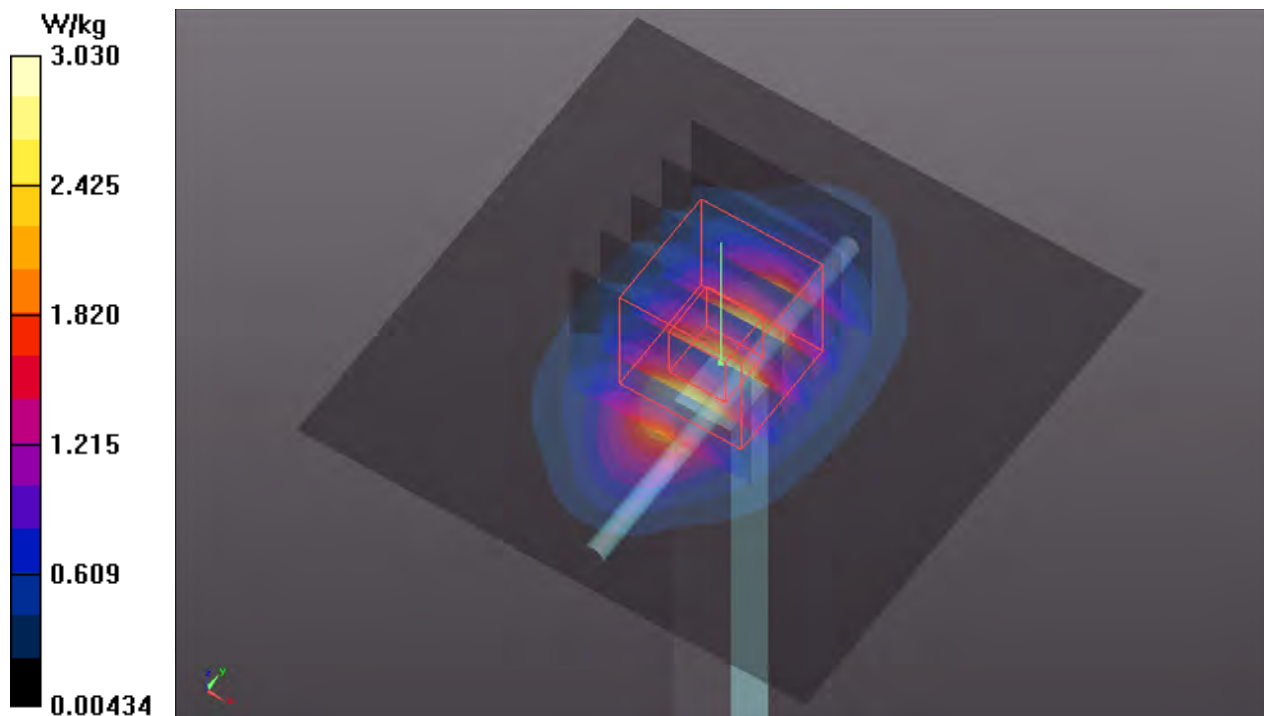

S05 System Check_H1900_210923

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0923 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.14 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.71 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.795 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.14 W/kg

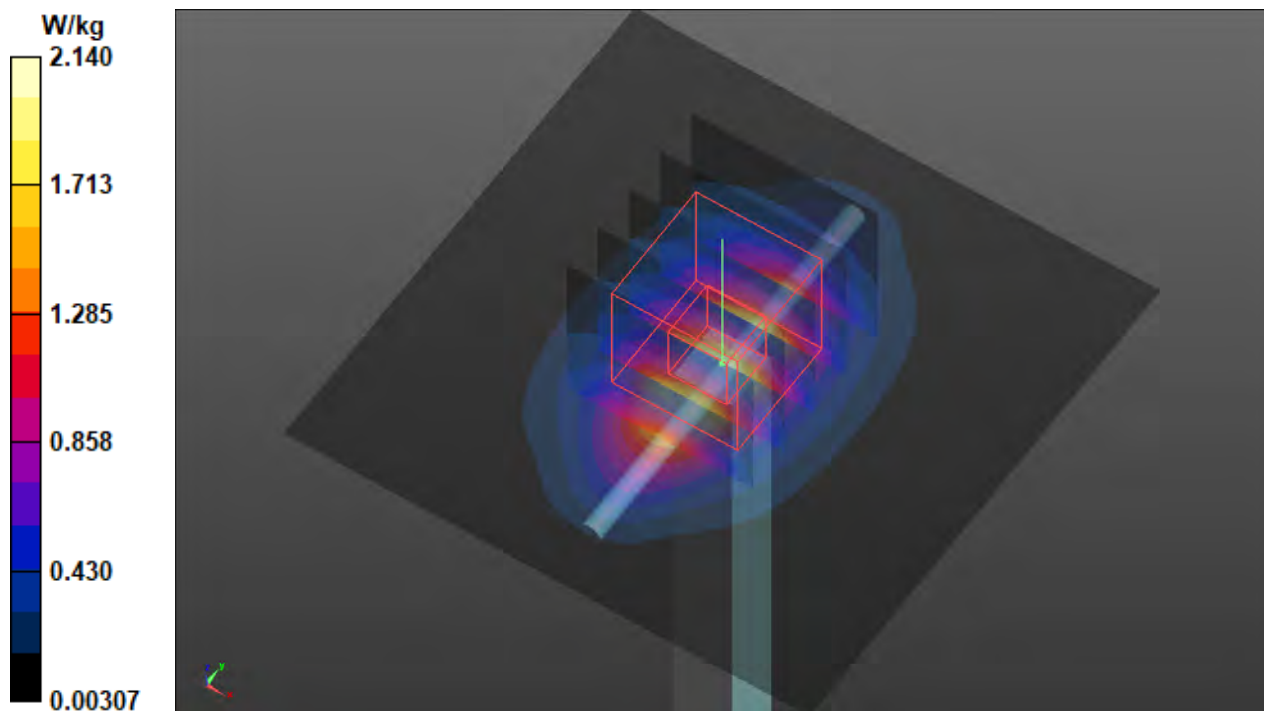

S06 System Check_H1750_210921

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0921 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.052$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.49 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.45 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 1.74 W/kg; SAR(10 g) = 0.862 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.77 W/kg

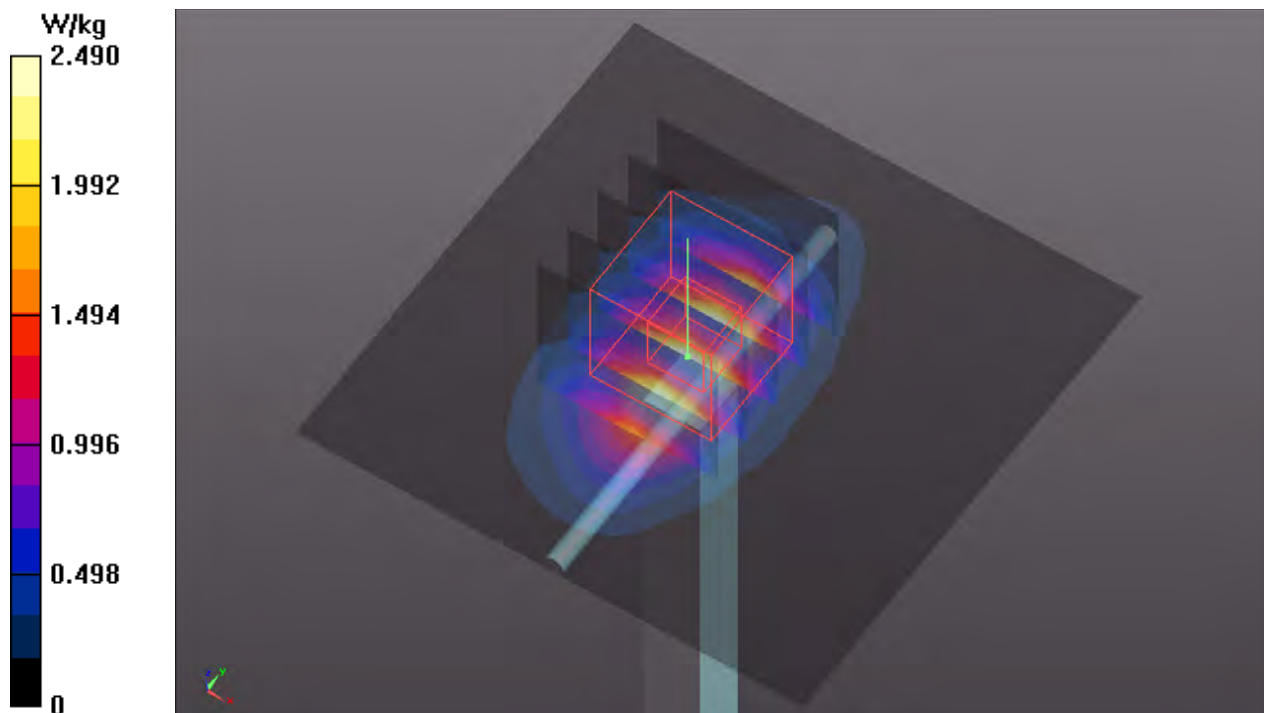


S07 System Check_H835_210921**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0921 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 40.321$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $23.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

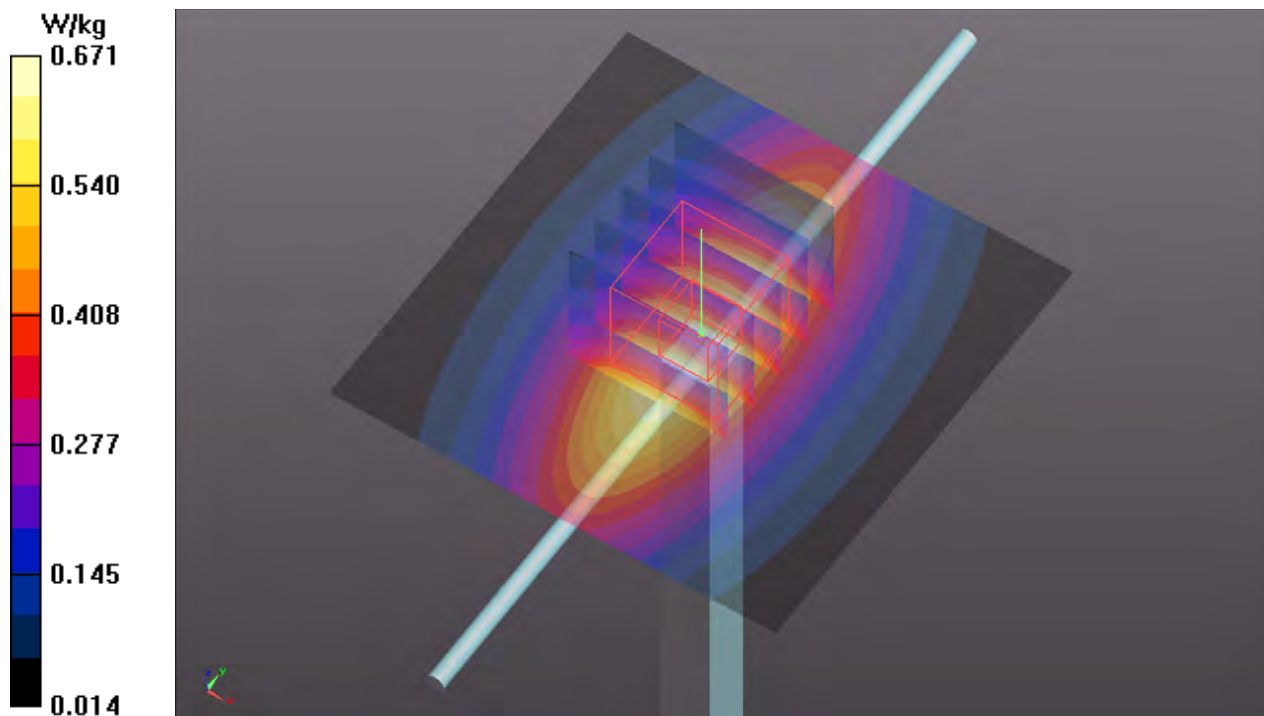Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.671 W/kg **Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 28.11 V/m ; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.767 W/kg **SAR(1 g) = 0.488 W/kg ; SAR(10 g) = 0.320 W/kg** (SAR corrected for target medium)Maximum value of SAR (measured) = 0.675 W/kg 

S08 System Check_H2600_210922

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0922 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 37.693$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.58, 7.58, 7.58) @ 2600 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.73 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.01 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.87 W/kg

SAR(1 g) = 2.8 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.74 W/kg

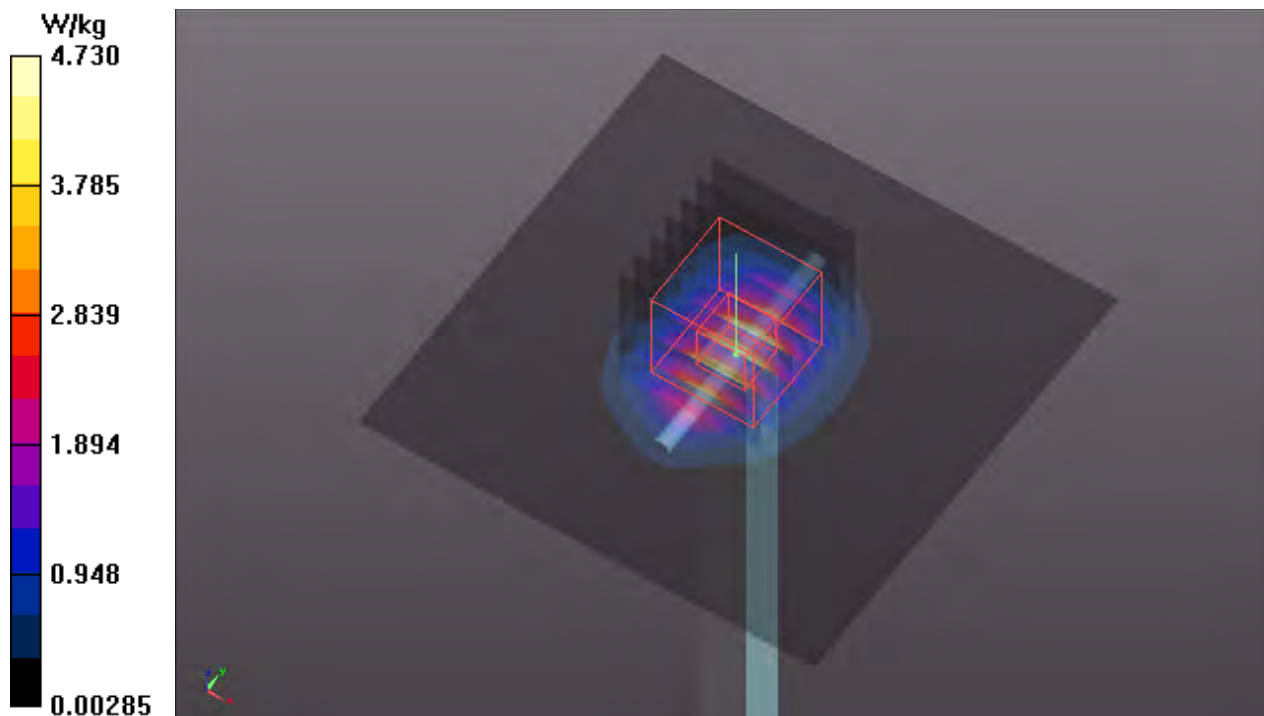

S09 System Check_H2600_210924**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0924 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 37.859$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.94 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.00 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.19 W/kg

SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.94 W/kg

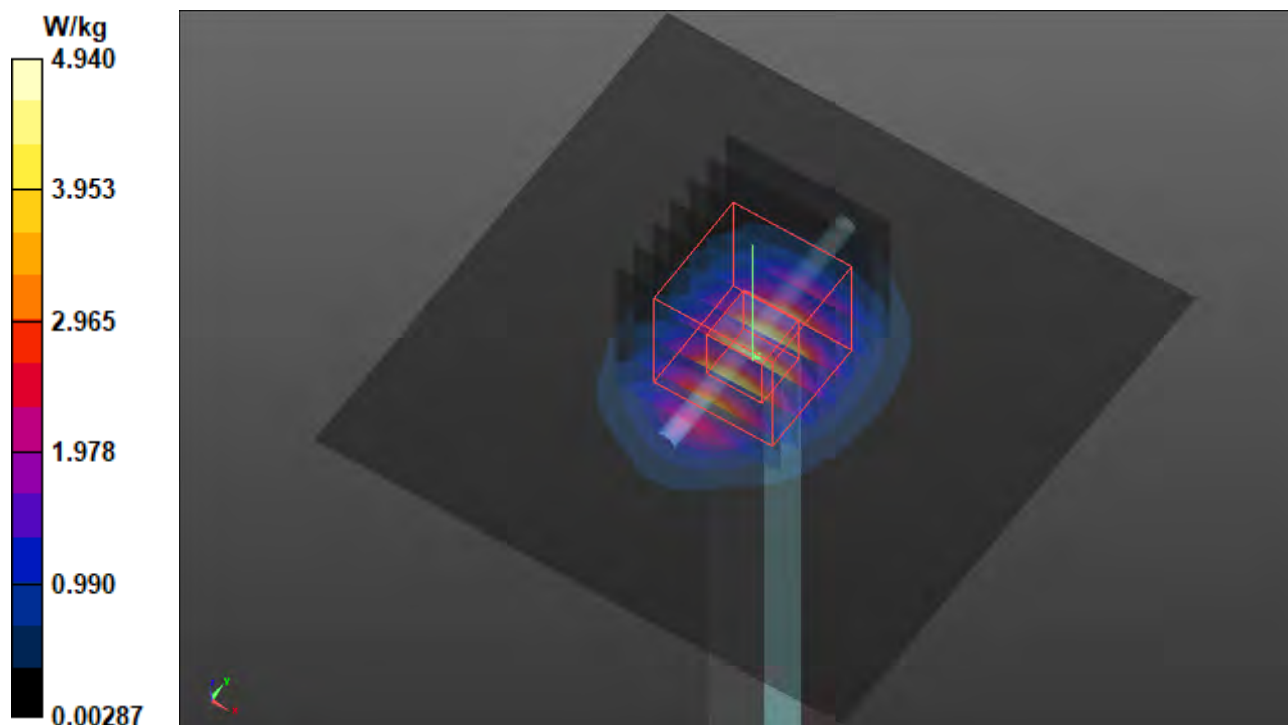

S10 System Check_H750_210921

DUT: Dipole 750 MHz D750V3; SN: 1078

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0921 Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.504$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.42 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.265 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.549 W/kg

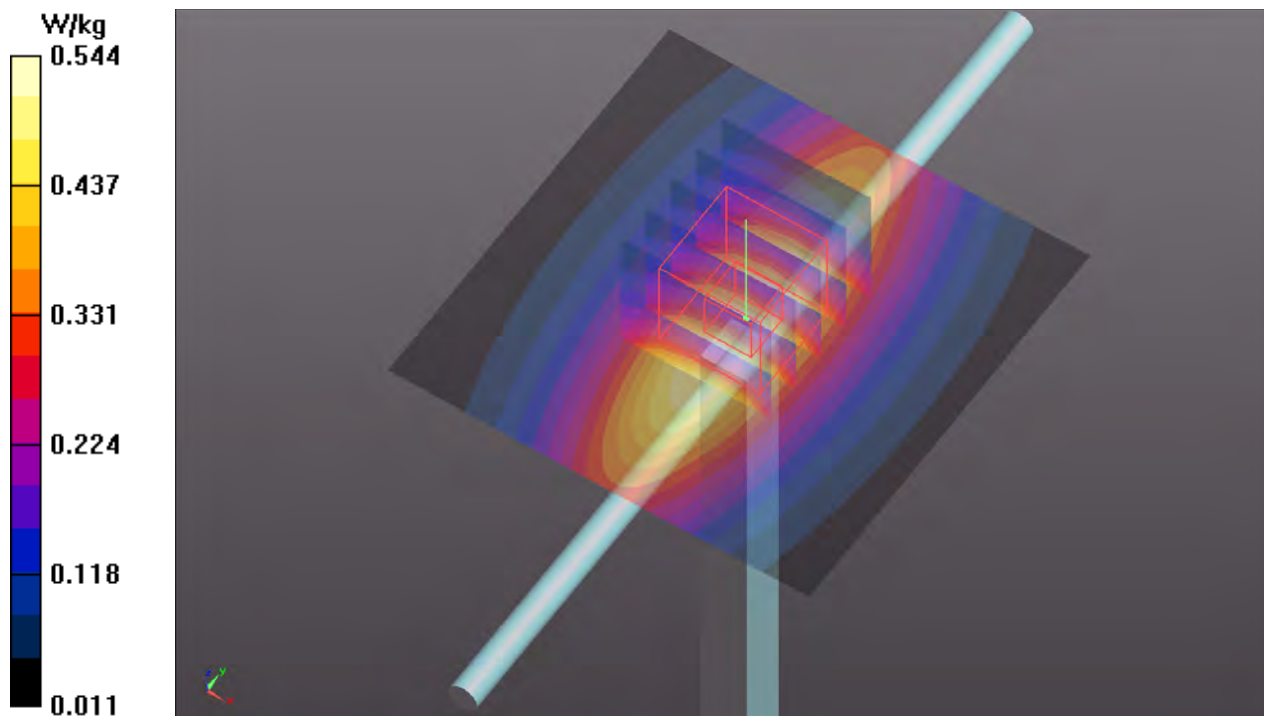

S11 System Check_H750_210921

DUT: Dipole 750 MHz D750V3; SN: 1078

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0921 Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.504$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.42 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.265 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.549 W/kg

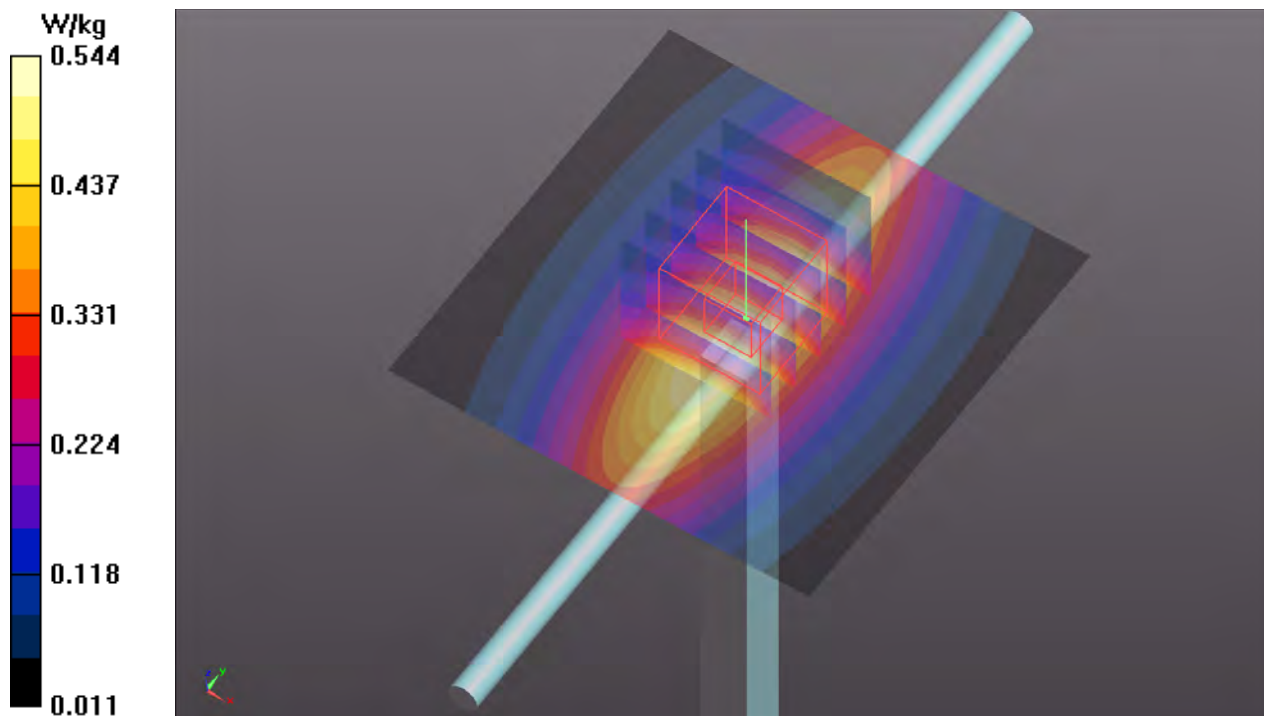

S12 System Check_H750_210921

DUT: Dipole 750 MHz D750V3; SN: 1078

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0921 Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.504$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.42 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.265 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.549 W/kg

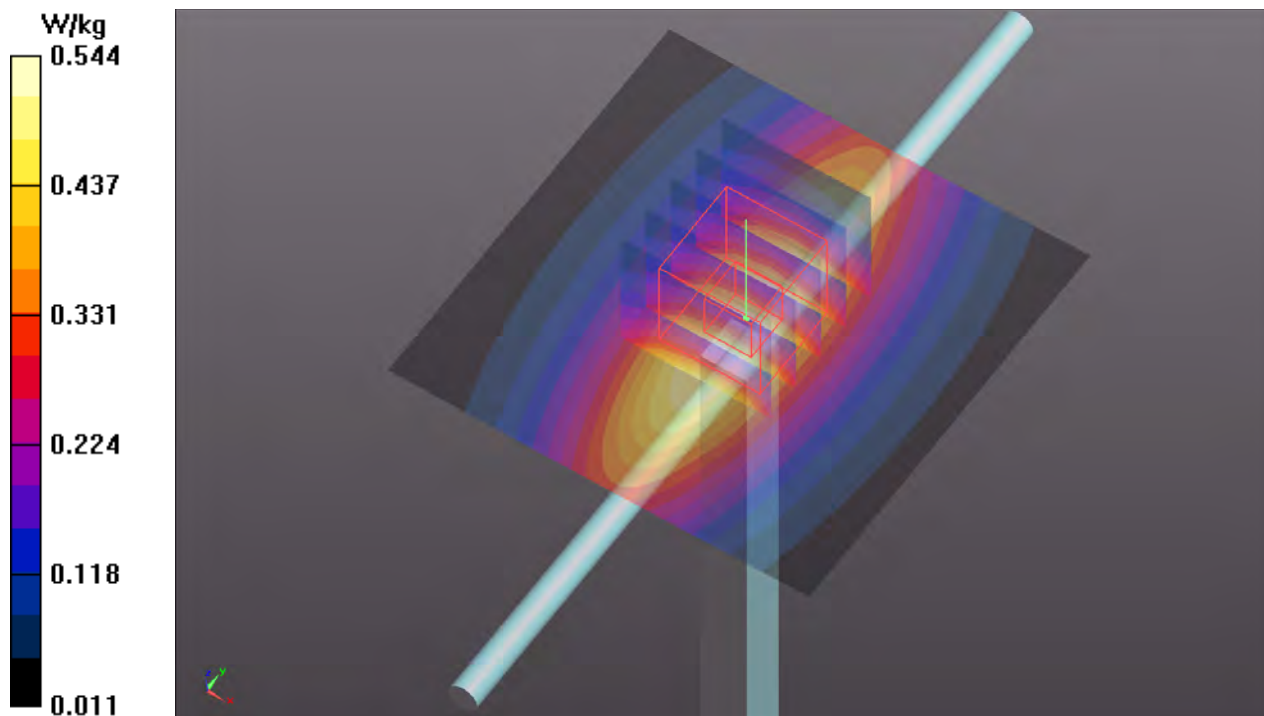

S13 System Check_H750_210921

DUT: Dipole 750 MHz D750V3; SN: 1078

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0921 Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.504$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.42 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.265 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.549 W/kg

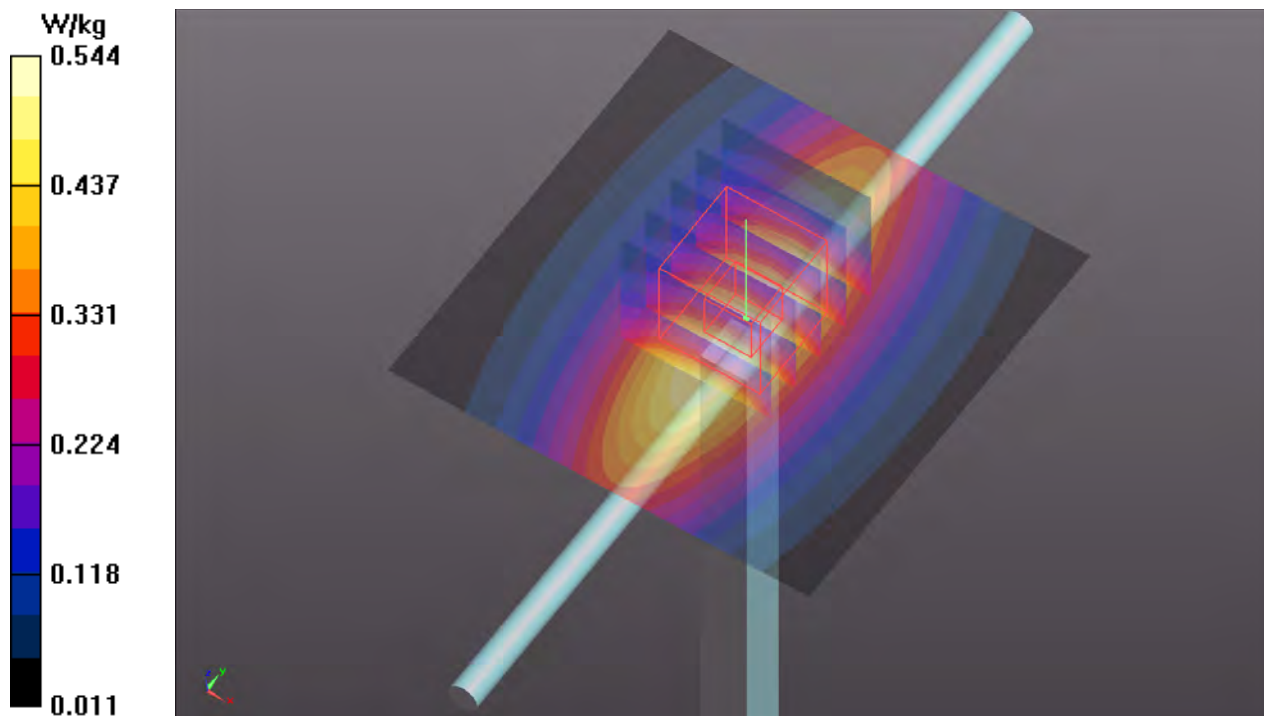

S14 System Check_H1900_210921

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0921 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.786$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.03 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.24 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 1.88 W/kg; SAR(10 g) = 0.983 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.03 W/kg

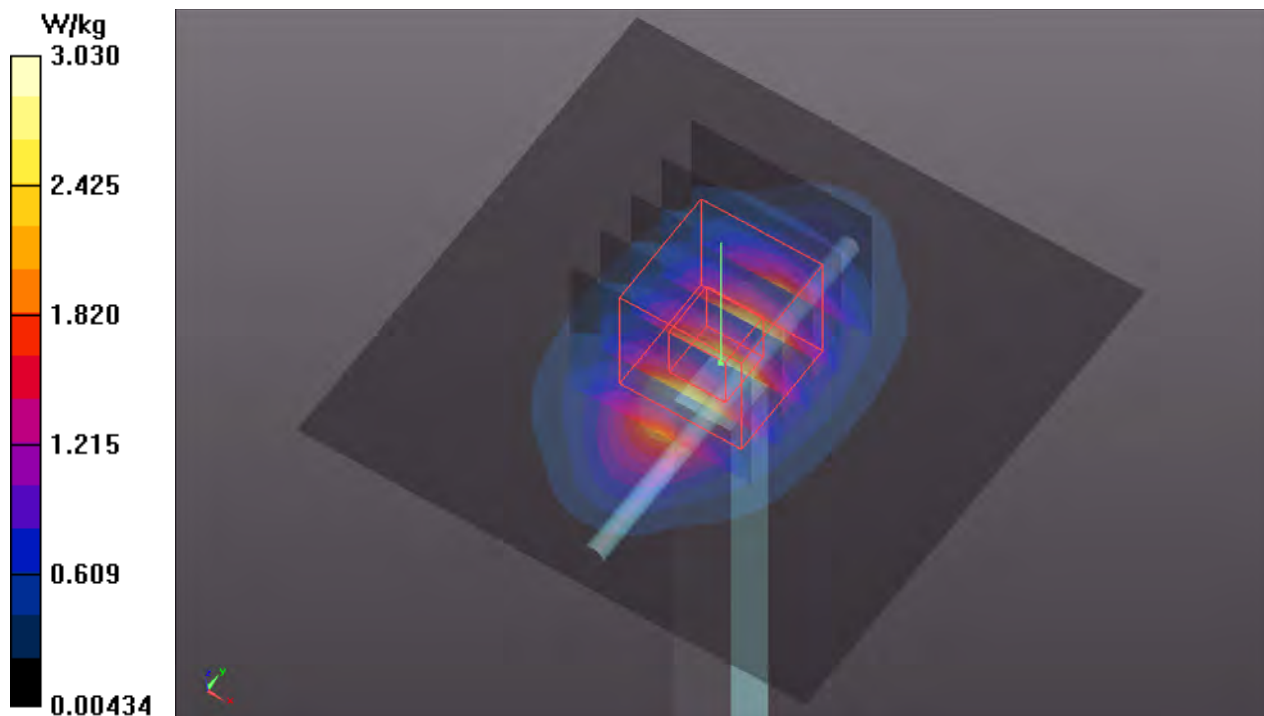

S15 System Check_H835_210921

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0921 Medium parameters used: $f = 835$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 40.321$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.671 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.11 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.320 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.675 W/kg

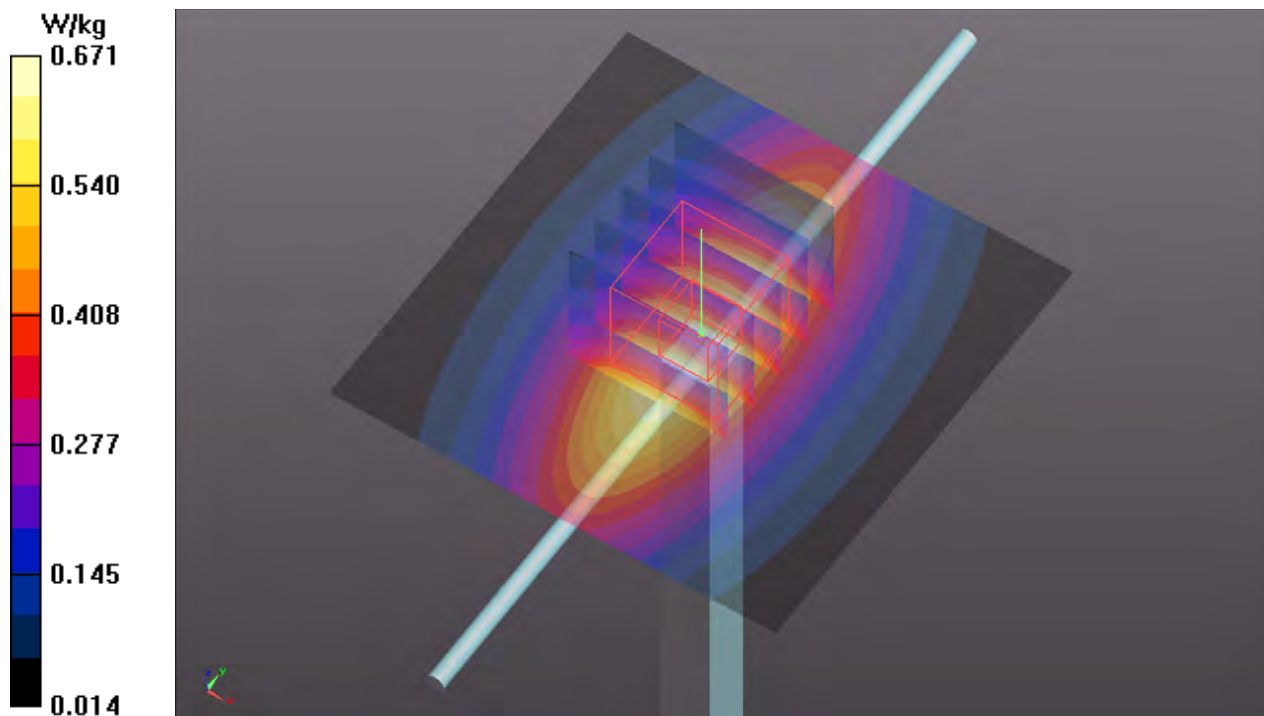

S16 System Check_H2300_210921

DUT: Dipole 2300 MHz; Type: D2300V2; SN:1004

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N2_0921 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.68$ S/m; $\epsilon_r = 38.117$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.13, 8.13, 8.13) @ 2300 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.86 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.31 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 4.88 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.97 W/kg

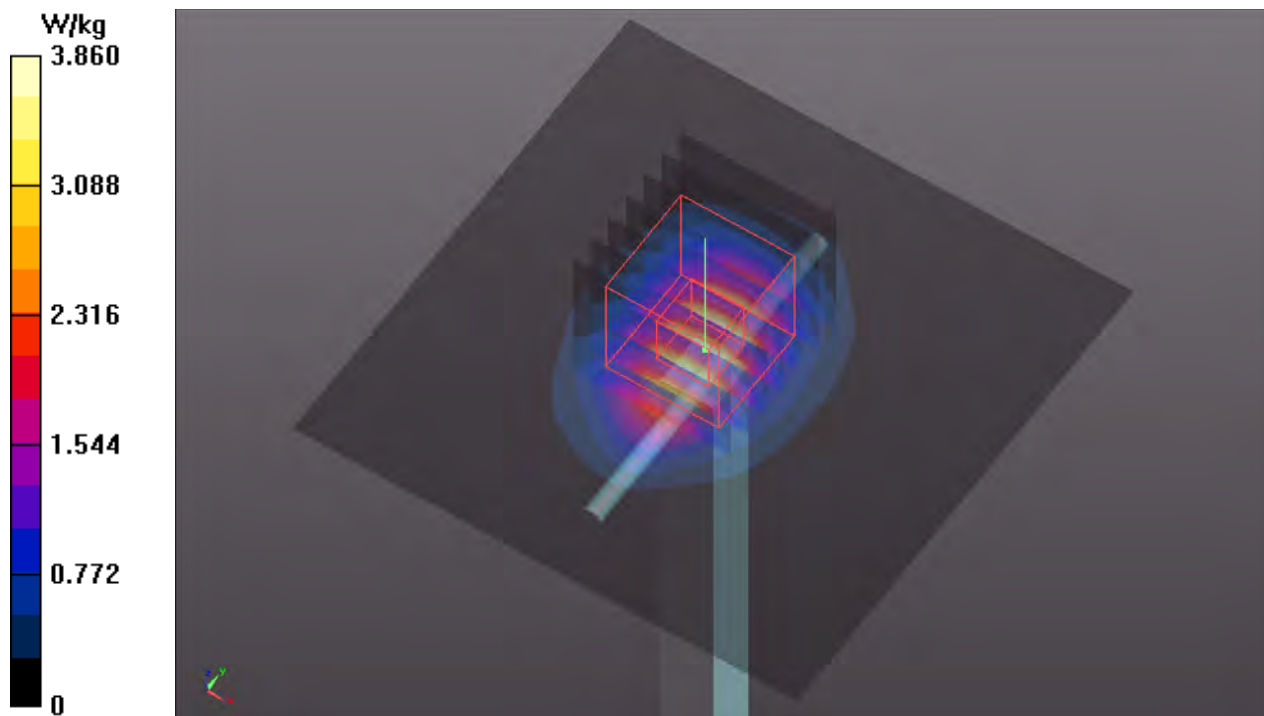

S17 System Check_H2600_210924**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0924 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 37.859$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.94 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.00 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.19 W/kg

SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.94 W/kg

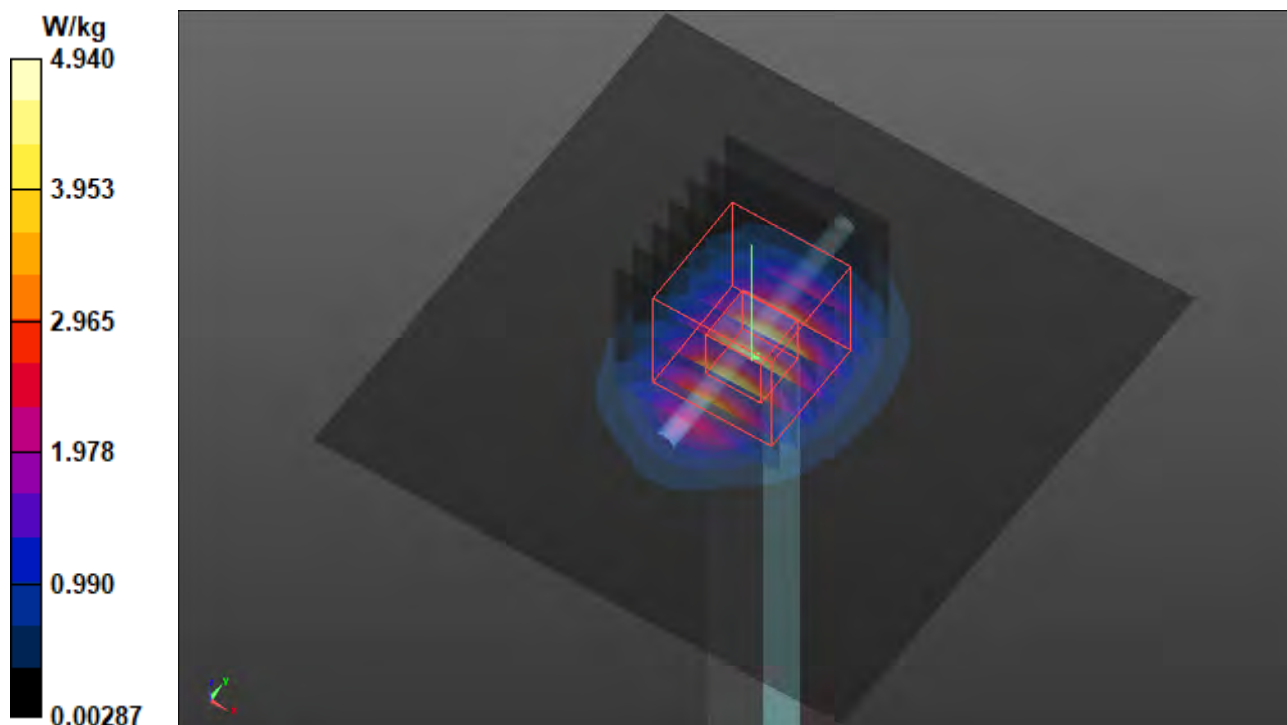

S18 System Check_H2600_210924**DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0924 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 37.859$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.94 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.00 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.19 W/kg

SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.94 W/kg

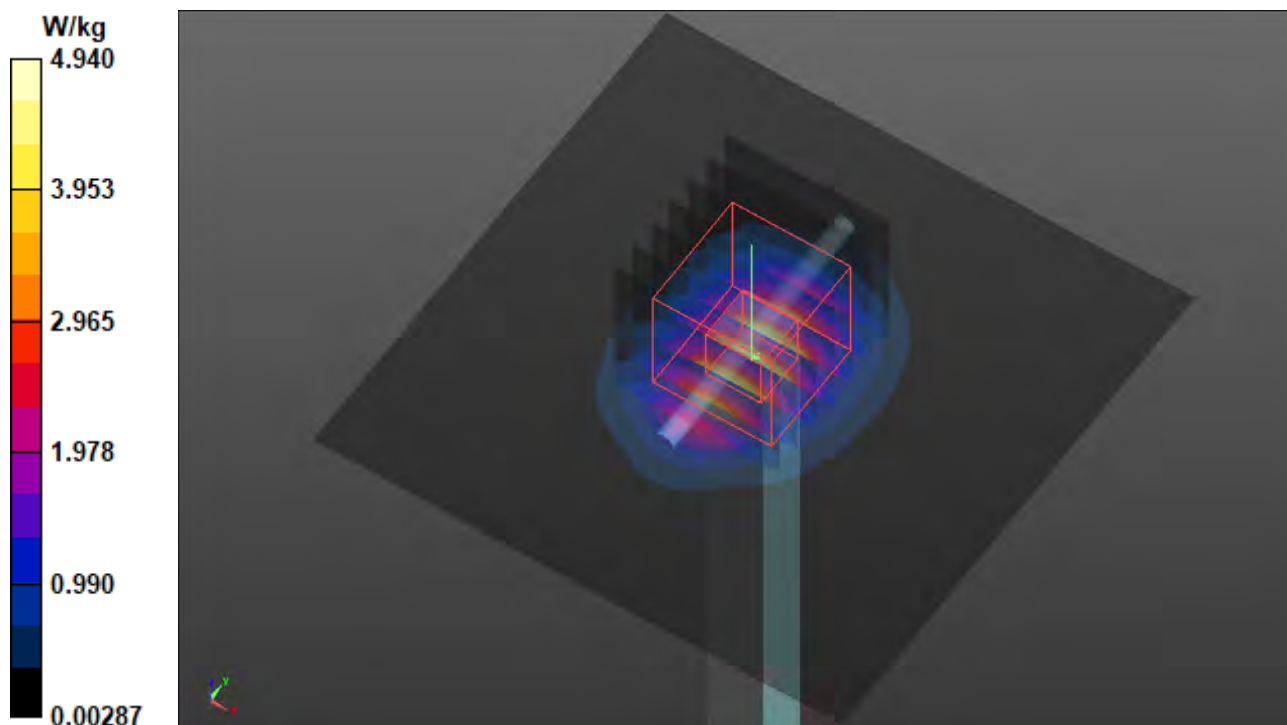

S19 System Check_H3500_210922

DUT: Dipole 3500 MHz; Type:D3500V2; SN: 1007

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H34T38N1_0922 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.811$ S/m; $\epsilon_r = 38.401$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.17, 7.17, 7.17) @ 3500 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.36 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 47.67 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 8.54 W/kg

SAR(1 g) = 3.33 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.31 W/kg

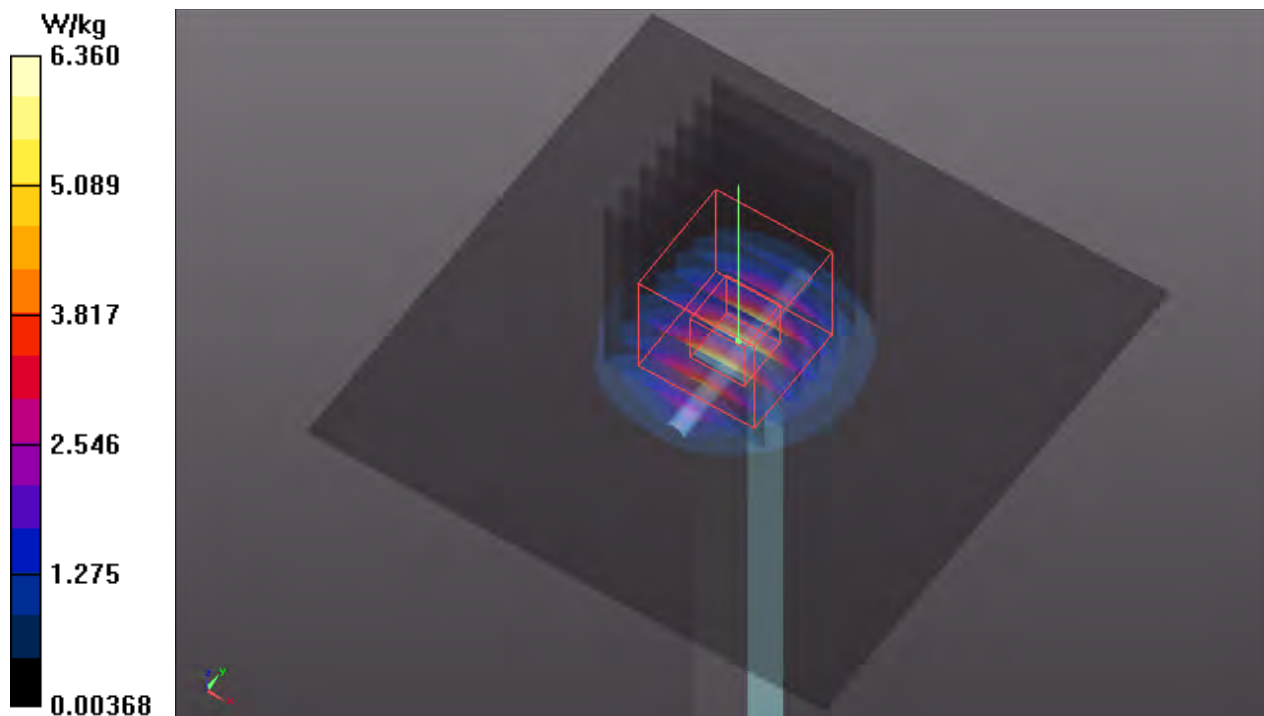

S20a System Check_H3500_210922**DUT: Dipole 3500 MHz; Type:D3500V2; SN: 1007**

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H34T38N1_0922 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.811$ S/m; $\epsilon_r = 38.401$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.17, 7.17, 7.17) @ 3500 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.36 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 47.67 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 8.54 W/kg

SAR(1 g) = 3.33 W/kg; SAR(10 g) = 1.28 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.31 W/kg

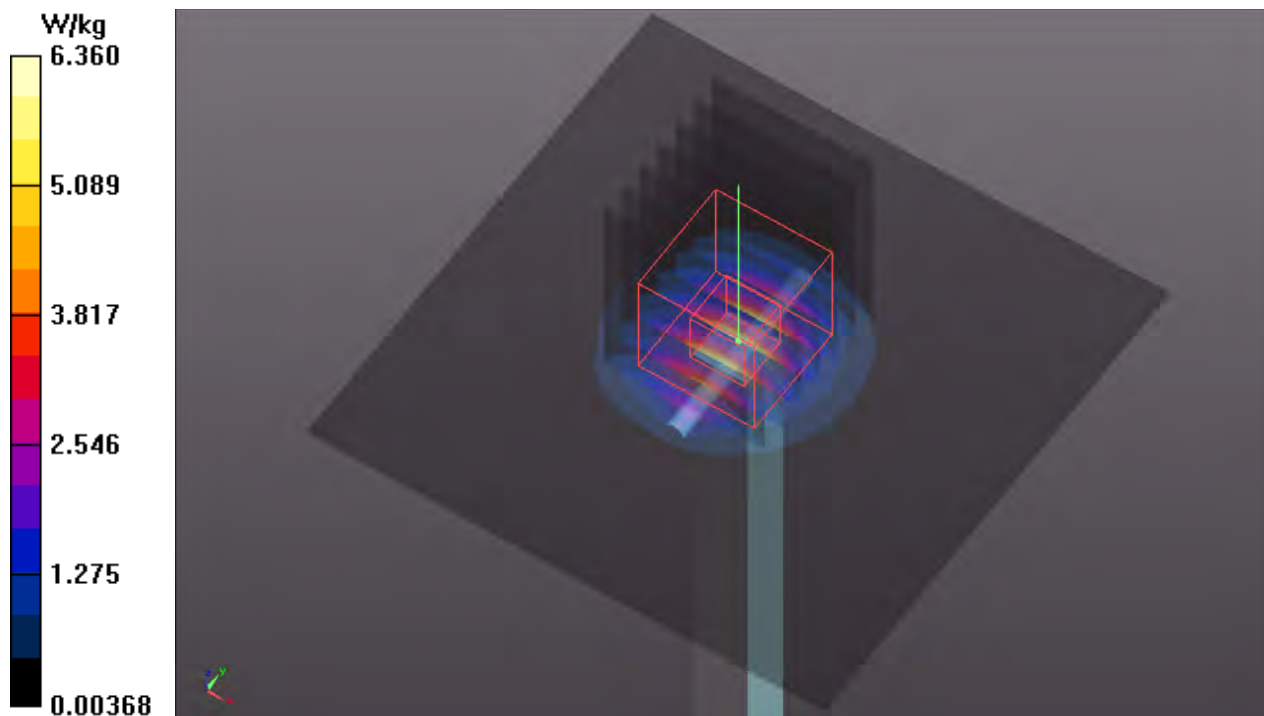

S20b System Check_H3700_210922**DUT: Dipole 3700 MHz; Type: D3700V2; SN: 1017**

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: H34T38N1_0922 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.053$ S/m; $\epsilon_r = 37.656$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.12, 7.12, 7.12) @ 3700 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.20 W/kg


Pin=50mW/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 47.44 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 8.48 W/kg

SAR(1 g) = 3.33 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.43 W/kg

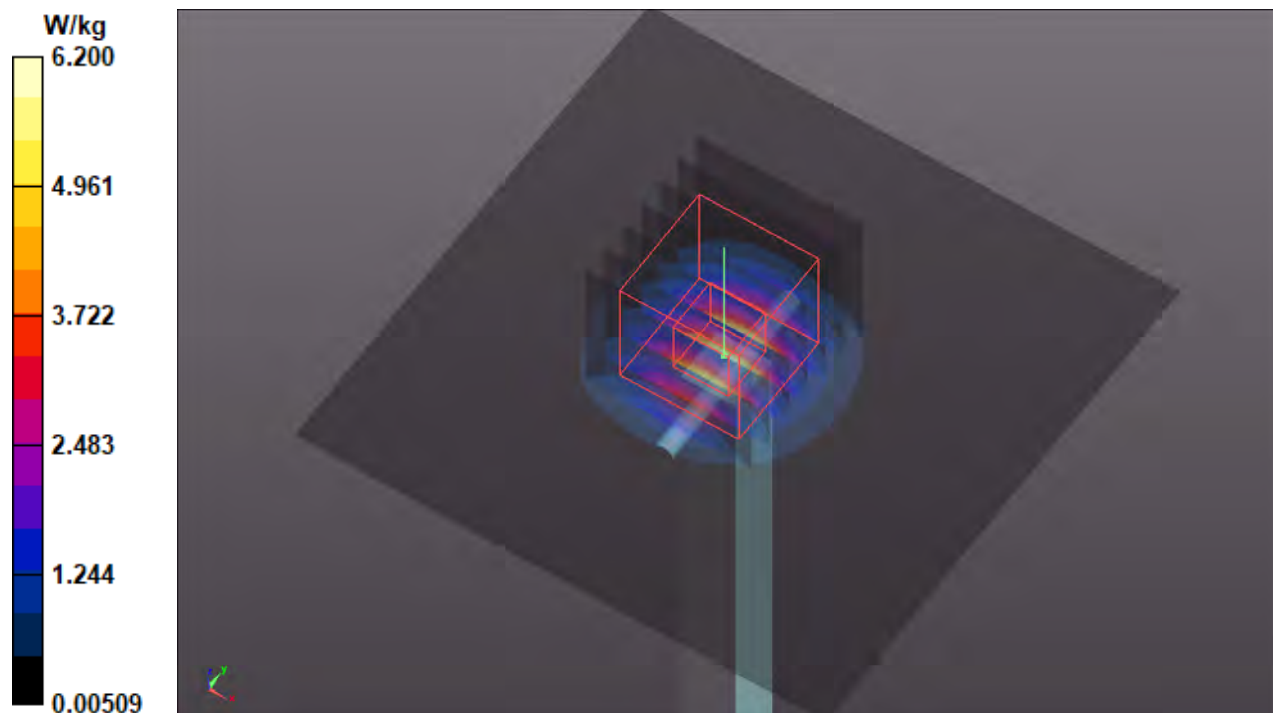

S21 System Check_H1750_210921

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0921 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.052$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.49 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.45 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 1.74 W/kg; SAR(10 g) = 0.862 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.77 W/kg

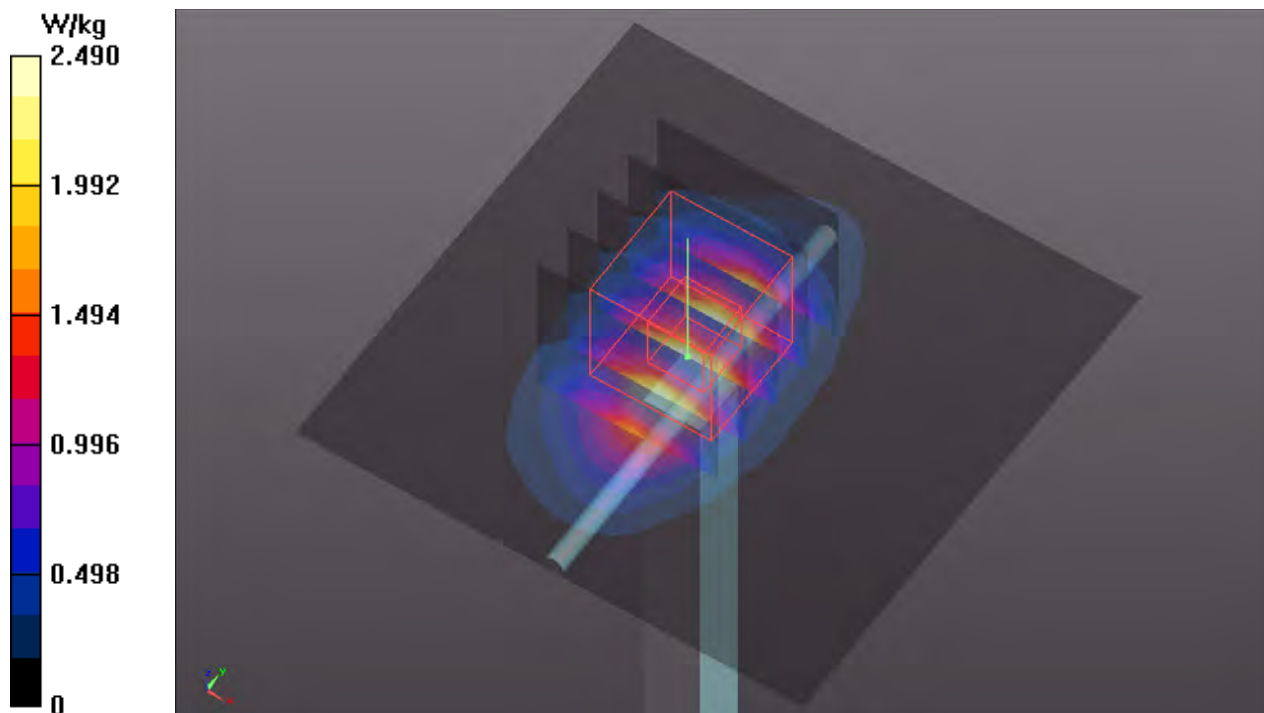

S22 System Check_H1750_210923

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0923 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.042$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.57 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.37 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.97 W/kg

SAR(1 g) = 1.77 W/kg; SAR(10 g) = 0.989 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.47 W/kg

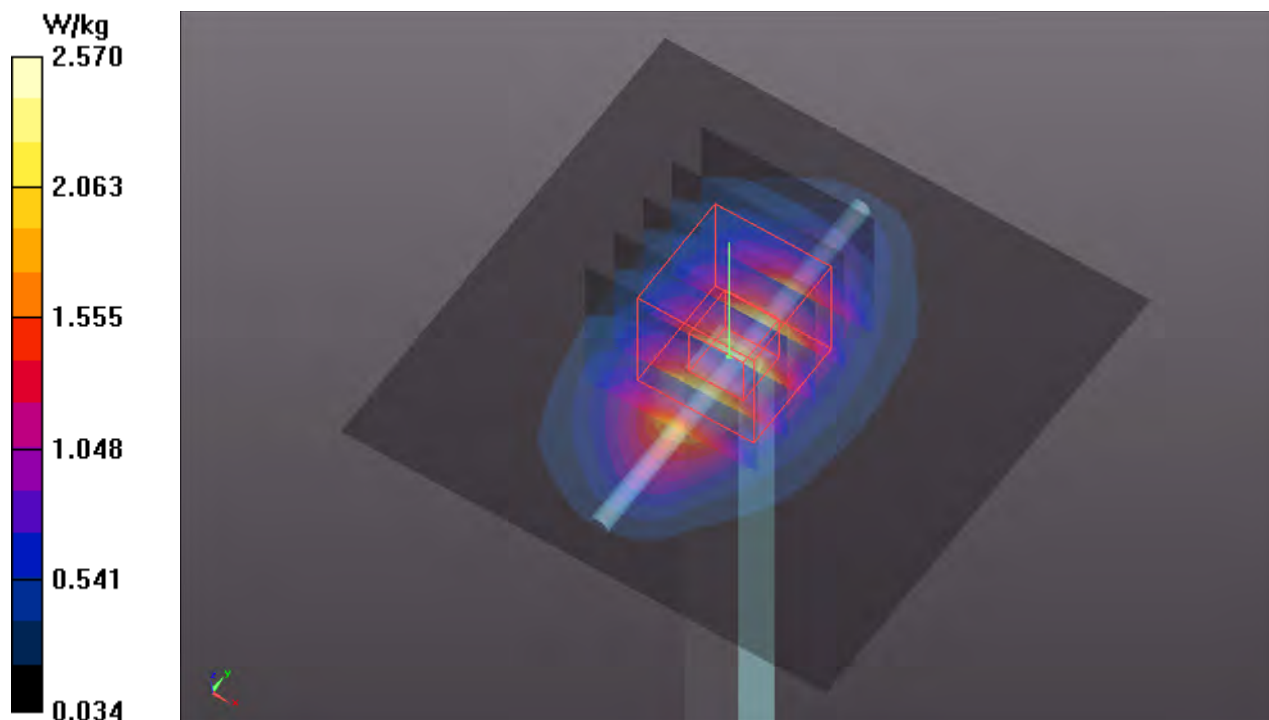

S23 System Check_H1900_210922

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0922 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 38.853$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.42 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.61 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.47 W/kg

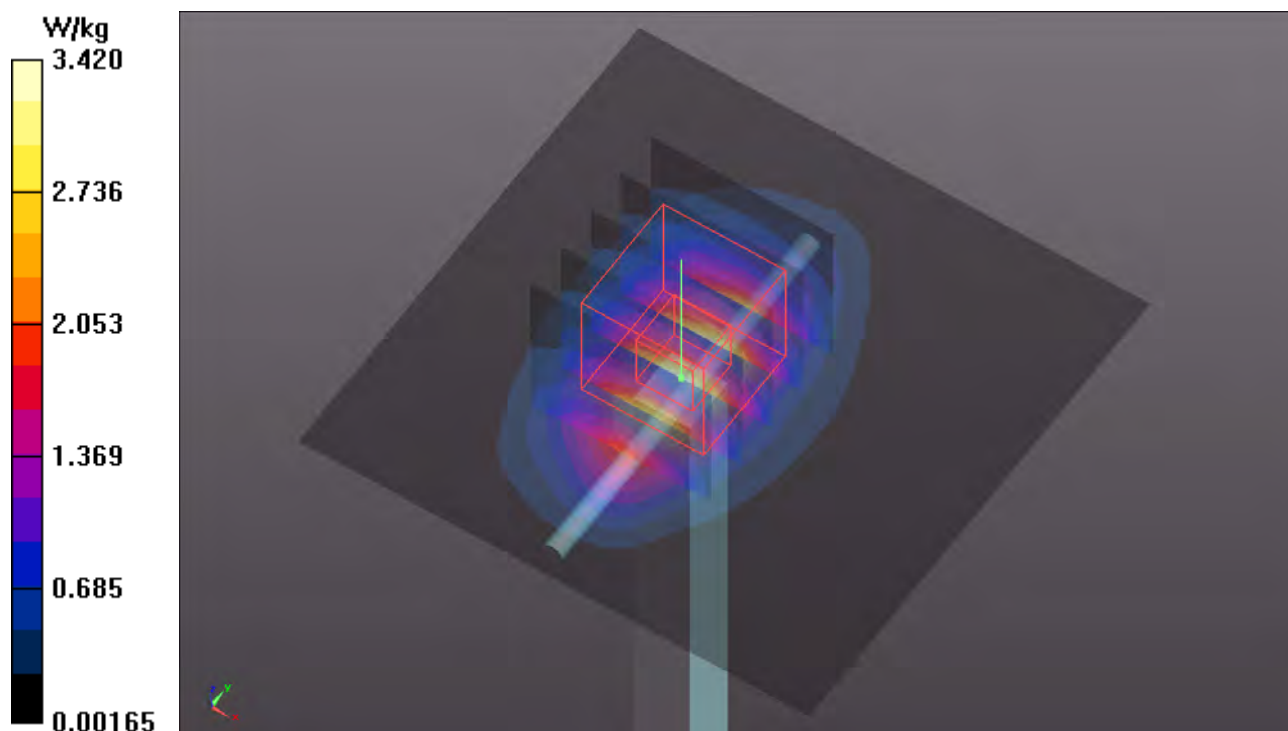

S24 System Check_H1900_210922**DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0922 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 38.853$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.42 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.61 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.19 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.47 W/kg

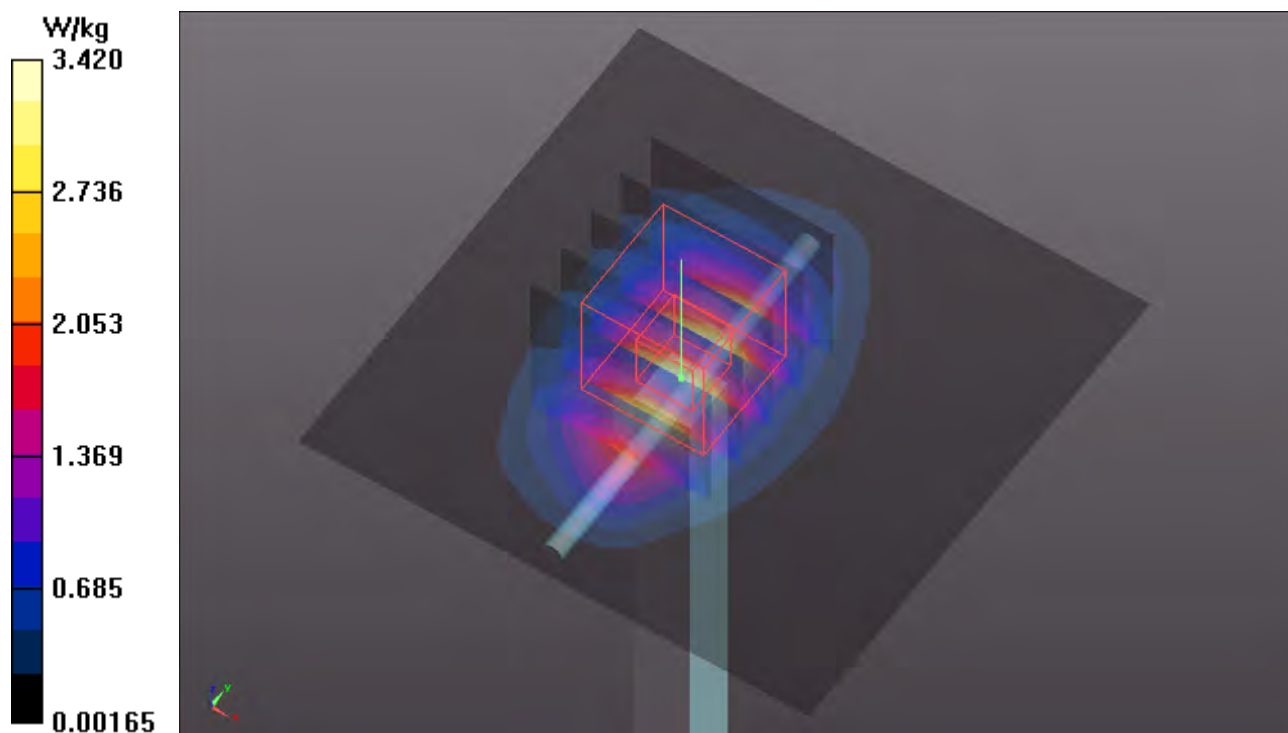


S25 System Check_H835_210922**DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0922 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 41.553$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $23.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 835 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

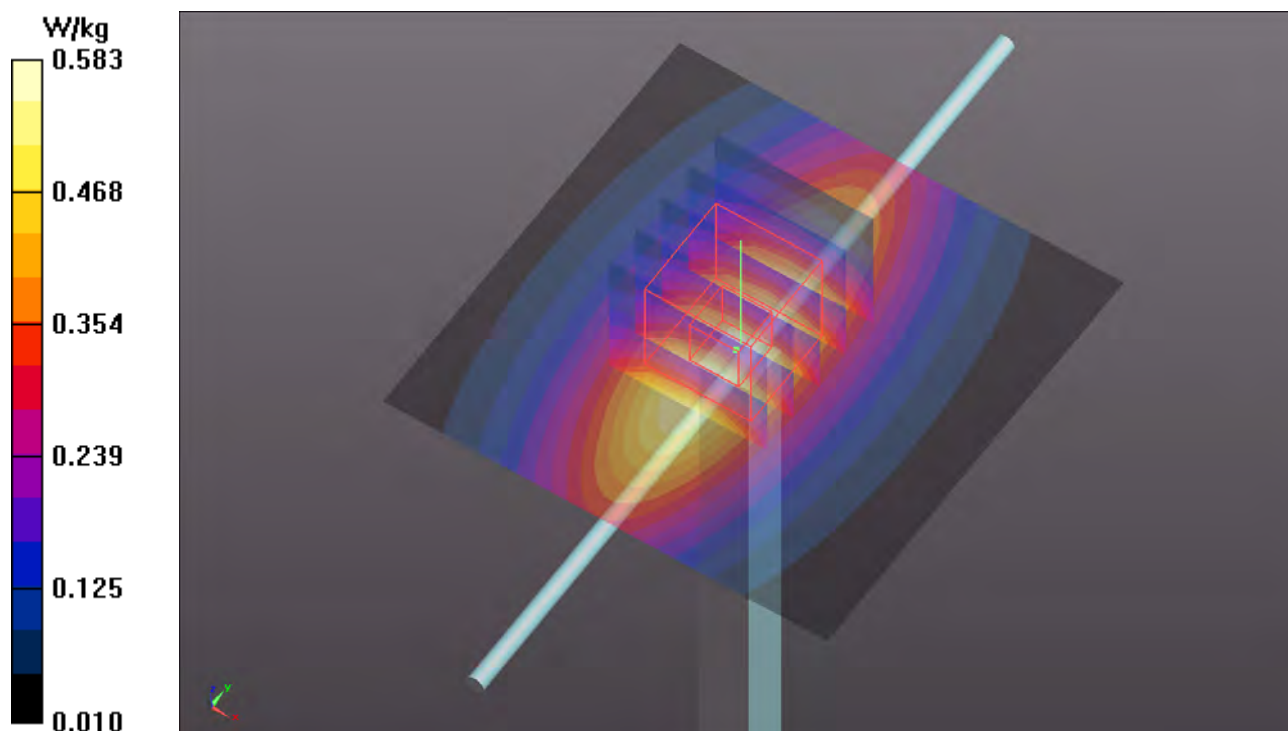Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.583 W/kg **Pin=50mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 26.21 V/m ; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.659 W/kg **SAR(1 g) = 0.442 W/kg ; SAR(10 g) = 0.292 W/kg** (SAR corrected for target medium)Maximum value of SAR (measured) = 0.590 W/kg 

S26 System Check_H2600_210923

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0923 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 37.616$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.58, 7.58, 7.58) @ 2600 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.72 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.01 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.86 W/kg

SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.73 W/kg

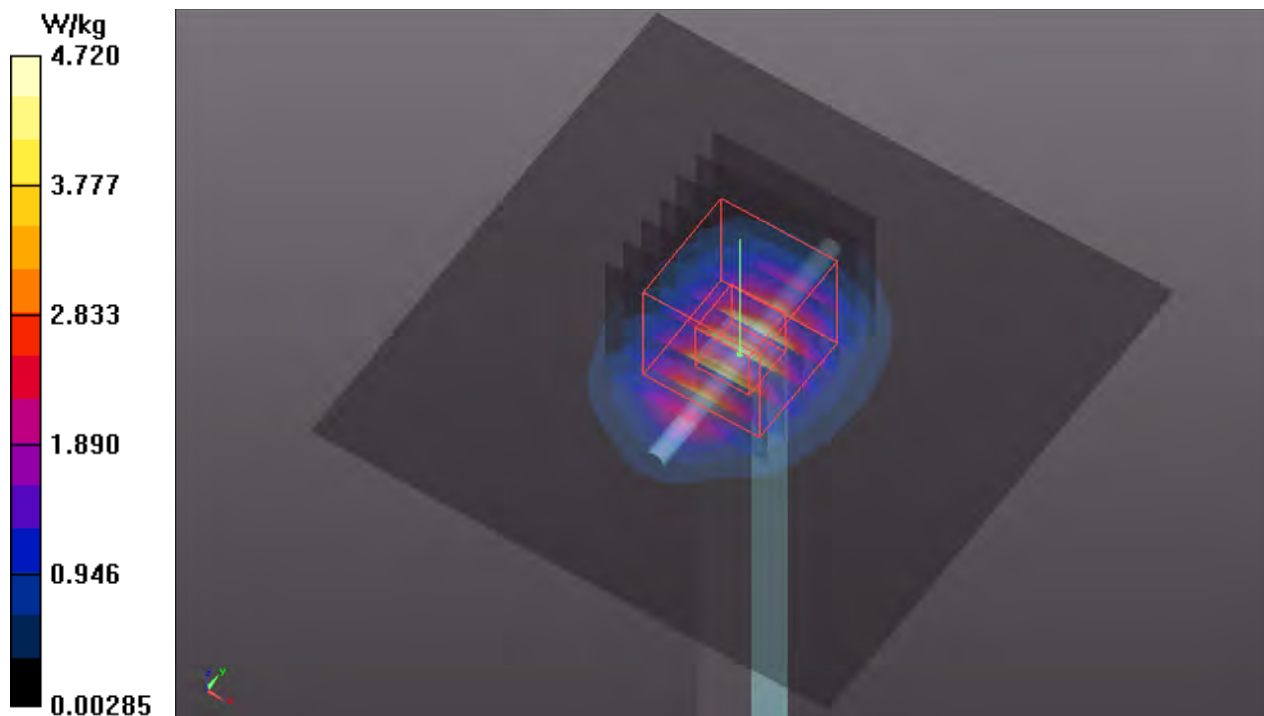

S27 System Check_H750_210923**DUT: Dipole 750 MHz; Type: D750V3; SN: 1078**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0923 Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.492$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.625 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.18 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.303 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.631 W/kg

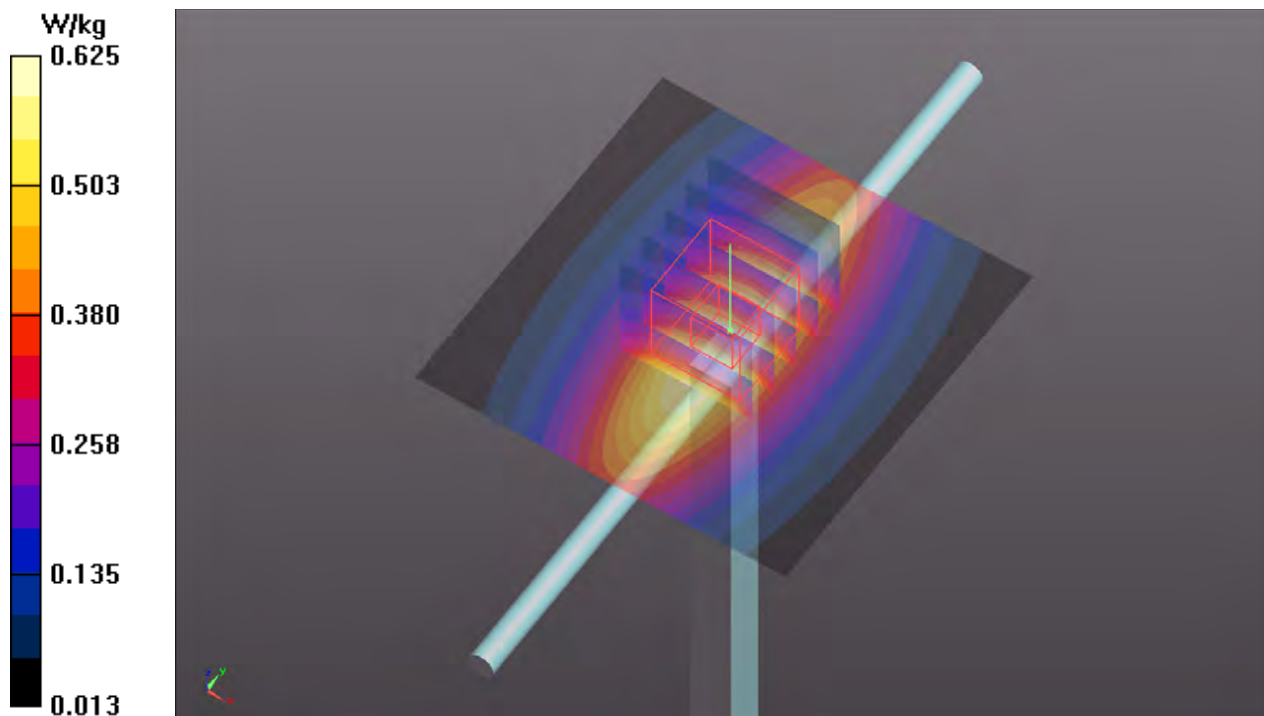

S28 System Check_H2600_210923

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0923 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.901$ S/m; $\epsilon_r = 37.616$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.58, 7.58, 7.58) @ 2600 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.72 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.01 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.86 W/kg

SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.73 W/kg

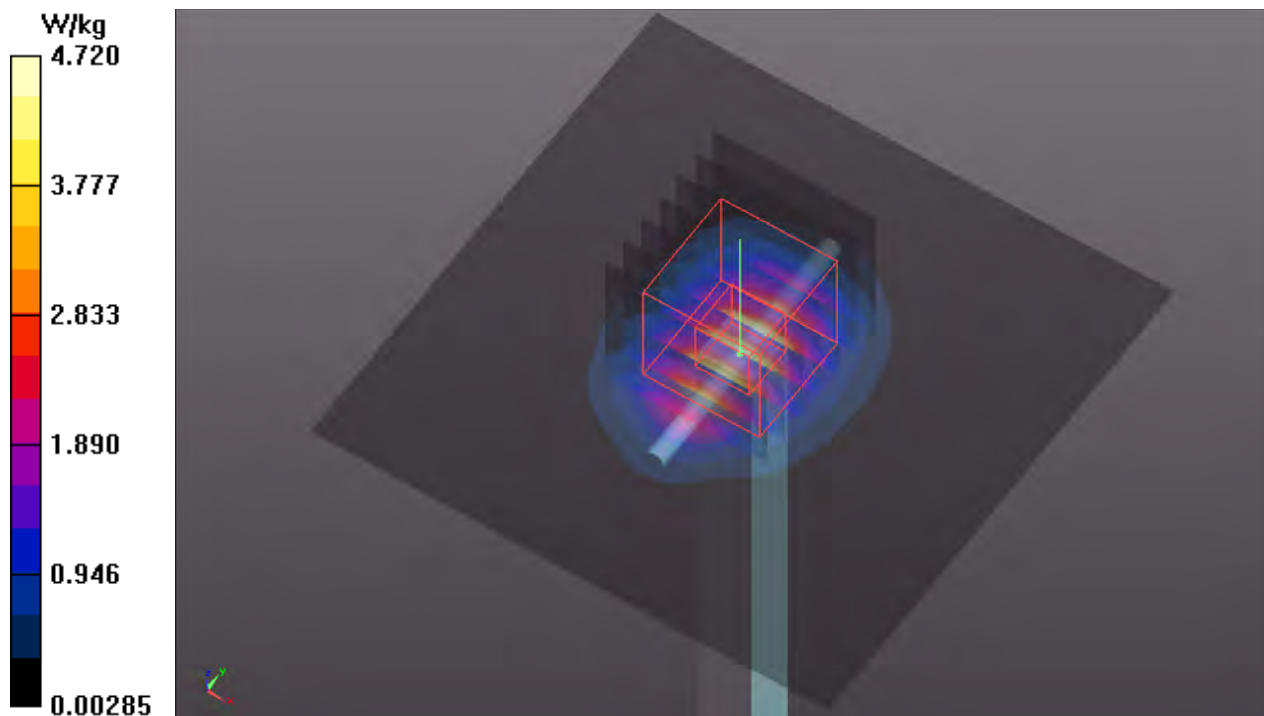

S29 System Check_H1750_210922

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0922 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.122$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.68 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.01 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 1.8 W/kg; SAR(10 g) = 0.988 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.74 W/kg

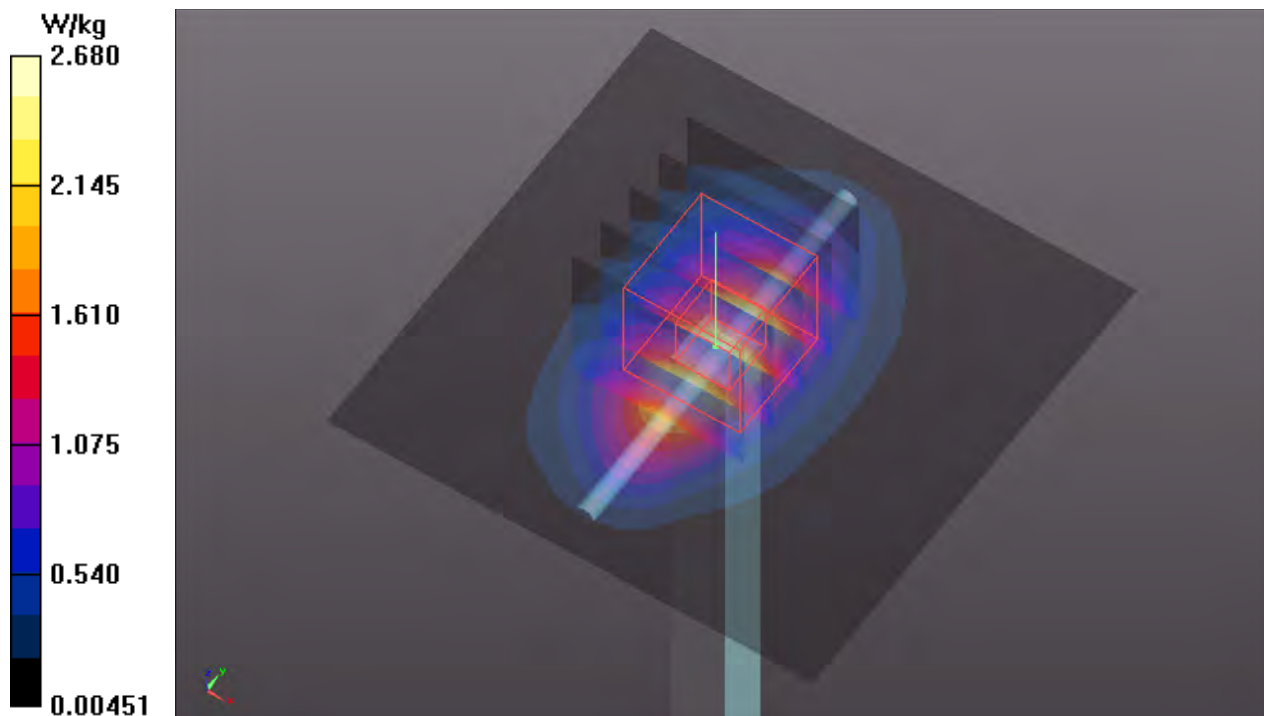

S30 System Check_H1750_210922

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0922 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.122$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1750 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.68 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.01 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 1.8 W/kg; SAR(10 g) = 0.988 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.74 W/kg

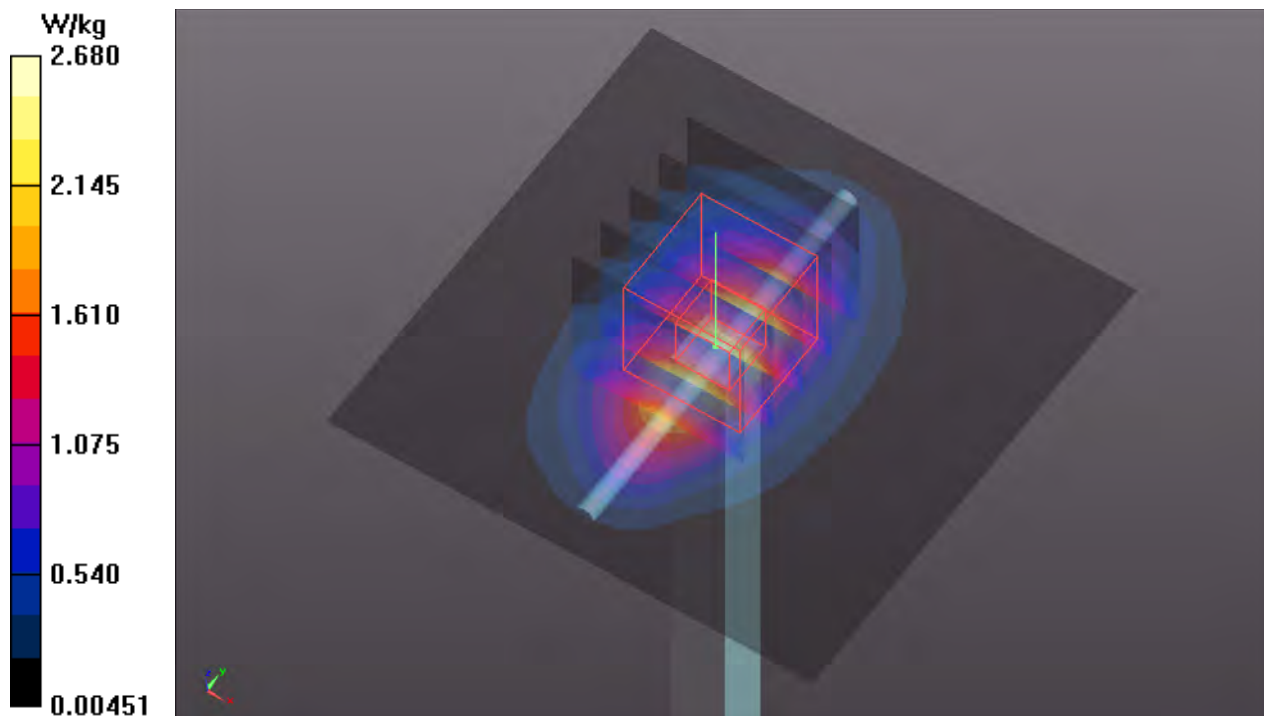

S31 System Check_H2450_210929

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 835

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0929 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.286$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2450 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.14 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.24 W/kg

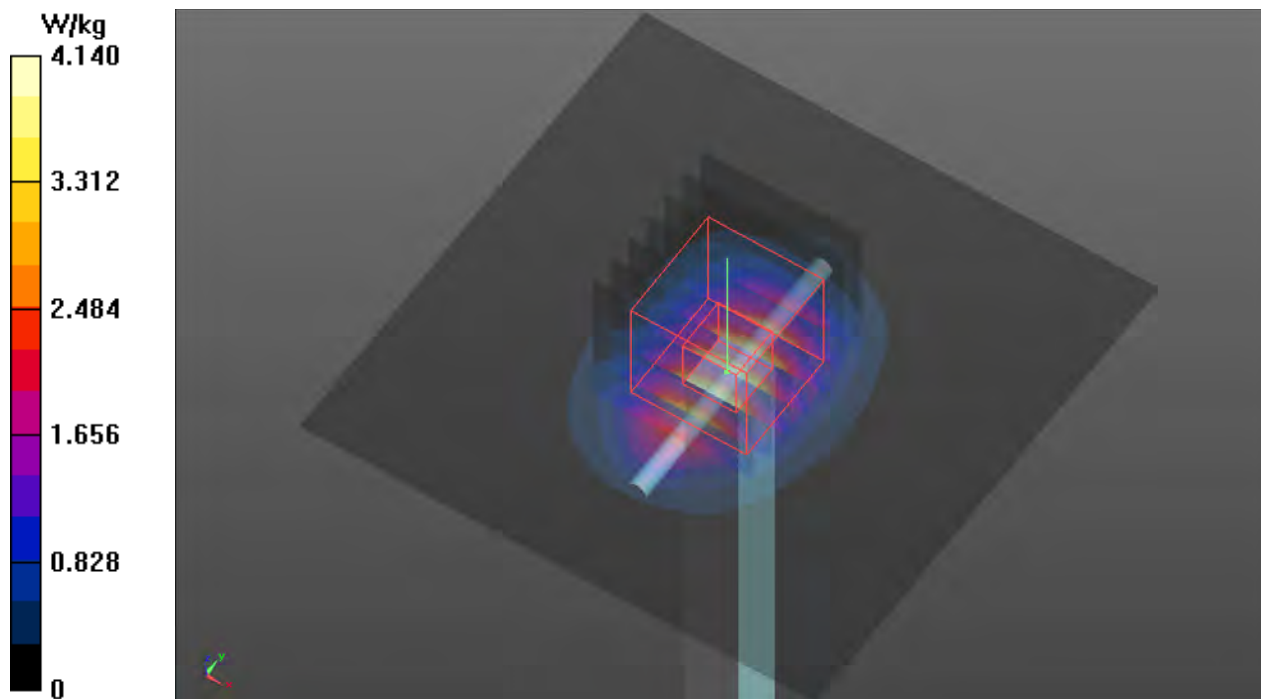

S32 System Check_H5250_210930

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N3_0930 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.564$ S/m; $\epsilon_r = 36.045$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.85 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 45.69 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 14.6 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.37 W/kg

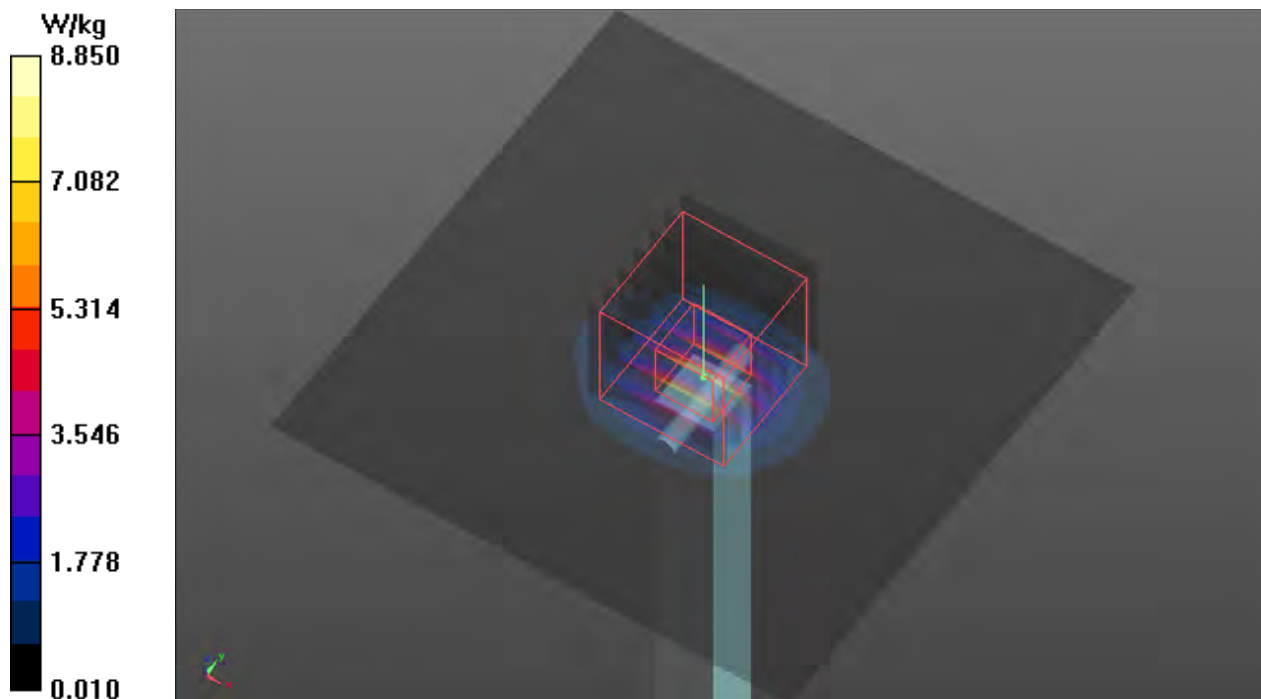

S33 System Check_H5600_210930

DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019

Communication System: UID 0, CW ; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N3_0930 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.893$ S/m; $\epsilon_r = 35.577$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.8, 4.8, 4.8) @ 5600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.3 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.53 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 1.21 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 11.0 W/kg

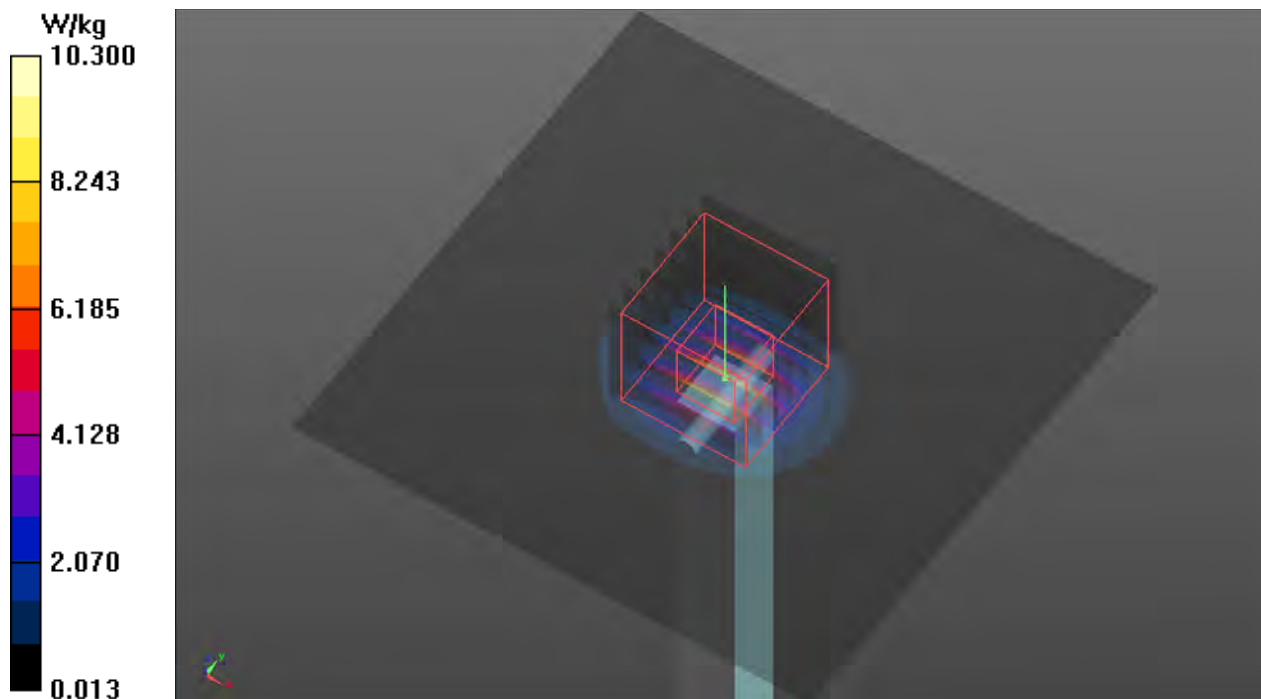

S34 System Check_H5750_211002**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_1002 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.164$ S/m; $\epsilon_r = 37.001$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.95, 4.95, 4.95) @ 5750 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.76 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 46.19 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 3.61 W/kg; SAR(10 g) = 1.03 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.43 W/kg

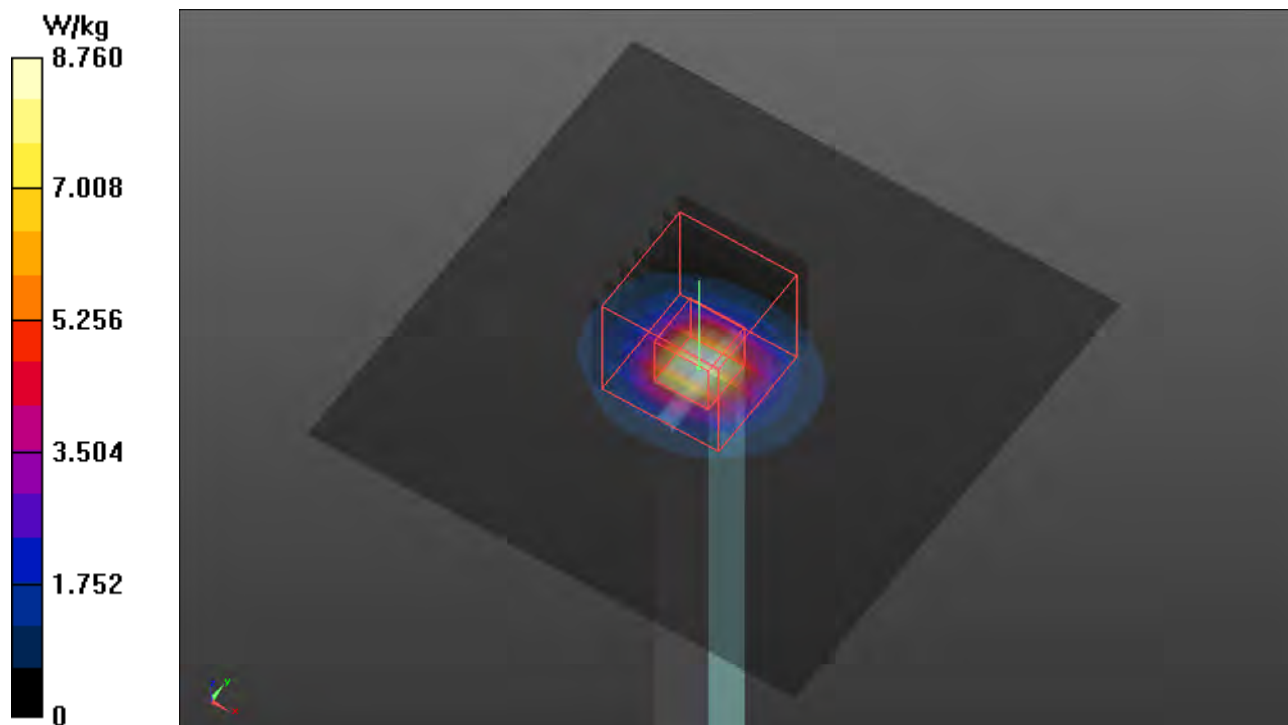

S35 System Check_H2450_210929

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 835

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0929 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.286$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2450 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.14 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.17 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.24 W/kg

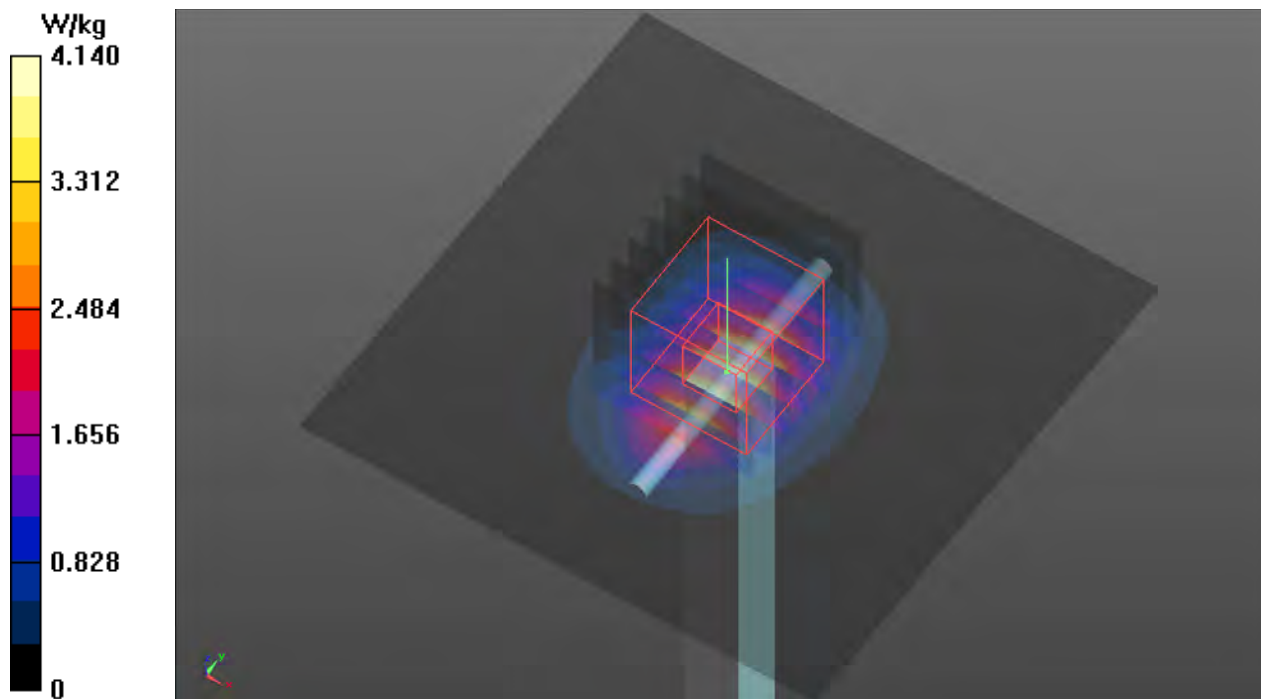

S36 System Check_H1900_210927

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0927 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.237$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.15 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 39.71 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.83 W/kg; SAR(10 g) = 0.896 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.14 W/kg

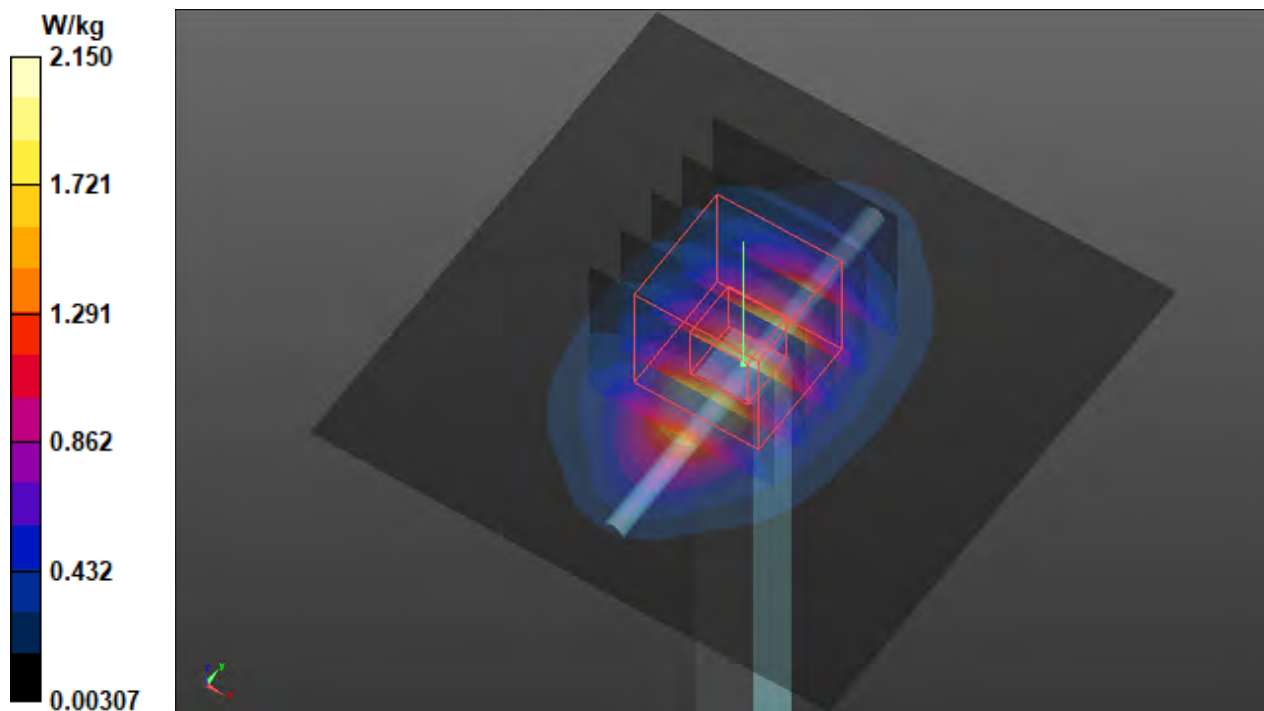

S37 System Check_H1750_210927

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0927 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.55, 8.55, 8.55) @ 1750 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.27 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.40 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.84 W/kg; SAR(10 g) = 0.913 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.22 W/kg

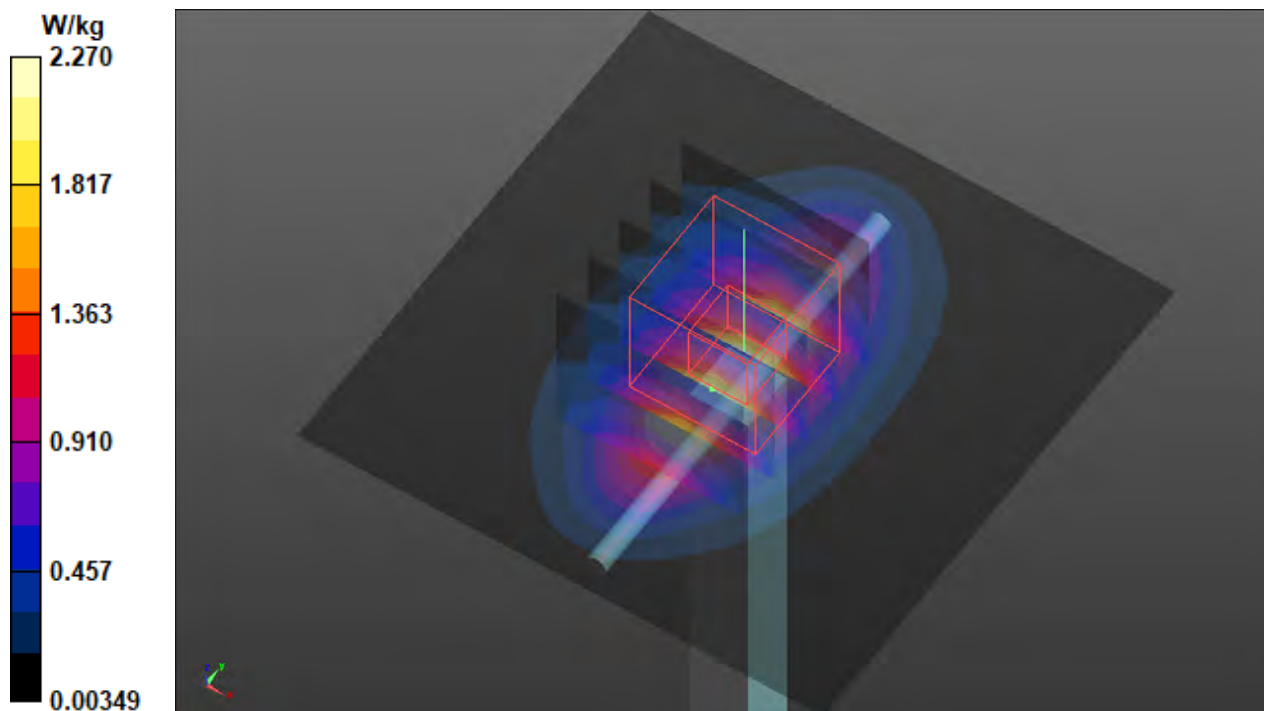

S38 System Check_H835_210927

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0927 Medium parameters used: $f = 835$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 41.768$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.5, 10.5, 10.5) @ 835 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.434 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.67 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.217 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.465 W/kg

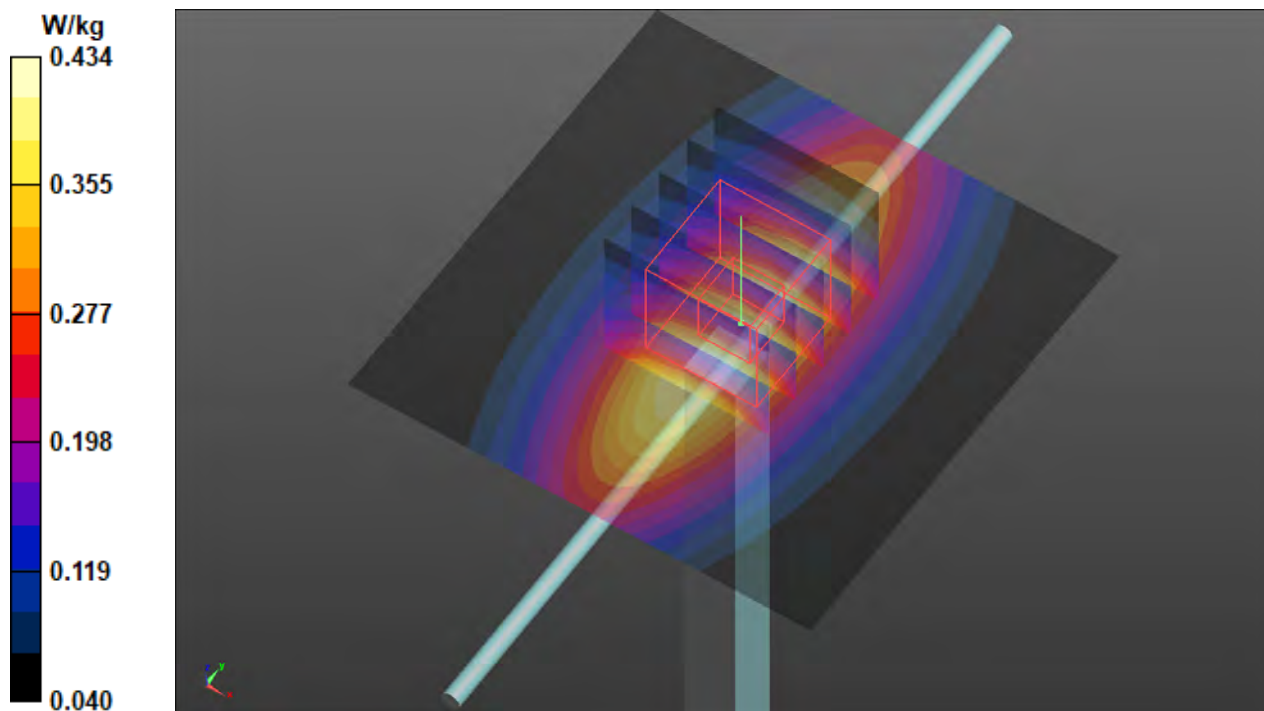

S39 System Check_H1900_210926

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0926 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.17, 8.17, 8.17) @ 1900 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.27 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.01 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.06 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.27 W/kg

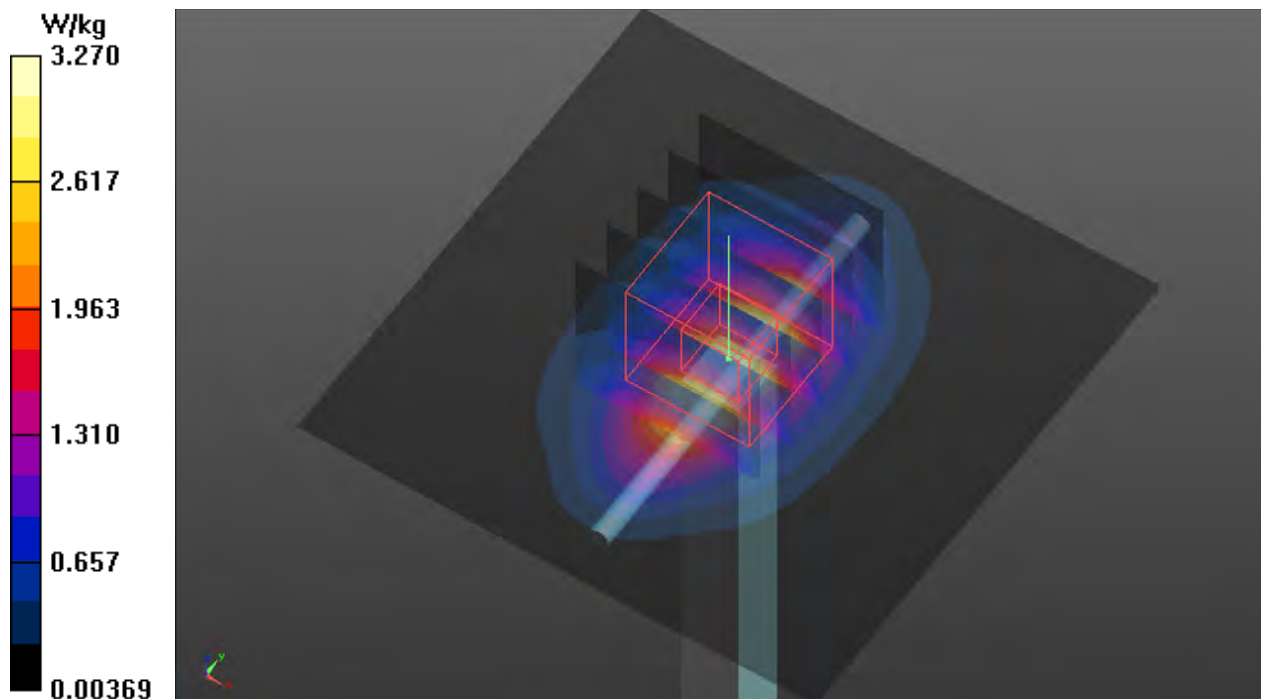

S40 System Check_H1900_210927

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0927 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.237$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.98, 7.98, 7.98) @ 1900 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.15 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.71 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.86 W/kg; SAR(10 g) = 0.891 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.14 W/kg

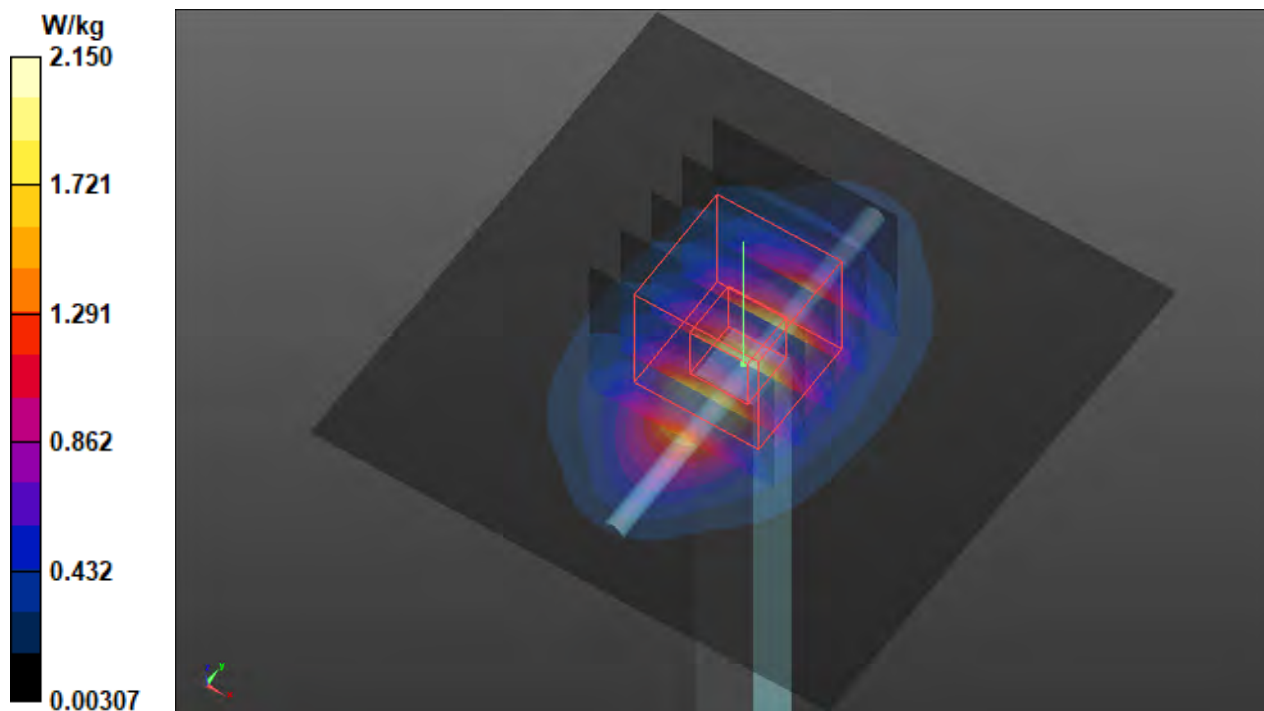

S41 System Check_H1750_210926**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0926 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.123$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.85 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.08 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 1.82 W/kg; SAR(10 g) = 0.967 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.87 W/kg

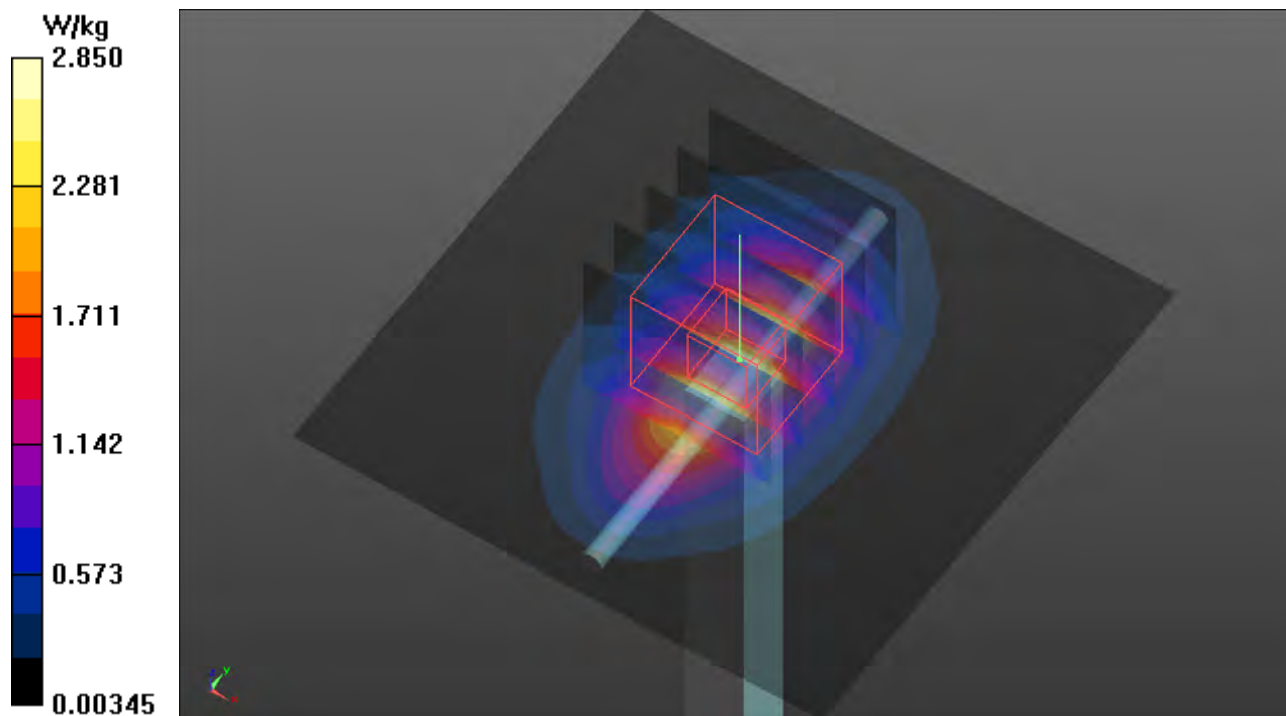

S42 System Check_H835_210926

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0926 Medium parameters used: $f = 835$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.83, 9.83, 9.83) @ 835 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.678 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.13 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.324 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.681 W/kg

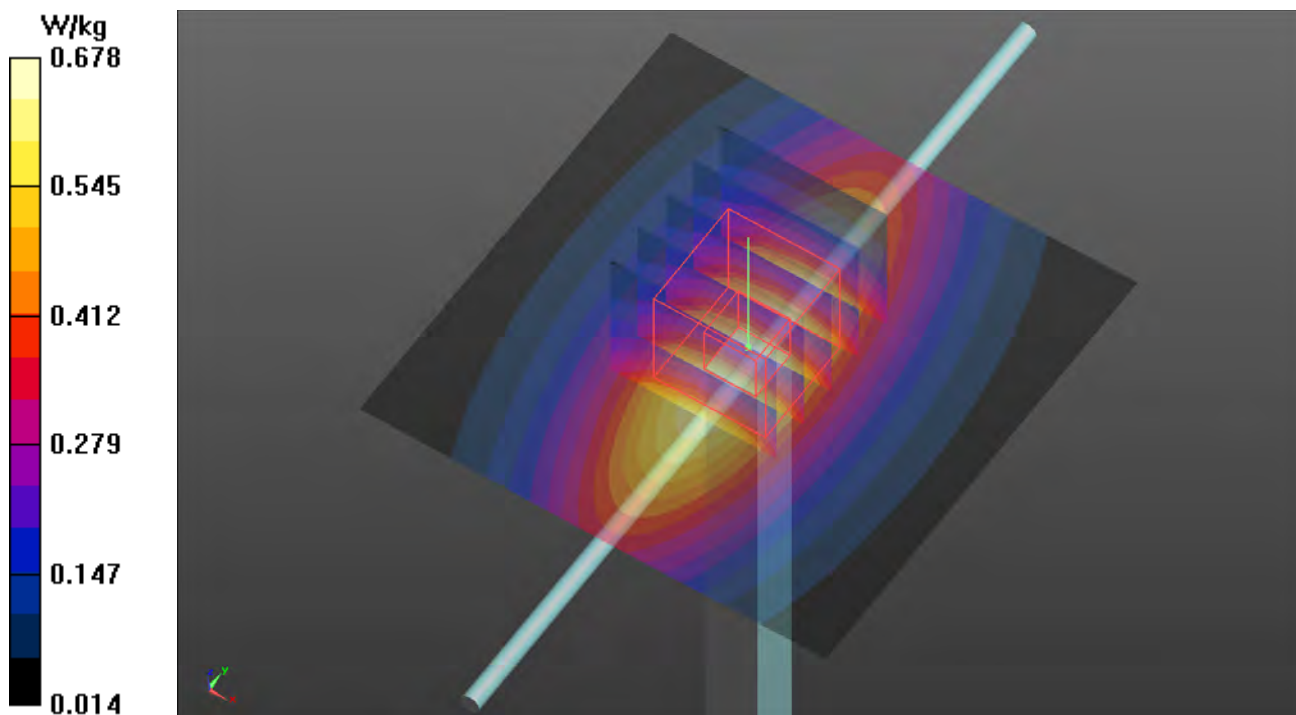

S43 System Check_H2600_210927

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0927 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 37.845$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.13 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.45 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 6.41 W/kg

SAR(1 g) = 3.08 W/kg; SAR(10 g) = 1.42 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.16 W/kg

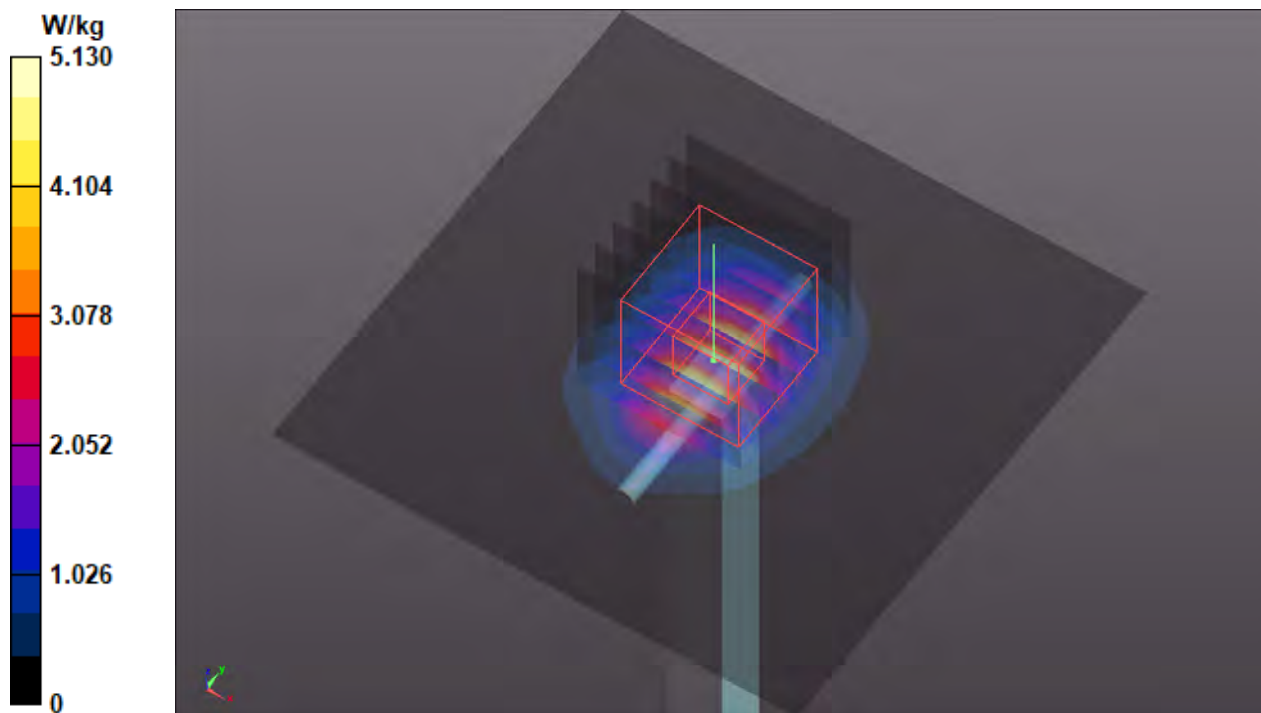

S44 System Check_H2600_210927

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0927 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 37.845$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.13 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.45 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 6.41 W/kg

SAR(1 g) = 3.08 W/kg; SAR(10 g) = 1.42 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.16 W/kg

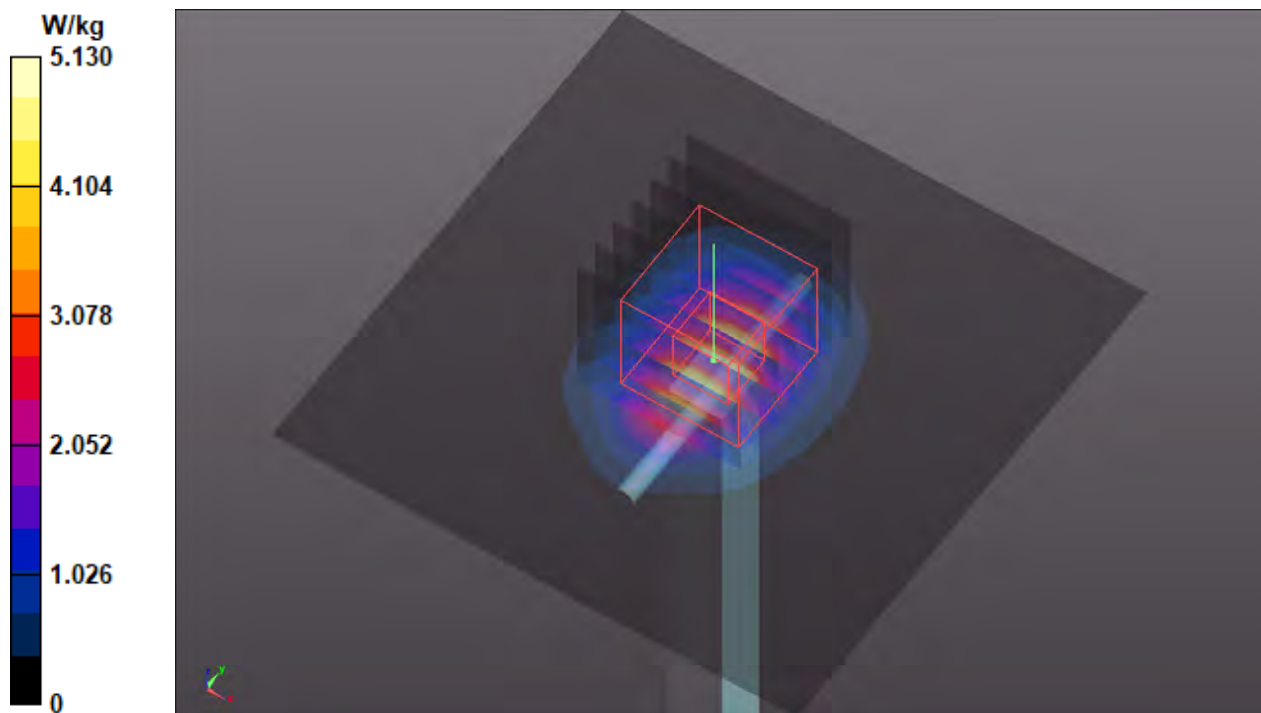

S45 System Check_H750_210926**DUT: Dipole 750 MHz; Type: D750V3; SN: 1078**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0926 Medium parameters used: $f = 750$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 750 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.82 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.544 W/kg

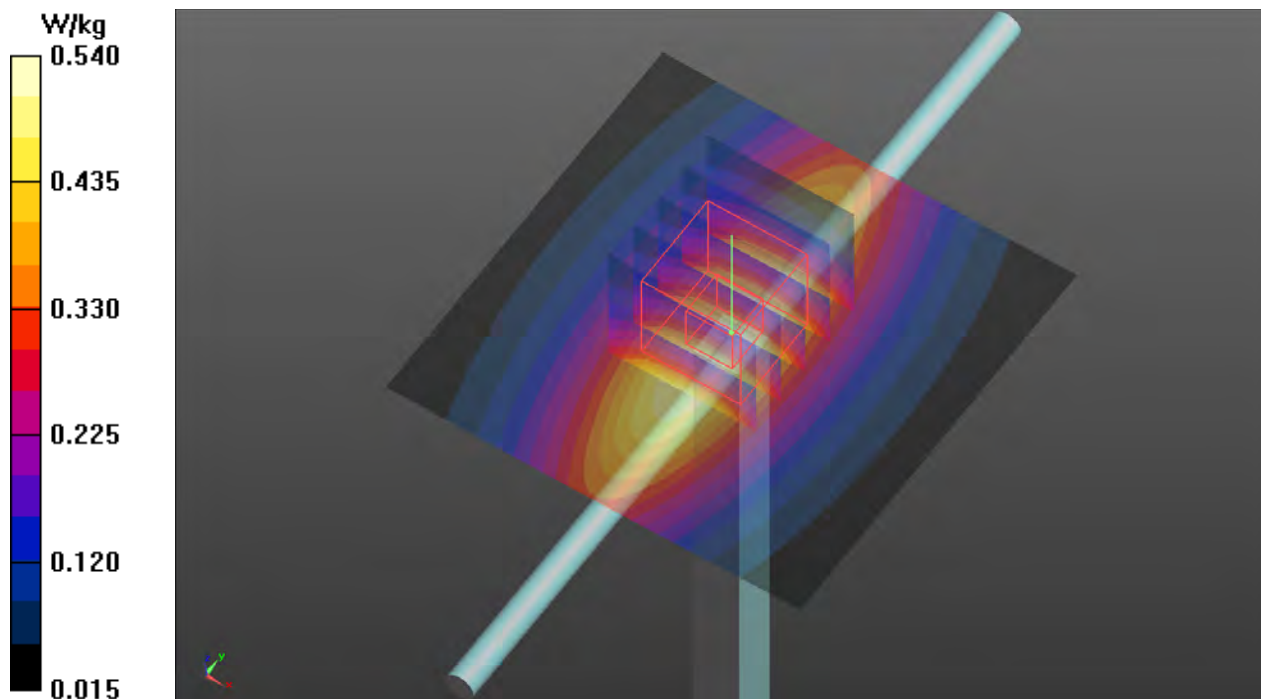

S46 System Check_H750_210926**DUT: Dipole 750 MHz; Type: D750V3; SN: 1078**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0926 Medium parameters used: $f = 750$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 750 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.82 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.544 W/kg

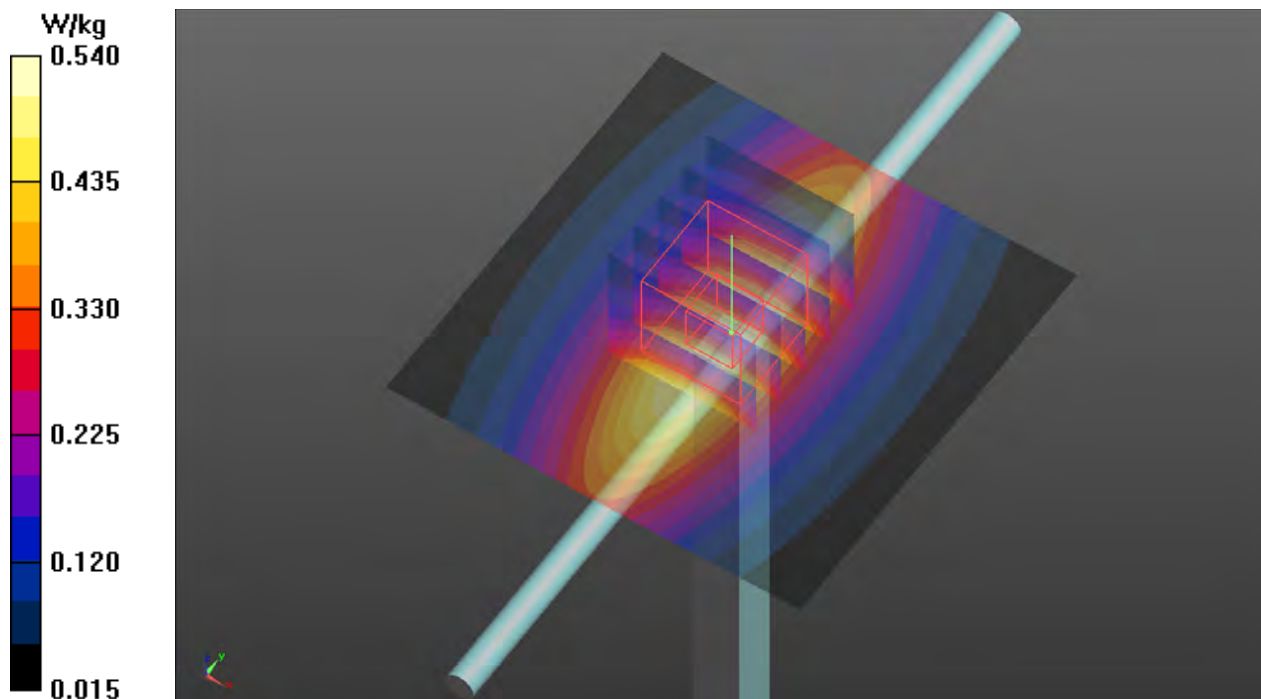

S47 System Check_H750_210926**DUT: Dipole 750 MHz; Type: D750V3; SN: 1078**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0926 Medium parameters used: $f = 750$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 750 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.82 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.544 W/kg

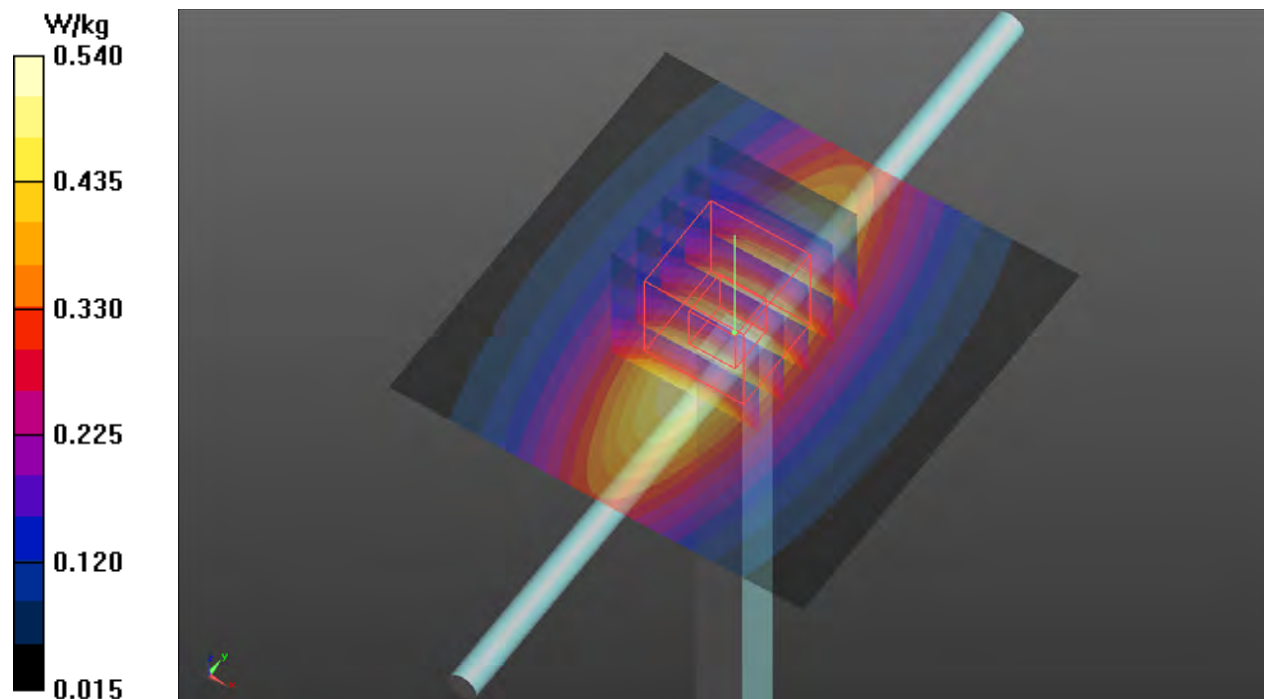

S48 System Check_H750_210926**DUT: Dipole 750 MHz; Type: D750V3; SN: 1078**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0926 Medium parameters used: $f = 750$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 750 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.82 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.267 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.544 W/kg

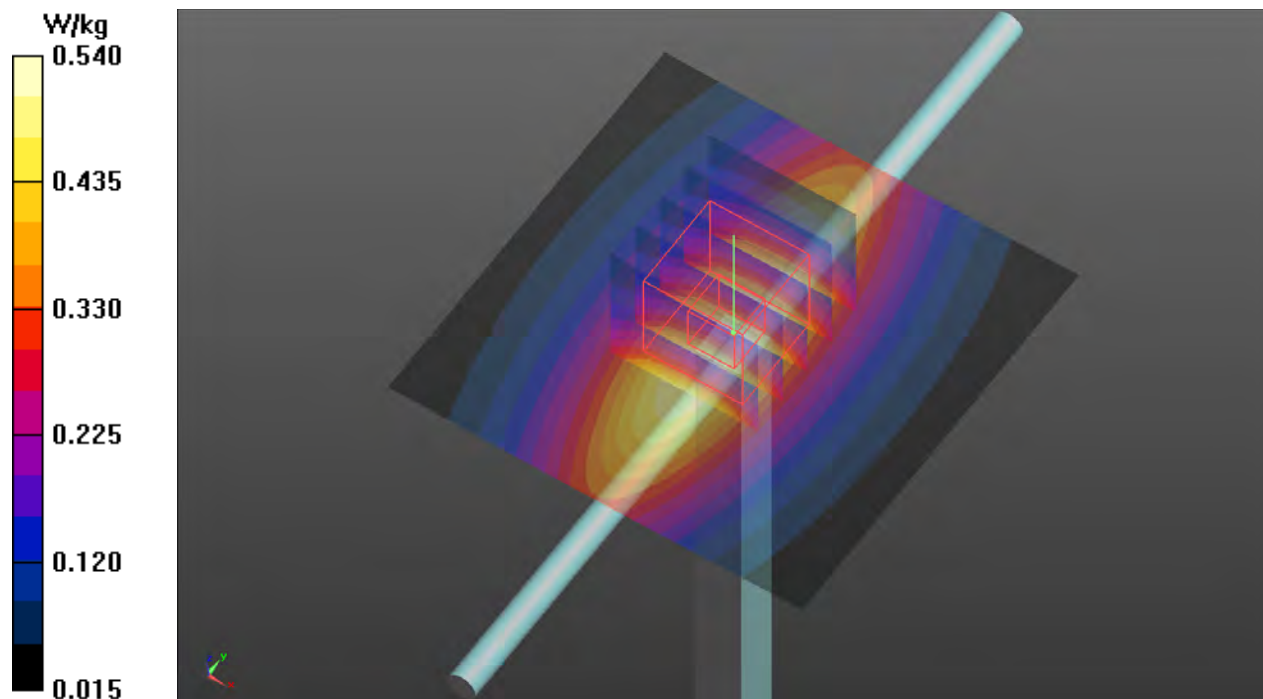

S49 System Check_H1900_210926

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0926 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.17, 8.17, 8.17) @ 1900 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.27 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.01 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.06 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.27 W/kg

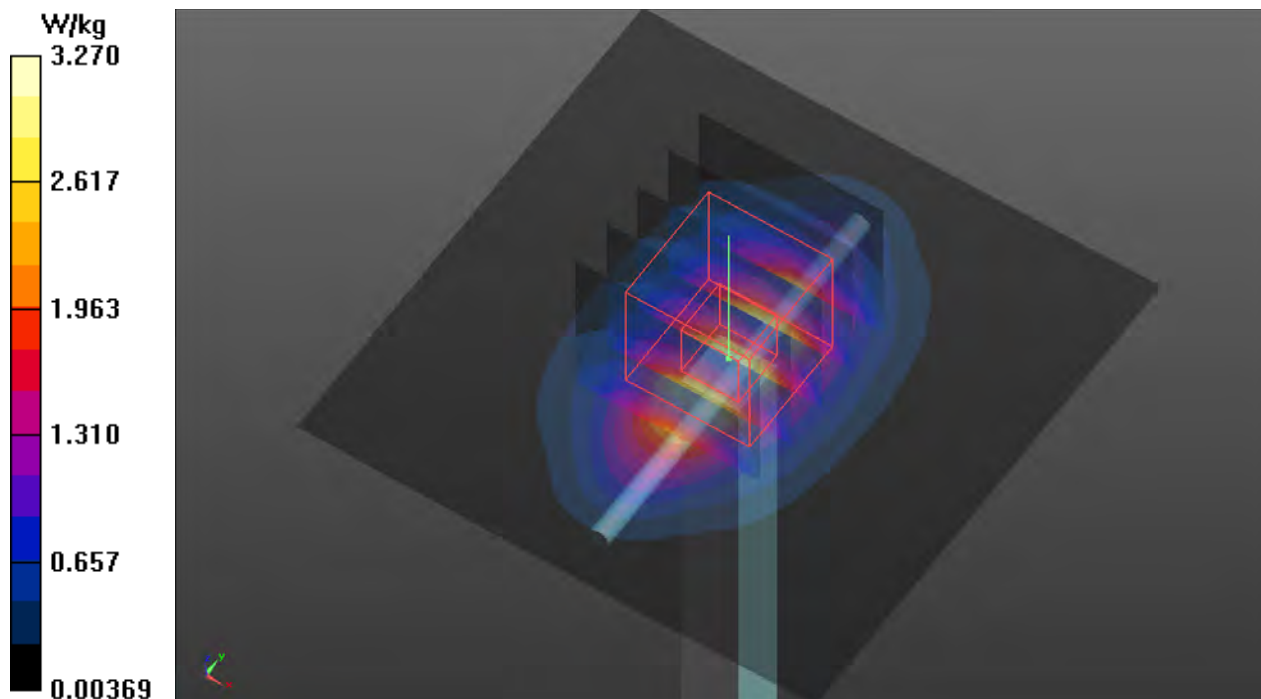

S50 System Check_H835_210926

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_0926 Medium parameters used: $f = 835$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.58$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.83, 9.83, 9.83) @ 835 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.678 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.13 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.324 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.681 W/kg

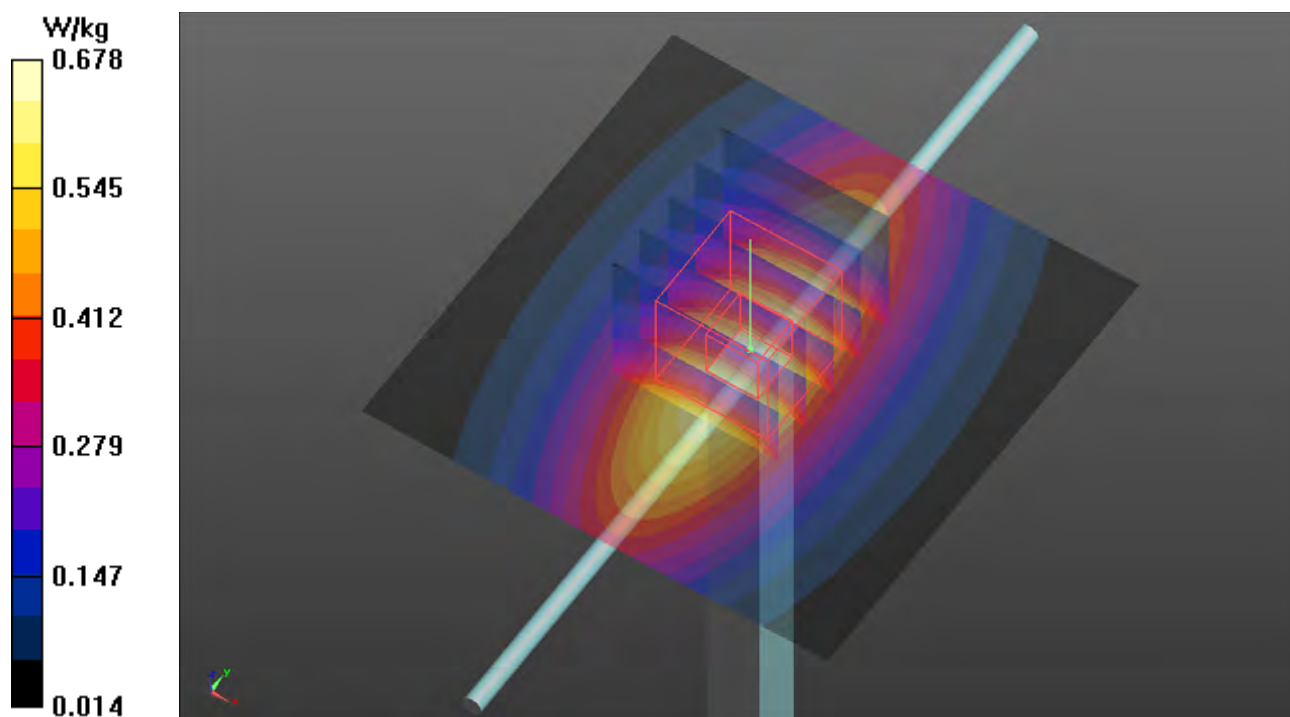

S51 System Check_H2300_210926

DUT: Dipole 2300 MHz; Type: D2300V2; SN:1004

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0926 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 38.517$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.96, 7.96, 7.96) @ 2300 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.75 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.83 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.75 W/kg

SAR(1 g) = 2.3 W/kg; SAR(10 g) = 1.1 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.86 W/kg

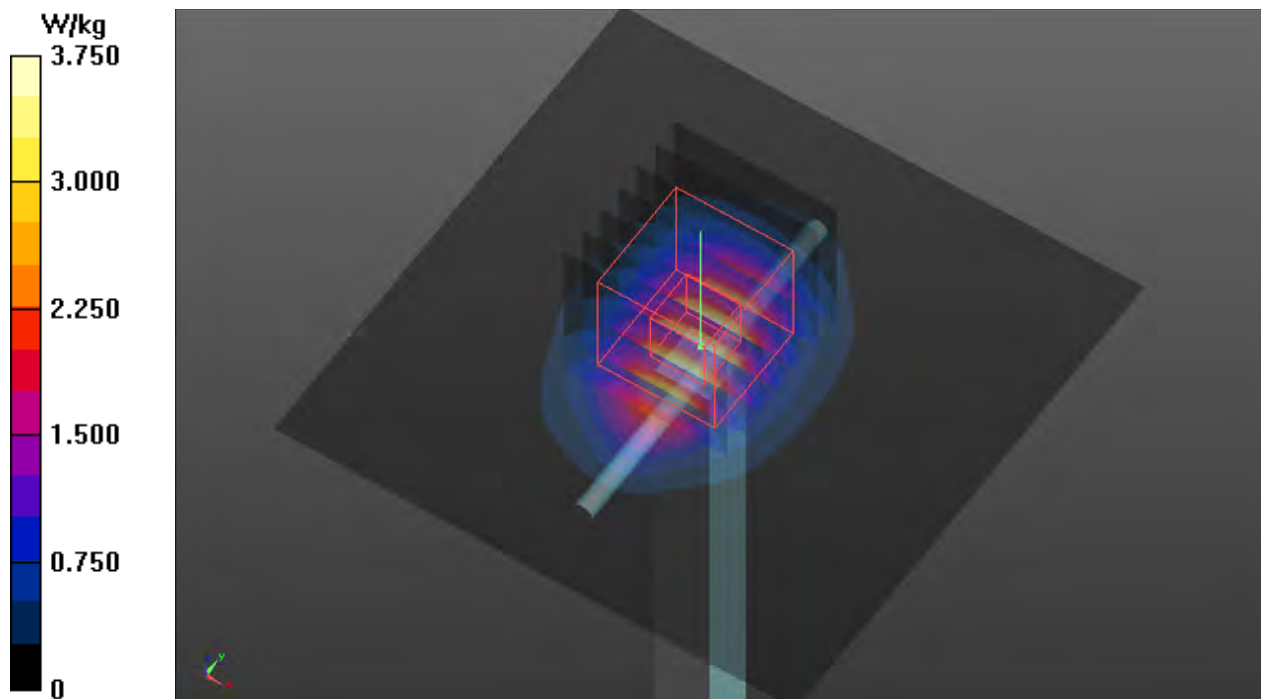

S52 System Check_H2600_210927

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0927 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 37.845$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.21, 7.21, 7.21) @ 2600 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 5.19 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 51.47 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 6.44 W/kg

SAR(1 g) = 2.97 W/kg; SAR(10 g) = 1.39 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.12 W/kg

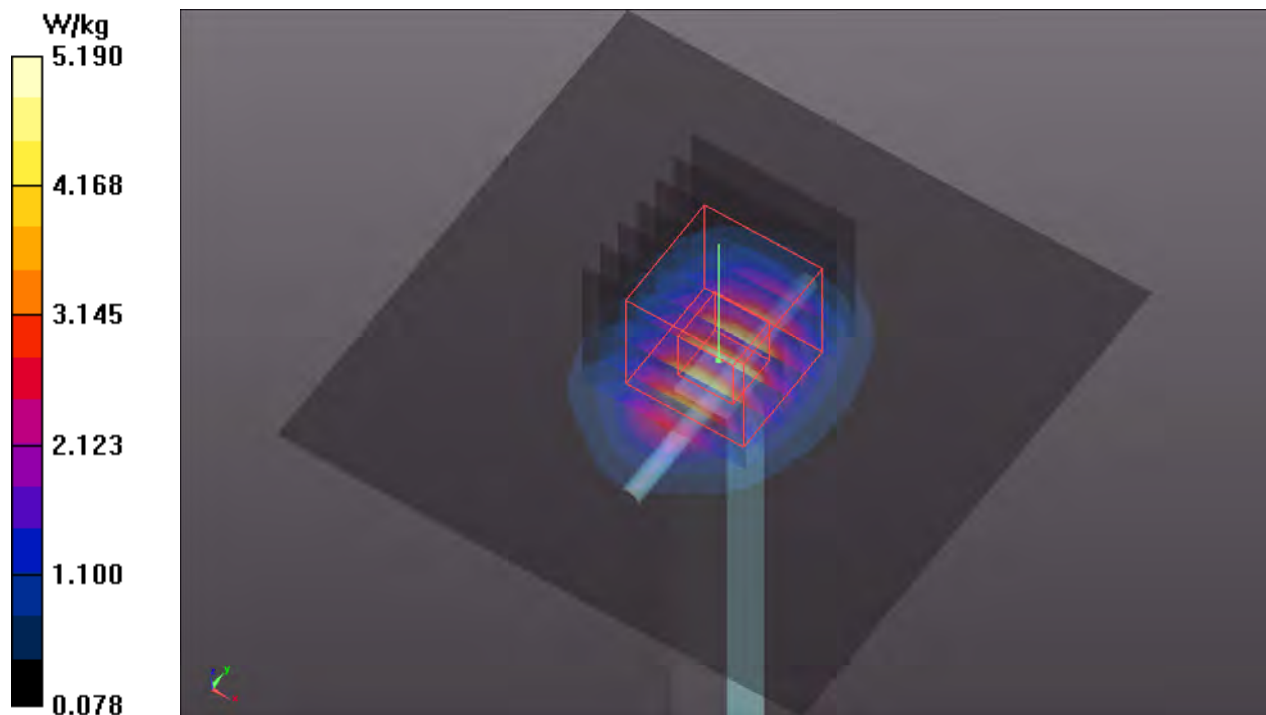

S53 System Check_H2600_210927

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0927 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.045$ S/m; $\epsilon_r = 37.845$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.21, 7.21, 7.21) @ 2600 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.19 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.47 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 6.44 W/kg

SAR(1 g) = 2.97 W/kg; SAR(10 g) = 1.39 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.12 W/kg

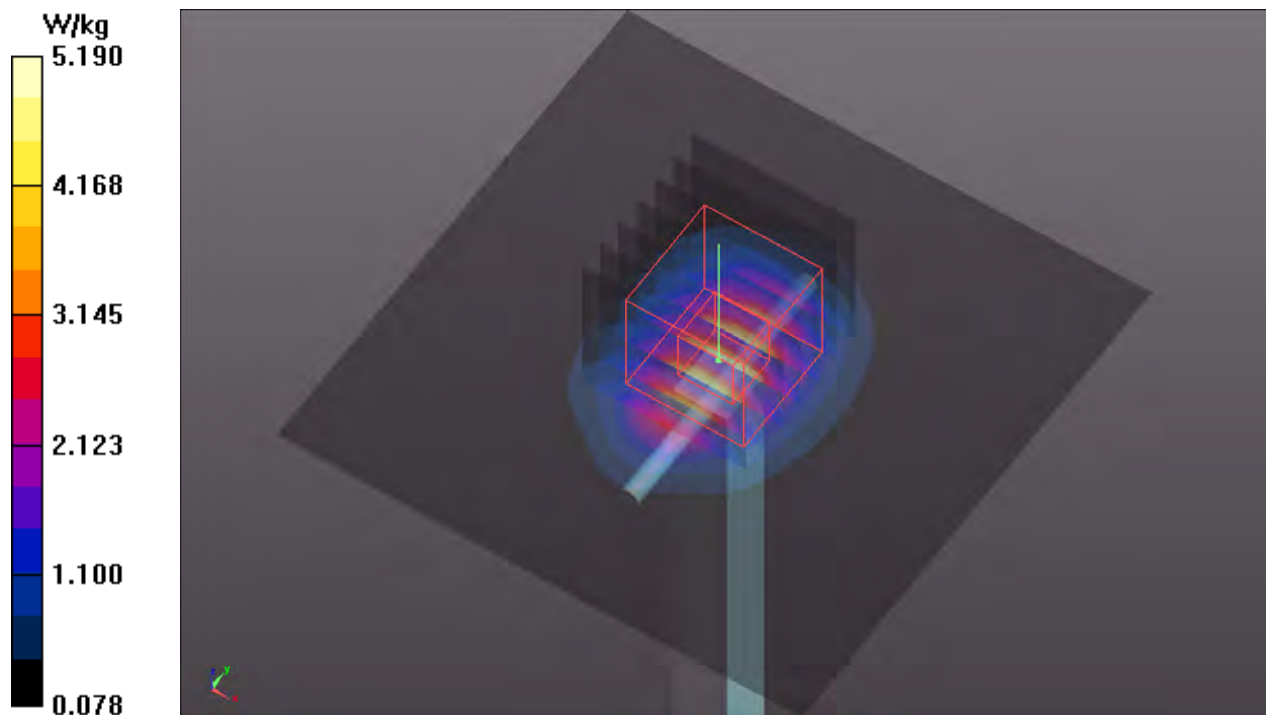

S54 System Check_H3500_210927

DUT: Dipole 3500 MHz; Type:D3500V2; SN: 1007

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H33T42N0_0927 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.922$ S/m; $\epsilon_r = 37.443$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(6.64, 6.64, 6.64) @ 3500 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.74 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 47.36 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 8.54 W/kg

SAR(1 g) = 3.45 W/kg; SAR(10 g) = 1.59 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.84 W/kg

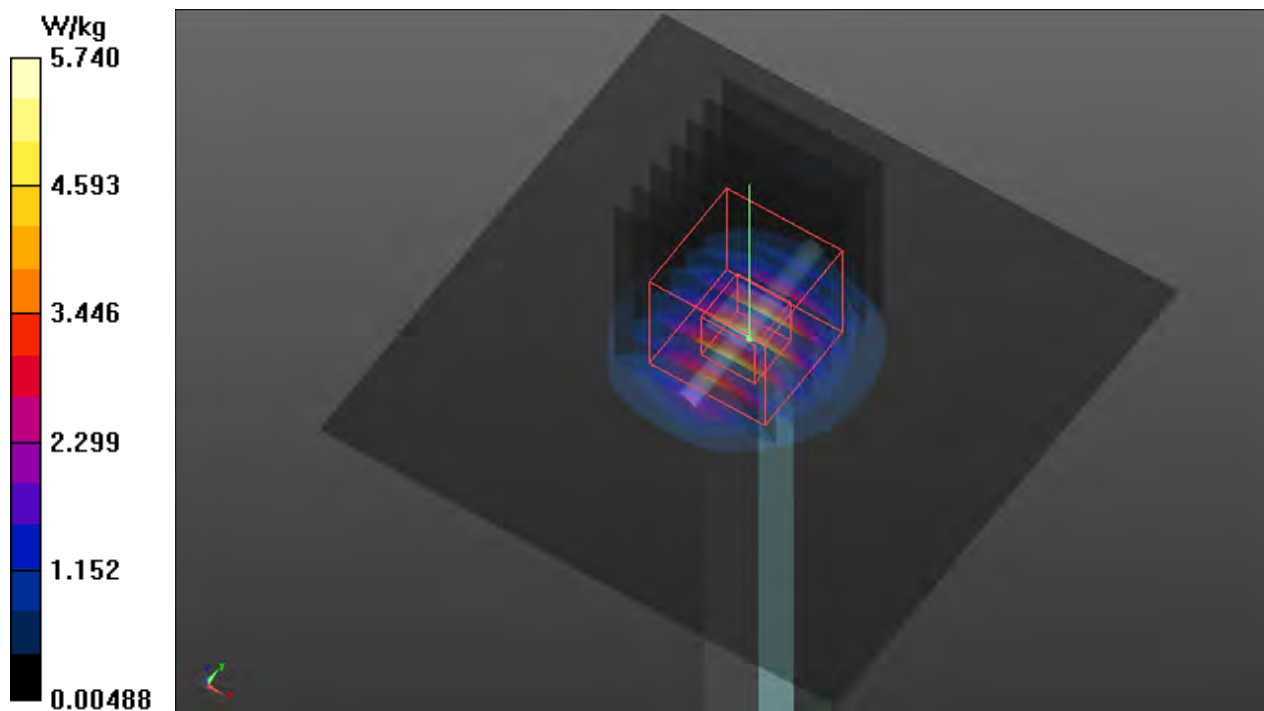

S55a System Check_H3500_210928**DUT: Dipole 3500 MHz; Type:D3500V2; SN: 1007**

Communication System: UID 0, CW; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: H33T42N0_0928 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.903$ S/m; $\epsilon_r = 36.992$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(6.7, 6.7, 6.7) @ 3500 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.60 W/kg


Pin=50mW/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 46.29 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 7.47 W/kg

SAR(1 g) = 2.97 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.68 W/kg

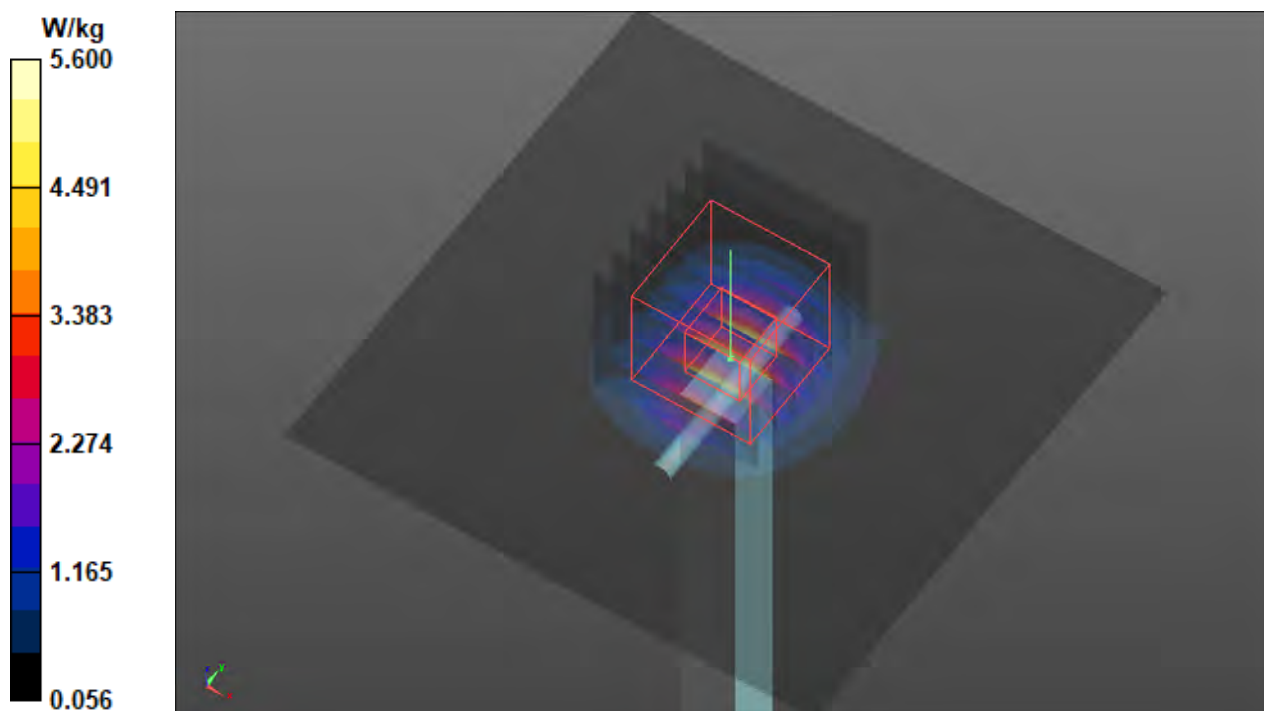

S55b System Check_H3700_210928**DUT: Dipole 3700 MHz; Type: D3700V2; SN: 1017**

Communication System: UID 0, CW; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium: H33T42N0_0928 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.109$ S/m; $\epsilon_r = 36.385$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(6.55, 6.55, 6.55) @ 3700 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.32 W/kg


Pin=50mW/Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2.5mm

Reference Value = 47.46 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 8.63 W/kg

SAR(1 g) = 3.36 W/kg; SAR(10 g) = 1.27 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 6.56 W/kg

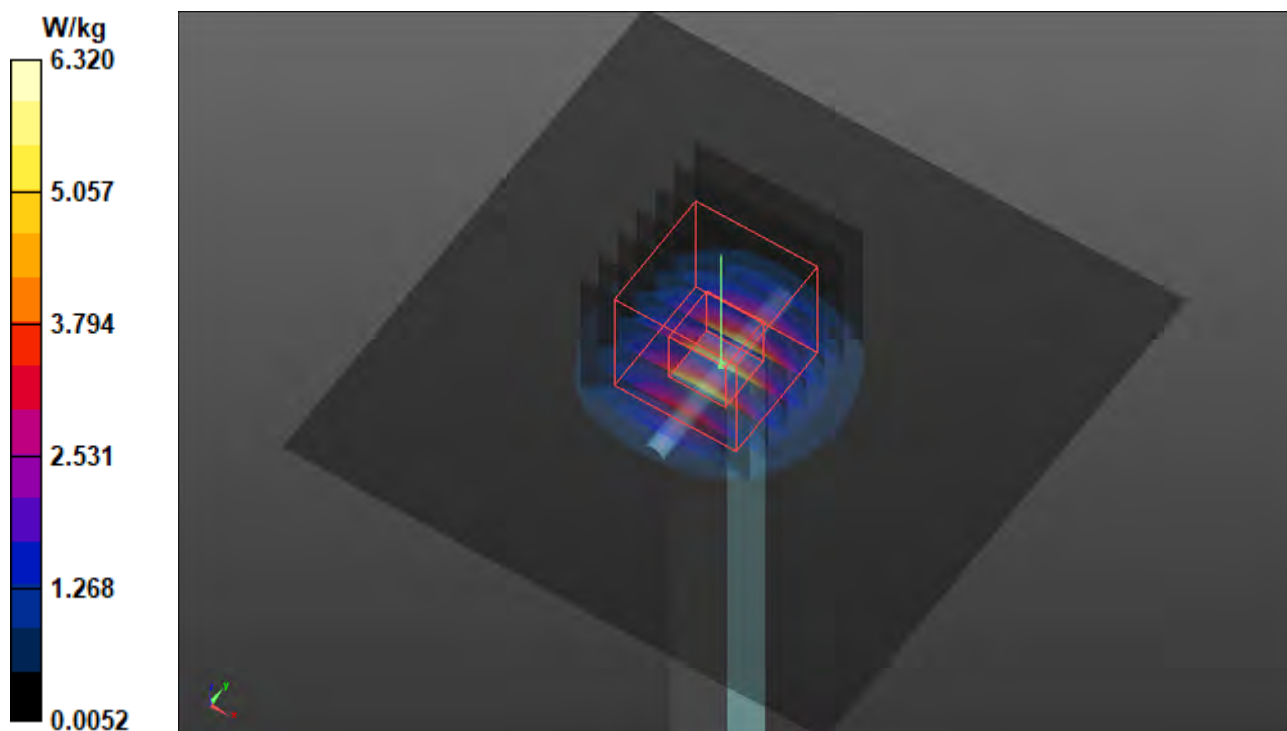

S56 System Check_H1750_210926**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0926 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.123$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.85 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.08 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.42 W/kg

SAR(1 g) = 1.82 W/kg; SAR(10 g) = 0.967 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.87 W/kg

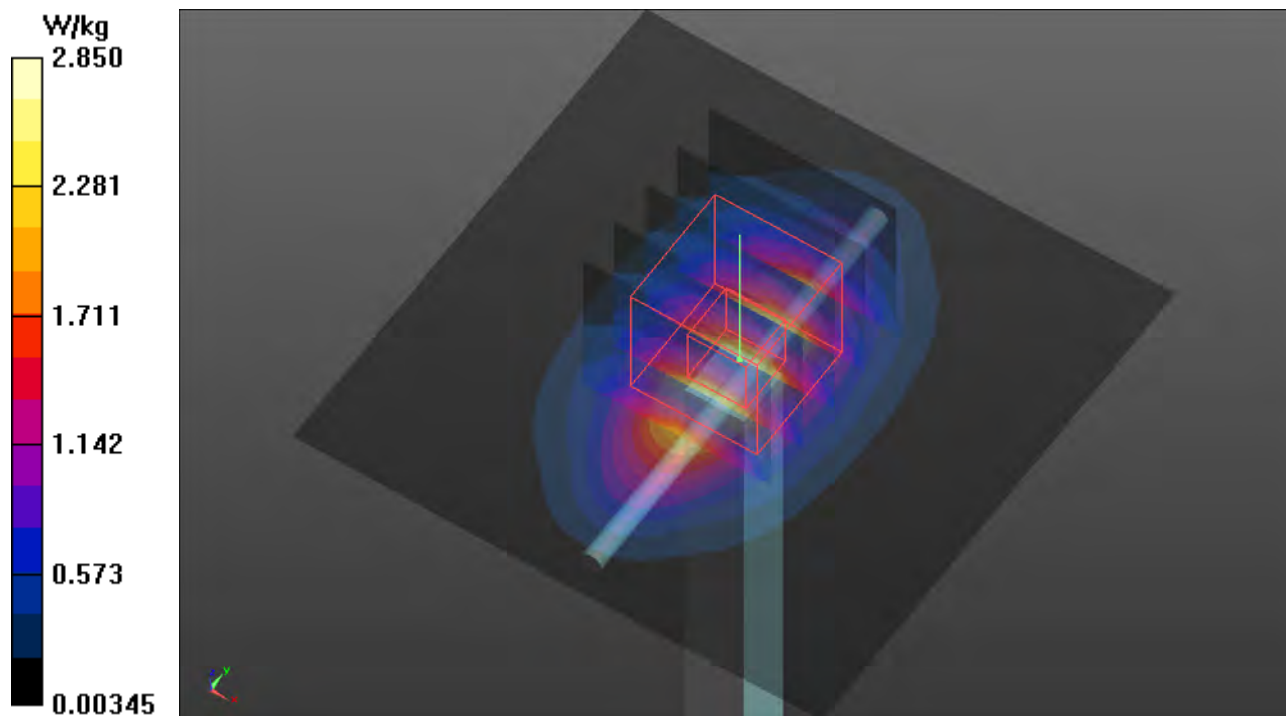

S57 System Check_H1750_210927

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0927 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.24, 8.24, 8.24) @ 1750 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.40 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.83 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 1.94 W/kg; SAR(10 g) = 0.814 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.29 W/kg

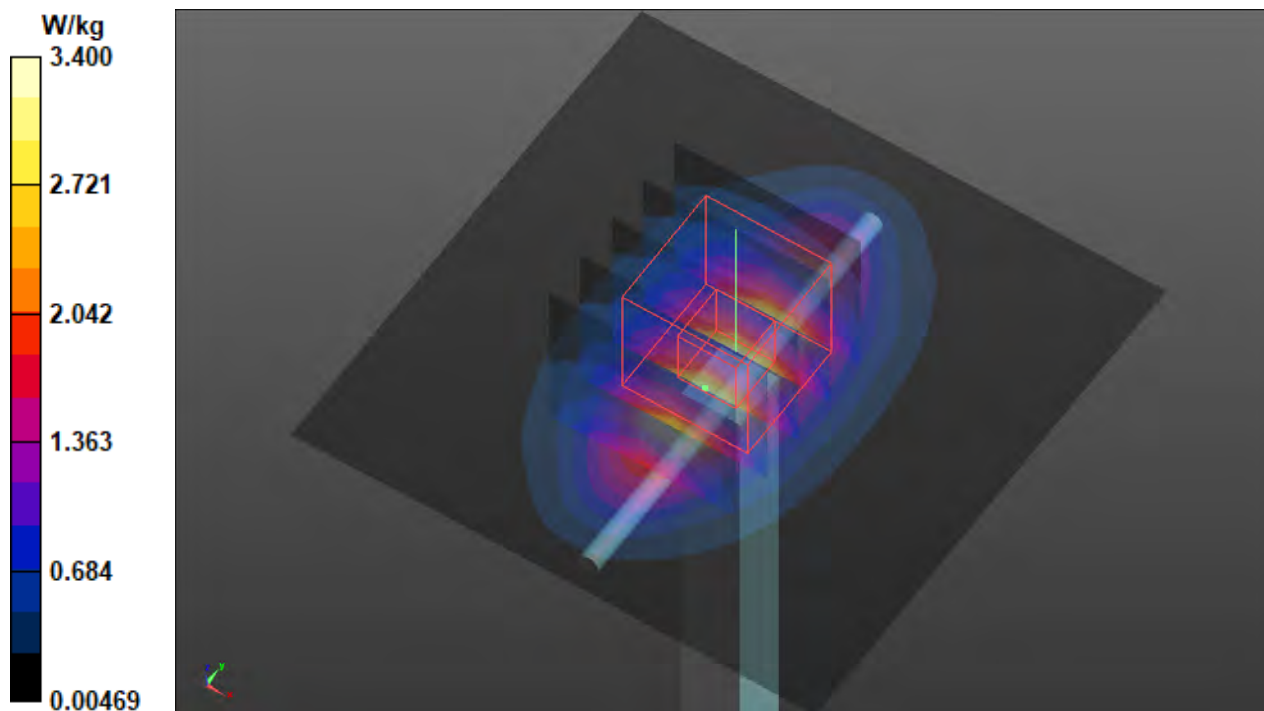

S58 System Check_H1900_211008

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_1008 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.578$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.28 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.51 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.94 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.1 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.33 W/kg

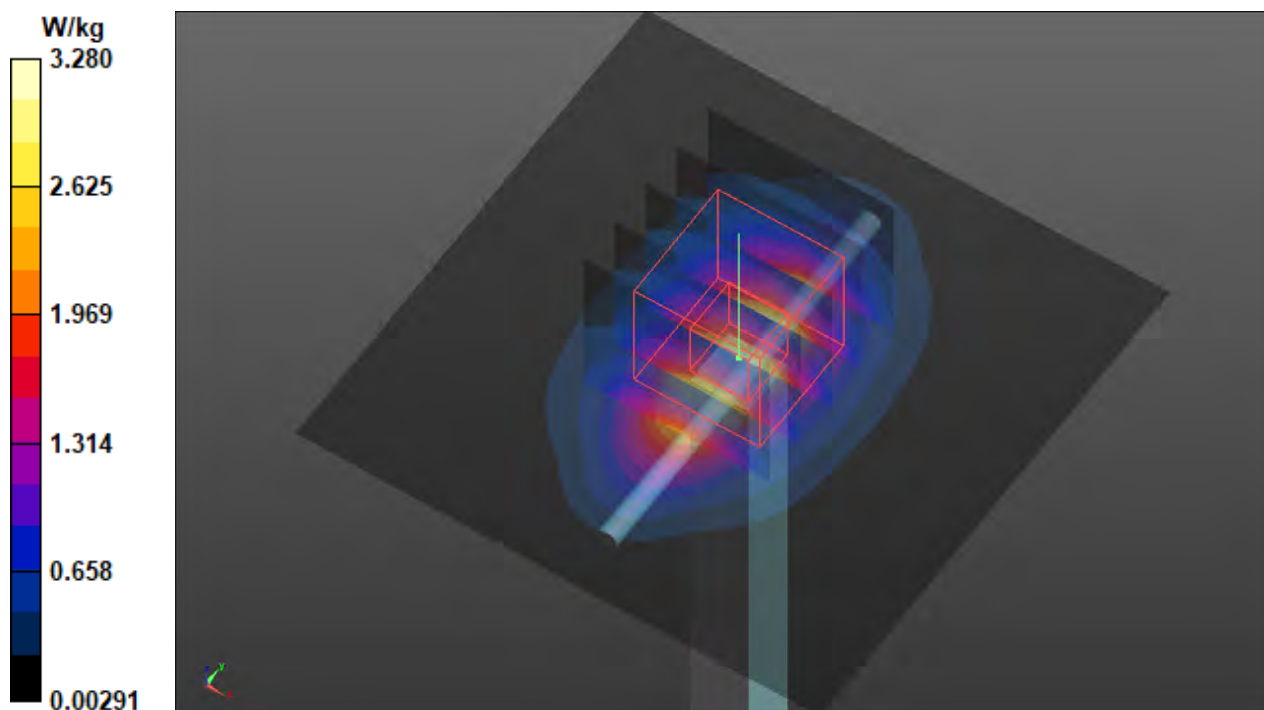

S59 System Check_H1900_210928

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d036

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0928 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.28 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.51 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.94 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.1 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.33 W/kg

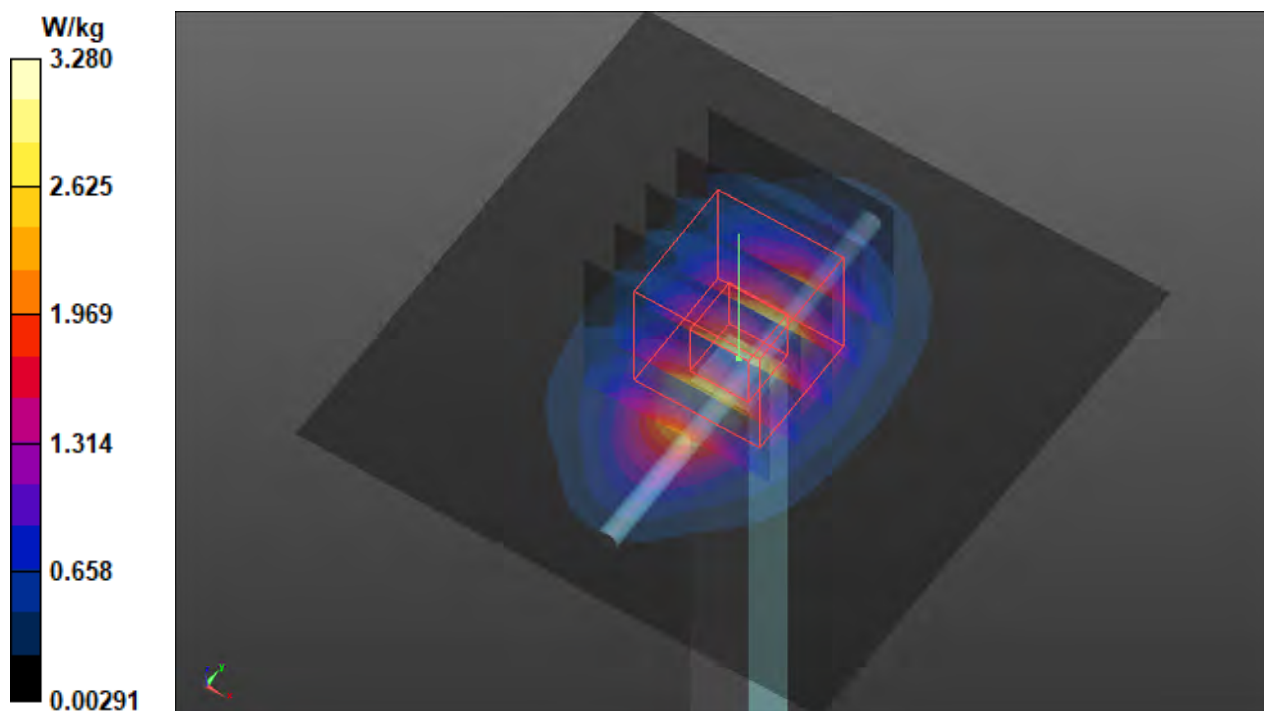

S60 System Check_H835_211008

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d092

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: H07T10N1_1008 Medium parameters used: $f = 835$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 43.009$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.5, 10.5, 10.5) @ 835 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.655 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.58 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.317 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.662 W/kg

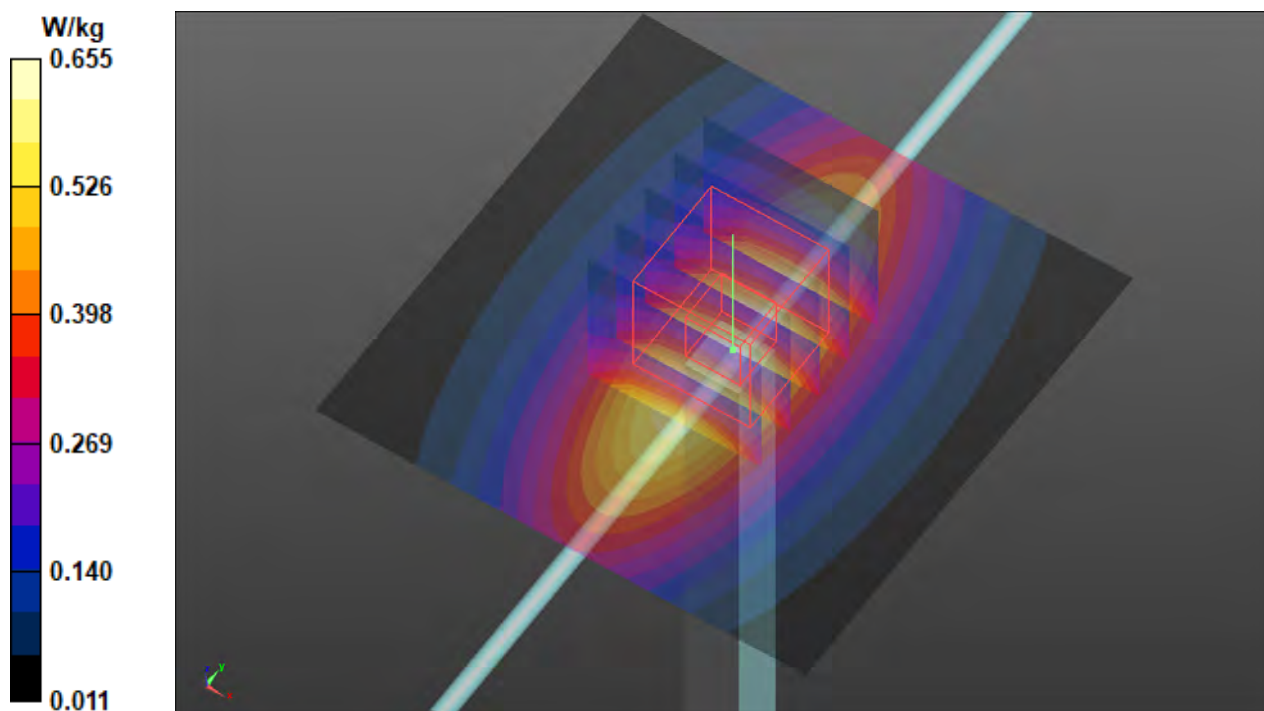

S61 System Check_H2600_211008

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_1008 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 38.531$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.07 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 40.56 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.94 W/kg

SAR(1 g) = 2.85 W/kg; SAR(10 g) = 1.33 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.16 W/kg

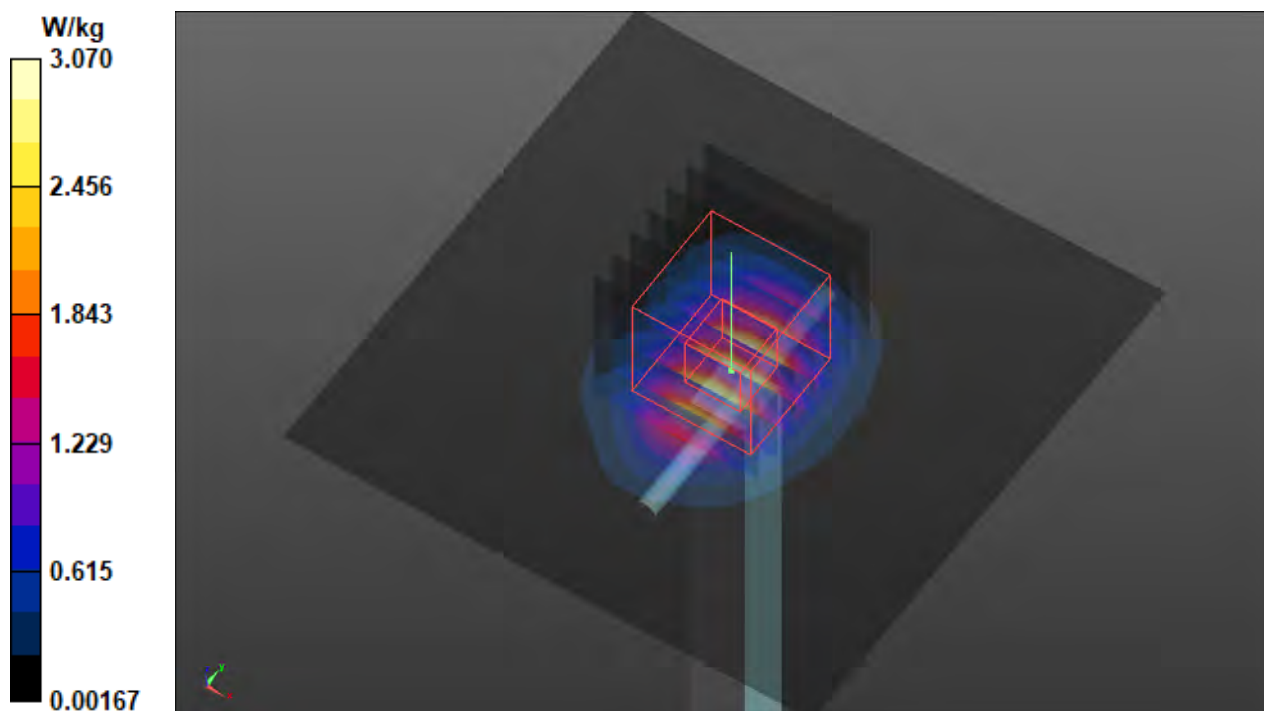

S62 System Check_H750_210928**DUT: Dipole 750 MHz; Type: D750V3; SN: 1078**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: H06T09N1_0928 Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 42.71$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.69, 10.69, 10.69) @ 750 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.541 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.66 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.269 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.546 W/kg

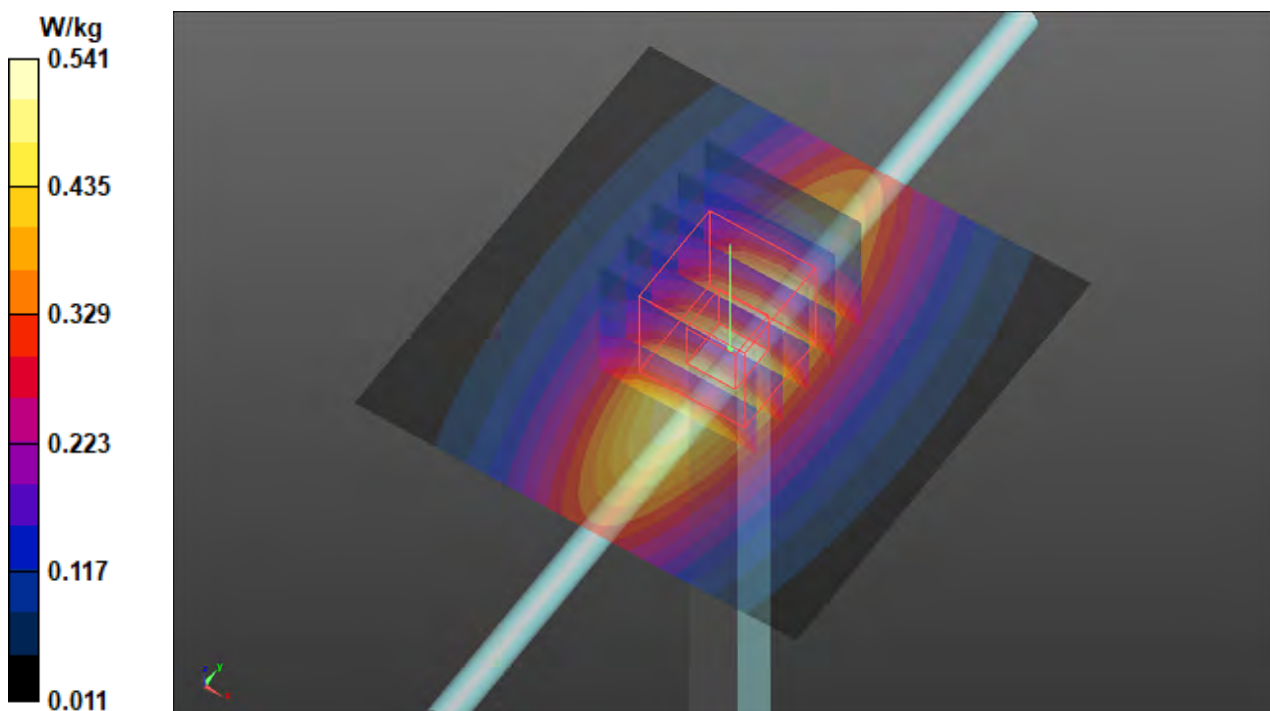

S63 System Check_H2600_210929

DUT: Dipole 2600 MHz; Type: D2600V2; SN: 1020

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H19T27N1_0929 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.036$ S/m; $\epsilon_r = 37.736$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2600 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn915; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 5.31 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.09 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 6.69 W/kg

SAR(1 g) = 2.65 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 5.34 W/kg

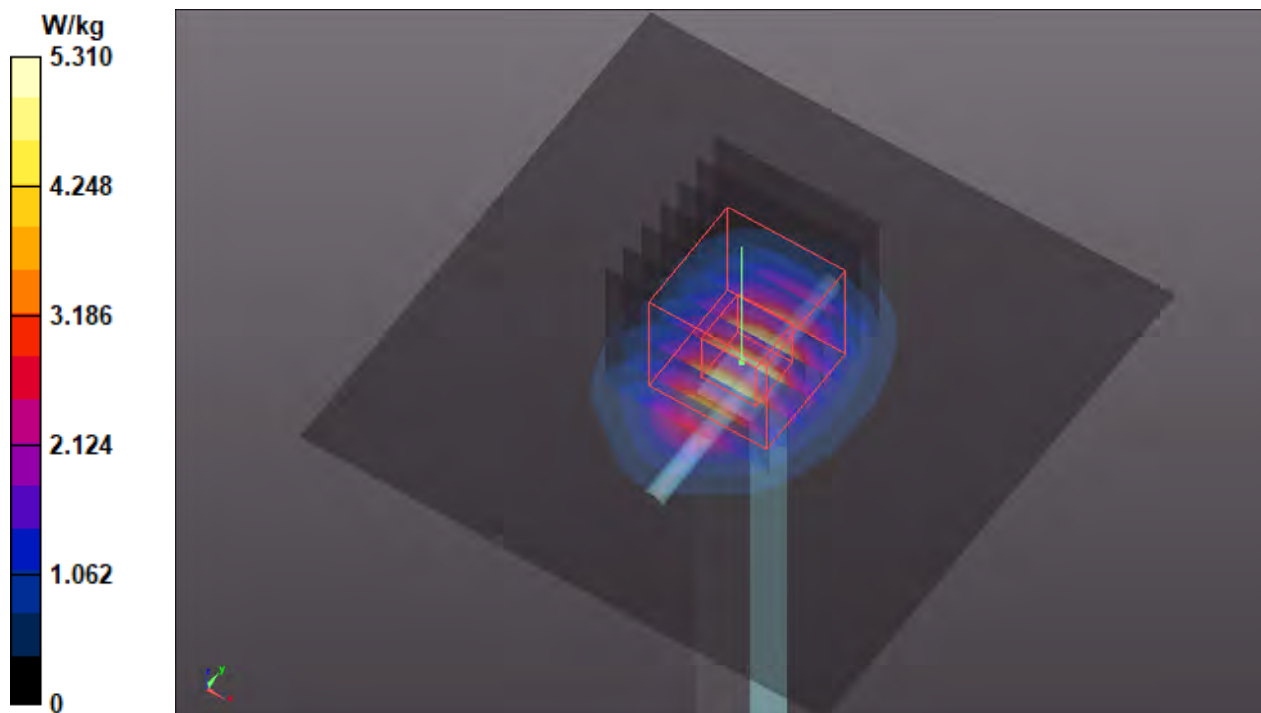

S64 System Check_H1750_210929**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0929 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 39.572$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn915; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.52 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.31 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 1.73 W/kg; SAR(10 g) = 0.944 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.55 W/kg

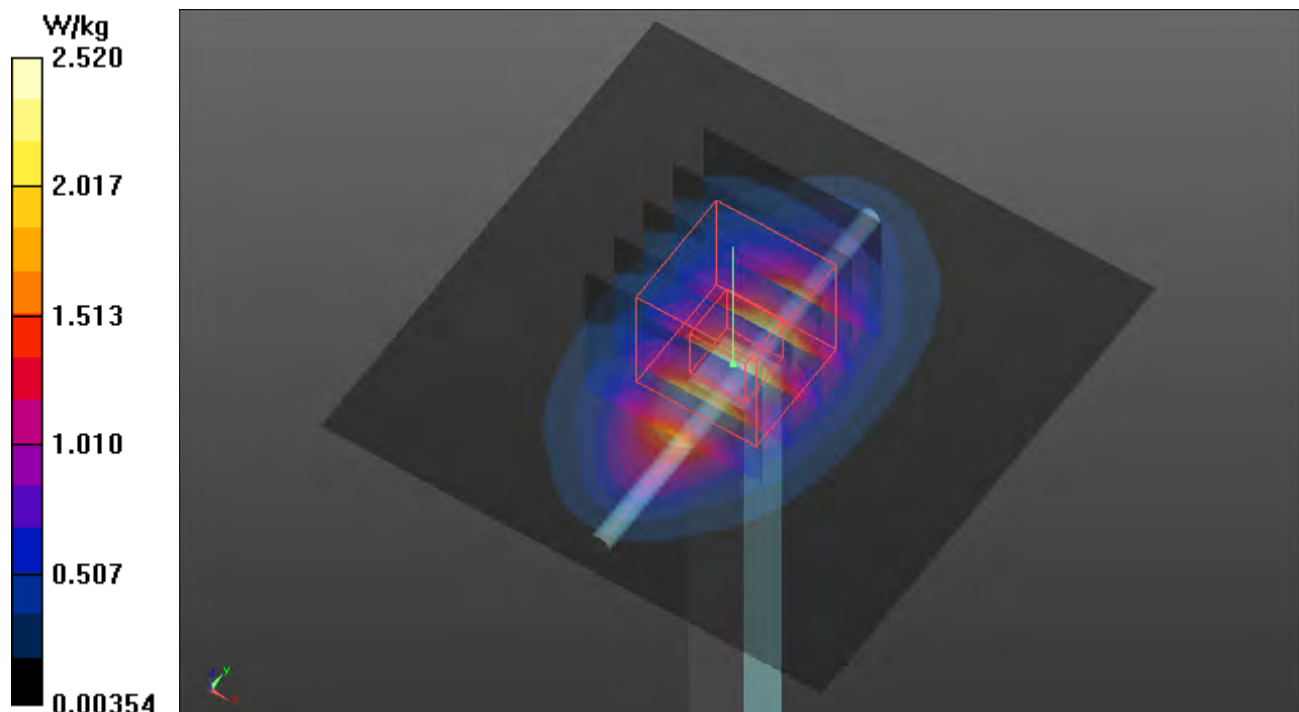

S65 System Check_H1750_210929**DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1111**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: H16T20N1_0929 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.324$ S/m; $\epsilon_r = 39.572$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1750 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn915; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.52 W/kg


Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.31 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 1.73 W/kg; SAR(10 g) = 0.944 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 2.55 W/kg

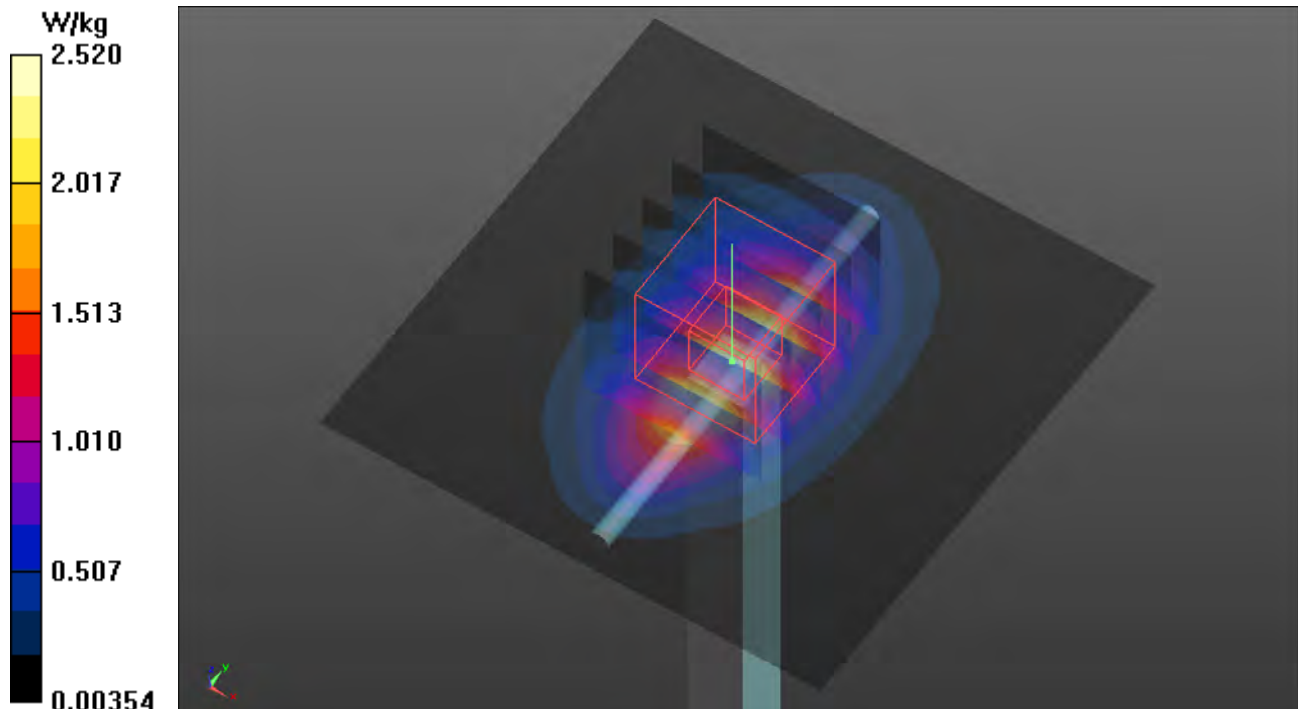

S66 System Check_H2450_211001**DUT: Dipole 2450 MHz; Type: D2450V2; SN: 835**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_1001 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.795$ S/m; $\epsilon_r = 37.932$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2450 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.39 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.67 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 5.48 W/kg

SAR(1 g) = 2.66 W/kg; SAR(10 g) = 1.25 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.47 W/kg

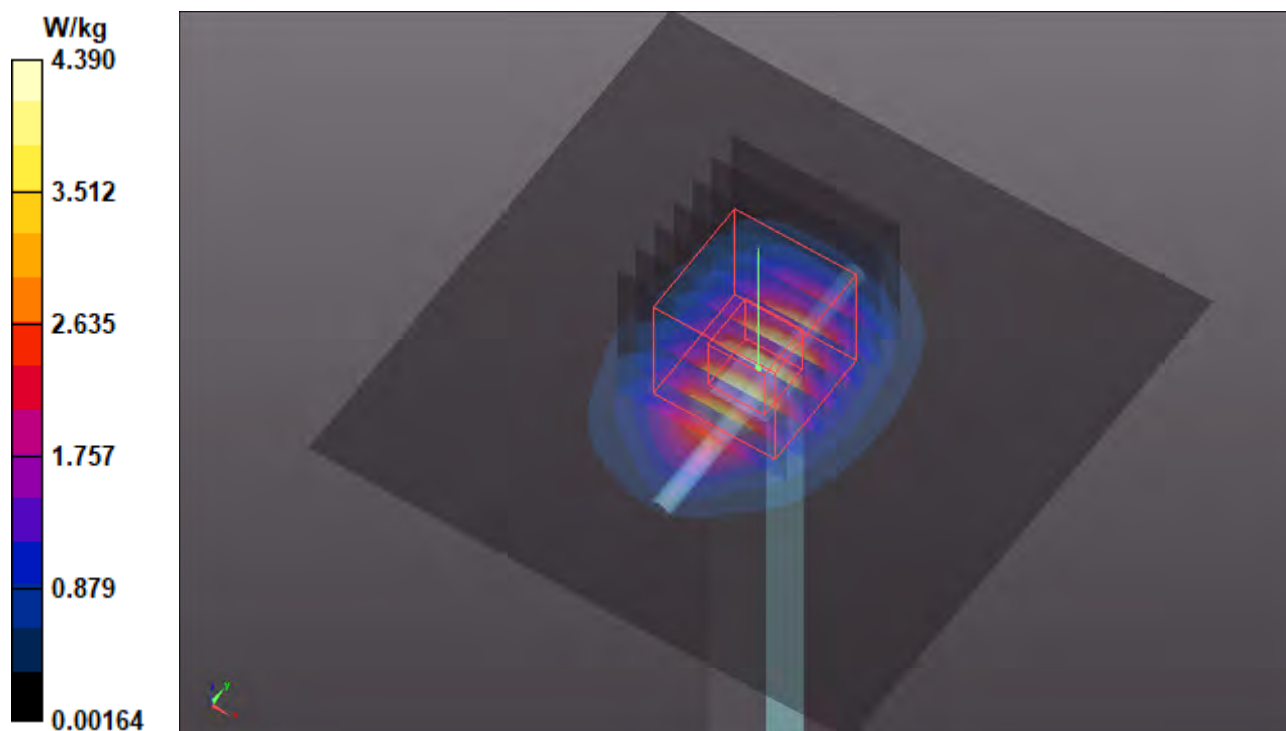

S67 System Check_H5250_211002**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: H34T60N1_1002 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.692$ S/m; ϵ_r

$= 37.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.5 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 51.80 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 4.23 W/kg; SAR(10 g) = 1.23 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.5 W/kg

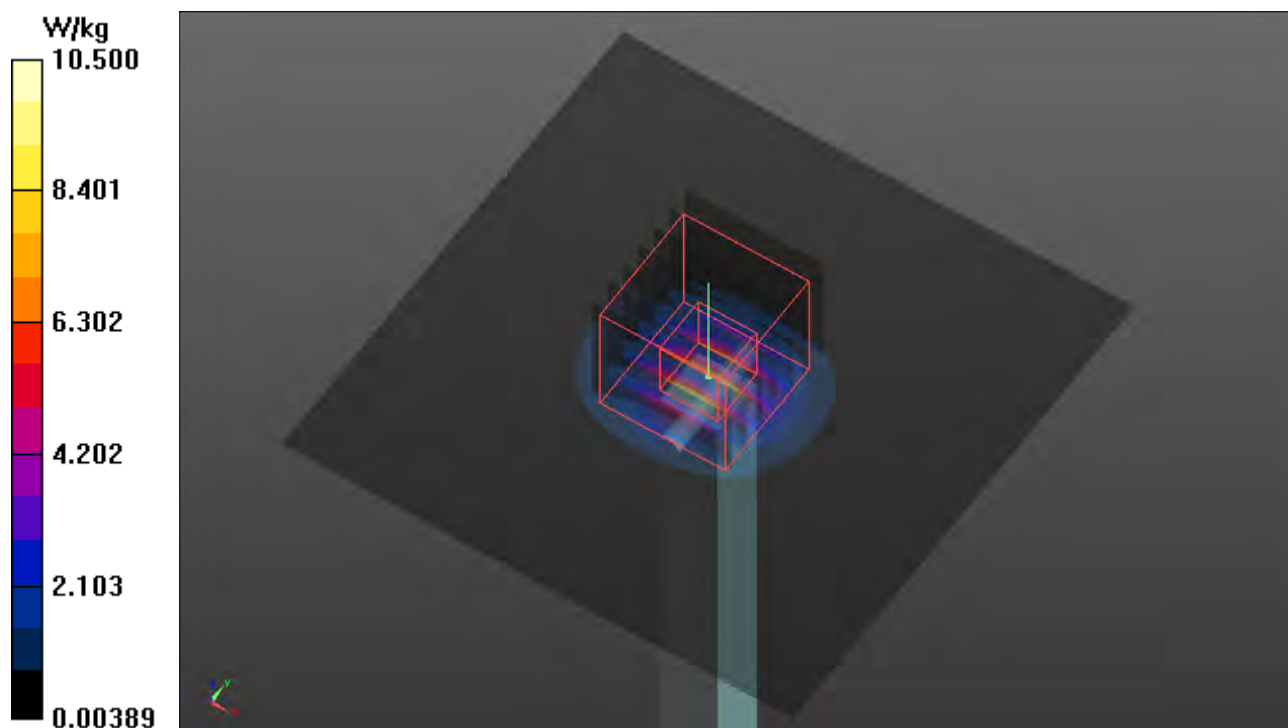

S68 System Check_H5600_211002**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: H34T60N1_1002 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.029$ S/m; $\epsilon_r = 37.237$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.8, 4.8, 4.8) @ 5600 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)


Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 8.93 W/kg**Pin=50mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.49 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 1.14 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 10.3 W/kg

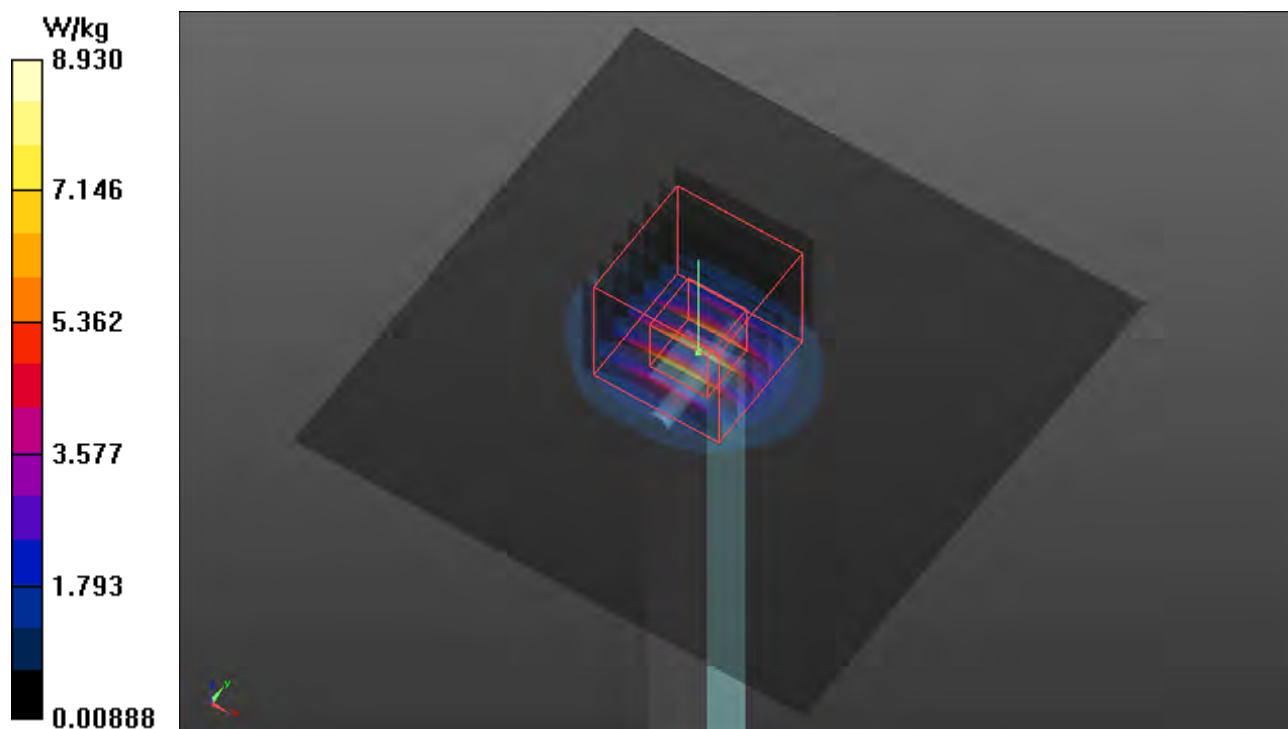

S69 System Check_H5750_211004**DUT: Dipole 5 GHz; Type: D5GHzV2; SN: 1019**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: H34T60N1_1004 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.164$ S/m; $\epsilon_r = 37.001$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.95, 4.95, 4.95) @ 5750 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.70 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.55 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 3.79 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 9.84 W/kg

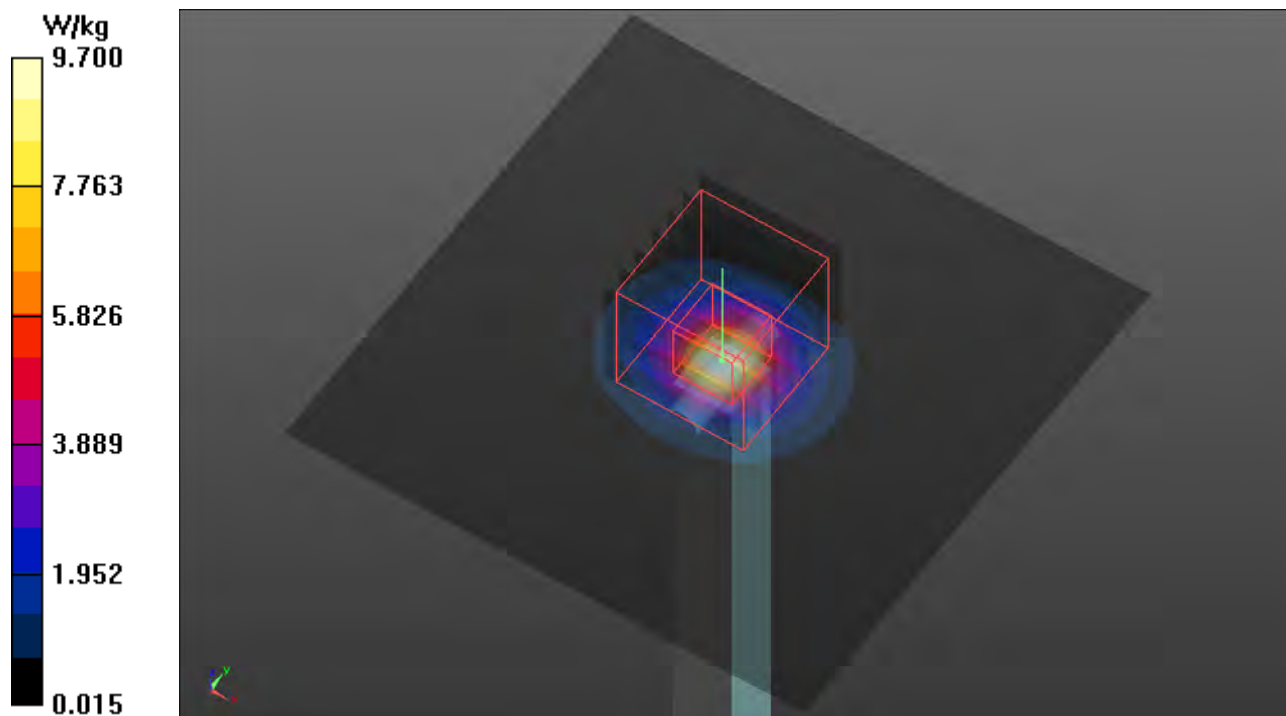

S70 System Check_H2450_211004

DUT: Dipole 2450 MHz; Type: D2450V2; SN: 835

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: H19T27N1_1004 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 37.777$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2450 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.34 W/kg


Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.26 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 5.44 W/kg

SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.24 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 4.41 W/kg

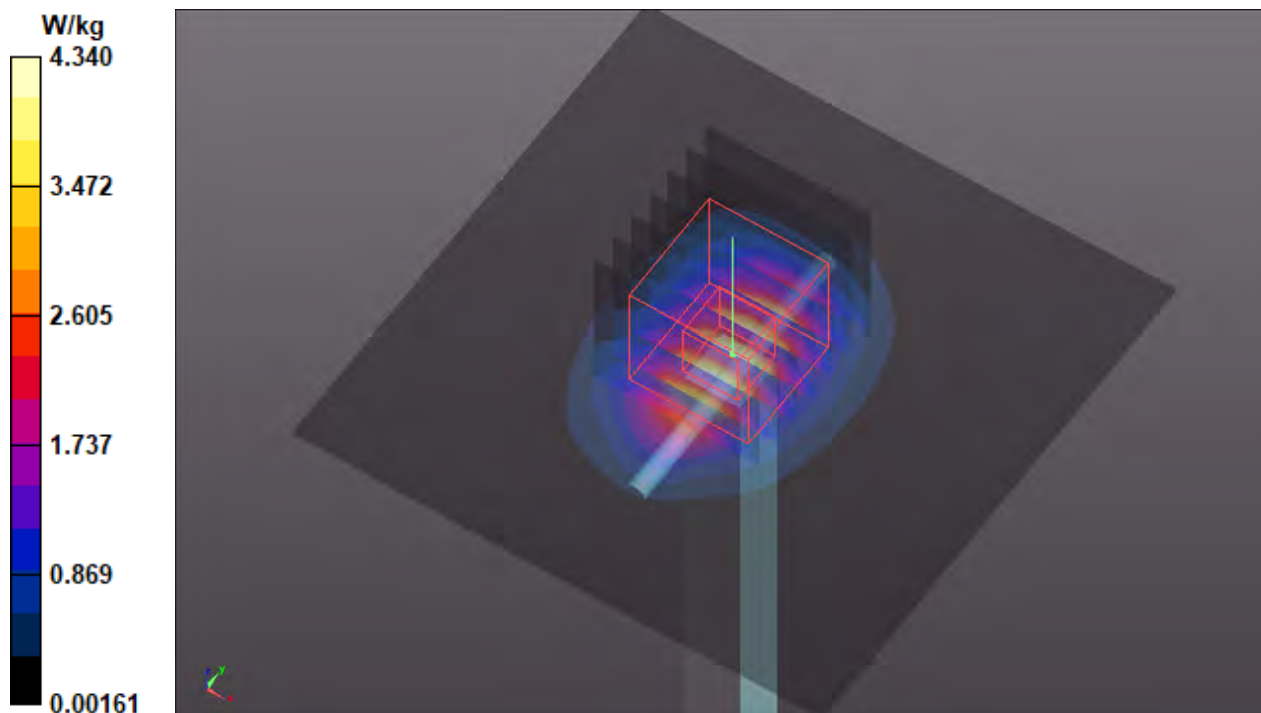

Annex B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

P01 WCDMA II_RMC12.2K_Rear Face_0mm_Ch9400_Ant0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1_0921 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 38.778$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1880 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.36 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 31.48 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.254 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.7%

Maximum value of SAR (measured) = 1.37 W/kg

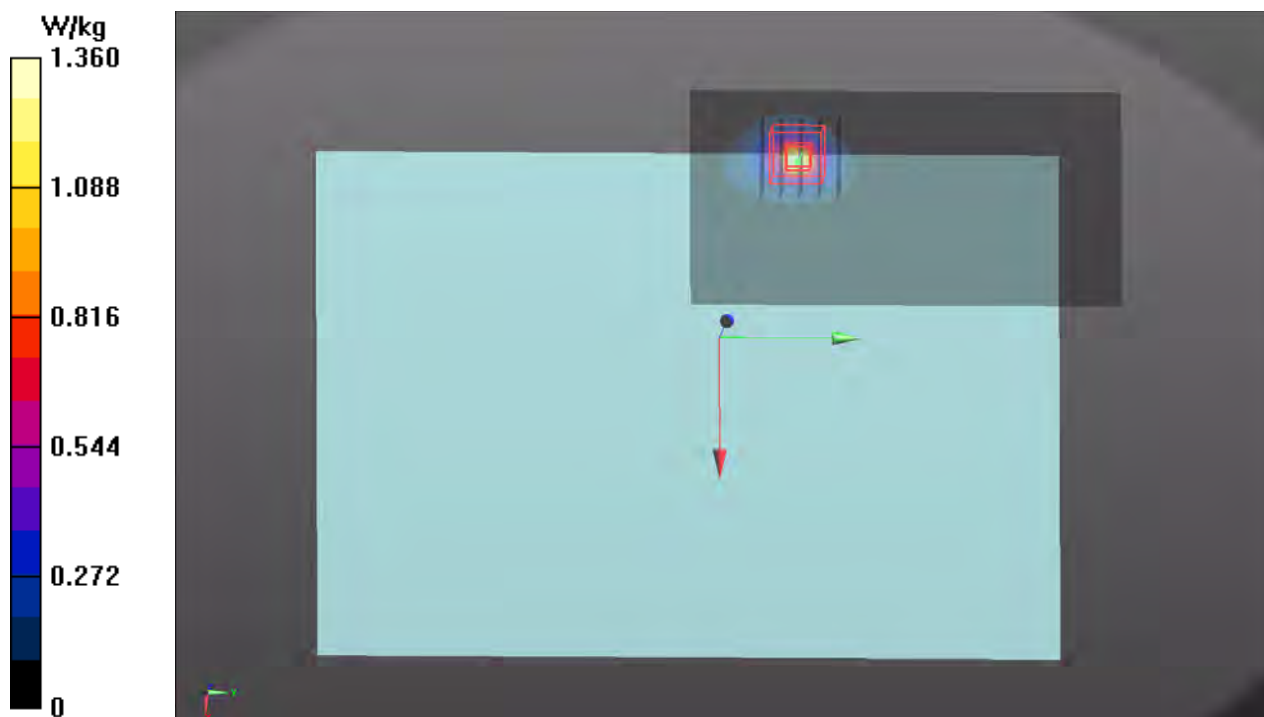

P02 WCDMA IV_RMC12.2K_Rear Face_0mm_Ch1513_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1_0921 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 39.055$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1752.6 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.38 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.265 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 38.2%

Maximum value of SAR (measured) = 1.35 W/kg

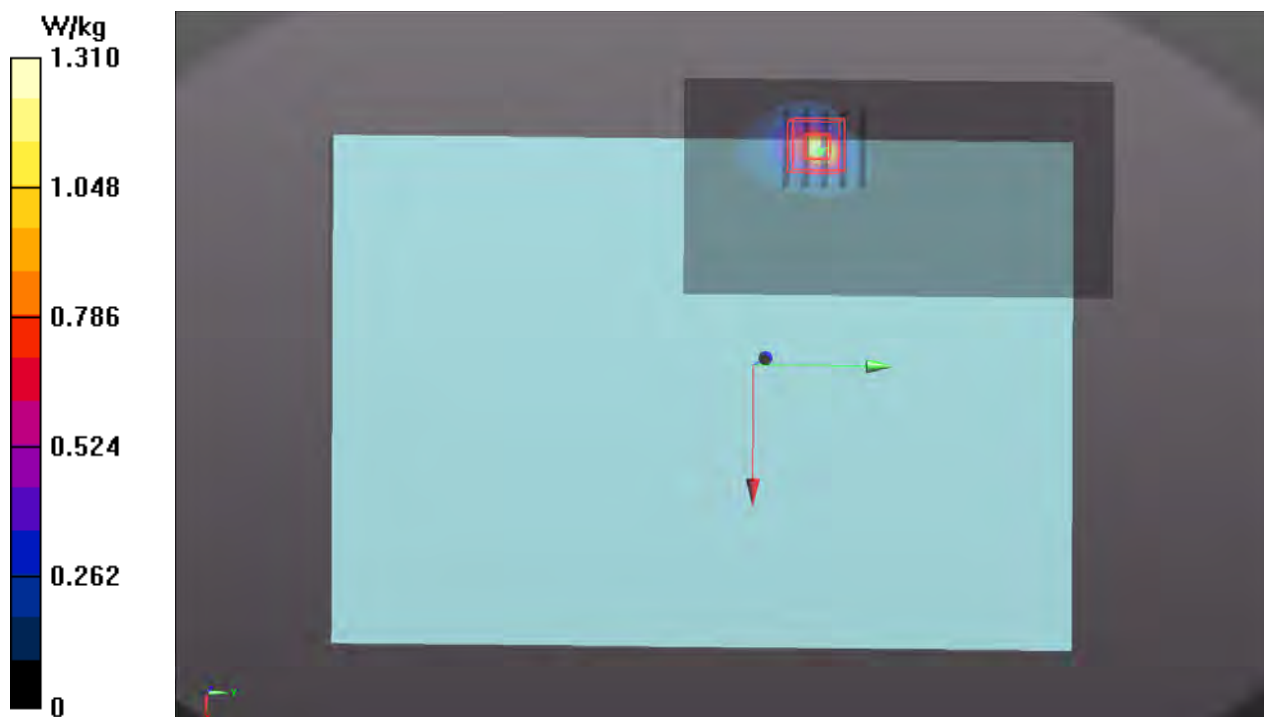

P03 WCDMA V_RMC12.2K_Rear Face_0mm_Ch4233_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 846.6 MHz; Duty Cycle: 1:1.95

Medium: H07T10N1_0921 Medium parameters used: $f = 847$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 40.261$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 846.6 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.53 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 41.13 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.355 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 1.52 W/kg

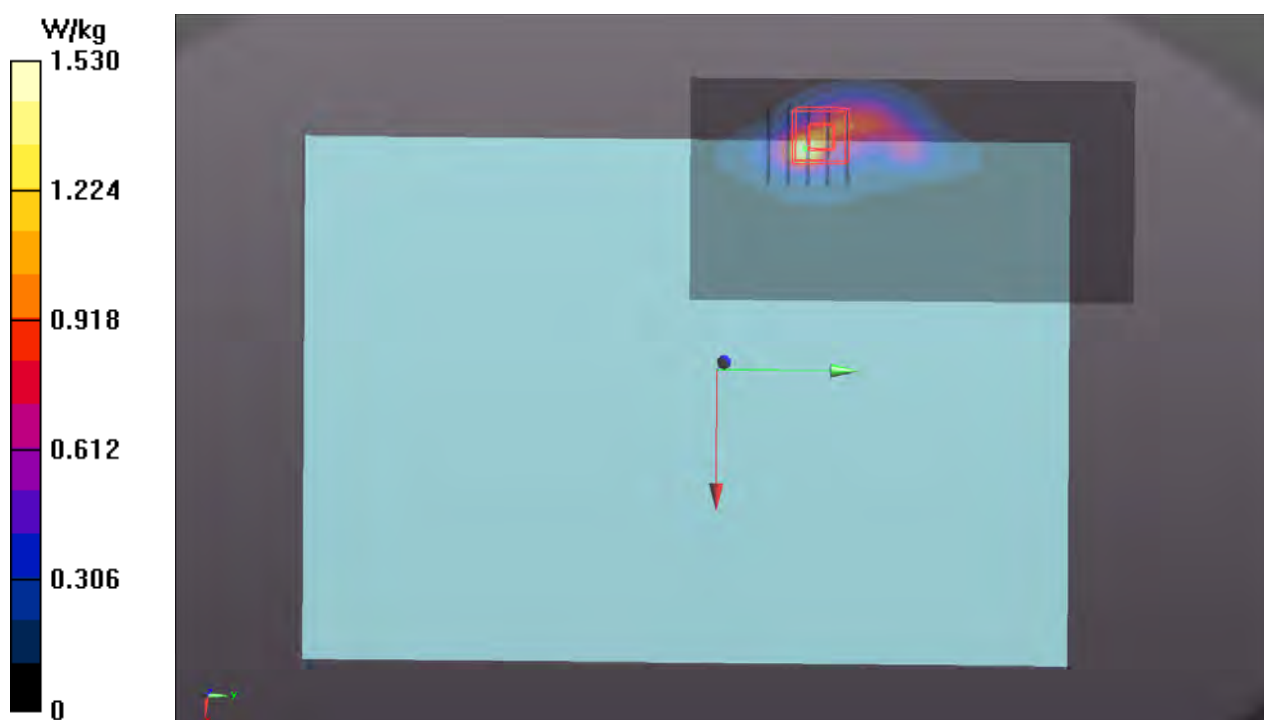

**P04 LTE 2_QPSK20M_Rear Face_0mm_Ch19100_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1900 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0921 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.786$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.336 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.49 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.108 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.6%

Maximum value of SAR (measured) = 0.557 W/kg

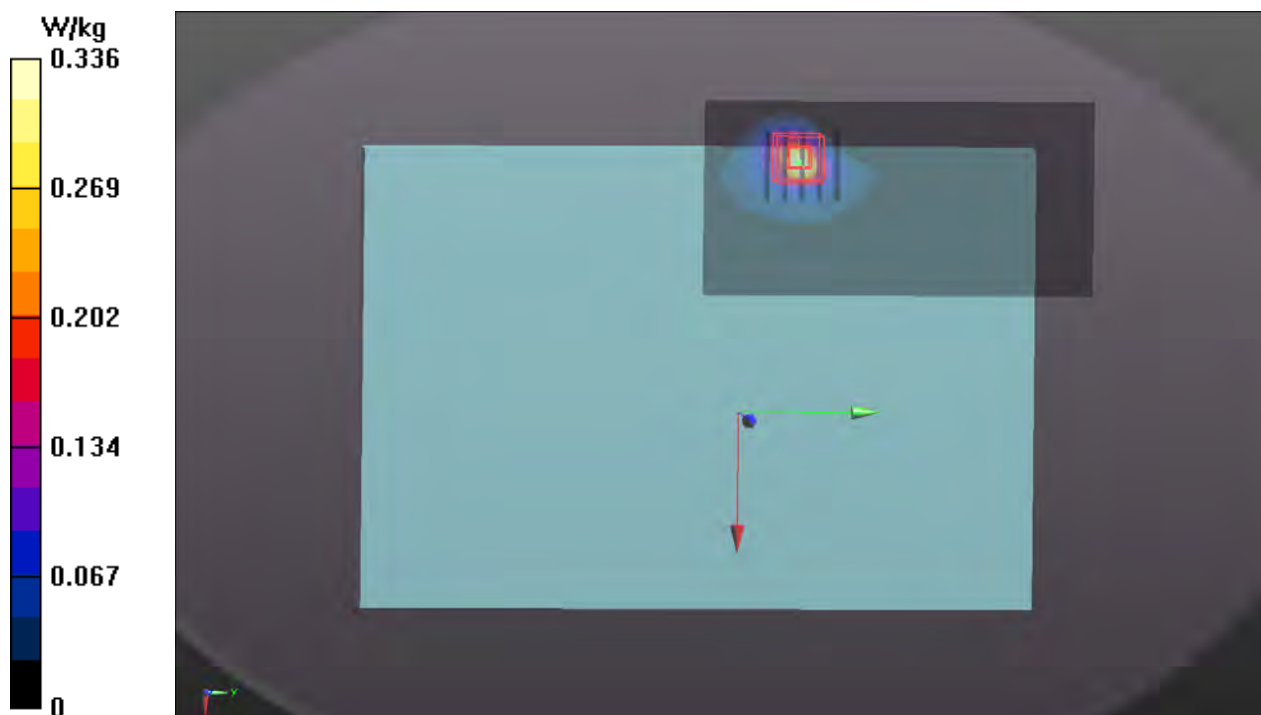

**P05 LTE 2_QPSK20M_Left Side_7mm_Ch18700_1RB_OS0_Ant
2_P-Sensor_w_o****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1860 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0923 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 39.164$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1860 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x161x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.366 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.74 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.120 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.365 W/kg

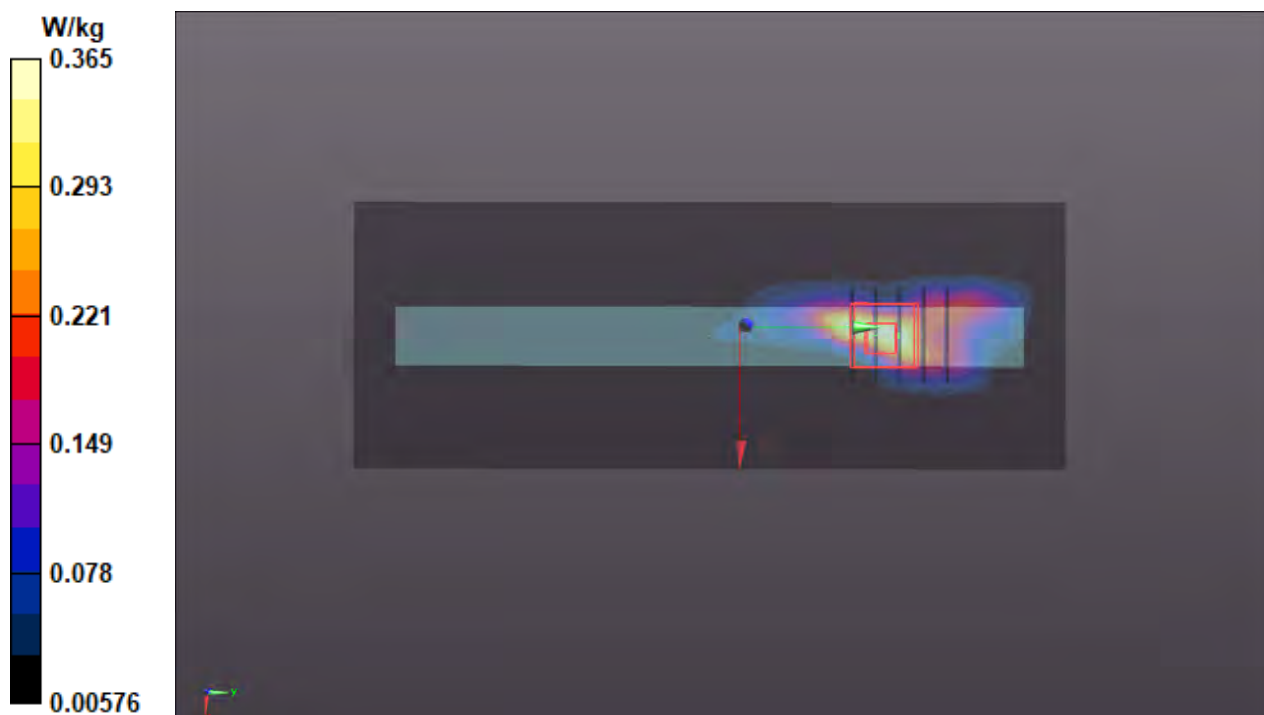

**P06 LTE 4_QPSK20M_Rear Face_0mm_Ch20050_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1720 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0921 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 39.092$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1720 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.395 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.18 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.087 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 0.403 W/kg

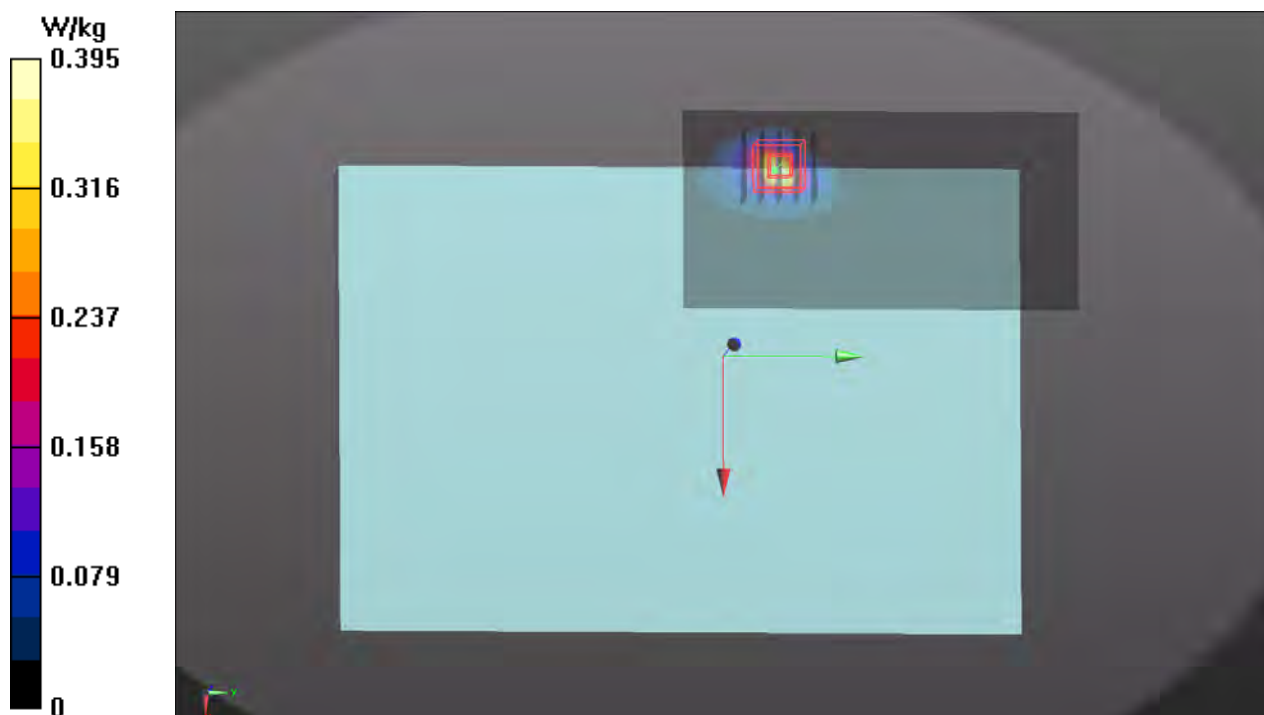

**P07 LTE 5_QPSK10M_Rear Face_0mm_Ch20600_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 844 MHz; Duty Cycle: 1:3.74

Medium: H07T10N1_0921 Medium parameters used: $f = 844$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 40.273$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 844 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.325 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.03 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.108 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.391 W/kg

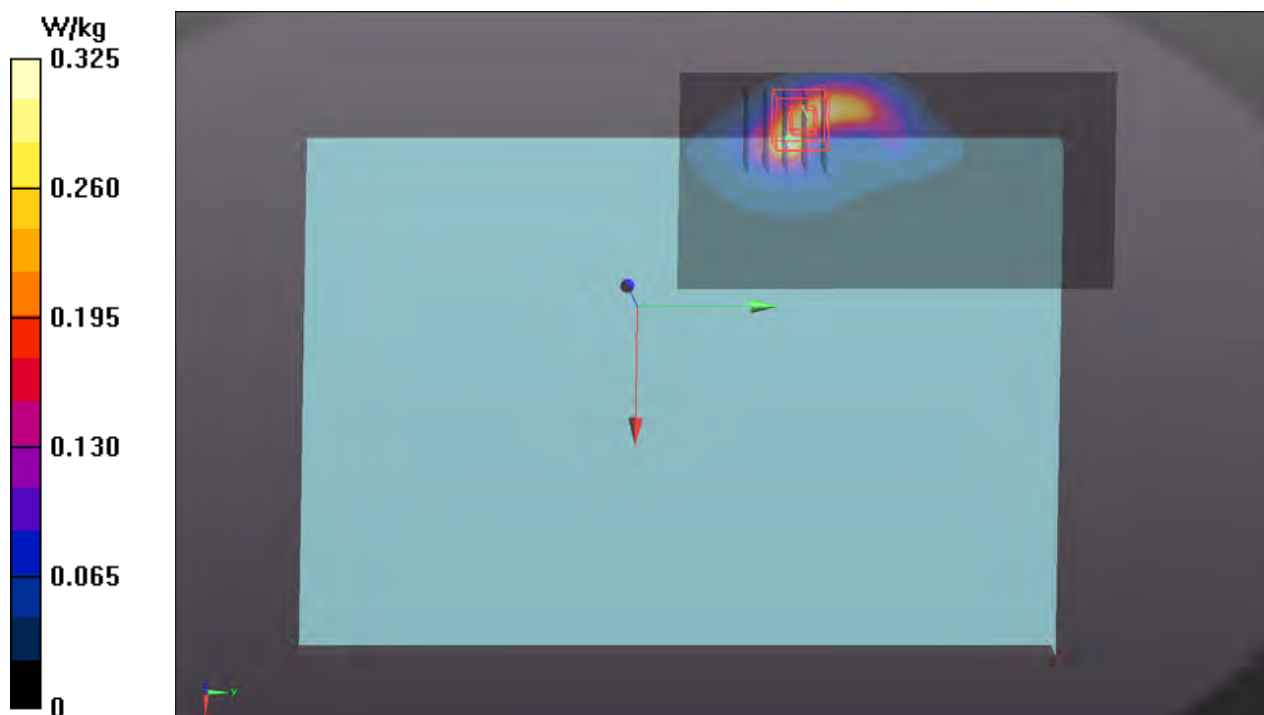

**P08 LTE 7_QPSK20M_Bottom Side_16mm_Ch20850_1RB_OS0_Ant
0_P-Sensor_w_o****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2510 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0922 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 37.76$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.58, 7.58, 7.58) @ 2510 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.791 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.41 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.909 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.241 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.747 W/kg

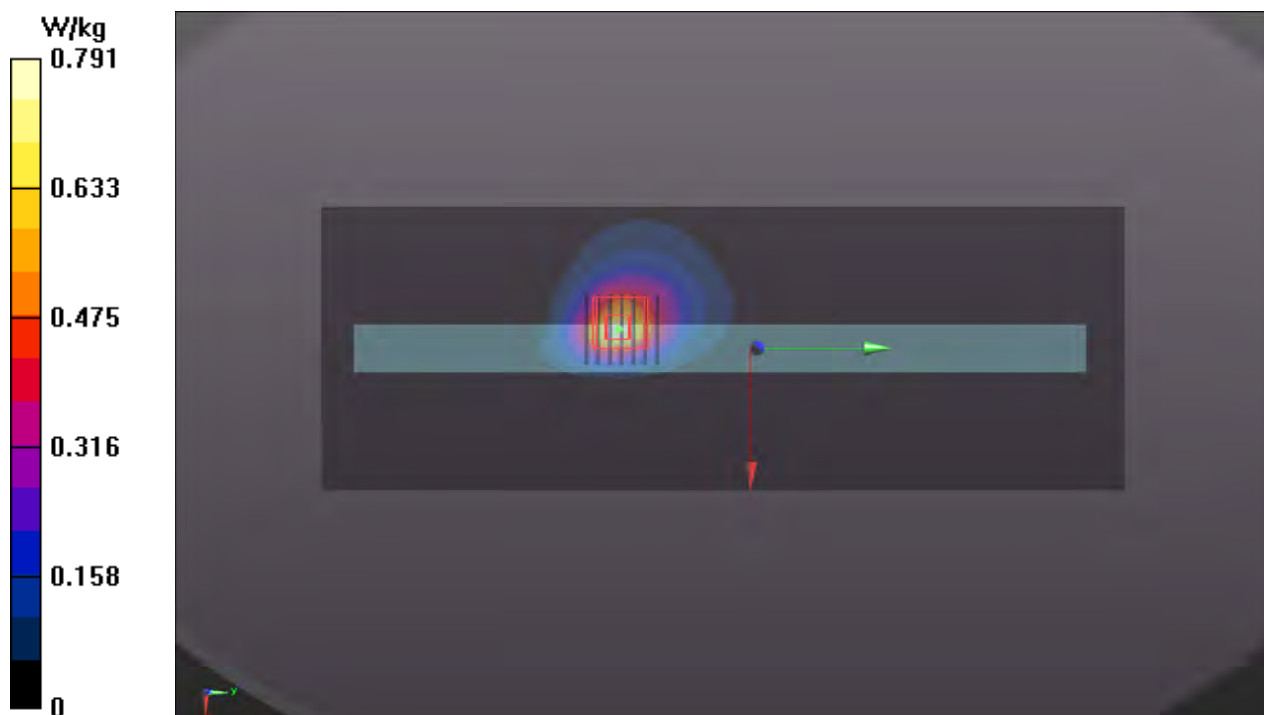

**P09 LTE 7_QPSK20M_Left Side_7mm_Ch21350_1RB_OS0_Ant
2_P-Sensor_w_o****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2560 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0924 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2560 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.766 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.28 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.193 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.847 W/kg

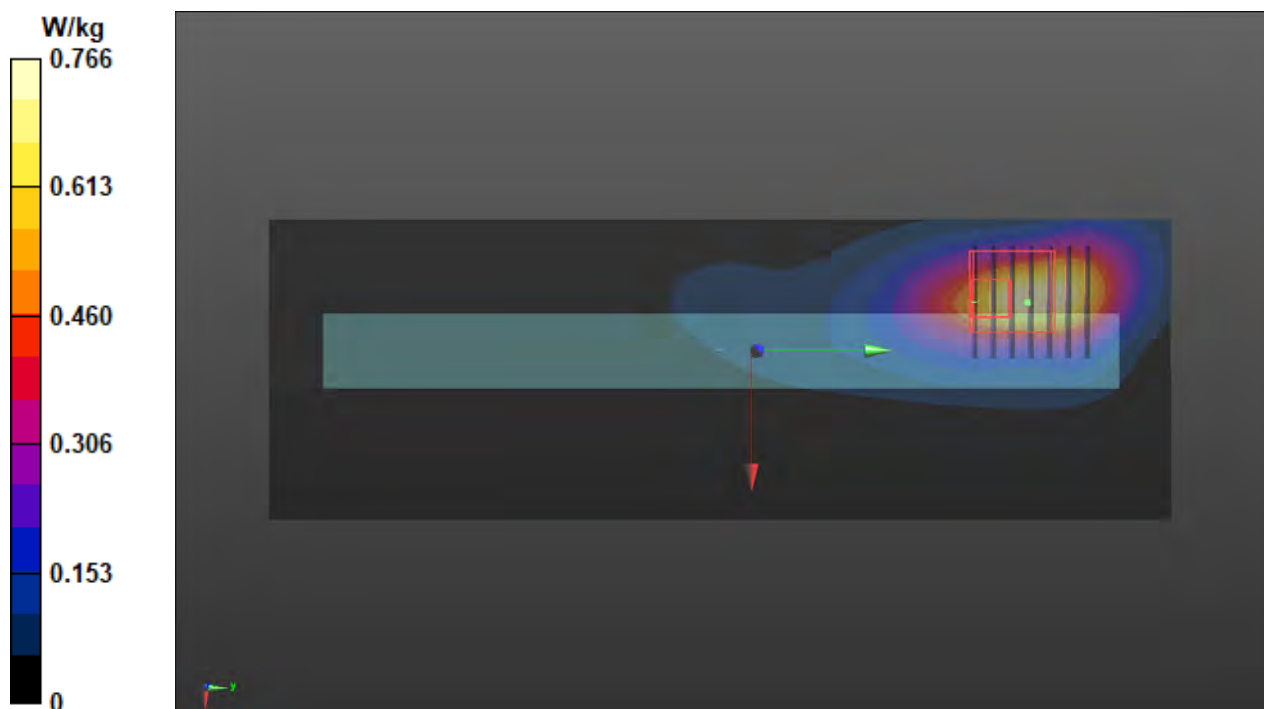

P10 LTE 12_QPSK10M_Rear Face_0mm_Ch23060_1RB_OS0_Ant 0_P-Sensor_w

DUT: P21080878

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 704 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0921 Medium parameters used: $f = 704$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 41.601$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 704 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.424 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.25 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.145 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 0.537 W/kg

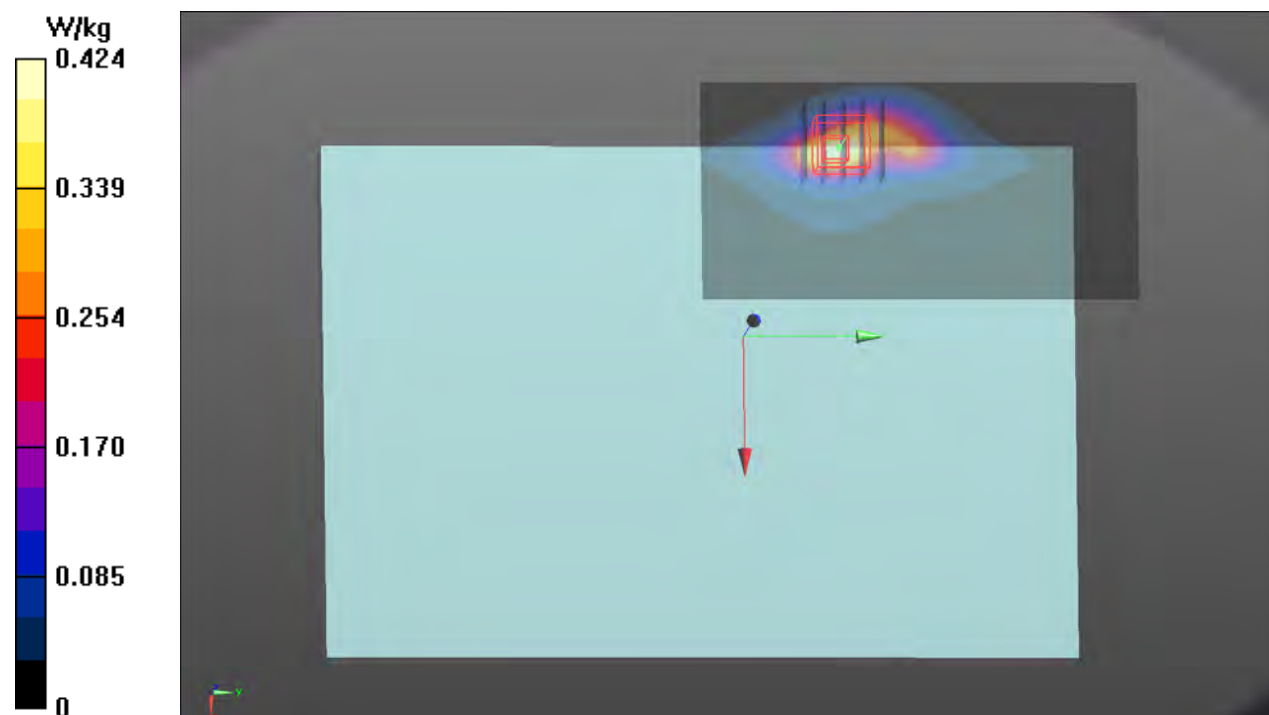

**P11 LTE 13_QPSK10M_Rear Face_0mm_Ch23230_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 782 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0921 Medium parameters used: $f = 782$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.383$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 782 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.341 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.08 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.117 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41.6%

Maximum value of SAR (measured) = 0.438 W/kg

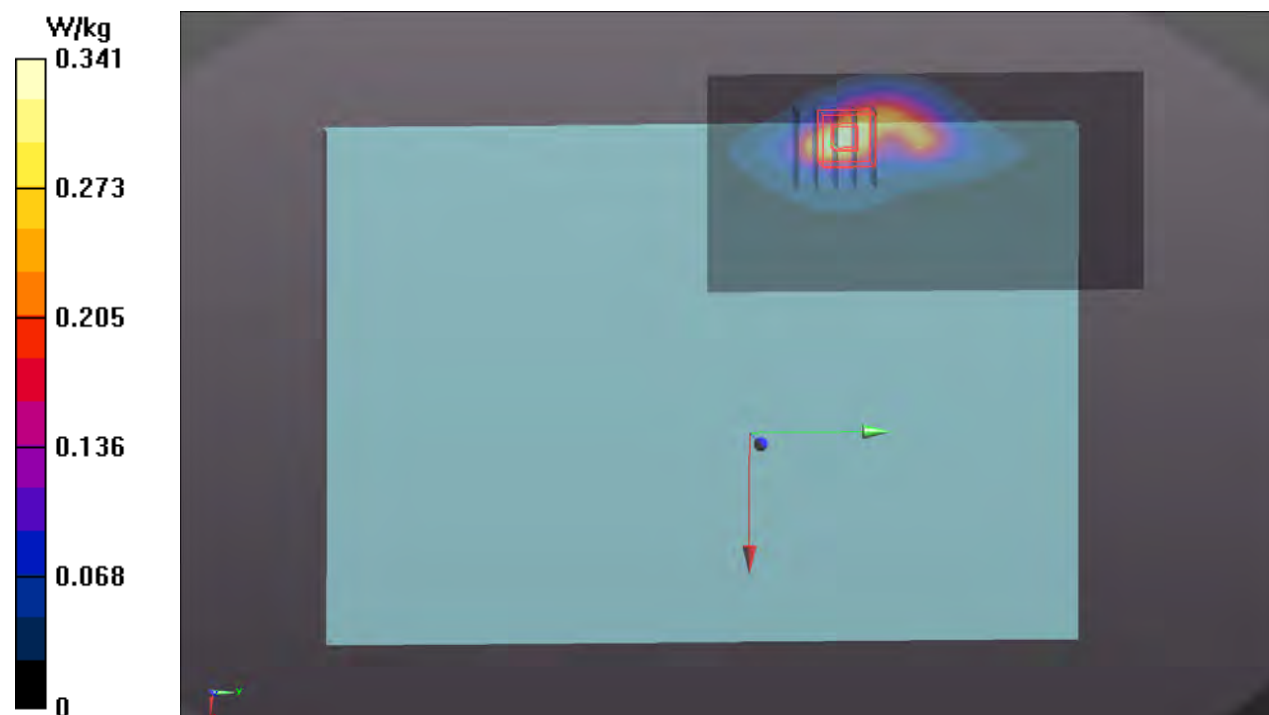

**P12 LTE 14_QPSK10M_Rear Face_0mm_Ch23330_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 793 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0921 Medium parameters used: $f = 793$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.347$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 793 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.392 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.56 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.138 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 0.535 W/kg

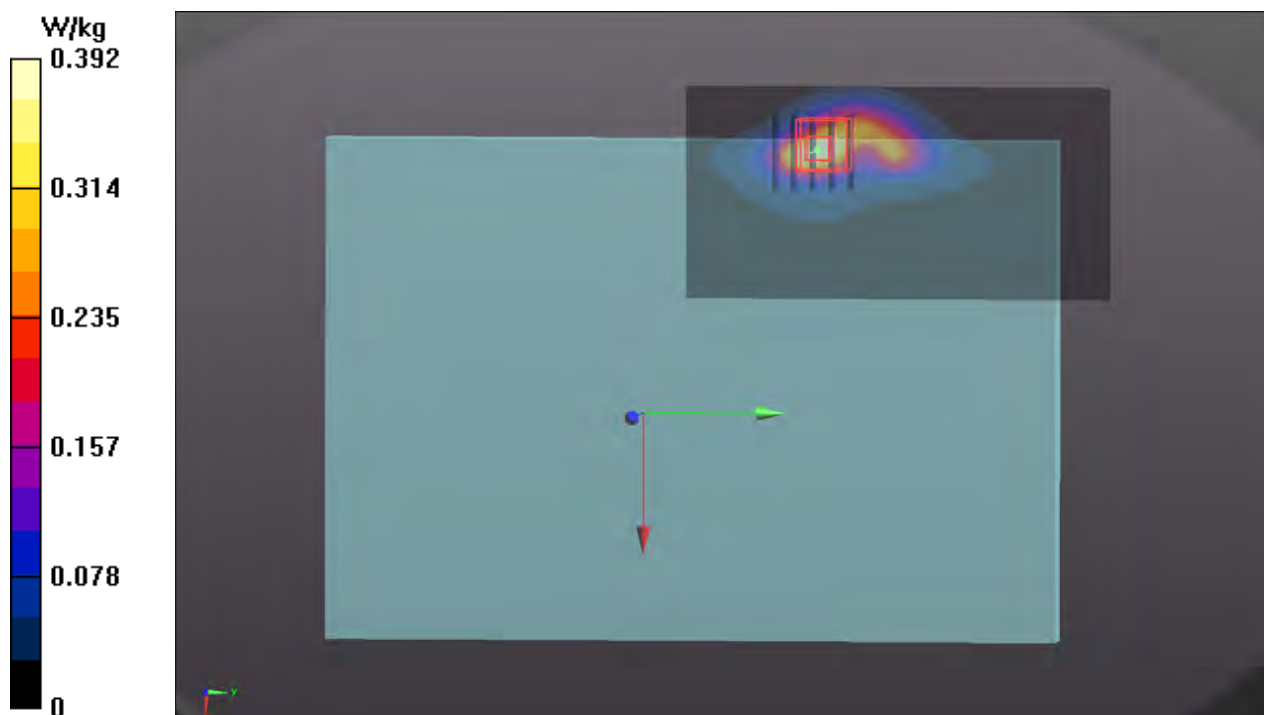

**P13 LTE 17_QPSK10M_Rear Face_0mm_Ch23800_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 711 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0921 Medium parameters used: $f = 711$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 41.593$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 711 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.418 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.93 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.142 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 0.521 W/kg

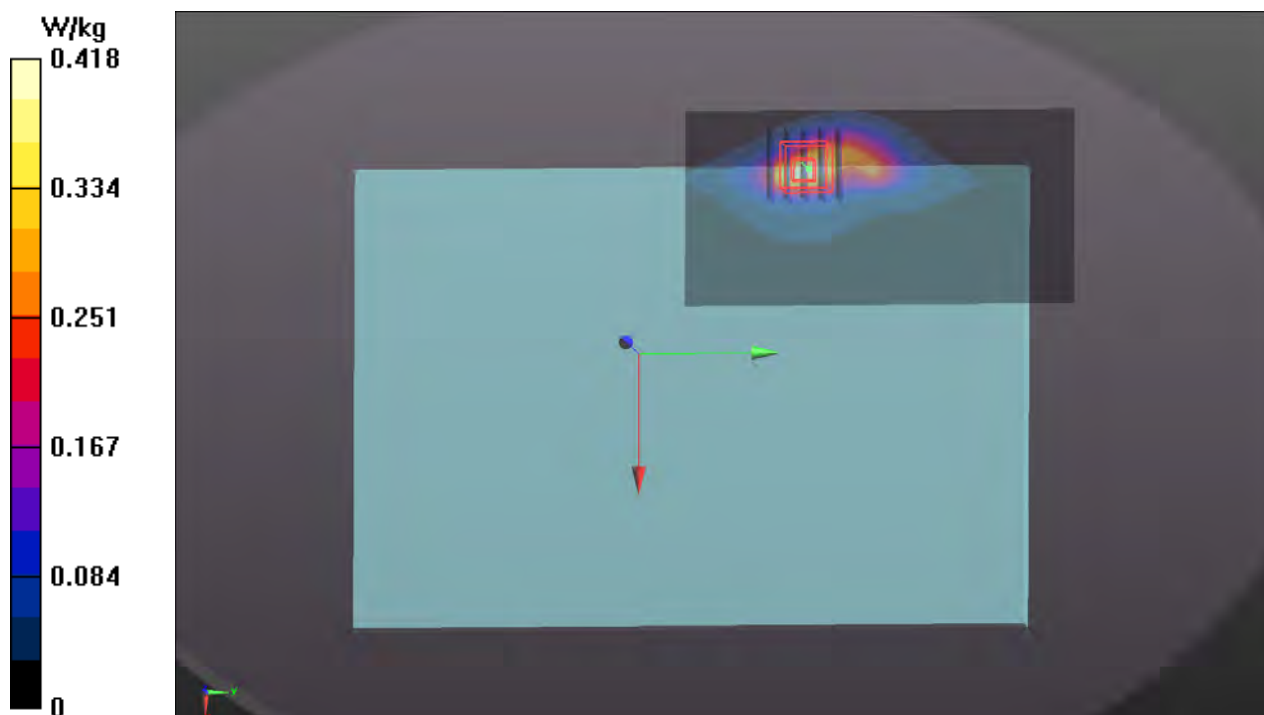

**P14 LTE 25_QPSK20M_Rear Face_0mm_Ch26365_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1882.5 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0921 Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 38.776$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1882.5 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.591 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.70 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.138 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 39.4%

Maximum value of SAR (measured) = 0.724 W/kg

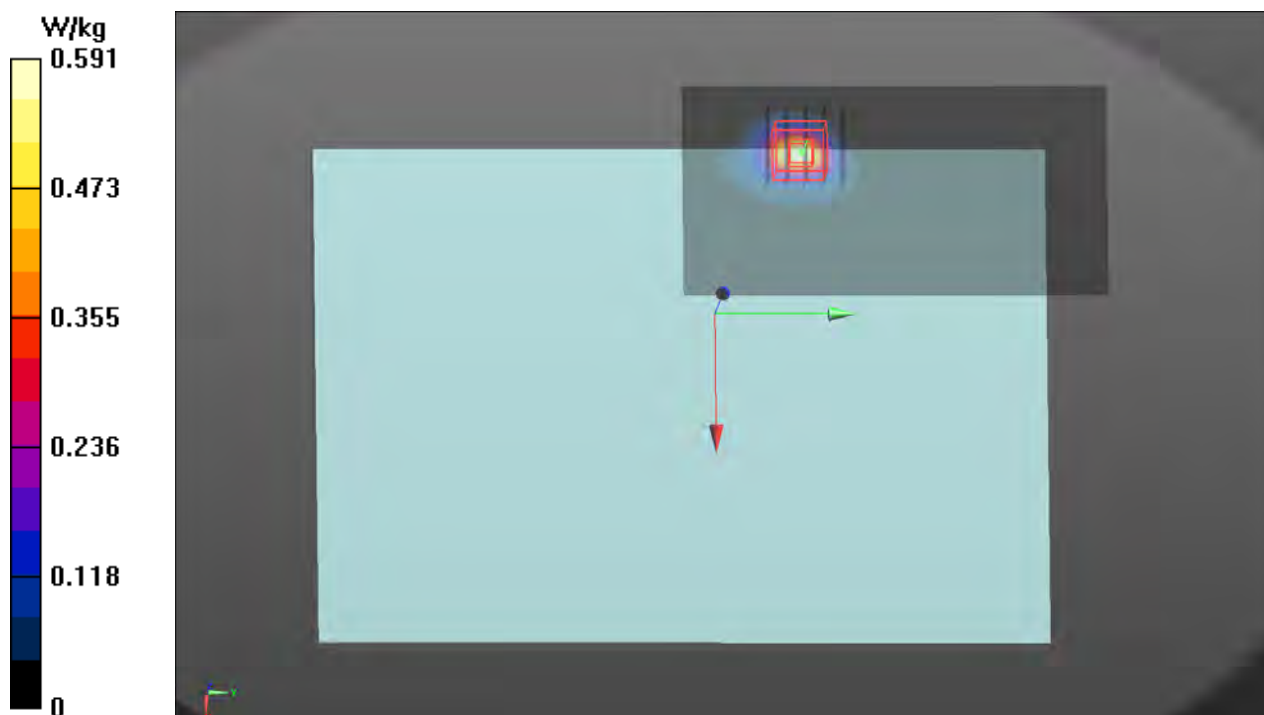

**P15 LTE 26_QPSK15M_Rear Face_0mm_Ch26965_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK);
Frequency: 841.5 MHz; Duty Cycle: 1:3.74

Medium: H07T10N1_0921 Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.936$ S/m;
 $\epsilon_r = 40.287$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 841.5 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.450 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.81 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.157 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 0.609 W/kg

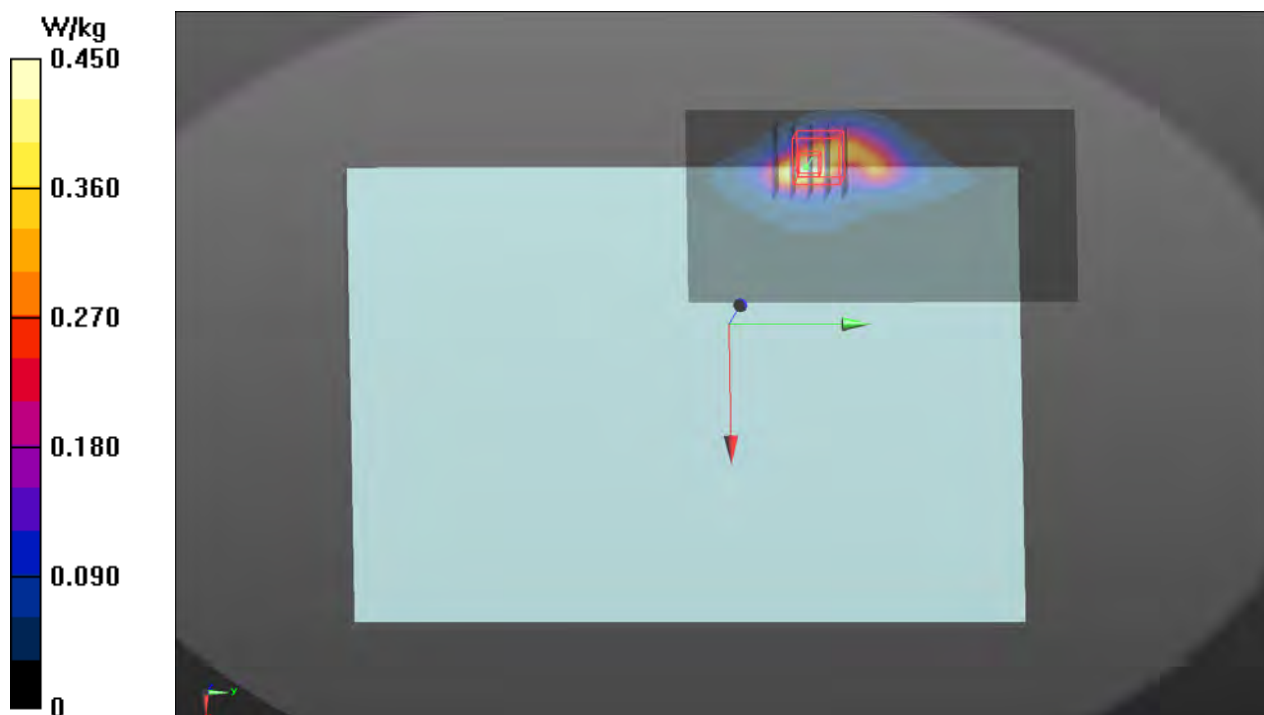

**P16 LTE 30_QPSK10M_Rear Face_0mm_Ch27710_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);
Frequency: 2310 MHz; Duty Cycle: 1:3.74

Medium: H19T27N2_0921 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.688$ S/m; $\epsilon_r = 38.093$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.13, 8.13, 8.13) @ 2310 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.525 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.78 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.116 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 38.4%

Maximum value of SAR (measured) = 0.651 W/kg

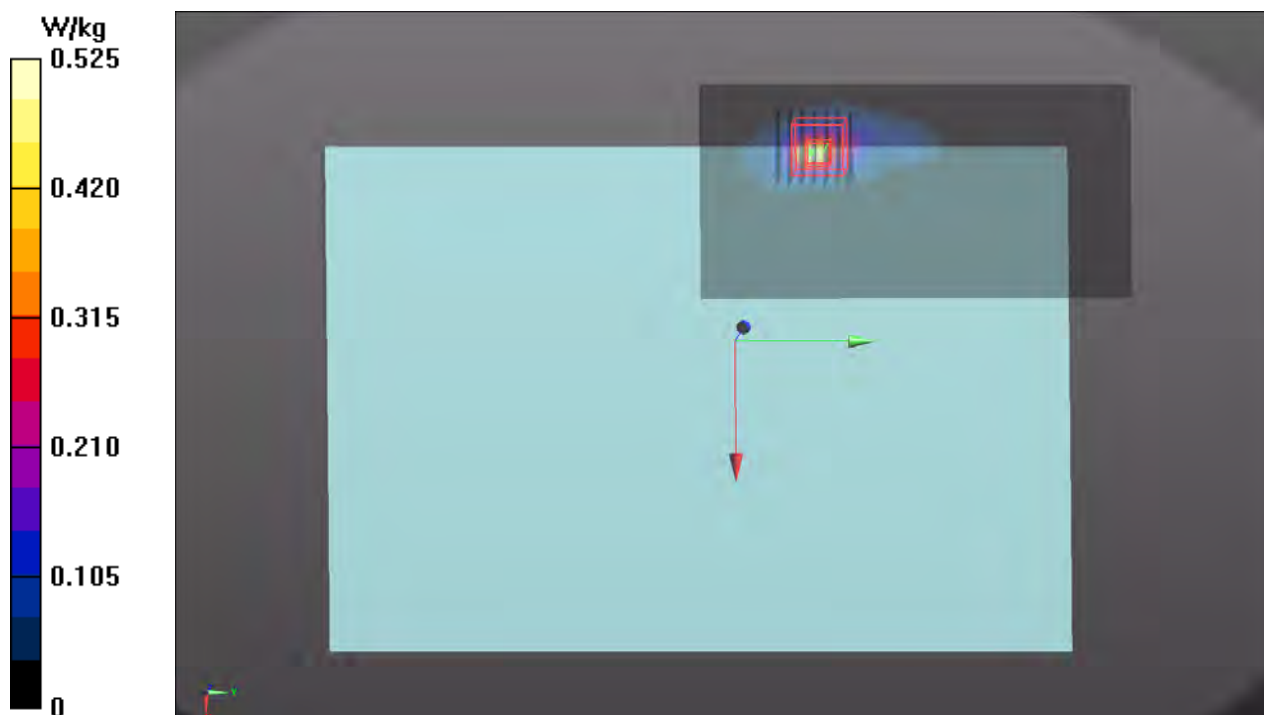

**P17 LTE 38_QPSK20M_Bottom Side_16mm_Ch37850_1RB_OS0_Ant
0_P-Sensor_w_o****DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2580 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0924 Medium parameters used: $f = 2580$ MHz; $\sigma = 1.988$ S/m; $\epsilon_r = 37.93$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2580 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x301x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.458 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.43 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.182 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.591 W/kg

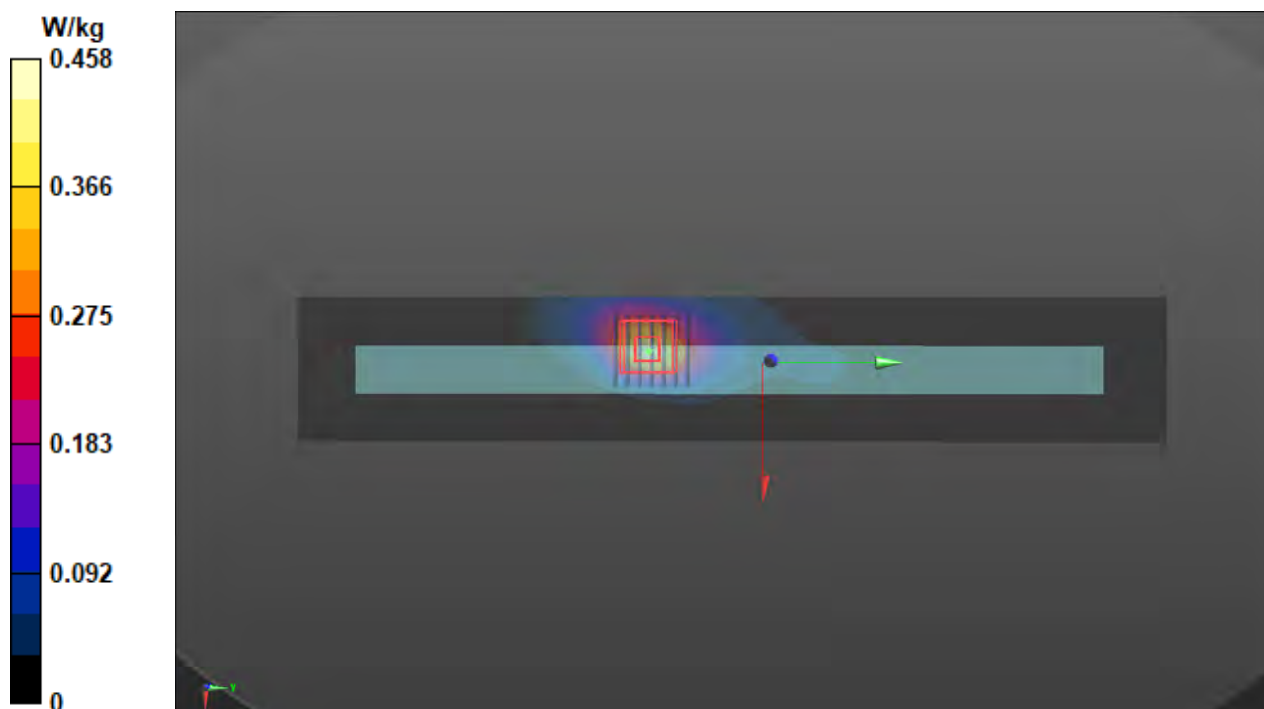

**P18 LTE 41_QPSK20M_Bottom Side_16mm_Ch40185_1RB_OS0_Ant
0_P-Sensor_w_o****DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 2549.5 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0924 Medium parameters used: $f = 2550$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 38.045$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2549.5 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x291x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.573 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.68 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.297 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 1.05 W/kg

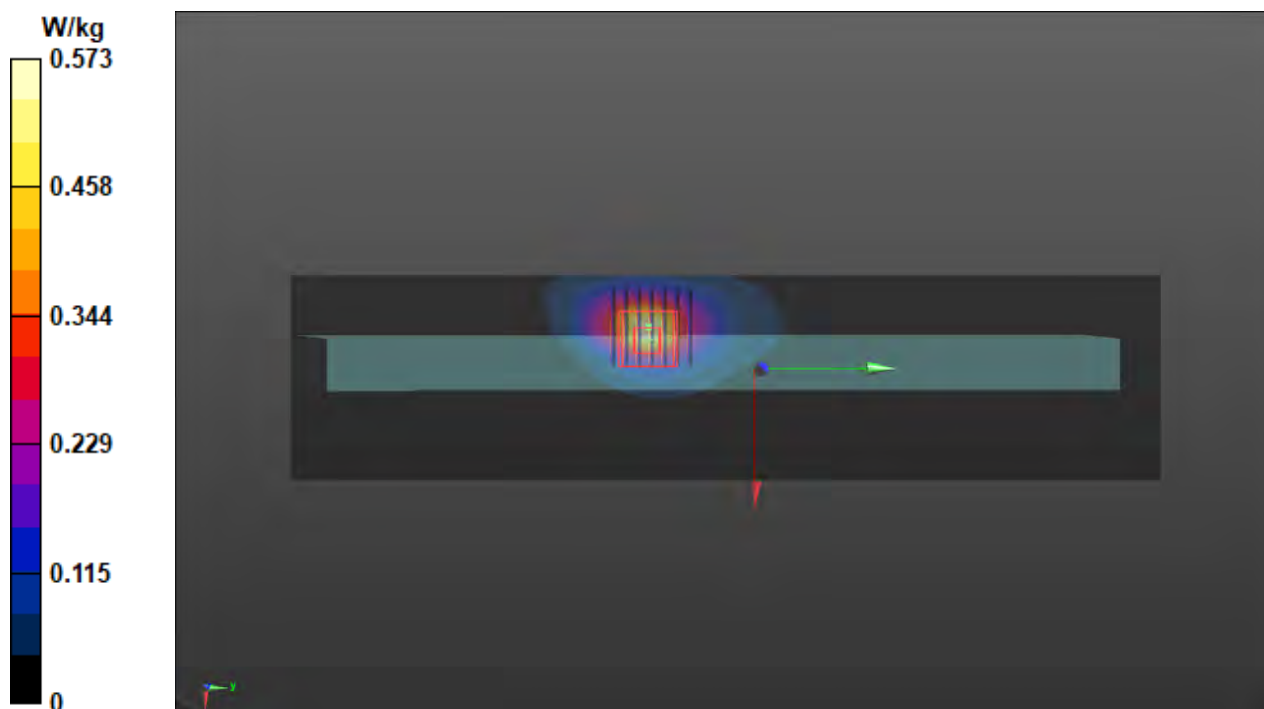

**P19 LTE 42_QPSK20M_Left Side_0mm_Ch43340_1RB_OS0_Ant
2_P-Sensor_w****DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 3575 MHz; Duty Cycle: 1:8.33

Medium: H34T38N1_0922 Medium parameters used: $f = 3575$ MHz; $\sigma = 2.874$ S/m; $\epsilon_r = 37.966$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.17, 7.17, 7.17) @ 3575 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.263 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 6.734 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.063 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.674 W/kg

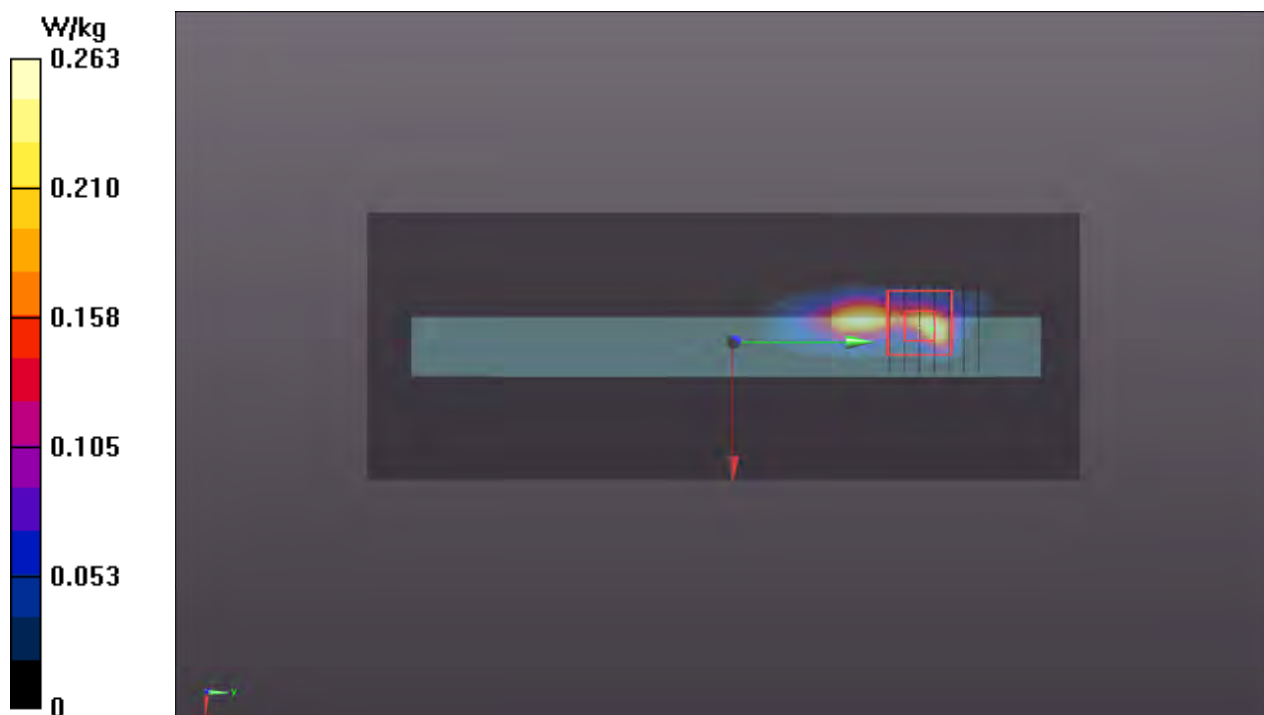

**P20 LTE 48_QPSK20M_Left Side_0mm_Ch56640_1RB_OS0_Ant
2_P-Sensor_w****DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 3690 MHz; Duty Cycle: 1:8.33

Medium: H34T38N1_0922 Medium parameters used: $f = 3690$ MHz; $\sigma = 3.039$ S/m; $\epsilon_r = 37.648$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.12, 7.12, 7.12) @ 3690 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.281 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 6.570 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.064 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 0.679 W/kg

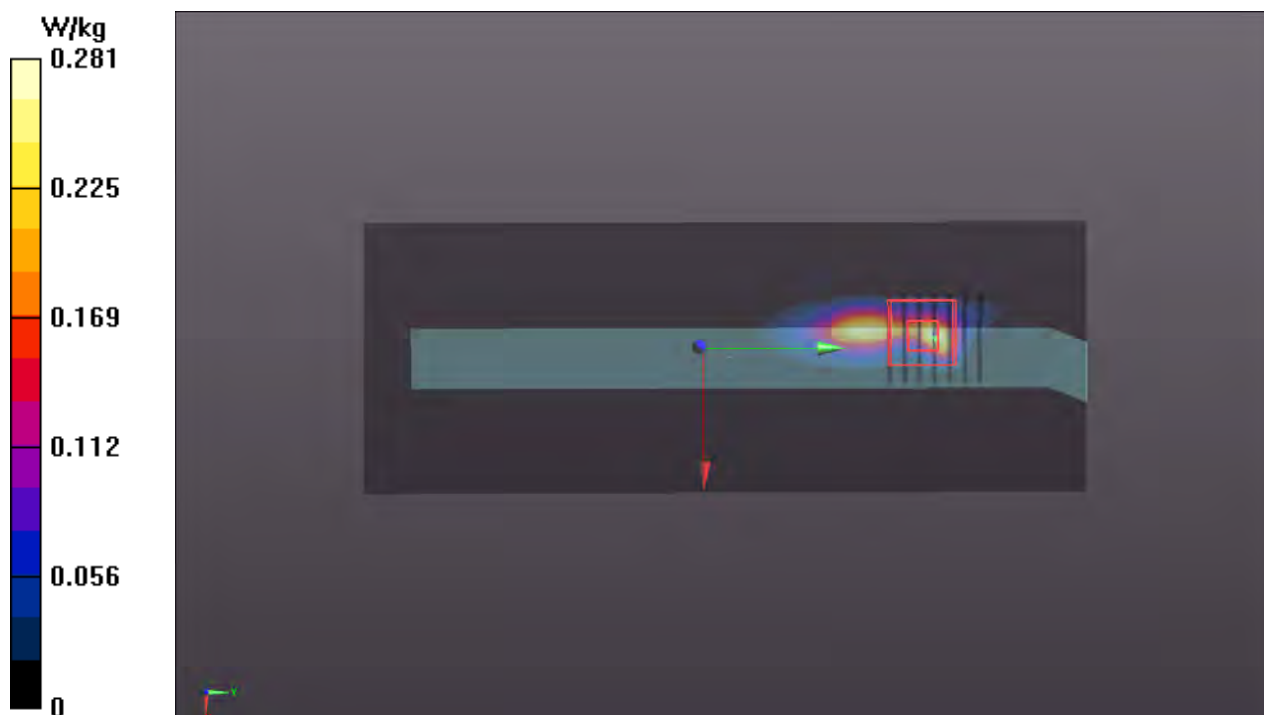

**P21 LTE 66_QPSK20M_Rear Face_0mm_Ch132072_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1720 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0921 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.356$ S/m; $\epsilon_r = 39.092$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1720 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.429 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.30 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.106 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 39.3%

Maximum value of SAR (measured) = 0.535 W/kg

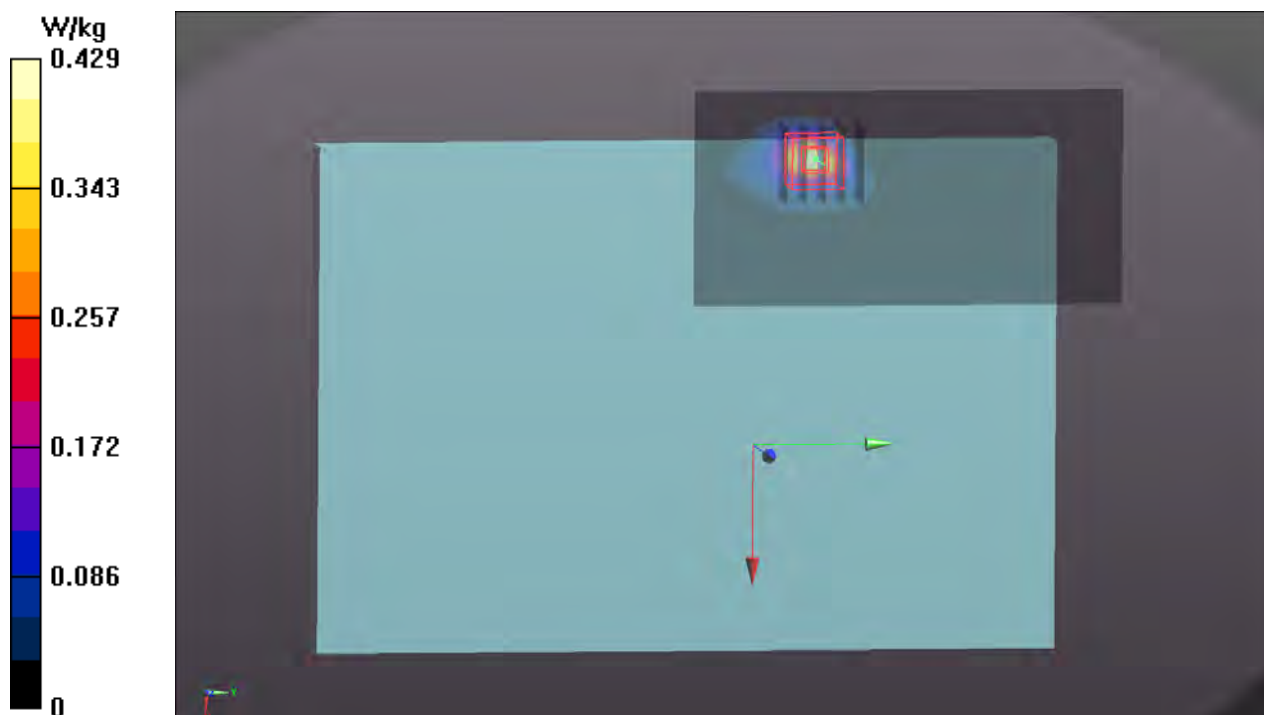

**P22 LTE 66_QPSK20M_Left Side_0mm_Ch132072_1RB_OS0_Ant
2_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1720 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0923 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.104$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1720 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x161x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.358 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.69 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.553 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.093 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 39.2%

Maximum value of SAR (measured) = 0.409 W/kg

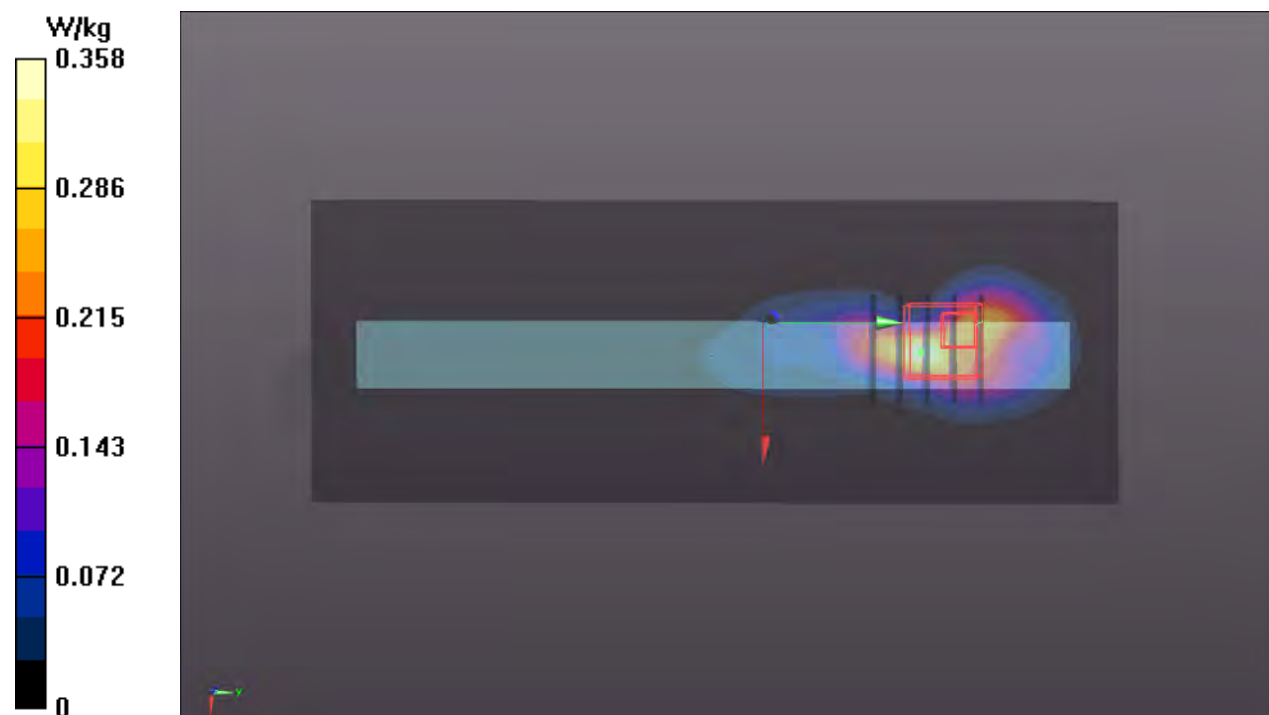

**P23 5GNR-n2_DFT-S_15KHz QPSK20M_Rear
Face_0mm_Ch372000_1RB_OS1_Sample1_Ant 0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1860 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0922 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 38.889$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1860 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.560 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.86 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.145 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41.3%

Maximum value of SAR (measured) = 0.658 W/kg

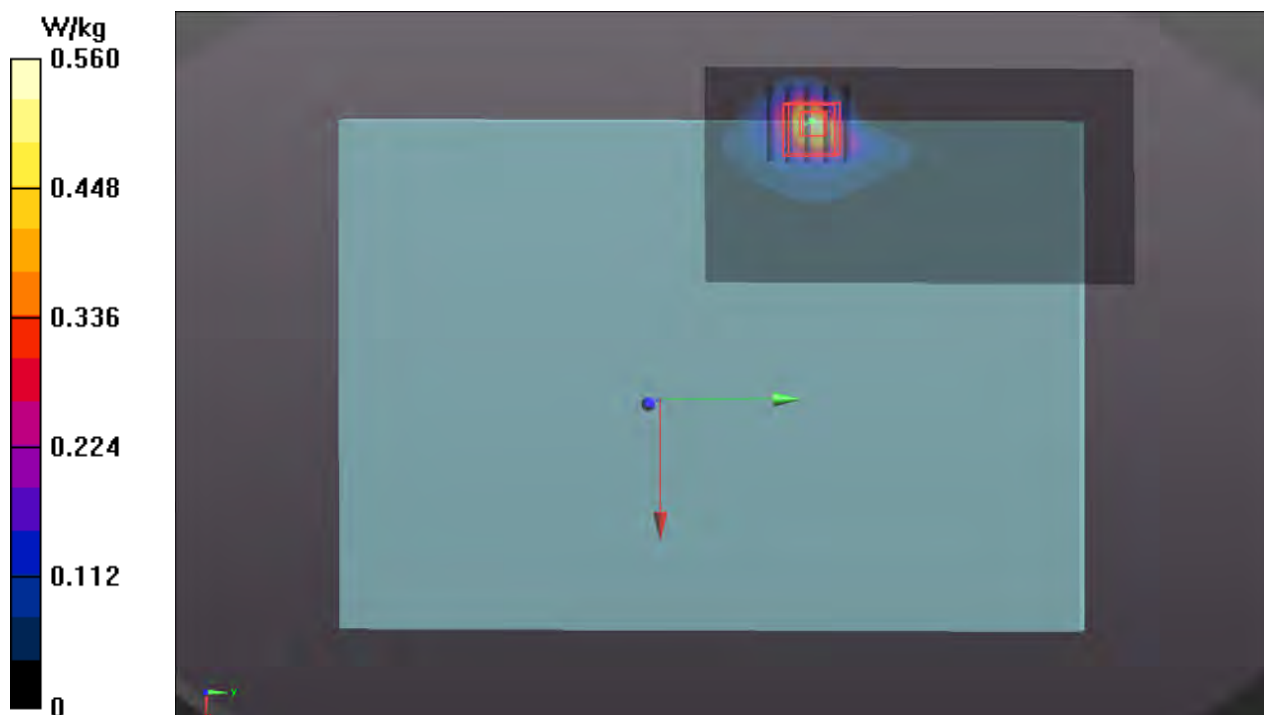

**P24 5GNR-n2_DFT-S_15KHz QPSK20M_Left
Side_0mm_Ch380000_1RB_OS1_Sample1_Ant 2_P-Sensor_w**

DUT: P21080878

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1900 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0922 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 38.853$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x161x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.652 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.79 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.178 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 40.7%

Maximum value of SAR (measured) = 0.823 W/kg

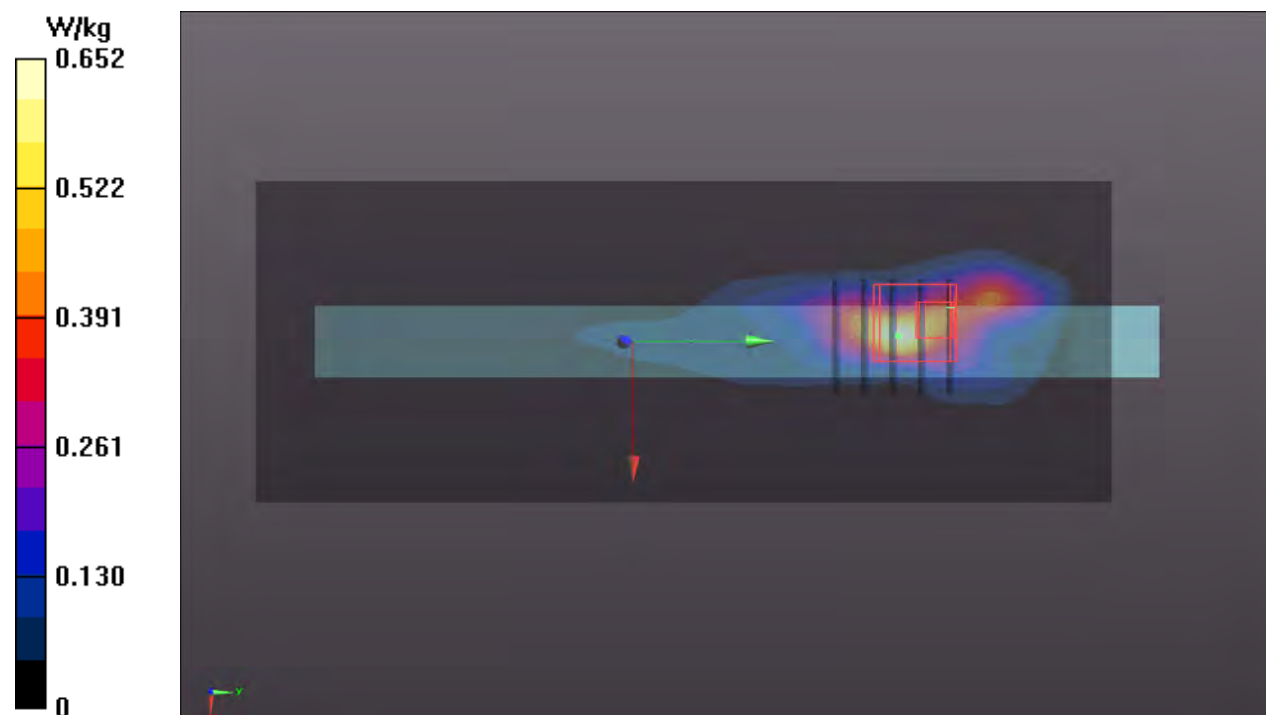

**P25 5GNR-n5_DFT-S_15KHz QPSK20M_Rear
Face_0mm_Ch167300_1RB_OS1_Sample1_Ant 0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 836.5 MHz; Duty Cycle: 1:3.56

Medium: H07T10N1_0922 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.919$ S/m;

$\epsilon_r = 41.527$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.05, 10.05, 10.05) @ 836.5 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.399 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.54 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.117 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.420 W/kg

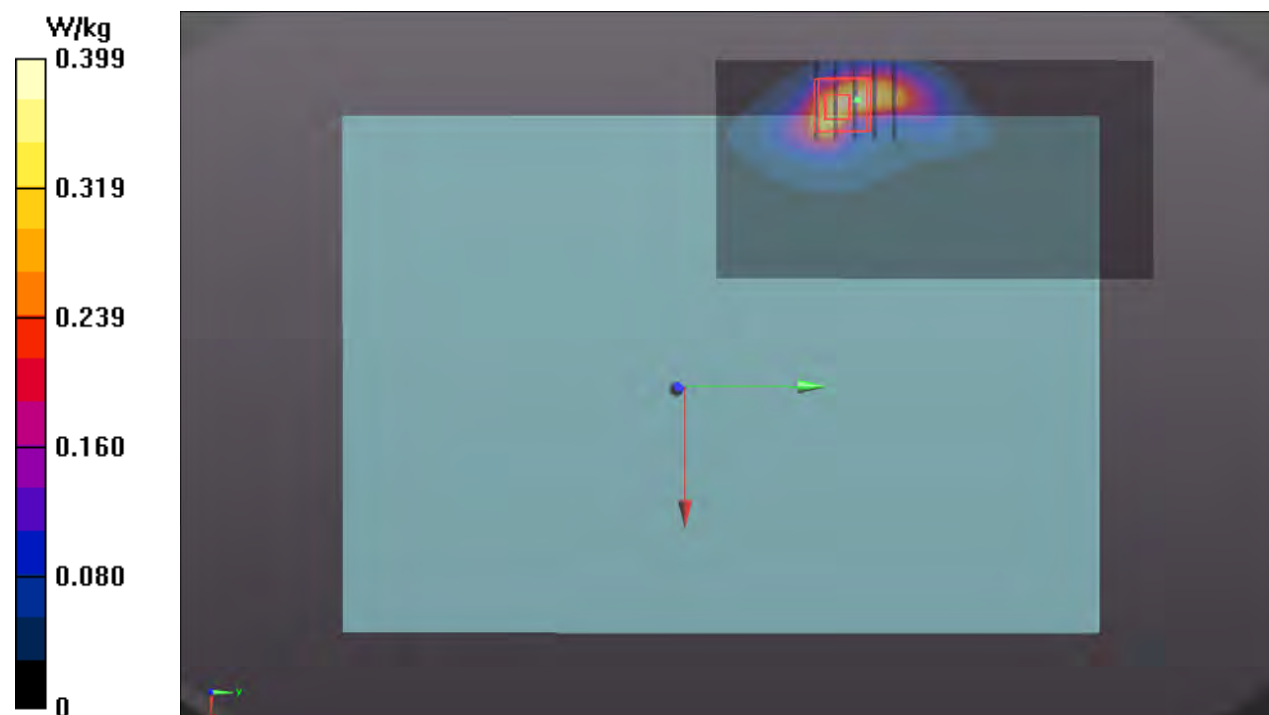

**P26 5GNR-n7_DFT-S_15KHz QPSK20M_Left
Side_0mm_Ch512000_1RB_OS1_Sample1_Ant 2_P-Sensor_w**

DUT: P21080878

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 2560 MHz; Duty Cycle: 1:3.56

Medium: H19T27N1_0923 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 37.71$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.58, 7.58, 7.58) @ 2560 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x201x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.899 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.83 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.196 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 31.7%

Maximum value of SAR (measured) = 1.11 W/kg

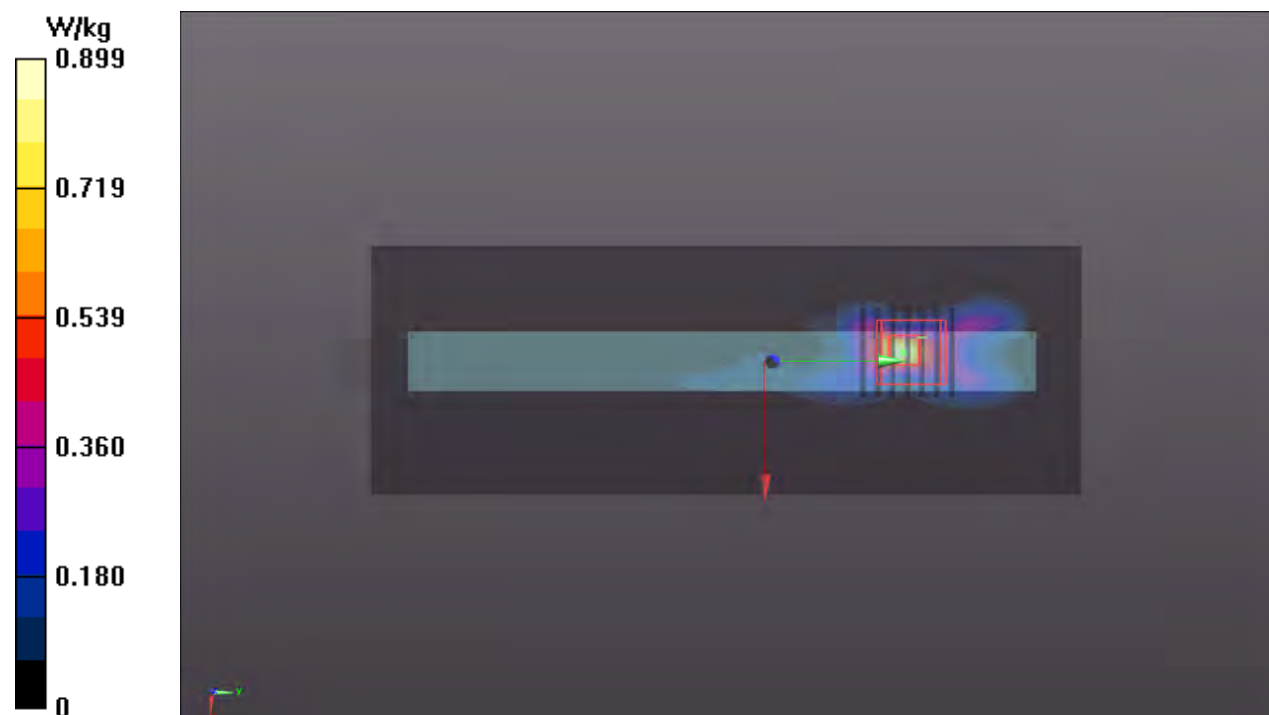

**P27 5GNR-n12_DFT-S_15KHz QPSK15M_Rear
Face_0mm_Ch141300_1RB_OS1_Sample1_Ant 0_P-Sensor_w****DUT: P21080878**


Communication System: UID 10930 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz); Frequency: 706.5 MHz; Duty Cycle: 1:3.56
Medium: H06T09N1_0923 Medium parameters used (interpolated): $f = 706.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.586$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(10.32, 10.32, 10.32) @ 706.5 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.354 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.94 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.454 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.099 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below = 9.1 mm
Ratio of SAR at M2 to SAR at M1 = 44.3%
Maximum value of SAR (measured) = 0.352 W/kg

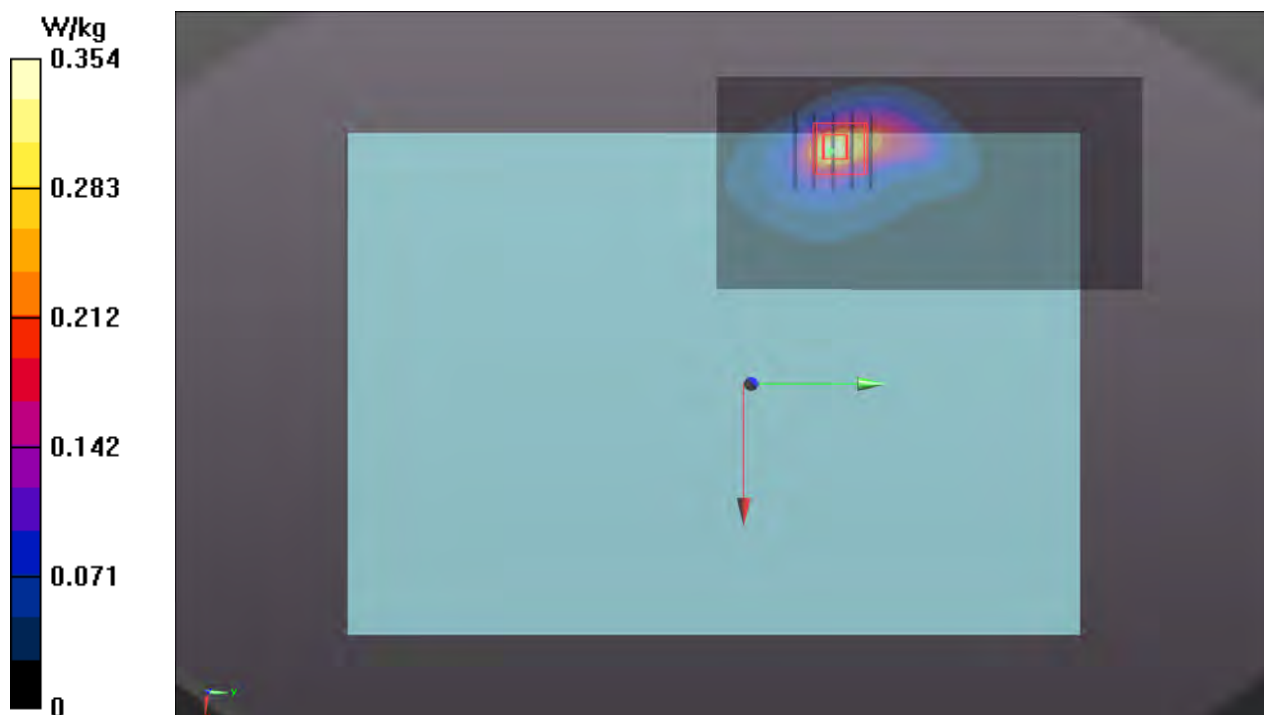

**P28 5GNR-n41_DFT-S_30KHz QPSK100M_Left
Side_0mm_Ch518598_1RB_OS1_Sample1_Ant 2_P-Sensor_w**

DUT: P21080878

Communication System: UID 10866 - AAD, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz); Frequency: 2592.99 MHz; Duty Cycle: 1:3.7

Medium: H19T27N1_0923 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 37.885$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(7.58, 7.58, 7.58) @ 2592.99 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.628 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.92 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.185 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.937 W/kg

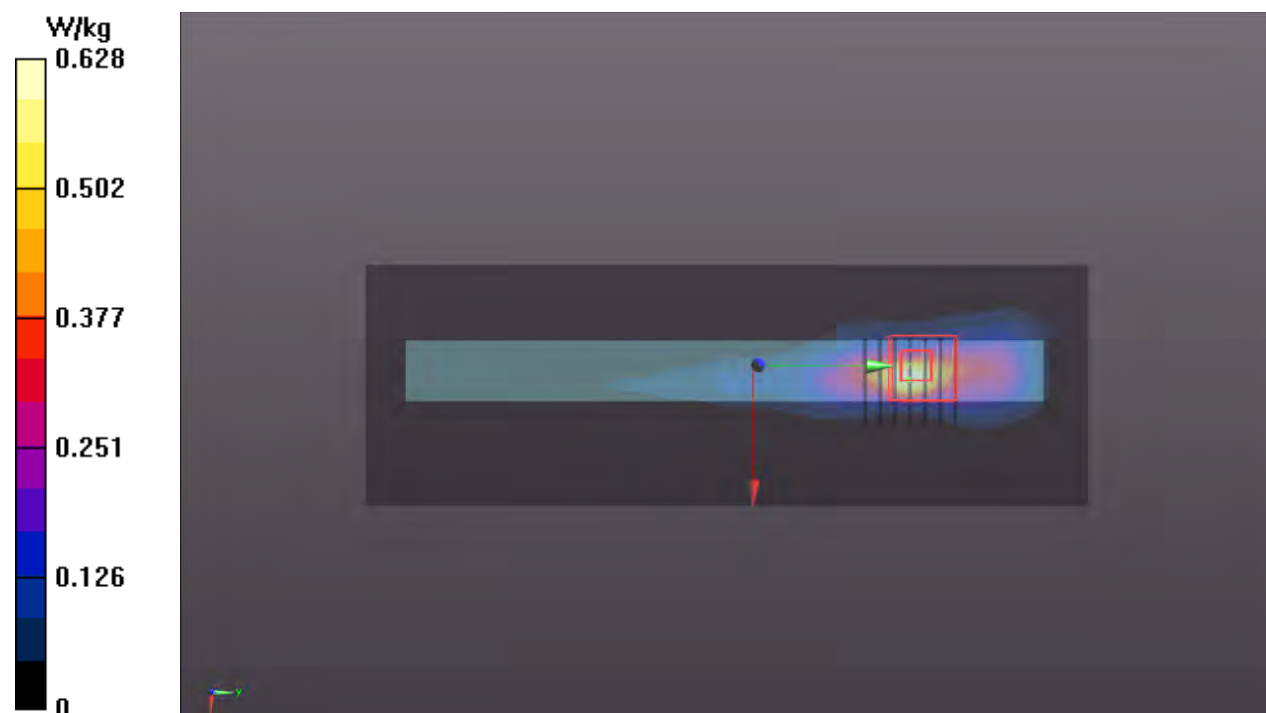

**P29 5GNR-n66_DFT-S_15KHz QPSK20M_Rear
Face_0mm_Ch354000_1RB_OS1_Sample1_Ant 0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1770 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0922 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 39.078$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1770 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.497 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.88 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.130 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 0.581 W/kg

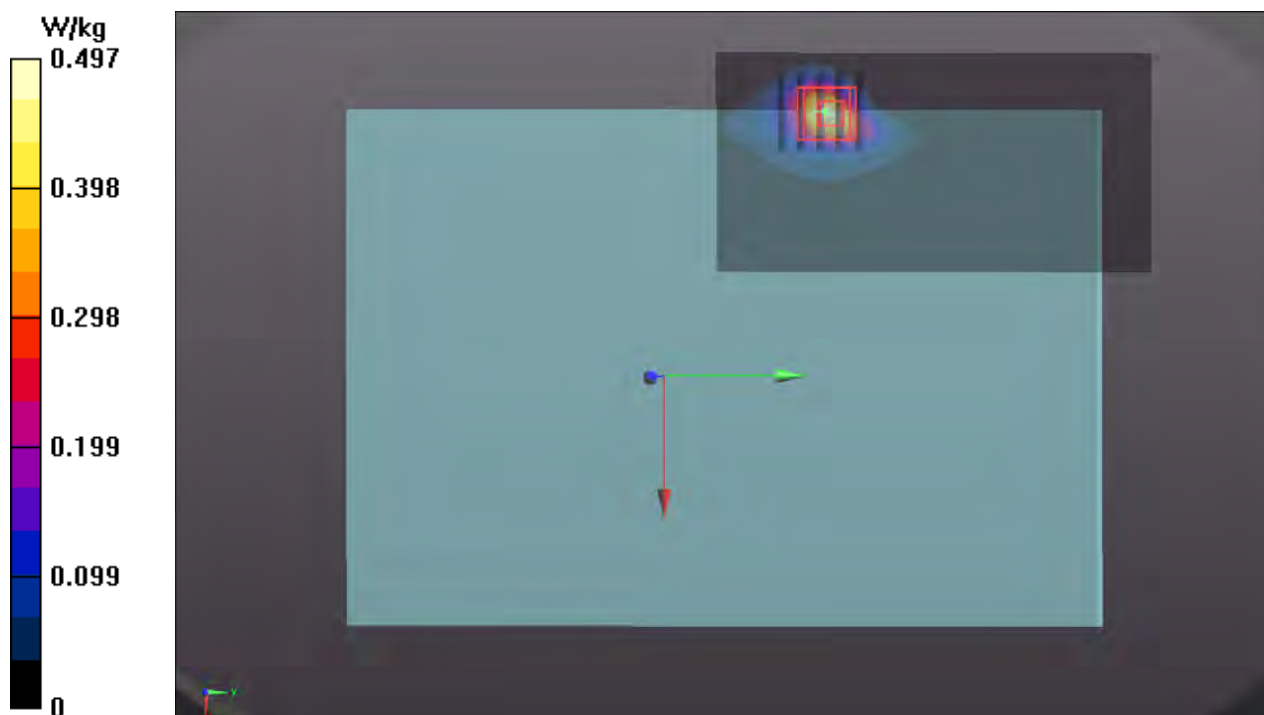

**P30 5GNR-n66_DFT-S_15KHz QPSK20M_Left
Side_0mm_Ch349000_1RB_OS1_Sample1_Ant 2_P-Sensor_w**

DUT: P21080878

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1745 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0922 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.127$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7472; ConvF(8.77, 8.77, 8.77) @ 1745 MHz; Calibrated: 2021/06/03
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1206; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.607 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.29 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.161 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 37.5%

Maximum value of SAR (measured) = 0.991 W/kg

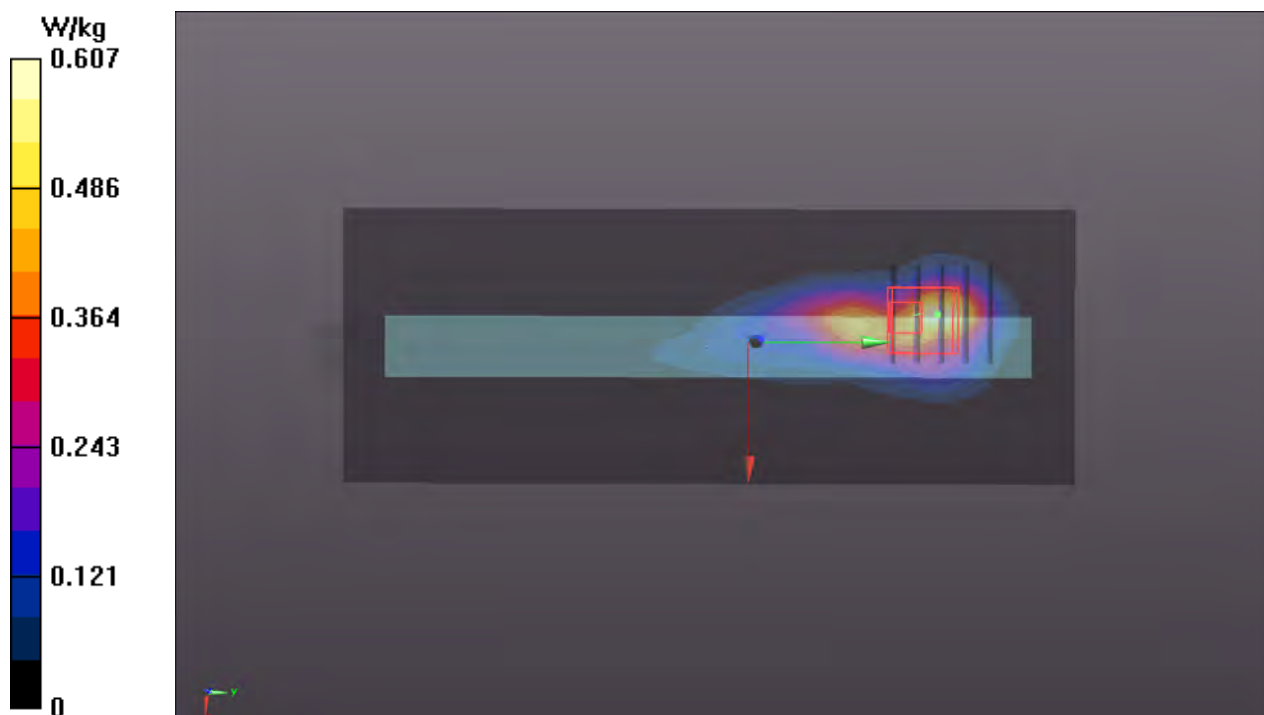

**P31 WLAN2.4G_802.11n HT40_Top Side_0mm_Ch3_Sample 1_Ant
0+1_P-Sensor_w****DUT: P21080878**

Communication System: UID 10599 - AAC, IEEE 802.11n (HT Mixed, 40MHz, MCS0);

Frequency: 2422 MHz; Duty Cycle: 1:1.01

Medium: H19T27N1_0929 Medium parameters used: $f = 2422$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2422 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x271x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.77 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.456 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 1.78 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 26.77 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.443 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 1.63 W/kg

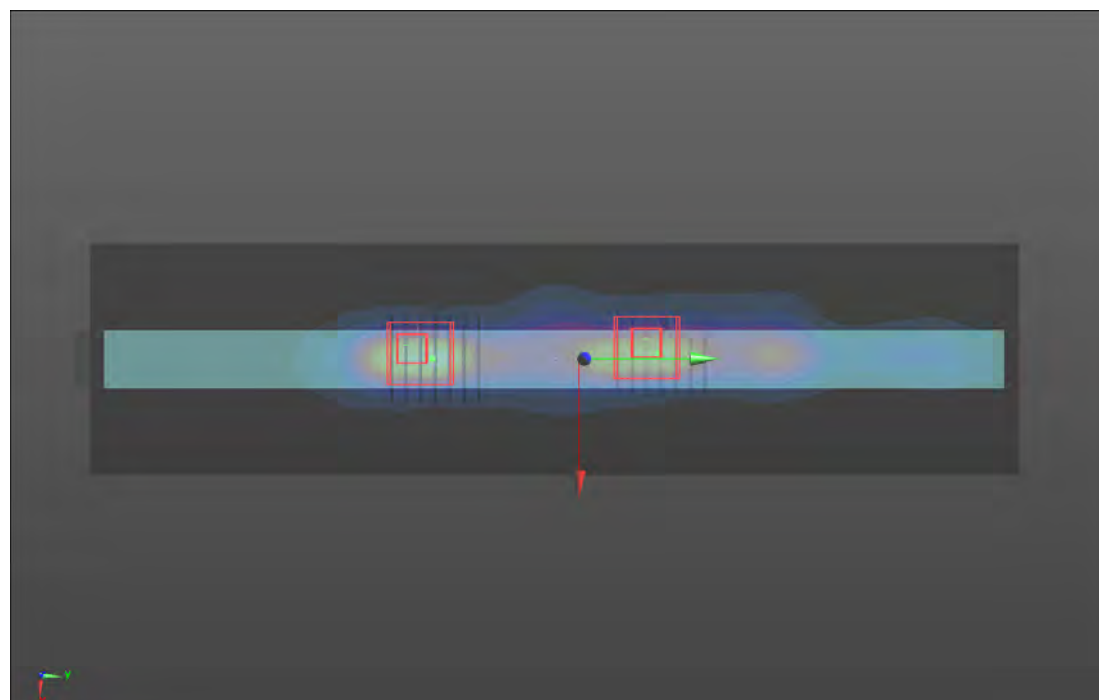

**P32 WLAN5.3G_802.11ac VHT160_Top Side_0mm_Ch50_Sample 1_Ant
1_P-Sensor_w****DUT: P21080878**

Communication System: UID 10554 - AAD, IEEE 802.11ac WiFi (160MHz, MCS0);

Frequency: 5250 MHz; Duty Cycle: 1:1.03

Medium: H34T60N3_0930 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.564$ S/m; $\epsilon_r = 36.045$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x321x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.71 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 18.82 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.294 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.6%

Maximum value of SAR (measured) = 2.10 W/kg

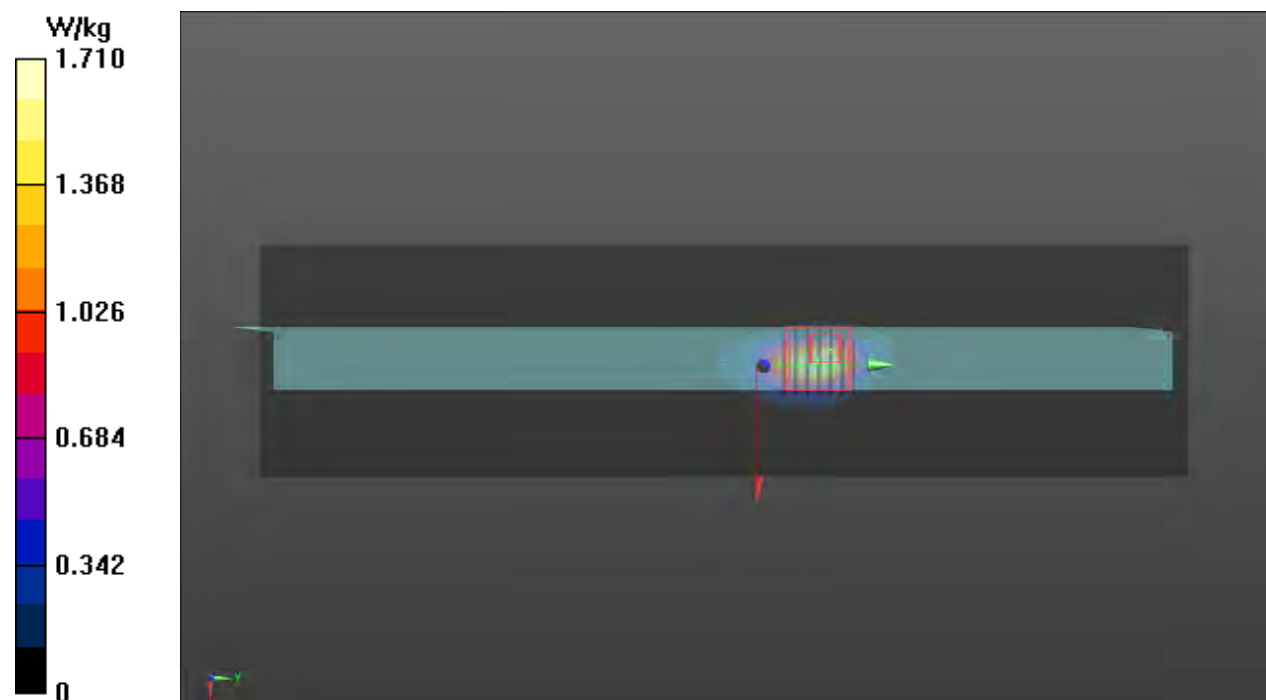

P33 WLAN5.6G_802.11ac VHT80_Top Side_0mm_Ch106_Sample 1_Ant 0+1_P-Sensor_w**DUT: P21080878**

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0);

Frequency: 5530 MHz; Duty Cycle: 1:1.01

Medium: H34T60N3_0930 Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.821$ S/m;

$\epsilon_r = 35.668$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.8, 4.8, 4.8) @ 5530 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x321x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.90 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 20.67 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.331 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 2.48 W/kg

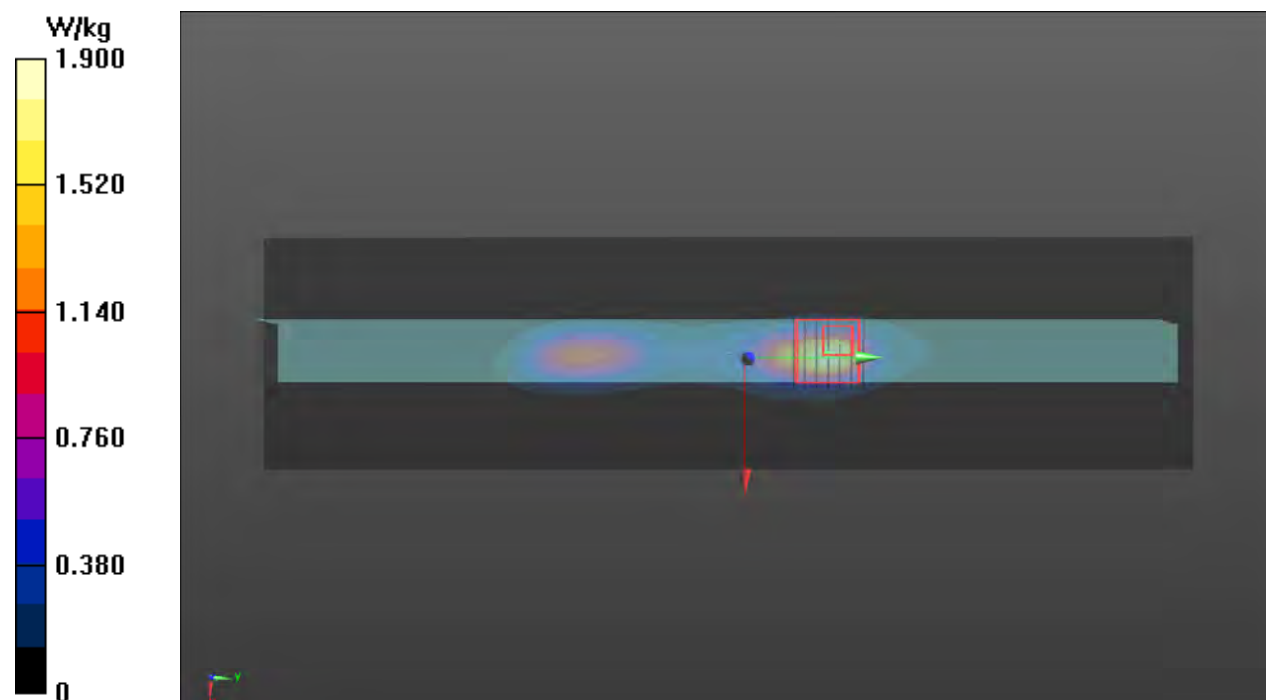

P34 WLAN5.8G_802.11ac VHT80_Top Side_0mm_Ch155_Sample 1_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle);
Frequency: 5775 MHz; Duty Cycle: 1:1.01
Medium: H34T60N1_1002 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 36.899$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.95, 4.95, 4.95) @ 5775 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x321x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.92 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.187 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 1.77 W/kg

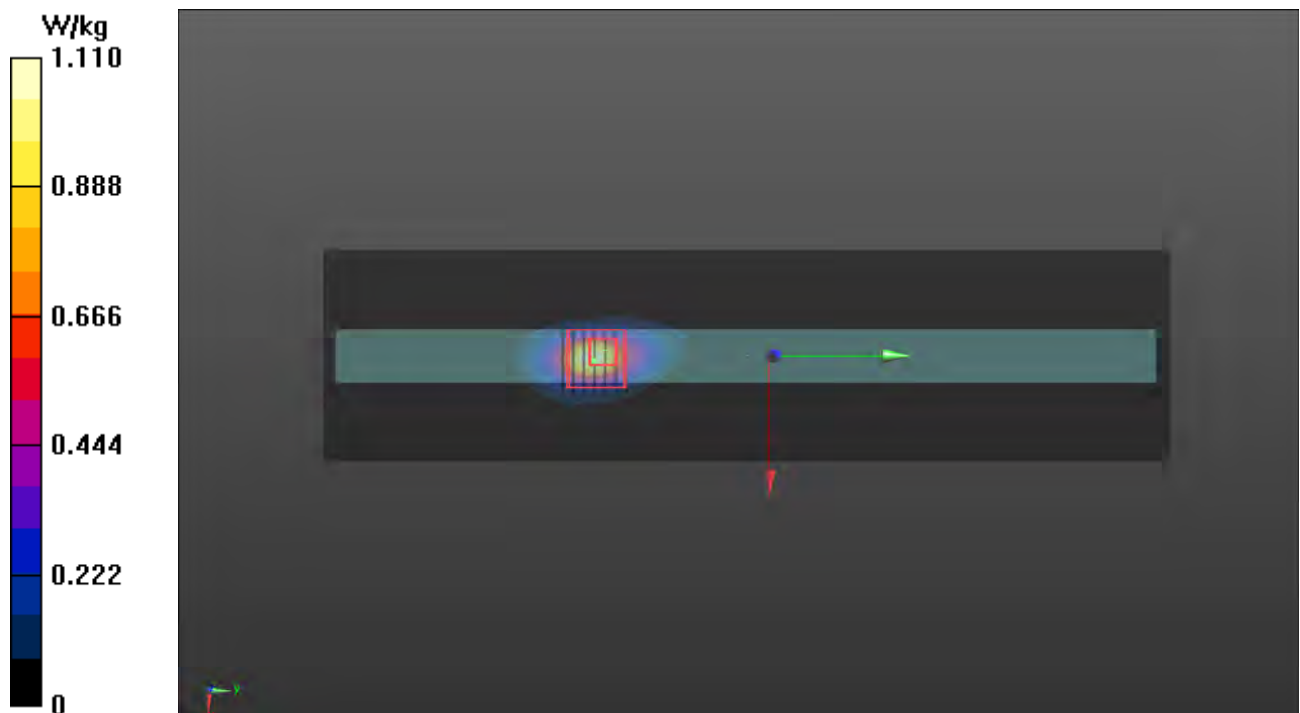

P35 BT_BDR_Top Side_0mm_Ch0_Sample 1_Ant 1**DUT: P21080878**

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.3

Medium: H19T27N1_0929 Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.841$ S/m;

$\epsilon_r = 38.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2402 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x271x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.121 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.701 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.041 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.168 W/kg

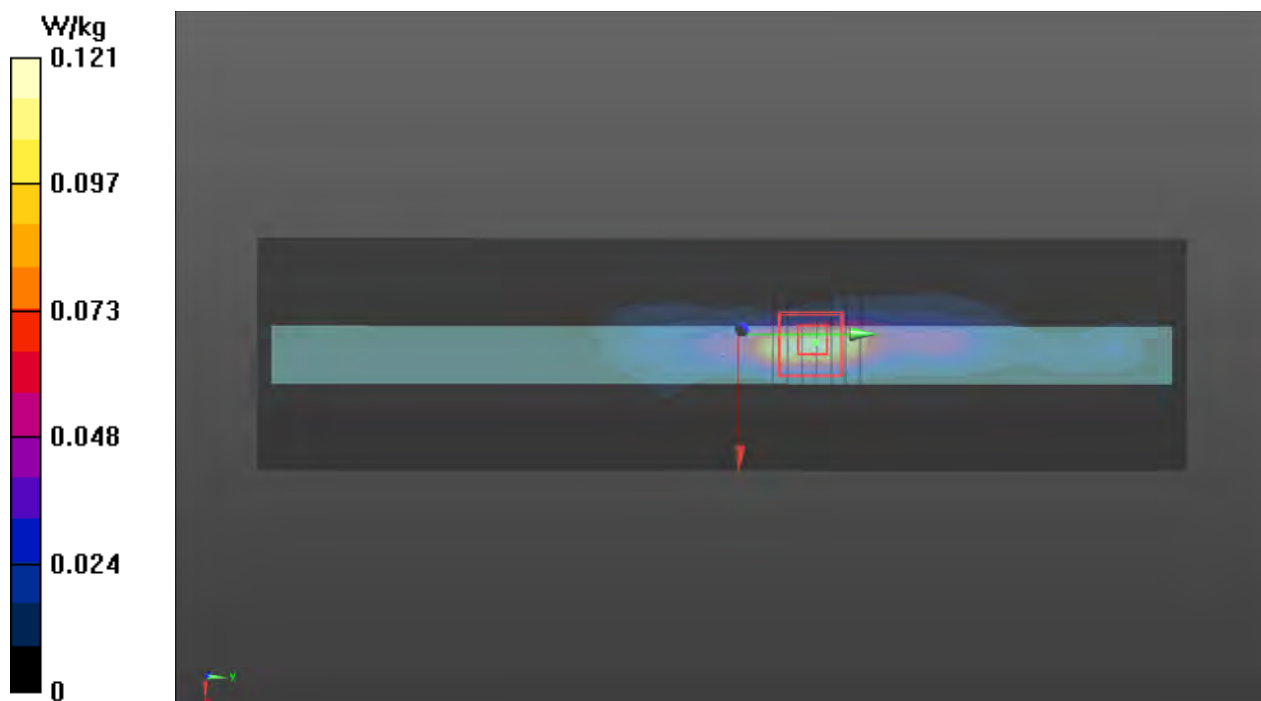

P36 WCDMA II_RMC12.2K_Bottom_0mm_Ch9400_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95

Medium: H16T20N1_0927 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 39.307$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.895 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.62 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.282 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.850 W/kg

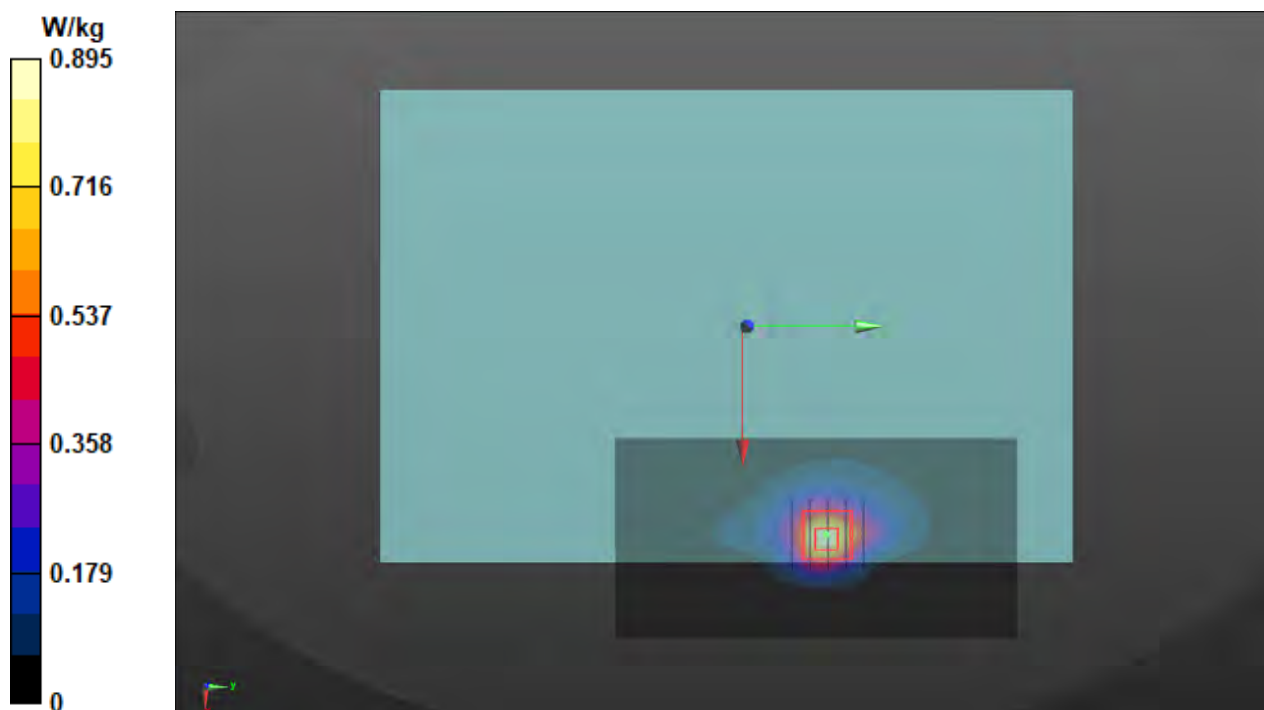

P37 WCDMA IV_RMC12.2K_Bottom_0mm_Ch1312_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1712.4

MHz; Duty Cycle: 1:1.95

Medium: H16T20N1_0927 Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.295$ S/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.55, 8.55, 8.55) @ 1712.4 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.929 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.67 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.330 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.951 W/kg

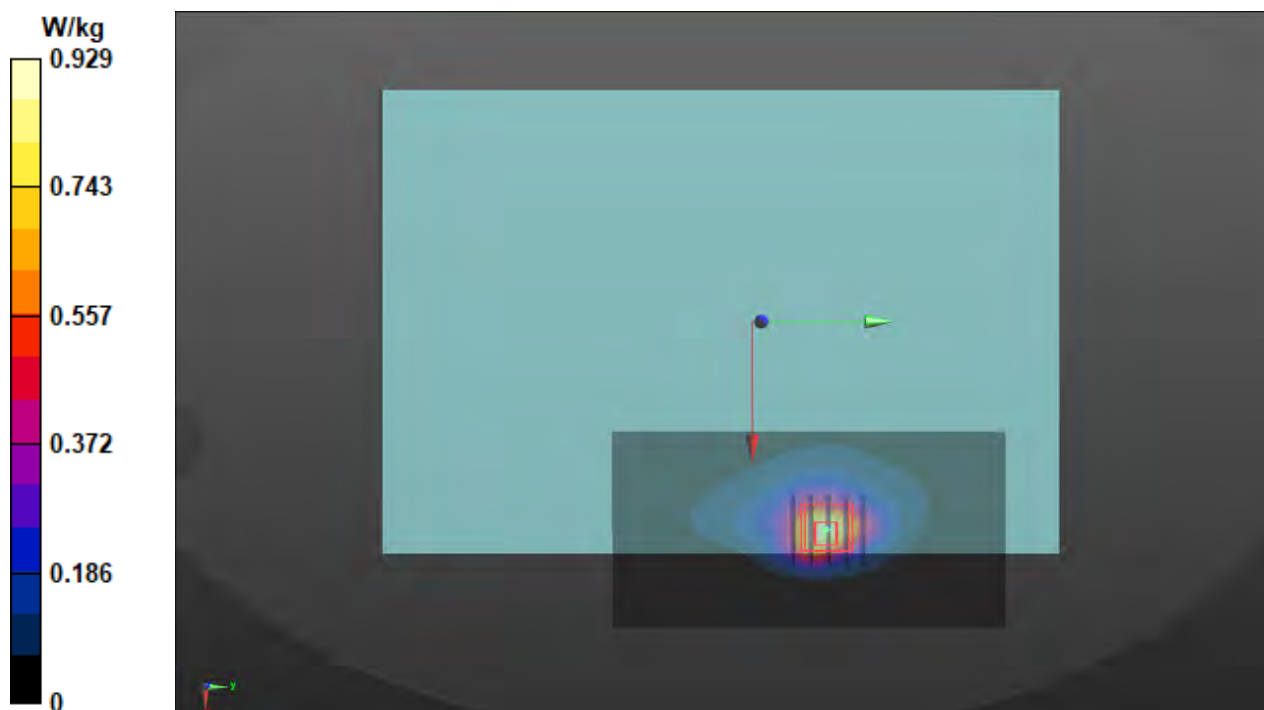

P38 WCDMA V_RMC12.2K_Bottom_0mm_Ch4182_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1.95

Medium: H07T10N1_0927 Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.748$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.5, 10.5, 10.5) @ 836.4 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.794 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.02 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.322 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.934 W/kg

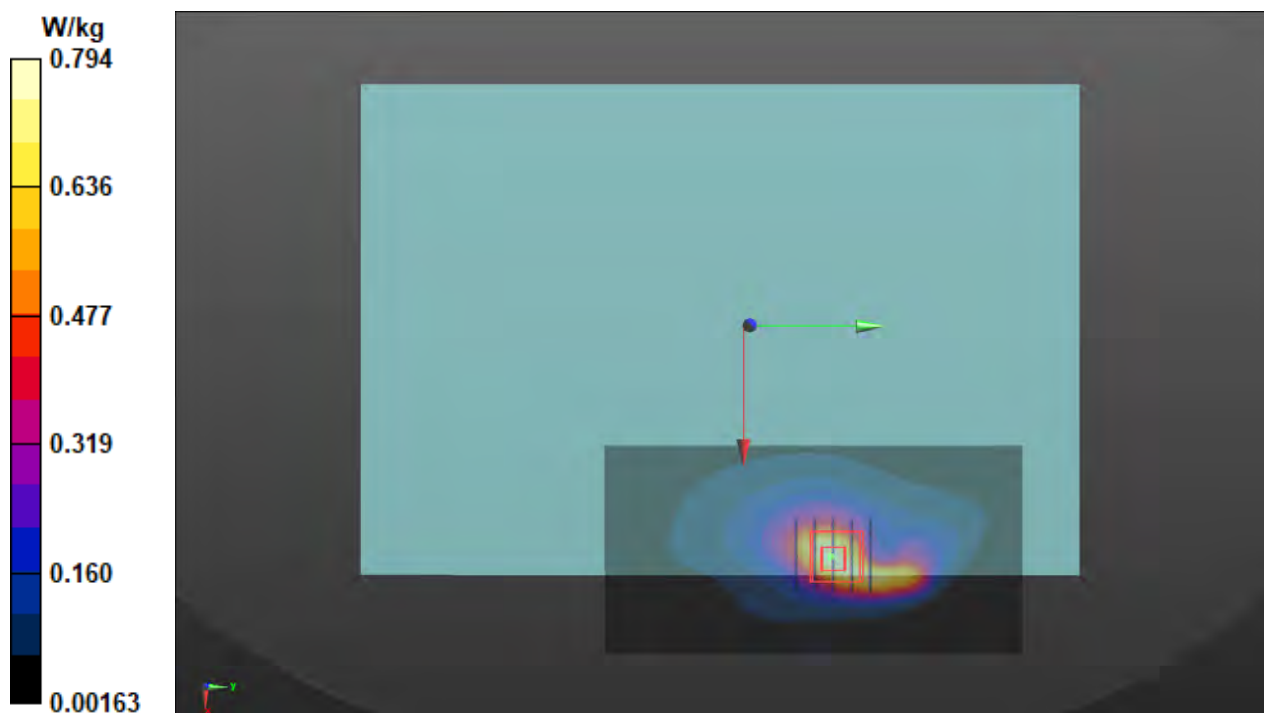

P39 LTE 2_QPSK20M_Bottom_0mm_Ch19100_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1900 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0926 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.463$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.17, 8.17, 8.17) @ 1900 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.393 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.08 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.115 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.346 W/kg

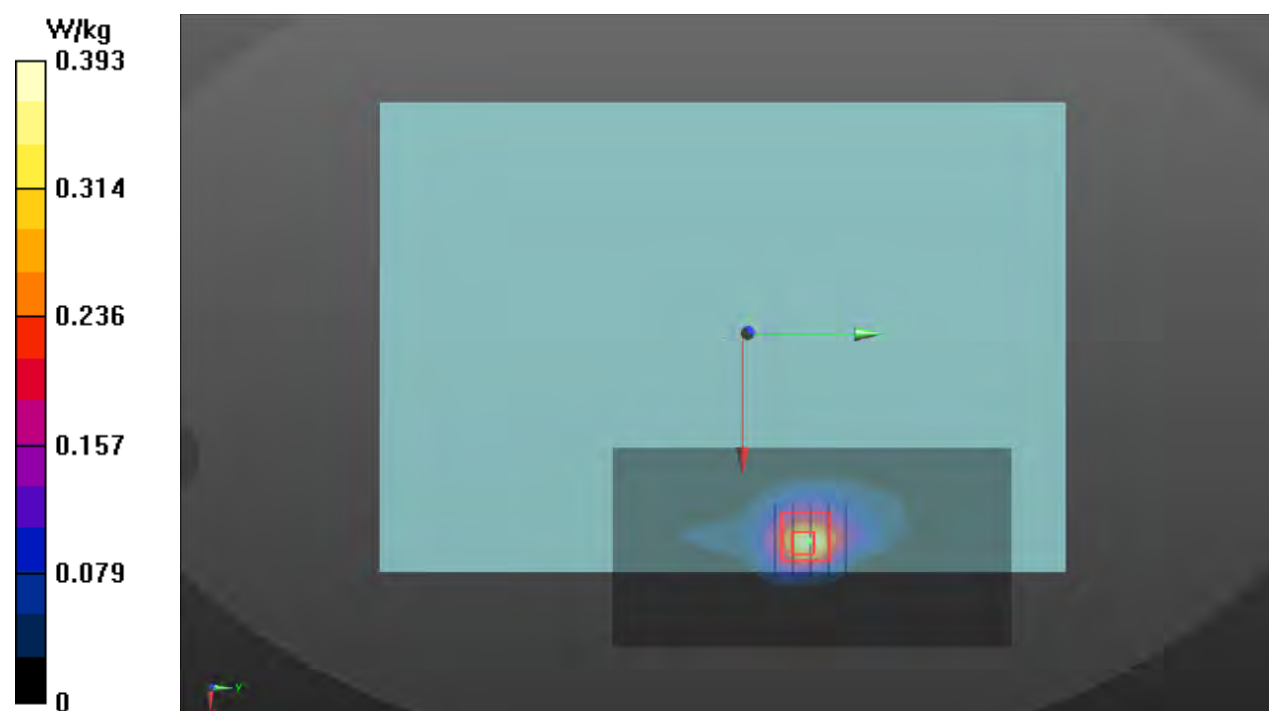

P40 LTE 2_QPSK20M_Bottom_0mm_Ch19100_1RB_OS0_Ant 2_P-Sensor_w**DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1900 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0927 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.237$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.98, 7.98, 7.98) @ 1900 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.345 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.53 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.126 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.357 W/kg

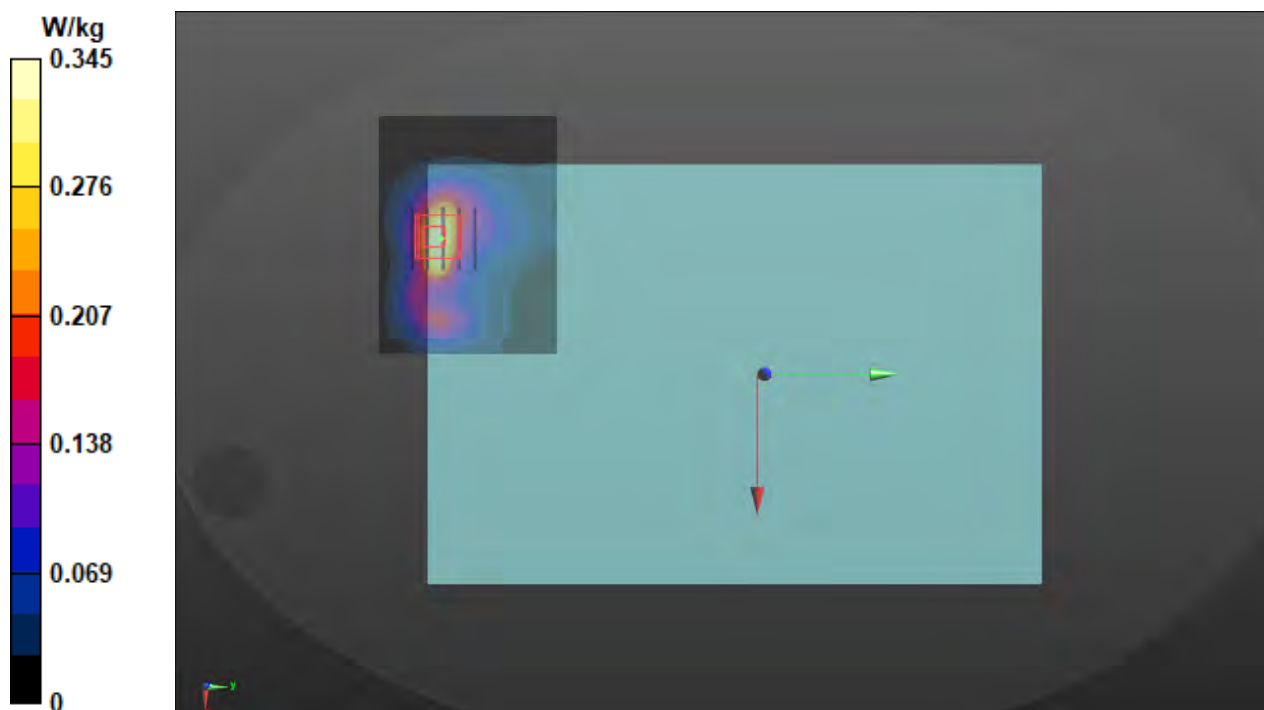

P41 LTE 4_QPSK20M_Bottom_0mm_Ch20050_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1720 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0926 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.174$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1720 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.371 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.36 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.113 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.318 W/kg

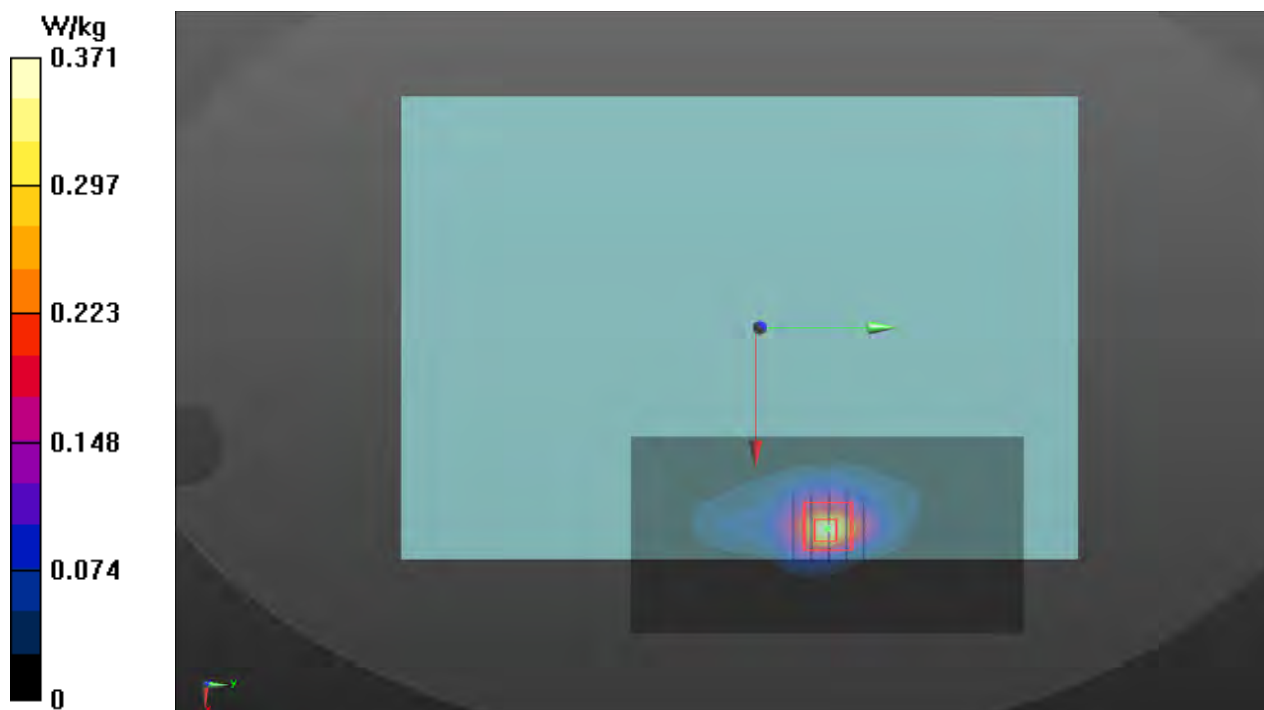

P42 LTE 5_QPSK10M_Bottom_0mm_Ch20600_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 844 MHz; Duty Cycle: 1:3.74

Medium: H07T10N1_0926 Medium parameters used: $f = 844$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.468$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.83, 9.83, 9.83) @ 844 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.512 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.76 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.189 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.505 W/kg

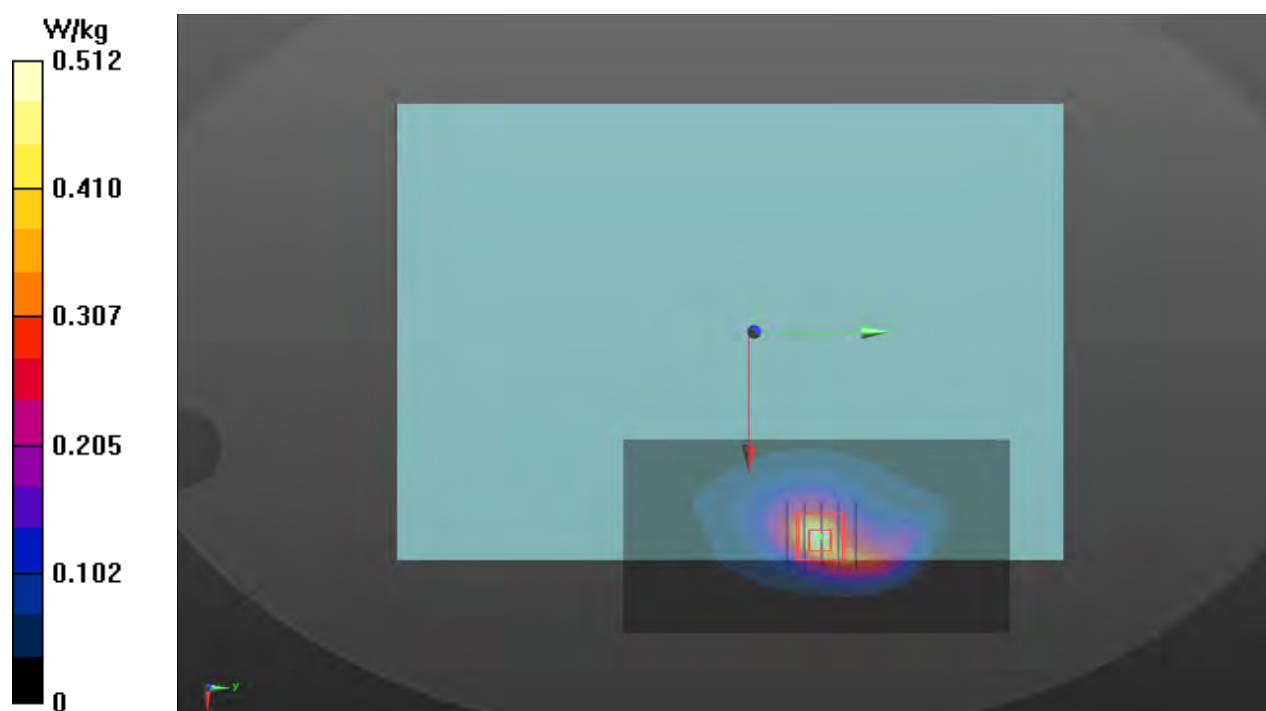

P43 LTE 7_QPSK20M_Bottom_0mm_Ch21100_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2535 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0927 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.062$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2535 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.774 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.92 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.166 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 0.808 W/kg

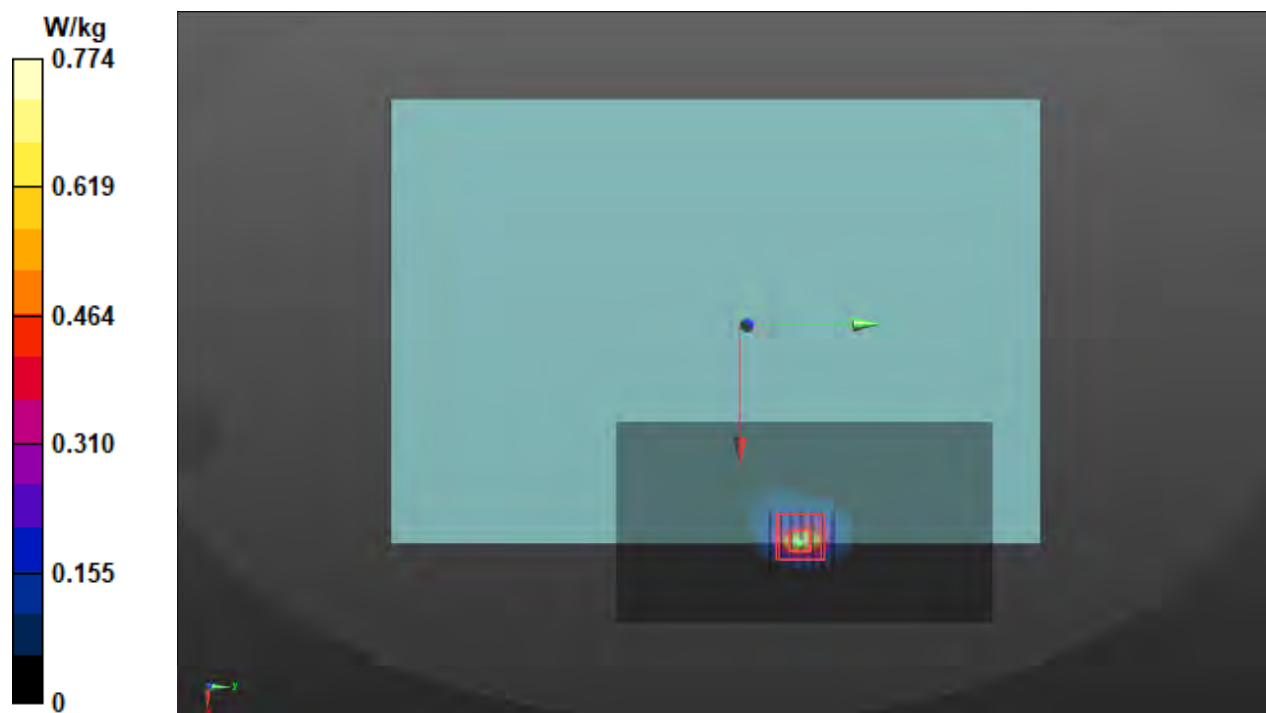

P44 LTE 7_QPSK20M_Bottom_0mm_Ch21350_1RB_OS0_Ant 2_P-Sensor_w**DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2560 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0927 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 37.967$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2560 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.890 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.91 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.111 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 0.572 W/kg

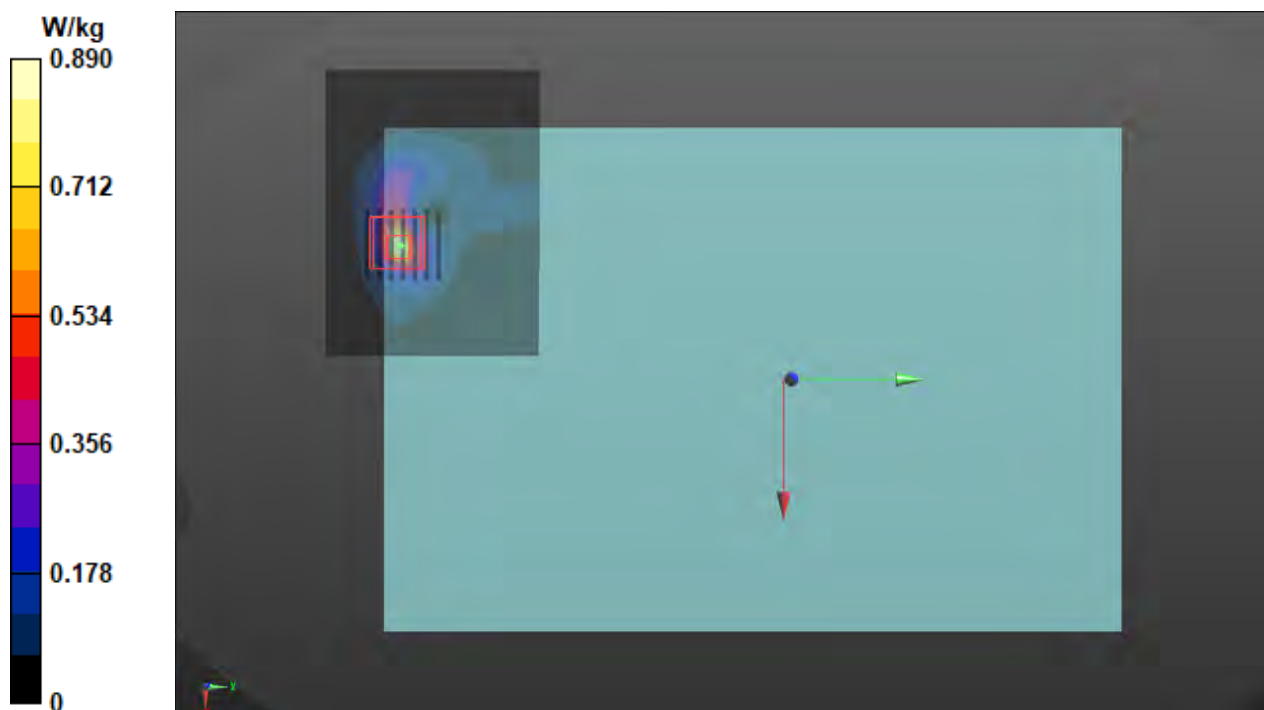

P45 LTE 12_QPSK10M_Bottom_0mm_Ch23060_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 704 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0926 Medium parameters used: $f = 704$ MHz; $\sigma = 0.846$ S/m; $\epsilon_r = 43.095$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 704 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.469 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.80 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.188 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.443 W/kg

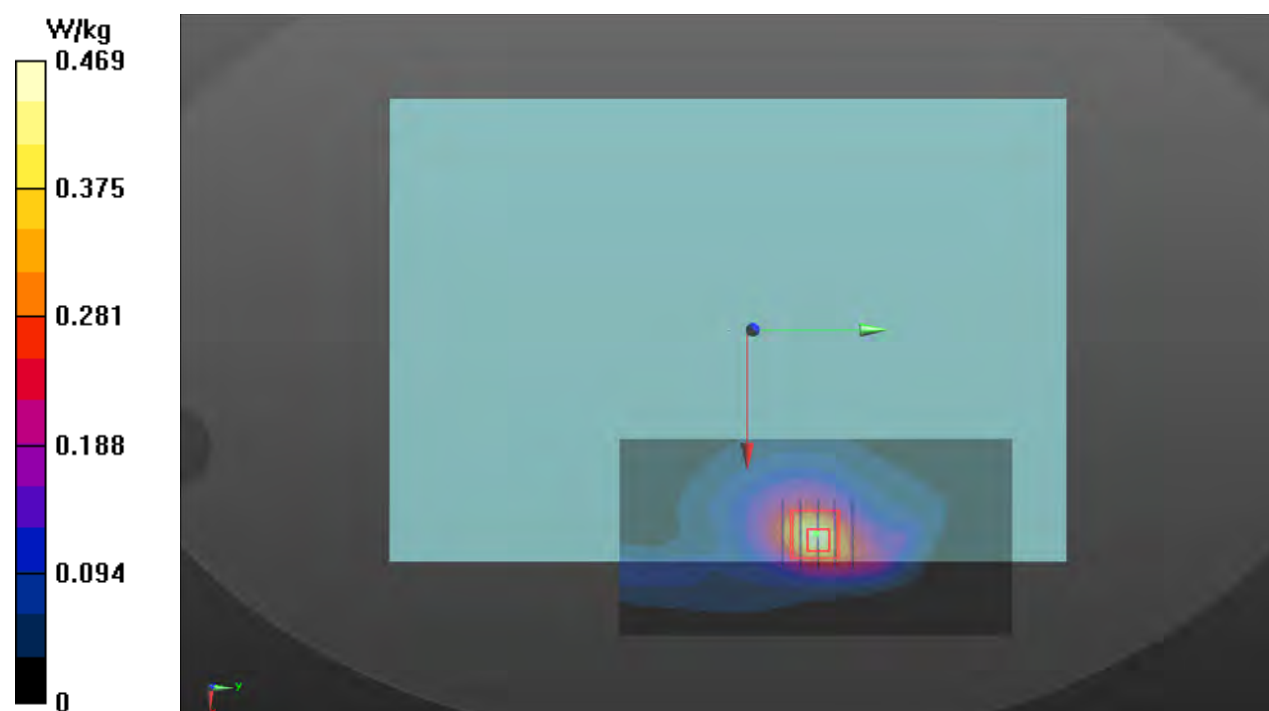

P46 LTE 13_QPSK10M_Bottom_0mm_Ch23230_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 782 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0926 Medium parameters used: $f = 782$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.989$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 782 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.379 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.52 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.140 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.385 W/kg

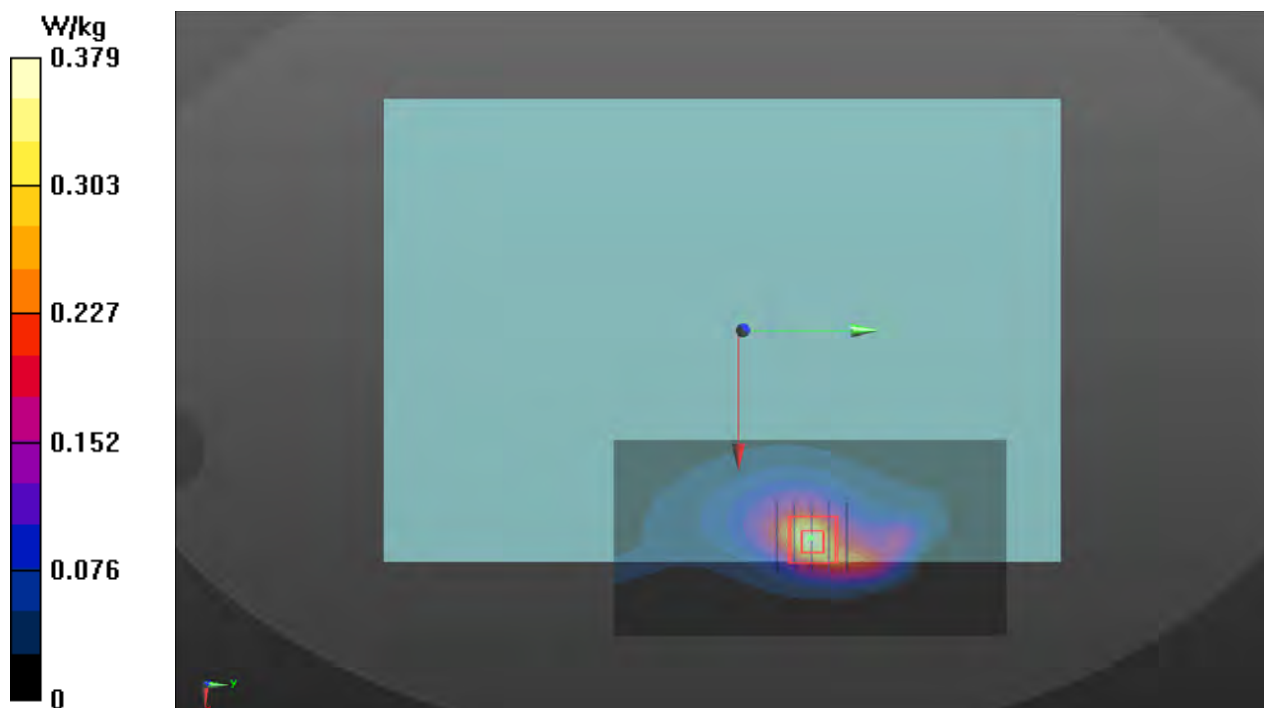

P47 LTE 14_QPSK10M_Bottom_0mm_Ch23330_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 793 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0926 Medium parameters used: $f = 793$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 41.843$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 793 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.345 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.45 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.125 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.350 W/kg

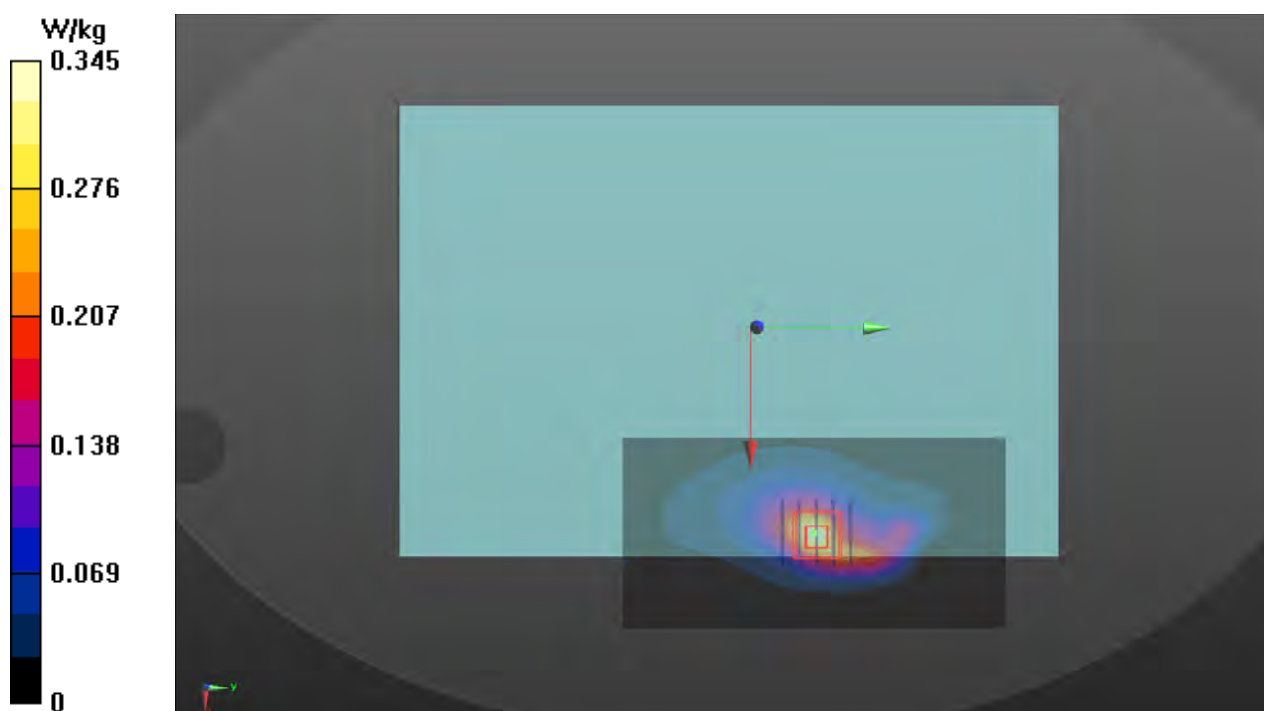

P48 LTE 17_QPSK10M_Bottom_0mm_Ch23780_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 709 MHz; Duty Cycle: 1:3.74

Medium: H06T09N1_0926 Medium parameters used: $f = 709$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 43.031$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.92, 9.92, 9.92) @ 709 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.461 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.54 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.183 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 0.433 W/kg

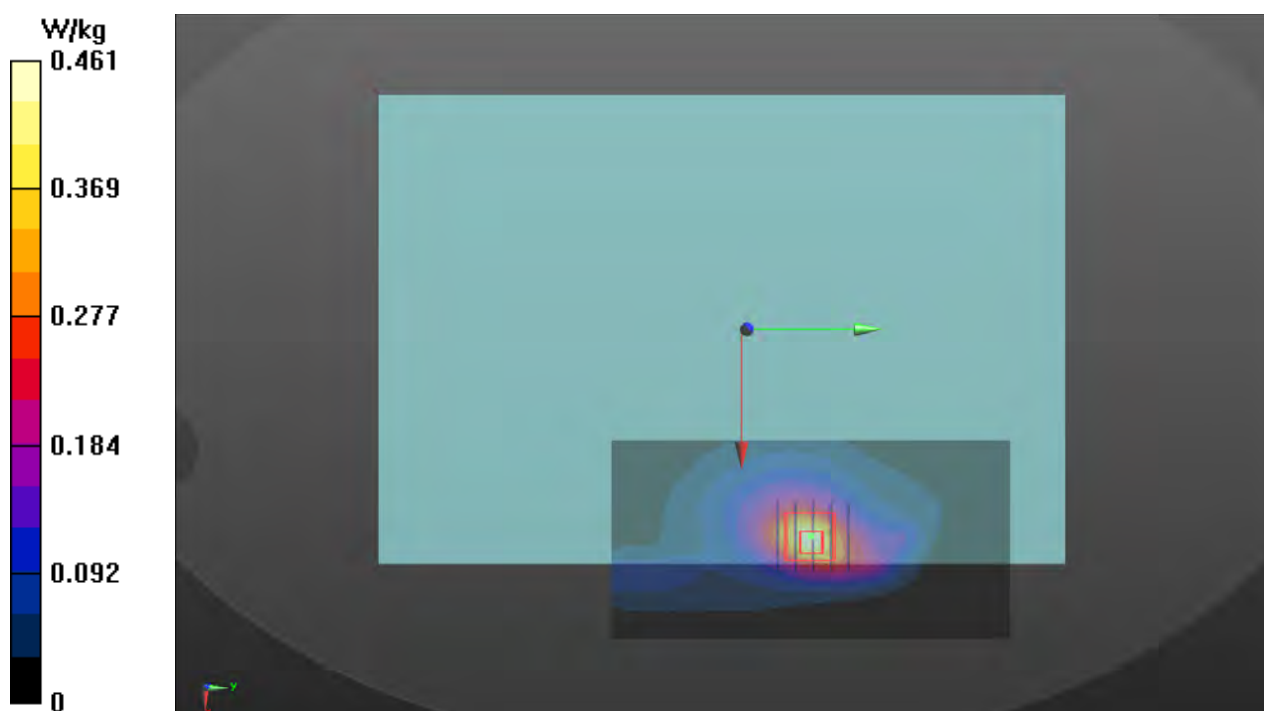

P49 LTE 25_QPSK20M_Bottom_0mm_Ch26590_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 1905 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0926 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.466$ S/m; $\epsilon_r = 38.85$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.17, 8.17, 8.17) @ 1905 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.391 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.20 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.119 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.354 W/kg

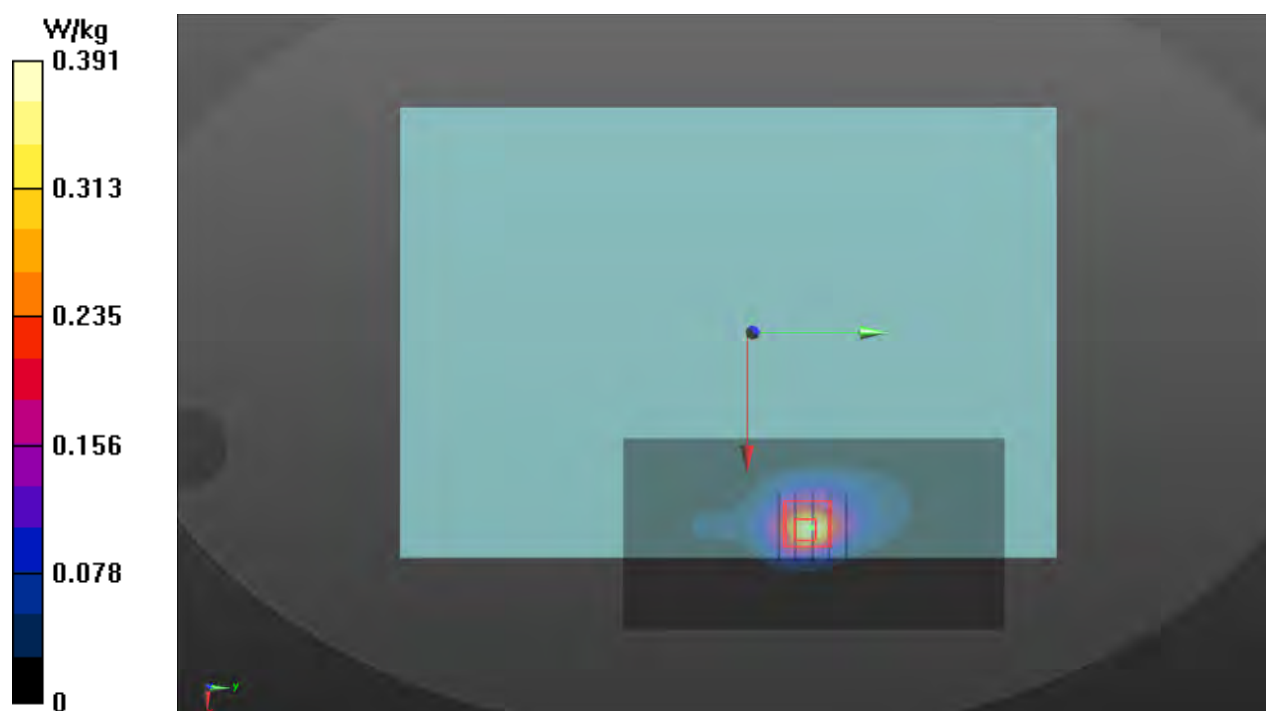

P50 LTE 26_QPSK15M_Bottom_0mm_Ch26965_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10181 - CAE, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK);

Frequency: 841.5 MHz; Duty Cycle: 1:3.74

Medium: H07T10N1_0926 Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.497$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.83, 9.83, 9.83) @ 841.5 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.561 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.06 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.208 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.562 W/kg

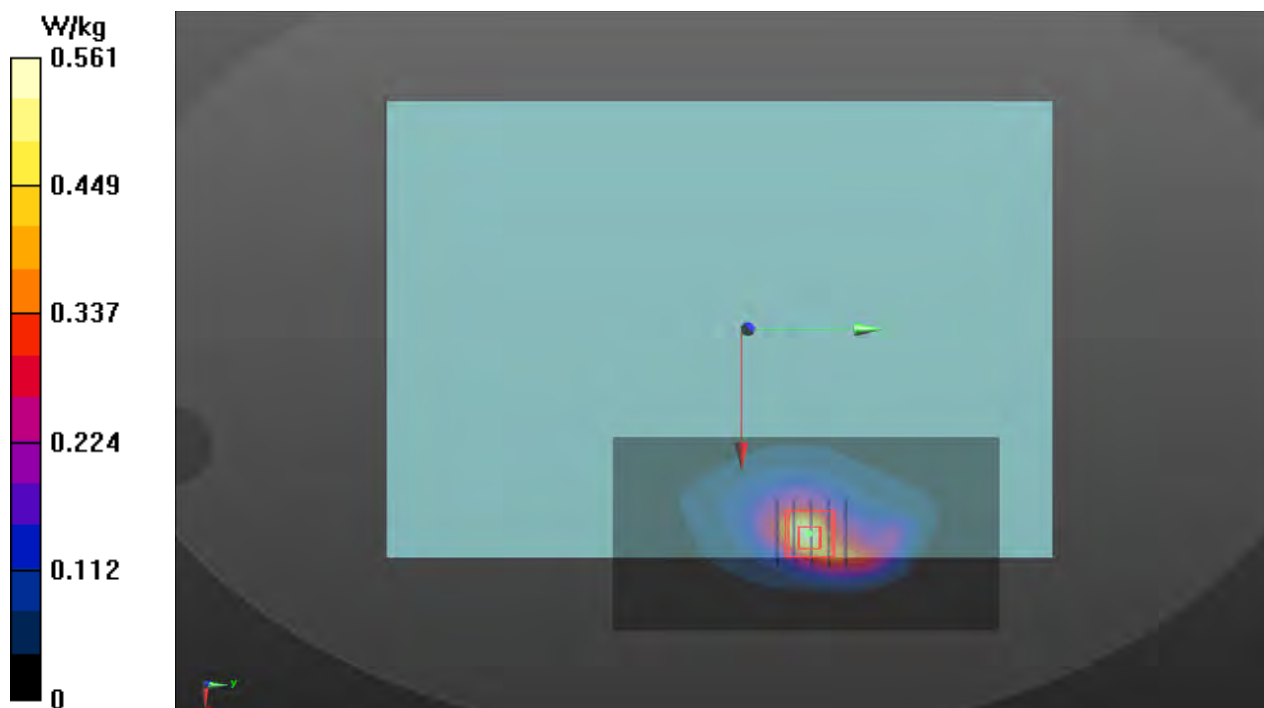

P51 LTE 30_QPSK10M_Bottom_0mm_Ch27710_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK);

Frequency: 2310 MHz; Duty Cycle: 1:3.74

Medium: H19T27N1_0926 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.726$ S/m; $\epsilon_r = 38.473$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.96, 7.96, 7.96) @ 2310 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.517 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.50 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.133 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 43.3%

Maximum value of SAR (measured) = 0.404 W/kg

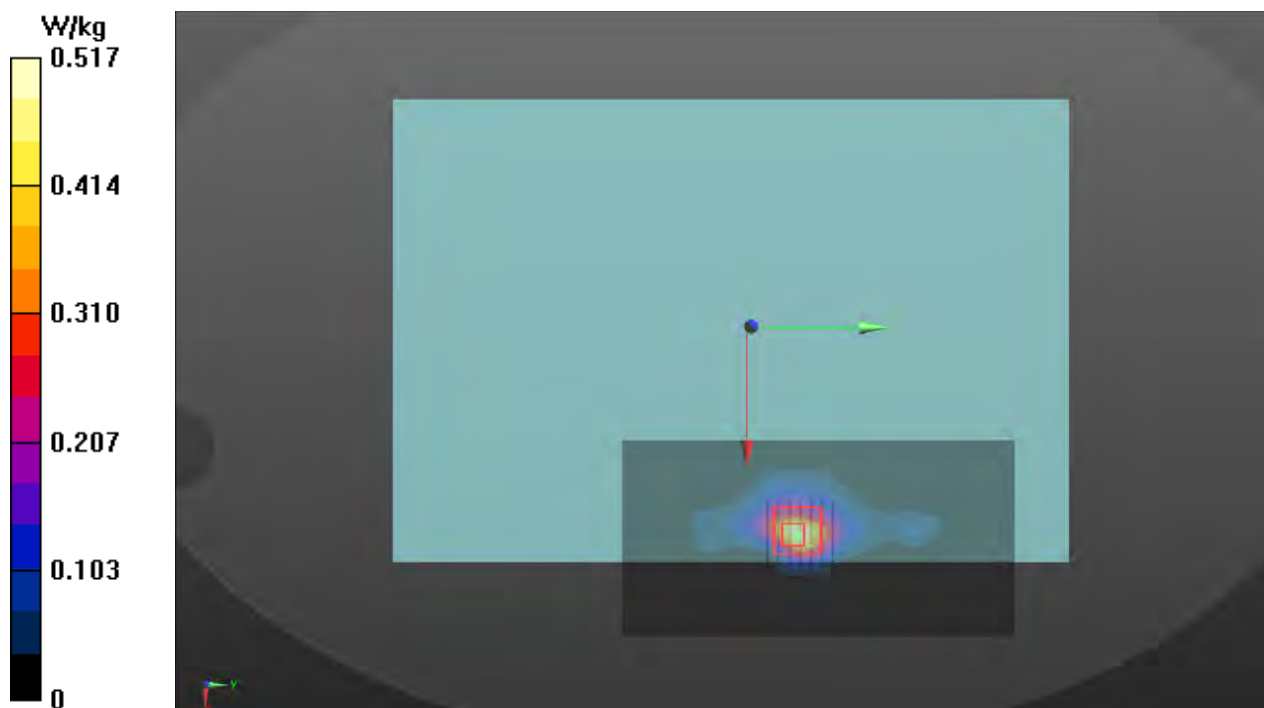

P52 LTE 38_QPSK20M_Bottom_0mm_Ch37850_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2580 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0927 Medium parameters used: $f = 2580$ MHz; $\sigma = 2.023$ S/m; $\epsilon_r = 37.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.21, 7.21, 7.21) @ 2580 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.536 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.60 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.090 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 39.9%

Maximum value of SAR (measured) = 0.460 W/kg

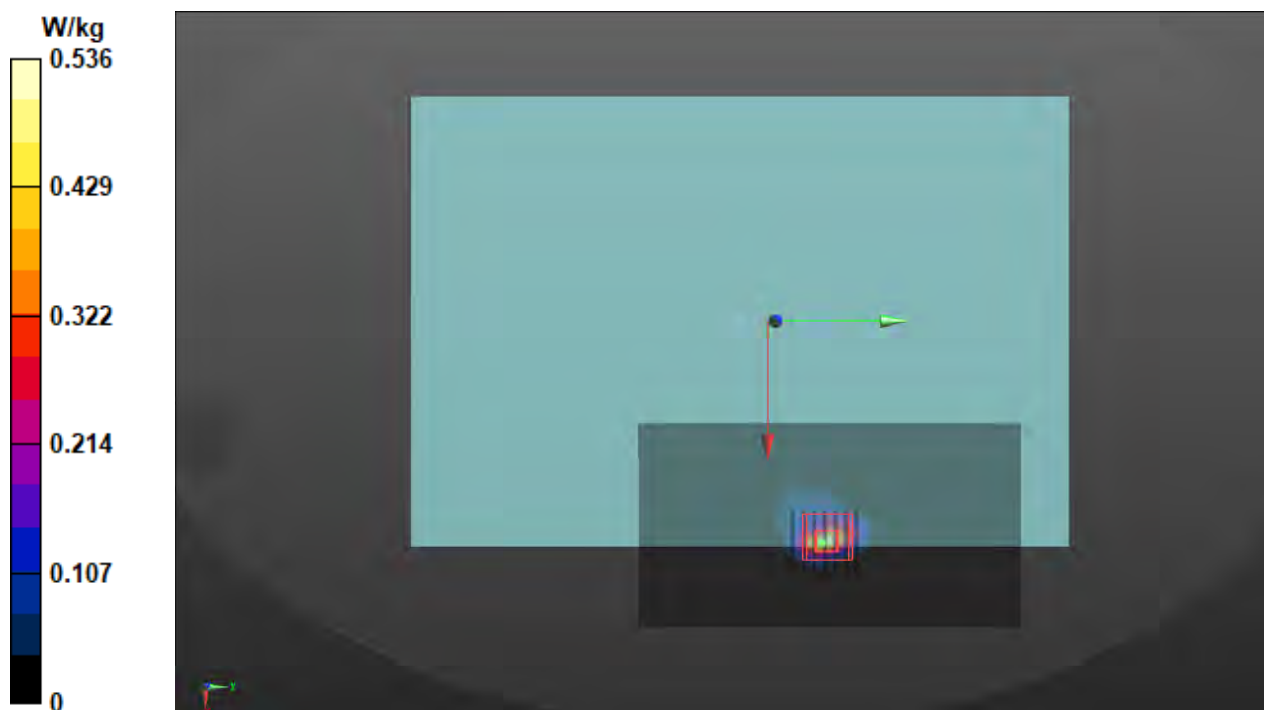

P53 LTE 41_QPSK20M_Bottom_0mm_Ch40185_1RB_OS0_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 2549.5 MHz; Duty Cycle: 1:8.33

Medium: H19T27N1_0927 Medium parameters used (interpolated): $f = 2550$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 38.002$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(7.21, 7.21, 7.21) @ 2549.5 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.457 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.26 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.088 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 41.7%

Maximum value of SAR (measured) = 0.457 W/kg



P54 LTE 42_QPSK20M_Bottom_0mm_Ch43190_1RB_OS0_Ant 2_P-Sensor_w**DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 3560 MHz; Duty Cycle: 1:8.33

Medium: H33T42N0_0927 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 37.191$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(6.64, 6.64, 6.64) @ 3560 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.566 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 13.02 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.935 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.132 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.684 W/kg

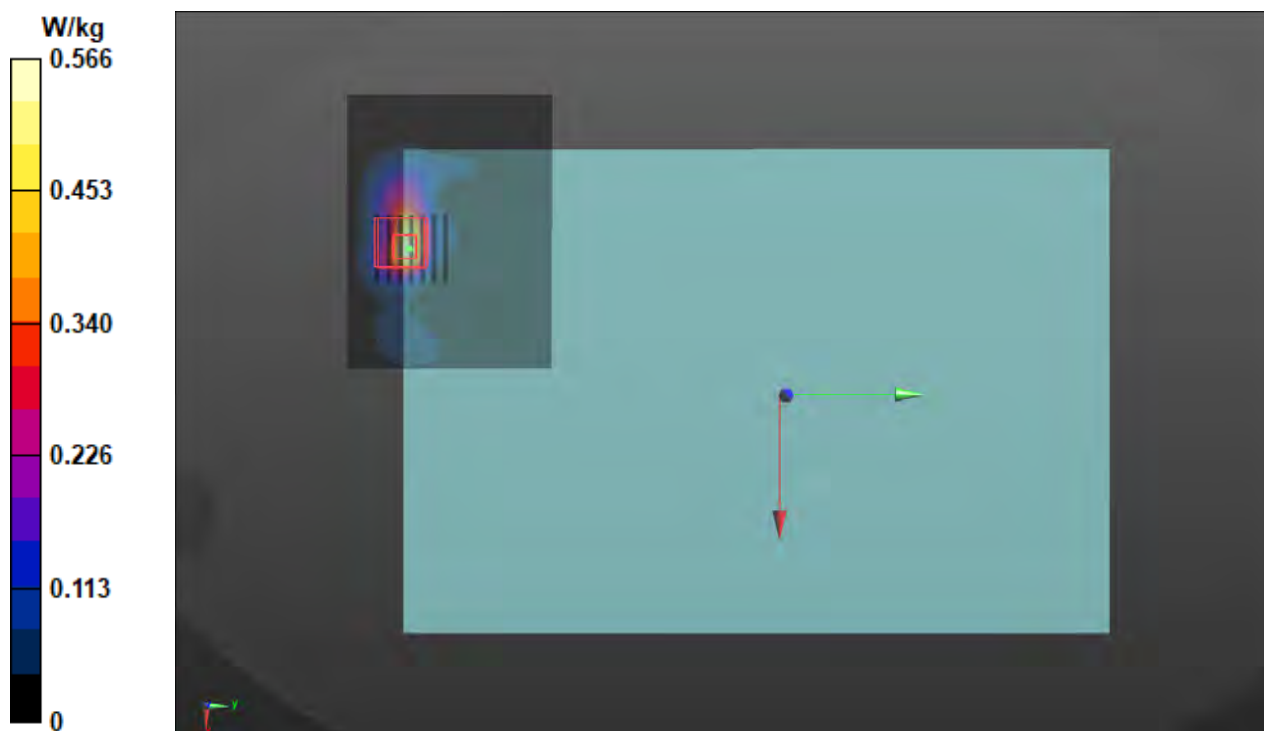

P55 LTE 48_QPSK20M_Bottom_0mm_Ch55340_1RB_OS0_Ant 2_P-Sensor_w**DUT: P21080878**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);

Frequency: 3560 MHz; Duty Cycle: 1:8.33

Medium: H33T42N0_0928 Medium parameters used: $f = 3560$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 36.744$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(6.7, 6.7, 6.7) @ 3560 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.171 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2.5$ mm

Reference Value = 7.000 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.087 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 0.454 W/kg

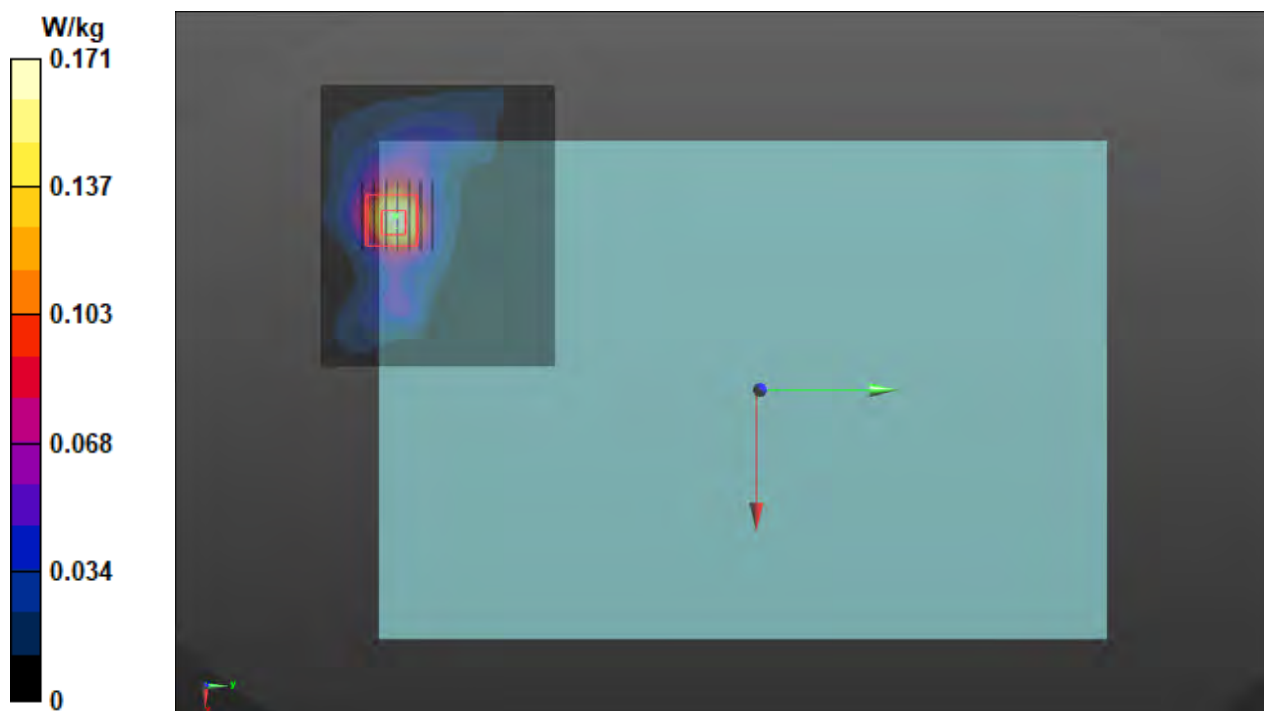

**P56 LTE 66_QPSK20M_Bottom_0mm_Ch132322_1RB_OS0_Ant
0_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1745 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0926 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.137$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(8.54, 8.54, 8.54) @ 1745 MHz; Calibrated: 2021/03/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1277; Calibrated: 2021/01/19
- Phantom: ELI Phantom_1205; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.510 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.06 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.155 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.438 W/kg

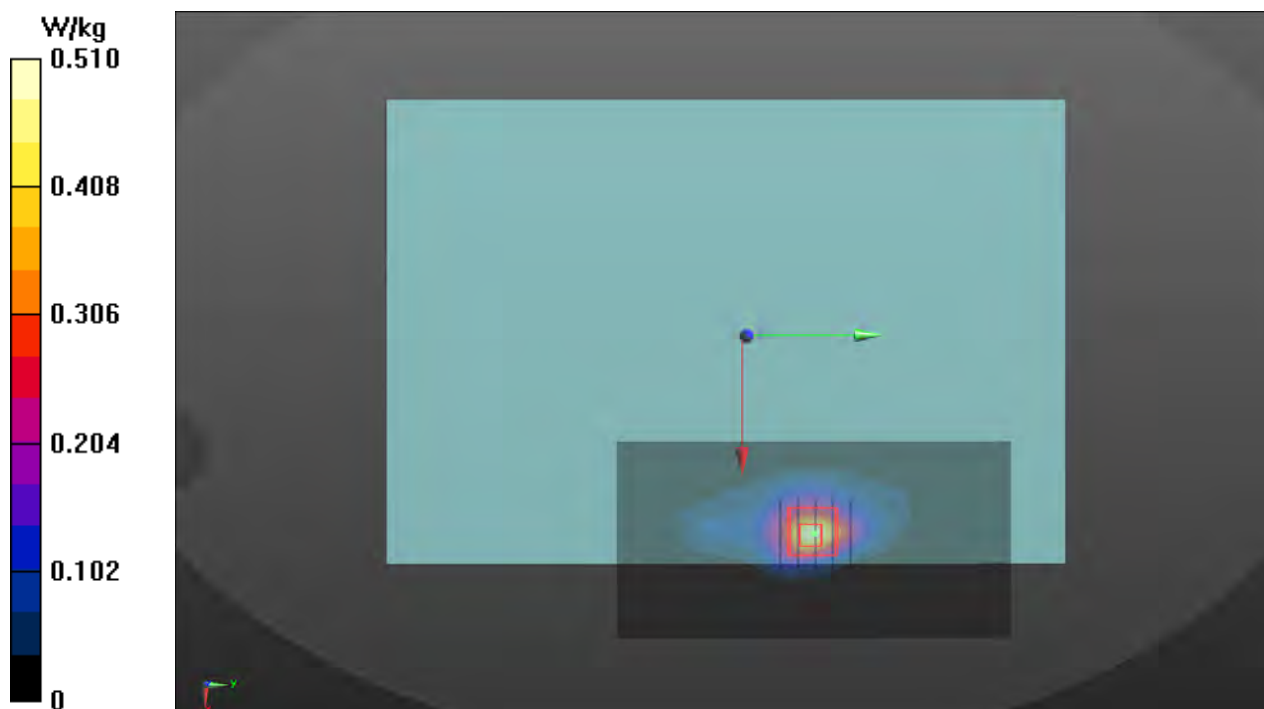

**P57 LTE 66_QPSK20M_Bottom_0mm_Ch132072_1RB_OS0_Ant
2_P-Sensor_w****DUT: P21080878**

Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
Frequency: 1720 MHz; Duty Cycle: 1:3.74

Medium: H16T20N1_0927 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.302$ S/m; $\epsilon_r = 39.95$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.24, 8.24, 8.24) @ 1720 MHz; Calibrated: 2020/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2021/04/14
- Phantom: ELI V5.0 1204; Type: QD OVA 002 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.188 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.01 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.064 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.213 W/kg

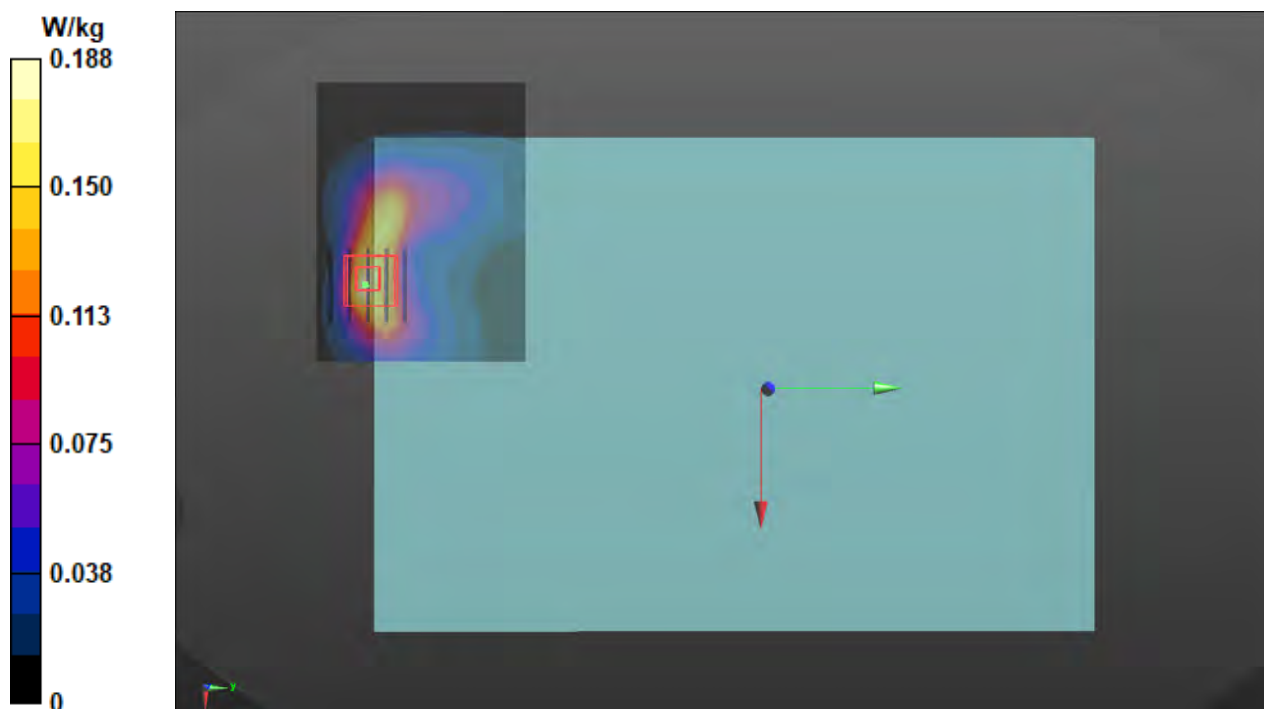

P58 5G NR-n2_DFT-S_15KHz QPSK20M_Bottom_0mm_Ch380000_1RB_OS1_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);
Frequency: 1900 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_1008 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 39.578$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.449 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.10 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.165 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.499 W/kg

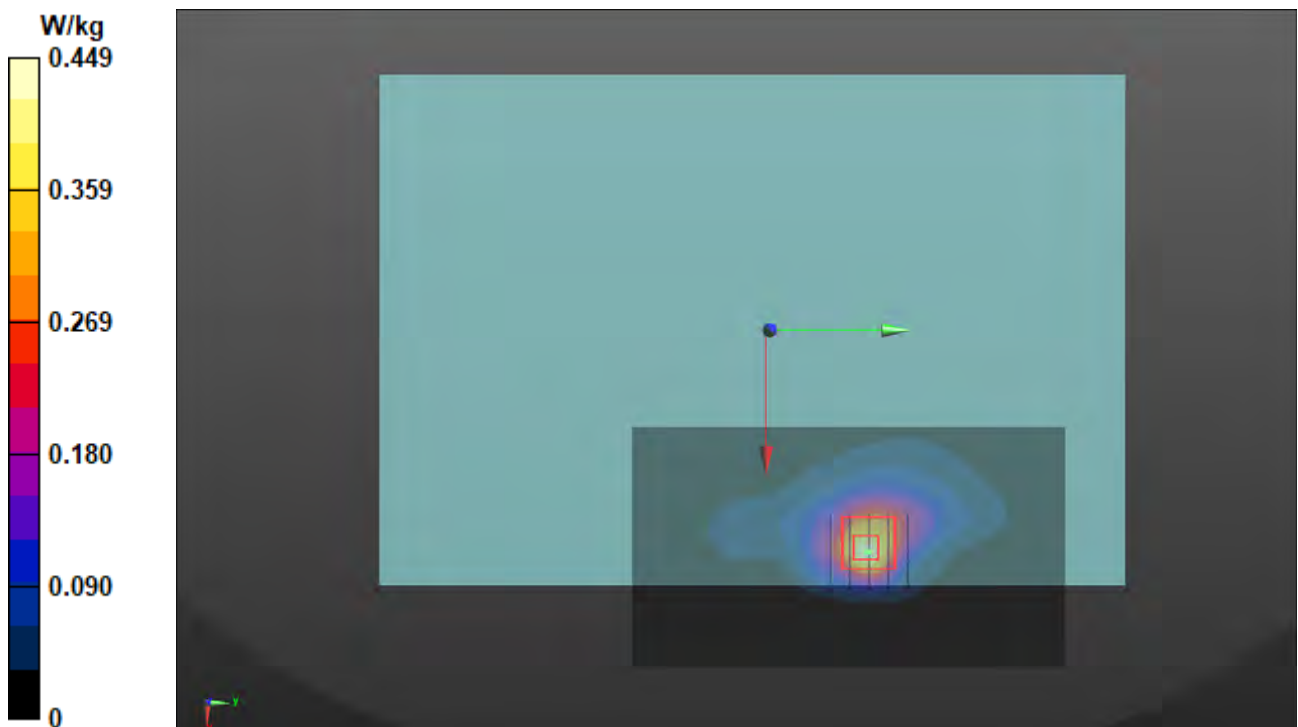

**P59 5GNR-n2_DFT-S_15KHz
QPSK20M_Bottom_0mm_Ch380000_1RB_OS1_Ant 2_P-Sensor_w****DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz); Frequency: 1900 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0928 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 38.53$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(8.27, 8.27, 8.27) @ 1900 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.461 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.60 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.215 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.621 W/kg

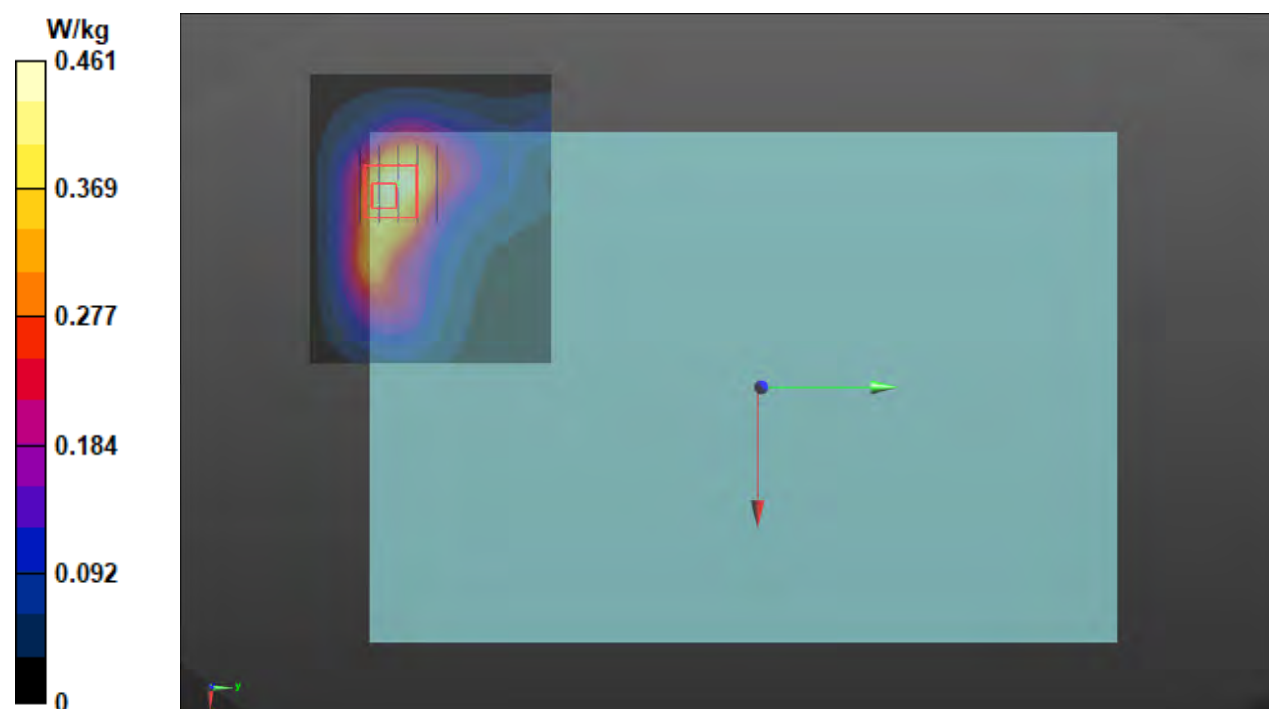

P60 5G NR-n5_DFT-S_15KHz QPSK20M_Bottom_0mm_Ch166800_1RB_OS1_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);
Frequency: 834 MHz; Duty Cycle: 1:3.56
Medium: H07T10N1_1008 Medium parameters used (interpolated): $f = 834$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 43.078$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.5, 10.5, 10.5) @ 834 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.491 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.31 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.115 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.573 W/kg

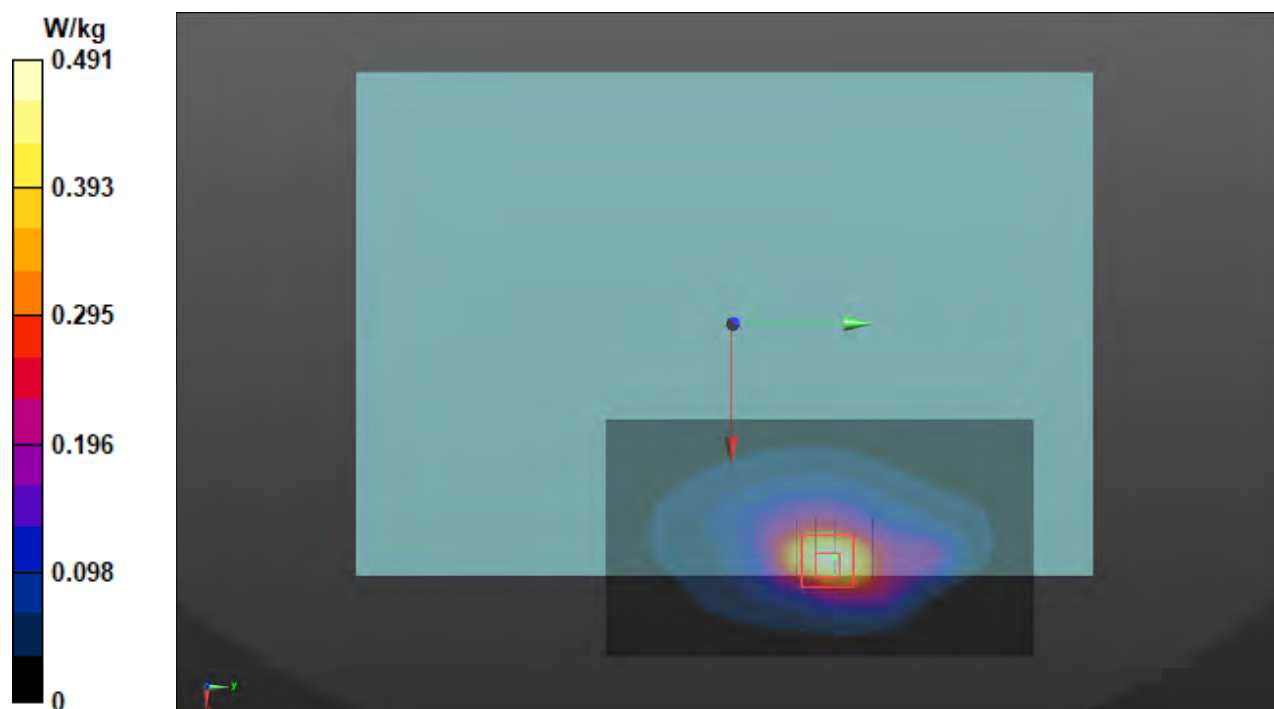

P61 5G NR-n7_DFT-S_15KHz QPSK20M_Bottom_0mm_Ch512000_1RB_OS1_Ant 2_P-Sensor_w**DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);
Frequency: 2560 MHz; Duty Cycle: 1:3.56

Medium: H19T27N1_1008 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 38.035$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.41, 7.41, 7.41) @ 2560 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.407 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.03 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.104 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 1.01 W/kg

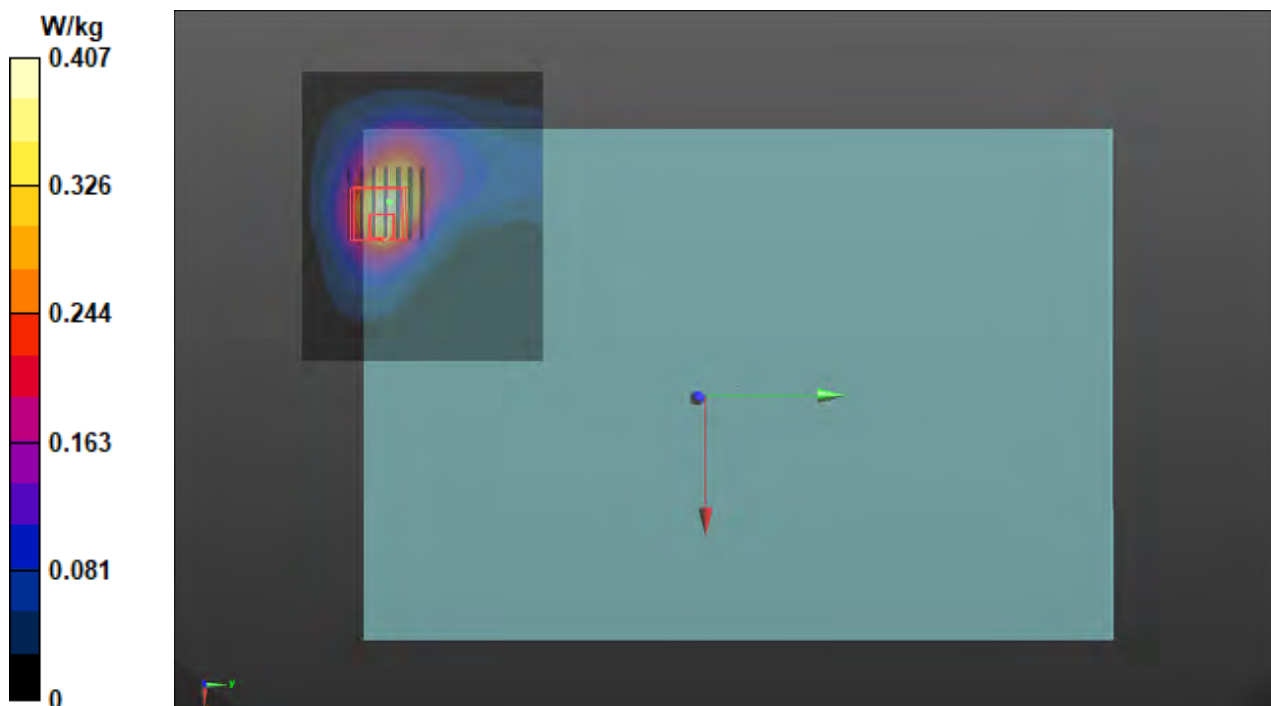

P62 5GNR-n12_DFT-S_15KHz
QPSK15M_Bottom_0mm_Ch141300_1RB_OS1_Ant 0_P-Sensor_w

DUT: P21080878


Communication System: UID 10930 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz); Frequency: 706.5 MHz; Duty Cycle: 1:3.56
Medium: H06T09N1_0928 Medium parameters used (interpolated): $f = 706.5$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.244$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 23.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(10.69, 10.69, 10.69) @ 706.5 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: Twin-ELI Phantom_2118; Type: QD OVA 004 AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.352 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.83 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.482 W/kg
SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.106 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below = 10.7 mm
Ratio of SAR at M2 to SAR at M1 = 54%
Maximum value of SAR (measured) = 0.380 W/kg

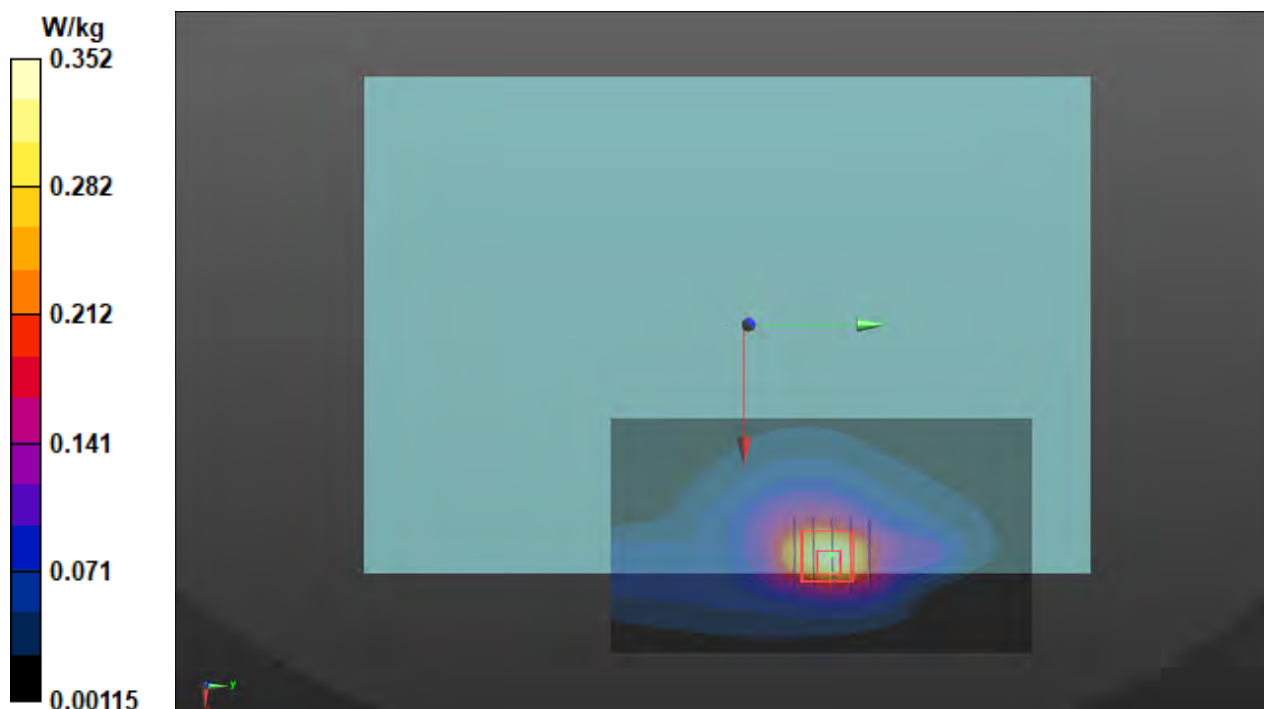

**P63 5GNR-n41_DFT-S_30KHz
QPSK100M_Bottom_0mm_Ch528000_1RB_OS1_Ant 2_P-Sensor_w****DUT: P21080878**

Communication System: UID 10866 - AAD, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz); Frequency: 2640 MHz; Duty Cycle: 1:3.7

Medium: H19T27N1_0929 Medium parameters used: $f = 2640$ MHz; $\sigma = 2.092$ S/m; $\epsilon_r = 37.679$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(7.3, 7.3, 7.3) @ 2640 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn915; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.358 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.27 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.991 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.113 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 41.5%

Maximum value of SAR (measured) = 0.700 W/kg

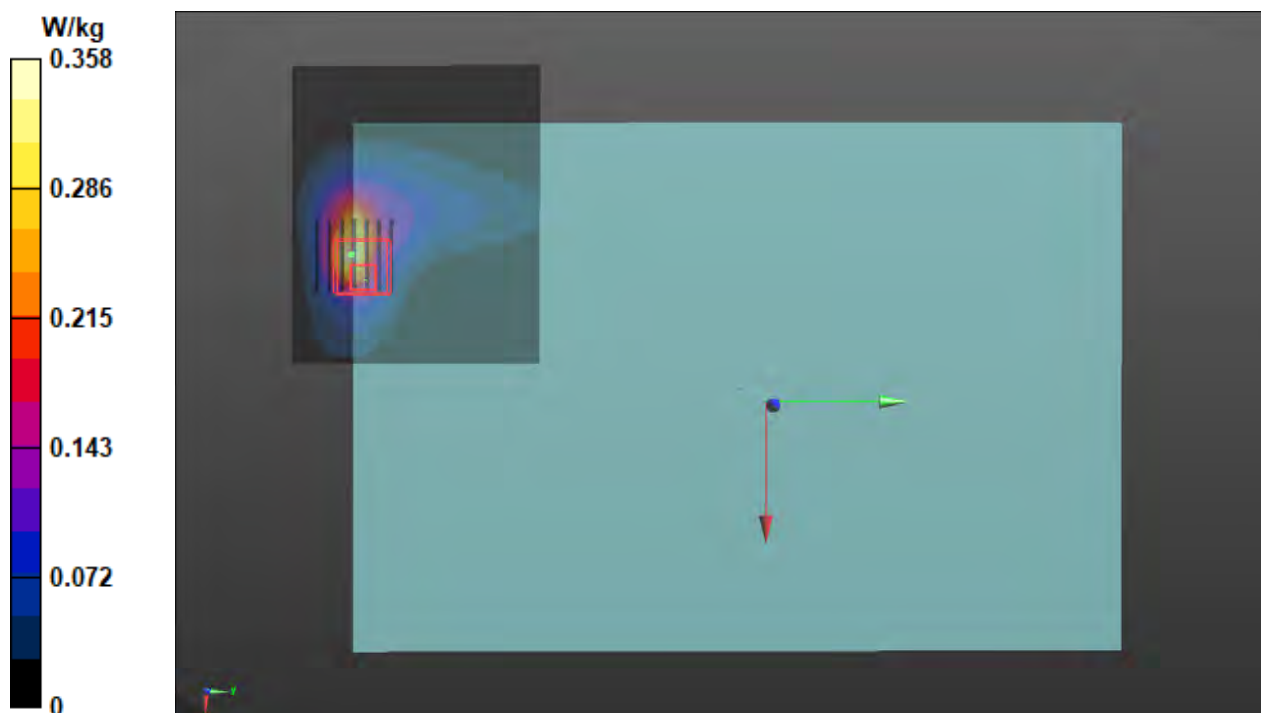

P64 5G NR-n66_DFT-S_15KHz QPSK20M_Bottom_0mm_Ch354000_1RB_OS1_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);
Frequency: 1770 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0929 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.338$ S/m; $\epsilon_r = 39.487$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1770 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn915; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.417 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.95 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.116 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.368 W/kg

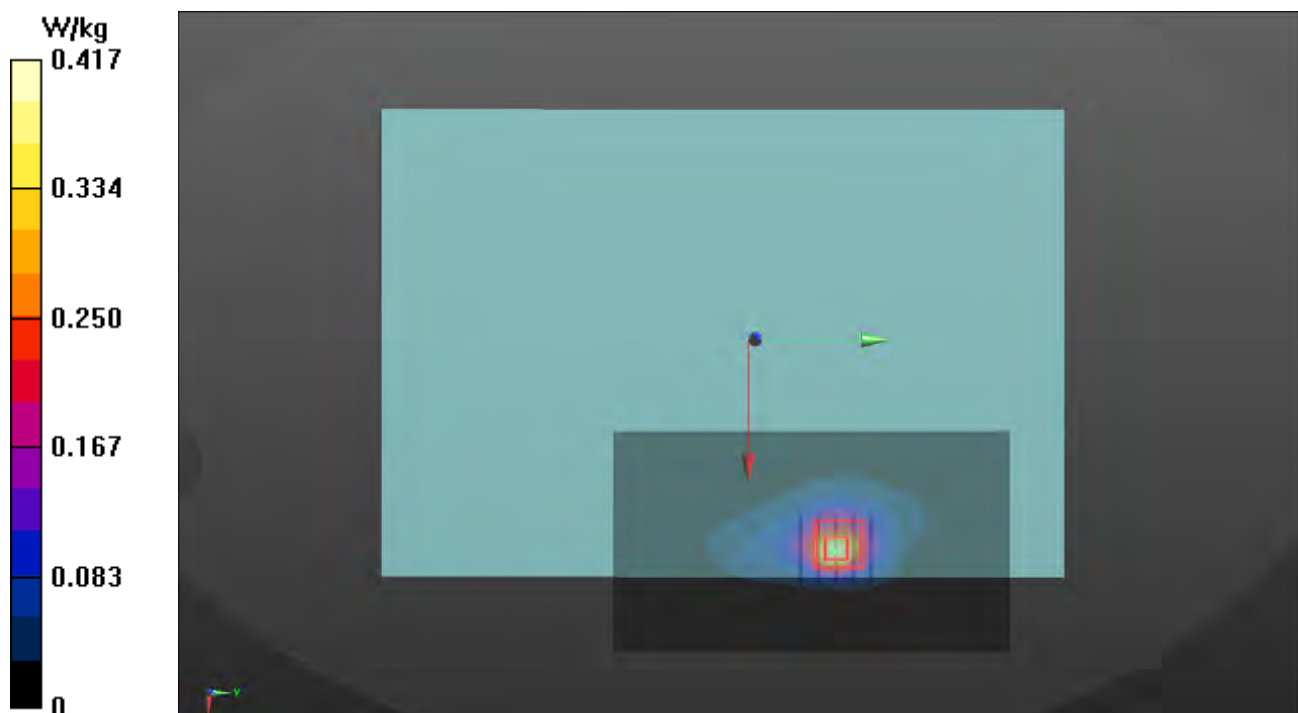

P65 5G NR-n66_DFT-S_15KHz QPSK20M_Bottom_0mm_Ch344000_1RB_OS1_Ant 2_P-Sensor_w**DUT: P21080878**

Communication System: UID 10931 - AAC, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz);
Frequency: 1720 MHz; Duty Cycle: 1:3.56

Medium: H16T20N1_0929 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.299$ S/m; $\epsilon_r = 39.717$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7554; ConvF(8.54, 8.54, 8.54) @ 1720 MHz; Calibrated: 2021/08/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn915; Calibrated: 2021/06/02
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.300 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.86 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.085 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 0.271 W/kg

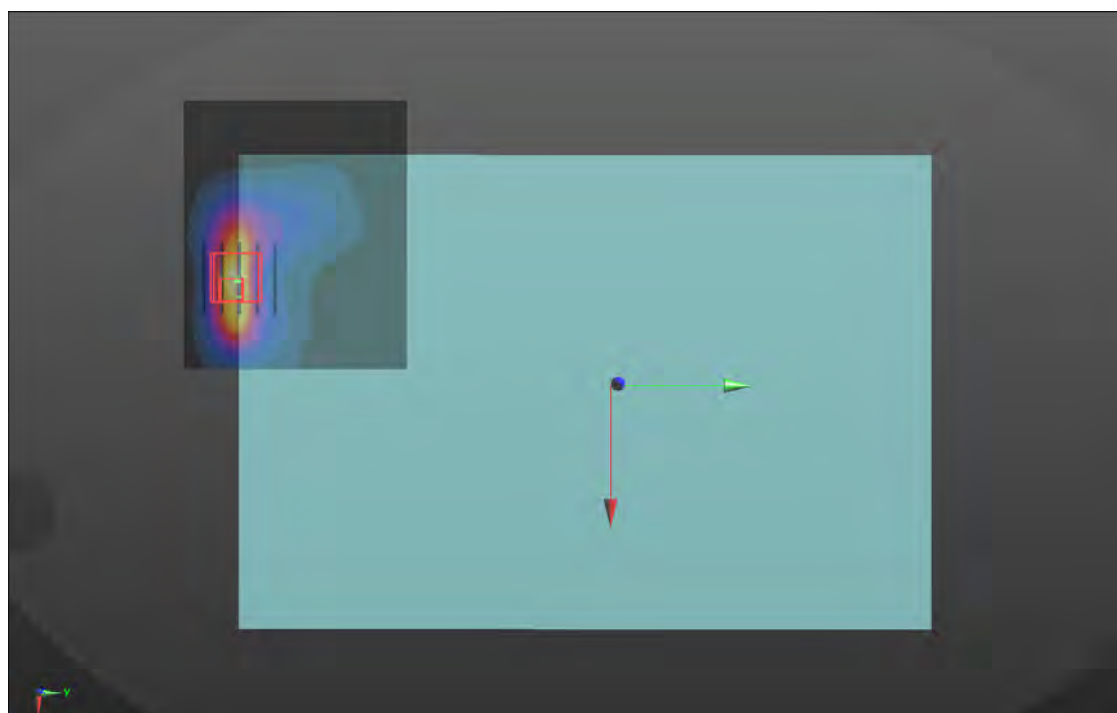

P66 WLAN2.4G_802.11b_Bottom_0mm_Ch6_Sample 1_Ant 1_P-Sensor_w**DUT: P21080878**

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H19T27N1_1001 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.786$ S/m; $\epsilon_r = 37.953$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2437 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x301x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.950 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.55 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.284 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.4%

Maximum value of SAR (measured) = 1.40 W/kg

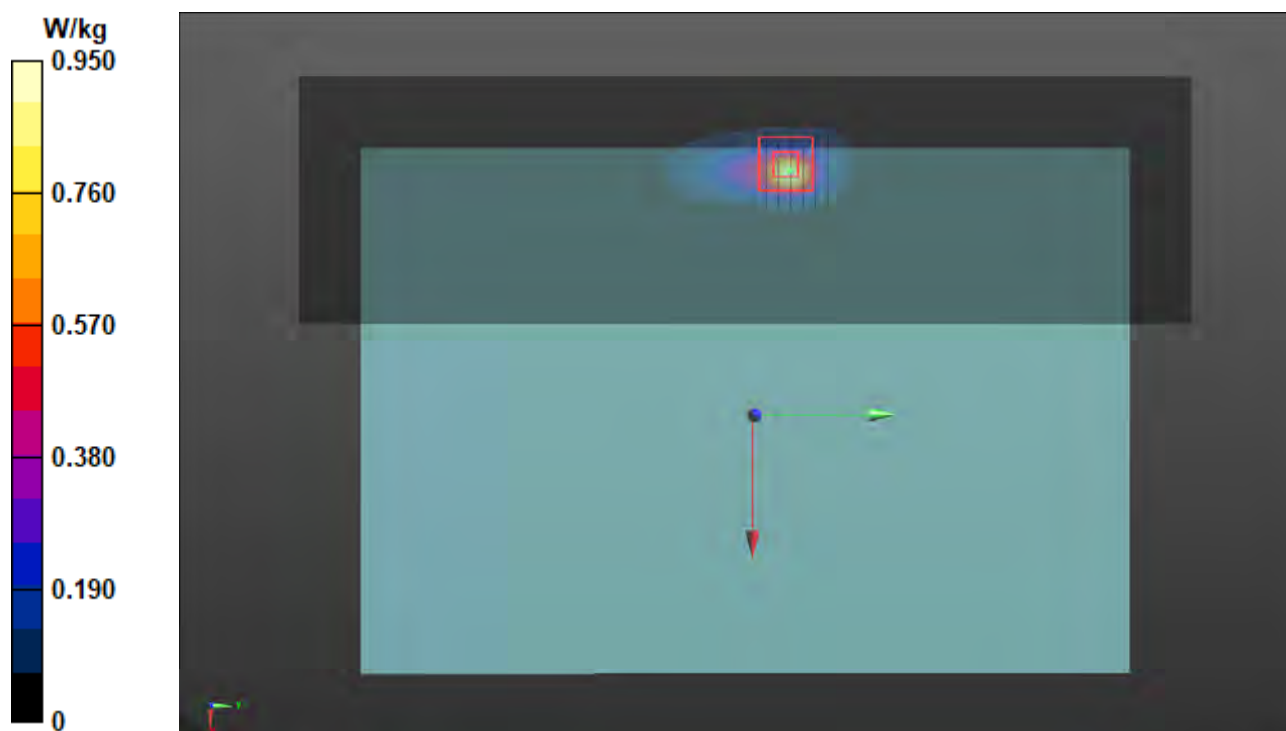

P67 WLAN5.3G_802.11ac VHT160_Bottom_0mm_Ch50_Sample 1_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10554 - AAD, IEEE 802.11ac WiFi (160MHz, MCS0); Frequency: 5250 MHz; Duty Cycle: 1:1.01

Medium: H34T60N1_1002 Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 37.651$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(5.5, 5.5, 5.5) @ 5250 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 15.68 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.130 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 0.936 W/kg

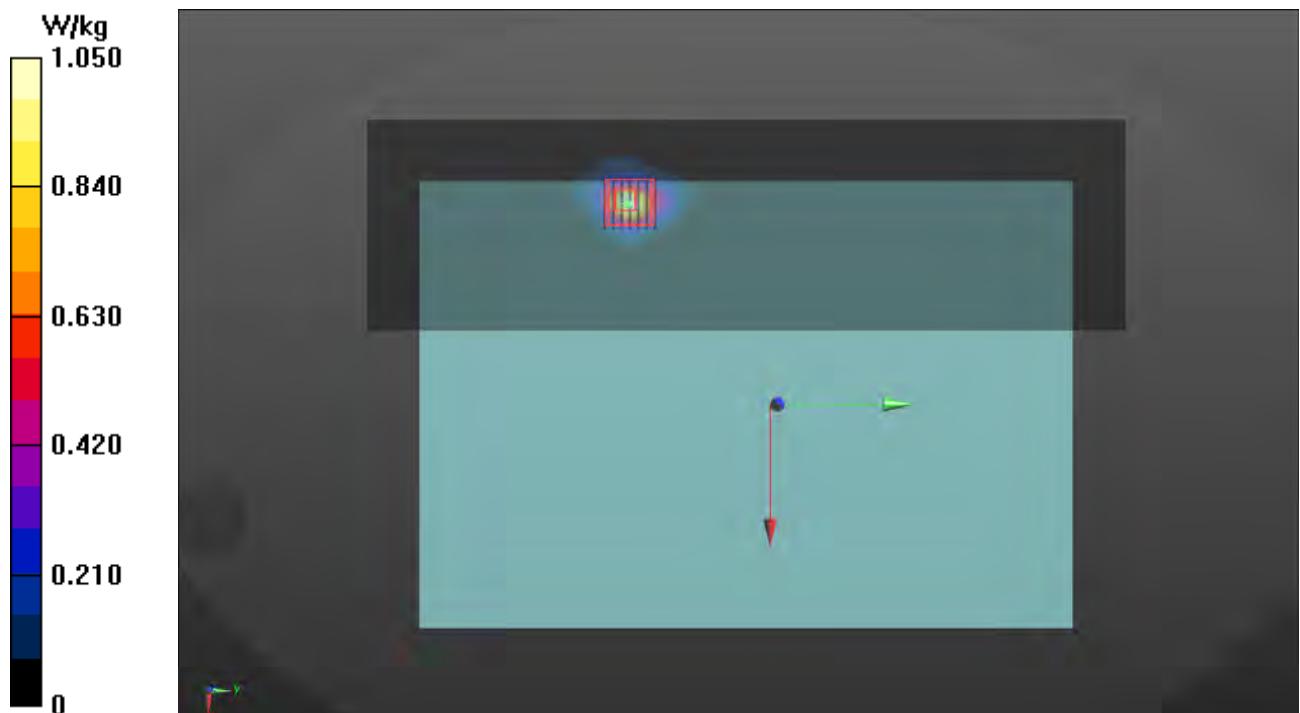

P68 WLAN5.6G_802.11ac VHT80_Bottom_0mm_Ch106_Sample 1_Ant 0+1_P-Sensor_w**DUT: P21080878**

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5530 MHz; Duty Cycle: 1:1.01
Medium: H34T60N1_1002 Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.936$ S/m; $\epsilon_r = 37.233$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 23.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.8, 4.8, 4.8) @ 5530 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 15.14 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.140 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.9%

Maximum value of SAR (measured) = 1.03 W/kg

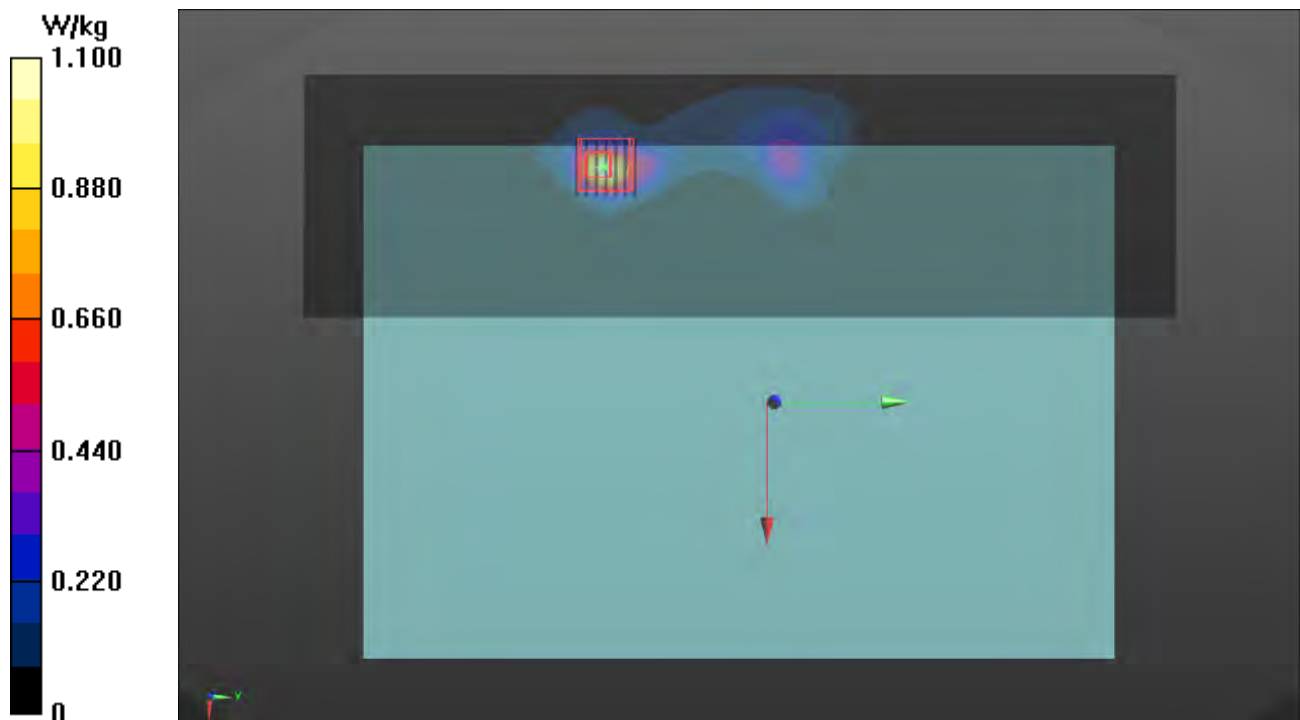

P69 WLAN5.8G_802.11ac VHT80_Bottom_0mm_Ch155_Sample 1_Ant 0_P-Sensor_w**DUT: P21080878**

Communication System: UID 10544 - AAC, IEEE 802.11ac WiFi (80MHz, MCS0); Frequency: 5775 MHz; Duty Cycle: 1:1.01

Medium: H34T60N1_1004 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 36.899$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 23.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(4.95, 4.95, 4.95) @ 5775 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 16.09 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.188 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.4%

Maximum value of SAR (measured) = 1.68 W/kg

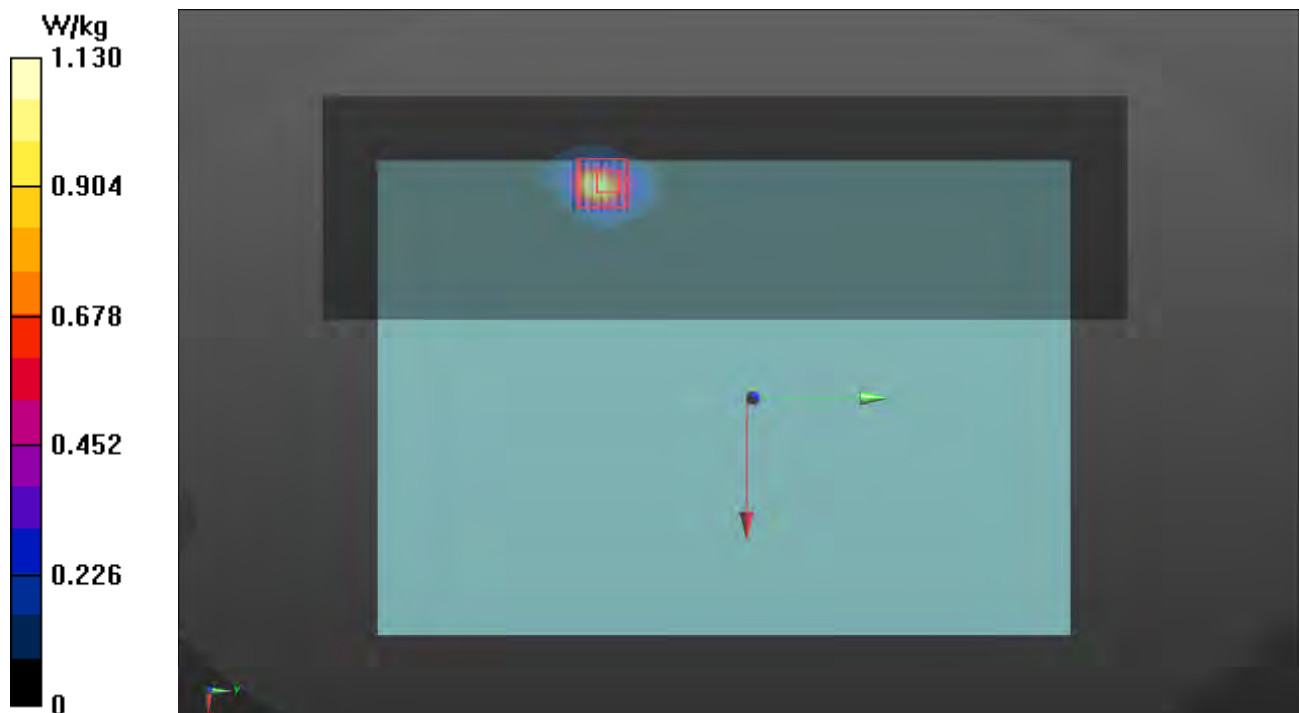

P70 BT_BDR_Bottom_0mm_Ch0_Sample 1_Ant 1**DUT: P21080878**

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.3

Medium: H19T27N1_1004 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.756$ S/m; $\epsilon_r = 37.87$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 23.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7537; ConvF(7.61, 7.61, 7.61) @ 2402 MHz; Calibrated: 2021/04/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1585; Calibrated: 2021/04/15
- Phantom: ELI Phantom_1245; Type: QDOVA002AA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x301x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.566 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.68 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.918 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.127 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 34.4%

Maximum value of SAR (measured) = 0.637 W/kg

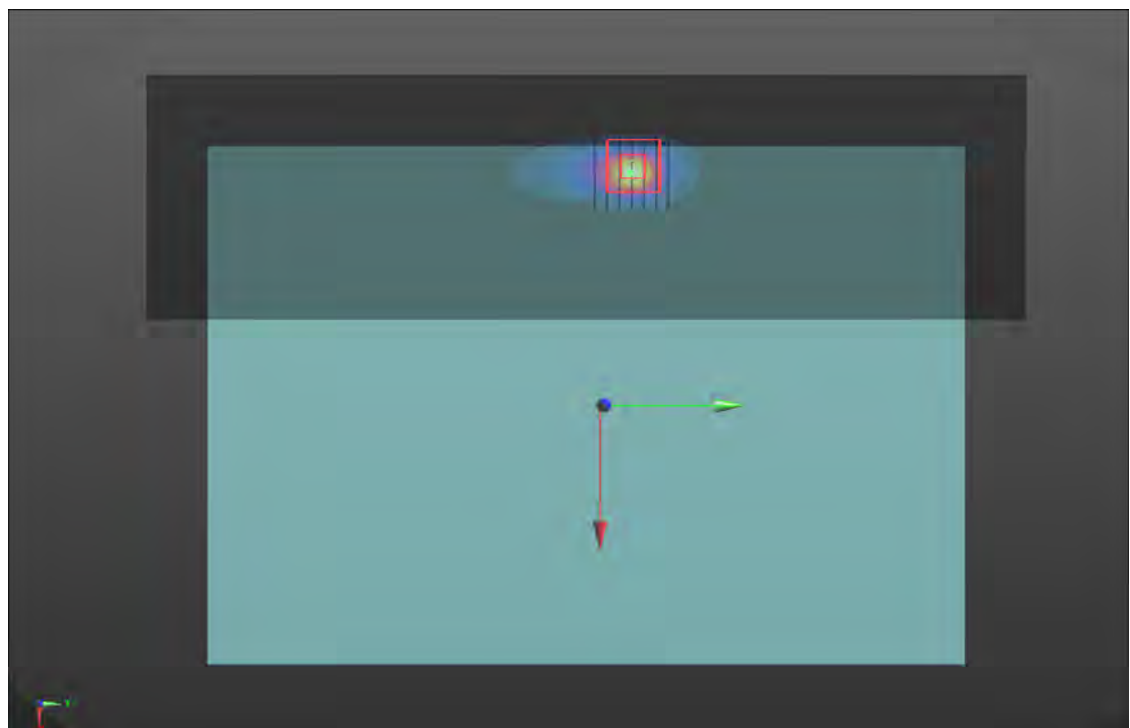

Annex C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within ± 10 % of the target values. Liquid temperature during the SAR testing has kept within ± 2 °C.
2. For Section 4.4, The SAR measurement system was validated according to procedures in KDB 865664 D01. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Annex A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Validation				Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (εr)	Targeted Conductivity (σ)	Targeted Permittivity (εr)	Deviation Conductivity (σ)	Deviation Permittivity (εr)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Measured 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dB)	
S01	1900	23.2	1.463	38.786	1.4	40	4.50	-3.04	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	1900	1.88	-7.15	5d036	7472	579	17	
S02	1750	23.2	1.372	39.052	1.37	40.1	0.15	-2.61	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	1750	1.74	-4.62	1111	7472	579	17	
S03	835	23.2	0.934	40.321	0.9	41.5	3.78	-2.84	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	835	0.488	2.60	4d092	7472	579	17	
S04	1900	23.2	1.463	38.786	1.4	40	4.50	-3.04	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	1900	1.88	-7.15	5d036	7472	579	17	
S05	1900	23.3	1.459	39	1.4	40	4.21	-2.50	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 23, 2021	1900	1.91	-5.67	5d036	7537	1585	17	
S06	1750	23.2	1.372	39.052	1.37	40.1	0.15	-2.61	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	1750	1.74	-4.62	1111	7472	579	17	
S07	835	23.2	0.934	40.321	0.9	41.5	3.78	-2.84	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	835	0.488	2.60	4d092	7472	579	17	
S08	2600	23.2	1.905	37.693	1.96	39	-2.81	-3.35	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	2600	2.8	-3.01	1020	7472	579	17	
S09	2600	23.3	2.011	37.859	1.96	39	2.60	-2.93	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 24, 2021	2600	2.82	-2.32	1020	7537	1585	17	
S10	750	23.2	0.904	41.504	0.89	41.9	1.57	-0.95	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	750	0.404	-6.05	1078	7472	579	17	
S11	750	23.2	0.904	41.504	0.89	41.9	1.57	-0.95	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	750	0.404	-6.05	1078	7472	579	17	
S12	750	23.2	0.904	41.504	0.89	41.9	1.57	-0.95	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	750	0.404	-6.05	1078	7472	579	17	
S13	750	23.2	0.904	41.504	0.89	41.9	1.57	-0.95	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	750	0.404	-6.05	1078	7472	579	17	
S14	1900	23.2	1.463	38.786	1.4	40	4.50	-3.04	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	1900	1.88	-7.15	5d036	7472	579	17	
S15	835	23.2	0.934	40.321	0.9	41.5	3.78	-2.84	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	835	0.488	2.60	4d092	7472	579	17	
S16	2300	23.2	1.68	38.117	1.67	39.5	0.60	-3.50	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	2300	2.39	-3.08	1004	7472	579	17	
S17	2600	23.3	2.011	37.859	1.96	39	2.60	-2.93	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 24, 2021	2600	2.82	-2.32	1020	7537	1585	17	
S18	2600	23.3	2.011	37.859	1.96	39	2.60	-2.93	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 24, 2021	2600	2.82	-2.32	1020	7537	1585	17	
S19	3500	23.2	2.811	38.401	2.91	37.9	-3.40	1.32	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	3500	3.33	1.28	1007	7472	579	17	
S20a	3500	23.2	2.811	38.401	2.91	37.9	-3.40	1.32	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	3500	3.33	1.28	1007	7472	579	17	
S20b	3700	23.2	3.053	37.656	3.12	37.7	-2.15	-0.12	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	3700	3.33	-0.39	1017	7472	579	17	
S21	1750	23.2	1.372	39.052	1.37	40.1	0.15	-2.61	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 21, 2021	1750	1.74	-4.62	1111	7472	579	17	
S22	1750	23.3	1.373	39.042	1.37	40.1	0.22	-2.64	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 23, 2021	1750	1.77	-2.98	1111	7472	579	17	
S23	1900	23.2	1.464	38.853	1.4	40	4.57	-2.87	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	1900	2.2	8.65	5d036	7472	579	17	
S24	1900	23.2	1.464	38.853	1.4	40	4.57	-2.87	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	1900	2.2	8.65	5d036	7472	579	17	
S25	835	23.2	0.918	41.553	0.9	41.5	2.00	0.13	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	835	0.442	-7.07	4d092	7472	579	17	
S26	2600	23.3	1.901	37.616	1.96	39	-3.01	-3.55	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 23, 2021	2600	2.79	-3.35	1020	7472	579	17	
S27	750	23.3	0.904	41.492	0.89	41.9	1.57	-0.97	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 23, 2021	750	0.463	7.67	1078	7472	579	17	
S28	2600	23.3	1.901	37.616	1.96	39	-3.01	-3.55	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 23, 2021	2600	2.79	-3.35	1020	7472	579	17	
S29	1750	23.2	1.373	39.122	1.37	40.1	0.22	-2.44	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	1750	1.8	-1.33	1111	7472	579	17	
S30	1750	23.2	1.373	39.122	1.37	40.1	0.22	-2.44	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 22, 2021	1750	1.8	-1.33	1111	7472	579	17	
S31	2450	23.2	1.883	38.286	1.8	39.2	4.61	-2.33	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 29, 2021	2450	2.46	-6.86	835	7537	1585	17	
S32	5250	23.2	4.564	36.045	4.71	35.9	-3.10	0.40	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 30, 2021	5250	3.76	-6.92	1019	7537	1585	17	
S33	5600	23.2	4.893	35.577	5.07	35.5	-3.49	0.22	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 30, 2021	5600	4.22	2.18	1019	7537	1585	17	
S34	5750	23.1	5.164	37.001	5.22	35.4	-1.07	4.52	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 02, 2021	5750	3.61	-9.28	1019	7537	1585	17	
S35	2450	23.2	1.883	38.286	1.8	39.2	4.61	-2.33	Pass	Pass	Pass	OFDM	N/A	Pass	Sep. 29, 2021	2450	2.46	-6.86	835	7537	1585	17	
S36	1900	23.3	1.46	39.237	1.4	40	4.29	-1.91	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	1900	1.83	-9.62	5d036	7537	1585	17	
S37	1750	23.4	1.329	39.813	1.37	40.1	-2.99	-0.72	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	1750	1.84	0.86	1111	7537	1585	17	
S38	835	23.4	0.919	41.768	0.9	41.5	2.11	0.65	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	835	0.429	-0.16	4d092	7537	1585	17	
S39	1900	23.1	1.463	38.849	1.4	40	4.50	-2.88	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	1900	2.01	-0.73	5d036	3650	1277	17	
S40	1900	23.4	1.46	39.237	1.4	40	4.29	-1.91	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	1900	1.86	-8.14	5d036	3887	861	17	
S41	1750	23.1	1.373	39.123	1.37	40.1	0.22	-2.44	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	1750	1.82	-0.24	1111	3650	1277	17	
S42	835	23.1	0.912	42.58	0.9	41.5	1.33	2.60	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	835	0.495	4.07	4d092	3650	1277	17	
S43	2600	23.4	2.045	37.845	1.96	39	4.34	-2.96	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	2600	3.08	6.69	1020	7537	1585	17	
S44	2600	23.4	2.045	37.845	1.96	39	4.34	-2.96	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	2600	3.08	6.69	1020	7537	1585	17	
S45	750	23.1	0.885	42.46	0.89	41.9	-0.56	1.34	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	750	0.407	-5.35	1078	3650	1277	17	
S46	750	23.1	0.885	42.46	0.89	41.9	-0.56	1.34	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	750	0.407	-5.35	1078	3650	1277	17	
S47	750	23.1	0.885	42.46	0.89	41.9	-0.56	1.34	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	750	0.407	-5.35	1078	3650	1277	17	
S48	750	23.1	0.885	42.46	0.89	41.9	-0.56	1.34	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	750	0.407	-5.35	1078	3650	1277	17	
S49	1900	23.1	1.463	38.849	1.4	40	4.50	-2.88	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	1900	2.01	-0.73	5d036	3650	1277	17	
S50	835	23.1	0.912	42.58	0.9	41.5	1.33	2.60	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	835	0.495	4.07	4d092	3650	1277	17	
S51	2300	23.1	1.715	38.517	1.67	39.5	2.69	-2.49	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	2300	2.3	-6.73	1004	3650	1277	17	
S52	2600	23.4	2.045	37.845	1.96	39	4.34	-2.96	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	2600	2.97	2.88	1020	3887	861	17	
S53	2600	23.4	2.045	37.845	1.96	39	4.34	-2.96	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	2600	2.97	2.88	1020	3887	861	17	
S54	3500	23.4	2.922	37.443	2.91	37.9	0.41	-1.21	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	3500	3.45	4.93	1007	3887	861	17	
S55a	3500	23.3	2.903	36.992	2.91	37.9	-0.24	-2.40	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 28, 2021	3500	2.97	-9.67	1007	7537	1585	17	
S55b	3700	23.3	3.109	36.385	3.12	37.7	-0.35	-3.49	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 28, 2021	3700	3.36	0.51	1017	7537	1585	17	
S56	1750	23.1	1.373	39.123	1.37	40.1	0.22	-2.44	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 26, 2021	1750	1.82	-0.24	1111	3650	1277	17	
S57	1750	23.4	1.329	39.813	1.37	40.1	-2.99	-0.72	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 27, 2021	1750	1.94	6.34	1111	3887	861	17	
S58	1900	23.3	1.458	39.578	1.4	40	4.14	-1.05	Pass	Pass	Pass	N/A	N/A	N/A	Oct. 08, 2021	1900	2.07	2.23	5d036	7537	1585	17	

Tissue Verification									Validation for CW			Validation for Modulation				System Validation			Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Targeted Conductivity (σ)	Targeted Permittivity (ε _r)	Deviation Conductivity (σ)	Deviation Permittivity (ε _r)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Measured 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dB)
S61	2600	23.3	2.03	38.531	1.96	39	3.57	-1.20	Pass	Pass	Pass	N/A	N/A	N/A	Oct. 08, 2021	2600	2.85	-1.28	1020	7537	1585	17
S62	750	23.3	0.9	42.71	0.89	41.9	1.12	1.93	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 28, 2021	750	0.41	-4.66	1078	7537	1585	17
S63	2600	23.4	2.036	37.736	1.96	39	3.88	-3.24	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 29, 2021	2600	2.65	-8.20	1020	7554	915	17
S64	1750	23.4	1.324	39.572	1.37	40.1	-3.36	-1.32	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 29, 2021	1750	1.73	-5.17	1111	7554	915	17
S65	1750	23.4	1.324	39.572	1.37	40.1	-3.36	-1.32	Pass	Pass	Pass	N/A	N/A	N/A	Sep. 29, 2021	1750	1.73	-5.17	1111	7554	915	17
S66	2450	23.1	1.795	37.932	1.8	39.2	-0.28	-3.23	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 01, 2021	2450	2.66	0.71	835	7537	1585	17
S67	5250	23.1	4.692	37.651	4.71	35.9	-0.38	4.88	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 02, 2021	5250	4.23	4.71	1019	7537	1585	17
S68	5600	23.1	5.029	37.237	5.07	35.5	-0.81	4.89	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 02, 2021	5600	3.98	-3.63	1019	7537	1585	17
S69	5750	23.5	5.164	37.001	5.22	35.4	-1.07	4.52	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 04, 2021	5750	3.79	-4.76	1019	7537	1585	17
S70	2450	23.5	1.79	37.777	1.8	39.2	-0.56	-3.63	Pass	Pass	Pass	OFDM	N/A	Pass	Oct. 04, 2021	2450	2.61	-1.18	835	7537	1585	17

Annex D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WCDMA Max. Tune-up Power (Laptop Full Ant0)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	24.5	24.5
WCDMA Band IV	24.5	24.5
WCDMA Band V	24.5	24.5

LTE Max. Tune-up Power (Laptop Full Ant0)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	24.0	23.0	22.0	19.0
LTE 4	24.0	23.0	22.0	19.0
LTE 5	24.5	23.5	22.5	19.5
LTE 7	24.0	23.0	22.0	19.0
LTE 12	24.5	23.5	22.5	19.5
LTE 13	24.5	23.5	22.5	19.5
LTE 14	24.5	23.5	22.5	19.5
LTE 17	24.5	23.5	22.5	19.5
LTE 25	24.0	23.0	22.0	19.0
LTE 26	24.5	23.5	22.5	19.5
LTE 30	23.0	22.0	21.0	18.0
LTE 38	24.0	23.0	22.0	19.0
LTE 41	24.0	23.0	22.0	19.0
LTE 66	24.0	23.0	22.0	19.0

5G NR Max. Tune-up Power (Laptop Full Ant0)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	24.0	24.0	23.0	21.5	19.5
NR 5	24.0	24.0	23.0	21.5	19.5
NR 12	24.0	24.0	23.0	21.5	19.5
NR 66	24.0	24.0	23.0	21.5	19.5

5G NR Max. Tune-up Power (Laptop Full Ant0)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	22.5	22.0	20.5	17.5
NR 5	22.5	22.0	20.5	17.5
NR 12	22.5	22.0	20.5	17.5
NR 66	22.5	22.0	20.5	17.5

LTE Max. Tune-up Power (Laptop Full Ant2)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	24.0	23.0	22.0	19.0
LTE 7	24.0	23.0	22.0	19.0
LTE 42	24.0	23.0	22.0	19.0
LTE 48	22.0	21.0	20.0	17.0
LTE 66	24.0	23.0	22.0	19.0

5G NR Max. Tune-up Power (Laptop Full Ant2)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	24.0	24.0	23.0	21.5	19.5
NR 7	24.0	24.0	23.0	21.5	19.5
NR 41	27.0	27.0	26.0	24.5	22.5
NR 66	24.0	24.0	23.0	21.5	19.5

5G NR Max. Tune-up Power (Laptop Full Ant2)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	22.5	22.0	20.5	17.5
NR 7	22.5	22.0	20.5	17.5
NR 41	25.5	25.0	23.5	20.5
NR 66	22.5	22.0	20.5	17.5

WCDMA Max. Tune-up Power (Tablet Full Ant0)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	24.5	24.5
WCDMA Band IV	24.5	24.5
WCDMA Band V	24.5	24.5

LTE Max. Tune-up Power (Tablet Full Ant0)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	24.0	23.0	22.0	19.0
LTE 4	24.0	23.0	22.0	19.0
LTE 5	24.5	23.5	22.5	19.5
LTE 7	24.0	23.0	22.0	19.0
LTE 12	24.5	23.5	22.5	19.5
LTE 13	24.5	23.5	22.5	19.5
LTE 14	24.5	23.5	22.5	19.5
LTE 17	24.5	23.5	22.5	19.5
LTE 25	24.0	23.0	22.0	19.0
LTE 26	24.5	23.5	22.5	19.5
LTE 30	23.0	22.0	21.0	18.0
LTE 38	24.0	23.0	22.0	19.0
LTE 41	24.0	23.0	22.0	19.0
LTE 66	24.0	23.0	22.0	19.0

5G NR Max. Tune-up Power (Tablet Full Ant0)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	24.0	24.0	23.0	21.5	19.5
NR 5	24.0	24.0	23.0	21.5	19.5
NR 12	24.0	24.0	23.0	21.5	19.5
NR 66	24.0	24.0	23.0	21.5	19.5

5G NR Max. Tune-up Power (Tablet Full Ant0)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	22.5	22.0	20.5	17.5
NR 5	22.5	22.0	20.5	17.5
NR 12	22.5	22.0	20.5	17.5
NR 66	22.5	22.0	20.5	17.5

LTE Max. Tune-up Power (Tablet Full Ant2)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	21.0	21.0	21.0	19.0
LTE 7	20.5	20.5	20.5	20.5
LTE 42	15.5	15.5	15.5	15.5
LTE 48	16.0	16.0	16.0	16.0
LTE 66	21.0	21.0	21.0	21.0

5G NR Max. Tune-up Power (Tablet Full Ant2)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	20.0	20.0	19.0	17.5	15.5
NR 7	20.0	20.0	19.0	17.5	15.5
NR 41	21.0	21.0	20.0	18.5	16.5
NR 66	19.0	19.0	18.0	16.5	14.5

5G NR Max. Tune-up Power (Tablet Full Ant2)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	18.5	18.0	16.5	13.5
NR 7	18.5	18.0	16.5	13.5
NR 41	19.5	19.0	17.5	14.5
NR 66	17.5	17.0	15.5	12.5

WCDMA Max. Tune-up Power (Laptop Reduction Ant0)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	16.5	16.5
WCDMA Band IV	17.5	17.5
WCDMA Band V	21.0	21.0

LTE Max. Tune-up Power (Laptop Reduction Ant0)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	13.0	13.0	13.0	13.0
LTE 4	13.0	13.0	13.0	13.0
LTE 5	17.5	17.5	17.5	17.5
LTE 7	9.5	9.5	9.5	9.5
LTE 12	18.0	18.0	18.0	18.0
LTE 13	17.5	17.5	17.5	17.5
LTE 14	17.5	17.5	17.5	17.5
LTE 17	18.0	18.0	18.0	18.0
LTE 25	13.0	13.0	13.0	13.0
LTE 26	18.0	18.0	18.0	18.0
LTE 30	13.5	13.5	13.5	13.5
LTE 38	13.0	13.0	13.0	13.0
LTE 41	11.5	11.5	11.5	11.5
LTE 66	13.5	13.5	13.5	13.5

5G NR Max. Tune-up Power (Laptop Reduction Ant0)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	15.5	15.5	14.5	13.0	11.0
NR 5	17.5	17.5	16.5	15.0	13.0
NR 12	16.5	16.5	15.5	14.0	12.0
NR 66	12.0	12.0	11.0	9.0	7.0

5G NR Max. Tune-up Power (Laptop Reduction Ant0)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	14.0	13.5	12.0	9.0
NR 5	16.0	15.5	14.0	11.0
NR 12	15.0	14.5	13.0	10.0
NR 70	10.5	10.0	8.5	5.5

LTE Max. Tune-up Power (Laptop Reduction Ant2)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	14.0	14.0	14.0	14.0
LTE 7	11.5	11.5	11.5	11.5
LTE 42	10.5	10.5	10.5	10.5
LTE 48	10.0	10.0	10.0	10.0
LTE 66	14.0	14.0	14.0	14.0

5G NR Max. Tune-up Power (Laptop Reduction Ant2)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	15.5	15.5	14.5	13.0	11.0
NR 7	12.0	12.0	11.0	9.5	7.5
NR 41	10.0	10.0	9.0	7.5	5.5
NR 66	12.0	12.0	11.0	9.5	7.5

5G NR Max. Tune-up Power (Laptop Reduction Ant2)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	21.0	20.5	19.0	16.0
NR 7	21.0	20.5	19.0	16.0
NR 48	24.0	23.5	22.0	19.0
NR 70	21.0	20.5	19.0	16.0

LTE Max. Tune-up Power (Tablet Reduction Ant0)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	11.5	10.5	9.5	6.5
LTE 4	11.0	10.0	9.0	6.0
LTE 5	16.0	15.0	14.0	11.0
LTE 7	8.5	7.5	6.5	3.5
LTE 12	16.5	15.5	14.5	11.5
LTE 13	16.0	15.0	14.0	11.0
LTE 14	16.5	15.5	14.5	11.5
LTE 17	16.0	15.0	14.0	11.0
LTE 25	11.5	10.5	9.5	6.5
LTE 26	16.5	15.5	14.5	11.5
LTE 30	12.0	11.0	10.0	7.0
LTE 38	12.0	11.0	10.0	7.0
LTE 41	11.0	10.0	9.0	6.0
LTE 66	11.0	10.0	9.0	6.0

5G NR Max. Tune-up Power (Tablet Reduction Ant0)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	13.5	13.5	12.5	11.0	9.0
NR 5	15.5	15.5	14.5	13.0	11.0
NR 12	15.0	15.0	14.0	12.5	10.5
NR 66	13.0	13.0	12.0	10.5	8.5

5G NR Max. Tune-up Power (Tablet Reduction Ant0)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	12.0	11.5	10.0	7.0
NR 5	14.0	13.5	12.0	9.0
NR 12	13.5	13.0	11.5	8.5
NR 70	11.5	11.0	9.5	6.5

LTE Max. Tune-up Power (Tablet Reduction Ant2)				
Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	14.0	14.0	14.0	14.0
LTE 7	11.0	11.0	11.0	11.0
LTE 42	8.0	8.0	8.0	8.0
LTE 48	8.5	8.5	8.5	8.5
LTE 66	14.5	14.5	14.5	14.5

5G NR Max. Tune-up Power (Tablet Reduction Ant2)					
DFT-S Mode	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	13.5	13.5	12.5	11.0	9.0
NR 7	12.0	12.0	11.0	9.5	7.5
NR 41	12.0	12.0	11.0	9.5	7.5
NR 66	13.0	13.0	12.0	10.5	8.5

5G NR Max. Tune-up Power (Tablet Reduction Ant2)				
CP Mode	QPSK	16QAM	64QAM	256QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power	Maximum Target Power
NR 2	12.0	11.5	10.0	7.0
NR 7	10.5	10.0	8.5	5.5
NR 48	10.5	10.0	8.5	5.5
NR 70	11.5	11.0	9.5	6.5

WLAN Tune-up Power (Laptop Full)							
WLAN2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	21.0	21.0			
	6	2437	21.0	21.0			
	11	2462	21.0	21.0			
	12	2467	20.0	20.0			
	13	2472	17.0	17.0			
802.11g	1	2412	20.0	20.0			
	6	2437	21.0	21.0			
	11	2462	21.0	21.0			
	12	2467	15.5	15.5			
	13	2472	12.5	12.5			
802.11n HT20	1	2412	19.5	19.5	17.0	17.0	20.0
	6	2437	22.0	22.0	20.5	20.5	23.5
	11	2462	18.5	18.5	17.5	17.5	20.5
	12	2467	15.5	15.5	12.0	12.0	15.0
	13	2472	12.5	12.5	9.0	9.0	12.0
802.11n HT40	3	2422	16.5	16.5	16.0	16.0	19.0
	6	2437	18.0	18.0	16.0	16.0	19.0
	9	2452	17.5	17.5	16.0	16.0	19.0
	10	2457	13.0	13.0	12.0	12.0	15.0
	11	2462	11.5	11.5	9.0	9.0	12.0
802.11ax HE20	1	2412	19.5	19.5	17.0	17.0	20.0
	6	2437	22.0	22.0	20.5	20.5	23.5
	11	2462	18.5	18.5	17.5	17.5	20.5
	12	2467	15.5	15.5	12.0	12.0	15.0
	13	2472	12.5	12.5	9.0	9.0	12.0
802.11ax HE40	3	2422	16.5	16.5	16.0	16.0	19.0
	6	2437	18.0	18.0	16.0	16.0	19.0
	9	2452	17.5	17.5	16.0	16.0	19.0
	10	2457	13.0	13.0	12.0	12.0	15.0
	11	2462	11.5	11.5	9.0	9.0	12.0

WLAN Tune-up Power (Laptop Full)					
Bluetooth					
Mode	Channel	Frequency		Ant 1 Max Tune-up	
BR / EDR	0	2402		10.5	
	39	2441		10.5	
	78	2480		10.5	
LE	0	2402		9.0	
	19	2440		9.0	
	39	2480		9.0	

WLAN Tune-up Power (Laptop Full)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	20.0	20.0			
	40	5200	21.0	21.0			
	44	5220	21.0	21.0			
	48	5240	21.0	21.0			
802.11n HT20	36	5180	20.0	20.0	18.5	18.5	21.5
	40	5200	21.0	21.0	19.0	19.0	22.0
	44	5220	21.0	21.0	19.0	19.0	22.0
	48	5240	21.0	21.0	19.0	19.0	22.0
802.11n HT40	38	5190	18.5	18.5	16.0	16.0	19.0
	46	5230	21.5	21.5	21.0	21.0	24.0
802.11ac VHT80	42	5210	17.5	17.5	15.0	15.0	18.0
802.11ax HE20	36	5180	20.0	20.0	18.5	18.5	21.5
	40	5200	21.0	21.0	19.0	19.0	22.0
	44	5220	21.0	21.0	19.0	19.0	22.0
	48	5240	21.0	21.0	19.0	19.0	22.0
802.11ax HE40	38	5190	18.5	18.5	16.0	16.0	19.0
	46	5230	21.5	21.5	21.0	21.0	24.0
802.11ax HE80	42	5210	17.5	17.5	15.0	15.0	18.0

WLAN Tune-up Power (Laptop Full)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	20.0	20.0			
	56	5280	21.0	21.0			
	60	5300	21.0	21.0			
	64	5320	21.0	21.0			
802.11n HT20	52	5260	20.0	20.0	18.5	18.5	21.5
	56	5280	21.0	21.0	19.0	19.0	22.0
	60	5300	21.0	21.0	19.0	19.0	22.0
	64	5320	21.0	21.0	19.0	19.0	22.0
802.11n HT40	54	5270	18.5	18.5	16.0	16.0	19.0
	62	5310	21.5	21.5	19.0	19.0	22.0
802.11ac VHT80	58	5290	17.5	17.5	15.0	15.0	18.0
802.11ac VHT160	50	5250	15.5	15.5	13.0	13.0	16.0
802.11ax HE20	52	5260	20.0	20.0	18.5	18.5	21.5
	56	5280	21.0	21.0	19.0	19.0	22.0
	60	5300	21.0	21.0	19.0	19.0	22.0
	64	5320	21.0	21.0	19.0	19.0	22.0
802.11ax HE40	54	5270	18.5	18.5	16.0	16.0	19.0
	62	5310	21.5	21.5	19.0	19.0	22.0
802.11ax HE80	58	5290	17.5	17.5	15.0	15.0	18.0
802.11ax HE160	50	5250	15.5	15.5	13.0	13.0	16.0

WLAN Tune-up Power (Laptop Full)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	21.0	21.0			
	116	5580	21.0	21.0			
	120	5600	21.0	21.0			
	124	5620	21.0	21.0			
	132	5660	21.0	21.0			
	140	5700	21.0	21.0			
802.11n HT20	100	5500	21.0	21.0	19.0	19.0	22.0
	116	5580	21.0	21.0	19.0	19.0	22.0
	120	5600	21.0	21.0	19.0	19.0	22.0
	124	5620	21.0	21.0	19.0	19.0	22.0
	132	5660	21.0	21.0	19.0	19.0	22.0
	140	5700	21.0	21.0	19.0	19.0	22.0
	144	5720	21.0	21.0	19.0	19.0	22.0
802.11n HT40	102	5510	21.0	21.0	18.5	18.5	21.5
	110	5550	21.0	21.0	18.5	18.5	21.5
	118	5590	21.0	21.0	21.0	21.0	24.0
	126	5630	21.0	21.0	21.0	21.0	24.0
	134	5670	21.0	21.0	20.0	20.0	23.0
	142	5710	21.0	21.0	20.0	20.0	23.0
802.11ac VHT80	106	5530	18.0	18.0	13.0	13.0	16.0
	122	5610	16.0	19.0	21.0	21.0	24.0
	138	5690	16.0	19.0	21.0	21.0	24.0
802.11ac VHT160	114	5570	16.0	17.0	15.0	15.0	18.0
802.11ax HE20	100	5500	21.0	21.0	19.0	19.0	22.0
	116	5580	21.0	21.0	19.0	19.0	22.0
	120	5600	21.0	21.0	19.0	19.0	22.0
	124	5620	21.0	21.0	19.0	19.0	22.0
	132	5660	21.0	21.0	19.0	19.0	22.0
	140	5700	21.0	21.0	19.0	19.0	22.0
	144	5720	21.0	21.0	19.0	19.0	22.0
802.11ax HE40	102	5510	21.0	21.0	18.5	18.5	21.5
	110	5550	21.0	21.0	18.5	18.5	21.5
	118	5590	21.0	21.0	21.0	21.0	24.0
	126	5630	21.0	21.0	21.0	21.0	24.0
	134	5670	21.0	21.0	20.0	20.0	23.0
	142	5710	21.0	21.0	20.0	20.0	23.0
802.11ax HE80	106	5530	18.5	20.0	13.0	13.0	16.0
	122	5610	18.5	20.0	21.0	21.0	24.0
	138	5690	18.5	20.0	21.0	21.0	24.0
802.11ax HE160	114	5570	16.5	17.5	15.0	15.0	18.0

WLAN Tune-up Power (Laptop Full)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	21.0	21.0			
	153	5765	21.0	21.0			
	157	5785	21.0	21.0			
	161	5805	21.0	21.0			
	165	5825	21.0	21.0			
802.11n HT20	149	5745	21.0	21.0	21.0	21.0	24.0
	153	5765	21.0	21.0	21.0	21.0	24.0
	157	5785	21.0	21.0	21.0	21.0	24.0
	161	5805	21.0	21.0	21.0	21.0	24.0
	165	5825	21.0	21.0	21.0	21.0	24.0
802.11n HT40	151	5755	21.0	21.0	21.0	21.0	24.0
	159	5795	21.0	21.0	21.0	21.0	24.0
802.11ac VHT80	155	5775	21.0	21.0	20.0	20.0	23.0
802.11ax HE20	149	5745	21.0	21.0	21.0	21.0	24.0
	153	5765	21.0	21.0	21.0	21.0	24.0
	157	5785	21.0	21.0	21.0	21.0	24.0
	161	5805	21.0	21.0	21.0	21.0	24.0
	165	5825	21.0	21.0	21.0	21.0	24.0
802.11ax HE40	151	5755	21.0	21.0	21.0	21.0	24.0
	159	5795	21.0	21.0	21.0	21.0	24.0
802.11ax HE80	155	5775	21.0	21.0	20.0	20.0	23.0

WLAN Tune-up Power (Tablet Full)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	18.0	18.0			
	6	2437	18.0	18.0			
	11	2462	18.0	18.0			
	12	2467	18.0	18.0			
	13	2472	18.0	18.0			
802.11g	1	2412	18.0	18.0	18.0	18.0	21.0
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	18.0	18.0	18.0	18.0	21.0
	12	2467	18.0	18.0	18.0	18.0	21.0
	13	2472	18.0	18.0	18.0	18.0	21.0
802.11n HT20	1	2412	18.0	18.0	18.0	18.0	21.0
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	18.0	18.0	18.0	18.0	21.0
	12	2467	18.0	18.0	18.0	18.0	21.0
	13	2472	18.0	18.0	18.0	18.0	21.0
802.11n HT40	3	2422	18.0	18.0	18.0	18.0	21.0
	6	2437	18.0	18.0	18.0	18.0	21.0
	9	2452	18.0	18.0	18.0	18.0	21.0
	10	2457	18.0	18.0	18.0	18.0	21.0
	11	2462	18.0	18.0	18.0	18.0	21.0
802.11ax HE20	1	2412	18.0	18.0	18.0	18.0	21.0
	6	2437	18.0	18.0	18.0	18.0	21.0
	11	2462	18.0	18.0	18.0	18.0	21.0
	12	2467	18.0	18.0	18.0	18.0	21.0
	13	2472	18.0	18.0	18.0	18.0	21.0
802.11ax HE40	3	2422	18.0	18.0	18.0	18.0	21.0
	6	2437	18.0	18.0	18.0	18.0	21.0
	9	2452	18.0	18.0	18.0	18.0	21.0
	10	2457	18.0	18.0	18.0	18.0	21.0
	11	2462	18.0	18.0	18.0	18.0	21.0

WLAN Tune-up Power (Tablet Full)					
Bluetooth					
Mode	Channel	Frequency	Ant 0 Max Tune-up	Ant 1 Max Tune-up	
BR / EDR	0	2402		10.5	
	39	2441		10.5	
	78	2480		10.5	
LE	0	2402		9.0	
	19	2440		9.0	
	39	2480		9.0	

WLAN Tune-up Power (Tablet Full)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	15.0	15.0			
	40	5200	15.0	15.0			
	44	5220	15.0	15.0			
	48	5240	15.0	15.0			
802.11n HT20	36	5180	15.0	15.0	15.0	15.0	18.0
	40	5200	15.0	15.0	15.0	15.0	18.0
	44	5220	15.0	15.0	15.0	15.0	18.0
	48	5240	15.0	15.0	15.0	15.0	18.0
802.11n HT40	38	5190	15.0	15.0	15.0	15.0	18.0
	46	5230	15.0	15.0	15.0	15.0	18.0
802.11ac VHT80	42	5210	15.0	15.0	15.0	15.0	18.0
802.11ax HE20	36	5180	15.0	15.0	15.0	15.0	18.0
	40	5200	15.0	15.0	15.0	15.0	18.0
	44	5220	15.0	15.0	15.0	15.0	18.0
	48	5240	15.0	15.0	15.0	15.0	18.0
802.11ax HE40	38	5190	15.0	15.0	15.0	15.0	18.0
	46	5230	15.0	15.0	15.0	15.0	18.0
802.11ax HE80	42	5210	15.0	15.0	15.0	15.0	18.0

WLAN Tune-up Power (Tablet Full)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	15.0	15.0			
	56	5280	15.0	15.0			
	60	5300	15.0	15.0			
	64	5320	15.0	15.0			
802.11n HT20	52	5260	15.0	15.0	15.0	15.0	18.0
	56	5280	15.0	15.0	15.0	15.0	18.0
	60	5300	15.0	15.0	15.0	15.0	18.0
	64	5320	15.0	15.0	15.0	15.0	18.0
802.11n HT40	54	5270	15.0	15.0	15.0	15.0	18.0
	62	5310	15.0	15.0	15.0	15.0	18.0
802.11ac VHT80	58	5290	15.0	15.0	15.0	15.0	18.0
802.11ac VHT160	50	5250	15.0	15.0	15.0	15.0	18.0
802.11ax HE20	52	5260	15.0	15.0	15.0	15.0	18.0
	56	5280	15.0	15.0	15.0	15.0	18.0
	60	5300	15.0	15.0	15.0	15.0	18.0
	64	5320	15.0	15.0	15.0	15.0	18.0
802.11ax HE40	54	5270	15.0	15.0	15.0	15.0	18.0
	62	5310	15.0	15.0	15.0	15.0	18.0
802.11ax HE80	58	5290	15.0	15.0	15.0	15.0	18.0
802.11ax HE160	50	5250	15.0	15.0	15.0	15.0	18.0

WLAN Tune-up Power (Tablet Full)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	13.5	13.5			
	116	5580	13.5	13.5			
	120	5600	13.5	13.5			
	124	5620	13.5	13.5			
	132	5660	13.5	13.5			
	140	5700	13.5	13.5			
802.11n HT20	100	5500	13.5	13.5	13.5	13.5	16.5
	116	5580	13.5	13.5	13.5	13.5	16.5
	120	5600	13.5	13.5	13.5	13.5	16.5
	124	5620	13.5	13.5	13.5	13.5	16.5
	132	5660	13.5	13.5	13.5	13.5	16.5
	140	5700	13.5	13.5	13.5	13.5	16.5
	144	5720	13.5	13.5	13.5	13.5	16.5
802.11n HT40	102	5510	13.5	13.5	13.5	13.5	16.5
	110	5550	13.5	13.5	13.5	13.5	16.5
	118	5590	13.5	13.5	13.5	13.5	16.5
	126	5630	13.5	13.5	13.5	13.5	16.5
	134	5670	13.5	13.5	13.5	13.5	16.5
	142	5710	13.5	13.5	13.5	13.5	16.5
802.11ac VHT80	106	5530	13.5	13.5	13.5	13.5	16.5
	122	5610	13.5	13.5	13.5	13.5	16.5
	138	5690	13.5	13.5	13.5	13.5	16.5
802.11ac VHT160	114	5570	13.5	13.5	13.5	13.5	16.5
802.11ax HE20	100	5500	13.5	13.5	13.5	13.5	16.5
	116	5580	13.5	13.5	13.5	13.5	16.5
	120	5600	13.5	13.5	13.5	13.5	16.5
	124	5620	13.5	13.5	13.5	13.5	16.5
	132	5660	13.5	13.5	13.5	13.5	16.5
	140	5700	13.5	13.5	13.5	13.5	16.5
	144	5720	13.5	13.5	13.5	13.5	16.5
802.11ax HE40	102	5510	13.5	13.5	13.5	13.5	16.5
	110	5550	13.5	13.5	13.5	13.5	16.5
	118	5590	13.5	13.5	13.5	13.5	16.5
	126	5630	13.5	13.5	13.5	13.5	16.5
	134	5670	13.5	13.5	13.5	13.5	16.5
	142	5710	13.5	13.5	13.5	13.5	16.5
802.11ax HE80	106	5530	13.5	13.5	13.5	13.5	16.5
	122	5610	13.5	13.5	13.5	13.5	16.5
	138	5690	13.5	13.5	13.5	13.5	16.5
802.11ax HE160	114	5570	13.5	13.5	13.5	13.5	16.5

WLAN Tune-up Power (Tablet Full)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	13.5	13.5			
	153	5765	13.5	13.5			
	157	5785	13.5	13.5			
	161	5805	13.5	13.5			
	165	5825	13.5	13.5			
802.11n HT20	149	5745	13.5	13.5	13.5	13.5	16.5
	153	5765	13.5	13.5	13.5	13.5	16.5
	157	5785	13.5	13.5	13.5	13.5	16.5
	161	5805	13.5	13.5	13.5	13.5	16.5
	165	5825	13.5	13.5	13.5	13.5	16.5
802.11n HT40	151	5755	13.5	13.5	13.5	13.5	16.5
	159	5795	13.5	13.5	13.5	13.5	16.5
802.11ac VHT80	155	5775	13.5	13.5	13.5	13.5	16.5
802.11ax HE20	149	5745	13.5	13.5	13.5	13.5	16.5
	153	5765	13.5	13.5	13.5	13.5	16.5
	157	5785	13.5	13.5	13.5	13.5	16.5
	161	5805	13.5	13.5	13.5	13.5	16.5
	165	5825	13.5	13.5	13.5	13.5	16.5
802.11ax HE40	151	5755	13.5	13.5	13.5	13.5	16.5
	159	5795	13.5	13.5	13.5	13.5	16.5
802.11ax HE80	155	5775	13.5	13.5	13.5	13.5	16.5

WLAN Tune-up Power (Laptop Reduction)							
WLAN2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	12.5	12.5			
	6	2437	12.5	12.5			
	11	2462	12.5	12.5			
	12	2467	12.5	12.5			
	13	2472	12.5	12.5			
802.11g	1	2412	12.5	12.5			
	6	2437	12.5	12.5			
	11	2462	12.5	12.5			
	12	2467	12.5	12.5			
	13	2472	12.5	12.5			
802.11n HT20	1	2412	12.5	12.5	12.5	12.5	15.5
	6	2437	12.5	12.5	12.5	12.5	15.5
	11	2462	12.5	12.5	12.5	12.5	15.5
	12	2467	12.5	12.5	12.5	12.5	15.5
	13	2472	12.5	12.5	12.5	12.5	15.5
802.11n HT40	3	2422	12.5	12.5	12.5	12.5	15.5
	6	2437	12.5	12.5	12.5	12.5	15.5
	9	2452	12.5	12.5	12.5	12.5	15.5
	10	2457	12.5	12.5	12.5	12.5	15.5
	11	2462	12.5	12.5	12.5	12.5	15.5
802.11ax HE20	1	2412	12.5	12.5	12.5	12.5	15.5
	6	2437	12.5	12.5	12.5	12.5	15.5
	11	2462	12.5	12.5	12.5	12.5	15.5
	12	2467	12.5	12.5	12.5	12.5	15.5
	13	2472	12.5	12.5	12.5	12.5	15.5
802.11ax HE40	3	2422	12.5	12.5	12.5	12.5	15.5
	6	2437	12.5	12.5	12.5	12.5	15.5
	9	2452	12.5	12.5	12.5	12.5	15.5
	10	2457	12.5	12.5	12.5	12.5	15.5
	11	2462	12.5	12.5	12.5	12.5	15.5

WLAN Tune-up Power (Laptop Reduction)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	9.5	9.5			
	40	5200	9.5	9.5			
	44	5220	9.5	9.5			
	48	5240	9.5	9.5			
802.11n HT20	36	5180	9.5	9.5	9.5	9.5	12.5
	40	5200	9.5	9.5	9.5	9.5	12.5
	44	5220	9.5	9.5	9.5	9.5	12.5
	48	5240	9.5	9.5	9.5	9.5	12.5
802.11n HT40	38	5190	9.5	9.5	9.5	9.5	12.5
	46	5230	9.5	9.5	9.5	9.5	12.5
802.11ac VHT80	42	5210	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	36	5180	9.5	9.5	9.5	9.5	12.5
	40	5200	9.5	9.5	9.5	9.5	12.5
	44	5220	9.5	9.5	9.5	9.5	12.5
	48	5240	9.5	9.5	9.5	9.5	12.5
802.11ax HE40	38	5190	9.5	9.5	9.5	9.5	12.5
	46	5230	9.5	9.5	9.5	9.5	12.5
802.11ax HE80	42	5210	9.5	9.5	9.5	9.5	12.5

WLAN Tune-up Power (Laptop Reduction)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	9.5	9.5			
	56	5280	9.5	9.5			
	60	5300	9.5	9.5			
	64	5320	9.5	9.5			
802.11n HT20	52	5260	9.5	9.5	9.5	9.5	12.5
	56	5280	9.5	9.5	9.5	9.5	12.5
	60	5300	9.5	9.5	9.5	9.5	12.5
	64	5320	9.5	9.5	9.5	9.5	12.5
802.11n HT40	54	5270	9.5	9.5	9.5	9.5	12.5
	62	5310	9.5	9.5	9.5	9.5	12.5
802.11ac VHT80	58	5290	9.5	9.5	9.5	9.5	12.5
802.11ac VHT160	50	5250	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	52	5260	9.5	9.5	9.5	9.5	12.5
	56	5280	9.5	9.5	9.5	9.5	12.5
	60	5300	9.5	9.5	9.5	9.5	12.5
	64	5320	9.5	9.5	9.5	9.5	12.5
802.11ax HE40	54	5270	9.5	9.5	9.5	9.5	12.5
	62	5310	9.5	9.5	9.5	9.5	12.5
802.11ax HE80	58	5290	9.5	9.5	9.5	9.5	12.5
802.11ax HE160	50	5250	9.5	9.5	9.5	9.5	12.5

WLAN Tune-up Power (Laptop Reduction)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	9.5	9.5			
	116	5580	9.5	9.5			
	120	5600	9.5	9.5			
	124	5620	9.5	9.5			
	132	5660	9.5	9.5			
	140	5700	9.5	9.5			
802.11n HT20	100	5500	9.5	9.5	9.5	9.5	12.5
	116	5580	9.5	9.5	9.5	9.5	12.5
	120	5600	9.5	9.5	9.5	9.5	12.5
	124	5620	9.5	9.5	9.5	9.5	12.5
	132	5660	9.5	9.5	9.5	9.5	12.5
	140	5700	9.5	9.5	9.5	9.5	12.5
	144	5720	9.5	9.5	9.5	9.5	12.5
802.11n HT40	102	5510	9.5	9.5	9.5	9.5	12.5
	110	5550	9.5	9.5	9.5	9.5	12.5
	118	5590	9.5	9.5	9.5	9.5	12.5
	126	5630	9.5	9.5	9.5	9.5	12.5
	134	5670	9.5	9.5	9.5	9.5	12.5
	142	5710	9.5	9.5	9.5	9.5	12.5
802.11ac VHT80	106	5530	9.5	9.5	9.5	9.5	12.5
	122	5610	9.5	9.5	9.5	9.5	12.5
	138	5690	9.5	9.5	9.5	9.5	12.5
802.11ac VHT160	114	5570	9.5	9.5	9.5	9.5	12.5
802.11ax HE20	100	5500	9.5	9.5	9.5	9.5	12.5
	116	5580	9.5	9.5	9.5	9.5	12.5
	120	5600	9.5	9.5	9.5	9.5	12.5
	124	5620	9.5	9.5	9.5	9.5	12.5
	132	5660	9.5	9.5	9.5	9.5	12.5
	140	5700	9.5	9.5	9.5	9.5	12.5
	144	5720	9.5	9.5	9.5	9.5	12.5
802.11ax HE40	102	5510	9.5	9.5	9.5	9.5	12.5
	110	5550	9.5	9.5	9.5	9.5	12.5
	118	5590	9.5	9.5	9.5	9.5	12.5
	126	5630	9.5	9.5	9.5	9.5	12.5
	134	5670	9.5	9.5	9.5	9.5	12.5
	142	5710	9.5	9.5	9.5	9.5	12.5
802.11ax HE80	106	5530	9.5	9.5	9.5	9.5	12.5
	122	5610	9.5	9.5	9.5	9.5	12.5
	138	5690	9.5	9.5	9.5	9.5	12.5
802.11ax HE160	114	5570	9.5	9.5	9.5	9.5	12.5

WLAN Tune-up Power (Laptop Reduction)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	8.5	8.5			
	153	5765	8.5	8.5			
	157	5785	8.5	8.5			
	161	5805	8.5	8.5			
	165	5825	8.5	8.5			
802.11n HT20	149	5745	8.5	8.5	8.5	8.5	11.5
	153	5765	8.5	8.5	8.5	8.5	11.5
	157	5785	8.5	8.5	8.5	8.5	11.5
	161	5805	8.5	8.5	8.5	8.5	11.5
	165	5825	8.5	8.5	8.5	8.5	11.5
802.11n HT40	151	5755	8.5	8.5	8.5	8.5	11.5
	159	5795	8.5	8.5	8.5	8.5	11.5
802.11ac VHT80	155	5775	8.5	8.5	8.5	8.5	11.5
802.11ax HE20	149	5745	8.5	8.5	8.5	8.5	11.5
	153	5765	8.5	8.5	8.5	8.5	11.5
	157	5785	8.5	8.5	8.5	8.5	11.5
	161	5805	8.5	8.5	8.5	8.5	11.5
	165	5825	8.5	8.5	8.5	8.5	11.5
802.11ax HE40	151	5755	8.5	8.5	8.5	8.5	11.5
	159	5795	8.5	8.5	8.5	8.5	11.5
802.11ax HE80	155	5775	8.5	8.5	8.5	8.5	11.5

WLAN Tune-up Power (Tablet Reduction)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	17.5	17.5			
	6	2437	17.5	17.5			
	11	2462	17.5	17.5			
	12	2467	17.5	17.5			
	13	2472	17.5	17.5			
802.11g	1	2412	17.5	17.5	17.5	17.5	20.5
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	17.5	17.5	17.5	17.5	20.5
	12	2467	17.5	17.5	17.5	17.5	20.5
	13	2472	17.5	17.5	17.5	17.5	20.5
802.11n HT20	1	2412	17.5	17.5	17.5	17.5	20.5
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	17.5	17.5	17.5	17.5	20.5
	12	2467	17.5	17.5	17.5	17.5	20.5
	13	2472	17.5	17.5	17.5	17.5	20.5
802.11n HT40	3	2422	17.5	17.5	17.5	17.5	20.5
	6	2437	17.5	17.5	17.5	17.5	20.5
	9	2452	17.5	17.5	17.5	17.5	20.5
	10	2457	17.5	17.5	17.5	17.5	20.5
	11	2462	17.5	17.5	17.5	17.5	20.5
802.11ax HE20	1	2412	17.5	17.5	17.5	17.5	20.5
	6	2437	17.5	17.5	17.5	17.5	20.5
	11	2462	17.5	17.5	17.5	17.5	20.5
	12	2467	17.5	17.5	17.5	17.5	20.5
	13	2472	17.5	17.5	17.5	17.5	20.5
802.11ax HE40	3	2422	17.5	17.5	17.5	17.5	20.5
	6	2437	17.5	17.5	17.5	17.5	20.5
	9	2452	17.5	17.5	17.5	17.5	20.5
	10	2457	17.5	17.5	17.5	17.5	20.5
	11	2462	17.5	17.5	17.5	17.5	20.5

WLAN Tune-up Power (Tablet Reduction)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	14.5	14.5			
	40	5200	14.5	14.5			
	44	5220	14.5	14.5			
	48	5240	14.5	14.5			
802.11n HT20	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11n HT40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ac VHT80	42	5210	14.5	14.5	14.5	14.5	17.5
802.11ax HE20	36	5180	14.5	14.5	14.5	14.5	17.5
	40	5200	14.5	14.5	14.5	14.5	17.5
	44	5220	14.5	14.5	14.5	14.5	17.5
	48	5240	14.5	14.5	14.5	14.5	17.5
802.11ax HE40	38	5190	14.5	14.5	14.5	14.5	17.5
	46	5230	14.5	14.5	14.5	14.5	17.5
802.11ax HE80	42	5210	14.5	14.5	14.5	14.5	17.5

WLAN Tune-up Power (Tablet Reduction)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	14.5	14.5			
	56	5280	14.5	14.5			
	60	5300	14.5	14.5			
	64	5320	14.5	14.5			
802.11n HT20	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11n HT40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.5	14.5	14.5	14.5	17.5
802.11ac VHT80	58	5290	14.5	14.5	14.5	14.5	17.5
802.11ac VHT160	50	5250	14.5	14.5	14.5	14.5	17.5
802.11ax HE20	52	5260	14.5	14.5	14.5	14.5	17.5
	56	5280	14.5	14.5	14.5	14.5	17.5
	60	5300	14.5	14.5	14.5	14.5	17.5
	64	5320	14.5	14.5	14.5	14.5	17.5
802.11ax HE40	54	5270	14.5	14.5	14.5	14.5	17.5
	62	5310	14.5	14.5	14.5	14.5	17.5
802.11ax HE80	58	5290	14.5	14.5	14.5	14.5	17.5
802.11ax HE160	50	5250	14.5	14.5	14.5	14.5	17.5

WLAN Tune-up Power (Tablet Reduction)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	13.0	13.0			
	116	5580	13.0	13.0			
	120	5600	13.0	13.0			
	124	5620	13.0	13.0			
	132	5660	13.0	13.0			
	140	5700	13.0	13.0			
802.11n HT20	100	5500	13.0	13.0	13.0	13.0	16.0
	116	5580	13.0	13.0	13.0	13.0	16.0
	120	5600	13.0	13.0	13.0	13.0	16.0
	124	5620	13.0	13.0	13.0	13.0	16.0
	132	5660	13.0	13.0	13.0	13.0	16.0
	140	5700	13.0	13.0	13.0	13.0	16.0
	144	5720	13.0	13.0	13.0	13.0	16.0
802.11n HT40	102	5510	13.0	13.0	13.0	13.0	16.0
	110	5550	13.0	13.0	13.0	13.0	16.0
	118	5590	13.0	13.0	13.0	13.0	16.0
	126	5630	13.0	13.0	13.0	13.0	16.0
	134	5670	13.0	13.0	13.0	13.0	16.0
	142	5710	13.0	13.0	13.0	13.0	16.0
802.11ac VHT80	106	5530	13.0	13.0	13.0	13.0	16.0
	122	5610	13.0	13.0	13.0	13.0	16.0
	138	5690	13.0	13.0	13.0	13.0	16.0
802.11ac VHT160	114	5570	13.0	13.0	13.0	13.0	16.0
802.11ax HE20	100	5500	13.0	13.0	13.0	13.0	16.0
	116	5580	13.0	13.0	13.0	13.0	16.0
	120	5600	13.0	13.0	13.0	13.0	16.0
	124	5620	13.0	13.0	13.0	13.0	16.0
	132	5660	13.0	13.0	13.0	13.0	16.0
	140	5700	13.0	13.0	13.0	13.0	16.0
	144	5720	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	102	5510	13.0	13.0	13.0	13.0	16.0
	110	5550	13.0	13.0	13.0	13.0	16.0
	118	5590	13.0	13.0	13.0	13.0	16.0
	126	5630	13.0	13.0	13.0	13.0	16.0
	134	5670	13.0	13.0	13.0	13.0	16.0
	142	5710	13.0	13.0	13.0	13.0	16.0
802.11ax HE80	106	5530	13.0	13.0	13.0	13.0	16.0
	122	5610	13.0	13.0	13.0	13.0	16.0
	138	5690	13.0	13.0	13.0	13.0	16.0
802.11ax HE160	114	5570	13.0	13.0	13.0	13.0	16.0

WLAN Tune-up Power (Tablet Reduction)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	13.0	13.0			
	153	5765	13.0	13.0			
	157	5785	13.0	13.0			
	161	5805	13.0	13.0			
	165	5825	13.0	13.0			
802.11n HT20	149	5745	13.0	13.0	13.0	13.0	16.0
	153	5765	13.0	13.0	13.0	13.0	16.0
	157	5785	13.0	13.0	13.0	13.0	16.0
	161	5805	13.0	13.0	13.0	13.0	16.0
	165	5825	13.0	13.0	13.0	13.0	16.0
802.11n HT40	151	5755	13.0	13.0	13.0	13.0	16.0
	159	5795	13.0	13.0	13.0	13.0	16.0
802.11ac VHT80	155	5775	13.0	13.0	13.0	13.0	16.0
802.11ax HE20	149	5745	13.0	13.0	13.0	13.0	16.0
	153	5765	13.0	13.0	13.0	13.0	16.0
	157	5785	13.0	13.0	13.0	13.0	16.0
	161	5805	13.0	13.0	13.0	13.0	16.0
	165	5825	13.0	13.0	13.0	13.0	16.0
802.11ax HE40	151	5755	13.0	13.0	13.0	13.0	16.0
	159	5795	13.0	13.0	13.0	13.0	16.0
802.11ax HE80	155	5775	13.0	13.0	13.0	13.0	16.0

Annex E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WCDMA Conducted Power (P-Sensor_Off_Tablet & Laptop)									
Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	24.33	24.32	24.40	24.34	24.37	24.21	24.31	24.32	24.42
HSDPA Subtest-1	23.45	23.44	23.52	23.42	23.45	23.29	23.28	23.29	23.39
HSDPA Subtest-2	23.48	23.47	23.55	23.37	23.40	23.24	23.30	23.31	23.41
HSDPA Subtest-3	22.97	22.96	23.04	22.88	22.91	22.75	22.81	22.82	22.92
HSDPA Subtest-4	22.95	22.94	23.02	22.86	22.89	22.73	22.84	22.85	22.95
DC-HSDPA Subtest-1	23.42	23.41	23.49	23.40	23.43	23.27	23.26	23.27	23.37
DC-HSDPA Subtest-2	23.45	23.44	23.52	23.35	23.38	23.22	23.28	23.29	23.39
DC-HSDPA Subtest-3	22.94	22.93	23.01	22.86	22.89	22.73	22.79	22.80	22.90
DC-HSDPA Subtest-4	22.92	22.91	22.99	22.84	22.87	22.71	22.82	22.83	22.93
HSUPA Subtest-1	23.50	23.49	23.57	23.33	23.36	23.20	23.08	23.09	23.19
HSUPA Subtest-2	21.48	21.47	21.55	21.31	21.34	21.18	21.09	21.10	21.20
HSUPA Subtest-3	22.46	22.45	22.53	22.32	22.35	22.19	22.10	22.11	22.21
HSUPA Subtest-4	21.48	21.47	21.55	21.33	21.36	21.20	21.10	21.11	21.21
HSUPA Subtest-5	23.51	23.50	23.58	23.27	23.30	23.14	23.04	23.05	23.15

WCDMA Conducted Power (P-Sensor_On_Tablet)									
Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	14.35	14.33	14.36	15.34	15.42	15.38	19.90	19.61	19.71
HSDPA Subtest-1	13.91	13.89	13.92	14.87	14.83	14.83	18.88	18.59	18.69
HSDPA Subtest-2	13.89	13.87	13.90	14.81	14.78	14.81	18.91	18.62	18.72
HSDPA Subtest-3	13.42	13.40	13.43	14.38	14.32	14.43	18.39	18.10	18.20
HSDPA Subtest-4	13.38	13.36	13.39	14.34	14.34	14.37	18.40	18.11	18.21
DC-HSDPA Subtest-1	13.89	13.87	13.90	14.86	14.77	14.82	18.85	18.56	18.66
DC-HSDPA Subtest-2	13.87	13.85	13.88	14.82	14.85	14.83	18.88	18.59	18.69
DC-HSDPA Subtest-3	13.40	13.38	13.41	14.38	14.29	14.39	18.36	18.07	18.17
DC-HSDPA Subtest-4	13.36	13.34	13.37	14.36	14.32	14.36	18.37	18.08	18.18
HSUPA Subtest-1	13.35	13.33	13.36	14.33	14.32	14.34	18.87	18.58	18.68
HSUPA Subtest-2	11.28	11.26	11.29	12.24	12.19	12.29	16.78	16.49	16.59
HSUPA Subtest-3	13.27	13.25	13.28	14.19	14.15	14.24	17.85	17.56	17.66
HSUPA Subtest-4	11.53	11.51	11.54	12.48	12.42	12.45	16.83	16.54	16.64
HSUPA Subtest-5	13.32	13.30	13.33	14.28	14.22	14.26	18.79	18.50	18.60

WCDMA Conducted Power (P-Sensor_On_Laptop)									
Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	16.32	16.35	16.38	17.39	17.46	17.34	20.87	20.60	20.71
HSDPA Subtest-1	15.84	15.87	15.90	16.15	16.22	16.10	19.82	19.55	19.66
HSDPA Subtest-2	15.85	15.88	15.91	16.13	16.20	16.08	19.86	19.59	19.70
HSDPA Subtest-3	15.41	15.44	15.47	15.66	15.73	15.61	19.39	19.12	19.23
HSDPA Subtest-4	15.35	15.38	15.41	15.64	15.71	15.59	19.36	19.09	19.20
DC-HSDPA Subtest-1	15.82	15.85	15.88	16.13	16.20	16.08	19.80	19.53	19.64
DC-HSDPA Subtest-2	15.83	15.86	15.89	16.11	16.18	16.06	19.84	19.57	19.68
DC-HSDPA Subtest-3	15.39	15.42	15.45	15.64	15.71	15.59	19.37	19.10	19.21
DC-HSDPA Subtest-4	15.33	15.36	15.39	15.62	15.69	15.57	19.34	19.07	19.18
HSUPA Subtest-1	15.32	15.35	15.38	16.18	16.25	16.13	19.86	19.59	19.70
HSUPA Subtest-2	13.22	13.25	13.28	14.10	14.17	14.05	17.88	17.61	17.72
HSUPA Subtest-3	14.24	14.27	14.30	15.73	15.80	15.68	18.86	18.59	18.70
HSUPA Subtest-4	13.27	13.30	13.33	14.10	14.17	14.05	17.84	17.57	17.68
HSUPA Subtest-5	15.27	15.30	15.33	16.13	16.20	16.08	19.87	19.60	19.71

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	23.54	23.51	23.43	0
		1	50	23.40	23.37	23.29	0
		1	99	23.32	23.29	23.21	0
		50	0	22.43	22.40	22.32	1
		50	25	22.38	22.35	22.27	1
		50	50	22.33	22.30	22.22	1
		100	0	22.30	22.27	22.19	1
20M	16QAM	1	0	22.67	22.64	22.56	1
		1	50	22.60	22.57	22.49	1
		1	99	22.54	22.51	22.43	1
		50	0	21.41	21.38	21.30	2
		50	25	21.35	21.32	21.24	2
		50	50	21.31	21.28	21.20	2
		100	0	21.25	21.22	21.14	2
20M	64QAM	1	0	21.47	21.44	21.36	2
		1	50	21.43	21.40	21.32	2
		1	99	21.38	21.35	21.27	2
		50	0	20.44	20.41	20.33	3
		50	25	20.39	20.36	20.28	3
		50	50	20.36	20.33	20.25	3
		100	0	20.33	20.30	20.22	3
20M	256QAM	1	0	18.59	18.55	18.42	5
		1	50	18.53	18.47	18.34	5
		1	99	18.47	18.37	18.37	5
		50	0	18.38	18.38	18.28	5
		50	25	18.40	18.30	18.29	5
		50	50	18.34	18.33	18.16	5
		100	0	18.26	18.25	18.22	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	23.48	23.45	23.40	0
		1	37	23.34	23.29	23.21	0
		1	74	23.30	23.22	23.11	0
		36	0	23.35	23.36	23.31	1
		36	19	23.37	23.26	23.18	1
		36	39	23.28	23.24	23.19	1
		75	0	23.24	23.20	23.19	1
15M	16QAM	1	0	22.62	22.64	22.56	1
		1	37	22.51	22.56	22.46	1
		1	74	22.52	22.41	22.37	1
		36	0	21.34	21.34	21.30	2
		36	19	21.31	21.32	21.14	2
		36	39	21.28	21.25	21.20	2
		75	0	21.24	21.19	21.10	2
15M	64QAM	1	0	21.43	21.38	21.26	2
		1	37	21.38	21.30	21.26	2
		1	74	21.31	21.31	21.24	2
		36	0	20.40	20.37	20.32	3
		36	19	20.30	20.33	20.22	3
		36	39	20.30	20.27	20.17	3
		75	0	20.32	20.29	20.17	3
15M	256QAM	1	0	18.42	18.36	18.44	5
		1	37	18.45	18.42	18.31	5
		1	74	18.39	18.33	18.21	5
		36	0	18.29	18.28	18.29	5
		36	19	18.26	18.32	18.10	5
		36	39	18.29	18.17	18.13	5
		75	0	18.30	18.12	17.98	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	23.23	23.27	23.18	0
		1	24	23.27	23.17	22.97	0
		1	49	22.41	22.23	22.20	0
		25	0	22.24	22.31	22.12	1
		25	12	22.17	22.15	22.04	1
		25	25	22.19	22.08	22.07	1
		50	0	22.51	22.52	22.41	1
10M	16QAM	1	0	22.55	22.40	22.38	1
		1	24	22.37	22.44	22.33	1
		1	49	21.23	21.32	21.10	1
		25	0	21.20	21.18	21.02	2
		25	12	21.20	21.19	21.06	2
		25	25	21.01	21.11	20.92	2
		50	0	21.31	21.32	21.13	2
10M	64QAM	1	0	21.39	21.35	21.16	2
		1	24	21.32	21.13	21.18	2
		1	49	20.34	20.22	20.14	2
		25	0	20.27	20.30	20.15	3
		25	12	20.13	20.16	20.11	3
		25	25	20.22	20.18	20.13	3
		50	0	21.03	21.18	21.05	3
10M	256QAM	1	0	18.49	18.41	18.40	5
		1	24	18.44	18.45	18.27	5
		1	49	18.35	18.34	18.30	5
		25	0	18.33	18.37	18.21	5
		25	12	18.22	18.26	18.09	5
		25	25	18.21	18.17	18.20	5
		50	0	18.15	18.22	18.04	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	23.43	23.47	23.23	0
		1	12	23.34	23.24	23.24	0
		1	24	23.29	23.08	22.99	0
		12	0	22.35	22.24	22.23	1
		12	6	22.32	22.20	22.03	1
		12	13	22.15	22.16	22.11	1
		25	0	22.12	22.24	22.06	1
5M	16QAM	1	0	22.45	22.48	22.42	1
		1	12	22.52	22.40	22.42	1
		1	24	22.37	22.51	22.23	1
		12	0	21.18	21.21	21.18	2
		12	6	21.19	21.22	21.15	2
		12	13	21.19	21.24	21.10	2
		25	0	21.09	21.10	21.03	2
5M	64QAM	1	0	21.32	21.20	21.26	2
		1	12	21.23	21.24	21.14	2
		1	24	21.24	21.18	21.15	2
		12	0	20.30	20.32	20.24	3
		12	6	20.31	20.26	20.10	3
		12	13	20.16	20.12	20.16	3
		25	0	20.14	20.20	20.04	3
5M	256QAM	1	0	18.50	18.36	18.35	5
		1	12	18.36	18.33	18.26	5
		1	24	18.45	18.33	18.33	5
		12	0	18.26	18.40	18.15	5
		12	6	18.28	18.21	18.19	5
		12	13	18.21	18.18	18.13	5
		25	0	18.29	18.17	18.07	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	23.36	23.42	23.29	0
		1	7	23.29	23.30	23.21	0
		1	14	23.07	23.26	23.00	0
		8	0	22.40	22.21	22.16	1
		8	3	22.33	22.19	22.19	1
		8	7	22.14	22.14	22.12	1
		15	0	22.27	22.13	22.10	1
3M	16QAM	1	0	22.53	22.56	22.55	1
		1	7	22.44	22.49	22.32	1
		1	14	22.35	22.35	22.30	1
		8	0	21.29	21.31	21.08	2
		8	3	21.26	21.29	21.09	2
		8	7	21.22	21.22	21.12	2
		15	0	21.25	21.10	21.04	2
3M	64QAM	1	0	21.43	21.38	21.26	2
		1	7	21.27	21.28	21.21	2
		1	14	21.36	21.10	21.21	2
		8	0	20.34	20.37	20.15	3
		8	3	20.26	20.23	20.18	3
		8	7	20.18	20.09	20.18	3
		15	0	20.22	20.12	20.05	3
3M	256QAM	1	0	18.54	18.45	18.34	5
		1	7	18.41	18.42	18.34	5
		1	14	18.38	18.32	18.22	5
		8	0	18.32	18.25	18.23	5
		8	3	18.19	18.27	18.18	5
		8	7	18.26	18.26	18.09	5
		15	0	18.11	18.13	18.08	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	23.36	23.35	23.40	0
		1	2	23.24	23.36	23.19	0
		1	5	23.15	23.15	23.09	0
		3	0	23.32	23.27	23.21	0
		3	1	23.31	23.27	23.11	0
		3	3	23.18	23.28	23.17	0
		6	0	22.18	22.23	22.03	1
1.4M	16QAM	1	0	22.57	22.52	22.34	1
		1	2	22.37	22.34	22.25	1
		1	5	22.44	22.35	22.29	1
		3	0	22.31	22.23	22.22	1
		3	1	22.18	22.26	22.16	1
		3	3	22.27	22.11	22.02	1
		6	0	21.11	21.14	21.06	2
1.4M	64QAM	1	0	21.34	21.31	21.17	2
		1	2	21.35	21.27	21.23	2
		1	5	21.27	21.25	21.07	2
		3	0	21.35	21.22	21.26	2
		3	1	21.19	21.24	21.16	2
		3	3	21.24	21.13	21.06	2
		6	0	20.29	20.23	20.05	3
1.4M	256QAM	1	0	18.55	18.47	18.42	5
		1	2	18.41	18.41	18.28	5
		1	5	18.36	18.29	18.28	5
		3	0	19.24	19.27	19.29	5
		3	1	19.26	19.25	19.14	5
		3	3	19.26	19.27	19.09	5
		6	0	18.22	18.27	18.00	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	23.35	23.39	23.17	0
		1	50	23.23	23.27	23.05	0
		1	99	23.12	23.16	22.94	0
		50	0	22.29	22.33	22.11	1
		50	25	22.17	22.21	21.99	1
		50	50	22.12	22.16	21.94	1
		100	0	22.07	22.11	21.89	1
20M	16QAM	1	0	22.44	22.48	22.26	1
		1	50	22.39	22.43	22.21	1
		1	99	22.35	22.39	22.17	1
		50	0	21.26	21.30	21.08	2
		50	25	21.20	21.24	21.02	2
		50	50	21.15	21.19	20.97	2
		100	0	21.10	21.14	20.92	2
20M	64QAM	1	0	21.44	21.48	21.26	2
		1	50	21.32	21.36	21.14	2
		1	99	21.25	21.29	21.07	2
		50	0	20.32	20.36	20.14	3
		50	25	20.25	20.29	20.07	3
		50	50	20.18	20.22	20.00	3
		100	0	20.14	20.18	19.96	3
20M	256QAM	1	0	18.34	18.38	18.16	5
		1	50	18.27	18.31	18.09	5
		1	99	18.21	18.25	18.03	5
		50	0	18.16	18.20	17.98	5
		50	25	18.10	18.14	17.92	5
		50	50	18.06	18.10	17.88	5
		100	0	18.01	18.05	17.83	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	23.29	23.35	23.16	0
		1	37	23.13	23.26	22.99	0
		1	74	23.12	23.10	22.94	0
		36	0	23.20	23.31	23.04	1
		36	19	23.11	23.16	22.94	1
		36	39	23.09	23.07	22.94	1
		75	0	22.97	23.08	22.83	1
15M	16QAM	1	0	22.36	22.43	22.21	1
		1	37	22.30	22.40	22.17	1
		1	74	22.26	22.35	22.15	1
		36	0	21.17	21.22	21.01	2
		36	19	21.13	21.18	20.96	2
		36	39	21.10	21.12	20.90	2
		75	0	21.04	21.09	20.86	2
15M	64QAM	1	0	21.34	21.40	21.23	2
		1	37	21.31	21.36	21.05	2
		1	74	21.21	21.28	21.02	2
		36	0	20.25	20.27	20.05	3
		36	19	20.18	20.23	20.01	3
		36	39	20.12	20.17	19.91	3
		75	0	20.14	20.10	19.93	3
15M	256QAM	1	0	18.33	18.31	18.10	5
		1	37	18.18	18.27	17.99	5
		1	74	18.11	18.18	17.96	5
		36	0	18.12	18.14	17.94	5
		36	19	18.08	18.09	17.87	5
		36	39	18.03	18.01	17.85	5
		75	0	17.97	17.99	17.73	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	23.33	23.19	23.00	0
		1	24	23.11	23.18	23.05	0
		1	49	23.04	22.99	22.86	0
		25	0	22.18	22.30	21.97	1
		25	12	22.16	22.12	21.87	1
		25	25	21.98	22.06	21.86	1
		50	0	21.95	22.01	21.77	1
10M	16QAM	1	0	22.37	22.34	22.13	1
		1	24	22.27	22.30	22.05	1
		1	49	22.25	22.20	22.01	1
		25	0	21.20	21.15	21.00	2
		25	12	21.01	21.04	20.92	2
		25	25	20.97	21.11	20.91	2
		50	0	20.94	20.99	20.87	2
10M	64QAM	1	0	21.38	21.24	21.06	2
		1	24	21.13	21.16	20.94	2
		1	49	21.09	21.23	20.91	2
		25	0	20.15	20.14	20.01	3
		25	12	20.13	20.11	19.98	3
		25	25	20.15	20.12	19.92	3
		50	0	20.10	20.00	19.86	3
10M	256QAM	1	0	18.19	18.22	18.11	5
		1	24	18.17	18.16	18.08	5
		1	49	18.03	18.12	17.96	5
		25	0	17.93	18.11	17.87	5
		25	12	17.97	17.90	17.78	5
		25	25	17.88	17.94	17.66	5
		50	0	17.84	17.92	17.69	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	23.20	23.32	22.86	0
		1	12	23.15	23.21	22.83	0
		1	24	22.94	22.95	22.73	0
		12	0	22.12	22.10	21.92	1
		12	6	22.10	22.14	21.80	1
		12	13	22.02	22.01	21.71	1
		25	0	21.98	22.05	21.64	1
5M	16QAM	1	0	22.38	22.35	22.11	1
		1	12	22.26	22.39	22.11	1
		1	24	22.23	22.32	22.00	1
		12	0	21.19	21.29	20.90	2
		12	6	21.12	21.08	20.83	2
		12	13	20.97	20.97	20.83	2
		25	0	20.96	20.96	20.76	2
5M	64QAM	1	0	21.28	21.27	21.06	2
		1	12	21.14	21.22	21.13	2
		1	24	21.13	21.27	20.95	2
		12	0	20.20	20.11	20.01	3
		12	6	20.04	20.05	19.91	3
		12	13	20.09	20.09	19.87	3
		25	0	20.02	20.16	19.85	3
5M	256QAM	1	0	18.23	18.27	17.99	5
		1	12	18.12	18.26	17.95	5
		1	24	18.02	18.07	17.85	5
		12	0	17.94	18.06	17.88	5
		12	6	17.88	18.01	17.80	5
		12	13	17.91	17.95	17.65	5
		25	0	17.92	17.96	17.78	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	23.27	23.37	23.07	0
		1	7	23.22	23.07	22.84	0
		1	14	23.03	23.09	22.85	0
		8	0	22.11	22.18	22.04	1
		8	3	22.14	22.03	21.78	1
		8	7	22.07	21.99	21.86	1
		15	0	21.97	22.01	21.70	1
3M	16QAM	1	0	22.27	22.34	22.09	1
		1	7	22.33	22.22	22.14	1
		1	14	22.19	22.22	21.95	1
		8	0	21.13	21.12	20.97	2
		8	3	21.02	21.09	20.94	2
		8	7	21.06	21.11	20.93	2
		15	0	20.99	20.97	20.78	2
3M	64QAM	1	0	21.35	21.34	21.01	2
		1	7	21.14	21.22	21.14	2
		1	14	21.17	21.19	20.90	2
		8	0	20.09	20.27	19.97	3
		8	3	20.10	20.24	20.02	3
		8	7	20.13	20.01	19.85	3
		15	0	20.07	20.11	19.89	3
3M	256QAM	1	0	18.14	18.16	17.97	5
		1	7	18.13	18.13	17.92	5
		1	14	18.01	18.15	17.83	5
		8	0	17.92	17.99	17.89	5
		8	3	18.08	18.03	17.79	5
		8	7	17.96	18.00	17.79	5
		15	0	17.91	17.86	17.62	5
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	23.19	23.20	23.04	0
		1	2	22.99	23.18	22.84	0
		1	5	22.98	23.05	22.87	0
		3	0	23.18	23.26	22.89	0
		3	1	23.00	23.07	22.93	0
		3	3	23.00	23.05	22.79	0
		6	0	22.00	22.06	21.67	1
1.4M	16QAM	1	0	22.26	22.41	22.21	1
		1	2	22.32	22.33	22.07	1
		1	5	22.28	22.33	22.10	1
		3	0	22.12	22.15	22.01	1
		3	1	22.01	22.13	21.89	1
		3	3	22.07	22.17	21.94	1
		6	0	21.04	20.96	20.78	2
1.4M	64QAM	1	0	21.28	21.38	21.15	2
		1	2	21.25	21.24	20.95	2
		1	5	21.06	21.25	20.96	2
		3	0	21.27	21.20	21.01	2
		3	1	21.07	21.20	20.94	2
		3	3	21.04	21.05	20.90	2
		6	0	19.92	20.08	19.86	3
1.4M	256QAM	1	0	18.20	18.19	18.01	5
		1	2	18.09	18.10	17.98	5
		1	5	18.06	18.08	17.93	5
		3	0	17.99	18.00	17.91	5
		3	1	18.04	17.94	17.80	5
		3	3	17.97	18.00	17.73	5
		6	0	17.98	17.94	17.62	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	24.04	24.03	23.94	0
		1	24	24.00	23.99	23.90	0
		1	49	23.94	23.93	23.84	0
		25	0	23.15	23.14	23.05	1
		25	12	23.07	23.06	22.97	1
		25	25	23.00	22.99	22.90	1
		50	0	22.93	22.92	22.83	1
10M	16QAM	1	0	23.38	23.37	23.28	1
		1	24	23.30	23.29	23.20	1
		1	49	23.25	23.24	23.15	1
		25	0	22.23	22.22	22.13	2
		25	12	22.16	22.15	22.06	2
		25	25	22.10	22.09	22.00	2
		50	0	22.04	22.03	21.94	2
10M	64QAM	1	0	22.21	22.20	22.11	2
		1	24	22.14	22.13	22.04	2
		1	49	22.07	22.06	21.97	2
		25	0	21.08	21.07	20.98	3
		25	12	21.02	21.01	20.92	3
		25	25	20.95	20.94	20.85	3
		50	0	20.91	20.90	20.81	3
10M	256QAM	1	0	19.13	19.12	19.03	5
		1	24	19.07	19.06	18.97	5
		1	49	19.02	19.01	18.92	5
		25	0	18.97	18.96	18.87	5
		25	12	18.92	18.91	18.82	5
		25	25	18.80	18.79	18.70	5
		50	0	18.75	18.74	18.65	5
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	23.99	23.96	23.90	0
		1	12	23.98	23.90	23.84	0
		1	24	23.90	23.91	23.82	0
		12	0	23.96	23.99	23.99	1
		12	6	23.94	23.98	23.90	1
		12	13	23.91	23.91	23.86	1
		25	0	23.86	23.85	23.75	1
5M	16QAM	1	0	23.34	23.32	23.19	1
		1	12	23.23	23.20	23.18	1
		1	24	23.17	23.15	23.09	1
		12	0	22.14	22.17	22.09	2
		12	6	22.09	22.11	21.99	2
		12	13	22.08	21.99	21.92	2
		25	0	22.01	21.99	21.87	2
5M	64QAM	1	0	22.11	22.10	22.08	2
		1	12	22.04	22.13	21.98	2
		1	24	22.07	22.06	21.88	2
		12	0	21.01	21.04	20.92	3
		12	6	20.97	20.99	20.82	3
		12	13	20.94	20.90	20.76	3
		25	0	20.89	20.85	20.76	3
5M	256QAM	1	0	19.03	19.02	19.03	5
		1	12	19.06	19.04	18.90	5
		1	24	18.96	18.95	18.85	5
		12	0	18.93	18.88	18.78	5
		12	6	18.82	18.91	18.81	5
		12	13	18.78	18.69	18.60	5
		25	0	18.68	18.68	18.59	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	23.85	23.99	23.89	0
		1	7	23.81	23.86	23.87	0
		1	14	23.84	23.89	23.70	0
		8	0	23.04	22.98	22.93	1
		8	3	22.89	22.97	22.81	1
		8	7	22.90	22.93	22.76	1
		15	0	22.87	22.73	22.70	1
3M	16QAM	1	0	23.20	23.31	23.19	1
		1	7	23.29	23.23	23.03	1
		1	14	23.18	23.14	23.02	1
		8	0	22.10	22.21	22.03	2
		8	3	22.10	22.04	21.87	2
		8	7	22.05	21.97	21.94	2
		15	0	21.95	21.85	21.84	2
3M	64QAM	1	0	22.01	22.13	21.89	2
		1	7	21.98	22.04	21.82	2
		1	14	21.95	21.94	21.79	2
		8	0	21.02	20.96	20.89	3
		8	3	20.80	20.81	20.88	3
		8	7	20.76	20.75	20.70	3
		15	0	20.82	20.71	20.69	3
3M	256QAM	1	0	19.08	19.12	19.01	5
		1	7	19.04	18.97	18.93	5
		1	14	18.96	18.96	18.86	5
		8	0	18.93	18.90	18.79	5
		8	3	18.89	18.89	18.74	5
		8	7	18.78	18.69	18.62	5
		15	0	18.67	18.66	18.55	5
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	23.95	23.96	23.81	0
		1	2	23.91	23.91	23.72	0
		1	5	23.79	23.90	23.71	0
		3	0	23.09	22.97	22.84	0
		3	1	22.91	23.01	22.92	0
		3	3	22.95	22.88	22.80	0
		6	0	22.74	22.83	22.66	1
1.4M	16QAM	1	0	23.32	23.19	23.18	1
		1	2	23.08	23.06	23.15	1
		1	5	23.11	23.03	23.13	1
		3	0	22.04	22.12	21.97	1
		3	1	22.00	21.95	21.86	1
		3	3	21.91	22.01	21.90	1
		6	0	22.00	21.96	21.93	2
1.4M	64QAM	1	0	22.10	22.02	21.88	2
		1	2	22.04	21.91	21.88	2
		1	5	21.88	21.87	21.83	2
		3	0	21.03	20.90	20.97	2
		3	1	20.88	20.88	20.78	2
		3	3	20.86	20.88	20.73	2
		6	0	20.79	20.71	20.72	3
1.4M	256QAM	1	0	19.09	19.10	18.98	5
		1	2	18.98	18.98	18.94	5
		1	5	18.97	19.01	18.84	5
		3	0	18.93	18.92	18.86	5
		3	1	18.85	18.86	18.76	5
		3	3	18.76	18.78	18.60	5
		6	0	18.67	18.74	18.56	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.86	23.81	23.84	0
		1	50	23.83	23.79	23.68	0
		1	99	23.71	23.67	23.64	0
		50	0	22.94	22.91	22.90	1
		50	25	22.82	22.80	22.81	1
		50	50	22.83	22.75	22.70	1
		100	0	22.78	22.74	22.67	1
20M	16QAM	1	0	23.13	23.11	23.07	1
		1	50	23.02	22.95	22.94	1
		1	99	22.95	22.94	22.85	1
		50	0	21.92	21.85	21.82	2
		50	25	21.86	21.84	21.79	2
		50	50	21.81	21.74	21.78	2
		100	0	21.75	21.71	21.73	2
20M	64QAM	1	0	21.99	21.99	21.88	2
		1	50	21.95	21.94	21.88	2
		1	99	21.86	21.81	21.82	2
		50	0	20.94	20.86	20.88	3
		50	25	20.84	20.87	20.78	3
		50	50	20.80	20.74	20.69	3
		100	0	20.72	20.73	20.72	3
20M	256QAM	1	0	19.01	18.94	18.90	5
		1	50	18.98	18.87	18.90	5
		1	99	18.87	18.89	18.77	5
		50	0	18.82	18.77	18.76	5
		50	25	18.74	18.78	18.66	5
		50	50	18.68	18.71	18.60	5
		100	0	18.69	18.63	18.60	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	23.79	23.75	23.80	0
		1	37	23.76	23.77	23.65	0
		1	74	23.63	23.67	23.61	0
		36	0	22.85	22.87	22.83	1
		36	19	22.75	22.70	22.81	1
		36	39	22.77	22.65	22.60	1
		75	0	22.68	22.68	22.58	1
15M	16QAM	1	0	23.03	23.07	23.02	1
		1	37	23.01	22.86	22.93	1
		1	74	22.92	22.94	22.84	1
		36	0	21.92	21.85	21.77	2
		36	19	21.76	21.83	21.77	2
		36	39	21.74	21.72	21.74	2
		75	0	21.68	21.66	21.64	2
15M	64QAM	1	0	21.89	21.93	21.88	2
		1	37	21.89	21.91	21.87	2
		1	74	21.79	21.73	21.82	2
		36	0	20.94	20.83	20.78	3
		36	19	20.83	20.87	20.71	3
		36	39	20.73	20.64	20.66	3
		75	0	20.68	20.73	20.63	3
15M	256QAM	1	0	18.92	18.86	18.83	5
		1	37	18.91	18.77	18.88	5
		1	74	18.85	18.83	18.74	5
		36	0	18.81	18.68	18.73	5
		36	19	18.68	18.68	18.64	5
		36	39	18.58	18.61	18.54	5
		75	0	18.62	18.53	18.54	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.78	23.71	23.82	0
		1	24	23.83	23.73	23.64	0
		1	49	23.67	23.59	23.54	0
		25	0	22.84	22.90	22.82	1
		25	12	22.82	22.80	22.75	1
		25	25	22.78	22.75	22.60	1
		50	0	22.69	22.70	22.62	1
10M	16QAM	1	0	23.07	23.09	23.03	1
		1	24	22.97	22.94	22.85	1
		1	49	22.88	22.84	22.80	1
		25	0	21.86	21.84	21.78	2
		25	12	21.85	21.84	21.76	2
		25	25	21.74	21.66	21.72	2
		50	0	21.68	21.69	21.69	2
10M	64QAM	1	0	21.94	21.99	21.80	2
		1	24	21.88	21.84	21.82	2
		1	49	21.82	21.77	21.74	2
		25	0	20.90	20.81	20.79	3
		25	12	20.79	20.77	20.69	3
		25	25	20.72	20.70	20.68	3
		50	0	20.70	20.70	20.62	3
10M	256QAM	1	0	19.01	18.84	18.89	5
		1	24	18.94	18.83	18.84	5
		1	49	18.84	18.81	18.77	5
		25	0	18.73	18.75	18.76	5
		25	12	18.69	18.69	18.61	5
		25	25	18.58	18.65	18.54	5
		50	0	18.64	18.56	18.56	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	23.82	23.76	23.78	0
		1	12	23.73	23.70	23.65	0
		1	24	23.63	23.65	23.56	0
		12	0	22.84	22.88	22.90	1
		12	6	22.80	22.74	22.78	1
		12	13	22.74	22.71	22.67	1
		25	0	22.68	22.65	22.59	1
5M	16QAM	1	0	23.12	23.06	23.02	1
		1	12	22.99	22.95	22.86	1
		1	24	22.93	22.84	22.76	1
		12	0	21.88	21.76	21.72	2
		12	6	21.80	21.82	21.73	2
		12	13	21.81	21.74	21.69	2
		25	0	21.67	21.67	21.71	2
5M	64QAM	1	0	21.98	21.92	21.82	2
		1	12	21.88	21.87	21.83	2
		1	24	21.78	21.79	21.72	2
		12	0	20.93	20.79	20.86	3
		12	6	20.75	20.87	20.73	3
		12	13	20.74	20.74	20.65	3
		25	0	20.66	20.69	20.62	3
5M	256QAM	1	0	18.92	18.87	18.83	5
		1	12	18.92	18.84	18.88	5
		1	24	18.87	18.87	18.68	5
		12	0	18.72	18.72	18.67	5
		12	6	18.65	18.72	18.60	5
		12	13	18.66	18.65	18.58	5
		25	0	18.69	18.57	18.54	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	23.79	23.59	23.75	0
		1	24	23.68	23.47	23.66	0
		1	49	23.55	23.34	23.53	0
		25	0	22.85	22.64	22.83	1
		25	12	22.79	22.58	22.77	1
		25	25	22.72	22.51	22.70	1
		50	0	22.65	22.44	22.63	1
10M	16QAM	1	0	23.20	22.99	23.18	1
		1	24	23.07	22.86	23.05	1
		1	49	23.02	22.81	23.00	1
		25	0	21.95	21.74	21.93	2
		25	12	21.91	21.70	21.89	2
		25	25	21.86	21.65	21.84	2
		50	0	21.77	21.56	21.75	2
10M	64QAM	1	0	22.10	21.89	22.08	2
		1	24	22.04	21.83	22.02	2
		1	49	21.99	21.78	21.97	2
		25	0	20.89	20.68	20.87	3
		25	12	20.85	20.64	20.83	3
		25	25	20.80	20.59	20.78	3
		50	0	20.77	20.56	20.75	3
10M	256QAM	1	0	18.95	18.76	18.94	5
		1	24	18.90	18.69	18.86	5
		1	49	18.82	18.62	18.78	5
		25	0	18.77	18.61	18.79	5
		25	12	18.80	18.57	18.76	5
		25	25	18.69	18.47	18.73	5
		50	0	18.71	18.44	18.67	5
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	23.66	23.56	23.62	0
		1	12	23.65	23.44	23.58	0
		1	24	23.55	23.30	23.47	0
		12	0	22.75	22.68	22.79	1
		12	6	22.72	22.61	22.69	1
		12	13	22.70	22.56	22.62	1
		25	0	22.65	22.51	22.53	1
5M	16QAM	1	0	23.20	22.96	23.18	1
		1	12	22.99	22.80	23.03	1
		1	24	22.99	22.74	22.99	1
		12	0	21.86	21.69	21.83	2
		12	6	21.81	21.65	21.83	2
		12	13	21.84	21.55	21.84	2
		25	0	21.76	21.49	21.74	2
5M	64QAM	1	0	22.06	21.85	22.01	2
		1	12	21.95	21.75	22.02	2
		1	24	21.90	21.68	21.95	2
		12	0	20.82	20.62	20.78	3
		12	6	20.85	20.64	20.77	3
		12	13	20.74	20.50	20.76	3
		25	0	20.74	20.51	20.67	3
5M	256QAM	1	0	18.96	18.73	18.95	5
		1	12	18.86	18.63	18.85	5
		1	24	18.86	18.63	18.84	5
		12	0	18.84	18.60	18.83	5
		12	6	18.73	18.56	18.75	5
		12	13	18.75	18.48	18.75	5
		25	0	18.68	18.48	18.71	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	23.65	23.51	23.64	0
		1	7	23.64	23.43	23.62	0
		1	14	23.52	23.34	23.46	0
		8	0	22.75	22.68	22.79	1
		8	3	22.72	22.61	22.69	1
		8	7	22.70	22.56	22.62	1
		15	0	22.65	22.51	22.53	1
3M	16QAM	1	0	23.19	22.91	23.14	1
		1	7	23.06	22.80	22.99	1
		1	14	22.99	22.81	22.99	1
		8	0	21.92	21.70	21.92	2
		8	3	21.90	21.68	21.85	2
		8	7	21.85	21.64	21.79	2
		15	0	21.73	21.54	21.66	2
3M	64QAM	1	0	22.01	21.85	22.03	2
		1	7	22.02	21.76	21.99	2
		1	14	21.89	21.70	21.92	2
		8	0	20.88	20.67	20.84	3
		8	3	20.76	20.64	20.83	3
		8	7	20.76	20.50	20.74	3
		15	0	20.75	20.54	20.75	3
3M	256QAM	1	0	18.96	18.74	18.86	5
		1	7	18.94	18.64	18.87	5
		1	14	18.88	18.66	18.84	5
		8	0	18.86	18.63	18.80	5
		8	3	18.73	18.54	18.71	5
		8	7	18.78	18.50	18.67	5
		15	0	18.69	18.49	18.66	5
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	23.63	23.54	23.60	0
		1	2	23.59	23.47	23.57	0
		1	5	23.54	23.34	23.46	0
		3	0	22.75	22.68	22.79	0
		3	1	22.72	22.61	22.69	0
		3	3	22.70	22.56	22.62	0
		6	0	22.65	22.51	22.53	1
1.4M	16QAM	1	0	23.11	22.96	23.10	1
		1	2	23.01	22.82	23.01	1
		1	5	22.98	22.74	22.90	1
		3	0	21.89	21.65	21.85	1
		3	1	21.81	21.68	21.85	1
		3	3	21.78	21.64	21.81	1
		6	0	21.77	21.49	21.75	2
1.4M	64QAM	1	0	22.05	21.87	22.06	2
		1	2	21.94	21.81	22.00	2
		1	5	21.93	21.77	21.92	2
		3	0	20.85	20.58	20.87	2
		3	1	20.85	20.62	20.77	2
		3	3	20.79	20.57	20.78	2
		6	0	20.74	20.53	20.66	3
1.4M	256QAM	1	0	18.92	18.74	18.88	5
		1	2	18.92	18.67	18.86	5
		1	5	18.83	18.65	18.82	5
		3	0	18.82	18.59	18.84	5
		3	1	18.72	18.59	18.77	5
		3	3	18.74	18.55	18.67	5
		6	0	18.70	18.44	18.66	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		23.83		0
		1	24		23.78		0
		1	49		23.69		0
		25	0		22.93		1
		25	12		22.89		1
		25	25		22.84		1
		50	0		22.8		1
10M	16QAM	1	0		23.06		1
		1	24		23.01		1
		1	49		22.97		1
		25	0		21.89		2
		25	12		21.83		2
		25	25		21.78		2
		50	0		21.75		2
10M	64QAM	1	0		21.89		2
		1	24		21.81		2
		1	49		21.76		2
		25	0		20.93		3
		25	12		20.89		3
		25	25		20.82		3
		50	0		20.77		3
10M	256QAM	1	0		18.95		5
		1	24		18.90		5
		1	49		18.86		5
		25	0		18.77		5
		25	12		18.69		5
		25	25		18.63		5
		50	0		18.57		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	23.79	23.77	23.79	0
		1	12	23.76	23.72	23.77	0
		1	24	23.70	23.66	23.71	0
		12	0	22.90	22.86	22.91	1
		12	6	22.85	22.81	22.86	1
		12	13	22.81	22.77	22.82	1
		25	0	22.77	22.73	22.78	1
5M	16QAM	1	0	23.02	22.98	23.03	1
		1	12	22.97	22.93	22.98	1
		1	24	22.93	22.89	22.92	1
		12	0	22.01	21.97	22.02	2
		12	6	21.96	21.92	21.97	2
		12	13	21.91	21.87	21.92	2
		25	0	21.88	21.82	21.87	2
5M	64QAM	1	0	22.10	22.06	22.11	2
		1	12	22.05	22.01	22.06	2
		1	24	21.98	21.94	21.99	2
		12	0	21.03	20.99	21.04	3
		12	6	20.99	20.94	20.99	3
		12	13	20.89	20.85	20.91	3
		25	0	20.85	20.81	20.86	3
5M	256QAM	1	0	19.14	19.10	19.15	5
		1	12	19.07	19.03	19.08	5
		1	24	19.01	18.97	19.02	5
		12	0	18.99	18.95	19.00	5
		12	6	18.93	18.89	18.94	5
		12	13	18.82	18.78	18.83	5
		25	0	18.77	18.73	18.78	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		23.82		0
		1	24		23.78		0
		1	49		23.74		0
		25	0		22.97		1
		25	12		22.92		1
		25	25		22.88		1
		50	0		22.83		1
10M	16QAM	1	0		23.12		1
		1	24		23.07		1
		1	49		23.02		1
		25	0		21.89		2
		25	12		21.83		2
		25	25		21.79		2
		50	0		21.75		2
10M	64QAM	1	0		21.96		2
		1	24		21.91		2
		1	49		21.87		2
		25	0		20.91		3
		25	12		20.86		3
		25	25		20.82		3
		50	0		20.77		3
10M	256QAM	1	0		18.87		5
		1	24		18.82		5
		1	49		18.77		5
		25	0		18.74		5
		25	12		18.69		5
		25	25		18.64		5
		50	0		18.60		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	23.75	23.79	23.76	0
		1	12	23.72	23.50	23.69	0
		1	24	23.66	23.73	23.63	0
		12	0	22.87	22.94	22.84	1
		12	6	22.82	22.89	22.79	1
		12	13	22.77	22.84	22.74	1
		25	0	22.73	22.80	22.70	1
5M	16QAM	1	0	23.02	23.09	22.99	1
		1	12	22.95	23.02	22.92	1
		1	24	22.88	22.95	22.85	1
		12	0	21.90	21.97	21.87	2
		12	6	21.86	21.92	21.82	2
		12	13	21.80	21.87	21.79	2
		25	0	21.76	21.83	21.73	2
5M	64QAM	1	0	21.97	22.04	21.94	2
		1	12	21.92	21.99	21.89	2
		1	24	21.87	21.94	21.84	2
		12	0	20.85	20.92	20.81	3
		12	6	20.81	20.88	20.78	3
		12	13	20.74	20.81	20.71	3
		25	0	20.70	20.77	20.67	3
5M	256QAM	1	0	18.95	19.02	18.92	5
		1	12	18.90	18.96	18.86	5
		1	24	18.85	18.92	18.82	5
		12	0	18.80	18.87	18.77	5
		12	6	18.76	18.83	18.73	5
		12	13	18.71	18.78	18.68	5
		25	0	18.65	18.72	18.62	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	23.44	23.39	23.36	0
		1	24	23.34	23.29	23.26	0
		1	49	23.27	23.22	23.19	0
		25	0	22.49	22.44	22.41	1
		25	12	22.44	22.39	22.36	1
		25	25	22.38	22.33	22.30	1
		50	0	22.33	22.28	22.25	1
10M	16QAM	1	0	22.73	22.68	22.65	1
		1	24	22.67	22.62	22.59	1
		1	49	22.63	22.58	22.55	1
		25	0	21.53	21.48	21.45	2
		25	12	21.46	21.41	21.38	2
		25	25	21.42	21.37	21.34	2
		50	0	21.38	21.33	21.30	2
10M	64QAM	1	0	21.74	21.69	21.66	2
		1	24	21.67	21.62	21.59	2
		1	49	21.62	21.57	21.54	2
		25	0	20.54	20.49	20.46	3
		25	12	20.49	20.44	20.41	3
		25	25	20.44	20.39	20.36	3
		50	0	20.40	20.35	20.32	3
10M	256QAM	1	0	18.44	18.39	18.36	5
		1	24	18.38	18.33	18.30	5
		1	49	18.33	18.28	18.25	5
		25	0	18.28	18.23	18.20	5
		25	12	18.24	18.19	18.16	5
		25	25	18.20	18.15	18.12	5
		50	0	18.16	18.11	18.08	5
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	23.36	23.29	23.31	0
		1	12	23.24	23.26	23.24	0
		1	24	23.21	23.20	23.11	0
		12	0	22.49	22.43	22.69	1
		12	6	22.42	22.39	22.56	1
		12	13	22.30	22.33	22.42	1
		25	0	22.16	22.30	22.22	1
5M	16QAM	1	0	22.73	22.68	22.55	1
		1	12	22.57	22.53	22.49	1
		1	24	22.61	22.58	22.45	1
		12	0	21.48	21.41	21.45	2
		12	6	21.38	21.36	21.32	2
		12	13	21.41	21.28	21.32	2
		25	0	21.33	21.23	21.27	2
5M	64QAM	1	0	21.70	21.68	21.60	2
		1	12	21.60	21.57	21.58	2
		1	24	21.58	21.49	21.45	2
		12	0	20.51	20.43	20.45	3
		12	6	20.47	20.37	20.36	3
		12	13	20.43	20.35	20.34	3
		25	0	20.30	20.32	20.24	3
5M	256QAM	1	0	18.40	18.31	18.35	5
		1	12	18.31	18.23	18.22	5
		1	24	18.25	18.20	18.24	5
		12	0	18.27	18.16	18.18	5
		12	6	18.22	18.12	18.15	5
		12	13	18.20	18.10	18.06	5
		25	0	18.08	18.01	18.02	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	23.59	23.57	23.47	0
		1	50	23.51	23.49	23.39	0
		1	99	23.45	23.43	23.33	0
		50	0	22.61	22.59	22.49	1
		50	25	22.55	22.53	22.43	1
		50	50	22.51	22.49	22.39	1
		100	0	22.46	22.44	22.34	1
20M	16QAM	1	0	22.75	22.73	22.63	1
		1	50	22.69	22.67	22.57	1
		1	99	22.63	22.61	22.51	1
		50	0	21.57	21.55	21.45	2
		50	25	21.52	21.50	21.40	2
		50	50	21.46	21.44	21.34	2
		100	0	21.43	21.41	21.31	2
20M	64QAM	1	0	21.63	21.61	21.51	2
		1	50	21.59	21.57	21.47	2
		1	99	21.54	21.52	21.42	2
		50	0	20.58	20.56	20.46	3
		50	25	20.54	20.52	20.42	3
		50	50	20.49	20.47	20.37	3
		100	0	20.43	20.41	20.31	3
20M	256QAM	1	0	18.78	18.76	18.66	5
		1	50	18.74	18.72	18.62	5
		1	99	18.68	18.66	18.56	5
		50	0	18.65	18.63	18.53	5
		50	25	18.60	18.58	18.48	5
		50	50	18.54	18.52	18.42	5
		100	0	18.49	18.47	18.37	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	23.51	23.49	23.38	0
		1	37	23.43	23.46	23.31	0
		1	74	23.38	23.33	23.29	0
		36	0	22.53	22.53	22.41	1
		36	19	22.51	22.45	22.37	1
		36	39	22.46	22.44	22.34	1
		75	0	22.45	22.41	22.29	1
15M	16QAM	1	0	22.74	22.70	22.62	1
		1	37	22.59	22.61	22.51	1
		1	74	22.63	22.59	22.43	1
		36	0	21.47	21.50	21.37	2
		36	19	21.49	21.41	21.32	2
		36	39	21.39	21.37	21.28	2
		75	0	21.36	21.37	21.28	2
15M	64QAM	1	0	21.59	21.52	21.44	2
		1	37	21.49	21.52	21.45	2
		1	74	21.45	21.45	21.34	2
		36	0	20.54	20.53	20.39	3
		36	19	20.48	20.48	20.39	3
		36	39	20.48	20.42	20.28	3
		75	0	20.37	20.40	20.28	3
15M	256QAM	1	0	18.73	18.76	18.61	5
		1	37	18.68	18.65	18.58	5
		1	74	18.64	18.58	18.54	5
		36	0	18.65	18.55	18.48	5
		36	19	18.60	18.51	18.45	5
		36	39	18.44	18.47	18.34	5
		75	0	18.39	18.45	18.37	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	23.44	23.40	23.33	0
		1	24	23.40	23.35	23.29	0
		1	49	23.32	23.37	23.22	0
		25	0	22.50	22.48	22.33	1
		25	12	22.43	22.43	22.19	1
		25	25	22.33	22.41	22.28	1
		50	0	22.32	22.21	22.26	1
10M	16QAM	1	0	22.67	22.55	22.56	1
		1	24	22.48	22.61	22.36	1
		1	49	22.53	22.46	22.35	1
		25	0	21.57	21.42	21.35	2
		25	12	21.45	21.41	21.20	2
		25	25	21.33	21.30	21.21	2
		50	0	21.31	21.28	21.19	2
10M	64QAM	1	0	21.53	21.55	21.42	2
		1	24	21.48	21.41	21.38	2
		1	49	21.51	21.47	21.32	2
		25	0	20.41	20.35	20.32	3
		25	12	20.30	20.43	20.31	3
		25	25	20.33	20.41	20.22	3
		50	0	20.27	20.21	20.10	3
10M	256QAM	1	0	18.69	18.70	18.66	5
		1	24	18.69	18.70	18.62	5
		1	49	18.63	18.58	18.54	5
		25	0	18.65	18.53	18.43	5
		25	12	18.60	18.50	18.47	5
		25	25	18.50	18.47	18.36	5
		50	0	18.43	18.46	18.33	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	23.38	23.36	23.33	0
		1	12	23.36	23.34	23.07	0
		1	24	23.31	23.33	23.04	0
		12	0	22.46	22.44	22.29	1
		12	6	22.52	22.45	22.23	1
		12	13	22.37	22.38	22.18	1
		25	0	22.34	22.34	22.09	1
5M	16QAM	1	0	22.65	22.58	22.46	1
		1	12	22.59	22.54	22.54	1
		1	24	22.56	22.49	22.42	1
		12	0	21.51	21.49	21.41	2
		12	6	21.43	21.27	21.33	2
		12	13	21.27	21.33	21.23	2
		25	0	21.37	21.32	21.21	2
5M	64QAM	1	0	21.54	21.55	21.37	2
		1	12	21.46	21.48	21.29	2
		1	24	21.39	21.41	21.26	2
		12	0	20.41	20.44	20.32	3
		12	6	20.42	20.42	20.28	3
		12	13	20.41	20.31	20.16	3
		25	0	20.40	20.26	20.20	3
5M	256QAM	1	0	18.73	18.74	18.57	5
		1	12	18.72	18.66	18.61	5
		1	24	18.65	18.65	18.52	5
		12	0	18.59	18.60	18.52	5
		12	6	18.53	18.54	18.39	5
		12	13	18.47	18.43	18.37	5
		25	0	18.43	18.44	18.27	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	23.48	23.43	23.24	0
		1	7	23.42	23.40	23.18	0
		1	14	23.22	23.34	23.33	0
		8	0	22.51	22.44	22.32	1
		8	3	22.39	22.38	22.33	1
		8	7	22.40	22.36	22.25	1
		15	0	22.34	22.34	22.10	1
3M	16QAM	1	0	22.74	22.67	22.47	1
		1	7	22.55	22.50	22.43	1
		1	14	22.48	22.51	22.44	1
		8	0	21.46	21.42	21.24	2
		8	3	21.35	21.41	21.30	2
		8	7	21.40	21.31	21.14	2
		15	0	21.39	21.25	21.20	2
3M	64QAM	1	0	21.58	21.49	21.34	2
		1	7	21.41	21.49	21.40	2
		1	14	21.39	21.31	21.40	2
		8	0	20.42	20.43	20.22	3
		8	3	20.49	20.34	20.31	3
		8	7	20.36	20.30	20.29	3
		15	0	20.33	20.36	20.20	3
3M	256QAM	1	0	18.69	18.72	18.64	5
		1	7	18.69	18.67	18.61	5
		1	14	18.61	18.66	18.46	5
		8	0	18.59	18.63	18.51	5
		8	3	18.57	18.56	18.41	5
		8	7	18.46	18.48	18.38	5
		15	0	18.48	18.46	18.36	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	23.42	23.40	23.29	0
		1	2	23.33	23.42	23.29	0
		1	5	23.29	23.24	23.27	0
		3	0	23.44	23.37	23.28	0
		3	1	23.37	23.42	23.37	0
		3	3	23.41	23.38	23.37	0
		6	0	22.31	22.39	22.20	1
1.4M	16QAM	1	0	22.73	22.50	22.51	1
		1	2	22.54	22.49	22.55	1
		1	5	22.55	22.46	22.29	1
		3	0	22.45	22.41	22.26	1
		3	1	22.46	22.42	22.29	1
		3	3	22.39	22.38	22.29	1
		6	0	21.28	21.40	21.11	2
1.4M	64QAM	1	0	21.56	21.44	21.41	2
		1	2	21.38	21.50	21.36	2
		1	5	21.53	21.36	21.33	2
		3	0	21.48	21.38	21.35	2
		3	1	21.33	21.43	21.37	2
		3	3	21.47	21.26	21.35	2
		6	0	20.33	20.30	20.21	3
1.4M	256QAM	1	0	18.78	18.76	18.56	5
		1	2	18.65	18.69	18.59	5
		1	5	18.68	18.56	18.50	5
		3	0	18.57	18.59	18.44	5
		3	1	18.57	18.55	18.42	5
		3	3	18.47	18.47	18.32	5
		6	0	18.48	18.45	18.30	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	24.00	24.06	23.94	0
		1	37	23.92	23.98	23.86	0
		1	74	23.86	23.92	23.80	0
		36	0	23.00	23.06	22.94	1
		36	19	22.93	22.99	22.87	1
		36	39	22.88	22.94	22.82	1
		75	0	22.82	22.88	22.76	1
15M	16QAM	1	0	23.24	23.30	23.18	1
		1	37	23.19	23.25	23.13	1
		1	74	23.13	23.19	23.07	1
		36	0	22.03	22.09	21.97	2
		36	19	21.96	22.02	21.90	2
		36	39	21.92	21.98	21.86	2
		75	0	21.87	21.93	21.81	2
15M	64QAM	1	0	22.15	22.21	22.09	2
		1	37	22.10	22.16	22.04	2
		1	74	22.05	22.11	21.99	2
		36	0	21.13	21.19	21.07	3
		36	19	21.09	21.15	21.03	3
		36	39	21.04	21.10	20.98	3
		75	0	21.01	21.07	20.95	3
15M	256QAM	1	0	19.14	19.20	19.08	5
		1	37	19.08	19.14	19.02	5
		1	74	19.05	19.11	18.99	5
		36	0	19.00	19.06	18.94	5
		36	19	18.93	18.99	18.87	5
		36	39	18.87	18.93	18.81	5
		75	0	18.84	18.90	18.78	5
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	23.99	24.00	23.85	0
		1	24	23.86	23.91	23.80	0
		1	49	23.82	23.84	23.74	0
		25	0	22.97	22.99	22.94	1
		25	12	22.88	22.94	22.83	1
		25	25	22.79	22.88	22.78	1
		50	0	22.74	22.83	22.71	1
10M	16QAM	1	0	23.24	23.24	23.17	1
		1	24	23.15	23.24	23.03	1
		1	49	23.07	23.19	23.00	1
		25	0	21.99	22.05	21.87	2
		25	12	21.93	21.99	21.80	2
		25	25	21.83	21.97	21.84	2
		50	0	21.79	21.87	21.80	2
10M	64QAM	1	0	22.13	22.19	22.00	2
		1	24	22.00	22.16	21.94	2
		1	49	22.00	22.03	21.89	2
		25	0	21.12	21.18	21.00	3
		25	12	21.08	21.06	21.02	3
		25	25	21.04	21.10	20.90	3
		50	0	20.94	20.98	20.86	3
10M	256QAM	1	0	19.13	19.12	19.02	5
		1	24	19.08	19.13	18.94	5
		1	49	19.04	19.11	18.90	5
		25	0	18.96	19.01	18.94	5
		25	12	18.88	18.95	18.80	5
		25	25	18.78	18.93	18.72	5
		50	0	18.83	18.80	18.69	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	23.85	23.88	23.80	0
		1	12	23.84	23.85	23.69	0
		1	24	23.66	23.81	23.67	0
		12	0	22.85	22.90	22.77	1
		12	6	22.82	22.88	22.74	1
		12	13	22.84	22.69	22.66	1
		25	0	22.66	22.64	22.60	1
5M	16QAM	1	0	23.08	23.14	23.06	1
		1	12	23.05	23.15	22.99	1
		1	24	23.05	23.07	22.91	1
		12	0	21.88	21.98	21.75	2
		12	6	21.71	21.84	21.87	2
		12	13	21.83	21.89	21.76	2
		25	0	21.76	21.86	21.63	2
5M	64QAM	1	0	21.93	22.03	21.91	2
		1	12	21.91	21.98	21.89	2
		1	24	21.84	21.96	21.77	2
		12	0	21.00	21.09	20.86	3
		12	6	20.93	21.07	20.88	3
		12	13	20.96	20.92	20.86	3
		25	0	20.86	21.00	20.71	3
5M	256QAM	1	0	19.10	19.20	19.05	5
		1	12	19.00	19.14	19.00	5
		1	24	19.05	19.06	18.97	5
		12	0	18.96	19.00	18.88	5
		12	6	18.90	18.91	18.77	5
		12	13	18.79	18.87	18.77	5
		25	0	18.78	18.88	18.75	5
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	23.93	23.94	23.74	0
		1	7	23.80	23.90	23.72	0
		1	14	23.64	23.84	23.70	0
		8	0	22.93	23.03	22.80	1
		8	3	22.75	22.83	22.70	1
		8	7	22.78	22.92	22.54	1
		15	0	22.71	22.74	22.52	1
3M	16QAM	1	0	23.09	23.08	23.02	1
		1	7	23.14	23.13	22.92	1
		1	14	22.99	23.09	23.00	1
		8	0	21.97	21.99	21.80	2
		8	3	21.81	21.92	21.68	2
		8	7	21.75	21.86	21.76	2
		15	0	21.77	21.81	21.64	2
3M	64QAM	1	0	22.07	22.17	21.97	2
		1	7	21.91	22.09	21.89	2
		1	14	21.80	21.96	21.79	2
		8	0	20.93	21.06	20.85	3
		8	3	21.03	21.03	20.89	3
		8	7	20.99	20.96	20.86	3
		15	0	20.87	20.86	20.84	3
3M	256QAM	1	0	19.06	19.13	19.02	5
		1	7	19.07	19.08	19.02	5
		1	14	18.97	19.04	18.92	5
		8	0	18.95	19.04	18.85	5
		8	3	18.92	18.91	18.83	5
		8	7	18.79	18.89	18.80	5
		15	0	18.81	18.80	18.71	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	23.91	23.92	23.86	0
		1	2	23.85	23.85	23.80	0
		1	5	23.64	23.85	23.74	0
		3	0	22.96	23.02	22.80	0
		3	1	22.70	22.82	22.79	0
		3	3	22.83	22.76	22.63	0
		6	0	22.78	22.71	22.58	1
1.4M	16QAM	1	0	23.05	23.09	23.08	1
		1	2	23.09	23.08	23.06	1
		1	5	22.89	23.17	23.01	1
		3	0	21.95	21.98	21.88	1
		3	1	21.83	21.92	21.74	1
		3	3	21.75	21.84	21.70	1
		6	0	21.68	21.76	21.70	2
1.4M	64QAM	1	0	22.00	22.19	21.85	2
		1	2	21.90	22.05	22.00	2
		1	5	21.96	21.96	21.91	2
		3	0	20.97	20.97	20.85	2
		3	1	20.89	21.00	20.95	2
		3	3	20.94	21.07	20.92	2
		6	0	20.82	20.92	20.91	3
1.4M	256QAM	1	0	19.08	19.20	19.05	5
		1	2	19.00	19.09	18.97	5
		1	5	18.98	19.04	18.98	5
		3	0	18.99	18.97	18.92	5
		3	1	18.86	18.97	18.84	5
		3	3	18.85	18.87	18.76	5
		6	0	18.82	18.87	18.74	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		22.72		0
		1	24		22.65		0
		1	49		22.60		0
		25	0		21.70		1
		25	12		21.64		1
		25	25		21.59		1
		50	0		21.53		1
10M	16QAM	1	0		22.12		1
		1	24		22.06		1
		1	49		22.01		1
		25	0		21.09		2
		25	12		21.03		2
		25	25		20.99		2
		50	0		20.94		2
10M	64QAM	1	0		20.99		2
		1	24		20.92		2
		1	49		20.87		2
		25	0		20.00		3
		25	12		19.96		3
		25	25		19.90		3
		50	0		19.85		3
10M	256QAM	1	0		17.89		5
		1	24		17.84		5
		1	49		17.81		5
		25	0		17.77		5
		25	12		17.71		5
		25	25		17.65		5
		50	0		17.61		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	22.65	22.69	22.67	0
		1	12	22.58	22.62	22.55	0
		1	24	22.60	22.55	22.55	0
		12	0	21.69	21.70	21.60	1
		12	6	21.59	21.59	21.54	1
		12	13	21.51	21.49	21.54	1
		25	0	21.46	21.53	21.46	1
5M	16QAM	1	0	22.02	22.04	22.08	1
		1	12	22.03	22.06	22.03	1
		1	24	22.00	21.98	21.95	1
		12	0	21.06	21.07	21.06	2
		12	6	20.95	20.95	20.99	2
		12	13	20.94	20.96	20.93	2
		25	0	20.84	20.86	20.88	2
5M	64QAM	1	0	20.95	20.90	20.90	2
		1	12	20.88	20.88	20.91	2
		1	24	20.82	20.80	20.82	2
		12	0	19.93	19.96	19.95	3
		12	6	19.92	19.96	19.90	3
		12	13	19.86	19.80	19.83	3
		25	0	19.77	19.84	19.85	3
5M	256QAM	1	0	17.79	17.83	17.85	5
		1	12	17.84	17.75	17.82	5
		1	24	17.72	17.79	17.77	5
		12	0	17.71	17.73	17.75	5
		12	6	17.61	17.70	17.67	5
		12	13	17.65	17.61	17.64	5
		25	0	17.54	17.56	17.56	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	23.84	23.65	23.57	0
		1	50	23.70	23.51	23.43	0
		1	99	23.64	23.45	23.37	0
		50	0	22.89	22.70	22.62	1
		50	25	22.83	22.64	22.56	1
		50	50	22.78	22.59	22.51	1
		100	0	22.73	22.54	22.46	1
20M	16QAM	1	0	22.81	22.62	22.54	1
		1	50	22.76	22.57	22.49	1
		1	99	22.71	22.52	22.44	1
		50	0	21.90	21.71	21.63	2
		50	25	21.85	21.66	21.58	2
		50	50	21.81	21.62	21.54	2
		100	0	21.76	21.57	21.49	2
20M	64QAM	1	0	21.77	21.58	21.50	2
		1	50	21.73	21.54	21.46	2
		1	99	21.70	21.51	21.43	2
		50	0	20.88	20.69	20.61	3
		50	25	20.82	20.63	20.55	3
		50	50	20.78	20.59	20.51	3
		100	0	20.74	20.55	20.47	3
20M	256QAM	1	0	18.88	18.69	18.61	5
		1	50	18.83	18.64	18.56	5
		1	99	18.80	18.61	18.53	5
		50	0	18.75	18.56	18.48	5
		50	25	18.72	18.53	18.45	5
		50	50	18.68	18.49	18.41	5
		100	0	19.09	18.90	18.82	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	23.74	23.61	23.53	0
		1	37	23.61	23.41	23.34	0
		1	74	23.57	23.45	23.32	0
		36	0	22.88	22.70	22.62	1
		36	19	22.80	22.63	22.49	1
		36	39	22.71	22.51	22.43	1
		75	0	22.71	22.53	22.40	1
15M	16QAM	1	0	22.80	22.58	22.48	1
		1	37	22.71	22.48	22.41	1
		1	74	22.69	22.50	22.41	1
		36	0	21.84	21.69	21.62	2
		36	19	21.75	21.64	21.51	2
		36	39	21.78	21.56	21.44	2
		75	0	21.74	21.50	21.43	2
15M	64QAM	1	0	21.77	21.48	21.48	2
		1	37	21.67	21.54	21.42	2
		1	74	21.62	21.48	21.35	2
		36	0	20.85	20.68	20.58	3
		36	19	20.80	20.59	20.46	3
		36	39	20.71	20.50	20.50	3
		75	0	20.67	20.52	20.46	3
15M	256QAM	1	0	18.87	18.64	18.60	5
		1	37	18.75	18.55	18.53	5
		1	74	18.79	18.51	18.43	5
		36	0	18.70	18.54	18.42	5
		36	19	18.64	18.47	18.43	5
		36	39	18.61	18.45	18.36	5
		75	0	18.99	18.83	18.72	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	23.79	23.60	23.57	0
		1	24	23.67	23.51	23.42	0
		1	49	23.55	23.35	23.35	0
		25	0	22.89	22.64	22.52	1
		25	12	22.74	22.64	22.47	1
		25	25	22.70	22.51	22.48	1
		50	0	22.70	22.45	22.43	1
10M	16QAM	1	0	22.81	22.52	22.53	1
		1	24	22.75	22.54	22.41	1
		1	49	22.68	22.52	22.40	1
		25	0	21.84	21.67	21.58	2
		25	12	21.84	21.66	21.55	2
		25	25	21.81	21.62	21.45	2
		50	0	21.75	21.53	21.40	2
10M	64QAM	1	0	21.75	21.50	21.49	2
		1	24	21.63	21.48	21.37	2
		1	49	21.68	21.51	21.33	2
		25	0	20.84	20.60	20.51	3
		25	12	20.81	20.54	20.52	3
		25	25	20.69	20.55	20.51	3
		50	0	20.64	20.50	20.41	3
10M	256QAM	1	0	18.88	18.66	18.59	5
		1	24	18.80	18.55	18.56	5
		1	49	18.74	18.58	18.46	5
		25	0	18.75	18.50	18.48	5
		25	12	18.72	18.43	18.37	5
		25	25	18.66	18.45	18.34	5
		50	0	19.08	18.88	18.82	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	23.83	23.65	23.51	0
		1	12	23.64	23.47	23.37	0
		1	24	23.59	23.37	23.29	0
		12	0	22.85	22.68	22.56	1
		12	6	22.76	22.57	22.54	1
		12	13	22.69	22.50	22.44	1
		25	0	22.66	22.51	22.43	1
5M	16QAM	1	0	22.76	22.60	22.48	1
		1	12	22.74	22.55	22.40	1
		1	24	22.61	22.51	22.37	1
		12	0	21.88	21.69	21.60	2
		12	6	21.75	21.61	21.54	2
		12	13	21.78	21.55	21.45	2
		25	0	21.73	21.56	21.48	2
5M	64QAM	1	0	21.71	21.54	21.46	2
		1	12	21.69	21.49	21.39	2
		1	24	21.67	21.50	21.36	2
		12	0	20.83	20.60	20.52	3
		12	6	20.72	20.62	20.55	3
		12	13	20.70	20.53	20.44	3
		25	0	20.65	20.55	20.40	3
5M	256QAM	1	0	18.79	18.67	18.59	5
		1	12	18.78	18.55	18.56	5
		1	24	18.70	18.58	18.51	5
		12	0	18.69	18.51	18.47	5
		12	6	18.65	18.46	18.36	5
		12	13	18.66	18.43	18.38	5
		25	0	18.99	18.81	18.76	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)										
LTE Band 41										
BW	MCS Index	RB Size	RB Offset	Low	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39790	39750	40185	40620	41055	41490	
		Frequency (MHz)		2510	2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	23.98	23.96	23.90	23.99	23.65	23.54	0
		1	50	23.88	23.86	23.80	23.89	23.55	23.10	0
		1	99	23.90	23.88	23.82	23.91	23.57	23.12	0
		50	0	23.06	23.04	22.98	23.07	22.73	22.28	1
		50	25	22.93	22.91	22.85	22.94	22.60	22.15	1
		50	50	22.89	22.87	22.81	22.90	22.56	22.11	1
		100	0	22.92	22.90	22.84	22.93	22.59	22.14	1
20M	16QAM	1	0	22.93	22.94	22.87	22.90	22.58	22.52	1
		1	50	22.81	22.82	22.75	22.86	22.47	22.09	1
		1	99	22.86	22.84	22.80	22.82	22.50	22.10	1
		50	0	22.01	21.96	21.90	22.00	21.71	21.28	2
		50	25	21.91	21.89	21.80	21.84	21.50	21.10	2
		50	50	21.87	21.79	21.81	21.88	21.55	21.04	2
		100	0	21.91	21.90	21.79	21.91	21.56	21.12	2
20M	64QAM	1	0	21.96	21.95	21.90	21.98	21.62	21.53	2
		1	50	21.82	21.83	21.75	21.87	21.54	21.08	2
		1	99	21.88	21.87	21.75	21.82	21.49	21.06	2
		50	0	21.01	21.00	20.91	21.05	20.70	20.24	3
		50	25	20.84	20.85	20.84	20.91	20.60	20.11	3
		50	50	20.86	20.81	20.73	20.83	20.51	20.06	3
		100	0	20.88	20.85	20.79	20.90	20.52	20.07	3
20M	256QAM	1	0	18.95	18.93	18.87	18.96	18.62	18.17	5
		1	50	18.80	18.78	18.72	18.81	18.47	18.02	5
		1	99	18.70	18.68	18.62	18.71	18.37	17.92	5
		50	0	18.98	18.96	18.90	18.99	18.65	18.20	5
		50	25	18.95	18.93	18.87	18.96	18.62	18.17	5
		50	50	18.97	18.95	18.89	18.98	18.64	18.19	5
		100	0	18.96	18.94	18.88	18.97	18.63	18.18	5
BW	MCS Index	Channel		39765	39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2507.5	2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	23.92	23.86	23.90	23.89	23.60	23.46	0
		1	37	23.81	23.80	23.79	23.88	23.46	23.02	0
		1	74	23.90	23.82	23.73	23.88	23.56	23.11	0
		36	0	23.04	22.96	22.93	23.03	22.72	22.25	1
		36	19	22.84	22.89	22.83	22.89	22.53	22.13	1
		36	39	22.84	22.79	22.77	22.85	22.50	22.01	1
		75	0	22.84	22.82	22.83	22.89	22.49	22.11	1
15M	16QAM	1	0	22.97	22.89	22.81	22.91	22.65	22.49	1
		1	37	22.88	22.86	22.80	22.86	22.49	22.05	1
		1	74	22.82	22.80	22.74	22.85	22.57	22.09	1
		36	0	22.06	22.01	21.94	22.00	21.69	21.23	2
		36	19	21.87	21.88	21.78	21.89	21.54	21.12	2
		36	39	21.86	21.83	21.77	21.83	21.48	21.05	2
		75	0	21.86	21.81	21.77	21.86	21.54	21.14	2
15M	64QAM	1	0	21.93	21.87	21.80	21.89	21.64	21.52	2
		1	37	21.80	21.77	21.71	21.82	21.53	21.10	2
		1	74	21.87	21.88	21.77	21.87	21.52	21.10	2
		36	0	21.00	21.03	20.98	21.06	20.65	20.25	3
		36	19	20.88	20.89	20.80	20.88	20.56	20.09	3
		36	39	20.88	20.78	20.81	20.81	20.56	20.07	3
		75	0	20.84	20.90	20.76	20.87	20.55	20.05	3
15M	256QAM	1	0	18.94	18.92	18.86	18.95	18.61	18.16	5
		1	37	18.79	18.77	18.71	18.80	18.46	18.01	5
		1	74	18.69	18.67	18.61	18.70	18.36	17.91	5
		36	0	18.97	18.95	18.89	18.98	18.64	18.19	5
		36	19	18.94	18.92	18.86	18.95	18.61	18.16	5
		36	39	18.96	18.94	18.88	18.97	18.63	18.18	5
		75	0	18.95	18.93	18.87	18.96	18.62	18.17	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)										
LTE Band 41										
BW	MCS Index	Channel		39740	39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2505	2501	2547	2593	2639	2685	
10M	QPSK	1	0	23.87	23.87	23.76	23.89	23.57	23.40	0
		1	24	23.80	23.80	23.71	23.81	23.41	22.97	0
		1	49	23.82	23.80	23.72	23.86	23.45	22.98	0
		25	0	23.01	22.99	22.88	22.96	22.69	22.20	1
		25	12	22.91	22.77	22.77	22.80	22.46	22.08	1
		25	25	22.82	22.69	22.72	22.84	22.43	22.00	1
		50	0	22.78	22.71	22.78	22.90	22.46	22.13	1
10M	16QAM	1	0	22.90	22.86	22.82	22.90	22.59	22.44	1
		1	24	22.83	22.78	22.73	22.83	22.44	21.92	1
		1	49	22.87	22.81	22.68	22.85	22.42	22.00	1
		25	0	21.95	21.97	21.92	21.88	21.62	21.14	2
		25	12	21.89	21.75	21.74	21.83	21.46	21.07	2
		25	25	21.84	21.71	21.67	21.88	21.44	20.97	2
		50	0	21.77	21.71	21.78	21.93	21.49	21.03	2
10M	64QAM	1	0	21.89	21.86	21.76	21.93	21.60	21.45	2
		1	24	21.78	21.79	21.67	21.78	21.46	20.97	2
		1	49	21.79	21.80	21.73	21.82	21.51	21.04	2
		25	0	20.98	21.01	20.96	20.97	20.63	20.23	3
		25	12	20.85	20.80	20.75	20.80	20.52	20.03	3
		25	25	20.79	20.67	20.62	20.84	20.42	19.99	3
		50	0	20.77	20.81	20.78	20.84	20.52	20.03	3
10M	256QAM	1	0	18.93	18.91	18.85	18.94	18.60	18.15	5
		1	24	18.78	18.76	18.70	18.79	18.45	18.00	5
		1	49	18.68	18.66	18.60	18.69	18.35	17.90	5
		25	0	18.96	18.94	18.88	18.97	18.63	18.18	5
		25	12	18.93	18.91	18.85	18.94	18.60	18.15	5
		25	25	18.95	18.93	18.87	18.96	18.62	18.17	5
		50	0	18.94	18.92	18.86	18.95	18.61	18.16	5
BW	MCS Index	Channel		39715	39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2502.5	2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	23.96	23.90	23.86	23.86	23.51	23.48	0
		1	12	23.79	23.82	23.70	23.77	23.42	23.07	0
		1	24	23.75	23.80	23.66	23.85	23.43	22.97	0
		12	0	22.98	22.93	22.84	23.06	22.62	22.16	1
		12	6	22.88	22.84	22.70	22.87	22.52	22.12	1
		12	13	22.81	22.75	22.80	22.73	22.44	22.10	1
		25	0	22.91	22.77	22.73	22.80	22.55	22.03	1
5M	16QAM	1	0	22.91	22.93	22.80	22.85	22.56	22.43	1
		1	12	22.77	22.78	22.74	22.79	22.43	22.06	1
		1	24	22.78	22.75	22.75	22.79	22.46	22.06	1
		12	0	21.98	21.94	21.88	22.02	21.66	21.21	2
		12	6	21.82	21.83	21.76	21.78	21.54	21.04	2
		12	13	21.72	21.79	21.80	21.78	21.42	21.00	2
		25	0	21.91	21.79	21.71	21.87	21.48	21.08	2
5M	64QAM	1	0	21.92	21.91	21.83	21.83	21.49	21.43	2
		1	12	21.73	21.83	21.72	21.73	21.46	20.98	2
		1	24	21.71	21.75	21.68	21.84	21.40	21.05	2
		12	0	20.99	20.92	20.86	21.01	20.59	20.16	3
		12	6	20.83	20.89	20.72	20.80	20.49	20.11	3
		12	13	20.71	20.79	20.78	20.79	20.45	20.01	3
		25	0	20.84	20.80	20.69	20.87	20.53	20.08	3
5M	256QAM	1	0	18.92	18.90	18.84	18.93	18.59	18.14	5
		1	12	18.77	18.75	18.69	18.78	18.44	17.99	5
		1	24	18.67	18.65	18.59	18.68	18.34	17.89	5
		12	0	18.95	18.93	18.87	18.96	18.62	18.17	5
		12	6	18.92	18.90	18.84	18.93	18.59	18.14	5
		12	13	18.94	18.92	18.86	18.95	18.61	18.16	5
		25	0	18.93	18.91	18.85	18.94	18.60	18.15	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.76	23.80	23.60	0
		1	50	23.52	23.56	23.36	0
		1	99	23.53	23.57	23.37	0
		50	0	22.59	22.66	22.43	1
		50	25	22.57	22.64	22.41	1
		50	50	22.61	22.60	22.45	1
		100	0	22.58	22.62	22.42	1
20M	16QAM	1	0	22.71	22.75	22.56	1
		1	50	22.44	22.50	22.31	1
		1	99	22.53	22.55	22.29	1
		50	0	21.52	21.56	21.40	2
		50	25	21.48	21.59	21.32	2
		50	50	21.57	21.60	21.38	2
		100	0	21.52	21.54	21.32	2
20M	64QAM	1	0	21.70	21.73	21.53	2
		1	50	21.46	21.56	21.35	2
		1	99	21.52	21.48	21.27	2
		50	0	20.51	20.58	20.38	3
		50	25	20.55	20.52	20.33	3
		50	50	20.59	20.57	20.41	3
		100	0	20.48	20.57	20.38	3
20M	256QAM	1	0	18.94	18.98	18.78	5
		1	50	18.82	18.86	18.66	5
		1	99	18.77	18.81	18.61	5
		50	0	18.61	18.65	18.45	5
		50	25	18.60	18.64	18.44	5
		50	50	18.64	18.68	18.48	5
		100	0	18.60	18.64	18.44	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.70	23.75	23.58	0
		1	37	23.48	23.52	23.35	0
		1	74	23.47	23.49	23.27	0
		36	0	22.58	22.59	22.36	1
		36	19	22.47	22.59	22.40	1
		36	39	22.59	22.58	22.42	1
		75	0	22.50	22.59	22.36	1
15M	16QAM	1	0	22.71	22.71	22.56	1
		1	37	22.47	22.53	22.27	1
		1	74	22.46	22.48	22.25	1
		36	0	21.48	21.51	21.35	2
		36	19	21.46	21.42	21.25	2
		36	39	21.56	21.55	21.42	2
		75	0	21.48	21.53	21.27	2
15M	64QAM	1	0	21.72	21.73	21.58	2
		1	37	21.39	21.37	21.32	2
		1	74	21.49	21.45	21.28	2
		36	0	20.46	20.60	20.41	3
		36	19	20.40	20.43	20.28	3
		36	39	20.52	20.59	20.35	3
		75	0	20.51	20.47	20.42	3
15M	256QAM	1	0	18.93	18.97	18.77	5
		1	37	18.81	18.85	18.65	5
		1	74	18.76	18.80	18.60	5
		36	0	18.60	18.64	18.44	5
		36	19	18.59	18.63	18.43	5
		36	39	18.63	18.67	18.47	5
		75	0	18.59	18.63	18.43	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	23.63	23.57	23.42	0
		1	24	23.44	23.38	23.17	0
		1	49	23.37	23.41	23.23	0
		25	0	22.34	22.54	22.25	1
		25	12	22.41	22.48	22.26	1
		25	25	22.56	22.59	22.31	1
		50	0	22.49	22.44	22.33	1
10M	16QAM	1	0	22.59	22.50	22.50	1
		1	24	22.37	22.42	22.16	1
		1	49	22.36	22.39	22.04	1
		25	0	21.43	21.42	21.16	2
		25	12	21.34	21.43	21.24	2
		25	25	21.46	21.50	21.21	2
		50	0	21.44	21.48	21.25	2
10M	64QAM	1	0	21.69	21.71	21.39	2
		1	24	21.30	21.39	21.27	2
		1	49	21.39	21.45	21.35	2
		25	0	20.51	20.54	20.20	3
		25	12	20.36	20.40	20.21	3
		25	25	20.49	20.49	20.19	3
		50	0	20.37	20.43	20.33	3
10M	256QAM	1	0	18.92	18.96	18.76	5
		1	24	18.80	18.84	18.64	5
		1	49	18.75	18.79	18.59	5
		25	0	18.59	18.63	18.43	5
		25	12	18.58	18.62	18.42	5
		25	25	18.62	18.66	18.46	5
		50	0	18.58	18.62	18.42	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.67	23.79	23.41	0
		1	12	23.37	23.46	23.16	0
		1	24	23.44	23.52	23.19	0
		12	0	22.50	22.49	22.24	1
		12	6	22.46	22.55	22.19	1
		12	13	22.46	22.57	22.23	1
		25	0	22.48	22.41	22.21	1
5M	16QAM	1	0	22.53	22.67	22.59	1
		1	12	22.28	22.31	22.20	1
		1	24	22.36	22.49	22.15	1
		12	0	21.39	21.40	21.16	2
		12	6	21.53	21.44	21.25	2
		12	13	21.53	21.38	21.26	2
		25	0	21.32	21.49	21.38	2
5M	64QAM	1	0	21.59	21.53	21.33	2
		1	12	21.40	21.42	21.08	2
		1	24	21.31	21.41	21.16	2
		12	0	20.45	20.36	20.28	3
		12	6	20.31	20.39	20.24	3
		12	13	20.44	20.41	20.32	3
		25	0	20.30	20.36	20.23	3
5M	256QAM	1	0	18.91	18.95	18.75	5
		1	12	18.79	18.83	18.63	5
		1	24	18.74	18.78	18.58	5
		12	0	18.58	18.62	18.42	5
		12	6	18.57	18.61	18.41	5
		12	13	18.61	18.65	18.45	5
		25	0	18.57	18.61	18.41	5

LTE Conducted Power (P-Sensor_Off_Ant0_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	23.60	23.56	23.56	0
		1	7	23.35	23.41	23.24	0
		1	14	23.41	23.49	23.26	0
		8	0	22.42	22.49	22.25	1
		8	3	22.43	22.42	22.31	1
		8	7	22.54	22.48	22.31	1
		15	0	22.46	22.55	22.29	1
3M	16QAM	1	0	22.62	22.62	22.37	1
		1	7	22.24	22.39	22.10	1
		1	14	22.22	22.33	22.16	1
		8	0	21.36	21.44	21.29	2
		8	3	21.34	21.40	21.22	2
		8	7	21.45	21.53	21.19	2
		15	0	21.28	21.34	21.23	2
3M	64QAM	1	0	21.60	21.67	21.34	2
		1	7	21.37	21.42	21.06	2
		1	14	21.34	21.34	21.11	2
		8	0	20.34	20.53	20.39	3
		8	3	20.34	20.41	20.21	3
		8	7	20.44	20.34	20.17	3
		15	0	20.30	20.44	20.16	3
3M	256QAM	1	0	18.90	18.94	18.74	5
		1	7	18.78	18.82	18.62	5
		1	14	18.73	18.77	18.57	5
		8	0	18.57	18.61	18.41	5
		8	3	18.56	18.60	18.40	5
		8	7	18.60	18.64	18.44	5
		15	0	18.56	18.60	18.40	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	23.65	23.69	23.42	0
		1	2	23.47	23.38	23.24	0
		1	5	23.50	23.44	23.34	0
		3	0	23.45	23.55	23.23	0
		3	1	23.50	23.54	23.18	0
		3	3	23.44	23.56	23.25	0
		6	0	22.52	22.51	22.36	1
1.4M	16QAM	1	0	22.51	22.64	22.34	1
		1	2	22.36	22.36	22.23	1
		1	5	22.29	22.38	22.22	1
		3	0	22.40	22.54	22.20	1
		3	1	22.43	22.42	22.28	1
		3	3	22.54	22.56	22.28	1
		6	0	21.41	21.36	21.29	2
1.4M	64QAM	1	0	21.61	21.63	21.42	2
		1	2	21.41	21.46	21.09	2
		1	5	21.38	21.34	21.17	2
		3	0	21.36	21.45	21.26	2
		3	1	21.48	21.51	21.34	2
		3	3	21.52	21.55	21.31	2
		6	0	20.47	20.48	20.30	3
1.4M	256QAM	1	0	18.89	18.93	18.73	5
		1	2	18.77	18.81	18.61	5
		1	5	18.72	18.76	18.56	5
		3	0	18.56	18.60	18.40	5
		3	1	18.55	18.59	18.39	5
		3	3	18.59	18.63	18.43	5
		6	0	18.55	18.59	18.39	5

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	11.06	11.01	10.97	0
		1	50	11.01	10.96	10.92	0
		1	99	10.96	10.91	10.87	0
		50	0	11.04	10.99	10.95	0
		50	25	10.99	10.94	10.90	0
		50	50	10.96	10.91	10.87	0
		100	0	10.93	10.88	10.84	0
20M	16QAM	1	0	11.04	10.99	10.95	0
		1	50	11.00	10.95	10.91	0
		1	99	10.95	10.90	10.86	0
		50	0	11.01	10.96	10.92	0
		50	25	10.98	10.93	10.89	0
		50	50	10.94	10.89	10.85	0
		100	0	10.89	10.84	10.80	0
20M	64QAM	1	0	11.03	10.98	10.94	0
		1	50	11.00	10.95	10.91	0
		1	99	10.94	10.89	10.85	0
		50	0	11.01	10.96	10.92	0
		50	25	10.98	10.93	10.89	0
		50	50	10.94	10.89	10.85	0
		100	0	10.89	10.84	10.80	0
20M	256QAM	1	0	11.02	10.97	10.93	0
		1	50	11.00	10.95	10.91	0
		1	99	10.94	10.89	10.85	0
		50	0	11.00	10.95	10.91	0
		50	25	10.98	10.93	10.89	0
		50	50	10.93	10.88	10.84	0
		100	0	10.89	10.84	10.80	0
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	10.94	10.96	10.95	0
		1	37	10.93	10.86	10.85	0
		1	74	10.89	10.80	10.84	0
		36	0	10.95	10.89	10.90	0
		36	19	10.92	10.84	10.81	0
		36	39	10.84	10.79	10.83	0
		75	0	10.89	10.82	10.80	0
15M	16QAM	1	0	10.99	10.93	10.89	0
		1	37	11.00	10.91	10.87	0
		1	74	10.88	10.82	10.82	0
		36	0	10.92	10.87	10.89	0
		36	19	10.98	10.87	10.87	0
		36	39	10.88	10.89	10.76	0
		75	0	10.85	10.82	10.78	0
15M	64QAM	1	0	10.92	10.91	10.85	0
		1	37	10.93	10.86	10.89	0
		1	74	10.90	10.86	10.79	0
		36	0	10.98	10.87	10.82	0
		36	19	10.89	10.90	10.83	0
		36	39	10.88	10.81	10.79	0
		75	0	10.79	10.78	10.70	0
15M	256QAM	1	0	11.00	10.95	10.92	0
		1	37	10.96	10.91	10.82	0
		1	74	10.87	10.84	10.84	0
		36	0	10.92	10.88	10.84	0
		36	19	10.93	10.92	10.88	0
		36	39	10.85	10.79	10.75	0
		75	0	10.82	10.78	10.73	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	10.93	10.89	10.94	0
		1	24	10.96	10.91	10.85	0
		1	49	10.95	10.82	10.80	0
		25	0	10.99	10.94	10.83	0
		25	12	10.89	10.90	10.88	0
		25	25	10.85	10.80	10.75	0
		50	0	10.80	10.75	10.79	0
10M	16QAM	1	0	11.00	10.91	10.92	0
		1	24	10.92	10.93	10.89	0
		1	49	10.92	10.83	10.76	0
		25	0	10.91	10.88	10.90	0
		25	12	10.98	10.85	10.82	0
		25	25	10.94	10.86	10.76	0
		50	0	10.86	10.80	10.75	0
10M	64QAM	1	0	10.93	10.96	10.83	0
		1	24	10.91	10.93	10.91	0
		1	49	10.85	10.87	10.77	0
		25	0	10.96	10.92	10.89	0
		25	12	10.93	10.93	10.85	0
		25	25	10.90	10.87	10.82	0
		50	0	10.82	10.79	10.77	0
10M	256QAM	1	0	10.97	10.90	10.89	0
		1	24	10.91	10.86	10.87	0
		1	49	10.84	10.88	10.80	0
		25	0	10.91	10.88	10.85	0
		25	12	10.89	10.90	10.81	0
		25	25	10.83	10.81	10.80	0
		50	0	10.87	10.80	10.79	0
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	11.02	10.89	10.87	0
		1	12	10.90	10.94	10.82	0
		1	24	10.86	10.84	10.76	0
		12	0	10.93	10.89	10.91	0
		12	6	10.92	10.83	10.88	0
		12	13	10.91	10.87	10.79	0
		25	0	10.81	10.81	10.80	0
5M	16QAM	1	0	10.95	10.96	10.86	0
		1	12	10.92	10.91	10.85	0
		1	24	10.86	10.85	10.76	0
		12	0	10.93	10.89	10.85	0
		12	6	10.91	10.83	10.80	0
		12	13	10.89	10.79	10.82	0
		25	0	10.82	10.83	10.74	0
5M	64QAM	1	0	10.97	10.97	10.88	0
		1	12	10.95	10.92	10.87	0
		1	24	10.89	10.81	10.79	0
		12	0	10.90	10.93	10.85	0
		12	6	10.89	10.84	10.88	0
		12	13	10.90	10.80	10.78	0
		25	0	10.80	10.82	10.79	0
5M	256QAM	1	0	10.98	10.92	10.89	0
		1	12	10.97	10.86	10.88	0
		1	24	10.87	10.84	10.82	0
		12	0	11.00	10.91	10.84	0
		12	6	10.93	10.88	10.83	0
		12	13	10.85	10.85	10.77	0
		25	0	10.79	10.75	10.72	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	10.96	10.93	10.85	0
		1	7	10.94	10.93	10.82	0
		1	14	10.89	10.86	10.77	0
		8	0	11.01	10.86	10.91	0
		8	3	10.89	10.84	10.80	0
		8	7	10.88	10.80	10.77	0
		15	0	10.80	10.80	10.70	0
3M	16QAM	1	0	10.98	10.97	10.92	0
		1	7	10.91	10.92	10.86	0
		1	14	10.94	10.86	10.81	0
		8	0	10.94	10.96	10.83	0
		8	3	10.94	10.93	10.80	0
		8	7	10.94	10.81	10.84	0
		15	0	10.83	10.78	10.72	0
3M	64QAM	1	0	10.93	10.96	10.92	0
		1	7	10.90	10.93	10.84	0
		1	14	10.93	10.87	10.76	0
		8	0	10.93	10.86	10.85	0
		8	3	10.90	10.85	10.85	0
		8	7	10.84	10.82	10.81	0
		15	0	10.88	10.83	10.76	0
3M	256QAM	1	0	10.94	10.91	10.83	0
		1	7	10.93	10.87	10.85	0
		1	14	10.86	10.88	10.85	0
		8	0	10.97	10.95	10.87	0
		8	3	10.98	10.91	10.81	0
		8	7	10.87	10.87	10.83	0
		15	0	10.89	10.76	10.78	0
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	11.01	10.96	10.95	0
		1	2	10.97	10.91	10.83	0
		1	5	10.87	10.88	10.81	0
		3	0	10.99	10.90	10.86	0
		3	1	10.91	10.86	10.86	0
		3	3	10.85	10.83	10.78	0
		6	0	10.87	10.74	10.73	0
1.4M	16QAM	1	0	10.96	10.92	10.93	0
		1	2	10.90	10.88	10.88	0
		1	5	10.87	10.79	10.79	0
		3	0	11.01	10.91	10.91	0
		3	1	10.96	10.85	10.79	0
		3	3	10.87	10.80	10.83	0
		6	0	10.79	10.81	10.70	0
1.4M	64QAM	1	0	10.98	10.90	10.85	0
		1	2	10.97	10.91	10.83	0
		1	5	10.85	10.82	10.79	0
		3	0	10.95	10.93	10.82	0
		3	1	10.90	10.88	10.79	0
		3	3	10.93	10.83	10.78	0
		6	0	10.81	10.75	10.77	0
1.4M	256QAM	1	0	10.93	10.94	10.86	0
		1	2	10.93	10.94	10.82	0
		1	5	10.92	10.80	10.77	0
		3	0	10.96	10.86	10.85	0
		3	1	10.89	10.91	10.88	0
		3	3	10.89	10.83	10.77	0
		6	0	10.88	10.84	10.71	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	10.42	10.51	10.38	0
		1	50	10.37	10.46	10.33	0
		1	99	10.32	10.41	10.28	0
		50	0	10.39	10.48	10.35	0
		50	25	10.33	10.42	10.29	0
		50	50	10.29	10.38	10.25	0
		100	0	10.24	10.33	10.20	0
20M	16QAM	1	0	10.40	10.49	10.36	0
		1	50	10.35	10.44	10.31	0
		1	99	10.31	10.40	10.27	0
		50	0	10.37	10.46	10.33	0
		50	25	10.33	10.42	10.29	0
		50	50	10.29	10.38	10.25	0
		100	0	10.27	10.36	10.23	0
20M	64QAM	1	0	10.39	10.48	10.35	0
		1	50	10.36	10.45	10.32	0
		1	99	10.31	10.40	10.27	0
		50	0	10.36	10.45	10.32	0
		50	25	10.33	10.42	10.29	0
		50	50	10.30	10.39	10.26	0
		100	0	10.27	10.36	10.23	0
20M	256QAM	1	0	10.38	10.47	10.34	0
		1	50	10.35	10.44	10.31	0
		1	99	10.31	10.40	10.27	0
		50	0	10.36	10.45	10.32	0
		50	25	10.33	10.42	10.29	0
		50	50	10.28	10.37	10.24	0
		100	0	10.24	10.33	10.20	0
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	10.37	10.38	10.30	0
		1	37	10.29	10.37	10.24	0
		1	74	10.30	10.40	10.22	0
		36	0	10.34	10.45	10.29	0
		36	19	10.25	10.37	10.23	0
		36	39	10.19	10.32	10.18	0
		75	0	10.26	10.36	10.17	0
15M	16QAM	1	0	10.34	10.37	10.25	0
		1	37	10.30	10.45	10.28	0
		1	74	10.27	10.39	10.24	0
		36	0	10.36	10.42	10.25	0
		36	19	10.32	10.38	10.20	0
		36	39	10.28	10.38	10.16	0
		75	0	10.25	10.31	10.20	0
15M	64QAM	1	0	10.30	10.37	10.31	0
		1	37	10.25	10.39	10.27	0
		1	74	10.21	10.34	10.27	0
		36	0	10.32	10.43	10.24	0
		36	19	10.28	10.36	10.24	0
		36	39	10.19	10.36	10.18	0
		75	0	10.21	10.32	10.16	0
15M	256QAM	1	0	10.33	10.44	10.26	0
		1	37	10.33	10.34	10.27	0
		1	74	10.28	10.31	10.23	0
		36	0	10.36	10.44	10.23	0
		36	19	10.26	10.35	10.26	0
		36	39	10.24	10.32	10.22	0
		75	0	10.17	10.31	10.15	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	10.33	10.45	10.31	0
		1	24	10.35	10.42	10.30	0
		1	49	10.26	10.30	10.22	0
		25	0	10.33	10.40	10.24	0
		25	12	10.29	10.34	10.26	0
		25	25	10.26	10.35	10.19	0
		50	0	10.17	10.29	10.19	0
10M	16QAM	1	0	10.36	10.38	10.27	0
		1	24	10.32	10.35	10.25	0
		1	49	10.29	10.37	10.23	0
		25	0	10.34	10.42	10.30	0
		25	12	10.23	10.39	10.28	0
		25	25	10.29	10.37	10.23	0
		50	0	10.24	10.33	10.18	0
10M	64QAM	1	0	10.35	10.42	10.34	0
		1	24	10.26	10.37	10.28	0
		1	49	10.30	10.35	10.24	0
		25	0	10.33	10.38	10.32	0
		25	12	10.26	10.34	10.19	0
		25	25	10.18	10.37	10.17	0
		50	0	10.19	10.24	10.17	0
10M	256QAM	1	0	10.36	10.41	10.33	0
		1	24	10.35	10.37	10.27	0
		1	49	10.29	10.38	10.19	0
		25	0	10.29	10.38	10.27	0
		25	12	10.30	10.42	10.27	0
		25	25	10.20	10.27	10.18	0
		50	0	10.16	10.28	10.13	0
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	10.40	10.39	10.36	0
		1	12	10.35	10.36	10.22	0
		1	24	10.30	10.31	10.27	0
		12	0	10.33	10.43	10.33	0
		12	6	10.32	10.35	10.26	0
		12	13	10.23	10.30	10.22	0
		25	0	10.24	10.36	10.19	0
5M	16QAM	1	0	10.34	10.39	10.32	0
		1	12	10.34	10.41	10.23	0
		1	24	10.29	10.40	10.26	0
		12	0	10.28	10.43	10.23	0
		12	6	10.29	10.42	10.25	0
		12	13	10.25	10.32	10.18	0
		25	0	10.20	10.34	10.13	0
5M	64QAM	1	0	10.34	10.39	10.34	0
		1	12	10.26	10.36	10.24	0
		1	24	10.21	10.35	10.19	0
		12	0	10.27	10.41	10.32	0
		12	6	10.31	10.33	10.27	0
		12	13	10.27	10.32	10.16	0
		25	0	10.23	10.28	10.20	0
5M	256QAM	1	0	10.31	10.44	10.25	0
		1	12	10.34	10.40	10.23	0
		1	24	10.31	10.34	10.24	0
		12	0	10.27	10.44	10.29	0
		12	6	10.23	10.41	10.20	0
		12	13	10.23	10.35	10.22	0
		25	0	10.16	10.31	10.14	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	10.33	10.38	10.30	0
		1	7	10.33	10.37	10.26	0
		1	14	10.21	10.33	10.26	0
		8	0	10.34	10.45	10.29	0
		8	3	10.25	10.39	10.21	0
		8	7	10.19	10.36	10.22	0
		15	0	10.20	10.27	10.20	0
3M	16QAM	1	0	10.39	10.46	10.28	0
		1	7	10.28	10.41	10.23	0
		1	14	10.29	10.40	10.24	0
		8	0	10.36	10.44	10.22	0
		8	3	10.28	10.39	10.21	0
		8	7	10.26	10.36	10.25	0
		15	0	10.25	10.26	10.22	0
3M	64QAM	1	0	10.38	10.36	10.31	0
		1	7	10.25	10.44	10.23	0
		1	14	10.22	10.39	10.24	0
		8	0	10.32	10.35	10.23	0
		8	3	10.31	10.42	10.25	0
		8	7	10.27	10.28	10.22	0
		15	0	10.19	10.31	10.19	0
3M	256QAM	1	0	10.32	10.38	10.27	0
		1	7	10.32	10.44	10.21	0
		1	14	10.28	10.39	10.24	0
		8	0	10.28	10.45	10.31	0
		8	3	10.29	10.39	10.21	0
		8	7	10.27	10.29	10.14	0
		15	0	10.22	10.31	10.20	0
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	10.33	10.42	10.35	0
		1	2	10.28	10.40	10.27	0
		1	5	10.31	10.39	10.24	0
		3	0	10.31	10.42	10.31	0
		3	1	10.29	10.33	10.26	0
		3	3	10.28	10.38	10.18	0
		6	0	10.25	10.29	10.15	0
1.4M	16QAM	1	0	10.35	10.46	10.28	0
		1	2	10.29	10.38	10.22	0
		1	5	10.27	10.36	10.26	0
		3	0	10.26	10.36	10.30	0
		3	1	10.32	10.38	10.23	0
		3	3	10.22	10.31	10.24	0
		6	0	10.26	10.35	10.22	0
1.4M	64QAM	1	0	10.29	10.41	10.27	0
		1	2	10.33	10.35	10.30	0
		1	5	10.29	10.35	10.24	0
		3	0	10.36	10.35	10.22	0
		3	1	10.29	10.37	10.29	0
		3	3	10.20	10.31	10.17	0
		6	0	10.18	10.30	10.16	0
1.4M	256QAM	1	0	10.34	10.42	10.30	0
		1	2	10.25	10.40	10.22	0
		1	5	10.25	10.37	10.21	0
		3	0	10.31	10.45	10.29	0
		3	1	10.26	10.41	10.26	0
		3	3	10.18	10.31	10.14	0
		6	0	10.23	10.23	10.19	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	15.74	15.71	15.63	0
		1	24	15.69	15.66	15.58	0
		1	49	15.64	15.61	15.53	0
		25	0	15.71	15.68	15.60	0
		25	12	15.67	15.64	15.56	0
		25	25	15.64	15.61	15.53	0
		50	0	15.58	15.55	15.47	0
10M	16QAM	1	0	15.72	15.69	15.61	0
		1	24	15.67	15.64	15.56	0
		1	49	15.60	15.57	15.49	0
		25	0	15.69	15.66	15.58	0
		25	12	15.65	15.62	15.54	0
		25	25	15.60	15.57	15.49	0
		50	0	15.57	15.54	15.46	0
10M	64QAM	1	0	15.71	15.68	15.60	0
		1	24	15.66	15.63	15.55	0
		1	49	15.60	15.57	15.49	0
		25	0	15.68	15.65	15.57	0
		25	12	15.64	15.61	15.53	0
		25	25	15.60	15.57	15.49	0
		50	0	15.56	15.53	15.45	0
10M	256QAM	1	0	15.70	15.67	15.59	0
		1	24	15.64	15.61	15.53	0
		1	49	15.60	15.57	15.49	0
		25	0	15.68	15.65	15.57	0
		25	12	15.65	15.62	15.54	0
		25	25	15.60	15.57	15.49	0
		50	0	15.56	15.53	15.45	0
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	15.65	15.62	15.54	0
		1	12	15.61	15.62	15.48	0
		1	24	15.51	15.56	15.43	0
		12	0	15.64	15.60	15.49	0
		12	6	15.60	15.61	15.46	0
		12	13	15.50	15.51	15.49	0
		25	0	15.47	15.46	15.41	0
5M	16QAM	1	0	15.70	15.60	15.51	0
		1	12	15.65	15.58	15.50	0
		1	24	15.53	15.53	15.44	0
		12	0	15.64	15.60	15.54	0
		12	6	15.57	15.54	15.49	0
		12	13	15.60	15.47	15.39	0
		25	0	15.47	15.50	15.41	0
5M	64QAM	1	0	15.69	15.64	15.50	0
		1	12	15.54	15.61	15.48	0
		1	24	15.52	15.54	15.43	0
		12	0	15.68	15.55	15.51	0
		12	6	15.55	15.60	15.53	0
		12	13	15.59	15.52	15.44	0
		25	0	15.47	15.46	15.45	0
5M	256QAM	1	0	15.69	15.65	15.59	0
		1	12	15.57	15.56	15.46	0
		1	24	15.56	15.54	15.45	0
		12	0	15.64	15.56	15.56	0
		12	6	15.61	15.55	15.54	0
		12	13	15.54	15.49	15.48	0
		25	0	15.48	15.46	15.39	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	15.68	15.62	15.61	0
		1	7	15.58	15.57	15.48	0
		1	14	15.52	15.47	15.39	0
		8	0	15.67	15.60	15.48	0
		8	3	15.65	15.55	15.47	0
		8	7	15.50	15.52	15.42	0
		15	0	15.55	15.47	15.38	0
3M	16QAM	1	0	15.63	15.67	15.57	0
		1	7	15.63	15.54	15.45	0
		1	14	15.56	15.57	15.49	0
		8	0	15.66	15.59	15.52	0
		8	3	15.59	15.58	15.52	0
		8	7	15.57	15.48	15.47	0
		15	0	15.51	15.46	15.39	0
3M	64QAM	1	0	15.64	15.63	15.59	0
		1	7	15.64	15.61	15.52	0
		1	14	15.56	15.56	15.49	0
		8	0	15.65	15.62	15.47	0
		8	3	15.55	15.56	15.48	0
		8	7	15.50	15.50	15.45	0
		15	0	15.48	15.46	15.37	0
3M	256QAM	1	0	15.61	15.62	15.53	0
		1	7	15.55	15.51	15.53	0
		1	14	15.51	15.52	15.43	0
		8	0	15.68	15.59	15.50	0
		8	3	15.63	15.52	15.53	0
		8	7	15.50	15.51	15.45	0
		15	0	15.49	15.53	15.43	0
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	15.64	15.65	15.57	0
		1	2	15.65	15.55	15.50	0
		1	5	15.51	15.51	15.43	0
		3	0	15.65	15.66	15.57	0
		3	1	15.62	15.57	15.47	0
		3	3	15.52	15.49	15.48	0
		6	0	15.49	15.44	15.46	0
1.4M	16QAM	1	0	15.63	15.63	15.54	0
		1	2	15.64	15.57	15.50	0
		1	5	15.59	15.49	15.39	0
		3	0	15.59	15.59	15.48	0
		3	1	15.57	15.53	15.44	0
		3	3	15.60	15.56	15.48	0
		6	0	15.48	15.51	15.43	0
1.4M	64QAM	1	0	15.64	15.60	15.52	0
		1	2	15.61	15.56	15.44	0
		1	5	15.59	15.48	15.45	0
		3	0	15.65	15.64	15.51	0
		3	1	15.61	15.52	15.54	0
		3	3	15.57	15.50	15.47	0
		6	0	15.49	15.47	15.38	0
1.4M	256QAM	1	0	15.70	15.61	15.49	0
		1	2	15.62	15.57	15.45	0
		1	5	15.52	15.56	15.43	0
		3	0	15.65	15.59	15.57	0
		3	1	15.57	15.56	15.44	0
		3	3	15.51	15.49	15.41	0
		6	0	15.51	15.47	15.36	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	8.23	8.25	8.16	0
		1	50	8.17	8.19	8.10	0
		1	99	8.12	8.14	8.05	0
		50	0	8.21	8.23	8.14	0
		50	25	8.16	8.18	8.09	0
		50	50	8.11	8.13	8.04	0
		100	0	8.06	8.08	7.99	0
20M	16QAM	1	0	8.21	8.23	8.14	0
		1	50	8.15	8.17	8.08	0
		1	99	8.11	8.13	8.04	0
		50	0	8.20	8.22	8.13	0
		50	25	8.13	8.15	8.06	0
		50	50	8.11	8.13	8.04	0
		100	0	8.08	8.10	8.01	0
20M	64QAM	1	0	8.20	8.22	8.13	0
		1	50	8.16	8.18	8.09	0
		1	99	8.11	8.13	8.04	0
		50	0	8.18	8.20	8.11	0
		50	25	8.13	8.15	8.06	0
		50	50	8.12	8.14	8.05	0
		100	0	8.07	8.09	8.00	0
20M	256QAM	1	0	8.19	8.21	8.12	0
		1	50	8.15	8.17	8.08	0
		1	99	8.11	8.13	8.04	0
		50	0	8.19	8.21	8.12	0
		50	25	8.16	8.18	8.09	0
		50	50	8.12	8.14	8.05	0
		100	0	8.09	8.11	8.02	0
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	8.12	8.16	8.06	0
		1	37	8.12	8.08	7.98	0
		1	74	8.11	8.05	7.98	0
		36	0	8.14	8.18	8.10	0
		36	19	8.13	8.09	7.98	0
		36	39	8.03	8.10	7.96	0
		75	0	8.06	8.03	7.96	0
15M	16QAM	1	0	8.16	8.18	8.08	0
		1	37	8.16	8.18	8.09	0
		1	74	8.09	8.13	7.98	0
		36	0	8.12	8.19	8.06	0
		36	19	8.08	8.09	7.98	0
		36	39	8.09	8.14	7.96	0
		75	0	8.00	8.08	7.94	0
15M	64QAM	1	0	8.10	8.15	8.06	0
		1	37	8.06	8.07	8.06	0
		1	74	8.01	8.09	7.99	0
		36	0	8.14	8.14	8.09	0
		36	19	8.10	8.17	8.04	0
		36	39	8.06	8.06	7.95	0
		75	0	8.07	8.10	7.96	0
15M	256QAM	1	0	8.16	8.14	8.04	0
		1	37	8.14	8.15	8.03	0
		1	74	8.05	8.10	7.95	0
		36	0	8.15	8.14	8.10	0
		36	19	8.11	8.17	8.01	0
		36	39	8.06	8.05	8.04	0
		75	0	8.02	8.01	8.02	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	8.13	8.13	8.06	0
		1	24	8.12	8.15	8.07	0
		1	49	8.06	8.03	8.01	0
		25	0	8.12	8.22	8.05	0
		25	12	8.07	8.08	8.02	0
		25	25	8.10	8.03	7.98	0
		50	0	8.08	8.00	7.96	0
10M	16QAM	1	0	8.19	8.12	8.12	0
		1	24	8.16	8.11	8.08	0
		1	49	8.05	8.06	7.96	0
		25	0	8.09	8.15	8.11	0
		25	12	8.13	8.07	7.97	0
		25	25	8.02	8.08	8.02	0
		50	0	8.04	8.09	7.90	0
10M	64QAM	1	0	8.18	8.16	8.03	0
		1	24	8.13	8.08	7.99	0
		1	49	8.04	8.10	7.96	0
		25	0	8.09	8.12	8.09	0
		25	12	8.06	8.18	8.06	0
		25	25	8.08	8.14	8.02	0
		50	0	8.01	8.06	7.99	0
10M	256QAM	1	0	8.17	8.20	8.10	0
		1	24	8.13	8.17	8.01	0
		1	49	8.02	8.03	8.03	0
		25	0	8.09	8.15	8.11	0
		25	12	8.12	8.15	8.01	0
		25	25	8.11	8.14	7.98	0
		50	0	8.03	8.10	8.02	0
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	8.12	8.15	8.04	0
		1	12	8.07	8.07	8.05	0
		1	24	8.03	8.09	7.96	0
		12	0	8.18	8.14	8.09	0
		12	6	8.09	8.13	7.96	0
		12	13	8.10	8.12	7.96	0
		25	0	8.08	8.07	7.93	0
5M	16QAM	1	0	8.12	8.21	8.12	0
		1	12	8.07	8.08	7.99	0
		1	24	8.01	8.10	7.95	0
		12	0	8.10	8.10	8.08	0
		12	6	8.06	8.05	8.01	0
		12	13	8.11	8.14	7.96	0
		25	0	8.00	8.04	7.90	0
5M	64QAM	1	0	8.19	8.17	8.12	0
		1	12	8.12	8.16	8.02	0
		1	24	8.09	8.04	7.96	0
		12	0	8.09	8.16	8.06	0
		12	6	8.13	8.16	8.00	0
		12	13	8.09	8.13	8.00	0
		25	0	7.99	8.08	7.92	0
5M	256QAM	1	0	8.13	8.19	8.02	0
		1	12	8.08	8.07	8.05	0
		1	24	8.06	8.06	7.97	0
		12	0	8.10	8.16	8.02	0
		12	6	8.11	8.08	8.01	0
		12	13	8.06	8.08	8.01	0
		25	0	8.06	8.05	7.93	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	16.18	16.05	16.14	0
		1	24	16.14	16.01	16.10	0
		1	49	16.11	15.98	16.07	0
		25	0	16.16	16.03	16.12	0
		25	12	16.10	15.97	16.06	0
		25	25	16.05	15.92	16.01	0
		50	0	16.00	15.87	15.96	0
10M	16QAM	1	0	16.15	16.02	16.11	0
		1	24	16.10	15.97	16.06	0
		1	49	16.04	15.91	16.00	0
		25	0	16.12	15.99	16.08	0
		25	12	16.06	15.93	16.02	0
		25	25	16.02	15.89	15.98	0
		50	0	15.97	15.84	15.93	0
10M	64QAM	1	0	16.16	16.03	16.12	0
		1	24	16.12	15.99	16.08	0
		1	49	16.04	15.91	16.00	0
		25	0	16.13	16.00	16.09	0
		25	12	16.06	15.93	16.02	0
		25	25	16.01	15.88	15.97	0
		50	0	15.97	15.84	15.93	0
10M	256QAM	1	0	16.14	16.01	16.10	0
		1	24	16.10	15.97	16.06	0
		1	49	16.03	15.90	15.99	0
		25	0	16.11	15.98	16.07	0
		25	12	16.06	15.93	16.02	0
		25	25	16.02	15.89	15.98	0
		50	0	15.98	15.85	15.94	0
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	16.06	15.96	16.10	0
		1	12	16.01	15.92	15.99	0
		1	24	16.00	15.81	15.98	0
		12	0	16.02	15.90	16.03	0
		12	6	16.00	15.83	16.00	0
		12	13	16.02	15.88	15.88	0
		25	0	15.87	15.80	15.93	0
5M	16QAM	1	0	16.12	15.95	16.10	0
		1	12	16.02	15.95	16.00	0
		1	24	16.04	15.91	15.99	0
		12	0	16.03	15.99	15.99	0
		12	6	16.02	15.87	15.96	0
		12	13	15.95	15.83	15.93	0
		25	0	15.92	15.77	15.92	0
5M	64QAM	1	0	16.14	15.99	16.05	0
		1	12	16.01	15.95	16.01	0
		1	24	16.00	15.89	15.95	0
		12	0	16.05	15.93	15.97	0
		12	6	16.04	15.84	16.02	0
		12	13	15.97	15.81	15.92	0
		25	0	15.93	15.77	15.87	0
5M	256QAM	1	0	16.08	15.92	16.07	0
		1	12	16.03	15.90	16.02	0
		1	24	16.01	15.80	15.99	0
		12	0	16.05	15.90	16.05	0
		12	6	16.02	15.88	15.93	0
		12	13	15.93	15.84	15.92	0
		25	0	15.89	15.83	15.93	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	16.15	15.94	16.01	0
		1	7	16.01	15.89	16.06	0
		1	14	16.03	15.85	15.91	0
		8	0	16.04	15.97	16.01	0
		8	3	15.99	15.86	15.92	0
		8	7	16.00	15.87	15.94	0
		15	0	15.96	15.77	15.86	0
3M	16QAM	1	0	16.12	15.93	16.07	0
		1	7	16.03	15.99	16.02	0
		1	14	15.98	15.83	15.95	0
		8	0	16.09	15.96	16.08	0
		8	3	16.01	15.85	16.02	0
		8	7	15.95	15.88	15.95	0
		15	0	15.94	15.81	15.90	0
3M	64QAM	1	0	16.04	15.94	16.03	0
		1	7	16.01	15.97	16.05	0
		1	14	16.00	15.83	15.94	0
		8	0	16.04	15.96	15.97	0
		8	3	16.00	15.88	15.95	0
		8	7	16.02	15.88	15.92	0
		15	0	15.98	15.83	15.87	0
3M	256QAM	1	0	16.05	15.91	16.03	0
		1	7	16.03	15.92	15.96	0
		1	14	16.01	15.82	15.98	0
		8	0	16.06	15.90	16.04	0
		8	3	16.06	15.91	15.99	0
		8	7	15.99	15.82	15.90	0
		15	0	15.88	15.85	15.91	0
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	16.07	15.93	16.04	0
		1	2	16.06	15.94	16.05	0
		1	5	15.99	15.81	15.96	0
		3	0	16.02	15.90	15.98	0
		3	1	16.00	15.84	16.00	0
		3	3	15.92	15.82	15.97	0
		6	0	15.90	15.77	15.92	0
1.4M	16QAM	1	0	16.11	15.97	16.11	0
		1	2	16.04	15.99	16.00	0
		1	5	15.95	15.86	15.91	0
		3	0	16.10	15.94	16.05	0
		3	1	16.02	15.84	16.02	0
		3	3	15.96	15.82	15.87	0
		6	0	15.88	15.75	15.92	0
1.4M	64QAM	1	0	16.05	15.98	16.02	0
		1	2	16.06	15.88	16.00	0
		1	5	15.99	15.85	15.94	0
		3	0	16.11	15.92	15.99	0
		3	1	16.03	15.86	15.98	0
		3	3	15.94	15.87	15.91	0
		6	0	15.90	15.75	15.84	0
1.4M	256QAM	1	0	16.13	15.94	16.04	0
		1	2	16.03	15.91	15.99	0
		1	5	15.94	15.82	15.92	0
		3	0	16.03	15.96	16.00	0
		3	1	16.04	15.86	15.97	0
		3	3	16.02	15.88	15.94	0
		6	0	15.98	15.80	15.90	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		15.84		0
		1	24		15.79		0
		1	49		15.75		0
		25	0		15.81		0
		25	12		15.77		0
		25	25		15.74		0
		50	0		15.72		0
10M	16QAM	1	0		15.82		0
		1	24		15.78		0
		1	49		15.74		0
		25	0		15.80		0
		25	12		15.75		0
		25	25		15.71		0
		50	0		15.70		0
10M	64QAM	1	0		15.81		0
		1	24		15.78		0
		1	49		15.74		0
		25	0		15.79		0
		25	12		15.75		0
		25	25		15.71		0
		50	0		15.69		0
10M	256QAM	1	0		15.81		0
		1	24		15.77		0
		1	49		15.74		0
		25	0		15.80		0
		25	12		15.75		0
		25	25		15.72		0
		50	0		15.70		0
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	15.77	15.71	15.78	0
		1	12	15.73	15.67	15.74	0
		1	24	15.69	15.63	15.70	0
		12	0	15.75	15.69	15.76	0
		12	6	15.70	15.64	15.71	0
		12	13	15.66	15.60	15.67	0
		25	0	15.64	15.58	15.65	0
5M	16QAM	1	0	15.75	15.69	15.76	0
		1	12	15.71	15.65	15.72	0
		1	24	15.67	15.61	15.68	0
		12	0	15.72	15.66	15.73	0
		12	6	15.69	15.63	15.70	0
		12	13	15.65	15.59	15.66	0
		25	0	15.63	15.57	15.64	0
5M	64QAM	1	0	15.76	15.70	15.77	0
		1	12	15.70	15.64	15.71	0
		1	24	15.66	15.60	15.67	0
		12	0	15.71	15.65	15.72	0
		12	6	15.69	15.63	15.70	0
		12	13	15.66	15.60	15.67	0
		25	0	15.63	15.57	15.64	0
5M	256QAM	1	0	15.74	15.68	15.75	0
		1	12	15.71	15.65	15.72	0
		1	24	15.67	15.61	15.68	0
		12	0	15.71	15.65	15.72	0
		12	6	15.68	15.62	15.69	0
		12	13	15.65	15.59	15.66	0
		25	0	15.63	15.57	15.64	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		16.40		0
		1	24		16.27		0
		1	49		16.20		0
		25	0		16.25		0
		25	12		16.24		0
		25	25		16.22		0
		50	0		16.20		0
10M	16QAM	1	0		16.34		0
		1	24		16.23		0
		1	49		16.14		0
		25	0		16.23		0
		25	12		16.15		0
		25	25		16.23		0
		50	0		16.15		0
10M	64QAM	1	0		16.34		0
		1	24		16.21		0
		1	49		16.12		0
		25	0		16.15		0
		25	12		16.14		0
		25	25		16.19		0
		50	0		16.18		0
10M	256QAM	1	0		16.33		0
		1	24		16.23		0
		1	49		16.14		0
		25	0		16.25		0
		25	12		16.23		0
		25	25		16.16		0
		50	0		16.10		0
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	16.34	16.37	16.37	0
		1	12	16.17	16.24	16.19	0
		1	24	16.20	16.17	16.13	0
		12	0	16.15	16.23	16.25	0
		12	6	16.24	16.24	16.14	0
		12	13	16.23	16.21	16.23	0
		25	0	16.13	16.15	16.18	0
5M	16QAM	1	0	16.33	16.30	16.25	0
		1	12	16.18	16.21	16.15	0
		1	24	16.04	16.08	16.07	0
		12	0	16.22	16.16	16.21	0
		12	6	16.05	16.14	16.09	0
		12	13	16.15	16.16	16.21	0
		25	0	16.15	16.09	16.11	0
5M	64QAM	1	0	16.30	16.25	16.24	0
		1	12	16.11	16.20	16.21	0
		1	24	16.02	16.04	16.12	0
		12	0	16.14	16.10	16.09	0
		12	6	16.05	16.07	16.14	0
		12	13	16.10	16.19	16.09	0
		25	0	16.15	16.16	16.17	0
5M	256QAM	1	0	16.29	16.28	16.27	0
		1	12	16.17	16.19	16.17	0
		1	24	16.12	16.13	16.04	0
		12	0	16.23	16.21	16.19	0
		12	6	16.23	16.23	16.21	0
		12	13	16.12	16.13	16.16	0
		25	0	16.04	16.08	16.02	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	15.82	15.66	15.70	0
		1	24	15.68	15.67	15.68	0
		1	49	15.67	15.50	15.60	0
		25	0	15.70	15.57	15.60	0
		25	12	15.67	15.51	15.58	0
		25	25	15.59	15.54	15.56	0
		50	0	15.60	15.54	15.57	0
10M	16QAM	1	0	15.71	15.59	15.62	0
		1	24	15.69	15.59	15.66	0
		1	49	15.60	15.49	15.58	0
		25	0	15.54	15.52	15.53	0
		25	12	15.61	15.46	15.55	0
		25	25	15.63	15.46	15.54	0
		50	0	15.61	15.48	15.51	0
10M	64QAM	1	0	15.67	15.60	15.60	0
		1	24	15.59	15.51	15.59	0
		1	49	15.52	15.48	15.50	0
		25	0	15.62	15.49	15.57	0
		25	12	15.67	15.51	15.58	0
		25	25	15.62	15.51	15.56	0
		50	0	15.61	15.45	15.52	0
10M	256QAM	1	0	15.65	15.52	15.61	0
		1	24	15.69	15.58	15.64	0
		1	49	15.67	15.52	15.60	0
		25	0	15.58	15.58	15.58	0
		25	12	15.59	15.47	15.52	0
		25	25	15.48	15.41	15.47	0
		50	0	15.64	15.52	15.60	0
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	15.79	15.65	15.62	0
		1	12	15.68	15.64	15.68	0
		1	24	15.61	15.43	15.53	0
		12	0	15.66	15.52	15.55	0
		12	6	15.57	15.42	15.55	0
		12	13	15.54	15.44	15.54	0
		25	0	15.60	15.46	15.49	0
5M	16QAM	1	0	15.68	15.49	15.61	0
		1	12	15.61	15.59	15.59	0
		1	24	15.53	15.46	15.56	0
		12	0	15.52	15.46	15.47	0
		12	6	15.56	15.36	15.48	0
		12	13	15.57	15.38	15.54	0
		25	0	15.55	15.46	15.41	0
5M	64QAM	1	0	15.57	15.52	15.56	0
		1	12	15.50	15.48	15.53	0
		1	24	15.43	15.41	15.48	0
		12	0	15.54	15.40	15.49	0
		12	6	15.57	15.50	15.53	0
		12	13	15.61	15.48	15.56	0
		25	0	15.55	15.37	15.44	0
5M	256QAM	1	0	15.59	15.45	15.55	0
		1	12	15.60	15.58	15.64	0
		1	24	15.65	15.49	15.51	0
		12	0	15.56	15.57	15.50	0
		12	6	15.53	15.38	15.42	0
		12	13	15.39	15.41	15.38	0
		25	0	15.54	15.51	15.52	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	11.38	11.50	11.41	0
		1	50	11.38	11.49	11.38	0
		1	99	11.42	11.46	11.33	0
		50	0	11.36	11.48	11.42	0
		50	25	11.35	11.45	11.40	0
		50	50	11.29	11.42	11.35	0
		100	0	11.42	11.46	11.45	0
20M	16QAM	1	0	11.35	11.46	11.32	0
		1	50	11.30	11.39	11.29	0
		1	99	11.38	11.46	11.42	0
		50	0	11.33	11.44	11.33	0
		50	25	11.30	11.41	11.35	0
		50	50	11.26	11.38	11.33	0
		100	0	11.37	11.45	11.39	0
20M	64QAM	1	0	11.32	11.41	11.28	0
		1	50	11.35	11.42	11.32	0
		1	99	11.24	11.38	11.33	0
		50	0	11.40	11.47	11.33	0
		50	25	11.27	11.35	11.24	0
		50	50	11.29	11.34	11.20	0
		100	0	11.30	11.40	11.27	0
20M	256QAM	1	0	11.32	11.40	11.28	0
		1	50	11.30	11.39	11.26	0
		1	99	11.30	11.39	11.31	0
		50	0	11.42	11.48	11.43	0
		50	25	11.30	11.41	11.29	0
		50	50	11.29	11.38	11.34	0
		100	0	11.28	11.37	11.26	0
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	11.28	11.46	11.35	0
		1	37	11.32	11.41	11.28	0
		1	74	11.34	11.42	11.27	0
		36	0	11.33	11.42	11.41	0
		36	19	11.34	11.36	11.38	0
		36	39	11.20	11.41	11.31	0
		75	0	11.42	11.36	11.33	0
15M	16QAM	1	0	11.27	11.40	11.24	0
		1	37	11.26	11.29	11.19	0
		1	74	11.30	11.43	11.34	0
		36	0	11.26	11.39	11.27	0
		36	19	11.27	11.35	11.28	0
		36	39	11.25	11.33	11.26	0
		75	0	11.32	11.39	11.37	0
15M	64QAM	1	0	11.24	11.31	11.28	0
		1	37	11.26	11.35	11.27	0
		1	74	11.23	11.34	11.31	0
		36	0	11.30	11.37	11.26	0
		36	19	11.24	11.27	11.16	0
		36	39	11.21	11.24	11.10	0
		75	0	11.30	11.32	11.17	0
15M	256QAM	1	0	11.29	11.37	11.23	0
		1	37	11.28	11.36	11.17	0
		1	74	11.28	11.31	11.24	0
		36	0	11.39	11.45	11.33	0
		36	19	11.28	11.40	11.22	0
		36	39	11.24	11.37	11.34	0
		75	0	11.27	11.35	11.21	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	11.33	11.44	11.33	0
		1	24	11.28	11.39	11.33	0
		1	49	11.40	11.46	11.30	0
		25	0	11.35	11.45	11.41	0
		25	12	11.35	11.37	11.32	0
		25	25	11.21	11.32	11.27	0
		50	0	11.36	11.42	11.32	0
10M	16QAM	1	0	11.25	11.43	11.31	0
		1	24	11.24	11.38	11.25	0
		1	49	11.32	11.37	11.36	0
		25	0	11.27	11.44	11.30	0
		25	12	11.23	11.37	11.25	0
		25	25	11.23	11.29	11.30	0
		50	0	11.32	11.38	11.37	0
10M	64QAM	1	0	11.23	11.35	11.24	0
		1	24	11.34	11.42	11.29	0
		1	49	11.22	11.36	11.32	0
		25	0	11.33	11.40	11.32	0
		25	12	11.23	11.35	11.16	0
		25	25	11.24	11.26	11.20	0
		50	0	11.24	11.36	11.23	0
10M	256QAM	1	0	11.31	11.31	11.26	0
		1	24	11.24	11.31	11.24	0
		1	49	11.26	11.38	11.22	0
		25	0	11.36	11.38	11.33	0
		25	12	11.25	11.40	11.20	0
		25	25	11.29	11.29	11.32	0
		50	0	11.24	11.28	11.22	0
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	11.28	11.46	11.37	0
		1	12	11.37	11.39	11.30	0
		1	24	11.32	11.41	11.33	0
		12	0	11.35	11.39	11.39	0
		12	6	11.32	11.41	11.34	0
		12	13	11.22	11.41	11.33	0
		25	0	11.39	11.46	11.40	0
5M	16QAM	1	0	11.26	11.38	11.28	0
		1	12	11.20	11.35	11.28	0
		1	24	11.32	11.41	11.33	0
		12	0	11.26	11.41	11.32	0
		12	6	11.30	11.37	11.35	0
		12	13	11.24	11.32	11.30	0
		25	0	11.27	11.39	11.33	0
5M	64QAM	1	0	11.27	11.33	11.21	0
		1	12	11.31	11.41	11.23	0
		1	24	11.14	11.35	11.23	0
		12	0	11.34	11.42	11.33	0
		12	6	11.18	11.34	11.14	0
		12	13	11.29	11.28	11.11	0
		25	0	11.22	11.35	11.25	0
5M	256QAM	1	0	11.30	11.34	11.19	0
		1	12	11.22	11.34	11.17	0
		1	24	11.28	11.29	11.25	0
		12	0	11.36	11.43	11.41	0
		12	6	11.30	11.32	11.25	0
		12	13	11.19	11.36	11.30	0
		25	0	11.21	11.37	11.19	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	11.35	11.40	11.39	0
		1	7	11.37	11.45	11.38	0
		1	14	11.32	11.45	11.33	0
		8	0	11.34	11.44	11.38	0
		8	3	11.26	11.41	11.35	0
		8	7	11.20	11.36	11.34	0
		15	0	11.38	11.42	11.39	0
3M	16QAM	1	0	11.28	11.44	11.32	0
		1	7	11.25	11.37	11.28	0
		1	14	11.29	11.40	11.40	0
		8	0	11.30	11.35	11.30	0
		8	3	11.30	11.38	11.29	0
		8	7	11.21	11.38	11.24	0
		15	0	11.35	11.43	11.32	0
3M	64QAM	1	0	11.28	11.33	11.25	0
		1	7	11.25	11.38	11.30	0
		1	14	11.18	11.31	11.30	0
		8	0	11.30	11.40	11.27	0
		8	3	11.27	11.35	11.20	0
		8	7	11.28	11.27	11.19	0
		15	0	11.30	11.38	11.22	0
3M	256QAM	1	0	11.22	11.40	11.26	0
		1	7	11.29	11.30	11.19	0
		1	14	11.20	11.31	11.29	0
		8	0	11.41	11.40	11.36	0
		8	3	11.23	11.35	11.27	0
		8	7	11.24	11.36	11.34	0
		15	0	11.28	11.27	11.19	0
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	11.31	11.46	11.37	0
		1	2	11.35	11.48	11.31	0
		1	5	11.37	11.37	11.29	0
		3	0	11.30	11.45	11.32	0
		3	1	11.33	11.45	11.35	0
		3	3	11.19	11.35	11.32	0
		6	0	11.34	11.44	11.36	0
1.4M	16QAM	1	0	11.34	11.37	11.26	0
		1	2	11.21	11.30	11.27	0
		1	5	11.31	11.39	11.33	0
		3	0	11.32	11.36	11.26	0
		3	1	11.27	11.41	11.25	0
		3	3	11.19	11.35	11.32	0
		6	0	11.33	11.38	11.33	0
1.4M	64QAM	1	0	11.25	11.34	11.22	0
		1	2	11.34	11.36	11.22	0
		1	5	11.15	11.37	11.28	0
		3	0	11.38	11.38	11.27	0
		3	1	11.21	11.25	11.17	0
		3	3	11.28	11.29	11.19	0
		6	0	11.22	11.34	11.17	0
1.4M	256QAM	1	0	11.27	11.39	11.20	0
		1	2	11.29	11.39	11.19	0
		1	5	11.26	11.35	11.26	0
		3	0	11.42	11.44	11.33	0
		3	1	11.22	11.38	11.26	0
		3	3	11.19	11.31	11.32	0
		6	0	11.20	11.28	11.20	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	16.41	16.47	16.50	0
		1	37	16.40	16.34	16.42	0
		1	74	16.28	16.26	16.33	0
		36	0	16.37	16.39	16.40	0
		36	19	16.32	16.26	16.33	0
		36	39	16.27	16.28	16.30	0
		75	0	16.37	16.41	16.46	0
15M	16QAM	1	0	16.47	16.44	16.49	0
		1	37	16.30	16.28	16.38	0
		1	74	16.24	16.25	16.26	0
		36	0	16.26	16.29	16.35	0
		36	19	16.24	16.16	16.25	0
		36	39	16.21	16.22	16.29	0
		75	0	16.43	16.45	16.46	0
15M	64QAM	1	0	16.35	16.39	16.41	0
		1	37	16.28	16.30	16.33	0
		1	74	16.22	16.28	16.28	0
		36	0	16.29	16.24	16.32	0
		36	19	16.20	16.19	16.28	0
		36	39	16.25	16.20	16.28	0
		75	0	16.33	16.37	16.41	0
15M	256QAM	1	0	16.41	16.38	16.41	0
		1	37	16.28	16.28	16.35	0
		1	74	16.20	16.25	16.25	0
		36	0	16.21	16.28	16.31	0
		36	19	16.23	16.22	16.27	0
		36	39	16.12	16.10	16.20	0
		75	0	16.28	16.30	16.37	0
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	16.38	16.44	16.44	0
		1	24	16.31	16.33	16.35	0
		1	49	16.25	16.19	16.33	0
		25	0	16.29	16.39	16.34	0
		25	12	16.26	16.19	16.26	0
		25	25	16.20	16.21	16.25	0
		50	0	16.31	16.32	16.41	0
10M	16QAM	1	0	16.43	16.37	16.39	0
		1	24	16.30	16.18	16.37	0
		1	49	16.19	16.25	16.20	0
		25	0	16.17	16.23	16.35	0
		25	12	16.19	16.14	16.16	0
		25	25	16.20	16.17	16.29	0
		50	0	16.43	16.38	16.36	0
10M	64QAM	1	0	16.29	16.39	16.37	0
		1	24	16.19	16.22	16.28	0
		1	49	16.16	16.20	16.20	0
		25	0	16.26	16.21	16.24	0
		25	12	16.18	16.13	16.18	0
		25	25	16.21	16.14	16.24	0
		50	0	16.33	16.31	16.39	0
10M	256QAM	1	0	16.35	16.34	16.40	0
		1	24	16.24	16.20	16.33	0
		1	49	16.17	16.24	16.19	0
		25	0	16.14	16.28	16.25	0
		25	12	16.22	16.12	16.22	0
		25	25	16.08	16.03	16.14	0
		50	0	16.25	16.21	16.35	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	16.37	16.42	16.43	0
		1	12	16.36	16.32	16.36	0
		1	24	16.22	16.16	16.32	0
		12	0	16.30	16.31	16.31	0
		12	6	16.26	16.26	16.24	0
		12	13	16.25	16.20	16.22	0
		25	0	16.31	16.36	16.36	0
5M	16QAM	1	0	16.44	16.38	16.42	0
		1	12	16.28	16.28	16.37	0
		1	24	16.19	16.21	16.22	0
		12	0	16.21	16.27	16.35	0
		12	6	16.15	16.09	16.21	0
		12	13	16.16	16.17	16.26	0
		25	0	16.37	16.43	16.44	0
5M	64QAM	1	0	16.32	16.36	16.32	0
		1	12	16.21	16.28	16.29	0
		1	24	16.19	16.21	16.21	0
		12	0	16.21	16.17	16.31	0
		12	6	16.18	16.14	16.20	0
		12	13	16.15	16.15	16.24	0
		25	0	16.28	16.33	16.37	0
5M	256QAM	1	0	16.37	16.28	16.34	0
		1	12	16.19	16.18	16.32	0
		1	24	16.14	16.22	16.22	0
		12	0	16.15	16.21	16.30	0
		12	6	16.22	16.17	16.23	0
		12	13	16.11	16.00	16.14	0
		25	0	16.26	16.27	16.28	0
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	16.41	16.45	16.47	0
		1	7	16.40	16.27	16.34	0
		1	14	16.24	16.23	16.31	0
		8	0	16.28	16.31	16.31	0
		8	3	16.25	16.26	16.31	0
		8	7	16.25	16.20	16.28	0
		15	0	16.35	16.39	16.37	0
3M	16QAM	1	0	16.43	16.37	16.43	0
		1	7	16.27	16.20	16.38	0
		1	14	16.20	16.19	16.24	0
		8	0	16.16	16.29	16.25	0
		8	3	16.16	16.08	16.24	0
		8	7	16.17	16.21	16.19	0
		15	0	16.34	16.40	16.37	0
3M	64QAM	1	0	16.32	16.29	16.36	0
		1	7	16.25	16.21	16.25	0
		1	14	16.17	16.23	16.28	0
		8	0	16.24	16.21	16.31	0
		8	3	16.20	16.17	16.18	0
		8	7	16.23	16.18	16.21	0
		15	0	16.23	16.36	16.40	0
3M	256QAM	1	0	16.31	16.33	16.41	0
		1	7	16.28	16.22	16.27	0
		1	14	16.10	16.17	16.17	0
		8	0	16.12	16.21	16.24	0
		8	3	16.22	16.12	16.25	0
		8	7	16.02	16.07	16.19	0
		15	0	16.24	16.24	16.30	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	16.34	16.43	16.44	0
		1	2	16.34	16.26	16.38	0
		1	5	16.25	16.23	16.23	0
		3	0	16.30	16.33	16.36	0
		3	1	16.23	16.20	16.28	0
		3	3	16.23	16.24	16.24	0
		6	0	16.34	16.35	16.40	0
1.4M	16QAM	1	0	16.44	16.40	16.40	0
		1	2	16.23	16.26	16.36	0
		1	5	16.21	16.15	16.16	0
		3	0	16.18	16.26	16.35	0
		3	1	16.21	16.16	16.15	0
		3	3	16.19	16.16	16.19	0
		6	0	16.36	16.37	16.41	0
1.4M	64QAM	1	0	16.26	16.38	16.34	0
		1	2	16.27	16.23	16.29	0
		1	5	16.16	16.22	16.24	0
		3	0	16.20	16.15	16.28	0
		3	1	16.15	16.14	16.25	0
		3	3	16.25	16.14	16.22	0
		6	0	16.28	16.30	16.39	0
1.4M	256QAM	1	0	16.38	16.36	16.33	0
		1	2	16.24	16.18	16.33	0
		1	5	16.14	16.19	16.18	0
		3	0	16.21	16.19	16.26	0
		3	1	16.14	16.21	16.18	0
		3	3	16.06	16.03	16.12	0
		6	0	16.28	16.28	16.36	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		11.99		0
		1	24		11.96		0
		1	49		11.93		0
		25	0		11.90		0
		25	12		11.88		0
		25	25		11.85		0
		50	0		11.89		0
10M	16QAM	1	0		11.91		0
		1	24		11.94		0
		1	49		11.88		0
		25	0		11.90		0
		25	12		11.87		0
		25	25		11.83		0
		50	0		11.88		0
10M	64QAM	1	0		11.91		0
		1	24		11.88		0
		1	49		11.83		0
		25	0		11.90		0
		25	12		11.82		0
		25	25		11.83		0
		50	0		11.87		0
10M	256QAM	1	0		11.90		0
		1	24		11.95		0
		1	49		11.86		0
		25	0		11.88		0
		25	12		11.81		0
		25	25		11.80		0
		50	0		11.83		0
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	11.92	11.97	11.96	0
		1	12	11.90	11.89	11.93	0
		1	24	11.83	11.91	11.88	0
		12	0	11.89	11.87	11.87	0
		12	6	11.86	11.80	11.83	0
		12	13	11.78	11.78	11.76	0
		25	0	11.88	11.80	11.88	0
5M	16QAM	1	0	11.85	11.91	11.87	0
		1	12	11.84	11.92	11.88	0
		1	24	11.83	11.83	11.84	0
		12	0	11.84	11.90	11.81	0
		12	6	11.79	11.78	11.79	0
		12	13	11.82	11.83	11.75	0
		25	0	11.87	11.83	11.83	0
5M	64QAM	1	0	11.82	11.83	11.87	0
		1	12	11.86	11.81	11.84	0
		1	24	11.74	11.75	11.77	0
		12	0	11.87	11.88	11.88	0
		12	6	11.76	11.78	11.82	0
		12	13	11.83	11.80	11.79	0
		25	0	11.80	11.87	11.83	0
5M	256QAM	1	0	11.80	11.83	11.88	0
		1	12	11.86	11.86	11.94	0
		1	24	11.78	11.83	11.81	0
		12	0	11.78	11.81	11.83	0
		12	6	11.81	11.78	11.76	0
		12	13	11.80	11.78	11.74	0
		25	0	11.77	11.77	11.83	0

LTE Conducted Power (P-Sensor_On_Ant0_TB)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	11.99	11.82	11.75	0
		1	50	11.89	11.70	11.65	0
		1	99	11.81	11.66	11.60	0
		50	0	11.86	11.71	11.71	0
		50	25	11.84	11.75	11.69	0
		50	50	11.82	11.61	11.62	0
		100	0	11.90	11.75	11.70	0
20M	16QAM	1	0	11.89	11.72	11.70	0
		1	50	11.87	11.61	11.63	0
		1	99	11.72	11.63	11.57	0
		50	0	11.93	11.71	11.69	0
		50	25	11.86	11.73	11.68	0
		50	50	11.80	11.63	11.58	0
		100	0	11.83	11.73	11.69	0
20M	64QAM	1	0	11.86	11.77	11.70	0
		1	50	11.77	11.57	11.55	0
		1	99	11.72	11.53	11.53	0
		50	0	11.89	11.68	11.65	0
		50	25	11.84	11.63	11.62	0
		50	50	11.72	11.54	11.57	0
		100	0	11.89	11.69	11.66	0
20M	256QAM	1	0	11.87	11.67	11.69	0
		1	50	11.76	11.60	11.60	0
		1	99	11.73	11.54	11.50	0
		50	0	11.83	11.58	11.61	0
		50	25	11.81	11.65	11.59	0
		50	50	11.78	11.62	11.57	0
		100	0	11.84	11.65	11.65	0
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	11.91	11.82	11.68	0
		1	37	11.85	11.67	11.56	0
		1	74	11.77	11.58	11.60	0
		36	0	11.84	11.70	11.62	0
		36	19	11.83	11.67	11.60	0
		36	39	11.76	11.60	11.58	0
		75	0	11.90	11.75	11.63	0
15M	16QAM	1	0	11.80	11.66	11.63	0
		1	37	11.81	11.60	11.55	0
		1	74	11.68	11.59	11.56	0
		36	0	11.85	11.71	11.60	0
		36	19	11.76	11.64	11.63	0
		36	39	11.74	11.61	11.54	0
		75	0	11.76	11.70	11.64	0
15M	64QAM	1	0	11.81	11.72	11.62	0
		1	37	11.71	11.56	11.49	0
		1	74	11.71	11.48	11.51	0
		36	0	11.87	11.63	11.59	0
		36	19	11.84	11.59	11.61	0
		36	39	11.64	11.49	11.47	0
		75	0	11.79	11.68	11.57	0
15M	256QAM	1	0	11.81	11.57	11.68	0
		1	37	11.70	11.58	11.56	0
		1	74	11.69	11.53	11.49	0
		36	0	11.82	11.48	11.56	0
		36	19	11.71	11.62	11.53	0
		36	39	11.69	11.60	11.51	0
		75	0	11.82	11.60	11.58	0

LTE Conducted Power (P-Sensor_On_Ant0_TB)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	11.90	11.76	11.67	0
		1	24	11.80	11.65	11.64	0
		1	49	11.76	11.65	11.57	0
		25	0	11.81	11.69	11.62	0
		25	12	11.79	11.75	11.61	0
		25	25	11.74	11.53	11.55	0
		50	0	11.88	11.66	11.69	0
10M	16QAM	1	0	11.89	11.63	11.69	0
		1	24	11.78	11.57	11.58	0
		1	49	11.62	11.57	11.49	0
		25	0	11.84	11.62	11.59	0
		25	12	11.80	11.69	11.58	0
		25	25	11.78	11.59	11.55	0
		50	0	11.77	11.67	11.61	0
10M	64QAM	1	0	11.76	11.68	11.66	0
		1	24	11.67	11.48	11.49	0
		1	49	11.70	11.49	11.52	0
		25	0	11.87	11.62	11.56	0
		25	12	11.83	11.56	11.62	0
		25	25	11.65	11.46	11.50	0
		50	0	11.82	11.60	11.66	0
10M	256QAM	1	0	11.86	11.66	11.62	0
		1	24	11.76	11.55	11.60	0
		1	49	11.68	11.50	11.45	0
		25	0	11.82	11.48	11.55	0
		25	12	11.76	11.60	11.49	0
		25	25	11.69	11.55	11.56	0
		50	0	11.80	11.55	11.65	0
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	11.93	11.77	11.65	0
		1	12	11.86	11.69	11.62	0
		1	24	11.76	11.60	11.55	0
		12	0	11.80	11.66	11.65	0
		12	6	11.85	11.66	11.63	0
		12	13	11.79	11.56	11.53	0
		25	0	11.84	11.72	11.62	0
5M	16QAM	1	0	11.83	11.68	11.60	0
		1	12	11.77	11.58	11.57	0
		1	24	11.70	11.63	11.52	0
		12	0	11.85	11.70	11.61	0
		12	6	11.79	11.73	11.61	0
		12	13	11.75	11.60	11.53	0
		25	0	11.80	11.64	11.68	0
5M	64QAM	1	0	11.78	11.72	11.69	0
		1	12	11.72	11.49	11.53	0
		1	24	11.65	11.48	11.48	0
		12	0	11.86	11.62	11.55	0
		12	6	11.84	11.60	11.55	0
		12	13	11.70	11.48	11.52	0
		25	0	11.86	11.66	11.62	0
5M	256QAM	1	0	11.87	11.65	11.69	0
		1	12	11.67	11.57	11.56	0
		1	24	11.65	11.49	11.43	0
		12	0	11.83	11.58	11.52	0
		12	6	11.81	11.64	11.51	0
		12	13	11.72	11.58	11.55	0
		25	0	11.78	11.57	11.58	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)										
LTE Band 41										
BW	MCS Index	RB Size	RB Offset	Low	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39790	39750	40185	40620	41055	41490	
		Frequency (MHz)		2510	2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	10.95	11.00	10.84	10.92	10.90	10.74	0
		1	50	10.89	10.93	10.79	10.87	10.86	10.71	0
		1	99	10.83	10.86	10.75	10.81	10.82	10.71	0
		50	0	10.82	10.96	10.74	10.89	10.84	10.72	0
		50	25	10.82	10.93	10.74	10.79	10.83	10.69	0
		50	50	10.77	10.77	10.62	10.71	10.69	10.60	0
		100	0	10.90	10.93	10.75	10.85	10.76	10.70	0
20M	16QAM	1	0	10.80	10.91	10.69	10.80	10.78	10.69	0
		1	50	10.92	10.93	10.79	10.83	10.84	10.74	0
		1	99	10.86	10.87	10.74	10.79	10.78	10.68	0
		50	0	10.79	10.81	10.67	10.79	10.78	10.62	0
		50	25	10.82	10.85	10.71	10.77	10.73	10.64	0
		50	50	10.88	10.87	10.76	10.79	10.79	10.68	0
		100	0	10.70	10.80	10.65	10.63	10.61	10.55	0
20M	64QAM	1	0	10.78	10.90	10.75	10.77	10.74	10.67	0
		1	50	10.77	10.90	10.66	10.76	10.75	10.65	0
		1	99	10.81	10.89	10.80	10.81	10.87	10.71	0
		50	0	10.87	10.93	10.74	10.85	10.84	10.71	0
		50	25	10.77	10.90	10.74	10.79	10.80	10.65	0
		50	50	10.69	10.76	10.56	10.67	10.69	10.56	0
		100	0	10.79	10.79	10.64	10.77	10.76	10.64	0
20M	256QAM	1	0	10.74	10.79	10.72	10.73	10.70	10.64	0
		1	50	10.80	10.79	10.72	10.72	10.72	10.62	0
		1	99	10.73	10.85	10.62	10.74	10.71	10.62	0
		50	0	10.76	10.87	10.68	10.83	10.73	10.65	0
		50	25	10.79	10.81	10.68	10.74	10.76	10.63	0
		50	50	10.73	10.74	10.57	10.67	10.68	10.54	0
		100	0	10.74	10.84	10.71	10.72	10.70	10.64	0
BW	MCS Index	Channel		39765	39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2507.5	2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	10.89	10.98	10.78	10.82	10.88	10.67	0
		1	37	10.85	10.84	10.73	10.78	10.86	10.67	0
		1	74	10.78	10.86	10.73	10.80	10.75	10.66	0
		36	0	10.78	10.91	10.72	10.83	10.84	10.72	0
		36	19	10.82	10.92	10.64	10.79	10.83	10.63	0
		36	39	10.71	10.74	10.58	10.65	10.61	10.59	0
		75	0	10.90	10.87	10.66	10.81	10.70	10.62	0
15M	16QAM	1	0	10.72	10.88	10.68	10.76	10.76	10.60	0
		1	37	10.88	10.91	10.76	10.82	10.74	10.71	0
		1	74	10.78	10.83	10.73	10.76	10.77	10.67	0
		36	0	10.74	10.73	10.60	10.73	10.78	10.59	0
		36	19	10.76	10.80	10.61	10.70	10.67	10.63	0
		36	39	10.87	10.83	10.70	10.69	10.78	10.63	0
		75	0	10.60	10.70	10.62	10.54	10.59	10.49	0
15M	64QAM	1	0	10.78	10.89	10.66	10.68	10.65	10.66	0
		1	37	10.69	10.87	10.62	10.68	10.71	10.65	0
		1	74	10.71	10.87	10.71	10.76	10.82	10.65	0
		36	0	10.81	10.86	10.72	10.75	10.79	10.65	0
		36	19	10.77	10.86	10.66	10.75	10.75	10.59	0
		36	39	10.60	10.76	10.49	10.61	10.65	10.47	0
		75	0	10.75	10.72	10.61	10.75	10.67	10.54	0
15M	256QAM	1	0	10.67	10.70	10.64	10.66	10.68	10.57	0
		1	37	10.72	10.78	10.64	10.69	10.71	10.60	0
		1	74	10.63	10.79	10.54	10.65	10.71	10.54	0
		36	0	10.73	10.83	10.58	10.79	10.65	10.61	0
		36	19	10.76	10.75	10.67	10.65	10.73	10.55	0
		36	39	10.66	10.71	10.54	10.65	10.64	10.49	0
		75	0	10.70	10.74	10.63	10.70	10.67	10.57	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)										
LTE Band 41										
BW	MCS Index	Channel		39740	39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2505	2501	2547	2593	2639	2685	
10M	QPSK	1	0	10.87	10.95	10.77	10.88	10.84	10.69	0
		1	24	10.80	10.85	10.74	10.84	10.86	10.64	0
		1	49	10.82	10.83	10.69	10.72	10.75	10.64	0
		25	0	10.77	10.93	10.67	10.88	10.83	10.72	0
		25	12	10.74	10.87	10.67	10.71	10.79	10.64	0
		25	25	10.68	10.69	10.54	10.62	10.68	10.51	0
		50	0	10.89	10.83	10.74	10.83	10.74	10.60	0
10M	16QAM	1	0	10.80	10.85	10.67	10.71	10.76	10.66	0
		1	24	10.86	10.92	10.78	10.75	10.82	10.68	0
		1	49	10.79	10.87	10.73	10.77	10.71	10.65	0
		25	0	10.73	10.72	10.66	10.71	10.77	10.56	0
		25	12	10.73	10.82	10.67	10.77	10.66	10.61	0
		25	25	10.83	10.79	10.69	10.71	10.78	10.60	0
		50	0	10.60	10.72	10.58	10.63	10.60	10.52	0
10M	64QAM	1	0	10.74	10.88	10.71	10.75	10.66	10.60	0
		1	24	10.68	10.81	10.58	10.75	10.70	10.57	0
		1	49	10.80	10.84	10.72	10.77	10.78	10.64	0
		25	0	10.86	10.87	10.71	10.82	10.79	10.67	0
		25	12	10.72	10.86	10.74	10.70	10.78	10.60	0
		25	25	10.61	10.72	10.54	10.62	10.62	10.47	0
		50	0	10.69	10.73	10.58	10.68	10.72	10.57	0
10M	256QAM	1	0	10.70	10.69	10.64	10.66	10.63	10.59	0
		1	24	10.74	10.75	10.66	10.68	10.72	10.58	0
		1	49	10.65	10.75	10.53	10.68	10.70	10.54	0
		25	0	10.66	10.83	10.61	10.82	10.69	10.64	0
		25	12	10.71	10.78	10.59	10.68	10.76	10.58	0
		25	25	10.72	10.72	10.53	10.59	10.61	10.52	0
		50	0	10.72	10.78	10.63	10.62	10.63	10.54	0
BW	MCS Index	Channel		39715	39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2502.5	2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	10.85	10.94	10.76	10.89	10.80	10.64	0
		1	12	10.81	10.84	10.72	10.85	10.79	10.69	0
		1	24	10.78	10.84	10.66	10.76	10.81	10.68	0
		12	0	10.82	10.88	10.74	10.81	10.76	10.68	0
		12	6	10.73	10.85	10.68	10.79	10.81	10.59	0
		12	13	10.76	10.70	10.53	10.68	10.68	10.53	0
		25	0	10.80	10.83	10.66	10.80	10.74	10.70	0
5M	16QAM	1	0	10.72	10.82	10.62	10.72	10.73	10.64	0
		1	12	10.87	10.86	10.78	10.74	10.78	10.67	0
		1	24	10.80	10.77	10.65	10.77	10.71	10.68	0
		12	0	10.75	10.76	10.59	10.75	10.73	10.52	0
		12	6	10.82	10.82	10.61	10.73	10.71	10.62	0
		12	13	10.82	10.83	10.69	10.70	10.75	10.61	0
		25	0	10.69	10.80	10.64	10.57	10.59	10.47	0
5M	64QAM	1	0	10.71	10.80	10.74	10.67	10.74	10.57	0
		1	12	10.72	10.86	10.66	10.66	10.66	10.56	0
		1	24	10.72	10.89	10.74	10.71	10.85	10.63	0
		12	0	10.85	10.83	10.71	10.76	10.75	10.71	0
		12	6	10.69	10.82	10.73	10.74	10.75	10.64	0
		12	13	10.67	10.67	10.53	10.60	10.69	10.49	0
		25	0	10.76	10.78	10.64	10.74	10.73	10.54	0
5M	256QAM	1	0	10.67	10.79	10.68	10.73	10.60	10.55	0
		1	12	10.77	10.72	10.70	10.69	10.65	10.55	0
		1	24	10.66	10.85	10.55	10.67	10.70	10.62	0
		12	0	10.70	10.82	10.58	10.76	10.71	10.56	0
		12	6	10.73	10.78	10.65	10.70	10.68	10.60	0
		12	13	10.67	10.66	10.50	10.58	10.62	10.47	0
		25	0	10.65	10.83	10.68	10.64	10.68	10.64	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	10.86	10.90	10.80	0
		1	50	10.76	10.81	10.71	0
		1	99	10.80	10.74	10.70	0
		50	0	10.82	10.86	10.77	0
		50	25	10.77	10.79	10.75	0
		50	50	10.77	10.77	10.73	0
		100	0	10.72	10.79	10.75	0
20M	16QAM	1	0	10.79	10.87	10.76	0
		1	50	10.72	10.77	10.66	0
		1	99	10.72	10.72	10.63	0
		50	0	10.70	10.72	10.67	0
		50	25	10.70	10.67	10.65	0
		50	50	10.80	10.76	10.73	0
		100	0	10.73	10.77	10.72	0
20M	64QAM	1	0	10.79	10.79	10.75	0
		1	50	10.69	10.71	10.63	0
		1	99	10.72	10.69	10.63	0
		50	0	10.72	10.79	10.68	0
		50	25	10.71	10.74	10.67	0
		50	50	10.81	10.79	10.71	0
		100	0	10.82	10.72	10.71	0
20M	256QAM	1	0	10.78	10.84	10.74	0
		1	50	10.78	10.79	10.70	0
		1	99	10.70	10.77	10.67	0
		50	0	10.74	10.84	10.73	0
		50	25	10.72	10.78	10.68	0
		50	50	10.73	10.70	10.69	0
		100	0	10.79	10.74	10.68	0
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	10.77	10.80	10.78	0
		1	37	10.72	10.75	10.61	0
		1	74	10.74	10.71	10.61	0
		36	0	10.78	10.80	10.67	0
		36	19	10.72	10.74	10.69	0
		36	39	10.71	10.68	10.65	0
		75	0	10.62	10.75	10.73	0
15M	16QAM	1	0	10.79	10.78	10.70	0
		1	37	10.70	10.76	10.62	0
		1	74	10.62	10.71	10.62	0
		36	0	10.62	10.63	10.64	0
		36	19	10.70	10.58	10.64	0
		36	39	10.79	10.73	10.63	0
		75	0	10.72	10.69	10.62	0
15M	64QAM	1	0	10.71	10.79	10.73	0
		1	37	10.63	10.67	10.63	0
		1	74	10.62	10.64	10.60	0
		36	0	10.63	10.70	10.65	0
		36	19	10.66	10.67	10.67	0
		36	39	10.78	10.73	10.62	0
		75	0	10.82	10.63	10.64	0
15M	256QAM	1	0	10.70	10.76	10.73	0
		1	37	10.71	10.70	10.70	0
		1	74	10.62	10.70	10.60	0
		36	0	10.65	10.77	10.72	0
		36	19	10.67	10.76	10.63	0
		36	39	10.70	10.63	10.68	0
		75	0	10.76	10.69	10.68	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	10.82	10.84	10.80	0
		1	24	10.75	10.71	10.67	0
		1	49	10.76	10.66	10.67	0
		25	0	10.77	10.83	10.74	0
		25	12	10.77	10.70	10.75	0
		25	25	10.76	10.77	10.67	0
		50	0	10.63	10.77	10.65	0
10M	16QAM	1	0	10.79	10.86	10.66	0
		1	24	10.64	10.68	10.59	0
		1	49	10.64	10.72	10.54	0
		25	0	10.60	10.63	10.62	0
		25	12	10.63	10.63	10.63	0
		25	25	10.70	10.67	10.73	0
		50	0	10.63	10.70	10.68	0
10M	64QAM	1	0	10.70	10.77	10.75	0
		1	24	10.62	10.65	10.57	0
		1	49	10.66	10.62	10.55	0
		25	0	10.62	10.75	10.68	0
		25	12	10.64	10.72	10.62	0
		25	25	10.78	10.70	10.69	0
		50	0	10.79	10.70	10.67	0
10M	256QAM	1	0	10.74	10.77	10.69	0
		1	24	10.71	10.70	10.64	0
		1	49	10.63	10.68	10.58	0
		25	0	10.67	10.78	10.67	0
		25	12	10.71	10.69	10.58	0
		25	25	10.64	10.70	10.65	0
		50	0	10.73	10.65	10.68	0
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	10.82	10.90	10.70	0
		1	12	10.76	10.73	10.68	0
		1	24	10.75	10.70	10.65	0
		12	0	10.72	10.76	10.71	0
		12	6	10.72	10.72	10.71	0
		12	13	10.70	10.76	10.68	0
		25	0	10.67	10.69	10.69	0
5M	16QAM	1	0	10.77	10.80	10.74	0
		1	12	10.69	10.73	10.64	0
		1	24	10.71	10.66	10.58	0
		12	0	10.69	10.65	10.62	0
		12	6	10.60	10.67	10.62	0
		12	13	10.73	10.70	10.73	0
		25	0	10.72	10.71	10.69	0
5M	64QAM	1	0	10.78	10.74	10.68	0
		1	12	10.68	10.70	10.55	0
		1	24	10.72	10.63	10.54	0
		12	0	10.65	10.70	10.59	0
		12	6	10.63	10.68	10.57	0
		12	13	10.71	10.75	10.69	0
		25	0	10.74	10.71	10.71	0
5M	256QAM	1	0	10.71	10.82	10.66	0
		1	12	10.74	10.71	10.66	0
		1	24	10.69	10.74	10.57	0
		12	0	10.68	10.81	10.70	0
		12	6	10.63	10.74	10.62	0
		12	13	10.71	10.69	10.69	0
		25	0	10.74	10.74	10.60	0

LTE Conducted Power (P-Sensor_On_Ant0_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	10.84	10.89	10.71	0
		1	7	10.73	10.77	10.70	0
		1	14	10.71	10.71	10.67	0
		8	0	10.78	10.84	10.74	0
		8	3	10.76	10.74	10.71	0
		8	7	10.72	10.71	10.72	0
		15	0	10.66	10.78	10.65	0
3M	16QAM	1	0	10.74	10.81	10.72	0
		1	7	10.69	10.70	10.64	0
		1	14	10.63	10.63	10.56	0
		8	0	10.68	10.66	10.58	0
		8	3	10.67	10.60	10.62	0
		8	7	10.72	10.74	10.73	0
		15	0	10.63	10.76	10.68	0
3M	64QAM	1	0	10.69	10.78	10.65	0
		1	7	10.68	10.68	10.60	0
		1	14	10.67	10.60	10.54	0
		8	0	10.64	10.77	10.63	0
		8	3	10.70	10.67	10.60	0
		8	7	10.75	10.78	10.61	0
		15	0	10.82	10.70	10.71	0
3M	256QAM	1	0	10.71	10.76	10.72	0
		1	7	10.71	10.78	10.62	0
		1	14	10.62	10.76	10.63	0
		8	0	10.67	10.82	10.63	0
		8	3	10.64	10.78	10.61	0
		8	7	10.67	10.60	10.67	0
		15	0	10.69	10.65	10.60	0
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	10.79	10.85	10.80	0
		1	2	10.71	10.81	10.65	0
		1	5	10.75	10.69	10.68	0
		3	0	10.75	10.86	10.77	0
		3	1	10.70	10.75	10.68	0
		3	3	10.69	10.69	10.66	0
		6	0	10.62	10.74	10.69	0
1.4M	16QAM	1	0	10.76	10.81	10.76	0
		1	2	10.67	10.77	10.65	0
		1	5	10.65	10.63	10.63	0
		3	0	10.68	10.65	10.62	0
		3	1	10.70	10.63	10.63	0
		3	3	10.74	10.70	10.68	0
		6	0	10.68	10.68	10.64	0
1.4M	64QAM	1	0	10.70	10.76	10.68	0
		1	2	10.69	10.68	10.60	0
		1	5	10.72	10.67	10.59	0
		3	0	10.69	10.77	10.58	0
		3	1	10.68	10.69	10.59	0
		3	3	10.73	10.79	10.66	0
		6	0	10.73	10.69	10.71	0
1.4M	256QAM	1	0	10.70	10.84	10.68	0
		1	2	10.69	10.69	10.67	0
		1	5	10.63	10.74	10.61	0
		3	0	10.69	10.76	10.73	0
		3	1	10.70	10.70	10.64	0
		3	3	10.71	10.67	10.67	0
		6	0	10.72	10.71	10.60	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	20.62	20.45	20.56	0
		1	50	20.59	20.42	20.53	0
		1	99	20.54	20.43	20.52	0
		50	0	19.49	19.34	19.43	0
		50	25	19.39	19.31	19.33	0
		50	50	19.44	19.30	19.39	0
		100	0	19.43	19.27	19.37	0
20M	16QAM	1	0	19.36	19.26	19.33	0
		1	50	19.40	19.23	19.30	0
		1	99	19.30	19.22	19.27	0
		50	0	18.47	18.31	18.36	0
		50	25	18.41	18.29	18.39	0
		50	50	20.41	20.26	20.33	0
		100	0	20.37	20.25	20.33	0
20M	64QAM	1	0	20.55	20.46	20.48	0
		1	50	20.47	20.32	20.34	0
		1	99	20.52	20.36	20.43	0
		50	0	20.39	20.29	20.32	0
		50	25	20.40	20.28	20.35	0
		50	50	20.32	20.24	20.34	0
		100	0	20.38	20.23	20.30	0
20M	256QAM	1	0	18.97	18.84	18.85	2
		1	50	18.65	18.56	18.62	2
		1	99	18.60	18.48	18.50	2
		50	0	18.78	18.67	18.70	2
		50	25	18.75	18.61	18.63	2
		50	50	18.64	18.56	18.59	2
		100	0	18.61	18.52	18.55	2
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	20.55	20.43	20.50	0
		1	37	20.53	20.41	20.49	0
		1	74	20.50	20.33	20.47	0
		36	0	19.44	19.30	19.43	0
		36	19	19.45	19.21	19.38	0
		36	39	19.43	19.21	19.32	0
		75	0	19.40	19.20	19.37	0
15M	16QAM	1	0	19.37	19.20	19.29	0
		1	37	19.40	19.19	19.27	0
		1	74	19.29	19.12	19.27	0
		36	0	18.48	18.29	18.41	0
		36	19	18.40	18.29	18.35	0
		36	39	20.36	20.19	20.33	0
		75	0	20.39	20.24	20.34	0
15M	64QAM	1	0	20.58	20.41	20.52	0
		1	37	20.44	20.22	20.38	0
		1	74	20.46	20.33	20.37	0
		36	0	20.42	20.26	20.40	0
		36	19	20.44	20.20	20.38	0
		36	39	20.35	20.17	20.30	0
		75	0	20.35	20.20	20.30	0
15M	256QAM	1	0	18.92	18.75	18.88	2
		1	37	18.67	18.50	18.64	2
		1	74	18.65	18.42	18.57	2
		36	0	18.83	18.59	18.68	2
		36	19	18.71	18.58	18.69	2
		36	39	18.65	18.54	18.65	2
		75	0	18.63	18.42	18.53	2

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	20.62	20.35	20.56	0
		1	24	20.56	20.34	20.47	0
		1	49	20.52	20.41	20.48	0
		25	0	19.41	19.26	19.35	0
		25	12	19.43	19.27	19.34	0
		25	25	19.43	19.26	19.32	0
		50	0	19.39	19.26	19.36	0
10M	16QAM	1	0	19.40	19.25	19.29	0
		1	24	19.36	19.20	19.33	0
		1	49	19.30	19.14	19.26	0
		25	0	18.41	18.31	18.32	0
		25	12	18.37	18.27	18.37	0
		25	25	20.41	20.19	20.32	0
		50	0	20.35	20.18	20.33	0
10M	64QAM	1	0	20.59	20.40	20.48	0
		1	24	20.49	20.31	20.38	0
		1	49	20.50	20.26	20.47	0
		25	0	20.41	20.23	20.39	0
		25	12	20.35	20.19	20.31	0
		25	25	20.39	20.17	20.31	0
		50	0	20.40	20.23	20.27	0
10M	256QAM	1	0	18.97	18.84	18.86	2
		1	24	18.70	18.46	18.67	2
		1	49	18.64	18.47	18.58	2
		25	0	18.74	18.57	18.78	2
		25	12	18.78	18.54	18.69	2
		25	25	18.68	18.46	18.67	2
		50	0	18.65	18.45	18.60	2
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	20.56	20.43	20.48	0
		1	12	20.59	20.41	20.52	0
		1	24	20.54	20.43	20.52	0
		12	0	19.49	19.29	19.35	0
		12	6	19.42	19.22	19.33	0
		12	13	19.43	19.29	19.37	0
		25	0	19.38	19.19	19.36	0
5M	16QAM	1	0	19.38	19.20	19.30	0
		1	12	19.39	19.17	19.29	0
		1	24	19.33	19.17	19.31	0
		12	0	18.42	18.29	18.42	0
		12	6	18.36	18.23	18.39	0
		12	13	20.40	20.17	20.30	0
		25	0	20.34	20.25	20.35	0
5M	64QAM	1	0	20.59	20.39	20.55	0
		1	12	20.47	20.25	20.42	0
		1	24	20.47	20.33	20.37	0
		12	0	20.39	20.22	20.35	0
		12	6	20.38	20.27	20.34	0
		12	13	20.41	20.22	20.33	0
		25	0	20.38	20.22	20.28	0
5M	256QAM	1	0	18.95	18.77	18.94	2
		1	12	18.68	18.46	18.64	2
		1	24	18.55	18.40	18.56	2
		12	0	18.82	18.63	18.75	2
		12	6	18.70	18.52	18.70	2
		12	13	18.73	18.46	18.58	2
		25	0	18.69	18.50	18.60	2

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	20.60	20.44	20.51	0
		1	7	20.50	20.37	20.50	0
		1	14	20.52	20.34	20.47	0
		8	0	19.44	19.25	19.35	0
		8	3	19.41	19.24	19.42	0
		8	7	19.37	19.25	19.41	0
		15	0	19.41	19.20	19.32	0
3M	16QAM	1	0	19.34	19.21	19.33	0
		1	7	19.35	19.17	19.29	0
		1	14	19.36	19.19	19.32	0
		8	0	18.45	18.23	18.39	0
		8	3	18.40	18.25	18.40	0
		8	7	20.33	20.26	20.37	0
		15	0	20.33	20.23	20.27	0
3M	64QAM	1	0	20.62	20.46	20.57	0
		1	7	20.43	20.22	20.34	0
		1	14	20.49	20.31	20.45	0
		8	0	20.41	20.29	20.34	0
		8	3	20.41	20.18	20.34	0
		8	7	20.33	20.17	20.34	0
		15	0	20.40	20.21	20.33	0
3M	256QAM	1	0	18.91	18.75	18.92	2
		1	7	18.73	18.49	18.60	2
		1	14	18.65	18.42	18.53	2
		8	0	18.74	18.60	18.77	2
		8	3	18.78	18.61	18.66	2
		8	7	18.70	18.51	18.62	2
		15	0	18.66	18.49	18.55	2
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	20.54	20.38	20.52	0
		1	2	20.55	20.40	20.53	0
		1	5	20.51	20.37	20.45	0
		3	0	19.47	19.30	19.35	0
		3	1	19.38	19.21	19.40	0
		3	3	19.41	19.23	19.31	0
		6	0	19.42	19.27	19.34	0
1.4M	16QAM	1	0	19.34	19.18	19.34	0
		1	2	19.33	19.15	19.31	0
		1	5	19.31	19.18	19.23	0
		3	0	18.44	18.21	18.32	0
		3	1	18.45	18.25	18.32	0
		3	3	20.41	20.22	20.37	0
		6	0	20.39	20.23	20.36	0
1.4M	64QAM	1	0	20.62	20.38	20.48	0
		1	2	20.41	20.32	20.40	0
		1	5	20.49	20.28	20.42	0
		3	0	20.43	20.24	20.33	0
		3	1	20.35	20.18	20.37	0
		3	3	20.32	20.17	20.27	0
		6	0	20.40	20.18	20.25	0
1.4M	256QAM	1	0	18.93	18.78	18.94	2
		1	2	18.65	18.55	18.61	2
		1	5	18.60	18.38	18.52	2
		3	0	18.81	18.59	18.68	2
		3	1	18.74	18.60	18.72	2
		3	3	18.73	18.55	18.59	2
		6	0	18.63	18.47	18.54	2

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	20.20	20.25	20.32	0
		1	50	20.16	20.20	20.22	0
		1	99	20.08	20.20	20.19	0
		50	0	20.13	20.19	20.24	0
		50	25	20.13	20.19	20.17	0
		50	50	20.01	20.15	20.22	0
		100	0	20.06	20.18	20.23	0
20M	16QAM	1	0	19.89	20.00	19.97	0
		1	50	19.92	19.99	20.01	0
		1	99	19.73	19.87	19.93	0
		50	0	19.82	19.95	19.92	0
		50	25	19.86	19.90	19.89	0
		50	50	19.76	19.90	19.87	0
		100	0	19.82	19.89	19.88	0
20M	64QAM	1	0	20.09	20.19	20.26	0
		1	50	20.08	20.15	20.16	0
		1	99	20.03	20.14	20.20	0
		50	0	19.65	19.70	19.73	0
		50	25	20.02	20.14	20.17	0
		50	50	20.02	20.15	20.17	0
		100	0	19.96	20.09	20.16	0
20M	256QAM	1	0	18.76	18.90	18.96	0
		1	50	18.86	18.90	18.97	0
		1	99	18.77	18.88	18.87	0
		50	0	18.77	18.83	18.87	0
		50	25	18.73	18.80	18.87	0
		50	50	18.75	18.82	18.89	0
		100	0	18.76	18.90	18.88	0
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	20.18	20.19	20.22	0
		1	37	20.09	20.20	20.18	0
		1	74	19.99	20.17	20.17	0
		36	0	20.13	20.10	20.21	0
		36	19	20.08	20.11	20.16	0
		36	39	19.95	20.14	20.22	0
		75	0	20.01	20.14	20.23	0
15M	16QAM	1	0	19.81	19.90	19.95	0
		1	37	19.89	19.94	20.01	0
		1	74	19.64	19.85	19.84	0
		36	0	19.80	19.90	19.88	0
		36	19	19.81	19.83	19.81	0
		36	39	19.73	19.90	19.77	0
		75	0	19.78	19.86	19.88	0
15M	64QAM	1	0	20.09	20.19	20.22	0
		1	37	20.00	20.15	20.15	0
		1	74	20.03	20.14	20.11	0
		36	0	19.56	19.64	19.73	0
		36	19	19.98	20.04	20.14	0
		36	39	20.02	20.05	20.07	0
		75	0	19.89	20.04	20.07	0
15M	256QAM	1	0	18.68	18.87	18.90	0
		1	37	18.80	18.83	18.90	0
		1	74	18.75	18.88	18.80	0
		36	0	18.68	18.80	18.85	0
		36	19	18.63	18.73	18.77	0
		36	39	18.67	18.72	18.83	0
		75	0	18.67	18.88	18.87	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	20.19	20.22	20.25	0
		1	24	20.08	20.19	20.22	0
		1	49	20.00	20.13	20.12	0
		25	0	20.04	20.15	20.20	0
		25	12	20.05	20.11	20.07	0
		25	25	19.99	20.05	20.14	0
		50	0	19.96	20.18	20.19	0
10M	16QAM	1	0	19.87	19.91	19.91	0
		1	24	19.89	19.89	19.97	0
		1	49	19.69	19.87	19.84	0
		25	0	19.72	19.89	19.89	0
		25	12	19.84	19.81	19.82	0
		25	25	19.68	19.84	19.77	0
		50	0	19.73	19.86	19.81	0
10M	64QAM	1	0	20.02	20.16	20.26	0
		1	24	20.05	20.09	20.16	0
		1	49	19.98	20.08	20.18	0
		25	0	19.59	19.66	19.68	0
		25	12	19.94	20.04	20.11	0
		25	25	20.02	20.09	20.17	0
		50	0	19.94	20.09	20.06	0
10M	256QAM	1	0	18.66	18.85	18.93	0
		1	24	18.79	18.88	18.93	0
		1	49	18.67	18.81	18.81	0
		25	0	18.76	18.77	18.83	0
		25	12	18.72	18.74	18.80	0
		25	25	18.73	18.73	18.87	0
		50	0	18.66	18.90	18.79	0
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	20.16	20.21	20.31	0
		1	12	20.14	20.12	20.16	0
		1	24	20.01	20.19	20.09	0
		12	0	20.03	20.17	20.15	0
		12	6	20.06	20.12	20.08	0
		12	13	20.01	20.10	20.15	0
		25	0	19.99	20.18	20.13	0
5M	16QAM	1	0	19.82	20.00	19.90	0
		1	12	19.82	19.99	20.00	0
		1	24	19.65	19.77	19.90	0
		12	0	19.80	19.94	19.89	0
		12	6	19.80	19.90	19.79	0
		12	13	19.72	19.85	19.83	0
		25	0	19.72	19.83	19.84	0
5M	64QAM	1	0	20.03	20.17	20.23	0
		1	12	20.01	20.09	20.09	0
		1	24	20.01	20.04	20.20	0
		12	0	19.62	19.62	19.65	0
		12	6	19.96	20.12	20.17	0
		12	13	19.95	20.08	20.10	0
		25	0	19.93	20.01	20.12	0
5M	256QAM	1	0	18.73	18.86	18.96	0
		1	12	18.85	18.83	18.95	0
		1	24	18.73	18.79	18.80	0
		12	0	18.76	18.74	18.77	0
		12	6	18.73	18.75	18.85	0
		12	13	18.66	18.72	18.79	0
		25	0	18.75	18.87	18.88	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 42							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		43190	43340	43490	
		Frequency (MHz)		3560	3575	3590	
20M	QPSK	1	0	15.48	15.45	15.46	0
		1	50	15.43	15.40	15.41	0
		1	99	15.40	15.37	15.38	0
		50	0	15.42	15.39	15.40	0
		50	25	15.41	15.38	15.39	0
		50	50	15.39	15.36	15.37	0
		100	0	15.40	15.37	15.38	0
20M	16QAM	1	0	15.45	15.42	15.43	0
		1	50	15.43	15.40	15.41	0
		1	99	15.42	15.39	15.40	0
		50	0	15.43	15.40	15.41	0
		50	25	15.39	15.36	15.37	0
		50	50	15.37	15.34	15.35	0
		100	0	15.41	15.38	15.39	0
20M	64QAM	1	0	15.45	15.42	15.43	0
		1	50	15.41	15.38	15.39	0
		1	99	15.36	15.33	15.34	0
		50	0	15.42	15.39	15.40	0
		50	25	15.37	15.34	15.35	0
		50	50	15.36	15.33	15.34	0
		100	0	15.39	15.36	15.37	0
20M	256QAM	1	0	15.44	15.41	15.42	0
		1	50	15.41	15.38	15.39	0
		1	99	15.40	15.37	15.38	0
		50	0	15.41	15.38	15.39	0
		50	25	15.39	15.36	15.37	0
		50	50	15.36	15.33	15.34	0
		100	0	15.38	15.35	15.36	0
BW	MCS Index	Channel		43165	43340	43515	3GPP MPR
		Frequency (MHz)		3557.5	3575	3592.5	
15M	QPSK	1	0	15.38	15.40	15.41	0
		1	37	15.39	15.33	15.38	0
		1	74	15.31	15.35	15.35	0
		36	0	15.36	15.35	15.31	0
		36	19	15.41	15.38	15.29	0
		36	39	15.34	15.33	15.37	0
		75	0	15.40	15.28	15.38	0
15M	16QAM	1	0	15.44	15.33	15.40	0
		1	37	15.38	15.40	15.37	0
		1	74	15.39	15.38	15.34	0
		36	0	15.33	15.31	15.34	0
		36	19	15.33	15.30	15.33	0
		36	39	15.33	15.28	15.28	0
		75	0	15.41	15.30	15.38	0
15M	64QAM	1	0	15.38	15.38	15.41	0
		1	37	15.36	15.28	15.31	0
		1	74	15.33	15.33	15.31	0
		36	0	15.42	15.37	15.35	0
		36	19	15.37	15.28	15.33	0
		36	39	15.27	15.32	15.31	0
		75	0	15.35	15.27	15.33	0
15M	256QAM	1	0	15.44	15.40	15.39	0
		1	37	15.32	15.31	15.30	0
		1	74	15.32	15.32	15.34	0
		36	0	15.41	15.29	15.36	0
		36	19	15.36	15.26	15.37	0
		36	39	15.36	15.26	15.30	0
		75	0	15.37	15.33	15.30	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 42							
BW	MCS Index	Channel		43140	43340	43540	3GPP MPR
		Frequency (MHz)		3555	3575	3595	
10M	QPSK	1	0	15.43	15.44	15.36	0
		1	24	15.37	15.36	15.35	0
		1	49	15.38	15.36	15.36	0
		25	0	15.42	15.38	15.35	0
		25	12	15.31	15.29	15.34	0
		25	25	15.37	15.29	15.36	0
		50	0	15.38	15.30	15.31	0
10M	16QAM	1	0	15.38	15.40	15.34	0
		1	24	15.37	15.33	15.40	0
		1	49	15.41	15.36	15.31	0
		25	0	15.43	15.33	15.33	0
		25	12	15.29	15.36	15.33	0
		25	25	15.34	15.32	15.30	0
		50	0	15.40	15.34	15.38	0
10M	64QAM	1	0	15.45	15.42	15.40	0
		1	24	15.35	15.32	15.37	0
		1	49	15.31	15.26	15.29	0
		25	0	15.35	15.29	15.39	0
		25	12	15.31	15.28	15.33	0
		25	25	15.33	15.32	15.32	0
		50	0	15.35	15.28	15.33	0
10M	256QAM	1	0	15.37	15.33	15.33	0
		1	24	15.36	15.28	15.30	0
		1	49	15.32	15.33	15.30	0
		25	0	15.37	15.36	15.36	0
		25	12	15.33	15.26	15.33	0
		25	25	15.35	15.33	15.26	0
		50	0	15.38	15.26	15.32	0
BW	MCS Index	Channel		43115	43340	43565	3GPP MPR
		Frequency (MHz)		3552.5	3575	3597.5	
5M	QPSK	1	0	15.43	15.35	15.42	0
		1	12	15.39	15.38	15.35	0
		1	24	15.37	15.37	15.30	0
		12	0	15.38	15.31	15.34	0
		12	6	15.40	15.32	15.39	0
		12	13	15.32	15.36	15.27	0
		25	0	15.36	15.32	15.29	0
5M	16QAM	1	0	15.38	15.35	15.35	0
		1	12	15.43	15.37	15.41	0
		1	24	15.32	15.38	15.30	0
		12	0	15.38	15.36	15.40	0
		12	6	15.32	15.36	15.29	0
		12	13	15.29	15.32	15.31	0
		25	0	15.37	15.36	15.30	0
5M	64QAM	1	0	15.41	15.39	15.41	0
		1	12	15.34	15.34	15.33	0
		1	24	15.34	15.26	15.24	0
		12	0	15.40	15.37	15.36	0
		12	6	15.28	15.32	15.28	0
		12	13	15.35	15.24	15.34	0
		25	0	15.34	15.35	15.31	0
5M	256QAM	1	0	15.34	15.35	15.37	0
		1	12	15.31	15.33	15.31	0
		1	24	15.33	15.33	15.28	0
		12	0	15.31	15.36	15.32	0
		12	6	15.35	15.36	15.35	0
		12	13	15.26	15.25	15.29	0
		25	0	15.37	15.32	15.31	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	15.96	15.94	15.91	15.92	0
		1	50	15.94	15.94	15.91	15.92	0
		1	99	15.87	15.92	15.89	15.90	0
		50	0	15.92	15.85	15.82	15.83	0
		50	25	15.91	15.90	15.87	15.88	0
		50	50	15.87	15.89	15.86	15.87	0
		100	0	15.91	15.85	15.82	15.83	0
20M	16QAM	1	0	15.94	15.89	15.86	15.87	0
		1	50	15.87	15.92	15.89	15.90	0
		1	99	15.85	15.85	15.82	15.83	0
		50	0	15.91	15.83	15.80	15.81	0
		50	25	15.88	15.89	15.86	15.87	0
		50	50	15.84	15.86	15.83	15.84	0
		100	0	15.86	15.82	15.79	15.80	0
20M	64QAM	1	0	15.92	15.84	15.81	15.82	0
		1	50	15.81	15.90	15.87	15.88	0
		1	99	15.79	15.79	15.76	15.77	0
		50	0	15.86	15.77	15.74	15.75	0
		50	25	15.85	15.84	15.81	15.82	0
		50	50	15.84	15.83	15.80	15.81	0
		100	0	15.87	15.82	15.79	15.80	0
20M	256QAM	1	0	15.94	15.85	15.82	15.83	0
		1	50	15.91	15.92	15.89	15.90	0
		1	99	15.87	15.89	15.86	15.87	0
		50	0	15.93	15.85	15.82	15.83	0
		50	25	15.90	15.91	15.88	15.89	0
		50	50	15.88	15.88	15.85	15.86	0
		100	0	15.90	15.86	15.83	15.84	0
BW	MCS Index	Channel		55315	15.88	15.85	15.86	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	15.86	15.88	15.87	15.90	0
		1	37	15.94	15.84	15.86	15.89	0
		1	74	15.84	15.88	15.85	15.82	0
		36	0	15.90	15.85	15.79	15.83	0
		36	19	15.85	15.90	15.77	15.80	0
		36	39	15.77	15.81	15.76	15.85	0
		75	0	15.83	15.82	15.73	15.77	0
15M	16QAM	1	0	15.89	15.94	15.82	15.85	0
		1	37	15.85	15.84	15.88	15.89	0
		1	74	15.78	15.84	15.83	15.82	0
		36	0	15.92	15.78	15.73	15.80	0
		36	19	15.85	15.89	15.81	15.78	0
		36	39	15.79	15.83	15.86	15.87	0
		75	0	15.86	15.77	15.80	15.82	0
15M	64QAM	1	0	15.90	15.89	15.81	15.86	0
		1	37	15.88	15.85	15.86	15.86	0
		1	74	15.79	15.82	15.84	15.88	0
		36	0	15.85	15.81	15.78	15.77	0
		36	19	15.91	15.84	15.81	15.82	0
		36	39	15.83	15.89	15.78	15.85	0
		75	0	15.89	15.76	15.80	15.77	0
15M	256QAM	1	0	15.89	15.76	15.75	15.81	0
		1	37	15.85	15.92	15.80	15.90	0
		1	74	15.83	15.87	15.77	15.77	0
		36	0	15.89	15.83	15.82	15.77	0
		36	19	15.88	15.81	15.81	15.88	0
		36	39	15.80	15.87	15.78	15.80	0
		75	0	15.86	15.81	15.82	15.80	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	15.94	15.84	15.87	15.89	0
		1	24	15.91	15.90	15.81	15.87	0
		1	49	15.81	15.88	15.84	15.86	0
		25	0	15.92	15.75	15.77	15.82	0
		25	12	15.81	15.88	15.85	15.85	0
		25	25	15.77	15.82	15.78	15.87	0
		50	0	15.88	15.85	15.79	15.76	0
10M	16QAM	1	0	15.86	15.86	15.90	15.87	0
		1	24	15.86	15.93	15.88	15.83	0
		1	49	15.87	15.85	15.84	15.83	0
		25	0	15.82	15.81	15.78	15.75	0
		25	12	15.84	15.87	15.85	15.84	0
		25	25	15.82	15.81	15.85	15.83	0
		50	0	15.89	15.75	15.76	15.81	0
10M	64QAM	1	0	15.95	15.84	15.86	15.84	0
		1	24	15.85	15.84	15.87	15.83	0
		1	49	15.78	15.87	15.89	15.85	0
		25	0	15.85	15.79	15.78	15.75	0
		25	12	15.90	15.90	15.80	15.83	0
		25	25	15.85	15.79	15.82	15.85	0
		50	0	15.91	15.79	15.78	15.80	0
10M	256QAM	1	0	15.92	15.78	15.74	15.83	0
		1	24	15.88	15.88	15.83	15.81	0
		1	49	15.85	15.79	15.77	15.81	0
		25	0	15.86	15.84	15.79	15.83	0
		25	12	15.86	15.91	15.82	15.80	0
		25	25	15.88	15.83	15.82	15.83	0
		50	0	15.87	15.78	15.80	15.83	0
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	15.87	15.91	15.84	15.92	0
		1	12	15.89	15.93	15.82	15.90	0
		1	24	15.77	15.84	15.84	15.80	0
		12	0	15.88	15.85	15.77	15.83	0
		12	6	15.91	15.82	15.81	15.80	0
		12	13	15.83	15.84	15.81	15.87	0
		25	0	15.82	15.75	15.76	15.83	0
5M	16QAM	1	0	15.86	15.88	15.89	15.83	0
		1	12	15.86	15.89	15.86	15.85	0
		1	24	15.86	15.88	15.87	15.83	0
		12	0	15.82	15.76	15.77	15.83	0
		12	6	15.88	15.80	15.77	15.84	0
		12	13	15.86	15.85	15.77	15.84	0
		25	0	15.84	15.78	15.80	15.81	0
5M	64QAM	1	0	15.94	15.93	15.90	15.86	0
		1	12	15.84	15.92	15.85	15.92	0
		1	24	15.81	15.85	15.80	15.86	0
		12	0	15.91	15.83	15.82	15.80	0
		12	6	15.89	15.84	15.84	15.80	0
		12	13	15.80	15.85	15.83	15.83	0
		25	0	15.83	15.84	15.72	15.76	0
5M	256QAM	1	0	15.84	15.85	15.72	15.81	0
		1	12	15.83	15.84	15.80	15.83	0
		1	24	15.83	15.84	15.82	15.81	0
		12	0	15.90	15.79	15.77	15.78	0
		12	6	15.90	15.89	15.85	15.86	0
		12	13	15.81	15.81	15.84	15.76	0
		25	0	15.89	15.86	15.83	15.77	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	21.00	20.94	20.88	0
		1	50	20.95	20.85	20.77	0
		1	99	20.91	20.82	20.75	0
		50	0	20.90	20.80	20.82	0
		50	25	20.89	20.81	20.72	0
		50	50	20.85	20.78	20.72	0
		100	0	20.91	20.80	20.78	0
20M	16QAM	1	0	20.80	20.66	20.69	0
		1	50	20.76	20.63	20.68	0
		1	99	20.65	20.55	20.49	0
		50	0	20.74	20.65	20.57	0
		50	25	20.60	20.53	20.45	0
		50	50	20.60	20.50	20.50	0
		100	0	20.80	20.72	20.66	0
20M	64QAM	1	0	20.77	20.64	20.67	0
		1	50	20.72	20.62	20.61	0
		1	99	20.70	20.62	20.56	0
		50	0	20.72	20.64	20.56	0
		50	25	20.65	20.55	20.49	0
		50	50	20.62	20.55	20.51	0
		100	0	20.70	20.57	20.59	0
20M	256QAM	1	0	19.14	19.01	19.02	0
		1	50	19.00	18.93	18.86	0
		1	99	18.96	18.89	18.82	0
		50	0	19.00	18.90	18.86	0
		50	25	18.99	18.85	18.88	0
		50	50	18.96	18.81	18.79	0
		100	0	19.00	18.92	18.83	0
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	20.99	20.92	20.88	0
		1	37	20.88	20.76	20.71	0
		1	74	20.86	20.81	20.75	0
		36	0	20.83	20.74	20.81	0
		36	19	20.86	20.73	20.72	0
		36	39	20.82	20.70	20.62	0
		75	0	20.87	20.77	20.78	0
15M	16QAM	1	0	20.72	20.63	20.63	0
		1	37	20.74	20.59	20.61	0
		1	74	20.65	20.55	20.44	0
		36	0	20.69	20.56	20.50	0
		36	19	20.54	20.44	20.44	0
		36	39	20.51	20.50	20.46	0
		75	0	20.76	20.69	20.60	0
15M	64QAM	1	0	20.75	20.63	20.60	0
		1	37	20.72	20.55	20.59	0
		1	74	20.69	20.52	20.55	0
		36	0	20.72	20.56	20.55	0
		36	19	20.59	20.50	20.43	0
		36	39	20.62	20.52	20.50	0
		75	0	20.62	20.49	20.56	0
15M	256QAM	1	0	19.05	18.96	18.94	0
		1	37	18.95	18.84	18.81	0
		1	74	18.93	18.79	18.74	0
		36	0	18.98	18.81	18.80	0
		36	19	18.97	18.84	18.83	0
		36	39	18.94	18.81	18.69	0
		75	0	18.90	18.90	18.80	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	20.98	20.86	20.87	0
		1	24	20.91	20.85	20.73	0
		1	49	20.83	20.73	20.68	0
		25	0	20.80	20.78	20.72	0
		25	12	20.86	20.73	20.72	0
		25	25	20.79	20.77	20.69	0
		50	0	20.83	20.80	20.71	0
10M	16QAM	1	0	20.72	20.66	20.61	0
		1	24	20.68	20.56	20.68	0
		1	49	20.60	20.50	20.42	0
		25	0	20.65	20.58	20.48	0
		25	12	20.59	20.51	20.40	0
		25	25	20.58	20.46	20.42	0
		50	0	20.73	20.68	20.64	0
10M	64QAM	1	0	20.72	20.55	20.63	0
		1	24	20.70	20.54	20.51	0
		1	49	20.64	20.52	20.52	0
		25	0	20.64	20.64	20.54	0
		25	12	20.61	20.48	20.42	0
		25	25	20.59	20.50	20.41	0
		50	0	20.69	20.57	20.51	0
10M	256QAM	1	0	19.13	18.92	18.96	0
		1	24	18.95	18.93	18.81	0
		1	49	18.90	18.84	18.77	0
		25	0	18.97	18.85	18.83	0
		25	12	18.93	18.84	18.84	0
		25	25	18.94	18.71	18.73	0
		50	0	18.96	18.84	18.80	0
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	20.97	20.87	20.86	0
		1	12	20.95	20.81	20.77	0
		1	24	20.84	20.76	20.69	0
		12	0	20.86	20.70	20.74	0
		12	6	20.87	20.75	20.67	0
		12	13	20.85	20.71	20.70	0
		25	0	20.82	20.73	20.69	0
5M	16QAM	1	0	20.74	20.61	20.69	0
		1	12	20.67	20.54	20.61	0
		1	24	20.56	20.52	20.49	0
		12	0	20.64	20.55	20.51	0
		12	6	20.59	20.44	20.35	0
		12	13	20.56	20.42	20.48	0
		25	0	20.78	20.68	20.63	0
5M	64QAM	1	0	20.76	20.57	20.62	0
		1	12	20.65	20.59	20.57	0
		1	24	20.60	20.57	20.48	0
		12	0	20.68	20.55	20.54	0
		12	6	20.57	20.47	20.43	0
		12	13	20.58	20.55	20.50	0
		25	0	20.70	20.48	20.50	0
5M	256QAM	1	0	19.14	19.00	18.99	0
		1	12	18.93	18.84	18.81	0
		1	24	18.89	18.85	18.75	0
		12	0	18.94	18.81	18.78	0
		12	6	18.96	18.79	18.87	0
		12	13	18.92	18.75	18.69	0
		25	0	18.96	18.89	18.74	0

LTE Conducted Power (P-Sensor_Off_Ant2_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	20.93	20.89	20.87	0
		1	7	20.88	20.75	20.75	0
		1	14	20.83	20.72	20.73	0
		8	0	20.87	20.70	20.82	0
		8	3	20.86	20.78	20.71	0
		8	7	20.75	20.75	20.67	0
		15	0	20.90	20.77	20.68	0
3M	16QAM	1	0	20.79	20.56	20.68	0
		1	7	20.70	20.57	20.68	0
		1	14	20.55	20.52	20.48	0
		8	0	20.72	20.59	20.53	0
		8	3	20.51	20.47	20.38	0
		8	7	20.53	20.41	20.40	0
		15	0	20.79	20.62	20.61	0
3M	64QAM	1	0	20.68	20.64	20.66	0
		1	7	20.62	20.60	20.56	0
		1	14	20.68	20.59	20.46	0
		8	0	20.68	20.54	20.46	0
		8	3	20.59	20.50	20.47	0
		8	7	20.60	20.49	20.45	0
		15	0	20.67	20.47	20.55	0
3M	256QAM	1	0	19.14	18.94	18.92	0
		1	7	18.92	18.91	18.80	0
		1	14	18.86	18.84	18.82	0
		8	0	18.92	18.83	18.86	0
		8	3	18.91	18.77	18.85	0
		8	7	18.89	18.76	18.71	0
		15	0	18.97	18.90	18.75	0
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	20.91	20.87	20.80	0
		1	2	20.92	20.80	20.67	0
		1	5	20.83	20.80	20.66	0
		3	0	20.81	20.78	20.78	0
		3	1	20.87	20.74	20.63	0
		3	3	20.84	20.72	20.65	0
		6	0	20.86	20.70	20.71	0
1.4M	16QAM	1	0	20.75	20.56	20.69	0
		1	2	20.69	20.55	20.59	0
		1	5	20.56	20.49	20.40	0
		3	0	20.64	20.65	20.56	0
		3	1	20.56	20.44	20.37	0
		3	3	20.52	20.42	20.49	0
		6	0	20.70	20.71	20.59	0
1.4M	64QAM	1	0	20.73	20.56	20.57	0
		1	2	20.69	20.59	20.61	0
		1	5	20.70	20.58	20.54	0
		3	0	20.66	20.64	20.47	0
		3	1	20.59	20.52	20.49	0
		3	3	20.57	20.48	20.42	0
		6	0	20.68	20.51	20.52	0
1.4M	256QAM	1	0	19.13	18.95	18.95	0
		1	2	18.96	18.88	18.78	0
		1	5	18.96	18.89	18.72	0
		3	0	18.99	18.89	18.84	0
		3	1	18.90	18.81	18.85	0
		3	3	18.96	18.73	18.71	0
		6	0	18.94	18.86	18.82	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	13.87	13.72	13.84	0
		1	50	13.79	13.64	13.76	0
		1	99	13.72	13.57	13.69	0
		50	0	13.70	13.55	13.67	0
		50	25	13.66	13.51	13.63	0
		50	50	13.56	13.41	13.53	0
		100	0	13.67	13.52	13.64	0
20M	16QAM	1	0	13.82	13.67	13.79	0
		1	50	13.77	13.62	13.74	0
		1	99	13.76	13.61	13.73	0
		50	0	13.80	13.65	13.77	0
		50	25	13.76	13.61	13.73	0
		50	50	13.75	13.60	13.72	0
		100	0	13.81	13.66	13.78	0
20M	64QAM	1	0	13.74	13.59	13.71	0
		1	50	13.73	13.58	13.70	0
		1	99	13.75	13.60	13.72	0
		50	0	13.77	13.62	13.74	0
		50	25	13.75	13.60	13.72	0
		50	50	13.72	13.57	13.69	0
		100	0	13.70	13.55	13.67	0
20M	256QAM	1	0	13.70	13.55	13.67	0
		1	50	13.73	13.58	13.70	0
		1	99	13.75	13.60	13.72	0
		50	0	13.69	13.54	13.66	0
		50	25	13.69	13.54	13.66	0
		50	50	13.63	13.48	13.60	0
		100	0	13.66	13.51	13.63	0
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	13.80	13.67	13.82	0
		1	37	13.79	13.54	13.76	0
		1	74	13.72	13.48	13.64	0
		36	0	13.62	13.53	13.64	0
		36	19	13.64	13.49	13.57	0
		36	39	13.46	13.33	13.43	0
		75	0	13.64	13.43	13.60	0
15M	16QAM	1	0	13.81	13.62	13.74	0
		1	37	13.77	13.54	13.73	0
		1	74	13.75	13.59	13.67	0
		36	0	13.73	13.55	13.74	0
		36	19	13.67	13.52	13.68	0
		36	39	13.65	13.59	13.62	0
		75	0	13.71	13.66	13.74	0
15M	64QAM	1	0	13.69	13.59	13.62	0
		1	37	13.67	13.52	13.66	0
		1	74	13.75	13.58	13.70	0
		36	0	13.76	13.53	13.67	0
		36	19	13.73	13.56	13.69	0
		36	39	13.69	13.48	13.67	0
		75	0	13.62	13.53	13.58	0
15M	256QAM	1	0	13.69	13.46	13.61	0
		1	37	13.66	13.53	13.63	0
		1	74	13.75	13.60	13.67	0
		36	0	13.62	13.51	13.61	0
		36	19	13.64	13.49	13.62	0
		36	39	13.54	13.41	13.53	0
		75	0	13.66	13.42	13.57	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	13.79	13.66	13.83	0
		1	24	13.78	13.59	13.68	0
		1	49	13.72	13.54	13.61	0
		25	0	13.65	13.53	13.62	0
		25	12	13.63	13.48	13.54	0
		25	25	13.48	13.36	13.47	0
		50	0	13.67	13.49	13.63	0
10M	16QAM	1	0	13.82	13.58	13.70	0
		1	24	13.69	13.58	13.72	0
		1	49	13.73	13.60	13.73	0
		25	0	13.73	13.63	13.69	0
		25	12	13.71	13.52	13.71	0
		25	25	13.69	13.52	13.70	0
		50	0	13.78	13.65	13.68	0
10M	64QAM	1	0	13.66	13.53	13.62	0
		1	24	13.64	13.48	13.65	0
		1	49	13.74	13.53	13.70	0
		25	0	13.69	13.56	13.74	0
		25	12	13.66	13.54	13.65	0
		25	25	13.68	13.49	13.62	0
		50	0	13.66	13.54	13.63	0
10M	256QAM	1	0	13.63	13.55	13.64	0
		1	24	13.64	13.49	13.64	0
		1	49	13.66	13.59	13.62	0
		25	0	13.64	13.51	13.59	0
		25	12	13.66	13.44	13.66	0
		25	25	13.54	13.41	13.51	0
		50	0	13.65	13.49	13.63	0
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	13.78	13.71	13.80	0
		1	12	13.78	13.62	13.74	0
		1	24	13.62	13.48	13.60	0
		12	0	13.64	13.48	13.61	0
		12	6	13.57	13.51	13.61	0
		12	13	13.47	13.33	13.45	0
		25	0	13.57	13.47	13.59	0
5M	16QAM	1	0	13.81	13.58	13.70	0
		1	12	13.67	13.53	13.64	0
		1	24	13.69	13.56	13.69	0
		12	0	13.72	13.62	13.76	0
		12	6	13.75	13.55	13.72	0
		12	13	13.68	13.52	13.69	0
		25	0	13.74	13.59	13.76	0
5M	64QAM	1	0	13.70	13.58	13.70	0
		1	12	13.69	13.55	13.60	0
		1	24	13.72	13.58	13.66	0
		12	0	13.77	13.52	13.73	0
		12	6	13.69	13.55	13.62	0
		12	13	13.67	13.56	13.67	0
		25	0	13.67	13.55	13.61	0
5M	256QAM	1	0	13.61	13.55	13.65	0
		1	12	13.73	13.56	13.66	0
		1	24	13.75	13.58	13.63	0
		12	0	13.59	13.50	13.58	0
		12	6	13.63	13.46	13.59	0
		12	13	13.60	13.39	13.59	0
		25	0	13.58	13.41	13.53	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	13.84	13.65	13.79	0
		1	7	13.74	13.60	13.69	0
		1	14	13.72	13.53	13.66	0
		8	0	13.60	13.55	13.67	0
		8	3	13.59	13.47	13.54	0
		8	7	13.55	13.36	13.50	0
		15	0	13.64	13.48	13.56	0
3M	16QAM	1	0	13.76	13.64	13.70	0
		1	7	13.72	13.59	13.64	0
		1	14	13.69	13.55	13.68	0
		8	0	13.80	13.62	13.72	0
		8	3	13.74	13.59	13.67	0
		8	7	13.69	13.56	13.68	0
		15	0	13.75	13.59	13.69	0
3M	64QAM	1	0	13.69	13.53	13.64	0
		1	7	13.65	13.57	13.68	0
		1	14	13.75	13.55	13.63	0
		8	0	13.72	13.59	13.71	0
		8	3	13.70	13.51	13.66	0
		8	7	13.62	13.56	13.63	0
		15	0	13.65	13.55	13.62	0
3M	256QAM	1	0	13.69	13.45	13.64	0
		1	7	13.65	13.51	13.61	0
		1	14	13.75	13.59	13.70	0
		8	0	13.67	13.51	13.56	0
		8	3	13.66	13.53	13.63	0
		8	7	13.58	13.44	13.50	0
		15	0	13.56	13.50	13.61	0
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	13.85	13.64	13.75	0
		1	2	13.76	13.56	13.73	0
		1	5	13.64	13.57	13.69	0
		3	0	13.60	13.54	13.66	0
		3	1	13.57	13.51	13.60	0
		3	3	13.46	13.36	13.49	0
		6	0	13.63	13.49	13.58	0
1.4M	16QAM	1	0	13.82	13.60	13.77	0
		1	2	13.77	13.56	13.68	0
		1	5	13.69	13.59	13.66	0
		3	0	13.77	13.56	13.72	0
		3	1	13.69	13.52	13.68	0
		3	3	13.68	13.58	13.69	0
		6	0	13.76	13.61	13.68	0
1.4M	64QAM	1	0	13.69	13.55	13.61	0
		1	2	13.71	13.48	13.67	0
		1	5	13.69	13.51	13.64	0
		3	0	13.73	13.55	13.64	0
		3	1	13.66	13.58	13.68	0
		3	3	13.70	13.49	13.63	0
		6	0	13.65	13.55	13.65	0
1.4M	256QAM	1	0	13.66	13.54	13.63	0
		1	2	13.72	13.49	13.69	0
		1	5	13.71	13.56	13.69	0
		3	0	13.59	13.44	13.63	0
		3	1	13.65	13.46	13.60	0
		3	3	13.56	13.41	13.59	0
		6	0	13.56	13.51	13.57	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	10.89	10.78	10.74	0
		1	50	10.82	10.71	10.67	0
		1	99	10.79	10.68	10.64	0
		50	0	10.83	10.72	10.68	0
		50	25	10.81	10.70	10.66	0
		50	50	10.80	10.69	10.65	0
		100	0	10.81	10.70	10.66	0
20M	16QAM	1	0	10.85	10.74	10.70	0
		1	50	10.83	10.72	10.68	0
		1	99	10.81	10.70	10.66	0
		50	0	10.86	10.75	10.71	0
		50	25	10.85	10.74	10.70	0
		50	50	10.84	10.73	10.69	0
		100	0	10.84	10.73	10.69	0
20M	64QAM	1	0	10.87	10.76	10.72	0
		1	50	10.85	10.74	10.70	0
		1	99	10.84	10.73	10.69	0
		50	0	10.84	10.73	10.69	0
		50	25	10.83	10.72	10.68	0
		50	50	10.80	10.69	10.65	0
		100	0	10.82	10.71	10.67	0
20M	256QAM	1	0	10.85	10.74	10.70	0
		1	50	10.82	10.71	10.67	0
		1	99	10.81	10.70	10.66	0
		50	0	10.84	10.73	10.69	0
		50	25	10.82	10.71	10.67	0
		50	50	10.80	10.69	10.65	0
		100	0	10.83	10.72	10.68	0
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	10.81	10.74	10.64	0
		1	37	10.78	10.64	10.58	0
		1	74	10.75	10.58	10.63	0
		36	0	10.77	10.65	10.59	0
		36	19	10.77	10.70	10.58	0
		36	39	10.76	10.62	10.59	0
		75	0	10.74	10.66	10.58	0
15M	16QAM	1	0	10.75	10.74	10.63	0
		1	37	10.80	10.68	10.60	0
		1	74	10.75	10.64	10.62	0
		36	0	10.79	10.71	10.68	0
		36	19	10.78	10.71	10.61	0
		36	39	10.84	10.68	10.62	0
		75	0	10.79	10.63	10.67	0
15M	64QAM	1	0	10.83	10.66	10.69	0
		1	37	10.84	10.70	10.62	0
		1	74	10.84	10.70	10.67	0
		36	0	10.79	10.71	10.60	0
		36	19	10.73	10.72	10.67	0
		36	39	10.80	10.66	10.65	0
		75	0	10.75	10.67	10.58	0
15M	256QAM	1	0	10.78	10.72	10.70	0
		1	37	10.72	10.67	10.60	0
		1	74	10.79	10.66	10.63	0
		36	0	10.83	10.67	10.60	0
		36	19	10.80	10.70	10.66	0
		36	39	10.74	10.64	10.65	0
		75	0	10.73	10.68	10.63	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	10.87	10.77	10.74	0
		1	24	10.79	10.66	10.67	0
		1	49	10.71	10.58	10.61	0
		25	0	10.78	10.67	10.64	0
		25	12	10.72	10.66	10.61	0
		25	25	10.76	10.66	10.57	0
		50	0	10.73	10.65	10.61	0
10M	16QAM	1	0	10.81	10.74	10.65	0
		1	24	10.77	10.63	10.65	0
		1	49	10.79	10.66	10.57	0
		25	0	10.79	10.70	10.61	0
		25	12	10.85	10.64	10.68	0
		25	25	10.74	10.71	10.59	0
		50	0	10.82	10.68	10.59	0
10M	64QAM	1	0	10.87	10.69	10.70	0
		1	24	10.85	10.66	10.64	0
		1	49	10.79	10.65	10.65	0
		25	0	10.77	10.73	10.59	0
		25	12	10.76	10.67	10.62	0
		25	25	10.76	10.60	10.57	0
		50	0	10.81	10.63	10.63	0
10M	256QAM	1	0	10.85	10.64	10.70	0
		1	24	10.80	10.64	10.60	0
		1	49	10.75	10.62	10.61	0
		25	0	10.80	10.70	10.61	0
		25	12	10.79	10.70	10.65	0
		25	25	10.73	10.67	10.58	0
		50	0	10.80	10.70	10.62	0
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	10.89	10.75	10.64	0
		1	12	10.77	10.63	10.63	0
		1	24	10.72	10.66	10.63	0
		12	0	10.76	10.71	10.63	0
		12	6	10.79	10.67	10.61	0
		12	13	10.78	10.64	10.63	0
		25	0	10.77	10.68	10.61	0
5M	16QAM	1	0	10.81	10.67	10.70	0
		1	12	10.76	10.68	10.65	0
		1	24	10.72	10.67	10.66	0
		12	0	10.83	10.65	10.68	0
		12	6	10.81	10.74	10.66	0
		12	13	10.81	10.69	10.68	0
		25	0	10.84	10.71	10.59	0
5M	64QAM	1	0	10.85	10.66	10.70	0
		1	12	10.78	10.69	10.65	0
		1	24	10.78	10.72	10.63	0
		12	0	10.75	10.72	10.66	0
		12	6	10.75	10.68	10.63	0
		12	13	10.77	10.69	10.64	0
		25	0	10.76	10.63	10.67	0
5M	256QAM	1	0	10.78	10.73	10.65	0
		1	12	10.77	10.63	10.66	0
		1	24	10.76	10.69	10.62	0
		12	0	10.81	10.68	10.67	0
		12	6	10.73	10.63	10.64	0
		12	13	10.76	10.63	10.58	0
		25	0	10.74	10.64	10.61	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 42							
BW	MCS Index	RB Size	RB Offset	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		43190	43340	43490	
		Frequency (MHz)		3560	3575	3590	
20M	QPSK	1	0	7.97	7.95	7.96	0
		1	50	7.95	7.93	7.94	0
		1	99	7.86	7.84	7.85	0
		50	0	7.94	7.92	7.93	0
		50	25	7.88	7.86	7.87	0
		50	50	7.87	7.85	7.86	0
		100	0	7.89	7.87	7.88	0
20M	16QAM	1	0	7.92	7.90	7.91	0
		1	50	7.91	7.89	7.90	0
		1	99	7.87	7.85	7.86	0
		50	0	7.90	7.88	7.89	0
		50	25	7.82	7.80	7.81	0
		50	50	7.85	7.83	7.84	0
		100	0	7.88	7.86	7.87	0
20M	64QAM	1	0	7.95	7.93	7.94	0
		1	50	7.91	7.89	7.90	0
		1	99	7.87	7.85	7.86	0
		50	0	7.91	7.89	7.90	0
		50	25	7.88	7.86	7.87	0
		50	50	7.84	7.82	7.83	0
		100	0	7.87	7.85	7.86	0
20M	256QAM	1	0	7.94	7.92	7.93	0
		1	50	7.92	7.90	7.91	0
		1	99	7.87	7.85	7.86	0
		50	0	7.92	7.90	7.91	0
		50	25	7.91	7.89	7.90	0
		50	50	7.89	7.87	7.88	0
		100	0	7.90	7.88	7.89	0
BW	MCS Index	Channel		43165	43340	43515	3GPP MPR
		Frequency (MHz)		3557.5	3575	3592.5	
15M	QPSK	1	0	7.95	7.91	7.89	0
		1	37	7.87	7.91	7.86	0
		1	74	7.81	7.82	7.83	0
		36	0	7.89	7.85	7.89	0
		36	19	7.84	7.86	7.77	0
		36	39	7.84	7.84	7.77	0
		75	0	7.80	7.87	7.78	0
15M	16QAM	1	0	7.90	7.83	7.85	0
		1	37	7.85	7.81	7.83	0
		1	74	7.82	7.76	7.79	0
		36	0	7.80	7.84	7.88	0
		36	19	7.82	7.72	7.78	0
		36	39	7.79	7.78	7.83	0
		75	0	7.80	7.78	7.82	0
15M	64QAM	1	0	7.88	7.87	7.85	0
		1	37	7.87	7.89	7.83	0
		1	74	7.82	7.78	7.76	0
		36	0	7.82	7.87	7.87	0
		36	19	7.81	7.83	7.78	0
		36	39	7.80	7.74	7.80	0
		75	0	7.87	7.76	7.82	0
15M	256QAM	1	0	7.91	7.82	7.87	0
		1	37	7.84	7.88	7.89	0
		1	74	7.82	7.82	7.85	0
		36	0	7.92	7.82	7.89	0
		36	19	7.85	7.87	7.86	0
		36	39	7.85	7.78	7.79	0
		75	0	7.88	7.80	7.88	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 42							
BW	MCS Index	Channel		43140	43340	43540	3GPP MPR
		Frequency (MHz)		3555	3575	3595	
10M	QPSK	1	0	7.87	7.92	7.86	0
		1	24	7.89	7.87	7.93	0
		1	49	7.81	7.82	7.77	0
		25	0	7.88	7.88	7.90	0
		25	12	7.81	7.82	7.87	0
		25	25	7.82	7.84	7.83	0
		50	0	7.81	7.82	7.87	0
10M	16QAM	1	0	7.88	7.86	7.88	0
		1	24	7.91	7.80	7.82	0
		1	49	7.86	7.79	7.78	0
		25	0	7.90	7.88	7.82	0
		25	12	7.78	7.76	7.80	0
		25	25	7.84	7.76	7.78	0
		50	0	7.82	7.81	7.79	0
10M	64QAM	1	0	7.92	7.83	7.93	0
		1	24	7.89	7.89	7.84	0
		1	49	7.77	7.76	7.86	0
		25	0	7.89	7.82	7.83	0
		25	12	7.79	7.86	7.82	0
		25	25	7.83	7.74	7.73	0
		50	0	7.84	7.79	7.85	0
10M	256QAM	1	0	7.94	7.87	7.90	0
		1	24	7.86	7.80	7.81	0
		1	49	7.87	7.84	7.77	0
		25	0	7.89	7.89	7.83	0
		25	12	7.84	7.82	7.85	0
		25	25	7.87	7.80	7.78	0
		50	0	7.83	7.80	7.89	0
BW	MCS Index	Channel		43115	43340	43565	3GPP MPR
		Frequency (MHz)		3552.5	3575	3597.5	
5M	QPSK	1	0	7.95	7.86	7.90	0
		1	12	7.88	7.87	7.88	0
		1	24	7.85	7.79	7.77	0
		12	0	7.90	7.85	7.86	0
		12	6	7.85	7.81	7.81	0
		12	13	7.81	7.79	7.82	0
		25	0	7.86	7.86	7.87	0
5M	16QAM	1	0	7.85	7.87	7.82	0
		1	12	7.87	7.82	7.87	0
		1	24	7.82	7.82	7.83	0
		12	0	7.83	7.78	7.87	0
		12	6	7.74	7.71	7.71	0
		12	13	7.75	7.74	7.80	0
		25	0	7.80	7.83	7.85	0
5M	64QAM	1	0	7.90	7.93	7.84	0
		1	12	7.85	7.88	7.88	0
		1	24	7.80	7.79	7.77	0
		12	0	7.84	7.85	7.87	0
		12	6	7.84	7.81	7.86	0
		12	13	7.84	7.81	7.79	0
		25	0	7.83	7.81	7.81	0
5M	256QAM	1	0	7.93	7.89	7.92	0
		1	12	7.86	7.82	7.90	0
		1	24	7.86	7.78	7.86	0
		12	0	7.91	7.81	7.89	0
		12	6	7.91	7.83	7.87	0
		12	13	7.88	7.84	7.80	0
		25	0	7.88	7.84	7.87	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	8.07	8.15	8.27	8.34	0
		1	50	8.04	8.12	8.24	8.31	0
		1	99	7.99	8.07	8.19	8.26	0
		50	0	8.00	8.08	8.20	8.27	0
		50	25	7.98	8.06	8.18	8.25	0
		50	50	7.95	8.03	8.15	8.22	0
		100	0	7.98	8.06	8.18	8.25	0
20M	16QAM	1	0	8.04	8.12	8.24	8.31	0
		1	50	7.97	8.05	8.17	8.24	0
		1	99	8.01	8.09	8.21	8.28	0
		50	0	8.00	8.08	8.20	8.27	0
		50	25	7.96	8.04	8.16	8.23	0
		50	50	7.94	8.02	8.14	8.21	0
		100	0	8.00	8.08	8.20	8.27	0
20M	64QAM	1	0	7.97	8.05	8.17	8.24	0
		1	50	7.94	8.02	8.14	8.21	0
		1	99	7.92	8.00	8.12	8.19	0
		50	0	7.97	8.05	8.17	8.24	0
		50	25	7.93	8.01	8.13	8.20	0
		50	50	7.90	7.98	8.10	8.17	0
		100	0	7.94	8.02	8.14	8.21	0
20M	256QAM	1	0	7.89	7.97	8.09	8.16	0
		1	50	7.87	7.95	8.07	8.14	0
		1	99	7.85	7.93	8.05	8.12	0
		50	0	8.00	8.08	8.20	8.27	0
		50	25	7.97	8.05	8.17	8.24	0
		50	50	7.94	8.02	8.14	8.21	0
		100	0	7.97	8.05	8.17	8.24	0
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	8.06	8.13	8.21	8.32	0
		1	37	7.95	8.08	8.19	8.26	0
		1	74	7.96	8.07	8.16	8.17	0
		36	0	7.91	8.02	8.17	8.22	0
		36	19	7.89	8.00	8.18	8.22	0
		36	39	7.91	8.03	8.05	8.13	0
		75	0	7.94	8.05	8.18	8.16	0
15M	16QAM	1	0	8.01	8.08	8.15	8.25	0
		1	37	7.91	7.96	8.14	8.20	0
		1	74	7.97	8.04	8.17	8.28	0
		36	0	7.95	8.08	8.18	8.21	0
		36	19	7.89	7.96	8.10	8.13	0
		36	39	7.88	8.00	8.11	8.13	0
		75	0	7.94	7.98	8.16	8.17	0
15M	64QAM	1	0	7.94	8.01	8.16	8.17	0
		1	37	7.84	7.97	8.12	8.13	0
		1	74	7.90	7.93	8.02	8.15	0
		36	0	7.87	8.02	8.16	8.22	0
		36	19	7.86	7.99	8.05	8.17	0
		36	39	7.89	7.94	8.06	8.09	0
		75	0	7.89	7.93	8.06	8.19	0
15M	256QAM	1	0	7.85	7.92	8.02	8.12	0
		1	37	7.79	7.87	7.98	8.06	0
		1	74	7.85	7.90	7.98	8.05	0
		36	0	7.91	8.05	8.15	8.22	0
		36	19	7.96	8.01	8.09	8.19	0
		36	39	7.86	7.96	8.10	8.14	0
		75	0	7.90	8.04	8.17	8.14	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	8.01	8.09	8.26	8.29	0
		1	24	7.99	8.06	8.21	8.31	0
		1	49	7.93	8.05	8.14	8.17	0
		25	0	7.98	8.03	8.10	8.22	0
		25	12	7.92	7.98	8.09	8.23	0
		25	25	7.90	7.95	8.09	8.16	0
		50	0	7.89	8.03	8.17	8.16	0
10M	16QAM	1	0	7.97	8.06	8.17	8.26	0
		1	24	7.91	7.96	8.15	8.14	0
		1	49	7.96	8.06	8.15	8.26	0
		25	0	7.93	8.05	8.19	8.23	0
		25	12	7.92	7.95	8.15	8.16	0
		25	25	7.94	7.99	8.09	8.16	0
		50	0	7.98	8.08	8.20	8.20	0
10M	64QAM	1	0	7.90	7.97	8.11	8.14	0
		1	24	7.89	7.98	8.08	8.20	0
		1	49	7.88	7.90	8.10	8.09	0
		25	0	7.92	7.95	8.17	8.23	0
		25	12	7.85	7.98	8.05	8.11	0
		25	25	7.80	7.89	8.04	8.07	0
		50	0	7.94	7.94	8.06	8.19	0
10M	256QAM	1	0	7.87	7.96	8.03	8.07	0
		1	24	7.85	7.88	8.04	8.05	0
		1	49	7.76	7.85	8.00	8.08	0
		25	0	7.92	8.07	8.17	8.19	0
		25	12	7.90	8.01	8.15	8.19	0
		25	25	7.92	7.98	8.14	8.20	0
		50	0	7.95	8.04	8.14	8.23	0
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	7.99	8.08	8.25	8.26	0
		1	12	8.04	8.08	8.23	8.26	0
		1	24	7.96	8.01	8.11	8.22	0
		12	0	7.96	8.02	8.18	8.24	0
		12	6	7.91	8.06	8.09	8.18	0
		12	13	7.94	7.98	8.09	8.18	0
		25	0	7.95	8.02	8.11	8.19	0
5M	16QAM	1	0	8.04	8.08	8.21	8.24	0
		1	12	7.93	8.01	8.13	8.18	0
		1	24	7.92	8.06	8.12	8.21	0
		12	0	7.96	8.00	8.18	8.26	0
		12	6	7.91	8.02	8.12	8.22	0
		12	13	7.89	7.92	8.09	8.21	0
		25	0	7.96	8.07	8.14	8.24	0
5M	64QAM	1	0	7.94	7.98	8.10	8.14	0
		1	12	7.85	7.96	8.13	8.17	0
		1	24	7.91	7.91	8.11	8.12	0
		12	0	7.91	8.03	8.15	8.15	0
		12	6	7.92	7.92	8.07	8.18	0
		12	13	7.84	7.97	8.00	8.10	0
		25	0	7.84	7.96	8.09	8.18	0
5M	256QAM	1	0	7.89	7.95	8.00	8.06	0
		1	12	7.82	7.89	8.04	8.11	0
		1	24	7.85	7.86	8.01	8.10	0
		12	0	7.95	8.04	8.13	8.21	0
		12	6	7.95	7.96	8.07	8.15	0
		12	13	7.92	8.02	8.06	8.15	0
		25	0	7.95	8.05	8.08	8.23	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	14.32	14.12	14.21	0
		1	50	14.21	14.01	14.10	0
		1	99	14.24	14.04	14.13	0
		50	0	14.28	14.08	14.17	0
		50	25	14.24	14.04	14.13	0
		50	50	14.21	14.01	14.10	0
		100	0	14.23	14.03	14.12	0
20M	16QAM	1	0	14.26	14.06	14.15	0
		1	50	14.23	14.03	14.12	0
		1	99	14.19	13.99	14.08	0
		50	0	14.22	14.02	14.11	0
		50	25	14.21	14.01	14.10	0
		50	50	14.20	14.00	14.09	0
		100	0	14.25	14.05	14.14	0
20M	64QAM	1	0	14.27	14.07	14.16	0
		1	50	14.25	14.05	14.14	0
		1	99	14.22	14.02	14.11	0
		50	0	14.26	14.06	14.15	0
		50	25	14.20	14.00	14.09	0
		50	50	14.18	13.98	14.07	0
		100	0	14.23	14.03	14.12	0
20M	256QAM	1	0	14.25	14.05	14.14	0
		1	50	14.22	14.02	14.11	0
		1	99	14.17	13.97	14.06	0
		50	0	14.21	14.01	14.10	0
		50	25	14.20	14.00	14.09	0
		50	50	14.15	13.95	14.04	0
		100	0	14.22	14.02	14.11	0
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	14.29	14.11	14.20	0
		1	37	14.20	13.97	14.07	0
		1	74	14.18	13.97	14.10	0
		36	0	14.21	14.01	14.14	0
		36	19	14.24	13.97	14.11	0
		36	39	14.12	13.94	14.03	0
		75	0	14.23	14.03	14.09	0
15M	16QAM	1	0	14.25	14.00	14.05	0
		1	37	14.17	14.02	14.04	0
		1	74	14.15	13.99	14.02	0
		36	0	14.20	13.95	14.05	0
		36	19	14.21	13.98	14.01	0
		36	39	14.18	13.99	14.04	0
		75	0	14.25	14.05	14.13	0
15M	64QAM	1	0	14.27	13.97	14.13	0
		1	37	14.15	14.00	14.06	0
		1	74	14.18	13.97	14.07	0
		36	0	14.26	14.06	14.07	0
		36	19	14.14	13.91	14.04	0
		36	39	14.13	13.98	14.04	0
		75	0	14.15	14.02	14.06	0
15M	256QAM	1	0	14.23	14.02	14.05	0
		1	37	14.19	13.99	14.04	0
		1	74	14.13	13.89	14.06	0
		36	0	14.17	13.92	14.05	0
		36	19	14.13	14.00	13.99	0
		36	39	14.12	13.87	13.95	0
		75	0	14.17	13.94	14.08	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	14.31	14.07	14.20	0
		1	24	14.18	13.91	14.00	0
		1	49	14.23	13.97	14.07	0
		25	0	14.21	14.00	14.07	0
		25	12	14.15	14.04	14.05	0
		25	25	14.14	13.92	14.02	0
		50	0	14.21	14.00	14.07	0
10M	16QAM	1	0	14.16	14.06	14.13	0
		1	24	14.16	13.98	14.11	0
		1	49	14.12	13.97	14.03	0
		25	0	14.21	13.96	14.03	0
		25	12	14.18	13.99	14.04	0
		25	25	14.18	13.97	14.01	0
		50	0	14.24	13.96	14.11	0
10M	64QAM	1	0	14.27	14.02	14.06	0
		1	24	14.21	14.01	14.07	0
		1	49	14.22	13.93	14.09	0
		25	0	14.26	13.97	14.07	0
		25	12	14.10	13.90	14.00	0
		25	25	14.17	13.94	14.00	0
		50	0	14.23	14.00	14.04	0
10M	256QAM	1	0	14.19	13.96	14.12	0
		1	24	14.19	13.93	14.03	0
		1	49	14.11	13.96	13.96	0
		25	0	14.15	13.94	14.08	0
		25	12	14.11	13.96	14.09	0
		25	25	14.13	13.90	13.99	0
		50	0	14.19	13.93	14.04	0
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	14.29	14.06	14.16	0
		1	12	14.13	13.91	14.05	0
		1	24	14.18	14.01	14.10	0
		12	0	14.21	14.01	14.12	0
		12	6	14.17	13.95	14.08	0
		12	13	14.11	13.98	14.06	0
		25	0	14.23	14.02	14.09	0
5M	16QAM	1	0	14.25	14.05	14.09	0
		1	12	14.14	13.97	14.09	0
		1	24	14.16	13.91	14.00	0
		12	0	14.22	13.93	14.07	0
		12	6	14.14	13.91	14.00	0
		12	13	14.20	13.91	14.06	0
		25	0	14.23	14.00	14.09	0
5M	64QAM	1	0	14.18	14.02	14.12	0
		1	12	14.17	14.03	14.06	0
		1	24	14.15	13.95	14.07	0
		12	0	14.20	14.03	14.07	0
		12	6	14.18	13.99	14.05	0
		12	13	14.12	13.95	14.02	0
		25	0	14.22	14.01	14.03	0
5M	256QAM	1	0	14.18	14.02	14.05	0
		1	12	14.15	13.93	14.04	0
		1	24	14.15	13.91	14.04	0
		12	0	14.17	13.95	14.01	0
		12	6	14.16	13.99	14.00	0
		12	13	14.11	13.92	14.01	0
		25	0	14.16	13.95	14.02	0

LTE Conducted Power (P-Sensor_On_Ant2_Tablet)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	14.24	14.10	14.11	0
		1	7	14.12	13.97	14.05	0
		1	14	14.18	13.96	14.08	0
		8	0	14.26	13.99	14.15	0
		8	3	14.23	13.96	14.13	0
		8	7	14.20	13.97	14.00	0
		15	0	14.17	13.98	14.09	0
3M	16QAM	1	0	14.25	13.98	14.06	0
		1	7	14.21	13.98	14.07	0
		1	14	14.11	13.96	14.00	0
		8	0	14.12	13.97	14.01	0
		8	3	14.13	13.97	14.00	0
		8	7	14.18	13.99	14.07	0
		15	0	14.23	13.96	14.13	0
3M	64QAM	1	0	14.19	14.02	14.06	0
		1	7	14.23	13.95	14.04	0
		1	14	14.17	14.00	14.10	0
		8	0	14.26	13.99	14.08	0
		8	3	14.12	14.00	14.08	0
		8	7	14.13	13.89	14.06	0
		15	0	14.20	14.00	14.04	0
3M	256QAM	1	0	14.22	14.04	14.07	0
		1	7	14.19	13.96	14.09	0
		1	14	14.09	13.93	13.98	0
		8	0	14.21	13.99	14.03	0
		8	3	14.16	14.00	14.05	0
		8	7	14.08	13.88	13.96	0
		15	0	14.15	13.93	14.07	0
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	14.29	14.09	14.12	0
		1	2	14.20	14.00	14.03	0
		1	5	14.15	14.02	14.07	0
		3	0	14.27	14.06	14.14	0
		3	1	14.16	13.98	14.11	0
		3	3	14.17	13.94	14.03	0
		6	0	14.15	14.01	14.03	0
1.4M	16QAM	1	0	14.19	13.97	14.06	0
		1	2	14.22	13.99	14.10	0
		1	5	14.17	13.96	14.06	0
		3	0	14.15	14.00	14.09	0
		3	1	14.17	13.95	14.06	0
		3	3	14.15	13.94	14.07	0
		6	0	14.17	13.95	14.07	0
1.4M	64QAM	1	0	14.25	13.99	14.10	0
		1	2	14.18	13.98	14.06	0
		1	5	14.21	13.99	14.03	0
		3	0	14.24	14.06	14.09	0
		3	1	14.12	13.92	14.00	0
		3	3	14.10	13.94	13.98	0
		6	0	14.19	13.97	14.06	0
1.4M	256QAM	1	0	14.25	14.04	14.04	0
		1	2	14.17	14.00	14.04	0
		1	5	14.10	13.95	14.02	0
		3	0	14.18	13.95	14.10	0
		3	1	14.20	13.99	14.06	0
		3	3	14.12	13.92	14.00	0
		6	0	14.20	13.94	14.04	0

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	23.54	23.51	23.43	0
		1	50	23.40	23.37	23.29	0
		1	99	23.32	23.29	23.21	0
		50	0	22.43	22.40	22.32	1
		50	25	22.38	22.35	22.27	1
		50	50	22.33	22.30	22.22	1
		100	0	22.30	22.27	22.19	1
20M	16QAM	1	0	22.67	22.64	22.56	1
		1	50	22.60	22.57	22.49	1
		1	99	22.54	22.51	22.43	1
		50	0	21.41	21.38	21.30	2
		50	25	21.35	21.32	21.24	2
		50	50	21.31	21.28	21.20	2
		100	0	21.25	21.22	21.14	2
20M	64QAM	1	0	21.47	21.44	21.36	2
		1	50	21.43	21.40	21.32	2
		1	99	21.38	21.35	21.27	2
		50	0	20.44	20.41	20.33	3
		50	25	20.39	20.36	20.28	3
		50	50	20.36	20.33	20.25	3
		100	0	20.33	20.30	20.22	3
20M	256QAM	1	0	18.59	18.55	18.42	5
		1	50	18.53	18.47	18.34	5
		1	99	18.47	18.37	18.37	5
		50	0	18.38	18.38	18.28	5
		50	25	18.40	18.30	18.29	5
		50	50	18.34	18.33	18.16	5
		100	0	18.26	18.25	18.22	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	23.48	23.45	23.40	0
		1	37	23.34	23.29	23.21	0
		1	74	23.30	23.22	23.11	0
		36	0	23.35	23.36	23.31	1
		36	19	23.37	23.26	23.18	1
		36	39	23.28	23.24	23.19	1
		75	0	23.24	23.20	23.19	1
15M	16QAM	1	0	22.62	22.64	22.56	1
		1	37	22.51	22.56	22.46	1
		1	74	22.52	22.41	22.37	1
		36	0	21.34	21.34	21.30	2
		36	19	21.31	21.32	21.14	2
		36	39	21.28	21.25	21.20	2
		75	0	21.24	21.19	21.10	2
15M	64QAM	1	0	21.43	21.38	21.26	2
		1	37	21.38	21.30	21.26	2
		1	74	21.31	21.31	21.24	2
		36	0	20.40	20.37	20.32	3
		36	19	20.30	20.33	20.22	3
		36	39	20.30	20.27	20.17	3
		75	0	20.32	20.29	20.17	3
15M	256QAM	1	0	18.42	18.36	18.44	5
		1	37	18.45	18.42	18.31	5
		1	74	18.39	18.33	18.21	5
		36	0	18.29	18.28	18.29	5
		36	19	18.26	18.32	18.10	5
		36	39	18.29	18.17	18.13	5
		75	0	18.30	18.12	17.98	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		23.45	23.36	23.3	
10M	QPSK	1	0	23.23	23.27	23.18	0
		1	24	23.27	23.17	22.97	0
		1	49	22.41	22.23	22.20	0
		25	0	22.24	22.31	22.12	1
		25	12	22.17	22.15	22.04	1
		25	25	22.19	22.08	22.07	1
		50	0	22.51	22.52	22.41	1
10M	16QAM	1	0	22.55	22.40	22.38	1
		1	24	22.37	22.44	22.33	1
		1	49	21.23	21.32	21.10	1
		25	0	21.20	21.18	21.02	2
		25	12	21.20	21.19	21.06	2
		25	25	21.01	21.11	20.92	2
		50	0	21.31	21.32	21.13	2
10M	64QAM	1	0	21.39	21.35	21.16	2
		1	24	21.32	21.13	21.18	2
		1	49	20.34	20.22	20.14	2
		25	0	20.27	20.30	20.15	3
		25	12	20.13	20.16	20.11	3
		25	25	20.22	20.18	20.13	3
		50	0	21.03	21.18	21.05	3
10M	256QAM	1	0	18.49	18.41	18.40	5
		1	24	18.44	18.45	18.27	5
		1	49	18.35	18.34	18.30	5
		25	0	18.33	18.37	18.21	5
		25	12	18.22	18.26	18.09	5
		25	25	18.21	18.17	18.20	5
		50	0	18.15	18.22	18.04	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	23.43	23.47	23.23	0
		1	12	23.34	23.24	23.24	0
		1	24	23.29	23.08	22.99	0
		12	0	22.35	22.24	22.23	1
		12	6	22.32	22.20	22.03	1
		12	13	22.15	22.16	22.11	1
		25	0	22.12	22.24	22.06	1
5M	16QAM	1	0	22.45	22.48	22.42	1
		1	12	22.52	22.40	22.42	1
		1	24	22.37	22.51	22.23	1
		12	0	21.18	21.21	21.18	2
		12	6	21.19	21.22	21.15	2
		12	13	21.19	21.24	21.10	2
		25	0	21.09	21.10	21.03	2
5M	64QAM	1	0	21.32	21.20	21.26	2
		1	12	21.23	21.24	21.14	2
		1	24	21.24	21.18	21.15	2
		12	0	20.30	20.32	20.24	3
		12	6	20.31	20.26	20.10	3
		12	13	20.16	20.12	20.16	3
		25	0	20.14	20.20	20.04	3
5M	256QAM	1	0	18.50	18.36	18.35	5
		1	12	18.36	18.33	18.26	5
		1	24	18.45	18.33	18.33	5
		12	0	18.26	18.40	18.15	5
		12	6	18.28	18.21	18.19	5
		12	13	18.21	18.18	18.13	5
		25	0	18.29	18.17	18.07	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	23.36	23.42	23.29	0
		1	7	23.29	23.30	23.21	0
		1	14	23.07	23.26	23.00	0
		8	0	22.40	22.21	22.16	1
		8	3	22.33	22.19	22.19	1
		8	7	22.14	22.14	22.12	1
		15	0	22.27	22.13	22.10	1
3M	16QAM	1	0	22.53	22.56	22.55	1
		1	7	22.44	22.49	22.32	1
		1	14	22.35	22.35	22.30	1
		8	0	21.29	21.31	21.08	2
		8	3	21.26	21.29	21.09	2
		8	7	21.22	21.22	21.12	2
		15	0	21.25	21.10	21.04	2
3M	64QAM	1	0	21.43	21.38	21.26	2
		1	7	21.27	21.28	21.21	2
		1	14	21.36	21.10	21.21	2
		8	0	20.34	20.37	20.15	3
		8	3	20.26	20.23	20.18	3
		8	7	20.18	20.09	20.18	3
		15	0	20.22	20.12	20.05	3
3M	256QAM	1	0	18.54	18.45	18.34	5
		1	7	18.41	18.42	18.34	5
		1	14	18.38	18.32	18.22	5
		8	0	18.32	18.25	18.23	5
		8	3	18.19	18.27	18.18	5
		8	7	18.26	18.26	18.09	5
		15	0	18.11	18.13	18.08	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	23.36	23.35	23.40	0
		1	2	23.24	23.36	23.19	0
		1	5	23.15	23.15	23.09	0
		3	0	23.32	23.27	23.21	0
		3	1	23.31	23.27	23.11	0
		3	3	23.18	23.28	23.17	0
		6	0	22.18	22.23	22.03	1
1.4M	16QAM	1	0	22.57	22.52	22.34	1
		1	2	22.37	22.34	22.25	1
		1	5	22.44	22.35	22.29	1
		3	0	22.31	22.23	22.22	1
		3	1	22.18	22.26	22.16	1
		3	3	22.27	22.11	22.02	1
		6	0	21.11	21.14	21.06	2
1.4M	64QAM	1	0	21.34	21.31	21.17	2
		1	2	21.35	21.27	21.23	2
		1	5	21.27	21.25	21.07	2
		3	0	21.35	21.22	21.26	2
		3	1	21.19	21.24	21.16	2
		3	3	21.24	21.13	21.06	2
		6	0	20.29	20.23	20.05	3
1.4M	256QAM	1	0	18.55	18.47	18.42	5
		1	2	18.41	18.41	18.28	5
		1	5	18.36	18.29	18.28	5
		3	0	19.24	19.27	19.29	5
		3	1	19.26	19.25	19.14	5
		3	3	19.26	19.27	19.09	5
		6	0	18.22	18.27	18.00	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	23.35	23.39	23.17	0
		1	50	23.23	23.27	23.05	0
		1	99	23.12	23.16	22.94	0
		50	0	22.29	22.33	22.11	1
		50	25	22.17	22.21	21.99	1
		50	50	22.12	22.16	21.94	1
		100	0	22.07	22.11	21.89	1
20M	16QAM	1	0	22.44	22.48	22.26	1
		1	50	22.39	22.43	22.21	1
		1	99	22.35	22.39	22.17	1
		50	0	21.26	21.30	21.08	2
		50	25	21.20	21.24	21.02	2
		50	50	21.15	21.19	20.97	2
		100	0	21.10	21.14	20.92	2
20M	64QAM	1	0	21.44	21.48	21.26	2
		1	50	21.32	21.36	21.14	2
		1	99	21.25	21.29	21.07	2
		50	0	20.32	20.36	20.14	3
		50	25	20.25	20.29	20.07	3
		50	50	20.18	20.22	20.00	3
		100	0	20.14	20.18	19.96	3
20M	256QAM	1	0	18.34	18.38	18.16	5
		1	50	18.27	18.31	18.09	5
		1	99	18.21	18.25	18.03	5
		50	0	18.16	18.20	17.98	5
		50	25	18.10	18.14	17.92	5
		50	50	18.06	18.10	17.88	5
		100	0	18.01	18.05	17.83	5
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	23.29	23.35	23.16	0
		1	37	23.13	23.26	22.99	0
		1	74	23.12	23.10	22.94	0
		36	0	23.20	23.31	23.04	1
		36	19	23.11	23.16	22.94	1
		36	39	23.09	23.07	22.94	1
		75	0	22.97	23.08	22.83	1
15M	16QAM	1	0	22.36	22.43	22.21	1
		1	37	22.30	22.40	22.17	1
		1	74	22.26	22.35	22.15	1
		36	0	21.17	21.22	21.01	2
		36	19	21.13	21.18	20.96	2
		36	39	21.10	21.12	20.90	2
		75	0	21.04	21.09	20.86	2
15M	64QAM	1	0	21.34	21.40	21.23	2
		1	37	21.31	21.36	21.05	2
		1	74	21.21	21.28	21.02	2
		36	0	20.25	20.27	20.05	3
		36	19	20.18	20.23	20.01	3
		36	39	20.12	20.17	19.91	3
		75	0	20.14	20.10	19.93	3
15M	256QAM	1	0	18.33	18.31	18.10	5
		1	37	18.18	18.27	17.99	5
		1	74	18.11	18.18	17.96	5
		36	0	18.12	18.14	17.94	5
		36	19	18.08	18.09	17.87	5
		36	39	18.03	18.01	17.85	5
		75	0	17.97	17.99	17.73	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	23.33	23.19	23.00	0
		1	24	23.11	23.18	23.05	0
		1	49	23.04	22.99	22.86	0
		25	0	22.18	22.30	21.97	1
		25	12	22.16	22.12	21.87	1
		25	25	21.98	22.06	21.86	1
		50	0	21.95	22.01	21.77	1
10M	16QAM	1	0	22.37	22.34	22.13	1
		1	24	22.27	22.30	22.05	1
		1	49	22.25	22.20	22.01	1
		25	0	21.20	21.15	21.00	2
		25	12	21.01	21.04	20.92	2
		25	25	20.97	21.11	20.91	2
		50	0	20.94	20.99	20.87	2
10M	64QAM	1	0	21.38	21.24	21.06	2
		1	24	21.13	21.16	20.94	2
		1	49	21.09	21.23	20.91	2
		25	0	20.15	20.14	20.01	3
		25	12	20.13	20.11	19.98	3
		25	25	20.15	20.12	19.92	3
		50	0	20.10	20.00	19.86	3
10M	256QAM	1	0	18.19	18.22	18.11	5
		1	24	18.17	18.16	18.08	5
		1	49	18.03	18.12	17.96	5
		25	0	17.93	18.11	17.87	5
		25	12	17.97	17.90	17.78	5
		25	25	17.88	17.94	17.66	5
		50	0	17.84	17.92	17.69	5
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	23.20	23.32	22.86	0
		1	12	23.15	23.21	22.83	0
		1	24	22.94	22.95	22.73	0
		12	0	22.12	22.10	21.92	1
		12	6	22.10	22.14	21.80	1
		12	13	22.02	22.01	21.71	1
		25	0	21.98	22.05	21.64	1
5M	16QAM	1	0	22.38	22.35	22.11	1
		1	12	22.26	22.39	22.11	1
		1	24	22.23	22.32	22.00	1
		12	0	21.19	21.29	20.90	2
		12	6	21.12	21.08	20.83	2
		12	13	20.97	20.97	20.83	2
		25	0	20.96	20.96	20.76	2
5M	64QAM	1	0	21.28	21.27	21.06	2
		1	12	21.14	21.22	21.13	2
		1	24	21.13	21.27	20.95	2
		12	0	20.20	20.11	20.01	3
		12	6	20.04	20.05	19.91	3
		12	13	20.09	20.09	19.87	3
		25	0	20.02	20.16	19.85	3
5M	256QAM	1	0	18.23	18.27	17.99	5
		1	12	18.12	18.26	17.95	5
		1	24	18.02	18.07	17.85	5
		12	0	17.94	18.06	17.88	5
		12	6	17.88	18.01	17.80	5
		12	13	17.91	17.95	17.65	5
		25	0	17.92	17.96	17.78	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	23.27	23.37	23.07	0
		1	7	23.22	23.07	22.84	0
		1	14	23.03	23.09	22.85	0
		8	0	22.11	22.18	22.04	1
		8	3	22.14	22.03	21.78	1
		8	7	22.07	21.99	21.86	1
		15	0	21.97	22.01	21.70	1
3M	16QAM	1	0	22.27	22.34	22.09	1
		1	7	22.33	22.22	22.14	1
		1	14	22.19	22.22	21.95	1
		8	0	21.13	21.12	20.97	2
		8	3	21.02	21.09	20.94	2
		8	7	21.06	21.11	20.93	2
		15	0	20.99	20.97	20.78	2
3M	64QAM	1	0	21.35	21.34	21.01	2
		1	7	21.14	21.22	21.14	2
		1	14	21.17	21.19	20.90	2
		8	0	20.09	20.27	19.97	3
		8	3	20.10	20.24	20.02	3
		8	7	20.13	20.01	19.85	3
		15	0	20.07	20.11	19.89	3
3M	256QAM	1	0	18.14	18.16	17.97	5
		1	7	18.13	18.13	17.92	5
		1	14	18.01	18.15	17.83	5
		8	0	17.92	17.99	17.89	5
		8	3	18.08	18.03	17.79	5
		8	7	17.96	18.00	17.79	5
		15	0	17.91	17.86	17.62	5
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	23.19	23.20	23.04	0
		1	2	22.99	23.18	22.84	0
		1	5	22.98	23.05	22.87	0
		3	0	23.18	23.26	22.89	0
		3	1	23.00	23.07	22.93	0
		3	3	23.00	23.05	22.79	0
		6	0	22.00	22.06	21.67	1
1.4M	16QAM	1	0	22.26	22.41	22.21	1
		1	2	22.32	22.33	22.07	1
		1	5	22.28	22.33	22.10	1
		3	0	22.12	22.15	22.01	1
		3	1	22.01	22.13	21.89	1
		3	3	22.07	22.17	21.94	1
		6	0	21.04	20.96	20.78	2
1.4M	64QAM	1	0	21.28	21.38	21.15	2
		1	2	21.25	21.24	20.95	2
		1	5	21.06	21.25	20.96	2
		3	0	21.27	21.20	21.01	2
		3	1	21.07	21.20	20.94	2
		3	3	21.04	21.05	20.90	2
		6	0	19.92	20.08	19.86	3
1.4M	256QAM	1	0	18.20	18.19	18.01	5
		1	2	18.09	18.10	17.98	5
		1	5	18.06	18.08	17.93	5
		3	0	17.99	18.00	17.91	5
		3	1	18.04	17.94	17.80	5
		3	3	17.97	18.00	17.73	5
		6	0	17.98	17.94	17.62	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	24.04	24.03	23.94	0
		1	24	24.00	23.99	23.90	0
		1	49	23.94	23.93	23.84	0
		25	0	23.15	23.14	23.05	1
		25	12	23.07	23.06	22.97	1
		25	25	23.00	22.99	22.90	1
		50	0	22.93	22.92	22.83	1
10M	16QAM	1	0	23.38	23.37	23.28	1
		1	24	23.30	23.29	23.20	1
		1	49	23.25	23.24	23.15	1
		25	0	22.23	22.22	22.13	2
		25	12	22.16	22.15	22.06	2
		25	25	22.10	22.09	22.00	2
		50	0	22.04	22.03	21.94	2
10M	64QAM	1	0	22.21	22.20	22.11	2
		1	24	22.14	22.13	22.04	2
		1	49	22.07	22.06	21.97	2
		25	0	21.08	21.07	20.98	3
		25	12	21.02	21.01	20.92	3
		25	25	20.95	20.94	20.85	3
		50	0	20.91	20.90	20.81	3
10M	256QAM	1	0	19.13	19.12	19.03	5
		1	24	19.07	19.06	18.97	5
		1	49	19.02	19.01	18.92	5
		25	0	18.97	18.96	18.87	5
		25	12	18.92	18.91	18.82	5
		25	25	18.80	18.79	18.70	5
		50	0	18.75	18.74	18.65	5
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	23.99	23.96	23.90	0
		1	12	23.98	23.90	23.84	0
		1	24	23.90	23.91	23.82	0
		12	0	23.96	23.99	23.99	1
		12	6	23.94	23.98	23.90	1
		12	13	23.91	23.91	23.86	1
		25	0	23.86	23.85	23.75	1
5M	16QAM	1	0	23.34	23.32	23.19	1
		1	12	23.23	23.20	23.18	1
		1	24	23.17	23.15	23.09	1
		12	0	22.14	22.17	22.09	2
		12	6	22.09	22.11	21.99	2
		12	13	22.08	21.99	21.92	2
		25	0	22.01	21.99	21.87	2
5M	64QAM	1	0	22.11	22.10	22.08	2
		1	12	22.04	22.13	21.98	2
		1	24	22.07	22.06	21.88	2
		12	0	21.01	21.04	20.92	3
		12	6	20.97	20.99	20.82	3
		12	13	20.94	20.90	20.76	3
		25	0	20.89	20.85	20.76	3
5M	256QAM	1	0	19.03	19.02	19.03	5
		1	12	19.06	19.04	18.90	5
		1	24	18.96	18.95	18.85	5
		12	0	18.93	18.88	18.78	5
		12	6	18.82	18.91	18.81	5
		12	13	18.78	18.69	18.60	5
		25	0	18.68	18.68	18.59	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	23.85	23.99	23.89	0
		1	7	23.81	23.86	23.87	0
		1	14	23.84	23.89	23.70	0
		8	0	23.04	22.98	22.93	1
		8	3	22.89	22.97	22.81	1
		8	7	22.90	22.93	22.76	1
		15	0	22.87	22.73	22.70	1
3M	16QAM	1	0	23.20	23.31	23.19	1
		1	7	23.29	23.23	23.03	1
		1	14	23.18	23.14	23.02	1
		8	0	22.10	22.21	22.03	2
		8	3	22.10	22.04	21.87	2
		8	7	22.05	21.97	21.94	2
		15	0	21.95	21.85	21.84	2
3M	64QAM	1	0	22.01	22.13	21.89	2
		1	7	21.98	22.04	21.82	2
		1	14	21.95	21.94	21.79	2
		8	0	21.02	20.96	20.89	3
		8	3	20.80	20.81	20.88	3
		8	7	20.76	20.75	20.70	3
		15	0	20.82	20.71	20.69	3
3M	256QAM	1	0	19.08	19.12	19.01	5
		1	7	19.04	18.97	18.93	5
		1	14	18.96	18.96	18.86	5
		8	0	18.93	18.90	18.79	5
		8	3	18.89	18.89	18.74	5
		8	7	18.78	18.69	18.62	5
		15	0	18.67	18.66	18.55	5
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	23.95	23.96	23.81	0
		1	2	23.91	23.91	23.72	0
		1	5	23.79	23.90	23.71	0
		3	0	23.09	22.97	22.84	0
		3	1	22.91	23.01	22.92	0
		3	3	22.95	22.88	22.80	0
		6	0	22.74	22.83	22.66	1
1.4M	16QAM	1	0	23.32	23.19	23.18	1
		1	2	23.08	23.06	23.15	1
		1	5	23.11	23.03	23.13	1
		3	0	22.04	22.12	21.97	1
		3	1	22.00	21.95	21.86	1
		3	3	21.91	22.01	21.90	1
		6	0	22.00	21.96	21.93	2
1.4M	64QAM	1	0	22.10	22.02	21.88	2
		1	2	22.04	21.91	21.88	2
		1	5	21.88	21.87	21.83	2
		3	0	21.03	20.90	20.97	2
		3	1	20.88	20.88	20.78	2
		3	3	20.86	20.88	20.73	2
		6	0	20.79	20.71	20.72	3
1.4M	256QAM	1	0	19.09	19.10	18.98	5
		1	2	18.98	18.98	18.94	5
		1	5	18.97	19.01	18.84	5
		3	0	18.93	18.92	18.86	5
		3	1	18.85	18.86	18.76	5
		3	3	18.76	18.78	18.60	5
		6	0	18.67	18.74	18.56	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.86	23.81	23.84	0
		1	50	23.83	23.79	23.68	0
		1	99	23.71	23.67	23.64	0
		50	0	22.94	22.91	22.90	1
		50	25	22.82	22.80	22.81	1
		50	50	22.83	22.75	22.70	1
		100	0	22.78	22.74	22.67	1
20M	16QAM	1	0	23.13	23.11	23.07	1
		1	50	23.02	22.95	22.94	1
		1	99	22.95	22.94	22.85	1
		50	0	21.92	21.85	21.82	2
		50	25	21.86	21.84	21.79	2
		50	50	21.81	21.74	21.78	2
		100	0	21.75	21.71	21.73	2
20M	64QAM	1	0	21.99	21.99	21.88	2
		1	50	21.95	21.94	21.88	2
		1	99	21.86	21.81	21.82	2
		50	0	20.94	20.86	20.88	3
		50	25	20.84	20.87	20.78	3
		50	50	20.80	20.74	20.69	3
		100	0	20.72	20.73	20.72	3
20M	256QAM	1	0	19.01	18.94	18.90	5
		1	50	18.98	18.87	18.90	5
		1	99	18.87	18.89	18.77	5
		50	0	18.82	18.77	18.76	5
		50	25	18.74	18.78	18.66	5
		50	50	18.68	18.71	18.60	5
		100	0	18.69	18.63	18.60	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	23.79	23.75	23.80	0
		1	37	23.76	23.77	23.65	0
		1	74	23.63	23.67	23.61	0
		36	0	22.85	22.87	22.83	1
		36	19	22.75	22.70	22.81	1
		36	39	22.77	22.65	22.60	1
		75	0	22.68	22.68	22.58	1
15M	16QAM	1	0	23.03	23.07	23.02	1
		1	37	23.01	22.86	22.93	1
		1	74	22.92	22.94	22.84	1
		36	0	21.92	21.85	21.77	2
		36	19	21.76	21.83	21.77	2
		36	39	21.74	21.72	21.74	2
		75	0	21.68	21.66	21.64	2
15M	64QAM	1	0	21.89	21.93	21.88	2
		1	37	21.89	21.91	21.87	2
		1	74	21.79	21.73	21.82	2
		36	0	20.94	20.83	20.78	3
		36	19	20.83	20.87	20.71	3
		36	39	20.73	20.64	20.66	3
		75	0	20.68	20.73	20.63	3
15M	256QAM	1	0	18.92	18.86	18.83	5
		1	37	18.91	18.77	18.88	5
		1	74	18.85	18.83	18.74	5
		36	0	18.81	18.68	18.73	5
		36	19	18.68	18.68	18.64	5
		36	39	18.58	18.61	18.54	5
		75	0	18.62	18.53	18.54	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.78	23.71	23.82	0
		1	24	23.83	23.73	23.64	0
		1	49	23.67	23.59	23.54	0
		25	0	22.84	22.90	22.82	1
		25	12	22.82	22.80	22.75	1
		25	25	22.78	22.75	22.60	1
		50	0	22.69	22.70	22.62	1
10M	16QAM	1	0	23.07	23.09	23.03	1
		1	24	22.97	22.94	22.85	1
		1	49	22.88	22.84	22.80	1
		25	0	21.86	21.84	21.78	2
		25	12	21.85	21.84	21.76	2
		25	25	21.74	21.66	21.72	2
		50	0	21.68	21.69	21.69	2
10M	64QAM	1	0	21.94	21.99	21.80	2
		1	24	21.88	21.84	21.82	2
		1	49	21.82	21.77	21.74	2
		25	0	20.90	20.81	20.79	3
		25	12	20.79	20.77	20.69	3
		25	25	20.72	20.70	20.68	3
		50	0	20.70	20.70	20.62	3
10M	256QAM	1	0	19.01	18.84	18.89	5
		1	24	18.94	18.83	18.84	5
		1	49	18.84	18.81	18.77	5
		25	0	18.73	18.75	18.76	5
		25	12	18.69	18.69	18.61	5
		25	25	18.58	18.65	18.54	5
		50	0	18.64	18.56	18.56	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	23.82	23.76	23.78	0
		1	12	23.73	23.70	23.65	0
		1	24	23.63	23.65	23.56	0
		12	0	22.84	22.88	22.90	1
		12	6	22.80	22.74	22.78	1
		12	13	22.74	22.71	22.67	1
		25	0	22.68	22.65	22.59	1
5M	16QAM	1	0	23.12	23.06	23.02	1
		1	12	22.99	22.95	22.86	1
		1	24	22.93	22.84	22.76	1
		12	0	21.88	21.76	21.72	2
		12	6	21.80	21.82	21.73	2
		12	13	21.81	21.74	21.69	2
		25	0	21.67	21.67	21.71	2
5M	64QAM	1	0	21.98	21.92	21.82	2
		1	12	21.88	21.87	21.83	2
		1	24	21.78	21.79	21.72	2
		12	0	20.93	20.79	20.86	3
		12	6	20.75	20.87	20.73	3
		12	13	20.74	20.74	20.65	3
		25	0	20.66	20.69	20.62	3
5M	256QAM	1	0	18.92	18.87	18.83	5
		1	12	18.92	18.84	18.88	5
		1	24	18.87	18.87	18.68	5
		12	0	18.72	18.72	18.67	5
		12	6	18.65	18.72	18.60	5
		12	13	18.66	18.65	18.58	5
		25	0	18.69	18.57	18.54	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	23.79	23.59	23.75	0
		1	24	23.68	23.47	23.66	0
		1	49	23.55	23.34	23.53	0
		25	0	22.85	22.64	22.83	1
		25	12	22.79	22.58	22.77	1
		25	25	22.72	22.51	22.70	1
		50	0	22.65	22.44	22.63	1
10M	16QAM	1	0	23.20	22.99	23.18	1
		1	24	23.07	22.86	23.05	1
		1	49	23.02	22.81	23.00	1
		25	0	21.95	21.74	21.93	2
		25	12	21.91	21.70	21.89	2
		25	25	21.86	21.65	21.84	2
		50	0	21.77	21.56	21.75	2
10M	64QAM	1	0	22.10	21.89	22.08	2
		1	24	22.04	21.83	22.02	2
		1	49	21.99	21.78	21.97	2
		25	0	20.89	20.68	20.87	3
		25	12	20.85	20.64	20.83	3
		25	25	20.80	20.59	20.78	3
		50	0	20.77	20.56	20.75	3
10M	256QAM	1	0	18.95	18.76	18.94	5
		1	24	18.90	18.69	18.86	5
		1	49	18.82	18.62	18.78	5
		25	0	18.77	18.61	18.79	5
		25	12	18.80	18.57	18.76	5
		25	25	18.69	18.47	18.73	5
		50	0	18.71	18.44	18.67	5
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	23.66	23.56	23.62	0
		1	12	23.65	23.44	23.58	0
		1	24	23.55	23.30	23.47	0
		12	0	22.75	22.68	22.79	1
		12	6	22.72	22.61	22.69	1
		12	13	22.70	22.56	22.62	1
		25	0	22.65	22.51	22.53	1
5M	16QAM	1	0	23.20	22.96	23.18	1
		1	12	22.99	22.80	23.03	1
		1	24	22.99	22.74	22.99	1
		12	0	21.86	21.69	21.83	2
		12	6	21.81	21.65	21.83	2
		12	13	21.84	21.55	21.84	2
		25	0	21.76	21.49	21.74	2
5M	64QAM	1	0	22.06	21.85	22.01	2
		1	12	21.95	21.75	22.02	2
		1	24	21.90	21.68	21.95	2
		12	0	20.82	20.62	20.78	3
		12	6	20.85	20.64	20.77	3
		12	13	20.74	20.50	20.76	3
		25	0	20.74	20.51	20.67	3
5M	256QAM	1	0	18.96	18.73	18.95	5
		1	12	18.86	18.63	18.85	5
		1	24	18.86	18.63	18.84	5
		12	0	18.84	18.60	18.83	5
		12	6	18.73	18.56	18.75	5
		12	13	18.75	18.48	18.75	5
		25	0	18.68	18.48	18.71	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	23.65	23.51	23.64	0
		1	7	23.64	23.43	23.62	0
		1	14	23.52	23.34	23.46	0
		8	0	22.75	22.68	22.79	1
		8	3	22.72	22.61	22.69	1
		8	7	22.70	22.56	22.62	1
		15	0	22.65	22.51	22.53	1
3M	16QAM	1	0	23.19	22.91	23.14	1
		1	7	23.06	22.80	22.99	1
		1	14	22.99	22.81	22.99	1
		8	0	21.92	21.70	21.92	2
		8	3	21.90	21.68	21.85	2
		8	7	21.85	21.64	21.79	2
		15	0	21.73	21.54	21.66	2
3M	64QAM	1	0	22.01	21.85	22.03	2
		1	7	22.02	21.76	21.99	2
		1	14	21.89	21.70	21.92	2
		8	0	20.88	20.67	20.84	3
		8	3	20.76	20.64	20.83	3
		8	7	20.76	20.50	20.74	3
		15	0	20.75	20.54	20.75	3
3M	256QAM	1	0	18.96	18.74	18.86	5
		1	7	18.94	18.64	18.87	5
		1	14	18.88	18.66	18.84	5
		8	0	18.86	18.63	18.80	5
		8	3	18.73	18.54	18.71	5
		8	7	18.78	18.50	18.67	5
		15	0	18.69	18.49	18.66	5
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	23.63	23.54	23.60	0
		1	2	23.59	23.47	23.57	0
		1	5	23.54	23.34	23.46	0
		3	0	22.75	22.68	22.79	0
		3	1	22.72	22.61	22.69	0
		3	3	22.70	22.56	22.62	0
		6	0	22.65	22.51	22.53	1
1.4M	16QAM	1	0	23.11	22.96	23.10	1
		1	2	23.01	22.82	23.01	1
		1	5	22.98	22.74	22.90	1
		3	0	21.89	21.65	21.85	1
		3	1	21.81	21.68	21.85	1
		3	3	21.78	21.64	21.81	1
		6	0	21.77	21.49	21.75	2
1.4M	64QAM	1	0	22.05	21.87	22.06	2
		1	2	21.94	21.81	22.00	2
		1	5	21.93	21.77	21.92	2
		3	0	20.85	20.58	20.87	2
		3	1	20.85	20.62	20.77	2
		3	3	20.79	20.57	20.78	2
		6	0	20.74	20.53	20.66	3
1.4M	256QAM	1	0	18.92	18.74	18.88	5
		1	2	18.92	18.67	18.86	5
		1	5	18.83	18.65	18.82	5
		3	0	18.82	18.59	18.84	5
		3	1	18.72	18.59	18.77	5
		3	3	18.74	18.55	18.67	5
		6	0	18.70	18.44	18.66	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		23.83		0
		1	24		23.78		0
		1	49		23.69		0
		25	0		22.93		1
		25	12		22.89		1
		25	25		22.84		1
		50	0		22.8		1
10M	16QAM	1	0		23.06		1
		1	24		23.01		1
		1	49		22.97		1
		25	0		21.89		2
		25	12		21.83		2
		25	25		21.78		2
		50	0		21.75		2
10M	64QAM	1	0		21.89		2
		1	24		21.81		2
		1	49		21.76		2
		25	0		20.93		3
		25	12		20.89		3
		25	25		20.82		3
		50	0		20.77		3
10M	256QAM	1	0		18.95		5
		1	24		18.90		5
		1	49		18.86		5
		25	0		18.77		5
		25	12		18.69		5
		25	25		18.63		5
		50	0		18.57		5
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	23.79	23.77	23.80	0
		1	12	23.76	23.72	23.77	0
		1	24	23.70	23.66	23.71	0
		12	0	22.90	22.86	22.91	1
		12	6	22.85	22.81	22.86	1
		12	13	22.81	22.77	22.82	1
		25	0	22.77	22.73	22.78	1
5M	16QAM	1	0	23.02	22.98	23.03	1
		1	12	22.97	22.93	22.98	1
		1	24	22.93	22.89	22.92	1
		12	0	22.01	21.97	22.02	2
		12	6	21.96	21.92	21.97	2
		12	13	21.91	21.87	21.92	2
		25	0	21.88	21.82	21.87	2
5M	64QAM	1	0	22.10	22.06	22.11	2
		1	12	22.05	22.01	22.06	2
		1	24	21.98	21.94	21.99	2
		12	0	21.03	20.99	21.04	3
		12	6	20.99	20.94	20.99	3
		12	13	20.89	20.85	20.91	3
		25	0	20.85	20.81	20.86	3
5M	256QAM	1	0	19.14	19.10	19.15	5
		1	12	19.07	19.03	19.08	5
		1	24	19.01	18.97	19.02	5
		12	0	18.99	18.95	19.00	5
		12	6	18.93	18.89	18.94	5
		12	13	18.82	18.78	18.83	5
		25	0	18.77	18.73	18.78	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		23.82		0
		1	24		23.78		0
		1	49		23.74		0
		25	0		22.97		1
		25	12		22.92		1
		25	25		22.88		1
		50	0		22.83		1
10M	16QAM	1	0		23.12		1
		1	24		23.07		1
		1	49		23.02		1
		25	0		21.89		2
		25	12		21.83		2
		25	25		21.79		2
		50	0		21.75		2
10M	64QAM	1	0		21.96		2
		1	24		21.91		2
		1	49		21.87		2
		25	0		20.91		3
		25	12		20.86		3
		25	25		20.82		3
		50	0		20.77		3
10M	256QAM	1	0		18.87		5
		1	24		18.82		5
		1	49		18.77		5
		25	0		18.74		5
		25	12		18.69		5
		25	25		18.64		5
		50	0		18.60		5
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	23.75	23.79	23.76	0
		1	12	23.72	23.50	23.69	0
		1	24	23.66	23.73	23.63	0
		12	0	22.87	22.94	22.84	1
		12	6	22.82	22.89	22.79	1
		12	13	22.77	22.84	22.74	1
		25	0	22.73	22.80	22.70	1
5M	16QAM	1	0	23.02	23.09	22.99	1
		1	12	22.95	23.02	22.92	1
		1	24	22.88	22.95	22.85	1
		12	0	21.90	21.97	21.87	2
		12	6	21.86	21.92	21.82	2
		12	13	21.80	21.87	21.79	2
		25	0	21.76	21.83	21.73	2
5M	64QAM	1	0	21.97	22.04	21.94	2
		1	12	21.92	21.99	21.89	2
		1	24	21.87	21.94	21.84	2
		12	0	20.85	20.92	20.81	3
		12	6	20.81	20.88	20.78	3
		12	13	20.74	20.81	20.71	3
		25	0	20.70	20.77	20.67	3
5M	256QAM	1	0	18.95	19.02	18.92	5
		1	12	18.90	18.96	18.86	5
		1	24	18.85	18.92	18.82	5
		12	0	18.80	18.87	18.77	5
		12	6	18.76	18.83	18.73	5
		12	13	18.71	18.78	18.68	5
		25	0	18.65	18.72	18.62	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	23.44	23.39	23.36	0
		1	24	23.34	23.29	23.26	0
		1	49	23.27	23.22	23.19	0
		25	0	22.49	22.44	22.41	1
		25	12	22.44	22.39	22.36	1
		25	25	22.38	22.33	22.30	1
		50	0	22.33	22.28	22.25	1
10M	16QAM	1	0	22.73	22.68	22.65	1
		1	24	22.67	22.62	22.59	1
		1	49	22.63	22.58	22.55	1
		25	0	21.53	21.48	21.45	2
		25	12	21.46	21.41	21.38	2
		25	25	21.42	21.37	21.34	2
		50	0	21.38	21.33	21.30	2
10M	64QAM	1	0	21.74	21.69	21.66	2
		1	24	21.67	21.62	21.59	2
		1	49	21.62	21.57	21.54	2
		25	0	20.54	20.49	20.46	3
		25	12	20.49	20.44	20.41	3
		25	25	20.44	20.39	20.36	3
		50	0	20.40	20.35	20.32	3
10M	256QAM	1	0	18.44	18.39	18.36	5
		1	24	18.38	18.33	18.30	5
		1	49	18.33	18.28	18.25	5
		25	0	18.28	18.23	18.20	5
		25	12	18.24	18.19	18.16	5
		25	25	18.20	18.15	18.12	5
		50	0	18.16	18.11	18.08	5
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	23.36	23.29	23.31	0
		1	12	23.24	23.26	23.24	0
		1	24	23.21	23.20	23.11	0
		12	0	22.49	22.43	22.69	1
		12	6	22.42	22.39	22.56	1
		12	13	22.30	22.33	22.42	1
		25	0	22.16	22.30	22.22	1
5M	16QAM	1	0	22.73	22.68	22.55	1
		1	12	22.57	22.53	22.49	1
		1	24	22.61	22.58	22.45	1
		12	0	21.48	21.41	21.45	2
		12	6	21.38	21.36	21.32	2
		12	13	21.41	21.28	21.32	2
		25	0	21.33	21.23	21.27	2
5M	64QAM	1	0	21.70	21.68	21.60	2
		1	12	21.60	21.57	21.58	2
		1	24	21.58	21.49	21.45	2
		12	0	20.51	20.43	20.45	3
		12	6	20.47	20.37	20.36	3
		12	13	20.43	20.35	20.34	3
		25	0	20.30	20.32	20.24	3
5M	256QAM	1	0	18.40	18.31	18.35	5
		1	12	18.31	18.23	18.22	5
		1	24	18.25	18.20	18.24	5
		12	0	18.27	18.16	18.18	5
		12	6	18.22	18.12	18.15	5
		12	13	18.20	18.10	18.06	5
		25	0	18.08	18.01	18.02	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	23.59	23.57	23.47	0
		1	50	23.51	23.49	23.39	0
		1	99	23.45	23.43	23.33	0
		50	0	22.61	22.59	22.49	1
		50	25	22.55	22.53	22.43	1
		50	50	22.51	22.49	22.39	1
		100	0	22.46	22.44	22.34	1
20M	16QAM	1	0	22.75	22.73	22.63	1
		1	50	22.69	22.67	22.57	1
		1	99	22.63	22.61	22.51	1
		50	0	21.57	21.55	21.45	2
		50	25	21.52	21.50	21.40	2
		50	50	21.46	21.44	21.34	2
		100	0	21.43	21.41	21.31	2
20M	64QAM	1	0	21.63	21.61	21.51	2
		1	50	21.59	21.57	21.47	2
		1	99	21.54	21.52	21.42	2
		50	0	20.58	20.56	20.46	3
		50	25	20.54	20.52	20.42	3
		50	50	20.49	20.47	20.37	3
		100	0	20.43	20.41	20.31	3
20M	256QAM	1	0	18.78	18.76	18.66	5
		1	50	18.74	18.72	18.62	5
		1	99	18.68	18.66	18.56	5
		50	0	18.65	18.63	18.53	5
		50	25	18.60	18.58	18.48	5
		50	50	18.54	18.52	18.42	5
		100	0	18.49	18.47	18.37	5
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	23.51	23.49	23.38	0
		1	37	23.43	23.46	23.31	0
		1	74	23.38	23.33	23.29	0
		36	0	22.53	22.53	22.41	1
		36	19	22.51	22.45	22.37	1
		36	39	22.46	22.44	22.34	1
		75	0	22.45	22.41	22.29	1
15M	16QAM	1	0	22.74	22.70	22.62	1
		1	37	22.59	22.61	22.51	1
		1	74	22.63	22.59	22.43	1
		36	0	21.47	21.50	21.37	2
		36	19	21.49	21.41	21.32	2
		36	39	21.39	21.37	21.28	2
		75	0	21.36	21.37	21.28	2
15M	64QAM	1	0	21.59	21.52	21.44	2
		1	37	21.49	21.52	21.45	2
		1	74	21.45	21.45	21.34	2
		36	0	20.54	20.53	20.39	3
		36	19	20.48	20.48	20.39	3
		36	39	20.48	20.42	20.28	3
		75	0	20.37	20.40	20.28	3
15M	256QAM	1	0	18.73	18.76	18.61	5
		1	37	18.68	18.65	18.58	5
		1	74	18.64	18.58	18.54	5
		36	0	18.65	18.55	18.48	5
		36	19	18.60	18.51	18.45	5
		36	39	18.44	18.47	18.34	5
		75	0	18.39	18.45	18.37	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	23.44	23.40	23.33	0
		1	24	23.40	23.35	23.29	0
		1	49	23.32	23.37	23.22	0
		25	0	22.50	22.48	22.33	1
		25	12	22.43	22.43	22.19	1
		25	25	22.33	22.41	22.28	1
		50	0	22.32	22.21	22.26	1
10M	16QAM	1	0	22.67	22.55	22.56	1
		1	24	22.48	22.61	22.36	1
		1	49	22.53	22.46	22.35	1
		25	0	21.57	21.42	21.35	2
		25	12	21.45	21.41	21.20	2
		25	25	21.33	21.30	21.21	2
		50	0	21.31	21.28	21.19	2
10M	64QAM	1	0	21.53	21.55	21.42	2
		1	24	21.48	21.41	21.38	2
		1	49	21.51	21.47	21.32	2
		25	0	20.41	20.35	20.32	3
		25	12	20.30	20.43	20.31	3
		25	25	20.33	20.41	20.22	3
		50	0	20.27	20.21	20.10	3
10M	256QAM	1	0	18.69	18.70	18.66	5
		1	24	18.69	18.70	18.62	5
		1	49	18.63	18.58	18.54	5
		25	0	18.65	18.53	18.43	5
		25	12	18.60	18.50	18.47	5
		25	25	18.50	18.47	18.36	5
		50	0	18.43	18.46	18.33	5
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	23.38	23.36	23.33	0
		1	12	23.36	23.34	23.07	0
		1	24	23.31	23.33	23.04	0
		12	0	22.46	22.44	22.29	1
		12	6	22.52	22.45	22.23	1
		12	13	22.37	22.38	22.18	1
		25	0	22.34	22.34	22.09	1
5M	16QAM	1	0	22.65	22.58	22.46	1
		1	12	22.59	22.54	22.54	1
		1	24	22.56	22.49	22.42	1
		12	0	21.51	21.49	21.41	2
		12	6	21.43	21.27	21.33	2
		12	13	21.27	21.33	21.23	2
		25	0	21.37	21.32	21.21	2
5M	64QAM	1	0	21.54	21.55	21.37	2
		1	12	21.46	21.48	21.29	2
		1	24	21.39	21.41	21.26	2
		12	0	20.41	20.44	20.32	3
		12	6	20.42	20.42	20.28	3
		12	13	20.41	20.31	20.16	3
		25	0	20.40	20.26	20.20	3
5M	256QAM	1	0	18.73	18.74	18.57	5
		1	12	18.72	18.66	18.61	5
		1	24	18.65	18.65	18.52	5
		12	0	18.59	18.60	18.52	5
		12	6	18.53	18.54	18.39	5
		12	13	18.47	18.43	18.37	5
		25	0	18.43	18.44	18.27	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	23.48	23.43	23.24	0
		1	7	23.42	23.40	23.18	0
		1	14	23.22	23.34	23.33	0
		8	0	22.51	22.44	22.32	1
		8	3	22.39	22.38	22.33	1
		8	7	22.40	22.36	22.25	1
		15	0	22.34	22.34	22.10	1
3M	16QAM	1	0	22.74	22.67	22.47	1
		1	7	22.55	22.50	22.43	1
		1	14	22.48	22.51	22.44	1
		8	0	21.46	21.42	21.24	2
		8	3	21.35	21.41	21.30	2
		8	7	21.40	21.31	21.14	2
		15	0	21.39	21.25	21.20	2
3M	64QAM	1	0	21.58	21.49	21.34	2
		1	7	21.41	21.49	21.40	2
		1	14	21.39	21.31	21.40	2
		8	0	20.42	20.43	20.22	3
		8	3	20.49	20.34	20.31	3
		8	7	20.36	20.30	20.29	3
		15	0	20.33	20.36	20.20	3
3M	256QAM	1	0	18.69	18.72	18.64	5
		1	7	18.69	18.67	18.61	5
		1	14	18.61	18.66	18.46	5
		8	0	18.59	18.63	18.51	5
		8	3	18.57	18.56	18.41	5
		8	7	18.46	18.48	18.38	5
		15	0	18.48	18.46	18.36	5
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	23.42	23.40	23.29	0
		1	2	23.33	23.42	23.29	0
		1	5	23.29	23.24	23.27	0
		3	0	23.44	23.37	23.28	0
		3	1	23.37	23.42	23.37	0
		3	3	23.41	23.38	23.37	0
		6	0	22.31	22.39	22.20	1
1.4M	16QAM	1	0	22.73	22.50	22.51	1
		1	2	22.54	22.49	22.55	1
		1	5	22.55	22.46	22.29	1
		3	0	22.45	22.41	22.26	1
		3	1	22.46	22.42	22.29	1
		3	3	22.39	22.38	22.29	1
		6	0	21.28	21.40	21.11	2
1.4M	64QAM	1	0	21.56	21.44	21.41	2
		1	2	21.38	21.50	21.36	2
		1	5	21.53	21.36	21.33	2
		3	0	21.48	21.38	21.35	2
		3	1	21.33	21.43	21.37	2
		3	3	21.47	21.26	21.35	2
		6	0	20.33	20.30	20.21	3
1.4M	256QAM	1	0	18.78	18.76	18.56	5
		1	2	18.65	18.69	18.59	5
		1	5	18.68	18.56	18.50	5
		3	0	18.57	18.59	18.44	5
		3	1	18.57	18.55	18.42	5
		3	3	18.47	18.47	18.32	5
		6	0	18.48	18.45	18.30	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	24.00	24.06	23.94	0
		1	37	23.92	23.98	23.86	0
		1	74	23.86	23.92	23.80	0
		36	0	23.00	23.06	22.94	1
		36	19	22.93	22.99	22.87	1
		36	39	22.88	22.94	22.82	1
		75	0	22.82	22.88	22.76	1
15M	16QAM	1	0	23.24	23.30	23.18	1
		1	37	23.19	23.25	23.13	1
		1	74	23.13	23.19	23.07	1
		36	0	22.03	22.09	21.97	2
		36	19	21.96	22.02	21.90	2
		36	39	21.92	21.98	21.86	2
		75	0	21.87	21.93	21.81	2
15M	64QAM	1	0	22.15	22.21	22.09	2
		1	37	22.10	22.16	22.04	2
		1	74	22.05	22.11	21.99	2
		36	0	21.13	21.19	21.07	3
		36	19	21.09	21.15	21.03	3
		36	39	21.04	21.10	20.98	3
		75	0	21.01	21.07	20.95	3
15M	256QAM	1	0	19.14	19.20	19.08	5
		1	37	19.08	19.14	19.02	5
		1	74	19.05	19.11	18.99	5
		36	0	19.00	19.06	18.94	5
		36	19	18.93	18.99	18.87	5
		36	39	18.87	18.93	18.81	5
		75	0	18.84	18.90	18.78	5
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	23.99	24.00	23.85	0
		1	24	23.86	23.91	23.80	0
		1	49	23.82	23.84	23.74	0
		25	0	22.97	22.99	22.94	1
		25	12	22.88	22.94	22.83	1
		25	25	22.79	22.88	22.78	1
		50	0	22.74	22.83	22.71	1
10M	16QAM	1	0	23.24	23.24	23.17	1
		1	24	23.15	23.24	23.03	1
		1	49	23.07	23.19	23.00	1
		25	0	21.99	22.05	21.87	2
		25	12	21.93	21.99	21.80	2
		25	25	21.83	21.97	21.84	2
		50	0	21.79	21.87	21.80	2
10M	64QAM	1	0	22.13	22.19	22.00	2
		1	24	22.00	22.16	21.94	2
		1	49	22.00	22.03	21.89	2
		25	0	21.12	21.18	21.00	3
		25	12	21.08	21.06	21.02	3
		25	25	21.04	21.10	20.90	3
		50	0	20.94	20.98	20.86	3
10M	256QAM	1	0	19.13	19.12	19.02	5
		1	24	19.08	19.13	18.94	5
		1	49	19.04	19.11	18.90	5
		25	0	18.96	19.01	18.94	5
		25	12	18.88	18.95	18.80	5
		25	25	18.78	18.93	18.72	5
		50	0	18.83	18.80	18.69	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	23.85	23.88	23.80	0
		1	12	23.84	23.85	23.69	0
		1	24	23.66	23.81	23.67	0
		12	0	22.85	22.90	22.77	1
		12	6	22.82	22.88	22.74	1
		12	13	22.84	22.69	22.66	1
		25	0	22.66	22.64	22.60	1
5M	16QAM	1	0	23.08	23.14	23.06	1
		1	12	23.05	23.15	22.99	1
		1	24	23.05	23.07	22.91	1
		12	0	21.88	21.98	21.75	2
		12	6	21.71	21.84	21.87	2
		12	13	21.83	21.89	21.76	2
		25	0	21.76	21.86	21.63	2
5M	64QAM	1	0	21.93	22.03	21.91	2
		1	12	21.91	21.98	21.89	2
		1	24	21.84	21.96	21.77	2
		12	0	21.00	21.09	20.86	3
		12	6	20.93	21.07	20.88	3
		12	13	20.96	20.92	20.86	3
		25	0	20.86	21.00	20.71	3
5M	256QAM	1	0	19.10	19.20	19.05	5
		1	12	19.00	19.14	19.00	5
		1	24	19.05	19.06	18.97	5
		12	0	18.96	19.00	18.88	5
		12	6	18.90	18.91	18.77	5
		12	13	18.79	18.87	18.77	5
		25	0	18.78	18.88	18.75	5
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	23.93	23.94	23.74	0
		1	7	23.80	23.90	23.72	0
		1	14	23.64	23.84	23.70	0
		8	0	22.93	23.03	22.80	1
		8	3	22.75	22.83	22.70	1
		8	7	22.78	22.92	22.54	1
		15	0	22.71	22.74	22.52	1
3M	16QAM	1	0	23.09	23.08	23.02	1
		1	7	23.14	23.13	22.92	1
		1	14	22.99	23.09	23.00	1
		8	0	21.97	21.99	21.80	2
		8	3	21.81	21.92	21.68	2
		8	7	21.75	21.86	21.76	2
		15	0	21.77	21.81	21.64	2
3M	64QAM	1	0	22.07	22.17	21.97	2
		1	7	21.91	22.09	21.89	2
		1	14	21.80	21.96	21.79	2
		8	0	20.93	21.06	20.85	3
		8	3	21.03	21.03	20.89	3
		8	7	20.99	20.96	20.86	3
		15	0	20.87	20.86	20.84	3
3M	256QAM	1	0	19.06	19.13	19.02	5
		1	7	19.07	19.08	19.02	5
		1	14	18.97	19.04	18.92	5
		8	0	18.95	19.04	18.85	5
		8	3	18.92	18.91	18.83	5
		8	7	18.79	18.89	18.80	5
		15	0	18.81	18.80	18.71	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	23.91	23.92	23.86	0
		1	2	23.85	23.85	23.80	0
		1	5	23.64	23.85	23.74	0
		3	0	22.96	23.02	22.80	0
		3	1	22.70	22.82	22.79	0
		3	3	22.83	22.76	22.63	0
		6	0	22.78	22.71	22.58	1
1.4M	16QAM	1	0	23.05	23.09	23.08	1
		1	2	23.09	23.08	23.06	1
		1	5	22.89	23.17	23.01	1
		3	0	21.95	21.98	21.88	1
		3	1	21.83	21.92	21.74	1
		3	3	21.75	21.84	21.70	1
		6	0	21.68	21.76	21.70	2
1.4M	64QAM	1	0	22.00	22.19	21.85	2
		1	2	21.90	22.05	22.00	2
		1	5	21.96	21.96	21.91	2
		3	0	20.97	20.97	20.85	2
		3	1	20.89	21.00	20.95	2
		3	3	20.94	21.07	20.92	2
		6	0	20.82	20.92	20.91	3
1.4M	256QAM	1	0	19.08	19.20	19.05	5
		1	2	19.00	19.09	18.97	5
		1	5	18.98	19.04	18.98	5
		3	0	18.99	18.97	18.92	5
		3	1	18.86	18.97	18.84	5
		3	3	18.85	18.87	18.76	5
		6	0	18.82	18.87	18.74	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		22.72		0
		1	24		22.65		0
		1	49		22.60		0
		25	0		21.70		1
		25	12		21.64		1
		25	25		21.59		1
		50	0		21.53		1
10M	16QAM	1	0		22.12		1
		1	24		22.06		1
		1	49		22.01		1
		25	0		21.09		2
		25	12		21.03		2
		25	25		20.99		2
		50	0		20.94		2
10M	64QAM	1	0		20.99		2
		1	24		20.92		2
		1	49		20.87		2
		25	0		20.00		3
		25	12		19.96		3
		25	25		19.90		3
		50	0		19.85		3
10M	256QAM	1	0		17.89		5
		1	24		17.84		5
		1	49		17.81		5
		25	0		17.77		5
		25	12		17.71		5
		25	25		17.65		5
		50	0		17.61		5
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	22.65	22.69	22.67	0
		1	12	22.58	22.62	22.55	0
		1	24	22.60	22.55	22.55	0
		12	0	21.69	21.70	21.60	1
		12	6	21.59	21.59	21.54	1
		12	13	21.51	21.49	21.54	1
		25	0	21.46	21.53	21.46	1
5M	16QAM	1	0	22.02	22.04	22.08	1
		1	12	22.03	22.06	22.03	1
		1	24	22.00	21.98	21.95	1
		12	0	21.06	21.07	21.06	2
		12	6	20.95	20.95	20.99	2
		12	13	20.94	20.96	20.93	2
		25	0	20.84	20.86	20.88	2
5M	64QAM	1	0	20.95	20.90	20.90	2
		1	12	20.88	20.88	20.91	2
		1	24	20.82	20.80	20.82	2
		12	0	19.93	19.96	19.95	3
		12	6	19.92	19.96	19.90	3
		12	13	19.86	19.80	19.83	3
		25	0	19.77	19.84	19.85	3
5M	256QAM	1	0	17.79	17.83	17.85	5
		1	12	17.84	17.75	17.82	5
		1	24	17.72	17.79	17.77	5
		12	0	17.71	17.73	17.75	5
		12	6	17.61	17.70	17.67	5
		12	13	17.65	17.61	17.64	5
		25	0	17.54	17.56	17.56	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	23.84	23.65	23.57	0
		1	50	23.70	23.51	23.43	0
		1	99	23.64	23.45	23.37	0
		50	0	22.89	22.70	22.62	1
		50	25	22.83	22.64	22.56	1
		50	50	22.78	22.59	22.51	1
		100	0	22.73	22.54	22.46	1
20M	16QAM	1	0	22.81	22.62	22.54	1
		1	50	22.76	22.57	22.49	1
		1	99	22.71	22.52	22.44	1
		50	0	21.90	21.71	21.63	2
		50	25	21.85	21.66	21.58	2
		50	50	21.81	21.62	21.54	2
		100	0	21.76	21.57	21.49	2
20M	64QAM	1	0	21.77	21.58	21.50	2
		1	50	21.73	21.54	21.46	2
		1	99	21.70	21.51	21.43	2
		50	0	20.88	20.69	20.61	3
		50	25	20.82	20.63	20.55	3
		50	50	20.78	20.59	20.51	3
		100	0	20.74	20.55	20.47	3
20M	256QAM	1	0	18.88	18.69	18.61	5
		1	50	18.83	18.64	18.56	5
		1	99	18.80	18.61	18.53	5
		50	0	18.75	18.56	18.48	5
		50	25	18.72	18.53	18.45	5
		50	50	18.68	18.49	18.41	5
		100	0	19.09	18.90	18.82	5
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	23.74	23.61	23.53	0
		1	37	23.61	23.41	23.34	0
		1	74	23.57	23.45	23.32	0
		36	0	22.88	22.70	22.62	1
		36	19	22.80	22.63	22.49	1
		36	39	22.71	22.51	22.43	1
		75	0	22.71	22.53	22.40	1
15M	16QAM	1	0	22.80	22.58	22.48	1
		1	37	22.71	22.48	22.41	1
		1	74	22.69	22.50	22.41	1
		36	0	21.84	21.69	21.62	2
		36	19	21.75	21.64	21.51	2
		36	39	21.78	21.56	21.44	2
		75	0	21.74	21.50	21.43	2
15M	64QAM	1	0	21.77	21.48	21.48	2
		1	37	21.67	21.54	21.42	2
		1	74	21.62	21.48	21.35	2
		36	0	20.85	20.68	20.58	3
		36	19	20.80	20.59	20.46	3
		36	39	20.71	20.50	20.50	3
		75	0	20.67	20.52	20.46	3
15M	256QAM	1	0	18.87	18.64	18.60	5
		1	37	18.75	18.55	18.53	5
		1	74	18.79	18.51	18.43	5
		36	0	18.70	18.54	18.42	5
		36	19	18.64	18.47	18.43	5
		36	39	18.61	18.45	18.36	5
		75	0	18.99	18.83	18.72	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	23.79	23.60	23.57	0
		1	24	23.67	23.51	23.42	0
		1	49	23.55	23.35	23.35	0
		25	0	22.89	22.64	22.52	1
		25	12	22.74	22.64	22.47	1
		25	25	22.70	22.51	22.48	1
		50	0	22.70	22.45	22.43	1
10M	16QAM	1	0	22.81	22.52	22.53	1
		1	24	22.75	22.54	22.41	1
		1	49	22.68	22.52	22.40	1
		25	0	21.84	21.67	21.58	2
		25	12	21.84	21.66	21.55	2
		25	25	21.81	21.62	21.45	2
		50	0	21.75	21.53	21.40	2
10M	64QAM	1	0	21.75	21.50	21.49	2
		1	24	21.63	21.48	21.37	2
		1	49	21.68	21.51	21.33	2
		25	0	20.84	20.60	20.51	3
		25	12	20.81	20.54	20.52	3
		25	25	20.69	20.55	20.51	3
		50	0	20.64	20.50	20.41	3
10M	256QAM	1	0	18.88	18.66	18.59	5
		1	24	18.80	18.55	18.56	5
		1	49	18.74	18.58	18.46	5
		25	0	18.75	18.50	18.48	5
		25	12	18.72	18.43	18.37	5
		25	25	18.66	18.45	18.34	5
		50	0	19.08	18.88	18.82	5
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	23.83	23.65	23.51	0
		1	12	23.64	23.47	23.37	0
		1	24	23.59	23.37	23.29	0
		12	0	22.85	22.68	22.56	1
		12	6	22.76	22.57	22.54	1
		12	13	22.69	22.50	22.44	1
		25	0	22.66	22.51	22.43	1
5M	16QAM	1	0	22.76	22.60	22.48	1
		1	12	22.74	22.55	22.40	1
		1	24	22.61	22.51	22.37	1
		12	0	21.88	21.69	21.60	2
		12	6	21.75	21.61	21.54	2
		12	13	21.78	21.55	21.45	2
		25	0	21.73	21.56	21.48	2
5M	64QAM	1	0	21.71	21.54	21.46	2
		1	12	21.69	21.49	21.39	2
		1	24	21.67	21.50	21.36	2
		12	0	20.83	20.60	20.52	3
		12	6	20.72	20.62	20.55	3
		12	13	20.70	20.53	20.44	3
		25	0	20.65	20.55	20.40	3
5M	256QAM	1	0	18.79	18.67	18.59	5
		1	12	18.78	18.55	18.56	5
		1	24	18.70	18.58	18.51	5
		12	0	18.69	18.51	18.47	5
		12	6	18.65	18.46	18.36	5
		12	13	18.66	18.43	18.38	5
		25	0	18.99	18.81	18.76	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)										
LTE Band 41										
BW	MCS Index	RB Size	RB Offset	Low	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39790	39750	40185	40620	41055	41490	
		Frequency (MHz)		2510	2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	23.98	23.96	23.90	23.99	23.65	23.54	0
		1	50	23.88	23.86	23.80	23.89	23.55	23.10	0
		1	99	23.90	23.88	23.82	23.91	23.57	23.12	0
		50	0	23.06	23.04	22.98	23.07	22.73	22.28	1
		50	25	22.93	22.91	22.85	22.94	22.60	22.15	1
		50	50	22.89	22.87	22.81	22.90	22.56	22.11	1
		100	0	22.92	22.90	22.84	22.93	22.59	22.14	1
20M	16QAM	1	0	22.93	22.94	22.87	22.90	22.58	22.52	1
		1	50	22.81	22.82	22.75	22.86	22.47	22.09	1
		1	99	22.86	22.84	22.80	22.82	22.50	22.10	1
		50	0	22.01	21.96	21.90	22.00	21.71	21.28	2
		50	25	21.91	21.89	21.80	21.84	21.50	21.10	2
		50	50	21.87	21.79	21.81	21.88	21.55	21.04	2
		100	0	21.91	21.90	21.79	21.91	21.56	21.12	2
20M	64QAM	1	0	21.96	21.95	21.90	21.98	21.62	21.53	2
		1	50	21.82	21.83	21.75	21.87	21.54	21.08	2
		1	99	21.88	21.87	21.75	21.82	21.49	21.06	2
		50	0	21.01	21.00	20.91	21.05	20.70	20.24	3
		50	25	20.84	20.85	20.84	20.91	20.60	20.11	3
		50	50	20.86	20.81	20.73	20.83	20.51	20.06	3
		100	0	20.88	20.85	20.79	20.90	20.52	20.07	3
20M	256QAM	1	0	18.95	18.93	18.87	18.96	18.62	18.17	5
		1	50	18.80	18.78	18.72	18.81	18.47	18.02	5
		1	99	18.70	18.68	18.62	18.71	18.37	17.92	5
		50	0	18.98	18.96	18.90	18.99	18.65	18.20	5
		50	25	18.95	18.93	18.87	18.96	18.62	18.17	5
		50	50	18.97	18.95	18.89	18.98	18.64	18.19	5
		100	0	18.96	18.94	18.88	18.97	18.63	18.18	5
BW	MCS Index	Channel		39765	39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2507.5	2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	23.92	23.86	23.90	23.89	23.60	23.46	0
		1	37	23.81	23.80	23.79	23.88	23.46	23.02	0
		1	74	23.90	23.82	23.73	23.88	23.56	23.11	0
		36	0	23.04	22.96	22.93	23.03	22.72	22.25	1
		36	19	22.84	22.89	22.83	22.89	22.53	22.13	1
		36	39	22.84	22.79	22.77	22.85	22.50	22.01	1
		75	0	22.84	22.82	22.83	22.89	22.49	22.11	1
15M	16QAM	1	0	22.97	22.89	22.81	22.91	22.65	22.49	1
		1	37	22.88	22.86	22.80	22.86	22.49	22.05	1
		1	74	22.82	22.80	22.74	22.85	22.57	22.09	1
		36	0	22.06	22.01	21.94	22.00	21.69	21.23	2
		36	19	21.87	21.88	21.78	21.89	21.54	21.12	2
		36	39	21.86	21.83	21.77	21.83	21.48	21.05	2
		75	0	21.86	21.81	21.77	21.86	21.54	21.14	2
15M	64QAM	1	0	21.93	21.87	21.80	21.89	21.64	21.52	2
		1	37	21.80	21.77	21.71	21.82	21.53	21.10	2
		1	74	21.87	21.88	21.77	21.87	21.52	21.10	2
		36	0	21.00	21.03	20.98	21.06	20.65	20.25	3
		36	19	20.88	20.89	20.80	20.88	20.56	20.09	3
		36	39	20.88	20.78	20.81	20.81	20.56	20.07	3
		75	0	20.84	20.90	20.76	20.87	20.55	20.05	3
15M	256QAM	1	0	18.94	18.92	18.86	18.95	18.61	18.16	5
		1	37	18.79	18.77	18.71	18.80	18.46	18.01	5
		1	74	18.69	18.67	18.61	18.70	18.36	17.91	5
		36	0	18.97	18.95	18.89	18.98	18.64	18.19	5
		36	19	18.94	18.92	18.86	18.95	18.61	18.16	5
		36	39	18.96	18.94	18.88	18.97	18.63	18.18	5
		75	0	18.95	18.93	18.87	18.96	18.62	18.17	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)										
LTE Band 41										
BW	MCS Index	Channel		39740	39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2505	2501	2547	2593	2639	2685	
10M	QPSK	1	0	23.87	23.87	23.76	23.89	23.57	23.40	0
		1	24	23.80	23.80	23.71	23.81	23.41	22.97	0
		1	49	23.82	23.80	23.72	23.86	23.45	22.98	0
		25	0	23.01	22.99	22.88	22.96	22.69	22.20	1
		25	12	22.91	22.77	22.77	22.80	22.46	22.08	1
		25	25	22.82	22.69	22.72	22.84	22.43	22.00	1
		50	0	22.78	22.71	22.78	22.90	22.46	22.13	1
10M	16QAM	1	0	22.90	22.86	22.82	22.90	22.59	22.44	1
		1	24	22.83	22.78	22.73	22.83	22.44	21.92	1
		1	49	22.87	22.81	22.68	22.85	22.42	22.00	1
		25	0	21.95	21.97	21.92	21.88	21.62	21.14	2
		25	12	21.89	21.75	21.74	21.83	21.46	21.07	2
		25	25	21.84	21.71	21.67	21.88	21.44	20.97	2
		50	0	21.77	21.71	21.78	21.93	21.49	21.03	2
10M	64QAM	1	0	21.89	21.86	21.76	21.93	21.60	21.45	2
		1	24	21.78	21.79	21.67	21.78	21.46	20.97	2
		1	49	21.79	21.80	21.73	21.82	21.51	21.04	2
		25	0	20.98	21.01	20.96	20.97	20.63	20.23	3
		25	12	20.85	20.80	20.75	20.80	20.52	20.03	3
		25	25	20.79	20.67	20.62	20.84	20.42	19.99	3
		50	0	20.77	20.81	20.78	20.84	20.52	20.03	3
10M	256QAM	1	0	18.93	18.91	18.85	18.94	18.60	18.15	5
		1	24	18.78	18.76	18.70	18.79	18.45	18.00	5
		1	49	18.68	18.66	18.60	18.69	18.35	17.90	5
		25	0	18.96	18.94	18.88	18.97	18.63	18.18	5
		25	12	18.93	18.91	18.85	18.94	18.60	18.15	5
		25	25	18.95	18.93	18.87	18.96	18.62	18.17	5
		50	0	18.94	18.92	18.86	18.95	18.61	18.16	5
BW	MCS Index	Channel		39715	39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2502.5	2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	23.96	23.90	23.86	23.86	23.51	23.48	0
		1	12	23.79	23.82	23.70	23.77	23.42	23.07	0
		1	24	23.75	23.80	23.66	23.85	23.43	22.97	0
		12	0	22.98	22.93	22.84	23.06	22.62	22.16	1
		12	6	22.88	22.84	22.70	22.87	22.52	22.12	1
		12	13	22.81	22.75	22.80	22.73	22.44	22.10	1
		25	0	22.91	22.77	22.73	22.80	22.55	22.03	1
5M	16QAM	1	0	22.91	22.93	22.80	22.85	22.56	22.43	1
		1	12	22.77	22.78	22.74	22.79	22.43	22.06	1
		1	24	22.78	22.75	22.75	22.79	22.46	22.06	1
		12	0	21.98	21.94	21.88	22.02	21.66	21.21	2
		12	6	21.82	21.83	21.76	21.78	21.54	21.04	2
		12	13	21.72	21.79	21.80	21.78	21.42	21.00	2
		25	0	21.91	21.79	21.71	21.87	21.48	21.08	2
5M	64QAM	1	0	21.92	21.91	21.83	21.83	21.49	21.43	2
		1	12	21.73	21.83	21.72	21.73	21.46	20.98	2
		1	24	21.71	21.75	21.68	21.84	21.40	21.05	2
		12	0	20.99	20.92	20.86	21.01	20.59	20.16	3
		12	6	20.83	20.89	20.72	20.80	20.49	20.11	3
		12	13	20.71	20.79	20.78	20.79	20.45	20.01	3
		25	0	20.84	20.80	20.69	20.87	20.53	20.08	3
5M	256QAM	1	0	18.92	18.90	18.84	18.93	18.59	18.14	5
		1	12	18.77	18.75	18.69	18.78	18.44	17.99	5
		1	24	18.67	18.65	18.59	18.68	18.34	17.89	5
		12	0	18.95	18.93	18.87	18.96	18.62	18.17	5
		12	6	18.92	18.90	18.84	18.93	18.59	18.14	5
		12	13	18.94	18.92	18.86	18.95	18.61	18.16	5
		25	0	18.93	18.91	18.85	18.94	18.60	18.15	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.76	23.80	23.60	0
		1	50	23.52	23.56	23.36	0
		1	99	23.53	23.57	23.37	0
		50	0	22.59	22.66	22.43	1
		50	25	22.57	22.61	22.41	1
		50	50	22.61	22.65	22.45	1
		100	0	22.58	22.62	22.42	1
20M	16QAM	1	0	22.71	22.75	22.56	1
		1	50	22.44	22.50	22.31	1
		1	99	22.53	22.55	22.29	1
		50	0	21.52	21.56	21.40	2
		50	25	21.48	21.59	21.32	2
		50	50	21.57	21.60	21.38	2
		100	0	21.52	21.54	21.32	2
20M	64QAM	1	0	21.70	21.73	21.53	2
		1	50	21.46	21.56	21.35	2
		1	99	21.52	21.48	21.27	2
		50	0	20.51	20.58	20.38	3
		50	25	20.55	20.52	20.33	3
		50	50	20.59	20.57	20.41	3
		100	0	20.48	20.57	20.38	3
20M	256QAM	1	0	18.94	18.98	18.78	5
		1	50	18.82	18.86	18.66	5
		1	99	18.77	18.81	18.61	5
		50	0	18.61	18.65	18.45	5
		50	25	18.60	18.64	18.44	5
		50	50	18.64	18.68	18.48	5
		100	0	18.60	18.64	18.44	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.70	23.75	23.58	0
		1	37	23.48	23.52	23.35	0
		1	74	23.47	23.49	23.27	0
		36	0	22.58	22.59	22.36	1
		36	19	22.47	22.59	22.40	1
		36	39	22.59	22.58	22.42	1
		75	0	22.50	22.59	22.36	1
15M	16QAM	1	0	22.71	22.71	22.56	1
		1	37	22.47	22.53	22.27	1
		1	74	22.46	22.48	22.25	1
		36	0	21.48	21.51	21.35	2
		36	19	21.46	21.42	21.25	2
		36	39	21.56	21.55	21.42	2
		75	0	21.48	21.53	21.27	2
15M	64QAM	1	0	21.72	21.73	21.58	2
		1	37	21.39	21.37	21.32	2
		1	74	21.49	21.45	21.28	2
		36	0	20.46	20.60	20.41	3
		36	19	20.40	20.43	20.28	3
		36	39	20.52	20.59	20.35	3
		75	0	20.51	20.47	20.42	3
15M	256QAM	1	0	18.93	18.97	18.77	5
		1	37	18.81	18.85	18.65	5
		1	74	18.76	18.80	18.60	5
		36	0	18.60	18.64	18.44	5
		36	19	18.59	18.63	18.43	5
		36	39	18.63	18.67	18.47	5
		75	0	18.59	18.63	18.43	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	23.63	23.57	23.42	0
		1	24	23.44	23.38	23.17	0
		1	49	23.37	23.41	23.23	0
		25	0	22.34	22.54	22.25	1
		25	12	22.41	22.48	22.26	1
		25	25	22.56	22.59	22.31	1
		50	0	22.49	22.44	22.33	1
10M	16QAM	1	0	22.59	22.50	22.50	1
		1	24	22.37	22.42	22.16	1
		1	49	22.36	22.39	22.04	1
		25	0	21.43	21.42	21.16	2
		25	12	21.34	21.43	21.24	2
		25	25	21.46	21.50	21.21	2
		50	0	21.44	21.48	21.25	2
10M	64QAM	1	0	21.69	21.71	21.39	2
		1	24	21.30	21.39	21.27	2
		1	49	21.39	21.45	21.35	2
		25	0	20.51	20.54	20.20	3
		25	12	20.36	20.40	20.21	3
		25	25	20.49	20.49	20.19	3
		50	0	20.37	20.43	20.33	3
10M	256QAM	1	0	18.92	18.96	18.76	5
		1	24	18.80	18.84	18.64	5
		1	49	18.75	18.79	18.59	5
		25	0	18.59	18.63	18.43	5
		25	12	18.58	18.62	18.42	5
		25	25	18.62	18.66	18.46	5
		50	0	18.58	18.62	18.42	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.67	23.79	23.41	0
		1	12	23.37	23.46	23.16	0
		1	24	23.44	23.52	23.19	0
		12	0	22.50	22.49	22.24	1
		12	6	22.46	22.55	22.19	1
		12	13	22.46	22.57	22.23	1
		25	0	22.48	22.41	22.21	1
5M	16QAM	1	0	22.53	22.67	22.59	1
		1	12	22.28	22.31	22.20	1
		1	24	22.36	22.49	22.15	1
		12	0	21.39	21.40	21.16	2
		12	6	21.53	21.44	21.25	2
		12	13	21.53	21.38	21.26	2
		25	0	21.32	21.49	21.38	2
5M	64QAM	1	0	21.59	21.53	21.33	2
		1	12	21.40	21.42	21.08	2
		1	24	21.31	21.41	21.16	2
		12	0	20.45	20.36	20.28	3
		12	6	20.31	20.39	20.24	3
		12	13	20.44	20.41	20.32	3
		25	0	20.30	20.36	20.23	3
5M	256QAM	1	0	18.91	18.95	18.75	5
		1	12	18.79	18.83	18.63	5
		1	24	18.74	18.78	18.58	5
		12	0	18.58	18.62	18.42	5
		12	6	18.57	18.61	18.41	5
		12	13	18.61	18.65	18.45	5
		25	0	18.57	18.61	18.41	5

LTE Conducted Power (P-Sensor_Off_Ant0_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	23.60	23.56	23.56	0
		1	7	23.35	23.41	23.24	0
		1	14	23.41	23.49	23.26	0
		8	0	22.42	22.49	22.25	1
		8	3	22.43	22.42	22.31	1
		8	7	22.54	22.48	22.31	1
		15	0	22.46	22.55	22.29	1
3M	16QAM	1	0	22.62	22.62	22.37	1
		1	7	22.24	22.39	22.10	1
		1	14	22.22	22.33	22.16	1
		8	0	21.36	21.44	21.29	2
		8	3	21.34	21.40	21.22	2
		8	7	21.45	21.53	21.19	2
		15	0	21.28	21.34	21.23	2
3M	64QAM	1	0	21.60	21.67	21.34	2
		1	7	21.37	21.42	21.06	2
		1	14	21.34	21.34	21.11	2
		8	0	20.34	20.53	20.39	3
		8	3	20.34	20.41	20.21	3
		8	7	20.44	20.34	20.17	3
		15	0	20.30	20.44	20.16	3
3M	256QAM	1	0	18.90	18.94	18.74	5
		1	7	18.78	18.82	18.62	5
		1	14	18.73	18.77	18.57	5
		8	0	18.57	18.61	18.41	5
		8	3	18.56	18.60	18.40	5
		8	7	18.60	18.64	18.44	5
		15	0	18.56	18.60	18.40	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	23.65	23.69	23.42	0
		1	2	23.47	23.38	23.24	0
		1	5	23.50	23.44	23.34	0
		3	0	23.45	23.55	23.23	0
		3	1	23.50	23.54	23.18	0
		3	3	23.44	23.56	23.25	0
		6	0	22.52	22.51	22.36	1
1.4M	16QAM	1	0	22.51	22.64	22.34	1
		1	2	22.36	22.36	22.23	1
		1	5	22.29	22.38	22.22	1
		3	0	22.40	22.54	22.20	1
		3	1	22.43	22.42	22.28	1
		3	3	22.54	22.56	22.28	1
		6	0	21.41	21.36	21.29	2
1.4M	64QAM	1	0	21.61	21.63	21.42	2
		1	2	21.41	21.46	21.09	2
		1	5	21.38	21.34	21.17	2
		3	0	21.36	21.45	21.26	2
		3	1	21.48	21.51	21.34	2
		3	3	21.52	21.55	21.31	2
		6	0	20.47	20.48	20.30	3
1.4M	256QAM	1	0	18.89	18.93	18.73	5
		1	2	18.77	18.81	18.61	5
		1	5	18.72	18.76	18.56	5
		3	0	18.56	18.60	18.40	5
		3	1	18.55	18.59	18.39	5
		3	3	18.59	18.63	18.43	5
		6	0	18.55	18.59	18.39	5

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	12.59	12.54	12.52	0
		1	50	12.54	12.49	12.47	0
		1	99	12.47	12.42	12.40	0
		50	0	12.56	12.51	12.49	0
		50	25	12.52	12.47	12.45	0
		50	50	12.48	12.43	12.41	0
		100	0	12.45	12.40	12.38	0
20M	16QAM	1	0	12.58	12.53	12.51	0
		1	50	12.55	12.50	12.48	0
		1	99	12.48	12.43	12.41	0
		50	0	12.54	12.49	12.47	0
		50	25	12.51	12.46	12.44	0
		50	50	12.47	12.42	12.40	0
		100	0	12.43	12.38	12.36	0
20M	64QAM	1	0	12.56	12.51	12.49	0
		1	50	12.49	12.44	12.42	0
		1	99	12.46	12.41	12.39	0
		50	0	12.55	12.50	12.48	0
		50	25	12.51	12.46	12.44	0
		50	50	12.48	12.43	12.41	0
		100	0	12.44	12.39	12.37	0
20M	256QAM	1	0	12.57	12.52	12.50	0
		1	50	12.52	12.47	12.45	0
		1	99	12.48	12.43	12.41	0
		50	0	12.55	12.50	12.48	0
		50	25	12.52	12.47	12.45	0
		50	50	12.48	12.43	12.41	0
		100	0	12.45	12.40	12.38	0
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	12.52	12.45	12.51	0
		1	37	12.52	12.42	12.37	0
		1	74	12.41	12.36	12.34	0
		36	0	12.54	12.51	12.49	0
		36	19	12.48	12.37	12.45	0
		36	39	12.41	12.42	12.40	0
		75	0	12.41	12.36	12.32	0
15M	16QAM	1	0	12.57	12.44	12.49	0
		1	37	12.55	12.46	12.47	0
		1	74	12.46	12.39	12.31	0
		36	0	12.49	12.49	12.44	0
		36	19	12.44	12.43	12.36	0
		36	39	12.39	12.34	12.36	0
		75	0	12.35	12.37	12.31	0
15M	64QAM	1	0	12.50	12.50	12.47	0
		1	37	12.40	12.37	12.42	0
		1	74	12.41	12.41	12.31	0
		36	0	12.55	12.41	12.48	0
		36	19	12.41	12.46	12.36	0
		36	39	12.44	12.33	12.37	0
		75	0	12.39	12.31	12.28	0
15M	256QAM	1	0	12.51	12.43	12.44	0
		1	37	12.35	12.27	12.35	0
		1	74	12.25	12.21	12.25	0
		36	0	12.50	12.47	12.45	0
		36	19	12.29	12.22	12.33	0
		36	39	12.32	12.32	12.31	0
		75	0	12.28	12.25	12.24	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	12.52	12.32	12.42	0
		1	24	12.35	12.36	12.39	0
		1	49	12.35	12.29	12.23	0
		25	0	12.40	12.35	12.42	0
		25	12	12.41	12.35	12.40	0
		25	25	12.30	12.29	12.27	0
		50	0	12.23	12.27	12.26	0
10M	16QAM	1	0	12.39	12.47	12.39	0
		1	24	12.42	12.44	12.46	0
		1	49	12.38	12.27	12.29	0
		25	0	12.41	12.37	12.28	0
		25	12	12.42	12.40	12.40	0
		25	25	12.30	12.30	12.31	0
		50	0	12.32	12.21	12.17	0
10M	64QAM	1	0	12.43	12.36	12.28	0
		1	24	12.33	12.30	12.29	0
		1	49	12.27	12.19	12.35	0
		25	0	12.49	12.44	12.40	0
		25	12	12.33	12.35	12.37	0
		25	25	12.32	12.27	12.32	0
		50	0	12.33	12.29	12.22	0
10M	256QAM	1	0	12.49	12.32	12.45	0
		1	24	12.39	12.44	12.23	0
		1	49	12.36	12.36	12.34	0
		25	0	12.43	12.32	12.31	0
		25	12	12.44	12.39	12.22	0
		25	25	12.41	12.21	12.20	0
		50	0	12.31	12.26	12.16	0
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	12.54	12.32	12.47	0
		1	12	12.37	12.28	12.38	0
		1	24	12.36	12.21	12.24	0
		12	0	12.41	12.39	12.27	0
		12	6	12.45	12.42	12.34	0
		12	13	12.32	12.27	12.31	0
		25	0	12.34	12.38	12.23	0
5M	16QAM	1	0	12.42	12.47	12.27	0
		1	12	12.35	12.50	12.47	0
		1	24	12.33	12.24	12.24	0
		12	0	12.39	12.38	12.33	0
		12	6	12.45	12.35	12.28	0
		12	13	12.33	12.22	12.19	0
		25	0	12.34	12.19	12.17	0
5M	64QAM	1	0	12.41	12.29	12.42	0
		1	12	12.28	12.38	12.30	0
		1	24	12.35	12.26	12.23	0
		12	0	12.35	12.41	12.45	0
		12	6	12.28	12.30	12.37	0
		12	13	12.37	12.35	12.33	0
		25	0	12.37	12.20	12.15	0
5M	256QAM	1	0	12.46	12.40	12.43	0
		1	12	12.37	12.24	12.35	0
		1	24	12.45	12.28	12.35	0
		12	0	12.37	12.37	12.44	0
		12	6	12.36	12.39	12.21	0
		12	13	12.37	12.33	12.29	0
		25	0	12.39	12.24	12.25	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	12.53	12.36	12.35	0
		1	7	12.41	12.42	12.29	0
		1	14	12.34	12.34	12.25	0
		8	0	12.50	12.46	12.31	0
		8	3	12.45	12.33	12.30	0
		8	7	12.35	12.29	12.26	0
		15	0	12.33	12.16	12.31	0
3M	16QAM	1	0	12.49	12.40	12.28	0
		1	7	12.38	12.28	12.35	0
		1	14	12.30	12.37	12.21	0
		8	0	12.50	12.32	12.42	0
		8	3	12.41	12.40	12.36	0
		8	7	12.40	12.33	12.22	0
		15	0	12.26	12.23	12.25	0
3M	64QAM	1	0	12.46	12.49	12.30	0
		1	7	12.42	12.25	12.33	0
		1	14	12.36	12.30	12.25	0
		8	0	12.35	12.40	12.31	0
		8	3	12.33	12.43	12.29	0
		8	7	12.37	12.22	12.38	0
		15	0	12.24	12.24	12.17	0
3M	256QAM	1	0	12.38	12.28	12.44	0
		1	7	12.35	12.39	12.41	0
		1	14	12.30	12.36	12.24	0
		8	0	12.42	12.28	12.35	0
		8	3	12.41	12.31	12.27	0
		8	7	12.25	12.18	12.30	0
		15	0	12.27	12.28	12.16	0
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	12.56	12.44	12.30	0
		1	2	12.35	12.42	12.23	0
		1	5	12.32	12.21	12.23	0
		3	0	12.36	12.30	12.38	0
		3	1	12.40	12.25	12.37	0
		3	3	12.32	12.43	12.21	0
		6	0	12.32	12.19	12.32	0
1.4M	16QAM	1	0	12.46	12.48	12.40	0
		1	2	12.44	12.37	12.37	0
		1	5	12.30	12.40	12.30	0
		3	0	12.47	12.31	12.31	0
		3	1	12.35	12.28	12.22	0
		3	3	12.39	12.23	12.34	0
		6	0	12.21	12.26	12.20	0
1.4M	64QAM	1	0	12.48	12.29	12.39	0
		1	2	12.35	12.30	12.35	0
		1	5	12.30	12.19	12.24	0
		3	0	12.35	12.46	12.35	0
		3	1	12.46	12.29	12.35	0
		3	3	12.29	12.38	12.31	0
		6	0	12.30	12.19	12.26	0
1.4M	256QAM	1	0	12.41	12.35	12.38	0
		1	2	12.41	12.40	12.40	0
		1	5	12.35	12.27	12.25	0
		3	0	12.32	12.42	12.39	0
		3	1	12.42	12.30	12.26	0
		3	3	12.35	12.35	12.16	0
		6	0	12.34	12.33	12.22	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	12.42	12.53	12.42	0
		1	50	12.36	12.47	12.36	0
		1	99	12.31	12.42	12.31	0
		50	0	12.40	12.51	12.40	0
		50	25	12.35	12.46	12.35	0
		50	50	12.32	12.43	12.32	0
		100	0	12.29	12.40	12.29	0
20M	16QAM	1	0	12.40	12.51	12.40	0
		1	50	12.37	12.48	12.37	0
		1	99	12.31	12.42	12.31	0
		50	0	12.39	12.50	12.39	0
		50	25	12.36	12.47	12.36	0
		50	50	12.32	12.43	12.32	0
		100	0	12.28	12.39	12.28	0
20M	64QAM	1	0	12.40	12.51	12.40	0
		1	50	12.35	12.46	12.35	0
		1	99	12.31	12.42	12.31	0
		50	0	12.39	12.50	12.39	0
		50	25	12.34	12.45	12.34	0
		50	50	12.31	12.42	12.31	0
		100	0	12.27	12.38	12.27	0
20M	256QAM	1	0	12.41	12.52	12.41	0
		1	50	12.36	12.47	12.36	0
		1	99	12.31	12.42	12.31	0
		50	0	12.39	12.50	12.39	0
		50	25	12.35	12.46	12.35	0
		50	50	12.32	12.43	12.32	0
		100	0	12.28	12.39	12.28	0
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	12.38	12.45	12.42	0
		1	37	12.30	12.42	12.30	0
		1	74	12.30	12.36	12.22	0
		36	0	12.34	12.42	12.34	0
		36	19	12.30	12.46	12.30	0
		36	39	12.31	12.34	12.22	0
		75	0	12.22	12.36	12.22	0
15M	16QAM	1	0	12.35	12.41	12.39	0
		1	37	12.37	12.39	12.34	0
		1	74	12.23	12.41	12.23	0
		36	0	12.32	12.43	12.37	0
		36	19	12.36	12.45	12.27	0
		36	39	12.25	12.41	12.32	0
		75	0	12.19	12.32	12.26	0
15M	64QAM	1	0	12.32	12.45	12.32	0
		1	37	12.35	12.40	12.32	0
		1	74	12.26	12.34	12.24	0
		36	0	12.31	12.42	12.32	0
		36	19	12.28	12.35	12.30	0
		36	39	12.29	12.34	12.22	0
		75	0	12.22	12.33	12.25	0
15M	256QAM	1	0	12.34	12.41	12.26	0
		1	37	12.19	12.32	12.22	0
		1	74	12.09	12.25	12.13	0
		36	0	12.19	12.40	12.29	0
		36	19	12.22	12.35	12.19	0
		36	39	12.20	12.19	12.21	0
		75	0	12.13	12.29	12.11	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	12.36	12.39	12.20	0
		1	24	12.32	12.41	12.29	0
		1	49	12.23	12.24	12.27	0
		25	0	12.22	12.39	12.27	0
		25	12	12.14	12.39	12.19	0
		25	25	12.20	12.24	12.20	0
		50	0	12.18	12.31	12.22	0
10M	16QAM	1	0	12.26	12.37	12.23	0
		1	24	12.24	12.39	12.24	0
		1	49	12.15	12.37	12.20	0
		25	0	12.24	12.48	12.37	0
		25	12	12.17	12.33	12.21	0
		25	25	12.23	12.29	12.11	0
		50	0	12.19	12.26	12.14	0
10M	64QAM	1	0	12.24	12.30	12.17	0
		1	24	12.30	12.24	12.22	0
		1	49	12.16	12.31	12.10	0
		25	0	12.24	12.45	12.33	0
		25	12	12.27	12.26	12.24	0
		25	25	12.17	12.20	12.16	0
		50	0	12.18	12.24	12.18	0
10M	256QAM	1	0	12.26	12.35	12.20	0
		1	24	12.20	12.33	12.35	0
		1	49	12.14	12.34	12.14	0
		25	0	12.26	12.34	12.26	0
		25	12	12.24	12.36	12.18	0
		25	25	12.17	12.30	12.18	0
		50	0	12.22	12.38	12.27	0
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	12.33	12.46	12.33	0
		1	12	12.26	12.32	12.25	0
		1	24	12.20	12.38	12.16	0
		12	0	12.20	12.42	12.24	0
		12	6	12.16	12.36	12.22	0
		12	13	12.14	12.29	12.09	0
		25	0	12.27	12.23	12.20	0
5M	16QAM	1	0	12.31	12.42	12.27	0
		1	12	12.21	12.45	12.17	0
		1	24	12.23	12.32	12.27	0
		12	0	12.39	12.31	12.22	0
		12	6	12.32	12.24	12.19	0
		12	13	12.22	12.25	12.16	0
		25	0	12.07	12.31	12.19	0
5M	64QAM	1	0	12.37	12.49	12.32	0
		1	12	12.29	12.31	12.26	0
		1	24	12.19	12.30	12.17	0
		12	0	12.29	12.25	12.31	0
		12	6	12.23	12.26	12.17	0
		12	13	12.24	12.34	12.21	0
		25	0	12.17	12.28	12.10	0
5M	256QAM	1	0	12.32	12.34	12.26	0
		1	12	12.20	12.39	12.26	0
		1	24	12.16	12.28	12.18	0
		12	0	12.27	12.46	12.25	0
		12	6	12.24	12.34	12.16	0
		12	13	12.23	12.21	12.22	0
		25	0	12.19	12.30	12.12	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	12.35	12.37	12.21	0
		1	7	12.29	12.34	12.21	0
		1	14	12.22	12.26	12.20	0
		8	0	12.24	12.34	12.31	0
		8	3	12.31	12.25	12.32	0
		8	7	12.24	12.33	12.17	0
		15	0	12.09	12.37	12.16	0
3M	16QAM	1	0	12.24	12.42	12.29	0
		1	7	12.27	12.37	12.17	0
		1	14	12.10	12.33	12.20	0
		8	0	12.18	12.34	12.32	0
		8	3	12.25	12.35	12.30	0
		8	7	12.23	12.43	12.24	0
		15	0	12.19	12.20	12.20	0
3M	64QAM	1	0	12.27	12.49	12.26	0
		1	7	12.24	12.32	12.23	0
		1	14	12.07	12.18	12.15	0
		8	0	12.30	12.46	12.33	0
		8	3	12.28	12.40	12.30	0
		8	7	12.18	12.36	12.09	0
		15	0	12.14	12.23	12.14	0
3M	256QAM	1	0	12.30	12.38	12.36	0
		1	7	12.15	12.32	12.24	0
		1	14	12.28	12.28	12.09	0
		8	0	12.24	12.34	12.18	0
		8	3	12.13	12.42	12.25	0
		8	7	12.16	12.28	12.15	0
		15	0	12.21	12.23	12.21	0
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	12.21	12.41	12.23	0
		1	2	12.29	12.38	12.16	0
		1	5	12.19	12.21	12.23	0
		3	0	12.28	12.37	12.25	0
		3	1	12.18	12.25	12.19	0
		3	3	12.18	12.34	12.27	0
		6	0	12.15	12.27	12.11	0
1.4M	16QAM	1	0	12.27	12.44	12.28	0
		1	2	12.33	12.42	12.28	0
		1	5	12.25	12.33	12.18	0
		3	0	12.23	12.36	12.38	0
		3	1	12.21	12.39	12.22	0
		3	3	12.18	12.21	12.17	0
		6	0	12.23	12.25	12.23	0
1.4M	64QAM	1	0	12.26	12.41	12.37	0
		1	2	12.18	12.28	12.19	0
		1	5	12.15	12.29	12.24	0
		3	0	12.27	12.31	12.33	0
		3	1	12.16	12.30	12.20	0
		3	3	12.09	12.20	12.08	0
		6	0	12.19	12.28	12.13	0
1.4M	256QAM	1	0	12.24	12.33	12.19	0
		1	2	12.10	12.42	12.32	0
		1	5	12.17	12.31	12.21	0
		3	0	12.30	12.43	12.30	0
		3	1	12.18	12.23	12.20	0
		3	3	12.13	12.26	12.18	0
		6	0	12.17	12.31	12.12	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	17.39	17.37	17.27	0
		1	24	17.33	17.31	17.21	0
		1	49	17.27	17.25	17.15	0
		25	0	17.35	17.33	17.23	0
		25	12	17.29	17.27	17.17	0
		25	25	17.26	17.24	17.14	0
		50	0	17.24	17.22	17.12	0
10M	16QAM	1	0	17.38	17.36	17.26	0
		1	24	17.34	17.32	17.22	0
		1	49	17.28	17.26	17.16	0
		25	0	17.34	17.32	17.22	0
		25	12	17.31	17.29	17.19	0
		25	25	17.27	17.25	17.15	0
		50	0	17.24	17.22	17.12	0
10M	64QAM	1	0	17.36	17.37	17.27	0
		1	24	17.35	17.33	17.23	0
		1	49	17.29	17.27	17.17	0
		25	0	17.34	17.32	17.22	0
		25	12	17.32	17.30	17.20	0
		25	25	17.27	17.25	17.15	0
		50	0	17.24	17.22	17.12	0
10M	256QAM	1	0	17.37	17.35	17.25	0
		1	24	17.34	17.32	17.22	0
		1	49	17.27	17.25	17.15	0
		25	0	17.33	17.31	17.21	0
		25	12	17.31	17.29	17.19	0
		25	25	17.26	17.24	17.14	0
		50	0	17.22	17.20	17.10	0
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	17.30	17.29	17.26	0
		1	12	17.31	17.27	17.13	0
		1	24	17.25	17.18	17.11	0
		12	0	17.34	17.31	17.17	0
		12	6	17.21	17.26	17.13	0
		12	13	17.20	17.15	17.08	0
		25	0	17.17	17.20	17.04	0
5M	16QAM	1	0	17.34	17.30	17.26	0
		1	12	17.30	17.25	17.15	0
		1	24	17.24	17.22	17.08	0
		12	0	17.29	17.32	17.12	0
		12	6	17.28	17.22	17.17	0
		12	13	17.22	17.17	17.06	0
		25	0	17.20	17.16	17.05	0
5M	64QAM	1	0	17.30	17.32	17.18	0
		1	12	17.30	17.26	17.23	0
		1	24	17.25	17.27	17.13	0
		12	0	17.25	17.23	17.17	0
		12	6	17.22	17.30	17.10	0
		12	13	17.25	17.19	17.14	0
		25	0	17.24	17.12	17.05	0
5M	256QAM	1	0	17.12	17.30	17.11	0
		1	12	17.25	17.16	17.19	0
		1	24	17.13	17.15	17.04	0
		12	0	17.23	17.18	17.18	0
		12	6	17.24	17.15	17.12	0
		12	13	17.18	17.14	17.08	0
		25	0	17.06	17.12	16.99	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	17.29	17.26	17.06	0
		1	7	17.17	17.28	17.11	0
		1	14	17.18	17.13	16.92	0
		8	0	17.23	17.24	17.11	0
		8	3	17.16	17.24	17.04	0
		8	7	17.12	17.15	17.00	0
		15	0	17.12	17.05	17.03	0
3M	16QAM	1	0	17.29	17.12	17.12	0
		1	7	17.30	17.16	17.01	0
		1	14	17.11	17.20	17.05	0
		8	0	17.16	17.20	17.01	0
		8	3	17.09	17.09	17.10	0
		8	7	17.11	17.11	17.01	0
		15	0	17.20	17.05	17.06	0
3M	64QAM	1	0	17.30	17.22	17.14	0
		1	7	17.14	17.25	17.11	0
		1	14	17.24	17.21	17.05	0
		8	0	17.20	17.18	17.06	0
		8	3	17.12	17.24	16.99	0
		8	7	17.17	17.24	17.04	0
		15	0	17.06	17.12	17.02	0
3M	256QAM	1	0	17.16	17.19	17.12	0
		1	7	17.23	17.20	17.09	0
		1	14	17.24	17.15	17.03	0
		8	0	17.16	17.25	17.14	0
		8	3	17.22	17.08	17.00	0
		8	7	17.26	17.09	17.01	0
		15	0	17.12	17.03	17.05	0
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	17.22	17.26	17.20	0
		1	2	17.24	17.21	17.04	0
		1	5	17.22	17.23	17.04	0
		3	0	17.11	17.09	17.11	0
		3	1	17.14	17.11	17.09	0
		3	3	17.11	17.09	17.02	0
		6	0	17.10	17.10	17.05	0
1.4M	16QAM	1	0	17.21	17.19	17.14	0
		1	2	17.22	17.20	17.11	0
		1	5	17.08	17.16	16.97	0
		3	0	17.32	17.25	17.09	0
		3	1	17.24	17.24	17.13	0
		3	3	17.13	17.18	17.07	0
		6	0	17.09	17.07	16.98	0
1.4M	64QAM	1	0	17.17	17.20	17.23	0
		1	2	17.19	17.19	17.12	0
		1	5	17.20	17.18	16.99	0
		3	0	17.15	17.17	17.21	0
		3	1	17.15	17.13	17.01	0
		3	3	17.20	17.08	17.00	0
		6	0	17.20	17.12	16.97	0
1.4M	256QAM	1	0	17.22	17.21	17.16	0
		1	2	17.22	17.25	17.00	0
		1	5	17.12	17.16	17.07	0
		3	0	17.34	17.11	17.16	0
		3	1	17.22	17.29	17.02	0
		3	3	17.25	17.12	17.05	0
		6	0	17.13	17.02	17.09	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	9.20	9.24	9.15	0
		1	50	9.18	9.19	9.10	0
		1	99	9.14	9.15	9.06	0
		50	0	9.19	9.20	9.11	0
		50	25	9.15	9.16	9.07	0
		50	50	9.13	9.14	9.05	0
		100	0	9.10	9.11	9.02	0
20M	16QAM	1	0	9.21	9.22	9.13	0
		1	50	9.17	9.18	9.09	0
		1	99	9.14	9.15	9.06	0
		50	0	9.20	9.21	9.12	0
		50	25	9.15	9.16	9.07	0
		50	50	9.12	9.13	9.04	0
		100	0	9.09	9.10	9.01	0
20M	64QAM	1	0	9.20	9.21	9.12	0
		1	50	9.16	9.17	9.08	0
		1	99	9.13	9.14	9.05	0
		50	0	9.19	9.20	9.11	0
		50	25	9.15	9.16	9.07	0
		50	50	9.13	9.14	9.05	0
		100	0	9.11	9.12	9.03	0
20M	256QAM	1	0	9.20	9.21	9.12	0
		1	50	9.16	9.17	9.08	0
		1	99	9.12	9.13	9.04	0
		50	0	9.18	9.19	9.10	0
		50	25	9.14	9.15	9.06	0
		50	50	9.13	9.14	9.05	0
		100	0	9.09	9.10	9.01	0
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	9.20	9.16	9.13	0
		1	37	9.10	9.11	8.99	0
		1	74	9.13	9.12	9.04	0
		36	0	9.13	9.18	9.05	0
		36	19	9.12	9.15	9.07	0
		36	39	9.03	9.03	8.95	0
		75	0	9.05	9.10	8.91	0
15M	16QAM	1	0	9.13	9.12	9.12	0
		1	37	9.13	9.11	9.04	0
		1	74	9.03	9.06	8.97	0
		36	0	9.16	9.12	9.02	0
		36	19	9.12	9.12	9.01	0
		36	39	9.04	9.05	8.97	0
		75	0	9.02	9.09	8.98	0
15M	64QAM	1	0	9.14	9.18	9.10	0
		1	37	9.14	9.14	9.00	0
		1	74	9.04	9.10	8.99	0
		36	0	9.10	9.16	9.09	0
		36	19	9.12	9.07	9.00	0
		36	39	9.05	9.07	9.00	0
		75	0	9.07	9.00	8.92	0
15M	256QAM	1	0	8.95	8.98	9.04	0
		1	37	9.06	9.08	8.96	0
		1	74	9.05	8.93	8.95	0
		36	0	9.03	9.08	8.90	0
		36	19	8.99	9.06	8.93	0
		36	39	9.07	9.00	8.89	0
		75	0	9.02	9.01	8.80	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	9.13	9.19	9.10	0
		1	24	9.08	9.14	9.06	0
		1	49	9.08	9.12	9.02	0
		25	0	9.19	9.15	9.12	0
		25	12	9.07	9.14	9.01	0
		25	25	9.04	9.10	9.02	0
		50	0	9.05	9.04	8.91	0
10M	16QAM	1	0	9.12	9.14	9.11	0
		1	24	9.12	9.11	9.07	0
		1	49	9.10	9.11	8.97	0
		25	0	9.19	9.18	9.08	0
		25	12	9.07	9.07	9.05	0
		25	25	9.03	9.04	9.00	0
		50	0	9.09	9.03	8.97	0
10M	64QAM	1	0	9.18	9.11	9.09	0
		1	24	9.11	9.11	9.08	0
		1	49	9.06	9.09	9.01	0
		25	0	9.14	9.19	9.01	0
		25	12	9.07	9.15	8.99	0
		25	25	9.06	9.05	9.01	0
		50	0	9.02	9.08	8.98	0
10M	256QAM	1	0	9.07	9.02	8.98	0
		1	24	8.98	9.04	9.02	0
		1	49	9.06	9.06	8.79	0
		25	0	9.06	9.15	8.91	0
		25	12	9.03	8.96	8.96	0
		25	25	8.97	8.98	8.87	0
		50	0	8.99	8.99	8.88	0
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	9.18	9.13	9.13	0
		1	12	9.11	9.11	9.07	0
		1	24	9.12	9.08	8.99	0
		12	0	9.15	9.15	9.03	0
		12	6	9.10	9.15	9.00	0
		12	13	9.03	9.13	9.03	0
		25	0	9.01	9.02	8.95	0
5M	16QAM	1	0	9.18	9.12	9.03	0
		1	12	9.13	9.07	8.99	0
		1	24	9.05	9.08	9.00	0
		12	0	9.09	9.16	9.03	0
		12	6	9.05	9.07	9.03	0
		12	13	9.13	9.06	9.03	0
		25	0	9.03	9.09	9.01	0
5M	64QAM	1	0	9.15	9.16	9.09	0
		1	12	9.07	9.10	9.07	0
		1	24	9.09	9.06	8.95	0
		12	0	9.15	9.12	9.03	0
		12	6	9.09	9.12	9.06	0
		12	13	9.11	9.05	8.97	0
		25	0	9.00	9.09	8.97	0
5M	256QAM	1	0	8.98	9.08	8.95	0
		1	12	9.01	9.12	8.90	0
		1	24	8.94	8.92	8.99	0
		12	0	9.00	9.05	8.95	0
		12	6	9.03	9.03	9.03	0
		12	13	9.05	8.98	8.87	0
		25	0	8.98	8.93	8.90	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	17.84	17.81	17.70	0
		1	24	17.78	17.75	17.64	0
		1	49	17.72	17.69	17.58	0
		25	0	17.82	17.79	17.68	0
		25	12	17.75	17.72	17.61	0
		25	25	17.71	17.68	17.57	0
		50	0	17.67	17.64	17.53	0
10M	16QAM	1	0	17.82	17.79	17.68	0
		1	24	17.76	17.73	17.62	0
		1	49	17.71	17.68	17.57	0
		25	0	17.81	17.78	17.67	0
		25	12	17.76	17.73	17.62	0
		25	25	17.70	17.67	17.56	0
		50	0	17.66	17.63	17.52	0
10M	64QAM	1	0	17.82	17.79	17.68	0
		1	24	17.76	17.73	17.62	0
		1	49	17.69	17.66	17.55	0
		25	0	17.79	17.76	17.65	0
		25	12	17.75	17.72	17.61	0
		25	25	17.72	17.69	17.58	0
		50	0	17.67	17.64	17.53	0
10M	256QAM	1	0	17.83	17.80	17.69	0
		1	24	17.78	17.75	17.64	0
		1	49	17.72	17.69	17.58	0
		25	0	17.80	17.77	17.66	0
		25	12	17.76	17.73	17.62	0
		25	25	17.71	17.68	17.57	0
		50	0	17.67	17.64	17.53	0
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	17.76	17.79	17.61	0
		1	12	17.77	17.72	17.63	0
		1	24	17.68	17.59	17.50	0
		12	0	17.74	17.76	17.65	0
		12	6	17.68	17.67	17.52	0
		12	13	17.65	17.63	17.53	0
		25	0	17.61	17.58	17.47	0
5M	16QAM	1	0	17.80	17.79	17.63	0
		1	12	17.70	17.65	17.55	0
		1	24	17.69	17.66	17.49	0
		12	0	17.77	17.68	17.66	0
		12	6	17.69	17.68	17.57	0
		12	13	17.61	17.58	17.46	0
		25	0	17.65	17.59	17.52	0
5M	64QAM	1	0	17.79	17.73	17.58	0
		1	12	17.73	17.63	17.55	0
		1	24	17.63	17.64	17.48	0
		12	0	17.79	17.75	17.60	0
		12	6	17.67	17.72	17.56	0
		12	13	17.67	17.59	17.48	0
		25	0	17.62	17.58	17.43	0
5M	256QAM	1	0	17.82	17.74	17.60	0
		1	12	17.74	17.71	17.54	0
		1	24	17.65	17.67	17.55	0
		12	0	17.72	17.75	17.61	0
		12	6	17.67	17.63	17.60	0
		12	13	17.61	17.66	17.52	0
		25	0	17.67	17.56	17.50	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	17.74	17.81	17.65	0
		1	7	17.70	17.70	17.55	0
		1	14	17.67	17.65	17.58	0
		8	0	17.80	17.71	17.65	0
		8	3	17.71	17.66	17.52	0
		8	7	17.71	17.64	17.52	0
		15	0	17.64	17.55	17.49	0
3M	16QAM	1	0	17.79	17.77	17.61	0
		1	7	17.66	17.72	17.53	0
		1	14	17.62	17.66	17.47	0
		8	0	17.80	17.71	17.61	0
		8	3	17.76	17.70	17.55	0
		8	7	17.68	17.64	17.52	0
		15	0	17.63	17.55	17.43	0
3M	64QAM	1	0	17.72	17.69	17.64	0
		1	7	17.76	17.64	17.61	0
		1	14	17.62	17.60	17.50	0
		8	0	17.72	17.71	17.55	0
		8	3	17.72	17.71	17.60	0
		8	7	17.65	17.64	17.49	0
		15	0	17.63	17.58	17.43	0
3M	256QAM	1	0	17.77	17.80	17.68	0
		1	7	17.78	17.70	17.62	0
		1	14	17.66	17.66	17.54	0
		8	0	17.71	17.71	17.61	0
		8	3	17.70	17.63	17.56	0
		8	7	17.71	17.61	17.57	0
		15	0	17.57	17.64	17.48	0
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	17.83	17.76	17.64	0
		1	2	17.72	17.68	17.64	0
		1	5	17.71	17.68	17.53	0
		3	0	17.75	17.70	17.66	0
		3	1	17.65	17.68	17.57	0
		3	3	17.68	17.61	17.56	0
		6	0	17.58	17.58	17.43	0
1.4M	16QAM	1	0	17.74	17.69	17.61	0
		1	2	17.75	17.66	17.56	0
		1	5	17.67	17.64	17.47	0
		3	0	17.78	17.77	17.58	0
		3	1	17.75	17.69	17.52	0
		3	3	17.70	17.58	17.47	0
		6	0	17.58	17.60	17.50	0
1.4M	64QAM	1	0	17.79	17.74	17.63	0
		1	2	17.71	17.72	17.59	0
		1	5	17.69	17.61	17.50	0
		3	0	17.72	17.67	17.65	0
		3	1	17.66	17.70	17.61	0
		3	3	17.72	17.60	17.50	0
		6	0	17.64	17.60	17.52	0
1.4M	256QAM	1	0	17.81	17.80	17.66	0
		1	2	17.74	17.68	17.56	0
		1	5	17.70	17.66	17.57	0
		3	0	17.77	17.76	17.62	0
		3	1	17.66	17.65	17.58	0
		3	3	17.62	17.61	17.50	0
		6	0	17.66	17.57	17.47	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		16.94		0
		1	24		16.89		0
		1	49		16.81		0
		25	0		16.90		0
		25	12		16.83		0
		25	25		16.78		0
		50	0		16.71		0
10M	16QAM	1	0		16.92		0
		1	24		16.86		0
		1	49		16.80		0
		25	0		16.87		0
		25	12		16.81		0
		25	25		16.77		0
		50	0		16.73		0
10M	64QAM	1	0		16.91		0
		1	24		16.83		0
		1	49		16.79		0
		25	0		16.86		0
		25	12		16.81		0
		25	25		16.75		0
		50	0		16.71		0
10M	256QAM	1	0		16.90		0
		1	24		16.84		0
		1	49		16.79		0
		25	0		16.87		0
		25	12		16.80		0
		25	25		16.74		0
		50	0		16.71		0
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	16.83	16.88	16.91	0
		1	12	16.78	16.83	16.88	0
		1	24	16.73	16.78	16.83	0
		12	0	16.80	16.85	16.90	0
		12	6	16.76	16.81	16.86	0
		12	13	16.72	16.77	16.82	0
		25	0	16.68	16.73	16.78	0
5M	16QAM	1	0	16.81	16.86	16.91	0
		1	12	16.77	16.82	16.87	0
		1	24	16.70	16.75	16.80	0
		12	0	16.78	16.83	16.88	0
		12	6	16.73	16.78	16.83	0
		12	13	16.69	16.74	16.79	0
		25	0	16.65	16.70	16.75	0
5M	64QAM	1	0	16.81	16.85	16.90	0
		1	12	16.76	16.81	16.86	0
		1	24	16.71	16.76	16.81	0
		12	0	16.77	16.82	16.87	0
		12	6	16.72	16.77	16.82	0
		12	13	16.69	16.74	16.79	0
		25	0	16.63	16.68	16.73	0
5M	256QAM	1	0	16.80	16.85	16.90	0
		1	12	16.77	16.81	16.87	0
		1	24	16.70	16.75	16.80	0
		12	0	16.77	16.82	16.87	0
		12	6	16.73	16.78	16.83	0
		12	13	16.69	16.74	16.79	0
		25	0	16.63	16.68	16.73	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		16.86		0
		1	24		16.80		0
		1	49		16.74		0
		25	0		16.83		0
		25	12		16.78		0
		25	25		16.74		0
		50	0		16.70		0
10M	16QAM	1	0		16.84		0
		1	24		16.78		0
		1	49		16.73		0
		25	0		16.82		0
		25	12		16.77		0
		25	25		16.74		0
		50	0		16.68		0
10M	64QAM	1	0		16.83		0
		1	24		16.77		0
		1	49		16.71		0
		25	0		16.81		0
		25	12		16.77		0
		25	25		16.72		0
		50	0		16.68		0
10M	256QAM	1	0		16.80		0
		1	24		16.78		0
		1	49		16.73		0
		25	0		16.78		0
		25	12		16.74		0
		25	25		16.71		0
		50	0		16.67		0
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	16.69	16.79	16.77	0
		1	12	16.63	16.73	16.71	0
		1	24	16.59	16.69	16.67	0
		12	0	16.65	16.75	16.73	0
		12	6	16.60	16.70	16.68	0
		12	13	16.54	16.64	16.62	0
		25	0	16.50	16.60	16.58	0
5M	16QAM	1	0	16.67	16.77	16.75	0
		1	12	16.63	16.72	16.70	0
		1	24	16.58	16.68	16.66	0
		12	0	16.65	16.75	16.73	0
		12	6	16.61	16.70	16.69	0
		12	13	16.57	16.67	16.65	0
		25	0	16.52	16.62	16.60	0
5M	64QAM	1	0	16.65	16.75	16.73	0
		1	12	16.61	16.71	16.68	0
		1	24	16.55	16.65	16.63	0
		12	0	16.63	16.73	16.71	0
		12	6	16.60	16.70	16.68	0
		12	13	16.55	16.65	16.63	0
		25	0	16.51	16.60	16.59	0
5M	256QAM	1	0	16.62	16.72	16.70	0
		1	12	16.60	16.70	16.68	0
		1	24	16.57	16.66	16.64	0
		12	0	16.61	16.71	16.69	0
		12	6	16.57	16.67	16.65	0
		12	13	16.54	16.64	16.62	0
		25	0	16.52	16.62	16.60	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	17.79	17.69	17.66	0
		1	24	17.72	17.62	17.59	0
		1	49	17.66	17.56	17.53	0
		25	0	17.75	17.65	17.62	0
		25	12	17.69	17.59	17.56	0
		25	25	17.66	17.56	17.53	0
		50	0	17.63	17.53	17.50	0
10M	16QAM	1	0	17.76	17.66	17.63	0
		1	24	17.70	17.60	17.57	0
		1	49	17.64	17.54	17.51	0
		25	0	17.72	17.62	17.59	0
		25	12	17.68	17.58	17.55	0
		25	25	17.63	17.53	17.50	0
		50	0	17.60	17.50	17.47	0
10M	64QAM	1	0	17.75	17.65	17.62	0
		1	24	17.68	17.58	17.55	0
		1	49	17.64	17.54	17.51	0
		25	0	17.73	17.63	17.60	0
		25	12	17.70	17.60	17.57	0
		25	25	17.66	17.56	17.53	0
		50	0	17.60	17.50	17.47	0
10M	256QAM	1	0	17.74	17.64	17.61	0
		1	24	17.70	17.60	17.57	0
		1	49	17.64	17.54	17.51	0
		25	0	17.70	17.60	17.57	0
		25	12	17.67	17.57	17.54	0
		25	25	17.63	17.53	17.50	0
		50	0	17.59	17.49	17.46	0
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	17.76	17.67	17.56	0
		1	12	17.62	17.54	17.50	0
		1	24	17.66	17.56	17.50	0
		12	0	17.69	17.61	17.53	0
		12	6	17.65	17.56	17.56	0
		12	13	17.64	17.54	17.43	0
		25	0	17.54	17.52	17.47	0
5M	16QAM	1	0	17.68	17.57	17.57	0
		1	12	17.63	17.53	17.51	0
		1	24	17.57	17.52	17.43	0
		12	0	17.69	17.58	17.53	0
		12	6	17.58	17.57	17.53	0
		12	13	17.56	17.53	17.47	0
		25	0	17.56	17.50	17.43	0
5M	64QAM	1	0	17.67	17.57	17.54	0
		1	12	17.60	17.56	17.55	0
		1	24	17.59	17.50	17.45	0
		12	0	17.70	17.61	17.53	0
		12	6	17.64	17.54	17.48	0
		12	13	17.61	17.46	17.48	0
		25	0	17.55	17.40	17.47	0
5M	256QAM	1	0	17.67	17.64	17.58	0
		1	12	17.69	17.59	17.55	0
		1	24	17.55	17.45	17.45	0
		12	0	17.64	17.55	17.53	0
		12	6	17.60	17.55	17.54	0
		12	13	17.56	17.52	17.48	0
		25	0	17.54	17.39	17.42	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	12.56	12.54	12.51	0
		1	50	12.51	12.49	12.46	0
		1	99	12.46	12.44	12.41	0
		50	0	12.54	12.52	12.49	0
		50	25	12.49	12.47	12.44	0
		50	50	12.45	12.43	12.40	0
		100	0	12.42	12.40	12.37	0
20M	16QAM	1	0	12.54	12.52	12.49	0
		1	50	12.48	12.46	12.43	0
		1	99	12.43	12.41	12.38	0
		50	0	12.52	12.50	12.47	0
		50	25	12.46	12.44	12.41	0
		50	50	12.43	12.41	12.38	0
		100	0	12.39	12.37	12.34	0
20M	64QAM	1	0	12.53	12.51	12.48	0
		1	50	12.47	12.45	12.42	0
		1	99	12.40	12.38	12.35	0
		50	0	12.50	12.48	12.45	0
		50	25	12.44	12.42	12.39	0
		50	50	12.30	12.28	12.25	0
		100	0	12.37	12.35	12.32	0
20M	256QAM	1	0	12.53	12.51	12.48	0
		1	50	12.46	12.44	12.41	0
		1	99	12.42	12.40	12.37	0
		50	0	12.51	12.49	12.46	0
		50	25	12.46	12.44	12.41	0
		50	50	12.43	12.41	12.38	0
		100	0	12.38	12.36	12.33	0
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	12.42	12.42	12.47	0
		1	37	12.48	12.43	12.43	0
		1	74	12.38	12.41	12.38	0
		36	0	12.46	12.40	12.39	0
		36	19	12.42	12.37	12.36	0
		36	39	12.41	12.32	12.30	0
		75	0	12.37	12.32	12.27	0
15M	16QAM	1	0	12.48	12.48	12.40	0
		1	37	12.39	12.44	12.41	0
		1	74	12.36	12.37	12.32	0
		36	0	12.47	12.47	12.40	0
		36	19	12.40	12.35	12.37	0
		36	39	12.24	12.25	12.20	0
		75	0	12.30	12.27	12.30	0
15M	64QAM	1	0	12.44	12.48	12.40	0
		1	37	12.38	12.36	12.32	0
		1	74	12.35	12.30	12.37	0
		36	0	12.45	12.46	12.43	0
		36	19	12.46	12.44	12.31	0
		36	39	12.37	12.40	12.29	0
		75	0	12.32	12.34	12.25	0
15M	256QAM	1	0	12.35	12.30	12.39	0
		1	37	12.25	12.22	12.34	0
		1	74	12.31	12.28	12.24	0
		36	0	12.49	12.41	12.44	0
		36	19	12.32	12.30	12.26	0
		36	39	12.24	12.27	12.31	0
		75	0	12.26	12.16	12.18	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	12.42	12.51	12.44	0
		1	24	12.38	12.44	12.37	0
		1	49	12.41	12.34	12.36	0
		25	0	12.52	12.47	12.46	0
		25	12	12.41	12.41	12.35	0
		25	25	12.35	12.41	12.28	0
		50	0	12.30	12.33	12.28	0
10M	16QAM	1	0	12.42	12.42	12.46	0
		1	24	12.42	12.43	12.34	0
		1	49	12.31	12.33	12.28	0
		25	0	12.43	12.41	12.39	0
		25	12	12.36	12.41	12.33	0
		25	25	12.26	12.18	12.21	0
		50	0	12.36	12.35	12.32	0
10M	64QAM	1	0	12.45	12.43	12.38	0
		1	24	12.42	12.42	12.39	0
		1	49	12.37	12.30	12.27	0
		25	0	12.49	12.49	12.45	0
		25	12	12.38	12.39	12.38	0
		25	25	12.33	12.37	12.37	0
		50	0	12.35	12.32	12.25	0
10M	256QAM	1	0	12.29	12.32	12.40	0
		1	24	12.40	12.29	12.28	0
		1	49	12.28	12.30	12.31	0
		25	0	12.39	12.37	12.27	0
		25	12	12.32	12.35	12.26	0
		25	25	12.23	12.32	12.36	0
		50	0	12.21	12.21	12.16	0
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	12.43	12.47	12.48	0
		1	12	12.43	12.43	12.41	0
		1	24	12.37	12.40	12.38	0
		12	0	12.44	12.48	12.40	0
		12	6	12.41	12.37	12.39	0
		12	13	12.34	12.33	12.30	0
		25	0	12.36	12.31	12.32	0
5M	16QAM	1	0	12.44	12.50	12.41	0
		1	12	12.44	12.44	12.41	0
		1	24	12.32	12.36	12.34	0
		12	0	12.43	12.43	12.44	0
		12	6	12.35	12.38	12.38	0
		12	13	12.25	12.26	12.23	0
		25	0	12.37	12.29	12.22	0
5M	64QAM	1	0	12.46	12.46	12.41	0
		1	12	12.43	12.39	12.35	0
		1	24	12.32	12.31	12.34	0
		12	0	12.45	12.40	12.41	0
		12	6	12.43	12.44	12.32	0
		12	13	12.34	12.38	12.33	0
		25	0	12.33	12.31	12.23	0
5M	256QAM	1	0	12.36	12.39	12.44	0
		1	12	12.28	12.25	12.31	0
		1	24	12.40	12.25	12.29	0
		12	0	12.37	12.38	12.33	0
		12	6	12.32	12.31	12.20	0
		12	13	12.39	12.35	12.27	0
		25	0	12.30	12.27	12.24	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	12.49	12.46	12.44	0
		1	7	12.38	12.39	12.40	0
		1	14	12.38	12.41	12.36	0
		8	0	12.48	12.41	12.46	0
		8	3	12.36	12.35	12.33	0
		8	7	12.34	12.37	12.34	0
		15	0	12.36	12.36	12.29	0
3M	16QAM	1	0	12.50	12.43	12.48	0
		1	7	12.42	12.35	12.42	0
		1	14	12.37	12.31	12.30	0
		8	0	12.46	12.47	12.39	0
		8	3	12.39	12.33	12.31	0
		8	7	12.20	12.22	12.24	0
		15	0	12.36	12.34	12.22	0
3M	64QAM	1	0	12.48	12.48	12.39	0
		1	7	12.44	12.35	12.39	0
		1	14	12.37	12.32	12.29	0
		8	0	12.47	12.49	12.36	0
		8	3	12.37	12.40	12.41	0
		8	7	12.41	12.37	12.31	0
		15	0	12.35	12.28	12.33	0
3M	256QAM	1	0	12.36	12.46	12.29	0
		1	7	12.45	12.29	12.27	0
		1	14	12.27	12.23	12.24	0
		8	0	12.31	12.38	12.39	0
		8	3	12.36	12.23	12.39	0
		8	7	12.34	12.28	12.22	0
		15	0	12.35	12.27	12.12	0
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	12.45	12.48	12.44	0
		1	2	12.40	12.45	12.43	0
		1	5	12.39	12.34	12.28	0
		3	0	12.45	12.41	12.46	0
		3	1	12.41	12.37	12.38	0
		3	3	12.34	12.34	12.31	0
		6	0	12.30	12.28	12.33	0
1.4M	16QAM	1	0	12.49	12.48	12.40	0
		1	2	12.44	12.38	12.40	0
		1	5	12.36	12.37	12.29	0
		3	0	12.47	12.38	12.42	0
		3	1	12.40	12.35	12.35	0
		3	3	12.28	12.27	12.24	0
		6	0	12.30	12.26	12.23	0
1.4M	64QAM	1	0	12.40	12.47	12.47	0
		1	2	12.36	12.39	12.31	0
		1	5	12.36	12.30	12.30	0
		3	0	12.50	12.49	12.45	0
		3	1	12.36	12.38	12.38	0
		3	3	12.37	12.31	12.32	0
		6	0	12.32	12.27	12.29	0
1.4M	256QAM	1	0	12.40	12.38	12.38	0
		1	2	12.42	12.39	12.33	0
		1	5	12.29	12.23	12.28	0
		3	0	12.44	12.35	12.44	0
		3	1	12.31	12.29	12.31	0
		3	3	12.36	12.28	12.31	0
		6	0	12.20	12.20	12.17	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	17.64	17.66	17.57	0
		1	37	17.54	17.56	17.47	0
		1	74	17.49	17.51	17.42	0
		36	0	17.62	17.64	17.55	0
		36	19	16.57	16.59	16.50	0
		36	39	17.51	17.53	17.44	0
		75	0	17.47	17.49	17.40	0
15M	16QAM	1	0	17.62	17.64	17.55	0
		1	37	17.53	17.55	17.46	0
		1	74	17.45	17.47	17.38	0
		36	0	17.59	17.61	17.52	0
		36	19	17.55	17.57	17.48	0
		36	39	17.50	17.52	17.43	0
		75	0	17.44	17.46	17.37	0
15M	64QAM	1	0	17.61	17.63	17.54	0
		1	37	17.52	17.54	17.45	0
		1	74	17.45	17.47	17.38	0
		36	0	17.60	17.62	17.53	0
		36	19	17.55	17.57	17.48	0
		36	39	17.49	17.51	17.42	0
		75	0	17.43	17.45	17.36	0
15M	256QAM	1	0	17.58	17.60	17.51	0
		1	37	17.52	17.54	17.45	0
		1	74	17.45	17.47	17.38	0
		36	0	17.57	17.59	17.50	0
		36	19	17.52	17.54	17.45	0
		36	39	17.49	17.51	17.42	0
		75	0	17.44	17.46	17.37	0
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	17.59	17.57	17.50	0
		1	24	17.46	17.54	17.38	0
		1	49	17.42	17.46	17.38	0
		25	0	17.49	17.51	17.49	0
		25	12	17.48	17.54	17.45	0
		25	25	17.49	17.48	17.41	0
		50	0	17.38	17.38	17.34	0
10M	16QAM	1	0	17.56	17.59	17.45	0
		1	24	17.49	17.52	17.35	0
		1	49	17.37	17.41	17.34	0
		25	0	17.58	17.58	17.48	0
		25	12	17.47	17.52	17.45	0
		25	25	17.46	17.45	17.33	0
		50	0	17.40	17.35	17.31	0
10M	64QAM	1	0	17.48	17.57	17.44	0
		1	24	17.48	17.50	17.43	0
		1	49	17.45	17.46	17.35	0
		25	0	17.54	17.49	17.44	0
		25	12	17.43	17.44	17.35	0
		25	25	17.44	17.50	17.38	0
		50	0	17.41	17.46	17.37	0
10M	256QAM	1	0	17.44	17.54	17.27	0
		1	24	17.33	17.44	17.26	0
		1	49	17.32	17.30	17.24	0
		25	0	17.48	17.42	17.46	0
		25	12	17.50	17.34	17.35	0
		25	25	17.40	17.40	17.31	0
		50	0	17.42	17.40	17.26	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	17.61	17.56	17.49	0
		1	12	17.43	17.47	17.38	0
		1	24	17.35	17.45	17.34	0
		12	0	17.52	17.53	17.44	0
		12	6	17.54	17.57	17.44	0
		12	13	17.49	17.46	17.35	0
		25	0	17.38	17.39	17.33	0
5M	16QAM	1	0	17.57	17.58	17.46	0
		1	12	17.49	17.44	17.39	0
		1	24	17.41	17.45	17.38	0
		12	0	17.51	17.59	17.45	0
		12	6	17.47	17.55	17.47	0
		12	13	17.47	17.41	17.33	0
		25	0	17.35	17.37	17.26	0
5M	64QAM	1	0	17.53	17.60	17.48	0
		1	12	17.49	17.44	17.39	0
		1	24	17.45	17.38	17.31	0
		12	0	17.55	17.58	17.43	0
		12	6	17.48	17.46	17.38	0
		12	13	17.42	17.43	17.41	0
		25	0	17.36	17.41	17.32	0
5M	256QAM	1	0	17.44	17.50	17.33	0
		1	12	17.43	17.33	17.33	0
		1	24	17.36	17.32	17.23	0
		12	0	17.47	17.49	17.43	0
		12	6	17.43	17.39	17.27	0
		12	13	17.40	17.29	17.22	0
		25	0	17.34	17.32	17.25	0
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	17.57	17.60	17.47	0
		1	7	17.47	17.45	17.38	0
		1	14	17.35	17.37	17.36	0
		8	0	17.50	17.58	17.42	0
		8	3	17.49	17.50	17.39	0
		8	7	17.43	17.52	17.34	0
		15	0	17.41	17.43	17.36	0
3M	16QAM	1	0	17.55	17.53	17.51	0
		1	7	17.50	17.45	17.42	0
		1	14	17.37	17.38	17.32	0
		8	0	17.60	17.50	17.49	0
		8	3	17.50	17.51	17.47	0
		8	7	17.39	17.49	17.35	0
		15	0	17.34	17.45	17.26	0
3M	64QAM	1	0	17.48	17.51	17.46	0
		1	7	17.42	17.54	17.40	0
		1	14	17.40	17.39	17.33	0
		8	0	17.54	17.56	17.50	0
		8	3	17.48	17.44	17.38	0
		8	7	17.49	17.46	17.32	0
		15	0	17.41	17.39	17.34	0
3M	256QAM	1	0	17.44	17.52	17.48	0
		1	7	17.40	17.45	17.43	0
		1	14	17.32	17.34	17.30	0
		8	0	17.45	17.47	17.36	0
		8	3	17.36	17.37	17.28	0
		8	7	17.30	17.32	17.29	0
		15	0	17.32	17.27	17.25	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	17.60	17.56	17.54	0
		1	2	17.48	17.53	17.36	0
		1	5	17.41	17.37	17.38	0
		3	0	17.58	17.56	17.46	0
		3	1	17.49	17.54	17.40	0
		3	3	17.49	17.42	17.40	0
		6	0	17.41	17.46	17.36	0
1.4M	16QAM	1	0	17.55	17.52	17.52	0
		1	2	17.49	17.51	17.37	0
		1	5	17.39	17.38	17.36	0
		3	0	17.57	17.57	17.49	0
		3	1	17.54	17.48	17.46	0
		3	3	17.48	17.48	17.42	0
		6	0	17.41	17.40	17.31	0
1.4M	64QAM	1	0	17.57	17.53	17.47	0
		1	2	17.45	17.46	17.38	0
		1	5	17.37	17.41	17.37	0
		3	0	17.52	17.56	17.42	0
		3	1	17.42	17.47	17.41	0
		3	3	17.44	17.51	17.36	0
		6	0	17.37	17.36	17.32	0
1.4M	256QAM	1	0	17.40	17.49	17.35	0
		1	2	17.41	17.34	17.35	0
		1	5	17.33	17.41	17.17	0
		3	0	17.49	17.43	17.37	0
		3	1	17.33	17.51	17.24	0
		3	3	17.33	17.34	17.27	0
		6	0	17.37	17.34	17.21	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		13.37		0
		1	24		13.28		0
		1	49		13.22		0
		25	0		13.33		0
		25	12		13.26		0
		25	25		13.21		0
		50	0		13.14		0
10M	16QAM	1	0		13.35		0
		1	24		13.27		0
		1	49		13.23		0
		25	0		13.31		0
		25	12		13.25		0
		25	25		13.20		0
		50	0		13.14		0
10M	64QAM	1	0		13.33		0
		1	24		13.26		0
		1	49		12.21		0
		25	0		13.30		0
		25	12		13.25		0
		25	25		13.19		0
		50	0		13.15		0
10M	256QAM	1	0		13.33		0
		1	24		13.27		0
		1	49		13.22		0
		25	0		13.31		0
		25	12		13.25		0
		25	25		13.18		0
		50	0		13.14		0
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	13.24	13.33	13.29	0
		1	12	12.19	12.28	12.24	0
		1	24	12.13	12.22	12.18	0
		12	0	13.21	13.30	13.26	0
		12	6	13.17	13.26	13.22	0
		12	13	13.12	13.21	13.17	0
		25	0	13.10	13.19	13.15	0
5M	16QAM	1	0	13.22	13.31	13.27	0
		1	12	13.18	13.27	13.23	0
		1	24	13.11	13.20	13.16	0
		12	0	13.19	13.28	13.24	0
		12	6	13.15	13.24	13.20	0
		12	13	13.11	13.20	13.16	0
		25	0	13.06	13.15	13.11	0
5M	64QAM	1	0	13.21	13.30	13.26	0
		1	12	13.18	13.27	13.23	0
		1	24	13.11	13.20	13.16	0
		12	0	13.20	13.29	13.25	0
		12	6	13.15	13.24	13.20	0
		12	13	13.10	13.19	13.15	0
		25	0	13.06	13.15	13.11	0
5M	256QAM	1	0	13.20	13.29	13.25	0
		1	12	13.16	13.25	13.21	0
		1	24	13.11	13.20	13.16	0
		12	0	13.19	13.28	13.24	0
		12	6	13.13	13.22	13.18	0
		12	13	13.10	13.19	13.15	0
		25	0	13.06	13.15	13.11	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	12.61	12.49	12.37	0
		1	50	12.56	12.44	12.32	0
		1	99	12.51	12.39	12.27	0
		50	0	12.59	12.47	12.35	0
		50	25	12.53	12.41	12.29	0
		50	50	12.49	12.37	12.25	0
		100	0	12.45	12.33	12.21	0
20M	16QAM	1	0	12.58	12.46	12.34	0
		1	50	12.53	12.41	12.29	0
		1	99	12.47	12.35	12.23	0
		50	0	12.56	12.44	12.32	0
		50	25	12.51	12.39	12.27	0
		50	50	12.46	12.34	12.22	0
		100	0	12.43	12.31	12.19	0
20M	64QAM	1	0	12.57	12.45	12.33	0
		1	50	12.52	12.40	12.28	0
		1	99	12.45	12.33	12.21	0
		50	0	12.55	12.43	12.31	0
		50	25	12.48	12.36	12.24	0
		50	50	12.44	12.32	12.20	0
		100	0	12.40	12.28	12.16	0
20M	256QAM	1	0	12.55	12.43	12.31	0
		1	50	12.52	12.40	12.28	0
		1	99	12.48	12.36	12.24	0
		50	0	12.54	12.42	12.30	0
		50	25	12.50	12.38	12.26	0
		50	50	12.46	12.34	12.22	0
		100	0	12.42	12.30	12.18	0
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	12.56	12.45	12.28	0
		1	37	12.51	12.40	12.25	0
		1	74	12.42	12.30	12.13	0
		36	0	12.54	12.39	12.29	0
		36	19	12.46	12.36	12.24	0
		36	39	12.39	12.26	12.19	0
		75	0	12.41	12.29	12.13	0
15M	16QAM	1	0	12.53	12.37	12.26	0
		1	37	12.48	12.37	12.19	0
		1	74	12.39	12.31	12.20	0
		36	0	12.53	12.36	12.30	0
		36	19	12.42	12.33	12.16	0
		36	39	12.43	12.26	12.15	0
		75	0	12.37	12.28	12.09	0
15M	64QAM	1	0	12.50	12.40	12.22	0
		1	37	12.51	12.32	12.27	0
		1	74	12.48	12.27	12.16	0
		36	0	12.49	12.37	12.22	0
		36	19	12.49	12.30	12.21	0
		36	39	12.42	12.26	12.17	0
		75	0	12.38	12.22	12.17	0
15M	256QAM	1	0	12.37	12.36	12.08	0
		1	37	12.33	12.31	12.10	0
		1	74	12.36	12.25	12.05	0
		36	0	12.31	12.39	12.14	0
		36	19	12.38	12.30	12.13	0
		36	39	12.30	12.25	12.08	0
		75	0	12.24	12.15	12.09	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	12.46	12.25	12.25	0
		1	24	12.47	12.41	12.21	0
		1	49	12.44	12.27	12.08	0
		25	0	12.37	12.40	12.27	0
		25	12	12.29	12.20	12.13	0
		25	25	12.32	12.20	12.14	0
		50	0	12.38	12.21	12.04	0
10M	16QAM	1	0	12.48	12.36	12.20	0
		1	24	12.40	12.25	12.26	0
		1	49	12.40	12.16	12.01	0
		25	0	12.35	12.31	12.20	0
		25	12	12.38	12.24	12.12	0
		25	25	12.30	12.21	12.18	0
		50	0	12.39	12.17	12.07	0
10M	64QAM	1	0	12.39	12.31	12.22	0
		1	24	12.48	12.26	12.17	0
		1	49	12.35	12.21	12.20	0
		25	0	12.34	12.36	12.16	0
		25	12	12.29	12.26	12.10	0
		25	25	12.37	12.13	12.06	0
		50	0	12.24	12.14	12.00	0
10M	256QAM	1	0	12.48	12.31	12.09	0
		1	24	12.28	12.25	12.10	0
		1	49	12.35	12.14	12.13	0
		25	0	12.43	12.33	12.23	0
		25	12	12.32	12.36	12.04	0
		25	25	12.32	12.29	12.08	0
		50	0	12.33	12.16	12.04	0
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	12.47	12.33	12.10	0
		1	12	12.43	12.23	12.18	0
		1	24	12.39	12.20	12.06	0
		12	0	12.34	12.31	12.20	0
		12	6	12.33	12.16	12.12	0
		12	13	12.27	12.27	12.01	0
		25	0	12.42	12.19	12.14	0
5M	16QAM	1	0	12.41	12.35	12.26	0
		1	12	12.34	12.28	12.14	0
		1	24	12.23	12.16	12.10	0
		12	0	12.49	12.33	12.13	0
		12	6	12.29	12.23	12.14	0
		12	13	12.35	12.20	12.08	0
		25	0	12.18	12.19	11.96	0
5M	64QAM	1	0	12.36	12.28	12.20	0
		1	12	12.44	12.35	12.25	0
		1	24	12.37	12.19	12.17	0
		12	0	12.47	12.27	12.11	0
		12	6	12.46	12.30	12.13	0
		12	13	12.43	12.14	12.03	0
		25	0	12.32	12.17	12.02	0
5M	256QAM	1	0	12.38	12.31	12.21	0
		1	12	12.42	12.26	12.12	0
		1	24	12.39	12.28	12.12	0
		12	0	12.38	12.38	12.08	0
		12	6	12.33	12.22	12.11	0
		12	13	12.38	12.20	12.09	0
		25	0	12.30	12.23	11.97	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)										
LTE Band 41										
BW	MCS Index	RB Size	RB Offset	Low	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39790	39750	40185	40620	41055	41490	
		Frequency (MHz)		2510	2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	11.23	11.26	11.09	11.28	11.16	11.10	0
		1	50	11.19	11.24	11.05	11.24	11.12	11.06	0
		1	99	11.14	11.19	11.00	11.19	11.07	11.01	0
		50	0	11.20	11.25	11.06	11.25	11.13	11.07	0
		50	25	11.14	11.19	11.00	11.19	11.07	11.01	0
		50	50	11.11	11.16	10.97	11.16	11.04	10.98	0
		100	0	11.07	11.12	10.93	11.12	11.00	10.94	0
20M	16QAM	1	0	11.20	11.25	11.06	11.25	11.13	11.07	0
		1	50	11.15	11.20	11.01	11.20	11.08	11.02	0
		1	99	11.09	11.14	10.95	11.14	11.02	10.96	0
		50	0	11.18	11.23	11.04	11.23	11.11	11.05	0
		50	25	11.13	11.18	10.99	11.18	11.06	11.00	0
		50	50	11.10	11.15	10.96	11.15	11.03	10.97	0
		100	0	11.08	11.13	10.94	11.13	11.01	10.95	0
20M	64QAM	1	0	11.19	11.24	11.05	11.24	11.12	11.06	0
		1	50	11.14	11.19	11.00	11.19	11.07	11.01	0
		1	99	11.08	11.13	10.94	11.13	11.01	10.95	0
		50	0	11.16	11.21	11.02	11.21	11.09	11.03	0
		50	25	11.13	11.18	10.99	11.18	11.06	11.00	0
		50	50	11.10	11.15	10.96	11.15	11.03	10.97	0
		100	0	11.06	11.11	10.92	11.11	10.99	10.93	0
20M	256QAM	1	0	11.18	11.23	11.04	11.23	11.11	11.05	0
		1	50	11.13	11.18	10.99	11.18	11.06	11.00	0
		1	99	11.09	11.14	10.95	11.14	11.02	10.96	0
		50	0	11.17	11.22	11.03	11.22	11.10	11.04	0
		50	25	11.13	11.18	10.99	11.18	11.06	11.00	0
		50	50	11.10	11.15	10.96	11.15	11.03	10.97	0
		100	0	11.07	11.12	10.93	11.12	11.00	10.94	0
BW	MCS Index	Channel		39765	39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2507.5	2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	11.10	11.14	11.05	11.23	11.12	11.00	0
		1	37	11.08	11.19	10.93	11.12	11.03	10.95	0
		1	74	11.07	11.04	10.89	11.10	11.02	10.87	0
		36	0	11.13	11.23	10.97	11.20	11.07	11.01	0
		36	19	11.08	11.13	10.90	11.13	10.96	10.95	0
		36	39	11.10	11.10	10.93	11.10	10.99	10.96	0
		75	0	11.03	11.05	10.91	11.11	10.91	10.90	0
15M	16QAM	1	0	11.10	11.17	11.01	11.20	11.09	11.03	0
		1	37	11.11	11.18	10.94	11.12	10.98	10.94	0
		1	74	11.04	11.11	10.87	11.12	11.01	10.91	0
		36	0	11.08	11.18	10.98	11.19	11.01	10.97	0
		36	19	11.08	11.10	10.93	11.17	10.98	11.00	0
		36	39	11.08	11.15	10.93	11.15	11.01	10.87	0
		75	0	11.03	11.03	10.88	11.13	10.95	10.89	0
15M	64QAM	1	0	11.13	11.17	11.00	11.14	11.09	11.02	0
		1	37	11.05	11.19	11.00	11.11	11.02	10.92	0
		1	74	11.06	11.08	10.86	11.13	11.01	10.91	0
		36	0	11.14	11.14	11.00	11.13	11.06	10.95	0
		36	19	11.03	11.13	10.99	11.16	10.97	10.99	0
		36	39	11.00	11.07	10.87	11.06	10.99	10.96	0
		75	0	11.03	11.11	10.94	11.09	10.95	10.85	0
15M	256QAM	1	0	11.09	11.13	11.01	11.14	11.02	10.98	0
		1	37	11.07	11.13	10.92	11.06	10.92	10.90	0
		1	74	10.97	11.11	10.90	11.07	10.83	10.88	0
		36	0	11.11	11.07	10.97	11.11	10.94	10.97	0
		36	19	11.04	11.09	10.87	11.08	11.04	10.89	0
		36	39	11.07	11.07	10.84	11.06	10.89	10.84	0
		75	0	11.06	10.99	10.83	11.01	10.99	10.85	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)										
LTE Band 41										
BW	MCS Index	Channel		39740	39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2505	2501	2547	2593	2639	2685	
10M	QPSK	1	0	11.18	11.21	11.00	11.18	11.08	11.01	0
		1	24	11.09	11.19	10.95	11.18	11.04	11.01	0
		1	49	11.08	11.13	10.92	11.06	10.99	10.89	0
		25	0	11.09	11.14	10.99	11.21	11.02	10.99	0
		25	12	11.12	11.11	10.95	11.12	11.01	10.93	0
		25	25	11.04	11.06	10.89	11.15	10.99	10.93	0
		50	0	11.06	11.08	10.87	11.12	10.91	10.89	0
10M	16QAM	1	0	11.12	11.20	11.01	11.14	11.03	11.00	0
		1	24	11.11	11.14	10.95	11.11	11.06	10.94	0
		1	49	11.05	11.04	10.90	11.08	10.97	10.91	0
		25	0	11.13	11.15	11.00	11.15	11.02	10.99	0
		25	12	11.08	11.10	10.95	11.18	10.97	10.90	0
		25	25	11.06	11.08	10.90	11.08	11.02	10.96	0
		50	0	11.06	11.11	10.93	11.07	11.00	10.89	0
10M	64QAM	1	0	11.19	11.19	11.03	11.14	11.09	10.97	0
		1	24	11.09	11.16	10.92	11.13	11.02	10.98	0
		1	49	11.07	11.04	10.86	11.13	10.95	10.88	0
		25	0	11.12	11.16	11.00	11.22	11.06	11.02	0
		25	12	11.07	11.09	10.89	11.09	11.02	10.93	0
		25	25	11.10	11.11	10.91	11.06	11.00	10.97	0
		50	0	10.99	11.07	10.90	11.10	10.98	10.89	0
10M	256QAM	1	0	11.13	11.13	10.96	11.18	11.02	10.98	0
		1	24	11.03	11.17	10.90	11.16	11.06	10.93	0
		1	49	11.04	11.09	10.88	11.05	10.96	10.85	0
		25	0	11.09	11.19	11.00	11.19	11.07	10.93	0
		25	12	11.09	11.06	10.82	11.10	10.92	10.84	0
		25	25	11.04	11.04	10.92	11.06	10.84	10.87	0
		50	0	10.99	11.11	10.79	10.97	10.82	10.79	0
BW	MCS Index	Channel		39715	39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2502.5	2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	11.12	11.18	10.97	11.20	11.04	11.01	0
		1	12	11.08	11.12	11.01	11.16	11.02	10.96	0
		1	24	11.04	11.08	10.91	11.10	11.00	10.93	0
		12	0	11.10	11.21	11.03	11.20	11.07	11.03	0
		12	6	11.08	11.15	10.98	11.08	10.96	10.97	0
		12	13	11.08	11.12	10.86	11.14	10.95	10.87	0
		25	0	11.06	11.13	10.89	11.07	10.92	10.90	0
5M	16QAM	1	0	11.18	11.18	10.99	11.15	11.08	10.97	0
		1	12	11.10	11.10	10.94	11.11	10.99	11.00	0
		1	24	11.06	11.09	10.88	11.14	11.00	10.87	0
		12	0	11.18	11.15	10.96	11.18	11.02	11.00	0
		12	6	11.05	11.14	10.91	11.18	11.00	11.00	0
		12	13	11.04	11.13	10.91	11.10	11.02	10.89	0
		25	0	11.04	11.10	10.92	11.12	11.01	10.87	0
5M	64QAM	1	0	11.13	11.23	11.00	11.16	11.07	11.00	0
		1	12	11.08	11.14	10.95	11.20	11.01	10.94	0
		1	24	11.02	11.10	10.95	11.10	11.00	10.95	0
		12	0	11.15	11.16	11.00	11.23	11.07	11.04	0
		12	6	11.10	11.08	10.96	11.15	11.04	10.92	0
		12	13	11.05	11.12	10.96	11.11	10.96	10.90	0
		25	0	10.99	11.10	10.89	11.09	10.97	10.94	0
5M	256QAM	1	0	11.08	11.15	10.97	11.06	10.97	10.95	0
		1	12	11.07	11.10	10.87	11.08	10.91	10.90	0
		1	24	10.93	10.99	10.86	10.97	10.96	10.90	0
		12	0	11.12	11.18	10.93	11.16	11.05	10.89	0
		12	6	11.03	10.99	10.81	11.02	10.91	10.98	0
		12	13	10.93	11.09	10.86	11.08	10.87	10.89	0
		25	0	11.02	10.99	10.84	11.00	10.90	10.85	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	13.30	13.49	13.32	0
		1	50	13.20	13.39	13.22	0
		1	99	13.14	13.33	13.16	0
		50	0	13.26	13.45	13.28	0
		50	25	13.22	13.41	13.24	0
		50	50	13.17	13.36	13.19	0
		100	0	13.11	13.30	13.13	0
20M	16QAM	1	0	13.28	13.47	13.30	0
		1	50	13.19	13.38	13.21	0
		1	99	13.11	13.30	13.13	0
		50	0	13.22	13.41	13.24	0
		50	25	13.13	13.32	13.15	0
		50	50	13.10	13.29	13.12	0
		100	0	13.05	13.24	13.07	0
20M	64QAM	1	0	13.26	13.45	13.28	0
		1	50	13.18	13.37	13.20	0
		1	99	13.11	13.30	13.13	0
		50	0	13.19	13.38	13.21	0
		50	25	13.13	13.32	13.15	0
		50	50	13.10	13.29	13.12	0
		100	0	13.04	13.23	13.06	0
20M	256QAM	1	0	13.24	13.43	13.26	0
		1	50	13.16	13.35	13.18	0
		1	99	13.11	13.30	13.13	0
		50	0	13.21	13.40	13.23	0
		50	25	13.12	13.31	13.14	0
		50	50	13.10	13.29	13.12	0
		100	0	13.04	13.23	13.06	0
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	13.25	13.42	13.31	0
		1	37	13.19	13.38	13.13	0
		1	74	13.04	13.23	13.16	0
		36	0	13.20	13.38	13.27	0
		36	19	13.13	13.34	13.22	0
		36	39	13.15	13.27	13.12	0
		75	0	13.07	13.25	13.12	0
15M	16QAM	1	0	13.23	13.41	13.26	0
		1	37	13.12	13.34	13.13	0
		1	74	13.08	13.26	13.06	0
		36	0	13.17	13.37	13.20	0
		36	19	13.11	13.24	13.10	0
		36	39	13.04	13.20	13.07	0
		75	0	12.96	13.23	13.06	0
15M	64QAM	1	0	13.19	13.36	13.21	0
		1	37	13.12	13.27	13.13	0
		1	74	13.03	13.25	13.10	0
		36	0	13.19	13.36	13.21	0
		36	19	13.09	13.22	13.06	0
		36	39	13.10	13.24	13.06	0
		75	0	13.04	13.22	13.04	0
15M	256QAM	1	0	13.16	13.41	13.26	0
		1	37	13.08	13.33	13.11	0
		1	74	13.01	13.24	13.10	0
		36	0	13.11	13.31	13.15	0
		36	19	13.06	13.24	13.04	0
		36	39	13.10	13.27	13.05	0
		75	0	13.04	13.14	13.02	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	13.24	13.45	13.31	0
		1	24	13.16	13.34	13.16	0
		1	49	13.14	13.25	13.16	0
		25	0	13.17	13.40	13.23	0
		25	12	13.18	13.37	13.16	0
		25	25	13.09	13.29	13.13	0
		50	0	13.05	13.24	13.04	0
10M	16QAM	1	0	13.26	13.37	13.20	0
		1	24	13.19	13.35	13.12	0
		1	49	13.01	13.21	13.13	0
		25	0	13.21	13.35	13.17	0
		25	12	13.03	13.25	13.08	0
		25	25	13.06	13.26	13.12	0
		50	0	12.97	13.17	12.97	0
10M	64QAM	1	0	13.20	13.35	13.18	0
		1	24	13.09	13.35	13.12	0
		1	49	13.04	13.27	13.10	0
		25	0	13.15	13.33	13.11	0
		25	12	13.06	13.25	13.14	0
		25	25	13.08	13.21	13.06	0
		50	0	13.01	13.22	13.05	0
10M	256QAM	1	0	13.15	13.43	13.26	0
		1	24	13.13	13.31	13.12	0
		1	49	13.02	13.26	13.03	0
		25	0	13.20	13.30	13.19	0
		25	12	13.12	13.31	13.06	0
		25	25	13.07	13.23	13.10	0
		50	0	13.04	13.17	12.96	0
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	13.23	13.44	13.29	0
		1	12	13.18	13.32	13.20	0
		1	24	13.14	13.29	13.11	0
		12	0	13.17	13.42	13.23	0
		12	6	13.21	13.39	13.24	0
		12	13	13.14	13.35	13.18	0
		25	0	13.10	13.30	13.03	0
5M	16QAM	1	0	13.28	13.42	13.28	0
		1	12	13.10	13.29	13.11	0
		1	24	13.10	13.22	13.12	0
		12	0	13.20	13.37	13.14	0
		12	6	13.10	13.26	13.07	0
		12	13	13.08	13.28	13.05	0
		25	0	12.98	13.16	13.02	0
5M	64QAM	1	0	13.24	13.37	13.28	0
		1	12	13.09	13.34	13.10	0
		1	24	13.01	13.22	13.12	0
		12	0	13.09	13.35	13.15	0
		12	6	13.04	13.22	13.05	0
		12	13	13.03	13.21	13.11	0
		25	0	12.97	13.23	12.97	0
5M	256QAM	1	0	13.23	13.36	13.25	0
		1	12	13.11	13.30	13.09	0
		1	24	13.04	13.26	13.12	0
		12	0	13.17	13.39	13.16	0
		12	6	13.07	13.28	13.09	0
		12	13	13.08	13.23	13.10	0
		25	0	13.01	13.14	13.05	0

LTE Conducted Power (P-Sensor_On_Ant0_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	13.25	13.47	13.22	0
		1	7	13.14	13.30	13.19	0
		1	14	13.12	13.30	13.16	0
		8	0	13.17	13.42	13.25	0
		8	3	13.22	13.38	13.15	0
		8	7	13.09	13.28	13.15	0
		15	0	13.09	13.28	13.11	0
3M	16QAM	1	0	13.27	13.44	13.25	0
		1	7	13.12	13.36	13.17	0
		1	14	13.10	13.23	13.05	0
		8	0	13.21	13.36	13.19	0
		8	3	13.07	13.28	13.07	0
		8	7	13.03	13.22	13.04	0
		15	0	13.00	13.20	12.99	0
3M	64QAM	1	0	13.24	13.44	13.20	0
		1	7	13.09	13.37	13.10	0
		1	14	13.06	13.29	13.05	0
		8	0	13.10	13.35	13.17	0
		8	3	13.05	13.24	13.09	0
		8	7	13.05	13.25	13.04	0
		15	0	12.96	13.16	13.04	0
3M	256QAM	1	0	13.14	13.35	13.23	0
		1	7	13.16	13.31	13.10	0
		1	14	13.09	13.21	13.04	0
		8	0	13.18	13.33	13.21	0
		8	3	13.07	13.25	13.08	0
		8	7	13.03	13.27	13.02	0
		15	0	13.03	13.18	13.01	0
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	13.28	13.46	13.22	0
		1	2	13.16	13.36	13.16	0
		1	5	13.07	13.25	13.16	0
		3	0	13.17	13.44	13.28	0
		3	1	13.22	13.33	13.21	0
		3	3	13.07	13.33	13.14	0
		6	0	13.07	13.21	13.10	0
1.4M	16QAM	1	0	13.20	13.46	13.30	0
		1	2	13.15	13.37	13.21	0
		1	5	13.02	13.30	13.04	0
		3	0	13.19	13.41	13.23	0
		3	1	13.06	13.32	13.07	0
		3	3	13.07	13.24	13.08	0
		6	0	13.03	13.14	12.97	0
1.4M	64QAM	1	0	13.18	13.41	13.18	0
		1	2	13.15	13.33	13.20	0
		1	5	13.11	13.28	13.10	0
		3	0	13.18	13.37	13.13	0
		3	1	13.08	13.29	13.08	0
		3	3	13.10	13.26	13.05	0
		6	0	12.99	13.16	12.98	0
1.4M	256QAM	1	0	13.22	13.33	13.16	0
		1	2	13.09	13.29	13.14	0
		1	5	13.10	13.30	13.05	0
		3	0	13.12	13.39	13.20	0
		3	1	13.08	13.27	13.14	0
		3	3	13.03	13.27	13.06	0
		6	0	13.00	13.19	12.99	0

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	23.65	23.48	23.52	0
		1	50	23.52	23.43	23.43	0
		1	99	23.56	23.40	23.37	0
		50	0	22.53	22.40	22.39	1
		50	25	22.47	22.32	22.35	1
		50	50	22.47	22.30	22.31	1
		100	0	22.49	22.35	22.39	1
20M	16QAM	1	0	22.59	22.50	22.44	1
		1	50	22.56	22.41	22.41	1
		1	99	22.73	22.65	22.63	1
		50	0	21.50	21.42	21.37	2
		50	25	21.56	21.40	21.34	2
		50	50	21.53	21.39	21.35	2
		100	0	21.58	21.46	21.49	2
20M	64QAM	1	0	21.83	21.76	21.76	2
		1	50	21.82	21.67	21.67	2
		1	99	21.73	21.66	21.61	2
		50	0	20.69	20.57	20.58	3
		50	25	20.72	20.55	20.51	3
		50	50	20.60	20.50	20.45	3
		100	0	20.63	20.48	20.44	3
20M	256QAM	1	0	19.10	18.99	19.03	5
		1	50	18.74	18.61	18.58	5
		1	99	18.76	18.63	18.66	5
		50	0	18.66	18.49	18.52	5
		50	25	18.60	18.48	18.46	5
		50	50	18.77	18.60	18.63	5
		100	0	18.64	18.49	18.43	5
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	23.61	23.40	23.46	0
		1	37	23.57	23.33	23.39	0
		1	74	23.51	23.35	23.35	0
		36	0	22.53	22.34	22.38	1
		36	19	22.46	22.27	22.27	1
		36	39	22.39	22.22	22.29	1
		75	0	22.47	22.27	22.39	1
15M	16QAM	1	0	22.66	22.41	22.52	1
		1	37	22.50	22.41	22.39	1
		1	74	22.80	22.61	22.62	1
		36	0	21.49	21.34	21.44	2
		36	19	21.49	21.34	21.35	2
		36	39	21.55	21.37	21.41	2
		75	0	21.63	21.44	21.48	2
15M	64QAM	1	0	21.92	21.72	21.77	2
		1	37	21.78	21.58	21.71	2
		1	74	21.73	21.61	21.67	2
		36	0	20.69	20.52	20.54	3
		36	19	20.63	20.52	20.56	3
		36	39	20.63	20.44	20.49	3
		75	0	20.55	20.46	20.49	3
15M	256QAM	1	0	19.12	18.92	18.97	5
		1	37	18.77	18.56	18.65	5
		1	74	18.80	18.61	18.65	5
		36	0	18.63	18.45	18.47	5
		36	19	18.56	18.44	18.47	5
		36	39	18.69	18.51	18.54	5
		75	0	18.63	18.42	18.46	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	23.57	23.46	23.43	0
		1	24	23.57	23.33	23.44	0
		1	49	23.56	23.39	23.35	0
		25	0	22.57	22.40	22.36	1
		25	12	22.47	22.31	22.30	1
		25	25	22.45	22.25	22.31	1
		50	0	22.47	22.35	22.35	1
10M	16QAM	1	0	22.64	22.46	22.45	1
		1	24	22.48	22.41	22.43	1
		1	49	22.80	22.58	22.62	1
		25	0	21.51	21.42	21.37	2
		25	12	21.57	21.32	21.38	2
		25	25	21.56	21.32	21.34	2
		50	0	21.57	21.43	21.47	2
10M	64QAM	1	0	21.91	21.73	21.70	2
		1	24	21.84	21.61	21.63	2
		1	49	21.78	21.64	21.68	2
		25	0	20.70	20.53	20.55	3
		25	12	20.70	20.46	20.49	3
		25	25	20.64	20.42	20.50	3
		50	0	20.64	20.46	20.51	3
10M	256QAM	1	0	19.12	18.92	18.97	5
		1	24	18.74	18.61	18.61	5
		1	49	18.79	18.58	18.61	5
		25	0	18.64	18.40	18.44	5
		25	12	18.58	18.38	18.45	5
		25	25	18.68	18.56	18.57	5
		50	0	18.61	18.42	18.46	5
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	23.61	23.48	23.48	0
		1	12	23.57	23.37	23.42	0
		1	24	23.47	23.37	23.42	0
		12	0	22.57	22.31	22.40	1
		12	6	22.42	22.30	22.34	1
		12	13	22.40	22.27	22.27	1
		25	0	22.48	22.34	22.36	1
5M	16QAM	1	0	22.64	22.43	22.53	1
		1	12	22.49	22.31	22.35	1
		1	24	22.79	22.61	22.63	1
		12	0	21.51	21.33	21.41	2
		12	6	21.50	21.33	21.40	2
		12	13	21.52	21.37	21.38	2
		25	0	21.54	21.45	21.41	2
5M	64QAM	1	0	21.86	21.76	21.80	2
		1	12	21.83	21.58	21.70	2
		1	24	21.81	21.65	21.64	2
		12	0	20.74	20.52	20.57	3
		12	6	20.68	20.47	20.51	3
		12	13	20.63	20.50	20.48	3
		25	0	20.61	20.44	20.44	3
5M	256QAM	1	0	19.10	18.99	19.02	5
		1	12	18.76	18.55	18.59	5
		1	24	18.74	18.54	18.60	5
		12	0	18.62	18.42	18.50	5
		12	6	18.60	18.46	18.51	5
		12	13	18.67	18.52	18.64	5
		25	0	18.56	18.45	18.46	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	23.65	23.46	23.45	0
		1	7	23.50	23.37	23.41	0
		1	14	23.51	23.31	23.38	0
		8	0	22.55	22.31	22.41	1
		8	3	22.45	22.26	22.30	1
		8	7	22.43	22.23	22.28	1
		15	0	22.47	22.30	22.32	1
3M	16QAM	1	0	22.64	22.42	22.49	1
		1	7	22.52	22.36	22.36	1
		1	14	22.73	22.61	22.64	1
		8	0	21.55	21.33	21.44	2
		8	3	21.48	21.39	21.41	2
		8	7	21.55	21.30	21.37	2
		15	0	21.60	21.38	21.41	2
3M	64QAM	1	0	21.83	21.75	21.76	2
		1	7	21.78	21.62	21.68	2
		1	14	21.76	21.66	21.70	2
		8	0	20.65	20.50	20.54	3
		8	3	20.70	20.55	20.50	3
		8	7	20.66	20.42	20.45	3
		15	0	20.64	20.48	20.43	3
3M	256QAM	1	0	19.06	18.96	19.01	5
		1	7	18.71	18.55	18.61	5
		1	14	18.76	18.54	18.58	5
		8	0	18.56	18.40	18.45	5
		8	3	18.56	18.38	18.45	5
		8	7	18.71	18.51	18.59	5
		15	0	18.61	18.44	18.45	5
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	23.65	23.44	23.47	0
		1	2	23.56	23.43	23.39	0
		1	5	23.51	23.39	23.40	0
		3	0	22.52	22.40	22.44	0
		3	1	22.49	22.31	22.30	0
		3	3	22.42	22.20	22.27	0
		6	0	22.48	22.30	22.30	1
1.4M	16QAM	1	0	22.60	22.46	22.53	1
		1	2	22.53	22.39	22.44	1
		1	5	22.75	22.55	22.66	1
		3	0	21.52	21.33	21.42	1
		3	1	21.56	21.30	21.39	1
		3	3	21.52	21.39	21.42	1
		6	0	21.59	21.42	21.50	2
1.4M	64QAM	1	0	21.85	21.75	21.76	2
		1	2	21.80	21.62	21.61	2
		1	5	21.81	21.60	21.67	2
		3	0	20.73	20.55	20.61	2
		3	1	20.63	20.51	20.49	2
		3	3	20.66	20.46	20.47	2
		6	0	20.58	20.38	20.48	3
1.4M	256QAM	1	0	19.07	18.98	18.94	5
		1	2	18.70	18.53	18.61	5
		1	5	18.72	18.59	18.58	5
		3	0	18.60	18.39	18.52	5
		3	1	18.60	18.42	18.47	5
		3	3	18.74	18.59	18.57	5
		6	0	18.62	18.45	18.43	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.87	23.80	23.48	0
		1	50	23.75	23.69	23.30	0
		1	99	23.77	23.74	23.44	0
		50	0	22.78	22.71	22.32	1
		50	25	22.67	22.63	22.26	1
		50	50	22.65	22.56	22.17	1
		100	0	22.71	22.60	22.28	1
20M	16QAM	1	0	22.81	22.74	22.41	1
		1	50	22.82	22.75	22.37	1
		1	99	22.75	22.68	22.37	1
		50	0	21.75	21.68	21.29	2
		50	25	21.73	21.62	21.25	2
		50	50	21.51	21.50	21.10	2
		100	0	21.66	21.57	21.22	2
20M	64QAM	1	0	21.86	21.79	21.39	2
		1	50	21.84	21.74	21.41	2
		1	99	21.70	21.68	21.32	2
		50	0	20.66	20.64	20.34	3
		50	25	20.78	20.67	20.29	3
		50	50	20.69	20.58	20.27	3
		100	0	20.68	20.58	20.20	3
20M	256QAM	1	0	18.77	18.76	18.44	5
		1	50	18.79	18.69	18.33	5
		1	99	18.81	18.70	18.30	5
		50	0	17.69	17.65	17.25	5
		50	25	17.66	17.64	17.34	5
		50	50	17.61	17.53	17.17	5
		100	0	17.73	17.62	17.30	5
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	23.84	23.71	23.45	0
		1	37	23.66	23.65	23.21	0
		1	74	23.74	23.70	23.37	0
		36	0	22.72	22.65	22.22	1
		36	19	22.58	22.57	22.19	1
		36	39	22.61	22.47	22.16	1
		75	0	22.63	22.51	22.20	1
15M	16QAM	1	0	22.80	22.66	22.31	1
		1	37	22.81	22.73	22.35	1
		1	74	22.66	22.61	22.32	1
		36	0	21.75	21.62	21.28	2
		36	19	21.73	21.59	21.16	2
		36	39	21.46	21.44	21.02	2
		75	0	21.63	21.52	21.22	2
15M	64QAM	1	0	21.76	21.78	21.31	2
		1	37	21.77	21.69	21.37	2
		1	74	21.61	21.62	21.28	2
		36	0	20.61	20.64	20.34	3
		36	19	20.73	20.57	20.23	3
		36	39	20.67	20.49	20.20	3
		75	0	20.68	20.53	20.17	3
15M	256QAM	1	0	18.75	18.67	18.36	5
		1	37	18.71	18.67	18.23	5
		1	74	18.78	18.63	18.26	5
		36	0	17.68	17.63	17.25	5
		36	19	17.66	17.63	17.34	5
		36	39	17.56	17.52	17.11	5
		75	0	17.69	17.56	17.22	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.82	23.73	23.43	0
		1	24	23.71	23.59	23.20	0
		1	49	23.72	23.71	23.35	0
		25	0	22.72	22.65	22.22	1
		25	12	22.61	22.54	22.26	1
		25	25	22.60	22.51	22.10	1
		50	0	22.66	22.56	22.22	1
10M	16QAM	1	0	22.78	22.73	22.31	1
		1	24	22.77	22.70	22.36	1
		1	49	22.71	22.67	22.30	1
		25	0	21.67	21.66	21.24	2
		25	12	21.69	21.58	21.17	2
		25	25	21.48	21.43	21.02	2
		50	0	21.66	21.51	21.14	2
10M	64QAM	1	0	21.84	21.71	21.29	2
		1	24	21.81	21.71	21.41	2
		1	49	21.60	21.67	21.30	2
		25	0	20.60	20.58	20.30	3
		25	12	20.74	20.63	20.27	3
		25	25	20.68	20.51	20.22	3
		50	0	20.67	20.54	20.10	3
10M	256QAM	1	0	18.76	18.67	18.34	5
		1	24	18.78	18.62	18.32	5
		1	49	18.75	18.63	18.25	5
		25	0	17.65	17.59	17.18	5
		25	12	17.56	17.55	17.29	5
		25	25	17.51	17.47	17.08	5
		50	0	17.72	17.53	17.26	5
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	23.78	23.73	23.41	0
		1	12	23.65	23.65	23.28	0
		1	24	23.76	23.69	23.38	0
		12	0	22.73	22.70	22.29	1
		12	6	22.63	22.59	22.26	1
		12	13	22.57	22.50	22.17	1
		25	0	22.71	22.50	22.25	1
5M	16QAM	1	0	22.78	22.68	22.31	1
		1	12	22.81	22.72	22.37	1
		1	24	22.65	22.66	22.32	1
		12	0	21.70	21.66	21.28	2
		12	6	21.69	21.54	21.25	2
		12	13	21.43	21.44	21.09	2
		25	0	21.65	21.54	21.22	2
5M	64QAM	1	0	21.78	21.75	21.33	2
		1	12	21.84	21.68	21.34	2
		1	24	21.61	21.58	21.26	2
		12	0	20.66	20.55	20.28	3
		12	6	20.71	20.59	20.21	3
		12	13	20.59	20.56	20.19	3
		25	0	20.64	20.49	20.20	3
5M	256QAM	1	0	18.77	18.69	18.40	5
		1	12	18.75	18.61	18.24	5
		1	24	18.74	18.68	18.25	5
		12	0	17.65	17.56	17.20	5
		12	6	17.62	17.56	17.24	5
		12	13	17.54	17.47	17.16	5
		25	0	17.67	17.55	17.25	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 42							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		43190	43340	43490	
		Frequency (MHz)		3560	3575	3590	
20M	QPSK	1	0	23.89	23.98	23.91	0
		1	50	23.85	23.94	23.87	0
		1	99	23.86	23.95	23.88	0
		50	0	22.86	22.95	22.88	1
		50	25	22.90	22.90	22.92	1
		50	50	22.88	22.88	22.90	1
		100	0	22.89	22.94	22.91	1
20M	16QAM	1	0	22.79	22.88	22.89	1
		1	50	22.85	22.92	22.79	1
		1	99	22.81	22.86	22.82	1
		50	0	21.85	21.87	21.81	2
		50	25	21.83	21.93	21.90	2
		50	50	21.85	21.96	21.89	2
		100	0	21.79	21.94	21.91	2
20M	64QAM	1	0	21.81	21.97	21.90	2
		1	50	21.75	21.86	21.81	2
		1	99	21.81	21.94	21.80	2
		50	0	20.78	20.89	20.86	3
		50	25	20.85	20.99	20.88	3
		50	50	20.83	20.96	20.87	3
		100	0	20.81	20.94	20.82	3
20M	256QAM	1	0	18.57	18.66	18.59	5
		1	50	18.68	18.77	18.70	5
		1	99	18.70	18.79	18.72	5
		50	0	18.85	18.94	18.87	5
		50	25	18.84	18.93	18.86	5
		50	50	18.90	18.99	18.92	5
		100	0	18.80	18.89	18.82	5
BW	MCS Index	Channel		43165	43340	43515	3GPP MPR
		Frequency (MHz)		3557.5	3575	3592.5	
15M	QPSK	1	0	23.86	23.96	23.86	0
		1	37	23.75	23.84	23.79	0
		1	74	23.80	23.94	23.82	0
		36	0	22.82	22.85	22.78	1
		36	19	22.86	22.98	22.88	1
		36	39	22.82	22.87	22.83	1
		75	0	22.82	22.93	22.82	1
15M	16QAM	1	0	22.80	22.93	22.87	1
		1	37	22.76	22.90	22.79	1
		1	74	22.69	22.91	22.78	1
		36	0	21.80	21.87	21.76	2
		36	19	21.80	21.92	21.85	2
		36	39	21.85	21.89	21.81	2
		75	0	21.80	21.89	21.78	2
15M	64QAM	1	0	21.79	21.86	21.80	2
		1	37	21.80	21.84	21.77	2
		1	74	21.78	21.92	21.76	2
		36	0	20.67	20.89	20.87	3
		36	19	20.75	20.91	20.87	3
		36	39	20.84	20.91	20.83	3
		75	0	20.73	20.83	20.82	3
15M	256QAM	1	0	18.56	18.65	18.58	5
		1	37	18.67	18.76	18.69	5
		1	74	18.69	18.78	18.71	5
		36	0	18.84	18.93	18.86	5
		36	19	18.83	18.92	18.85	5
		36	39	18.89	18.98	18.91	5
		75	0	18.79	18.88	18.81	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 42							
BW	MCS Index	Channel		43140	43340	43540	3GPP MPR
		Frequency (MHz)		3555	3575	3595	
10M	QPSK	1	0	23.85	23.77	23.83	0
		1	24	23.67	23.80	23.67	0
		1	49	23.62	23.89	23.66	0
		25	0	22.79	22.80	22.67	1
		25	12	22.82	22.95	22.88	1
		25	25	22.78	22.87	22.73	1
		50	0	22.78	22.82	22.80	1
10M	16QAM	1	0	22.81	22.71	22.87	1
		1	24	22.80	22.80	22.62	1
		1	49	22.71	22.88	22.66	1
		25	0	21.70	21.66	21.71	2
		25	12	21.76	21.74	21.78	2
		25	25	21.73	21.79	21.71	2
		50	0	21.66	21.77	21.60	2
10M	64QAM	1	0	21.79	21.82	21.69	2
		1	24	21.68	21.73	21.65	2
		1	49	21.67	21.69	21.72	2
		25	0	20.75	20.85	20.65	3
		25	12	20.76	20.76	20.69	3
		25	25	20.78	20.87	20.71	3
		50	0	20.79	20.78	20.84	3
10M	256QAM	1	0	18.55	18.64	18.57	5
		1	24	18.66	18.75	18.68	5
		1	49	18.68	18.77	18.70	5
		25	0	18.83	18.92	18.85	5
		25	12	18.82	18.91	18.84	5
		25	25	18.88	18.97	18.90	5
		50	0	18.78	18.87	18.80	5
BW	MCS Index	Channel		43115	43340	43565	3GPP MPR
		Frequency (MHz)		3552.5	3575	3597.5	
5M	QPSK	1	0	23.74	23.88	23.76	0
		1	12	23.75	23.75	23.65	0
		1	24	23.78	23.77	23.76	0
		12	0	22.80	22.84	22.58	1
		12	6	22.75	22.81	22.70	1
		12	13	22.69	22.87	22.66	1
		25	0	22.77	22.80	22.66	1
5M	16QAM	1	0	22.69	22.80	22.70	1
		1	12	22.69	22.76	22.64	1
		1	24	22.64	22.79	22.71	1
		12	0	21.77	21.69	21.71	2
		12	6	21.67	21.81	21.81	2
		12	13	21.77	21.80	21.77	2
		25	0	21.73	21.76	21.77	2
5M	64QAM	1	0	21.78	21.88	21.76	2
		1	12	21.69	21.67	21.54	2
		1	24	21.72	21.85	21.75	2
		12	0	20.59	20.71	20.67	3
		12	6	20.69	20.71	20.81	3
		12	13	20.78	20.91	20.72	3
		25	0	20.76	20.91	20.67	3
5M	256QAM	1	0	18.54	18.63	18.56	5
		1	12	18.65	18.74	18.67	5
		1	24	18.67	18.76	18.69	5
		12	0	18.82	18.91	18.84	5
		12	6	18.81	18.90	18.83	5
		12	13	18.87	18.96	18.89	5
		25	0	18.77	18.86	18.79	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	21.80	21.75	21.90	21.85	0
		1	50	21.65	21.60	21.75	21.70	0
		1	99	21.71	21.66	21.81	21.76	0
		50	0	20.88	20.83	20.98	20.93	1
		50	25	20.87	20.82	20.97	20.92	1
		50	50	20.86	20.81	20.96	20.91	1
		100	0	20.84	20.79	20.94	20.89	1
20M	16QAM	1	0	20.75	20.73	20.80	20.79	1
		1	50	20.57	20.53	20.71	20.64	1
		1	99	20.63	20.64	20.77	20.68	1
		50	0	19.86	19.78	19.92	19.93	2
		50	25	19.78	19.75	19.97	19.91	2
		50	50	19.86	19.81	19.93	19.89	2
		100	0	19.77	19.78	19.87	19.80	2
20M	64QAM	1	0	19.77	19.74	19.89	19.78	2
		1	50	19.64	19.50	19.67	19.68	2
		1	99	19.62	19.65	19.71	19.75	2
		50	0	18.84	18.78	18.96	18.93	3
		50	25	18.78	18.82	18.91	18.84	3
		50	50	18.83	18.79	18.93	18.91	3
		100	0	18.82	18.72	18.88	18.86	3
20M	256QAM	1	0	16.69	16.64	16.79	16.74	5
		1	50	16.54	16.49	16.64	16.59	5
		1	99	16.53	16.48	16.63	16.58	5
		50	0	16.88	16.83	16.98	16.93	5
		50	25	16.87	16.82	16.97	16.92	5
		50	50	16.84	16.79	16.94	16.89	5
		100	0	16.82	16.77	16.92	16.87	5
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	21.77	21.66	21.85	21.77	0
		1	37	21.62	21.50	21.73	21.65	0
		1	74	21.66	21.63	21.76	21.76	0
		36	0	20.84	20.78	20.88	20.89	1
		36	19	20.81	20.73	20.95	20.82	1
		36	39	20.77	20.74	20.91	20.89	1
		75	0	20.74	20.73	20.88	20.83	1
15M	16QAM	1	0	20.73	20.73	20.90	20.82	1
		1	37	20.56	20.50	20.74	20.67	1
		1	74	20.61	20.57	20.73	20.76	1
		36	0	19.81	19.81	19.88	19.92	2
		36	19	19.82	19.82	19.95	19.83	2
		36	39	19.83	19.76	19.88	19.81	2
		75	0	19.83	19.70	19.94	19.82	2
15M	64QAM	1	0	19.73	19.66	19.86	19.82	2
		1	37	19.60	19.57	19.66	19.65	2
		1	74	19.61	19.65	19.73	19.67	2
		36	0	18.81	18.77	18.90	18.85	3
		36	19	18.77	18.82	18.90	18.87	3
		36	39	18.86	18.72	18.88	18.91	3
		75	0	18.76	18.78	18.84	18.89	3
15M	256QAM	1	0	16.68	16.63	16.78	16.73	5
		1	37	16.53	16.48	16.63	16.58	5
		1	74	16.52	16.47	16.62	16.57	5
		36	0	16.87	16.82	16.97	16.92	5
		36	19	16.86	16.81	16.96	16.91	5
		36	39	16.83	16.78	16.93	16.88	5
		75	0	16.81	16.76	16.91	16.86	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	21.68	21.57	21.80	21.77	0
		1	24	21.60	21.59	21.68	21.65	0
		1	49	21.65	21.57	21.71	21.63	0
		25	0	20.80	20.71	20.83	20.83	1
		25	12	20.81	20.74	20.85	20.82	1
		25	25	20.79	20.70	20.90	20.77	1
		50	0	20.73	20.68	20.79	20.78	1
10M	16QAM	1	0	20.70	20.56	20.83	20.73	1
		1	24	20.56	20.58	20.67	20.64	1
		1	49	20.59	20.54	20.78	20.62	1
		25	0	19.70	19.66	19.86	19.82	2
		25	12	19.81	19.73	19.90	19.80	2
		25	25	19.82	19.72	19.83	19.79	2
		50	0	19.69	19.60	19.86	19.75	2
10M	64QAM	1	0	19.69	19.55	19.87	19.76	2
		1	24	19.59	19.56	19.64	19.64	2
		1	49	19.61	19.49	19.75	19.68	2
		25	0	18.71	18.74	18.85	18.88	3
		25	12	18.79	18.72	18.82	18.82	3
		25	25	18.75	18.72	18.90	18.78	3
		50	0	18.73	18.66	18.82	18.75	3
10M	256QAM	1	0	16.67	16.62	16.77	16.72	5
		1	24	16.52	16.47	16.62	16.57	5
		1	49	16.51	16.46	16.61	16.56	5
		25	0	16.86	16.81	16.96	16.91	5
		25	12	16.85	16.80	16.95	16.90	5
		25	25	16.82	16.77	16.92	16.87	5
		50	0	16.80	16.75	16.90	16.85	5
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	21.60	21.65	21.82	21.74	0
		1	12	21.60	21.44	21.64	21.60	0
		1	24	21.67	21.48	21.78	21.57	0
		12	0	20.79	20.76	20.78	20.84	1
		12	6	20.84	20.73	20.87	20.80	1
		12	13	20.77	20.78	20.79	20.84	1
		25	0	20.74	20.67	20.85	20.83	1
5M	16QAM	1	0	20.63	20.59	20.80	20.79	1
		1	12	20.58	20.50	20.65	20.58	1
		1	24	20.70	20.55	20.73	20.66	1
		12	0	19.74	19.80	19.78	19.78	2
		12	6	19.82	19.80	19.78	19.75	2
		12	13	19.71	19.76	19.80	19.80	2
		25	0	19.78	19.71	19.81	19.76	2
5M	64QAM	1	0	19.65	19.59	19.84	19.75	2
		1	12	19.56	19.48	19.66	19.52	2
		1	24	19.65	19.55	19.75	19.66	2
		12	0	18.72	18.71	18.88	18.82	3
		12	6	18.85	18.76	18.80	18.77	3
		12	13	18.69	18.75	18.79	18.81	3
		25	0	18.77	18.72	18.80	18.75	3
5M	256QAM	1	0	16.66	16.61	16.76	16.71	5
		1	12	16.51	16.46	16.61	16.56	5
		1	24	16.50	16.45	16.60	16.55	5
		12	0	16.85	16.80	16.95	16.90	5
		12	6	16.84	16.79	16.94	16.89	5
		12	13	16.81	16.76	16.91	16.86	5
		25	0	16.79	16.74	16.89	16.84	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.50	23.65	23.74	0
		1	50	23.49	23.56	23.61	0
		1	99	23.45	23.45	23.53	0
		50	0	22.90	22.99	23.00	1
		50	25	22.89	22.93	22.99	1
		50	50	22.87	22.89	22.95	1
		100	0	22.90	22.90	22.94	1
20M	16QAM	1	0	22.50	22.60	22.64	1
		1	50	22.40	22.44	22.50	1
		1	99	22.36	22.42	22.47	1
		50	0	21.90	21.98	22.00	2
		50	25	21.88	21.95	21.90	2
		50	50	21.86	21.91	21.89	2
		100	0	21.87	21.89	21.98	2
20M	64QAM	1	0	21.80	21.90	21.98	2
		1	50	21.75	21.79	21.86	2
		1	99	21.80	21.81	21.89	2
		50	0	20.75	20.81	20.90	3
		50	25	20.71	20.78	20.79	3
		50	50	20.62	20.69	20.80	3
		100	0	20.70	20.80	20.82	3
20M	256QAM	1	0	18.86	18.88	19.00	5
		1	50	18.82	18.82	18.96	5
		1	99	18.79	18.79	18.88	5
		50	0	18.81	18.85	18.99	5
		50	25	18.76	18.80	18.90	5
		50	50	18.74	18.83	18.91	5
		100	0	18.78	18.87	18.90	5
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.47	23.57	23.67	0
		1	37	23.39	23.46	23.59	0
		1	74	23.41	23.44	23.51	0
		36	0	22.84	22.91	22.90	1
		36	19	22.80	22.91	22.92	1
		36	39	22.81	22.87	22.93	1
		75	0	22.88	22.89	22.85	1
15M	16QAM	1	0	22.45	22.55	22.64	1
		1	37	22.32	22.43	22.43	1
		1	74	22.28	22.36	22.37	1
		36	0	21.82	21.95	21.93	2
		36	19	21.83	21.91	21.89	2
		36	39	21.78	21.83	21.85	2
		75	0	21.83	21.86	21.96	2
15M	64QAM	1	0	21.80	21.84	21.97	2
		1	37	21.67	21.76	21.76	2
		1	74	21.80	21.76	21.85	2
		36	0	20.71	20.75	20.90	3
		36	19	20.66	20.68	20.73	3
		36	39	20.59	20.62	20.71	3
		75	0	20.64	20.70	20.76	3
15M	256QAM	1	0	18.85	18.85	18.96	5
		1	37	18.78	18.72	18.90	5
		1	74	18.75	18.71	18.87	5
		36	0	18.77	18.83	18.94	5
		36	19	18.72	18.78	18.90	5
		36	39	18.73	18.80	18.88	5
		75	0	18.71	18.84	18.81	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	23.42	23.57	23.72	0
		1	24	23.46	23.49	23.54	0
		1	49	23.40	23.40	23.50	0
		25	0	22.82	22.92	22.90	1
		25	12	22.82	22.87	22.90	1
		25	25	22.77	22.87	22.90	1
		50	0	22.87	22.90	22.93	1
10M	16QAM	1	0	22.45	22.56	22.61	1
		1	24	22.30	22.43	22.46	1
		1	49	22.28	22.42	22.44	1
		25	0	21.83	21.92	21.90	2
		25	12	21.79	21.95	21.82	2
		25	25	21.83	21.87	21.79	2
		50	0	21.83	21.80	21.89	2
10M	64QAM	1	0	21.76	21.88	21.95	2
		1	24	21.70	21.75	21.85	2
		1	49	21.75	21.81	21.84	2
		25	0	20.66	20.81	20.81	3
		25	12	20.65	20.73	20.79	3
		25	25	20.55	20.67	20.79	3
		50	0	20.60	20.76	20.77	3
10M	256QAM	1	0	18.82	18.87	18.94	5
		1	24	18.78	18.82	18.91	5
		1	49	18.77	18.74	18.78	5
		25	0	18.78	18.81	18.91	5
		25	12	18.70	18.74	18.83	5
		25	25	18.66	18.78	18.85	5
		50	0	18.72	18.81	18.80	5
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.47	23.58	23.72	0
		1	12	23.47	23.54	23.52	0
		1	24	23.39	23.45	23.50	0
		12	0	22.88	22.99	22.94	1
		12	6	22.84	22.84	22.95	1
		12	13	22.81	22.84	22.85	1
		25	0	22.81	22.80	22.86	1
5M	16QAM	1	0	22.45	22.51	22.56	1
		1	12	22.36	22.37	22.43	1
		1	24	22.36	22.33	22.43	1
		12	0	21.80	21.93	21.91	2
		12	6	21.82	21.88	21.81	2
		12	13	21.79	21.81	21.84	2
		25	0	21.87	21.84	21.88	2
5M	64QAM	1	0	21.74	21.84	21.98	2
		1	12	21.73	21.71	21.85	2
		1	24	21.79	21.72	21.84	2
		12	0	20.69	20.76	20.81	3
		12	6	20.62	20.73	20.70	3
		12	13	20.61	20.64	20.72	3
		25	0	20.61	20.75	20.79	3
5M	256QAM	1	0	18.77	18.80	18.96	5
		1	12	18.79	18.72	18.87	5
		1	24	18.78	18.74	18.82	5
		12	0	18.79	18.82	18.92	5
		12	6	18.69	18.75	18.84	5
		12	13	18.66	18.81	18.84	5
		25	0	18.75	18.85	18.83	5

LTE Conducted Power (P-Sensor_Off_Ant2_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	23.45	23.57	23.66	0
		1	7	23.47	23.51	23.60	0
		1	14	23.42	23.43	23.52	0
		8	0	22.85	22.91	23.00	1
		8	3	22.80	22.86	22.92	1
		8	7	22.83	22.87	22.95	1
		15	0	22.88	22.86	22.88	1
3M	16QAM	1	0	22.45	22.53	22.62	1
		1	7	22.38	22.43	22.42	1
		1	14	22.35	22.35	22.41	1
		8	0	21.85	21.90	21.90	2
		8	3	21.80	21.90	21.84	2
		8	7	21.86	21.82	21.80	2
		15	0	21.84	21.89	21.96	2
3M	64QAM	1	0	21.70	21.87	21.96	2
		1	7	21.69	21.73	21.79	2
		1	14	21.80	21.81	21.87	2
		8	0	20.66	20.74	20.82	3
		8	3	20.64	20.74	20.77	3
		8	7	20.59	20.67	20.78	3
		15	0	20.63	20.73	20.75	3
3M	256QAM	1	0	18.81	18.81	18.99	5
		1	7	18.76	18.82	18.95	5
		1	14	18.73	18.69	18.78	5
		8	0	18.79	18.80	18.90	5
		8	3	18.73	18.74	18.84	5
		8	7	18.67	18.83	18.82	5
		15	0	18.72	18.79	18.80	5
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	23.44	23.56	23.71	0
		1	2	23.41	23.49	23.51	0
		1	5	23.44	23.36	23.52	0
		3	0	22.80	22.89	22.93	0
		3	1	22.79	22.93	22.93	0
		3	3	22.82	22.82	22.93	0
		6	0	22.89	22.80	22.94	1
1.4M	16QAM	1	0	22.47	22.58	22.55	1
		1	2	22.32	22.39	22.43	1
		1	5	22.26	22.42	22.44	1
		3	0	21.90	21.93	21.93	1
		3	1	21.78	21.87	21.81	1
		3	3	21.85	21.88	21.87	1
		6	0	21.80	21.87	21.97	2
1.4M	64QAM	1	0	21.72	21.86	21.90	2
		1	2	21.67	21.71	21.76	2
		1	5	21.74	21.79	21.88	2
		3	0	20.66	20.80	20.85	2
		3	1	20.66	20.77	20.71	2
		3	3	20.57	20.63	20.80	2
		6	0	20.64	20.78	20.79	3
1.4M	256QAM	1	0	18.83	18.83	18.90	5
		1	2	18.73	18.75	18.90	5
		1	5	18.77	18.75	18.79	5
		3	0	18.71	18.75	18.89	5
		3	1	18.67	18.77	18.81	5
		3	3	18.71	18.77	18.88	5
		6	0	18.70	18.83	18.87	5

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	13.87	13.72	13.84	0
		1	50	13.79	13.64	13.76	0
		1	99	13.72	13.57	13.69	0
		50	0	13.70	13.55	13.67	0
		50	25	13.66	13.51	13.63	0
		50	50	13.56	13.41	13.53	0
		100	0	13.67	13.52	13.64	0
20M	16QAM	1	0	13.82	13.67	13.79	0
		1	50	13.77	13.62	13.74	0
		1	99	13.76	13.61	13.73	0
		50	0	13.80	13.65	13.77	0
		50	25	13.76	13.61	13.73	0
		50	50	13.75	13.60	13.72	0
		100	0	13.81	13.66	13.78	0
20M	64QAM	1	0	13.74	13.59	13.71	0
		1	50	13.73	13.58	13.70	0
		1	99	13.75	13.60	13.72	0
		50	0	13.77	13.62	13.74	0
		50	25	13.75	13.60	13.72	0
		50	50	13.72	13.57	13.69	0
		100	0	13.70	13.55	13.67	0
20M	256QAM	1	0	13.70	13.55	13.67	0
		1	50	13.73	13.58	13.70	0
		1	99	13.75	13.60	13.72	0
		50	0	13.69	13.54	13.66	0
		50	25	13.69	13.54	13.66	0
		50	50	13.63	13.48	13.60	0
		100	0	13.66	13.51	13.63	0
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	13.80	13.67	13.82	0
		1	37	13.79	13.54	13.76	0
		1	74	13.72	13.48	13.64	0
		36	0	13.62	13.53	13.64	0
		36	19	13.64	13.49	13.57	0
		36	39	13.46	13.33	13.43	0
		75	0	13.64	13.43	13.60	0
15M	16QAM	1	0	13.81	13.62	13.74	0
		1	37	13.77	13.54	13.73	0
		1	74	13.75	13.59	13.67	0
		36	0	13.73	13.55	13.74	0
		36	19	13.67	13.52	13.68	0
		36	39	13.65	13.59	13.62	0
		75	0	13.71	13.66	13.74	0
15M	64QAM	1	0	13.69	13.59	13.62	0
		1	37	13.67	13.52	13.66	0
		1	74	13.75	13.58	13.70	0
		36	0	13.76	13.53	13.67	0
		36	19	13.73	13.56	13.69	0
		36	39	13.69	13.48	13.67	0
		75	0	13.62	13.53	13.58	0
15M	256QAM	1	0	13.69	13.46	13.61	0
		1	37	13.66	13.53	13.63	0
		1	74	13.75	13.60	13.67	0
		36	0	13.62	13.51	13.61	0
		36	19	13.64	13.49	13.62	0
		36	39	13.54	13.41	13.53	0
		75	0	13.66	13.42	13.57	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	13.79	13.66	13.83	0
		1	24	13.78	13.59	13.68	0
		1	49	13.72	13.54	13.61	0
		25	0	13.65	13.53	13.62	0
		25	12	13.63	13.48	13.54	0
		25	25	13.48	13.36	13.47	0
		50	0	13.67	13.49	13.63	0
10M	16QAM	1	0	13.82	13.58	13.70	0
		1	24	13.69	13.58	13.72	0
		1	49	13.73	13.60	13.73	0
		25	0	13.73	13.63	13.69	0
		25	12	13.71	13.52	13.71	0
		25	25	13.69	13.52	13.70	0
		50	0	13.78	13.65	13.68	0
10M	64QAM	1	0	13.66	13.53	13.62	0
		1	24	13.64	13.48	13.65	0
		1	49	13.74	13.53	13.70	0
		25	0	13.69	13.56	13.74	0
		25	12	13.66	13.54	13.65	0
		25	25	13.68	13.49	13.62	0
		50	0	13.66	13.54	13.63	0
10M	256QAM	1	0	13.63	13.55	13.64	0
		1	24	13.64	13.49	13.64	0
		1	49	13.66	13.59	13.62	0
		25	0	13.64	13.51	13.59	0
		25	12	13.66	13.44	13.66	0
		25	25	13.54	13.41	13.51	0
		50	0	13.65	13.49	13.63	0
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	13.78	13.71	13.80	0
		1	12	13.78	13.62	13.74	0
		1	24	13.62	13.48	13.60	0
		12	0	13.64	13.48	13.61	0
		12	6	13.57	13.51	13.61	0
		12	13	13.47	13.33	13.45	0
		25	0	13.57	13.47	13.59	0
5M	16QAM	1	0	13.81	13.58	13.70	0
		1	12	13.67	13.53	13.64	0
		1	24	13.69	13.56	13.69	0
		12	0	13.72	13.62	13.76	0
		12	6	13.75	13.55	13.72	0
		12	13	13.68	13.52	13.69	0
		25	0	13.74	13.59	13.76	0
5M	64QAM	1	0	13.70	13.58	13.70	0
		1	12	13.69	13.55	13.60	0
		1	24	13.72	13.58	13.66	0
		12	0	13.77	13.52	13.73	0
		12	6	13.69	13.55	13.62	0
		12	13	13.67	13.56	13.67	0
		25	0	13.67	13.55	13.61	0
5M	256QAM	1	0	13.61	13.55	13.65	0
		1	12	13.73	13.56	13.66	0
		1	24	13.75	13.58	13.63	0
		12	0	13.59	13.50	13.58	0
		12	6	13.63	13.46	13.59	0
		12	13	13.60	13.39	13.59	0
		25	0	13.58	13.41	13.53	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	13.84	13.65	13.79	0
		1	7	13.74	13.60	13.69	0
		1	14	13.72	13.53	13.66	0
		8	0	13.60	13.55	13.67	0
		8	3	13.59	13.47	13.54	0
		8	7	13.55	13.36	13.50	0
		15	0	13.64	13.48	13.56	0
3M	16QAM	1	0	13.76	13.64	13.70	0
		1	7	13.72	13.59	13.64	0
		1	14	13.69	13.55	13.68	0
		8	0	13.80	13.62	13.72	0
		8	3	13.74	13.59	13.67	0
		8	7	13.69	13.56	13.68	0
		15	0	13.75	13.59	13.69	0
3M	64QAM	1	0	13.69	13.53	13.64	0
		1	7	13.65	13.57	13.68	0
		1	14	13.75	13.55	13.63	0
		8	0	13.72	13.59	13.71	0
		8	3	13.70	13.51	13.66	0
		8	7	13.62	13.56	13.63	0
		15	0	13.65	13.55	13.62	0
3M	256QAM	1	0	13.69	13.45	13.64	0
		1	7	13.65	13.51	13.61	0
		1	14	13.75	13.59	13.70	0
		8	0	13.67	13.51	13.56	0
		8	3	13.66	13.53	13.63	0
		8	7	13.58	13.44	13.50	0
		15	0	13.56	13.50	13.61	0
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	13.85	13.64	13.75	0
		1	2	13.76	13.56	13.73	0
		1	5	13.64	13.57	13.69	0
		3	0	13.60	13.54	13.66	0
		3	1	13.57	13.51	13.60	0
		3	3	13.46	13.36	13.49	0
		6	0	13.63	13.49	13.58	0
1.4M	16QAM	1	0	13.82	13.60	13.77	0
		1	2	13.77	13.56	13.68	0
		1	5	13.69	13.59	13.66	0
		3	0	13.77	13.56	13.72	0
		3	1	13.69	13.52	13.68	0
		3	3	13.68	13.58	13.69	0
		6	0	13.76	13.61	13.68	0
1.4M	64QAM	1	0	13.69	13.55	13.61	0
		1	2	13.71	13.48	13.67	0
		1	5	13.69	13.51	13.64	0
		3	0	13.73	13.55	13.64	0
		3	1	13.66	13.58	13.68	0
		3	3	13.70	13.49	13.63	0
		6	0	13.65	13.55	13.65	0
1.4M	256QAM	1	0	13.66	13.54	13.63	0
		1	2	13.72	13.49	13.69	0
		1	5	13.71	13.56	13.69	0
		3	0	13.59	13.44	13.63	0
		3	1	13.65	13.46	13.60	0
		3	3	13.56	13.41	13.59	0
		6	0	13.56	13.51	13.57	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	11.4	11.44	11.48	0
		1	50	11.36	11.40	11.44	0
		1	99	11.35	11.39	11.43	0
		50	0	11.37	11.41	11.45	0
		50	25	11.35	11.39	11.43	0
		50	50	11.36	11.40	11.44	0
		100	0	11.32	11.36	11.40	0
20M	16QAM	1	0	11.35	11.39	11.43	0
		1	50	11.32	11.36	11.40	0
		1	99	11.30	11.34	11.38	0
		50	0	11.27	11.31	11.35	0
		50	25	11.26	11.30	11.34	0
		50	50	11.25	11.29	11.33	0
		100	0	11.30	11.34	11.38	0
20M	64QAM	1	0	11.27	11.31	11.35	0
		1	50	11.27	11.31	11.35	0
		1	99	11.25	11.29	11.33	0
		50	0	11.17	11.21	11.25	0
		50	25	11.17	11.21	11.25	0
		50	50	11.15	11.19	11.23	0
		100	0	11.21	11.25	11.29	0
20M	256QAM	1	0	11.26	11.30	11.34	0
		1	50	11.22	11.26	11.30	0
		1	99	11.23	11.27	11.31	0
		50	0	11.27	11.31	11.35	0
		50	25	11.18	11.22	11.26	0
		50	50	11.15	11.19	11.23	0
		100	0	11.22	11.26	11.30	0
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	11.33	11.42	11.39	0
		1	37	11.35	11.34	11.35	0
		1	74	11.31	11.35	11.43	0
		36	0	11.33	11.41	11.38	0
		36	19	11.33	11.32	11.42	0
		36	39	11.31	11.31	11.40	0
		75	0	11.28	11.28	11.30	0
15M	16QAM	1	0	11.30	11.32	11.39	0
		1	37	11.30	11.33	11.36	0
		1	74	11.27	11.32	11.36	0
		36	0	11.27	11.23	11.26	0
		36	19	11.18	11.24	11.34	0
		36	39	11.22	11.24	11.33	0
		75	0	11.30	11.28	11.28	0
15M	64QAM	1	0	11.23	11.30	11.27	0
		1	37	11.22	11.28	11.25	0
		1	74	11.23	11.20	11.28	0
		36	0	11.11	11.21	11.16	0
		36	19	11.15	11.12	11.25	0
		36	39	11.05	11.14	11.14	0
		75	0	11.16	11.17	11.29	0
15M	256QAM	1	0	11.17	11.23	11.24	0
		1	37	11.14	11.23	11.27	0
		1	74	11.14	11.19	11.28	0
		36	0	11.17	11.26	11.33	0
		36	19	11.10	11.12	11.18	0
		36	39	11.13	11.12	11.17	0
		75	0	11.19	11.22	11.29	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	11.39	11.42	11.44	0
		1	24	11.27	11.34	11.43	0
		1	49	11.32	11.31	11.41	0
		25	0	11.37	11.39	11.44	0
		25	12	11.35	11.29	11.41	0
		25	25	11.28	11.37	11.40	0
		50	0	11.31	11.32	11.37	0
10M	16QAM	1	0	11.34	11.36	11.33	0
		1	24	11.27	11.30	11.35	0
		1	49	11.30	11.27	11.38	0
		25	0	11.24	11.24	11.35	0
		25	12	11.17	11.29	11.24	0
		25	25	11.19	11.25	11.26	0
		50	0	11.27	11.32	11.35	0
10M	64QAM	1	0	11.18	11.31	11.28	0
		1	24	11.21	11.25	11.34	0
		1	49	11.18	11.26	11.30	0
		25	0	11.12	11.20	11.21	0
		25	12	11.13	11.14	11.23	0
		25	25	11.06	11.15	11.21	0
		50	0	11.14	11.20	11.23	0
10M	256QAM	1	0	11.17	11.25	11.26	0
		1	24	11.20	11.23	11.20	0
		1	49	11.16	11.19	11.29	0
		25	0	11.24	11.30	11.31	0
		25	12	11.14	11.14	11.23	0
		25	25	11.12	11.17	11.19	0
		50	0	11.20	11.18	11.21	0
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	11.37	11.40	11.46	0
		1	12	11.36	11.34	11.35	0
		1	24	11.25	11.29	11.37	0
		12	0	11.27	11.41	11.40	0
		12	6	11.25	11.31	11.43	0
		12	13	11.35	11.37	11.43	0
		25	0	11.31	11.28	11.32	0
5M	16QAM	1	0	11.28	11.29	11.38	0
		1	12	11.26	11.33	11.33	0
		1	24	11.22	11.29	11.34	0
		12	0	11.17	11.26	11.35	0
		12	6	11.26	11.29	11.32	0
		12	13	11.17	11.20	11.24	0
		25	0	11.25	11.28	11.30	0
5M	64QAM	1	0	11.26	11.22	11.33	0
		1	12	11.25	11.30	11.28	0
		1	24	11.17	11.20	11.25	0
		12	0	11.07	11.21	11.22	0
		12	6	11.13	11.15	11.24	0
		12	13	11.10	11.13	11.17	0
		25	0	11.16	11.15	11.22	0
5M	256QAM	1	0	11.18	11.26	11.27	0
		1	12	11.16	11.20	11.30	0
		1	24	11.16	11.25	11.22	0
		12	0	11.22	11.31	11.32	0
		12	6	11.09	11.22	11.17	0
		12	13	11.14	11.10	11.18	0
		25	0	11.19	11.23	11.26	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 42							
BW	MCS Index	RB Size	RB Offset	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		43190	43340	43490	
		Frequency (MHz)		3560	3575	3590	
20M	QPSK	1	0	10.48	10.45	10.47	0
		1	50	10.46	10.43	10.45	0
		1	99	10.44	10.41	10.43	0
		50	0	10.45	10.42	10.44	0
		50	25	10.44	10.41	10.43	0
		50	50	10.42	10.39	10.41	0
		100	0	10.43	10.40	10.42	0
20M	16QAM	1	0	10.47	10.44	10.46	0
		1	50	10.44	10.41	10.43	0
		1	99	10.41	10.38	10.40	0
		50	0	10.43	10.40	10.42	0
		50	25	10.42	10.39	10.41	0
		50	50	10.40	10.37	10.39	0
		100	0	10.42	10.39	10.41	0
20M	64QAM	1	0	10.32	10.29	10.31	0
		1	50	10.27	10.24	10.26	0
		1	99	10.33	10.30	10.32	0
		50	0	10.41	10.38	10.40	0
		50	25	10.42	10.39	10.41	0
		50	50	10.39	10.36	10.38	0
		100	0	10.41	10.38	10.40	0
20M	256QAM	1	0	10.38	10.35	10.37	0
		1	50	10.35	10.32	10.34	0
		1	99	10.41	10.38	10.40	0
		50	0	10.43	10.40	10.42	0
		50	25	10.39	10.36	10.38	0
		50	50	10.37	10.34	10.36	0
		100	0	10.38	10.35	10.37	0
BW	MCS Index	Channel		43165	43340	43515	3GPP MPR
		Frequency (MHz)		3557.5	3575	3592.5	
15M	QPSK	1	0	10.39	10.35	10.41	0
		1	37	10.40	10.43	10.40	0
		1	74	10.38	10.32	10.36	0
		36	0	10.44	10.35	10.42	0
		36	19	10.42	10.39	10.33	0
		36	39	10.37	10.36	10.31	0
		75	0	10.37	10.37	10.39	0
15M	16QAM	1	0	10.41	10.39	10.38	0
		1	37	10.38	10.36	10.35	0
		1	74	10.41	10.34	10.36	0
		36	0	10.33	10.40	10.41	0
		36	19	10.36	10.33	10.38	0
		36	39	10.40	10.29	10.32	0
		75	0	10.34	10.38	10.39	0
15M	64QAM	1	0	10.28	10.21	10.29	0
		1	37	10.23	10.24	10.26	0
		1	74	10.28	10.25	10.26	0
		36	0	10.34	10.36	10.39	0
		36	19	10.34	10.38	10.41	0
		36	39	10.35	10.30	10.33	0
		75	0	10.39	10.36	10.33	0
15M	256QAM	1	0	10.32	10.30	10.36	0
		1	37	10.25	10.25	10.28	0
		1	74	10.34	10.30	10.36	0
		36	0	10.36	10.31	10.40	0
		36	19	10.37	10.29	10.32	0
		36	39	10.31	10.30	10.32	0
		75	0	10.34	10.34	10.32	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 42							
BW	MCS Index	Channel		43140	43340	43540	3GPP MPR
		Frequency (MHz)		3555	3575	3595	
10M	QPSK	1	0	10.39	10.45	10.41	0
		1	24	10.46	10.34	10.39	0
		1	49	10.35	10.32	10.40	0
		25	0	10.44	10.39	10.34	0
		25	12	10.38	10.33	10.36	0
		25	25	10.41	10.31	10.36	0
		50	0	10.33	10.30	10.39	0
10M	16QAM	1	0	10.42	10.43	10.39	0
		1	24	10.43	10.35	10.41	0
		1	49	10.36	10.30	10.30	0
		25	0	10.35	10.38	10.39	0
		25	12	10.41	10.38	10.37	0
		25	25	10.35	10.35	10.39	0
		50	0	10.36	10.37	10.38	0
10M	64QAM	1	0	10.27	10.27	10.29	0
		1	24	10.25	10.24	10.24	0
		1	49	10.28	10.29	10.26	0
		25	0	10.38	10.33	10.38	0
		25	12	10.33	10.33	10.39	0
		25	25	10.32	10.31	10.32	0
		50	0	10.32	10.31	10.39	0
10M	256QAM	1	0	10.32	10.34	10.34	0
		1	24	10.25	10.30	10.31	0
		1	49	10.36	10.38	10.34	0
		25	0	10.35	10.30	10.42	0
		25	12	10.37	10.27	10.34	0
		25	25	10.27	10.32	10.29	0
		50	0	10.37	10.33	10.34	0
BW	MCS Index	Channel		43115	43340	43565	3GPP MPR
		Frequency (MHz)		3552.5	3575	3597.5	
5M	QPSK	1	0	10.40	10.39	10.43	0
		1	12	10.46	10.40	10.40	0
		1	24	10.43	10.38	10.34	0
		12	0	10.40	10.40	10.40	0
		12	6	10.35	10.37	10.41	0
		12	13	10.33	10.29	10.35	0
		25	0	10.35	10.36	10.42	0
5M	16QAM	1	0	10.41	10.41	10.45	0
		1	12	10.44	10.35	10.33	0
		1	24	10.37	10.35	10.31	0
		12	0	10.39	10.38	10.36	0
		12	6	10.40	10.30	10.35	0
		12	13	10.30	10.37	10.30	0
		25	0	10.35	10.35	10.35	0
5M	64QAM	1	0	10.25	10.19	10.27	0
		1	12	10.22	10.15	10.16	0
		1	24	10.26	10.22	10.28	0
		12	0	10.41	10.31	10.39	0
		12	6	10.36	10.35	10.35	0
		12	13	10.29	10.33	10.36	0
		25	0	10.36	10.28	10.34	0
5M	256QAM	1	0	10.30	10.29	10.35	0
		1	12	10.34	10.24	10.24	0
		1	24	10.32	10.38	10.38	0
		12	0	10.36	10.36	10.40	0
		12	6	10.32	10.34	10.35	0
		12	13	10.29	10.27	10.29	0
		25	0	10.31	10.33	10.31	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)								
LTE Band 48								
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	9.51	9.61	9.90	9.71	0
		1	50	9.45	9.55	9.79	9.65	0
		1	99	9.62	9.72	9.73	9.82	0
		50	0	9.64	9.74	9.82	9.80	0
		50	25	9.61	9.71	9.80	9.81	0
		50	50	9.58	9.68	9.79	9.78	0
		100	0	9.55	9.65	9.77	9.75	0
20M	16QAM	1	0	9.50	9.60	9.73	9.70	0
		1	50	9.62	9.72	9.68	9.82	0
		1	99	9.57	9.67	9.80	9.77	0
		50	0	9.64	9.74	9.75	9.84	0
		50	25	9.61	9.71	9.82	9.81	0
		50	50	9.58	9.68	9.79	9.78	0
		100	0	9.54	9.64	9.76	9.74	0
20M	64QAM	1	0	9.42	9.52	9.72	9.62	0
		1	50	9.32	9.42	9.60	9.52	0
		1	99	9.34	9.44	9.50	9.54	0
		50	0	9.64	9.74	9.52	9.84	0
		50	25	9.62	9.72	9.82	9.82	0
		50	50	9.57	9.67	9.80	9.77	0
		100	0	9.62	9.72	9.75	9.82	0
20M	256QAM	1	0	9.53	9.63	9.80	9.73	0
		1	50	9.48	9.58	9.71	9.68	0
		1	99	9.45	9.55	9.66	9.65	0
		50	0	9.65	9.75	9.63	9.85	0
		50	25	9.62	9.72	9.83	9.82	0
		50	50	9.58	9.68	9.80	9.78	0
		100	0	9.57	9.67	9.76	9.77	0
BW	MCS Index	Channel		55315	55765	9.75	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	9.48	9.57	9.87	9.61	0
		1	37	9.44	9.48	9.64	9.55	0
		1	74	9.55	9.65	9.58	9.80	0
		36	0	9.64	9.68	9.78	9.84	0
		36	19	9.57	9.67	9.73	9.80	0
		36	39	9.53	9.66	9.72	9.77	0
		75	0	9.53	9.58	9.67	9.71	0
15M	16QAM	1	0	9.46	9.50	9.63	9.61	0
		1	37	9.61	9.68	9.60	9.78	0
		1	74	9.51	9.64	9.80	9.73	0
		36	0	9.58	9.71	9.72	9.74	0
		36	19	9.60	9.68	9.74	9.75	0
		36	39	9.49	9.66	9.71	9.77	0
		75	0	9.51	9.60	9.67	9.64	0
15M	64QAM	1	0	9.38	9.50	9.66	9.53	0
		1	37	9.26	9.40	9.57	9.43	0
		1	74	9.29	9.42	9.40	9.51	0
		36	0	9.63	9.64	9.45	9.79	0
		36	19	9.59	9.67	9.76	9.79	0
		36	39	9.50	9.66	9.80	9.69	0
		75	0	9.61	9.65	9.75	9.77	0
15M	256QAM	1	0	9.46	9.47	9.75	9.60	0
		1	37	9.42	9.48	9.61	9.62	0
		1	74	9.42	9.47	9.57	9.56	0
		36	0	8.55	8.66	8.45	8.72	0
		36	19	8.48	8.61	8.73	8.74	0
		36	39	8.51	8.58	8.66	8.75	0
		75	0	8.50	8.51	8.64	8.64	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)								
LTE Band 48								
BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	9.42	9.56	9.87	9.70	0
		1	24	9.45	9.51	9.67	9.64	0
		1	49	9.52	9.62	9.56	9.74	0
		25	0	9.60	9.68	9.79	9.75	0
		25	12	9.56	9.65	9.73	9.73	0
		25	25	9.50	9.63	9.69	9.77	0
		50	0	9.45	9.62	9.71	9.66	0
10M	16QAM	1	0	9.45	9.56	9.70	9.66	0
		1	24	9.55	9.71	9.58	9.80	0
		1	49	9.54	9.65	9.74	9.71	0
		25	0	9.63	9.71	9.74	9.76	0
		25	12	9.60	9.71	9.81	9.79	0
		25	25	9.53	9.63	9.70	9.70	0
		50	0	9.46	9.64	9.67	9.65	0
10M	64QAM	1	0	9.41	9.44	9.71	9.60	0
		1	24	9.23	9.40	9.51	9.52	0
		1	49	9.27	9.36	9.42	9.51	0
		25	0	9.61	9.64	9.47	9.78	0
		25	12	9.62	9.68	9.76	9.73	0
		25	25	9.56	9.66	9.72	9.73	0
		50	0	9.55	9.69	9.68	9.73	0
10M	256QAM	1	0	9.37	9.53	9.69	9.67	0
		1	24	9.39	9.44	9.54	9.62	0
		1	49	9.28	9.49	9.57	9.59	0
		25	0	8.50	8.62	8.45	8.69	0
		25	12	8.52	8.61	8.67	8.70	0
		25	25	8.41	8.67	8.73	8.66	0
		50	0	8.52	8.47	8.64	8.62	0
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	9.49	9.61	9.85	9.65	0
		1	12	9.37	9.51	9.59	9.55	0
		1	24	9.53	9.63	9.62	9.79	0
		12	0	9.54	9.67	9.78	9.79	0
		12	6	9.60	9.62	9.75	9.81	0
		12	13	9.55	9.65	9.72	9.71	0
		25	0	9.55	9.65	9.67	9.74	0
5M	16QAM	1	0	9.47	9.51	9.69	9.66	0
		1	12	9.53	9.67	9.67	9.72	0
		1	24	9.47	9.59	9.73	9.72	0
		12	0	9.64	9.67	9.72	9.75	0
		12	6	9.59	9.70	9.76	9.71	0
		12	13	9.54	9.59	9.73	9.70	0
		25	0	9.54	9.57	9.66	9.70	0
5M	64QAM	1	0	9.35	9.52	9.63	9.62	0
		1	12	9.29	9.41	9.55	9.48	0
		1	24	9.31	9.40	9.47	9.49	0
		12	0	9.61	9.67	9.43	9.80	0
		12	6	9.52	9.64	9.73	9.82	0
		12	13	9.55	9.57	9.80	9.72	0
		25	0	9.57	9.66	9.67	9.80	0
5M	256QAM	1	0	9.39	9.50	9.72	9.66	0
		1	12	9.32	9.40	9.64	9.58	0
		1	24	9.39	9.45	9.55	9.52	0
		12	0	8.53	8.64	8.51	8.69	0
		12	6	8.48	8.57	8.76	8.79	0
		12	13	8.50	8.57	8.67	8.72	0
		25	0	8.49	8.62	8.69	8.63	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	12.78	12.74	12.64	0
		1	50	12.66	12.62	12.52	0
		1	99	12.70	12.66	12.56	0
		50	0	12.65	12.61	12.51	0
		50	25	12.62	12.58	12.48	0
		50	50	12.60	12.56	12.46	0
		100	0	12.71	12.67	12.57	0
20M	16QAM	1	0	12.74	12.70	12.60	0
		1	50	12.58	12.54	12.44	0
		1	99	12.63	12.59	12.49	0
		50	0	12.64	12.60	12.50	0
		50	25	12.62	12.58	12.48	0
		50	50	12.60	12.56	12.46	0
		100	0	12.62	12.58	12.48	0
20M	64QAM	1	0	12.76	12.72	12.62	0
		1	50	12.66	12.62	12.52	0
		1	99	12.62	12.58	12.48	0
		50	0	12.58	12.54	12.44	0
		50	25	12.56	12.52	12.42	0
		50	50	12.55	12.51	12.41	0
		100	0	12.66	12.62	12.52	0
20M	256QAM	1	0	12.76	12.72	12.62	0
		1	50	12.56	12.52	12.42	0
		1	99	12.69	12.65	12.55	0
		50	0	12.57	12.53	12.43	0
		50	25	12.62	12.58	12.48	0
		50	50	12.60	12.56	12.46	0
		100	0	12.70	12.66	12.56	0
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	12.76	12.70	12.60	0
		1	37	12.61	12.52	12.43	0
		1	74	12.69	12.59	12.48	0
		36	0	12.56	12.54	12.45	0
		36	19	12.54	12.56	12.47	0
		36	39	12.54	12.49	12.39	0
		75	0	12.67	12.62	12.52	0
15M	16QAM	1	0	12.70	12.69	12.59	0
		1	37	12.51	12.49	12.44	0
		1	74	12.53	12.58	12.46	0
		36	0	12.58	12.54	12.42	0
		36	19	12.61	12.53	12.40	0
		36	39	12.53	12.48	12.39	0
		75	0	12.60	12.50	12.38	0
15M	64QAM	1	0	12.66	12.63	12.52	0
		1	37	12.57	12.53	12.47	0
		1	74	12.59	12.54	12.48	0
		36	0	12.57	12.47	12.37	0
		36	19	12.56	12.44	12.32	0
		36	39	12.54	12.51	12.34	0
		75	0	12.63	12.54	12.52	0
15M	256QAM	1	0	12.75	12.70	12.52	0
		1	37	12.46	12.45	12.40	0
		1	74	12.64	12.61	12.51	0
		36	0	12.48	12.43	12.41	0
		36	19	12.52	12.52	12.48	0
		36	39	12.60	12.51	12.39	0
		75	0	12.70	12.65	12.54	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	12.69	12.66	12.59	0
		1	24	12.66	12.57	12.49	0
		1	49	12.62	12.66	12.50	0
		25	0	12.60	12.56	12.44	0
		25	12	12.54	12.50	12.46	0
		25	25	12.55	12.50	12.45	0
		50	0	12.69	12.59	12.48	0
10M	16QAM	1	0	12.66	12.62	12.52	0
		1	24	12.50	12.52	12.39	0
		1	49	12.62	12.57	12.39	0
		25	0	12.54	12.55	12.47	0
		25	12	12.52	12.48	12.40	0
		25	25	12.52	12.56	12.37	0
		50	0	12.57	12.58	12.44	0
10M	64QAM	1	0	12.68	12.69	12.54	0
		1	24	12.66	12.53	12.52	0
		1	49	12.58	12.48	12.44	0
		25	0	12.50	12.52	12.36	0
		25	12	12.53	12.52	12.33	0
		25	25	12.47	12.49	12.37	0
		50	0	12.64	12.59	12.44	0
10M	256QAM	1	0	12.66	12.66	12.53	0
		1	24	12.46	12.51	12.35	0
		1	49	12.61	12.63	12.53	0
		25	0	12.54	12.46	12.36	0
		25	12	12.52	12.48	12.38	0
		25	25	12.56	12.51	12.36	0
		50	0	12.68	12.63	12.56	0
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	12.77	12.74	12.54	0
		1	12	12.66	12.56	12.47	0
		1	24	12.63	12.62	12.52	0
		12	0	12.58	12.54	12.48	0
		12	6	12.59	12.57	12.41	0
		12	13	12.51	12.50	12.44	0
		25	0	12.71	12.65	12.48	0
5M	16QAM	1	0	12.72	12.69	12.53	0
		1	12	12.50	12.51	12.38	0
		1	24	12.55	12.54	12.40	0
		12	0	12.57	12.53	12.45	0
		12	6	12.62	12.49	12.45	0
		12	13	12.53	12.51	12.39	0
		25	0	12.54	12.51	12.47	0
5M	64QAM	1	0	12.68	12.67	12.55	0
		1	12	12.62	12.62	12.44	0
		1	24	12.52	12.58	12.41	0
		12	0	12.54	12.54	12.42	0
		12	6	12.54	12.50	12.36	0
		12	13	12.45	12.49	12.38	0
		25	0	12.57	12.54	12.52	0
5M	256QAM	1	0	12.68	12.65	12.54	0
		1	12	12.49	12.49	12.34	0
		1	24	12.68	12.58	12.55	0
		12	0	12.57	12.53	12.43	0
		12	6	12.59	12.48	12.45	0
		12	13	12.51	12.55	12.45	0
		25	0	12.64	12.57	12.46	0

LTE Conducted Power (P-Sensor_On_Ant2_Laptop)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	12.69	12.67	12.64	0
		1	7	12.60	12.61	12.52	0
		1	14	12.67	12.66	12.46	0
		8	0	12.64	12.54	12.42	0
		8	3	12.59	12.57	12.45	0
		8	7	12.60	12.52	12.39	0
		15	0	12.63	12.63	12.55	0
3M	16QAM	1	0	12.73	12.69	12.55	0
		1	7	12.52	12.47	12.37	0
		1	14	12.62	12.55	12.44	0
		8	0	12.62	12.59	12.46	0
		8	3	12.57	12.51	12.46	0
		8	7	12.59	12.50	12.39	0
		15	0	12.54	12.49	12.44	0
3M	64QAM	1	0	12.71	12.64	12.55	0
		1	7	12.58	12.57	12.45	0
		1	14	12.58	12.52	12.38	0
		8	0	12.52	12.51	12.34	0
		8	3	12.51	12.47	12.41	0
		8	7	12.55	12.43	12.31	0
		15	0	12.64	12.58	12.45	0
3M	256QAM	1	0	12.67	12.64	12.59	0
		1	7	12.49	12.46	12.41	0
		1	14	12.62	12.57	12.50	0
		8	0	12.54	12.52	12.42	0
		8	3	12.54	12.52	12.42	0
		8	7	12.53	12.56	12.43	0
		15	0	12.64	12.58	12.53	0
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	12.77	12.68	12.63	0
		1	2	12.57	12.52	12.45	0
		1	5	12.62	12.56	12.50	0
		3	0	12.62	12.60	12.41	0
		3	1	12.53	12.49	12.45	0
		3	3	12.59	12.54	12.46	0
		6	0	12.71	12.58	12.54	0
1.4M	16QAM	1	0	12.69	12.62	12.51	0
		1	2	12.49	12.44	12.44	0
		1	5	12.57	12.58	12.47	0
		3	0	12.59	12.50	12.50	0
		3	1	12.56	12.57	12.46	0
		3	3	12.53	12.51	12.39	0
		6	0	12.61	12.53	12.44	0
1.4M	64QAM	1	0	12.66	12.62	12.53	0
		1	2	12.66	12.56	12.45	0
		1	5	12.57	12.54	12.44	0
		3	0	12.54	12.50	12.42	0
		3	1	12.56	12.45	12.35	0
		3	3	12.46	12.45	12.36	0
		6	0	12.62	12.60	12.43	0
1.4M	256QAM	1	0	12.72	12.69	12.54	0
		1	2	12.53	12.45	12.33	0
		1	5	12.69	12.64	12.51	0
		3	0	12.47	12.44	12.40	0
		3	1	12.56	12.55	12.46	0
		3	3	12.51	12.49	12.36	0
		6	0	12.61	12.61	12.48	0

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	23.83	23.74	23.88	0
		1	53	23.78	23.72	23.82	0
		1	104	23.78	23.69	23.84	0
		50	0	23.41	23.43	23.44	0.5
		50	25	23.77	23.75	23.74	0
		50	53	23.32	23.30	23.34	0.5
		100	0	23.44	23.41	23.45	0.5
20M	DFT-S QPSK	1	1	23.89	23.82	23.88	0
		1	53	23.88	23.81	23.87	0
		1	104	23.86	23.79	23.85	0
		50	0	22.98	22.91	22.97	1
		50	25	23.83	23.76	23.82	0
		50	53	22.87	22.80	22.86	1
		100	0	22.98	22.91	22.97	1
20M	DFT-S 16QAM	1	1	22.97	22.94	22.96	1
20M	DFT-S 64QAM	1	1	21.48	21.43	21.49	2.5
20M	DFT-S 256QAM	1	1	19.48	19.41	19.47	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	23.76	23.70	23.84	0
		1	40	23.72	23.68	23.75	0
		1	77	23.74	23.59	23.76	0
		36	0	23.39	23.36	23.35	0.5
		36	18	23.71	23.67	23.70	0
		36	40	23.28	23.23	23.34	0.5
		75	0	23.42	23.38	23.37	0.5
15M	DFT-S QPSK	1	1	23.84	23.82	23.81	0
		1	40	23.79	23.71	23.87	0
		1	77	23.83	23.78	23.83	0
		36	0	22.89	22.85	22.88	1
		36	18	23.81	23.71	23.76	0
		36	40	22.86	22.80	22.85	1
		75	0	22.90	22.83	22.97	1
15M	DFT-S 16QAM	1	1	22.89	22.86	22.96	1
15M	DFT-S 64QAM	1	1	21.45	21.40	21.46	2.5
15M	DFT-S 256QAM	1	1	19.45	19.31	19.40	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	23.82	23.70	23.87	0
		1	26	23.72	23.68	23.72	0
		1	50	23.68	23.64	23.81	0
		25	0	23.32	23.43	23.39	0.5
		25	12	23.72	23.73	23.73	0
		25	26	23.22	23.26	23.29	0.5
		50	0	23.40	23.32	23.42	0.5
10M	DFT-S QPSK	1	1	23.84	23.76	23.80	0
		1	26	23.79	23.80	23.84	0
		1	50	23.82	23.79	23.76	0
		25	0	22.97	22.91	22.94	1
		25	12	23.78	23.67	23.79	0
		25	26	22.77	22.73	22.86	1
		50	0	22.98	22.81	22.96	1
10M	DFT-S 16QAM	1	1	22.92	22.84	22.87	1
10M	DFT-S 64QAM	1	1	21.42	21.38	21.43	2.5
10M	DFT-S 256QAM	1	1	19.45	19.31	19.43	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	23.83	23.68	23.87	0
		1	13	23.74	23.71	23.79	0
		1	23	23.68	23.59	23.84	0
		12	0	23.32	23.38	23.41	0.5
		12	6	23.67	23.75	23.64	0
		12	13	23.24	23.23	23.28	0.5
		25	0	23.37	23.38	23.36	0.5
5M	DFT-S QPSK	1	1	23.87	23.77	23.78	0
		1	13	23.84	23.74	23.87	0
		1	23	23.77	23.74	23.77	0
		12	0	22.98	22.90	22.91	1
		12	6	23.74	23.72	23.74	0
		12	13	22.78	22.76	22.78	1
		25	0	22.98	22.88	22.89	1
5M	DFT-S 16QAM	1	1	22.90	22.93	22.96	1
5M	DFT-S 64QAM	1	1	21.49	21.35	21.46	2.5
5M	DFT-S 256QAM	1	1	19.48	19.35	19.39	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	23.69	23.73	23.72	0
		1	53	23.71	23.65	23.64	0
		1	104	23.66	23.68	23.71	0
		50	0	23.21	23.16	23.25	0.5
		50	25	23.70	23.69	23.65	0
		50	53	23.29	23.21	23.22	0.5
		100	0	23.22	23.12	23.18	0.5
20M	DFT-S QPSK	1	1	23.79	23.77	23.76	0
		1	53	23.76	23.74	23.73	0
		1	104	23.74	23.72	23.71	0
		50	0	22.78	22.76	22.75	1
		50	25	23.77	23.75	23.74	0
		50	53	22.79	22.77	22.76	1
		100	0	22.73	22.71	22.70	1
20M	DFT-S 16QAM	1	1	22.56	22.54	22.53	1
20M	DFT-S 64QAM	1	1	21.41	21.39	21.38	2.5
20M	DFT-S 256QAM	1	1	19.43	19.41	19.40	4.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	23.65	23.63	23.69	0
		1	40	23.70	23.64	23.64	0
		1	77	23.64	23.59	23.66	0
		36	0	23.12	23.08	23.24	0.5
		36	18	23.61	23.67	23.62	0
		36	40	23.27	23.16	23.19	0.5
		75	0	23.18	23.11	23.08	0.5
15M	DFT-S QPSK	1	1	23.74	23.72	23.72	0
		1	40	23.70	23.71	23.73	0
		1	77	23.65	23.63	23.66	0
		36	0	22.76	22.69	22.75	1
		36	18	23.72	23.73	23.67	0
		36	40	22.70	22.67	22.69	1
		75	0	22.64	22.62	22.62	1
15M	DFT-S 16QAM	1	1	22.48	22.49	22.46	1
15M	DFT-S 64QAM	1	1	21.31	21.34	21.36	2.5
15M	DFT-S 256QAM	1	1	19.35	19.40	19.30	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 5							
BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	23.65	23.67	23.69	0
		1	26	23.68	23.55	23.62	0
		1	50	23.56	23.66	23.63	0
		25	0	23.19	23.09	23.22	0.5
		25	12	23.66	23.59	23.62	0
		25	26	23.20	23.11	23.15	0.5
		50	0	23.13	23.07	23.09	0.5
10M	DFT-S QPSK	1	1	23.78	23.68	23.76	0
		1	26	23.74	23.70	23.68	0
		1	50	23.73	23.72	23.67	0
		25	0	22.71	22.74	22.71	1
		25	12	23.76	23.70	23.64	0
		25	26	22.69	22.71	22.66	1
		50	0	22.72	22.70	22.66	1
10M	DFT-S 16QAM	1	1	22.50	22.52	22.49	1
10M	DFT-S 64QAM	1	1	21.40	21.38	21.32	2.5
10M	DFT-S 256QAM	1	1	19.35	19.32	19.34	4.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	23.61	23.73	23.65	0
		1	13	23.62	23.60	23.62	0
		1	23	23.65	23.63	23.70	0
		12	0	23.15	23.07	23.22	0.5
		12	6	23.66	23.69	23.64	0
		12	13	23.22	23.18	23.15	0.5
		25	0	23.15	23.11	23.08	0.5
5M	DFT-S QPSK	1	1	23.77	23.71	23.75	0
		1	13	23.66	23.72	23.63	0
		1	23	23.66	23.64	23.64	0
		12	0	22.70	22.69	22.65	1
		12	6	23.72	23.71	23.73	0
		12	13	22.73	22.67	22.69	1
		25	0	22.67	22.69	22.61	1
5M	DFT-S 16QAM	1	1	22.51	22.52	22.44	1
5M	DFT-S 64QAM	1	1	21.34	21.29	21.38	2.5
5M	DFT-S 256QAM	1	1	19.39	19.40	19.39	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		141300	141500	141700	
		Frequency (MHz)		706.5	707.5	708.5	
15M	DFT-S PI/2 BPSK	1	1	23.30	23.43	23.36	0
		1	40	23.09	23.18	23.19	0
		1	77	23.14	23.22	23.09	0
		36	0	22.63	22.73	22.67	0.5
		36	18	23.16	23.23	23.16	0
		36	40	22.61	22.64	22.60	0.5
		75	0	22.60	22.67	22.64	0.5
15M	DFT-S QPSK	1	1	23.37	23.46	23.38	0
		1	40	23.18	23.27	23.19	0
		1	77	23.14	23.23	23.15	0
		36	0	22.22	22.31	22.23	1
		36	18	23.20	23.29	23.21	0
		36	40	22.12	22.21	22.13	1
		75	0	22.14	22.23	22.15	1
15M	DFT-S 16QAM	1	1	22.04	22.13	22.05	1
15M	DFT-S 64QAM	1	1	21.18	21.27	21.19	2.5
15M	DFT-S 256QAM	1	1	19.24	19.33	19.25	4.5
BW	MCS Index	Channel		140800	141500	142200	3GPP MPR
		Frequency (MHz)		704	707.5	711	
10M	DFT-S PI/2 BPSK	1	1	23.28	23.33	23.28	0
		1	26	23.01	23.12	23.15	0
		1	50	23.13	23.22	23.03	0
		25	0	22.54	22.66	22.63	0.5
		25	12	23.16	23.22	23.13	0
		25	26	22.55	22.54	22.52	0.5
		50	0	22.56	22.62	22.59	0.5
10M	DFT-S QPSK	1	1	23.37	23.45	23.28	0
		1	26	23.08	23.25	23.17	0
		1	50	23.04	23.15	23.15	0
		25	0	22.16	22.22	22.14	1
		25	12	23.16	23.23	23.11	0
		25	26	22.02	22.17	22.07	1
		50	0	22.06	22.23	22.13	1
10M	DFT-S 16QAM	1	1	22.02	22.10	22.05	1
10M	DFT-S 64QAM	1	1	21.10	21.18	21.10	2.5
10M	DFT-S 256QAM	1	1	19.19	19.28	19.16	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 12							
BW	MCS Index	Channel		140300	141500	142700	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	DFT-S PI/2 BPSK	1	1	23.21	23.40	23.30	0
		1	13	23.02	23.14	23.13	0
		1	23	23.10	23.20	23.01	0
		12	0	22.53	22.68	22.59	0.5
		12	6	23.09	23.14	23.10	0
		12	13	22.59	22.62	22.55	0.5
		25	0	22.54	22.59	22.56	0.5
5M	DFT-S QPSK	1	1	23.28	23.37	23.30	0
		1	13	23.09	23.26	23.13	0
		1	23	23.08	23.15	23.15	0
		12	0	22.13	22.26	22.18	1
		12	6	23.17	23.21	23.17	0
		12	13	22.06	22.15	22.09	1
		25	0	22.08	22.14	22.13	1
5M	DFT-S 16QAM	1	1	22.02	22.04	22.05	1
5M	DFT-S 64QAM	1	1	21.11	21.18	21.09	2.5
5M	DFT-S 256QAM	1	1	19.23	19.28	19.17	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	23.90	23.96	23.88	0
		1	53	23.78	23.79	23.72	0
		1	104	23.39	23.13	23.00	0
		50	0	23.35	23.32	23.21	0.5
		50	25	23.71	23.78	23.63	0
		50	53	23.26	23.36	23.21	0.5
		100	0	23.13	23.15	23.08	0.5
20M	DFT-S QPSK	1	1	23.91	24.00	23.83	0
		1	53	23.98	23.90	23.86	0
		1	104	23.82	23.90	23.79	0
		50	0	22.90	23.00	22.91	1
		50	25	23.80	23.88	23.77	0
		50	53	22.86	22.96	22.69	1
		100	0	22.77	22.78	22.74	1
20M	DFT-S 16QAM	1	1	22.71	22.83	22.68	1
20M	DFT-S 64QAM	1	1	21.29	21.33	21.20	2.5
20M	DFT-S 256QAM	1	1	19.44	19.50	19.40	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	23.88	23.86	23.82	0
		1	40	23.73	23.73	23.68	0
		1	77	23.33	23.09	22.96	0
		36	0	23.33	23.23	23.13	0.5
		36	18	23.66	23.76	23.59	0
		36	40	23.18	23.34	23.15	0.5
		75	0	23.08	23.14	22.98	0.5
15M	DFT-S QPSK	1	1	23.91	23.98	23.82	0
		1	40	23.89	23.89	23.81	0
		1	77	23.76	23.86	23.70	0
		36	0	22.86	22.92	22.86	1
		36	18	23.74	23.78	23.70	0
		36	40	22.85	22.93	22.59	1
		75	0	22.75	22.77	22.74	1
15M	DFT-S 16QAM	1	1	22.62	22.77	22.64	1
15M	DFT-S 64QAM	1	1	21.22	21.28	21.17	2.5
15M	DFT-S 256QAM	1	1	19.34	19.45	19.40	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	23.89	23.88	23.84	0
		1	26	23.75	23.75	23.68	0
		1	50	23.34	23.10	22.93	0
		25	0	23.31	23.24	23.18	0.5
		25	12	23.62	23.71	23.55	0
		25	26	23.26	23.36	23.21	0.5
		50	0	23.04	23.12	23.02	0.5
10M	DFT-S QPSK	1	1	23.90	23.96	23.83	0
		1	26	23.88	23.80	23.77	0
		1	50	23.73	23.86	23.76	0
		25	0	22.88	22.96	22.82	1
		25	12	23.72	23.80	23.70	0
		25	26	22.81	22.92	22.67	1
		50	0	22.73	22.72	22.64	1
10M	DFT-S 16QAM	1	1	22.67	22.73	22.67	1
10M	DFT-S 64QAM	1	1	21.25	21.24	21.10	2.5
10M	DFT-S 256QAM	1	1	19.35	19.50	19.36	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Tablet)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	23.83	23.87	23.85	0
		1	13	23.74	23.73	23.68	0
		1	23	23.34	23.11	22.90	0
		12	0	23.25	23.22	23.21	0.5
		12	6	23.64	23.70	23.57	0
		12	13	23.16	23.30	23.15	0.5
		25	0	23.10	23.08	23.07	0.5
5M	DFT-S QPSK	1	1	23.85	23.98	23.77	0
		1	13	23.95	23.89	23.85	0
		1	23	23.82	23.88	23.79	0
		12	0	22.86	23.00	22.88	1
		12	6	23.76	23.86	23.72	0
		12	13	22.83	22.86	22.65	1
		25	0	22.73	22.71	22.64	1
5M	DFT-S 16QAM	1	1	22.62	22.82	22.58	1
5M	DFT-S 64QAM	1	1	21.27	21.24	21.11	2.5
5M	DFT-S 256QAM	1	1	19.38	19.41	19.30	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	13.19	13.00	13.05	0
		1	53	13.16	12.97	13.05	0
		1	104	13.07	12.90	12.93	0
		50	0	12.73	12.57	12.53	0.5
		50	25	13.04	12.96	12.87	0
		50	53	12.71	12.54	12.59	0.5
		100	0	12.70	12.55	12.61	0.5
20M	DFT-S QPSK	1	1	13.29	13.16	13.15	0
		1	53	13.22	13.10	13.11	0
		1	104	13.11	12.94	12.93	0
		50	0	12.44	12.29	12.31	1
		50	25	13.12	12.94	12.92	0
		50	53	12.48	12.34	12.31	1
		100	0	12.41	12.29	12.27	1
20M	DFT-S 16QAM	1	1	12.43	12.30	12.29	1
20M	DFT-S 64QAM	1	1	10.75	10.62	10.61	2.5
20M	DFT-S 256QAM	1	1	8.96	8.83	8.82	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	13.28	13.09	13.03	0
		1	40	13.21	13.06	13.09	0
		1	77	13.13	12.99	12.96	0
		36	0	12.69	12.51	12.46	0.5
		36	18	13.05	12.92	12.96	0
		36	40	12.62	12.56	12.56	0.5
		75	0	12.65	12.54	12.63	0.5
15M	DFT-S QPSK	1	1	13.23	13.15	13.16	0
		1	40	13.21	13.10	13.06	0
		1	77	13.10	12.98	12.96	0
		36	0	12.39	12.30	12.35	1
		36	18	13.11	13.00	12.94	0
		36	40	12.47	12.27	12.26	1
		75	0	12.36	12.35	12.32	1
15M	DFT-S 16QAM	1	1	12.33	12.27	12.23	1
15M	DFT-S 64QAM	1	1	10.74	10.52	10.53	2.5
15M	DFT-S 256QAM	1	1	8.93	8.78	8.72	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	13.27	13.05	13.10	0
		1	26	13.15	13.04	13.07	0
		1	50	13.04	12.91	12.97	0
		25	0	12.76	12.51	12.53	0.5
		25	12	13.01	12.88	12.94	0
		25	26	12.65	12.58	12.59	0.5
		50	0	12.64	12.59	12.61	0.5
10M	DFT-S QPSK	1	1	13.23	13.14	13.09	0
		1	26	13.19	13.16	13.14	0
		1	50	13.12	12.99	12.99	0
		25	0	12.39	12.28	12.32	1
		25	12	13.04	12.99	12.96	0
		25	26	12.40	12.25	12.33	1
		50	0	12.38	12.29	12.31	1
10M	DFT-S 16QAM	1	1	12.42	12.28	12.29	1
10M	DFT-S 64QAM	1	1	10.66	10.58	10.53	2.5
10M	DFT-S 256QAM	1	1	8.88	8.73	8.75	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	13.26	12.99	13.11	0
		1	13	13.18	12.96	13.07	0
		1	23	13.11	12.91	12.92	0
		12	0	12.75	12.54	12.49	0.5
		12	6	13.07	12.96	12.87	0
		12	13	12.67	12.55	12.55	0.5
		25	0	12.70	12.57	12.64	0.5
5M	DFT-S QPSK	1	1	13.26	13.17	13.08	0
		1	13	13.21	13.10	13.15	0
		1	23	13.08	12.94	12.97	0
		12	0	12.40	12.29	12.27	1
		12	6	13.04	12.97	12.92	0
		12	13	12.39	12.33	12.33	1
		25	0	12.37	12.32	12.30	1
5M	DFT-S 16QAM	1	1	12.42	12.29	12.20	1
5M	DFT-S 64QAM	1	1	10.70	10.53	10.57	2.5
5M	DFT-S 256QAM	1	1	8.93	8.82	8.76	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	15.34	15.45	15.40	0
		1	53	15.22	15.32	15.34	0
		1	104	15.23	15.29	15.29	0
		50	0	14.66	14.78	14.75	0.5
		50	25	15.10	15.25	15.20	0
		50	53	14.65	14.78	14.67	0.5
		100	0	14.65	14.71	14.70	0.5
20M	DFT-S QPSK	1	1	15.41	15.47	15.44	0
		1	53	15.30	15.40	15.35	0
		1	104	15.27	15.37	15.32	0
		50	0	14.10	14.20	14.15	1
		50	25	15.20	15.30	15.25	0
		50	53	14.22	14.32	14.27	1
		100	0	14.20	14.30	14.25	1
20M	DFT-S 16QAM	1	1	14.23	14.33	14.28	1
20M	DFT-S 64QAM	1	1	12.80	12.90	12.85	2.5
20M	DFT-S 256QAM	1	1	10.84	10.94	10.89	4.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	15.34	15.35	15.39	0
		1	40	15.15	15.27	15.27	0
		1	77	15.16	15.28	15.23	0
		36	0	14.66	14.77	14.75	0.5
		36	18	15.10	15.17	15.16	0
		36	40	14.59	14.70	14.67	0.5
		75	0	14.59	14.69	14.65	0.5
15M	DFT-S QPSK	1	1	15.32	15.45	15.35	0
		1	40	15.27	15.30	15.31	0
		1	77	15.22	15.32	15.24	0
		36	0	14.02	14.20	14.13	1
		36	18	15.20	15.30	15.17	0
		36	40	14.17	14.26	14.27	1
		75	0	14.19	14.27	14.20	1
15M	DFT-S 16QAM	1	1	14.18	14.25	14.25	1
15M	DFT-S 64QAM	1	1	12.70	12.89	12.82	2.5
15M	DFT-S 256QAM	1	1	10.78	10.85	10.82	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 5							
BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	15.33	15.39	15.32	0
		1	26	15.15	15.27	15.28	0
		1	50	15.16	15.20	15.27	0
		25	0	14.58	14.71	14.75	0.5
		25	12	15.09	15.23	15.15	0
		25	26	14.56	14.68	14.59	0.5
		50	0	14.64	14.65	14.66	0.5
10M	DFT-S QPSK	1	1	15.40	15.37	15.34	0
		1	26	15.29	15.38	15.27	0
		1	50	15.20	15.29	15.31	0
		25	0	14.06	14.19	14.05	1
		25	12	15.10	15.30	15.18	0
		25	26	14.14	14.27	14.17	1
		50	0	14.15	14.26	14.17	1
10M	DFT-S 16QAM	1	1	14.22	14.23	14.23	1
10M	DFT-S 64QAM	1	1	12.78	12.82	12.83	2.5
10M	DFT-S 256QAM	1	1	10.76	10.90	10.81	4.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	15.33	15.38	15.32	0
		1	13	15.13	15.23	15.33	0
		1	23	15.15	15.28	15.27	0
		12	0	14.65	14.73	14.70	0.5
		12	6	15.02	15.23	15.20	0
		12	13	14.56	14.71	14.67	0.5
		25	0	14.63	14.62	14.63	0.5
5M	DFT-S QPSK	1	1	15.39	15.43	15.35	0
		1	13	15.27	15.40	15.31	0
		1	23	15.27	15.33	15.29	0
		12	0	14.07	14.17	14.11	1
		12	6	15.17	15.29	15.17	0
		12	13	14.13	14.27	14.19	1
		25	0	14.20	14.21	14.20	1
5M	DFT-S 16QAM	1	1	14.16	14.32	14.18	1
5M	DFT-S 64QAM	1	1	12.77	12.82	12.84	2.5
5M	DFT-S 256QAM	1	1	10.75	10.90	10.80	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		141300	141500	141700	
		Frequency (MHz)		706.5	707.5	708.5	
15M	DFT-S PI/2 BPSK	1	1	14.79	14.72	14.70	0
		1	40	14.65	14.57	14.58	0
		1	77	14.45	14.40	14.36	0
		36	0	14.23	14.15	14.14	0.5
		36	18	14.56	14.60	14.47	0
		36	40	14.36	14.33	14.24	0.5
		75	0	14.32	14.31	14.24	0.5
15M	DFT-S QPSK	1	1	14.81	14.78	14.75	0
		1	40	14.67	14.63	14.58	0
		1	77	14.52	14.48	14.43	0
		36	0	13.76	13.72	13.67	1
		36	18	14.64	14.60	14.55	0
		36	40	13.90	13.86	13.81	1
		75	0	13.88	13.84	13.79	1
15M	DFT-S 16QAM	1	1	13.90	13.86	13.81	1
15M	DFT-S 64QAM	1	1	12.40	12.36	12.31	2.5
15M	DFT-S 256QAM	1	1	10.41	10.37	10.37	4.5
BW	MCS Index	Channel		140800	141500	142200	3GPP MPR
		Frequency (MHz)		704	707.5	711	
10M	DFT-S PI/2 BPSK	1	1	14.77	14.63	14.61	0
		1	26	14.60	14.56	14.55	0
		1	50	14.41	14.37	14.31	0
		25	0	14.15	14.10	14.13	0.5
		25	12	14.55	14.55	14.37	0
		25	26	14.35	14.28	14.20	0.5
		50	0	14.23	14.25	14.23	0.5
10M	DFT-S QPSK	1	1	14.77	14.77	14.66	0
		1	26	14.65	14.61	14.54	0
		1	50	14.45	14.47	14.42	0
		25	0	13.68	13.63	13.59	1
		25	12	14.62	14.53	14.46	0
		25	26	13.81	13.77	13.78	1
		50	0	13.87	13.79	13.78	1
10M	DFT-S 16QAM	1	1	13.86	13.83	13.71	1
10M	DFT-S 64QAM	1	1	12.36	12.32	12.30	2.5
10M	DFT-S 256QAM	1	1	10.31	10.35	10.29	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 12							
BW	MCS Index	Channel		140300	141500	142700	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	DFT-S PI/2 BPSK	1	1	14.74	14.70	14.69	0
		1	13	14.56	14.57	14.56	0
		1	23	14.37	14.33	14.30	0
		12	0	14.20	14.13	14.06	0.5
		12	6	14.46	14.57	14.41	0
		12	13	14.27	14.33	14.15	0.5
		25	0	14.30	14.27	14.24	0.5
5M	DFT-S QPSK	1	1	14.74	14.77	14.65	0
		1	13	14.63	14.62	14.52	0
		1	23	14.42	14.39	14.33	0
		12	0	13.75	13.62	13.57	1
		12	6	14.62	14.58	14.54	0
		12	13	13.86	13.80	13.73	1
		25	0	13.83	13.84	13.76	1
5M	DFT-S 16QAM	1	1	13.87	13.85	13.78	1
5M	DFT-S 64QAM	1	1	12.34	12.28	12.25	2.5
5M	DFT-S 256QAM	1	1	10.35	10.34	10.34	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	12.87	12.97	11.84	0
		1	53	12.73	12.85	12.69	0
		1	104	12.68	12.81	12.72	0
		50	0	12.23	12.29	12.25	0.5
		50	25	12.68	12.80	12.67	0
		50	53	12.20	12.30	12.23	0.5
		100	0	12.16	12.23	12.12	0.5
20M	DFT-S QPSK	1	1	12.93	12.98	11.90	0
		1	53	12.80	12.86	12.76	0
		1	104	12.78	12.84	12.74	0
		50	0	11.78	11.84	11.78	1
		50	25	12.78	12.84	12.74	0
		50	53	11.78	11.84	11.74	1
		100	0	11.78	11.82	11.70	1
20M	DFT-S 16QAM	1	1	11.73	11.79	11.69	1
20M	DFT-S 64QAM	1	1	10.41	10.44	10.34	2.5
20M	DFT-S 256QAM	1	1	8.43	8.47	8.37	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	12.83	12.93	11.75	0
		1	40	12.63	12.79	12.64	0
		1	77	12.63	12.80	12.72	0
		36	0	12.17	12.26	12.20	0.5
		36	18	12.66	12.80	12.61	0
		36	40	12.12	12.26	12.18	0.5
		75	0	12.15	12.20	12.02	0.5
15M	DFT-S QPSK	1	1	12.83	12.94	11.85	0
		1	40	12.74	12.78	12.70	0
		1	77	12.77	12.81	12.65	0
		36	0	11.75	11.82	11.72	1
		36	18	12.68	12.84	12.70	0
		36	40	11.78	11.80	11.74	1
		75	0	11.75	11.81	11.69	1
15M	DFT-S 16QAM	1	1	11.64	11.76	11.65	1
15M	DFT-S 64QAM	1	1	10.37	10.44	10.32	2.5
15M	DFT-S 256QAM	1	1	8.41	8.38	8.34	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	12.86	12.94	11.84	0
		1	26	12.68	12.80	12.69	0
		1	50	12.60	12.77	12.63	0
		25	0	12.19	12.28	12.22	0.5
		25	12	12.66	12.76	12.59	0
		25	26	12.13	12.30	12.14	0.5
		50	0	12.16	12.16	12.11	0.5
10M	DFT-S QPSK	1	1	12.93	12.97	11.90	0
		1	26	12.72	12.78	12.75	0
		1	50	12.75	12.84	12.73	0
		25	0	11.78	11.75	11.78	1
		25	12	12.77	12.79	12.72	0
		25	26	11.73	11.82	11.72	1
		50	0	11.70	11.80	11.70	1
10M	DFT-S 16QAM	1	1	11.66	11.79	11.66	1
10M	DFT-S 64QAM	1	1	10.38	10.36	10.34	2.5
10M	DFT-S 256QAM	1	1	8.43	8.43	8.28	4.5

NR Conducted Power (P-Sensor_On_Ant0_Tablet)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	12.81	12.94	11.81	0
		1	13	12.67	12.84	12.64	0
		1	23	12.59	12.77	12.66	0
		12	0	12.14	12.27	12.21	0.5
		12	6	12.63	12.76	12.57	0
		12	13	12.12	12.29	12.19	0.5
		25	0	12.08	12.16	12.02	0.5
5M	DFT-S QPSK	1	1	12.85	12.97	11.80	0
		1	13	12.76	12.77	12.73	0
		1	23	12.74	12.84	12.70	0
		12	0	11.77	11.78	11.76	1
		12	6	12.68	12.84	12.69	0
		12	13	11.73	11.80	11.70	1
		25	0	11.74	11.78	11.64	1
5M	DFT-S 16QAM	1	1	11.73	11.71	11.60	1
5M	DFT-S 64QAM	1	1	10.37	10.40	10.32	2.5
5M	DFT-S 256QAM	1	1	8.36	8.47	8.27	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	19.69	19.82	19.72	0
		1	53	19.62	19.70	19.68	0
		1	104	19.53	19.66	19.66	0
		50	0	18.80	18.91	18.86	0.5
		50	25	18.71	18.89	18.77	0
		50	53	18.64	18.78	18.80	0.5
		100	0	18.71	18.81	18.79	0.5
20M	DFT-S QPSK	1	1	19.77	19.93	19.82	0
		1	53	19.67	19.78	19.72	0
		1	104	19.61	19.72	19.67	0
		50	0	18.82	18.93	18.86	1
		50	25	19.73	19.90	19.85	0
		50	53	18.71	18.88	18.83	1
		100	0	18.80	18.90	18.85	1
20M	DFT-S 16QAM	1	1	18.62	18.80	18.71	1
20M	DFT-S 64QAM	1	1	17.33	17.44	17.40	2.5
20M	DFT-S 256QAM	1	1	15.20	15.36	15.31	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	19.63	19.76	19.67	0
		1	40	19.60	19.63	19.59	0
		1	77	19.46	19.56	19.56	0
		36	0	18.73	18.88	18.78	0.5
		36	18	18.67	18.87	18.67	0
		36	40	18.64	18.77	18.74	0.5
		75	0	18.62	18.79	18.72	0.5
15M	DFT-S QPSK	1	1	19.77	19.78	19.76	0
		1	40	19.63	19.78	19.64	0
		1	77	19.54	19.65	19.66	0
		36	0	18.76	18.83	18.76	1
		36	18	18.73	18.84	18.85	0
		36	40	18.71	18.78	18.83	1
		75	0	18.74	18.83	18.79	1
15M	DFT-S 16QAM	1	1	18.57	18.73	18.67	1
15M	DFT-S 64QAM	1	1	17.26	17.38	17.35	2.5
15M	DFT-S 256QAM	1	1	15.11	15.34	15.21	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	19.61	19.77	19.64	0
		1	26	19.53	19.62	19.61	0
		1	50	19.44	19.65	19.63	0
		25	0	18.71	18.85	18.86	0.5
		25	12	18.69	18.82	18.76	0
		25	26	18.64	18.77	18.80	0.5
		50	0	18.67	18.79	18.76	0.5
10M	DFT-S QPSK	1	1	19.71	19.78	19.77	0
		1	26	19.59	19.69	19.64	0
		1	50	19.59	19.71	19.60	0
		25	0	18.79	18.92	18.83	1
		25	12	18.65	18.80	18.77	0
		25	26	18.71	18.79	18.73	1
		50	0	18.74	18.80	18.75	1
10M	DFT-S 16QAM	1	1	18.55	18.75	18.70	1
10M	DFT-S 64QAM	1	1	17.28	17.41	17.39	2.5
10M	DFT-S 256QAM	1	1	15.19	15.31	15.21	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	19.59	19.76	19.68	0
		1	13	19.62	19.67	19.67	0
		1	23	19.50	19.65	19.60	0
		12	0	18.80	18.81	18.81	0.5
		12	6	18.65	18.82	18.75	0
		12	13	18.57	18.70	18.76	0.5
		25	0	18.63	18.80	18.78	0.5
5M	DFT-S QPSK	1	1	19.73	19.86	19.72	0
		1	13	19.58	19.75	19.64	0
		1	23	19.55	19.64	19.65	0
		12	0	18.76	18.93	18.82	1
		12	6	18.70	18.88	18.78	0
		12	13	18.63	18.81	18.79	1
		25	0	18.79	18.84	18.79	1
5M	DFT-S 16QAM	1	1	18.60	18.70	18.69	1
5M	DFT-S 64QAM	1	1	17.26	17.36	17.37	2.5
5M	DFT-S 256QAM	1	1	15.11	15.30	15.22	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 7							
BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	19.81	19.94	19.88	0
		1	53	19.78	19.85	19.80	0
		1	104	19.74	19.85	19.81	0
		50	0	18.82	18.89	18.91	0.5
		50	25	19.70	19.88	19.76	0
		50	53	18.77	18.94	18.83	0.5
		100	0	18.84	18.89	18.82	0.5
20M	DFT-S QPSK	1	1	19.90	20.00	19.97	0
		1	53	19.82	19.90	19.86	0
		1	104	19.82	19.90	19.86	0
		50	0	18.87	18.95	18.91	1
		50	25	19.80	19.88	19.84	0
		50	53	18.86	18.94	18.90	1
		100	0	18.88	18.96	18.92	1
20M	DFT-S 16QAM	1	1	18.89	18.97	18.93	1
20M	DFT-S 64QAM	1	1	17.33	17.41	17.37	2.5
20M	DFT-S 256QAM	1	1	15.39	15.47	15.43	4.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	19.74	19.91	19.83	0
		1	40	19.77	19.79	19.79	0
		1	77	19.68	19.75	19.76	0
		36	0	18.79	18.87	18.82	0.5
		36	18	19.69	19.81	19.73	0
		36	40	18.70	18.94	18.82	0.5
		75	0	18.80	18.86	18.81	0.5
15M	DFT-S QPSK	1	1	19.80	19.94	19.89	0
		1	40	19.73	19.80	19.79	0
		1	77	19.73	19.85	19.80	0
		36	0	18.78	18.91	18.82	1
		36	18	19.80	19.86	19.74	0
		36	40	18.85	18.90	18.82	1
		75	0	18.88	18.94	18.89	1
15M	DFT-S 16QAM	1	1	18.81	18.96	18.87	1
15M	DFT-S 64QAM	1	1	17.32	17.40	17.29	2.5
15M	DFT-S 256QAM	1	1	15.37	15.43	15.39	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 7							
BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	19.76	19.85	19.87	0
		1	26	19.77	19.76	19.76	0
		1	50	19.73	19.77	19.77	0
		25	0	18.81	18.85	18.86	0.5
		25	12	19.60	19.85	19.76	0
		25	26	18.73	18.85	18.76	0.5
		50	0	18.82	18.88	18.79	0.5
10M	DFT-S QPSK	1	1	19.90	20.00	19.87	0
		1	26	19.81	19.89	19.84	0
		1	50	19.79	19.89	19.76	0
		25	0	18.77	18.86	18.88	1
		25	12	19.72	19.86	19.81	0
		25	26	18.76	18.87	18.82	1
		50	0	18.87	18.95	18.92	1
10M	DFT-S 16QAM	1	1	18.80	18.96	18.92	1
10M	DFT-S 64QAM	1	1	17.28	17.37	17.30	2.5
10M	DFT-S 256QAM	1	1	15.39	15.46	15.34	4.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	19.78	19.87	19.84	0
		1	13	19.70	19.77	19.77	0
		1	23	19.72	19.78	19.81	0
		12	0	18.72	18.89	18.85	0.5
		12	6	19.62	19.85	19.67	0
		12	13	18.67	18.89	18.74	0.5
		25	0	18.76	18.86	18.75	0.5
5M	DFT-S QPSK	1	1	19.81	19.91	19.87	0
		1	13	19.79	19.80	19.76	0
		1	23	19.79	19.87	19.80	0
		12	0	18.81	18.88	18.84	1
		12	6	19.75	19.88	19.76	0
		12	13	18.80	18.89	18.87	1
		25	0	18.82	18.92	18.83	1
5M	DFT-S 16QAM	1	1	18.79	18.90	18.92	1
5M	DFT-S 64QAM	1	1	17.24	17.40	17.28	2.5
5M	DFT-S 256QAM	1	1	15.31	15.44	15.39	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	18.75	18.79	18.80	0
		1	53	18.60	18.68	18.66	0
		1	104	18.59	18.64	18.60	0
		50	0	17.59	17.67	17.65	0.5
		50	25	18.59	18.63	18.53	0
		50	53	17.63	17.69	17.62	0.5
		100	0	17.50	17.65	17.53	0.5
20M	DFT-S QPSK	1	1	18.79	18.88	18.83	0
		1	53	18.66	18.76	18.69	0
		1	104	18.60	18.70	18.63	0
		50	0	17.62	17.72	17.65	1
		50	25	18.60	18.70	18.63	0
		50	53	17.65	17.75	17.68	1
		100	0	17.60	17.70	17.63	1
20M	DFT-S 16QAM	1	1	17.63	17.73	17.66	1
20M	DFT-S 64QAM	1	1	16.25	16.35	16.28	2.5
20M	DFT-S 256QAM	1	1	14.07	14.17	14.10	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	18.75	18.74	18.77	0
		1	40	18.55	18.66	18.65	0
		1	77	18.56	18.61	18.53	0
		36	0	17.57	17.66	17.58	0.5
		36	18	18.51	18.57	18.49	0
		36	40	17.61	17.59	17.59	0.5
		75	0	17.41	17.64	17.44	0.5
15M	DFT-S QPSK	1	1	18.78	18.86	18.81	0
		1	40	18.60	18.66	18.62	0
		1	77	18.54	18.69	18.57	0
		36	0	17.60	17.68	17.55	1
		36	18	18.50	18.63	18.56	0
		36	40	17.61	17.66	17.65	1
		75	0	17.52	17.63	17.59	1
15M	DFT-S 16QAM	1	1	17.55	17.65	17.61	1
15M	DFT-S 64QAM	1	1	16.20	16.31	16.22	2.5
15M	DFT-S 256QAM	1	1	13.98	14.08	14.10	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	18.69	18.73	18.74	0
		1	26	18.60	18.64	18.62	0
		1	50	18.53	18.56	18.57	0
		25	0	17.53	17.58	17.58	0.5
		25	12	18.57	18.54	18.43	0
		25	26	17.54	17.62	17.62	0.5
		50	0	17.47	17.58	17.50	0.5
10M	DFT-S QPSK	1	1	18.75	18.82	18.77	0
		1	26	18.60	18.66	18.63	0
		1	50	18.55	18.61	18.58	0
		25	0	17.53	17.70	17.65	1
		25	12	18.60	18.62	18.57	0
		25	26	17.60	17.74	17.64	1
		50	0	17.57	17.67	17.62	1
10M	DFT-S 16QAM	1	1	17.58	17.70	17.63	1
10M	DFT-S 64QAM	1	1	16.24	16.25	16.26	2.5
10M	DFT-S 256QAM	1	1	14.03	14.08	14.00	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	18.67	18.71	18.78	0
		1	13	18.59	18.67	18.59	0
		1	23	18.55	18.58	18.51	0
		12	0	17.56	17.63	17.61	0.5
		12	6	18.52	18.53	18.43	0
		12	13	17.62	17.69	17.62	0.5
		25	0	17.47	17.63	17.51	0.5
5M	DFT-S QPSK	1	1	18.69	18.84	18.73	0
		1	13	18.59	18.67	18.69	0
		1	23	18.58	18.63	18.61	0
		12	0	17.55	17.71	17.55	1
		12	6	18.53	18.62	18.63	0
		12	13	17.64	17.71	17.62	1
		25	0	17.58	17.66	17.63	1
5M	DFT-S 16QAM	1	1	17.62	17.64	17.60	1
5M	DFT-S 64QAM	1	1	16.17	16.34	16.18	2.5
5M	DFT-S 256QAM	1	1	14.07	14.16	14.10	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	13.35	13.40	13.39	0
		1	53	13.25	13.29	13.40	0
		1	104	13.22	13.20	13.27	0
		50	0	12.11	12.12	12.21	0.5
		50	25	13.11	13.19	13.29	0
		50	53	12.14	12.17	12.23	0.5
		100	0	12.13	12.13	12.21	0.5
20M	DFT-S QPSK	1	1	13.38	13.41	13.47	0
		1	53	13.35	13.36	13.45	0
		1	104	13.25	13.28	13.35	0
		50	0	12.15	12.22	12.29	1
		50	25	13.15	13.20	13.30	0
		50	53	12.23	12.24	12.33	1
		100	0	12.17	12.20	12.27	1
20M	DFT-S 16QAM	1	1	12.30	12.33	12.46	1
20M	DFT-S 64QAM	1	1	10.86	10.89	10.96	2.5
20M	DFT-S 256QAM	1	1	8.80	8.87	8.94	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	13.25	13.33	13.35	0
		1	40	13.15	13.22	13.34	0
		1	77	13.14	13.19	13.20	0
		36	0	12.04	12.02	12.21	0.5
		36	18	13.08	13.13	13.28	0
		36	40	12.07	12.09	12.15	0.5
		75	0	12.04	12.09	12.11	0.5
15M	DFT-S QPSK	1	1	13.36	13.33	13.37	0
		1	40	13.34	13.26	13.41	0
		1	77	13.16	13.26	13.27	0
		36	0	12.08	12.19	12.20	1
		36	18	13.08	13.12	13.26	0
		36	40	12.13	12.16	12.26	1
		75	0	12.12	12.17	12.22	1
15M	DFT-S 16QAM	1	1	12.21	12.31	12.37	1
15M	DFT-S 64QAM	1	1	10.80	10.85	10.87	2.5
15M	DFT-S 256QAM	1	1	8.73	8.86	8.94	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	13.30	13.37	13.33	0
		1	26	13.24	13.26	13.30	0
		1	50	13.19	13.17	13.17	0
		25	0	12.06	12.07	12.16	0.5
		25	12	13.10	13.14	13.24	0
		25	26	12.04	12.17	12.14	0.5
		50	0	12.10	12.10	12.16	0.5
10M	DFT-S QPSK	1	1	13.34	13.37	13.44	0
		1	26	13.31	13.28	13.41	0
		1	50	13.15	13.25	13.25	0
		25	0	12.15	12.21	12.28	1
		25	12	13.07	13.15	13.24	0
		25	26	12.14	12.19	12.24	1
		50	0	12.14	12.15	12.24	1
10M	DFT-S 16QAM	1	1	12.20	12.33	12.36	1
10M	DFT-S 64QAM	1	1	10.80	10.81	10.86	2.5
10M	DFT-S 256QAM	1	1	8.76	8.84	8.87	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	13.33	13.33	13.31	0
		1	13	13.25	13.20	13.40	0
		1	23	13.13	13.16	13.23	0
		12	0	12.09	12.06	12.17	0.5
		12	6	13.08	13.15	13.22	0
		12	13	12.05	12.17	12.17	0.5
		25	0	12.05	12.04	12.19	0.5
5M	DFT-S QPSK	1	1	13.30	13.39	13.40	0
		1	13	13.34	13.34	13.36	0
		1	23	13.25	13.24	13.32	0
		12	0	12.06	12.17	12.24	1
		12	6	13.06	13.16	13.23	0
		12	13	12.18	12.21	12.28	1
		25	0	12.07	12.20	12.19	1
5M	DFT-S 16QAM	1	1	12.24	12.28	12.43	1
5M	DFT-S 64QAM	1	1	10.78	10.89	10.91	2.5
5M	DFT-S 256QAM	1	1	8.79	8.84	8.89	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 7							
BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	11.88	11.87	11.99	0
		1	53	11.83	11.85	11.95	0
		1	104	11.75	11.85	11.81	0
		50	0	10.92	10.88	10.93	0.5
		50	25	11.73	11.86	11.86	0
		50	53	10.81	10.94	10.95	0.5
		100	0	10.89	10.93	10.90	0.5
20M	DFT-S QPSK	1	1	11.93	11.97	12.00	0
		1	53	11.89	11.94	11.96	0
		1	104	11.83	11.88	11.90	0
		50	0	10.92	10.97	10.99	1
		50	25	11.83	11.88	11.90	0
		50	53	10.89	10.94	10.96	1
		100	0	10.91	10.96	10.98	1
20M	DFT-S 16QAM	1	1	10.90	10.95	10.97	1
20M	DFT-S 64QAM	1	1	9.36	9.41	9.43	2.5
20M	DFT-S 256QAM	1	1	7.40	7.45	7.47	4.5
BW	MCS Index	Frequency (MHz)		2507.5	2535	2562.5	3GPP MPR
15M	DFT-S PI/2 BPSK	1	1	11.87	11.85	11.90	0
		1	40	11.77	11.76	11.90	0
		1	77	11.67	11.81	11.77	0
		36	0	10.91	10.83	10.90	0.5
		36	18	11.69	11.82	11.83	0
		36	40	10.73	10.90	10.88	0.5
		75	0	10.79	10.87	10.84	0.5
15M	DFT-S QPSK	1	1	11.88	11.95	11.95	0
		1	40	11.87	11.90	11.91	0
		1	77	11.79	11.86	11.87	0
		36	0	10.84	10.87	10.93	1
		36	18	11.77	11.84	11.80	0
		36	40	10.82	10.91	10.95	1
		75	0	10.85	10.91	10.98	1
15M	DFT-S 16QAM	1	1	10.88	10.92	10.92	1
15M	DFT-S 64QAM	1	1	9.33	9.38	9.36	2.5
15M	DFT-S 256QAM	1	1	7.35	7.38	7.46	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 7							
BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	11.87	11.78	11.89	0
		1	26	11.74	11.78	11.87	0
		1	50	11.69	11.80	11.73	0
		25	0	10.84	10.80	10.89	0.5
		25	12	11.67	11.83	11.80	0
		25	26	10.77	10.89	10.86	0.5
		50	0	10.83	10.89	10.89	0.5
10M	DFT-S QPSK	1	1	11.90	11.93	12.00	0
		1	26	11.85	11.93	11.92	0
		1	50	11.78	11.87	11.80	0
		25	0	10.85	10.93	10.95	1
		25	12	11.79	11.82	11.83	0
		25	26	10.80	10.91	10.95	1
		50	0	10.90	10.96	10.89	1
10M	DFT-S 16QAM	1	1	10.83	10.93	10.97	1
10M	DFT-S 64QAM	1	1	9.32	9.39	9.35	2.5
10M	DFT-S 256QAM	1	1	7.34	7.37	7.41	4.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	11.88	11.80	11.94	0
		1	13	11.77	11.79	11.88	0
		1	23	11.74	11.76	11.72	0
		12	0	10.82	10.82	10.90	0.5
		12	6	11.66	11.85	11.85	0
		12	13	10.80	10.86	10.88	0.5
		25	0	10.81	10.87	10.83	0.5
5M	DFT-S QPSK	1	1	11.85	11.90	11.94	0
		1	13	11.86	11.84	11.89	0
		1	23	11.81	11.85	11.82	0
		12	0	10.85	10.89	10.94	1
		12	6	11.80	11.88	11.81	0
		12	13	10.87	10.84	10.90	1
		25	0	10.88	10.92	10.89	1
5M	DFT-S 16QAM	1	1	10.90	10.93	10.97	1
5M	DFT-S 64QAM	1	1	9.27	9.31	9.39	2.5
5M	DFT-S 256QAM	1	1	7.32	7.38	7.39	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	12.72	12.83	12.71	0
		1	53	12.63	12.74	12.63	0
		1	104	12.56	12.67	12.51	0
		50	0	11.62	11.70	11.59	0.5
		50	25	12.63	12.61	12.58	0
		50	53	11.60	11.72	11.60	0.5
		100	0	11.62	11.67	11.51	0.5
20M	DFT-S QPSK	1	1	12.81	12.85	12.77	0
		1	53	12.69	12.74	12.63	0
		1	104	12.65	12.70	12.59	0
		50	0	11.70	11.75	11.64	1
		50	25	12.65	12.70	12.59	0
		50	53	11.70	11.75	11.64	1
		100	0	11.63	11.68	11.57	1
20M	DFT-S 16QAM	1	1	11.65	11.70	11.59	1
20M	DFT-S 64QAM	1	1	10.30	10.35	10.24	2.5
20M	DFT-S 256QAM	1	1	8.03	8.10	7.97	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	12.69	12.79	12.64	0
		1	40	12.59	12.70	12.60	0
		1	77	12.48	12.58	12.48	0
		36	0	11.60	11.61	11.56	0.5
		36	18	12.57	12.58	12.51	0
		36	40	11.54	11.68	11.58	0.5
		75	0	11.61	11.57	11.49	0.5
15M	DFT-S QPSK	1	1	12.73	12.82	12.73	0
		1	40	12.68	12.68	12.63	0
		1	77	12.59	12.70	12.56	0
		36	0	11.69	11.66	11.58	1
		36	18	12.62	12.68	12.52	0
		36	40	11.66	11.68	11.59	1
		75	0	11.55	11.61	11.53	1
15M	DFT-S 16QAM	1	1	11.58	11.70	11.49	1
15M	DFT-S 64QAM	1	1	10.24	10.30	10.23	2.5
15M	DFT-S 256QAM	1	1	7.95	8.06	7.94	4.5
BW	MCS Index	Frequency (MHz)		1715	1745	1775	3GPP MPR
10M	DFT-S PI/2 BPSK	1	1	12.71	12.78	12.65	0
		1	26	12.60	12.66	12.62	0
		1	50	12.47	12.59	12.42	0
		25	0	11.59	11.66	11.54	0.5
		25	12	12.62	12.56	12.54	0
		25	26	11.56	11.68	11.51	0.5
		50	0	11.59	11.66	11.48	0.5
10M	DFT-S QPSK	1	1	12.77	12.75	12.71	0
		1	26	12.63	12.69	12.61	0
		1	50	12.60	12.69	12.49	0
		25	0	11.65	11.71	11.55	1
		25	12	12.58	12.68	12.58	0
		25	26	11.67	11.75	11.54	1
		50	0	11.58	11.60	11.47	1
10M	DFT-S 16QAM	1	1	11.60	11.61	11.53	1
10M	DFT-S 64QAM	1	1	10.28	10.34	10.21	2.5
10M	DFT-S 256QAM	1	1	7.94	8.10	7.96	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	12.65	12.82	12.67	0
		1	13	12.63	12.67	12.59	0
		1	23	12.51	12.65	12.44	0
		12	0	11.57	11.63	11.49	0.5
		12	6	12.56	12.54	12.50	0
		12	13	11.51	11.71	11.55	0.5
		25	0	11.55	11.66	11.48	0.5
5M	DFT-S QPSK	1	1	12.81	12.75	12.72	0
		1	13	12.68	12.70	12.56	0
		1	23	12.58	12.68	12.57	0
		12	0	11.62	11.71	11.64	1
		12	6	12.65	12.61	12.49	0
		12	13	11.60	11.72	11.57	1
		25	0	11.53	11.58	11.57	1
5M	DFT-S 16QAM	1	1	11.56	11.60	11.56	1
5M	DFT-S 64QAM	1	1	10.23	10.27	10.15	2.5
5M	DFT-S 256QAM	1	1	8.03	8.01	7.93	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523299	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.495	2640	
100M	DFT-S PI/2 BPSK	1	1	20.53	20.90	20.64	20.74	20.67	0
		1	137	20.53	20.93	20.62	20.68	20.73	0
		1	271	20.44	20.87	20.61	20.67	20.57	0
		135	0	19.62	19.92	19.63	19.69	19.69	0.5
		135	67	20.52	20.84	20.63	20.65	20.67	0
		135	136	19.44	19.89	19.57	19.62	19.58	0.5
		270	0	19.35	19.74	19.45	19.56	19.57	0.5
100M	DFT-S QPSK	1	1	20.63	20.99	20.71	20.77	20.75	0
		1	137	20.61	20.97	20.69	20.75	20.73	0
		1	271	20.54	20.90	20.62	20.68	20.66	0
		135	0	19.62	19.98	19.70	19.76	19.74	1
		135	67	20.58	20.94	20.66	20.72	20.70	0
		135	136	19.54	19.90	19.62	19.68	19.66	1
		270	0	19.45	19.81	19.53	19.59	19.57	1
100M	DFT-S 16QAM	1	1	19.17	19.53	19.25	19.31	19.29	1
100M	DFT-S 64QAM	1	1	18.08	18.44	18.16	18.22	18.20	2.5
100M	DFT-S 256QAM	1	1	18.08	18.44	16.17	18.22	18.20	4.5
BW	MCS Index	Channel		508200	513399	518598	523797	528996	3GPP MPR
		Frequency (MHz)		2541	2566.995	2592.99	2618.985	2644.98	
90M	DFT-S PI/2 BPSK	1	1	20.51	20.88	20.63	20.67	20.66	0
		1	123	20.49	20.83	20.53	20.58	20.67	0
		1	243	20.36	20.83	20.57	20.64	20.49	0
		120	0	19.57	19.85	19.56	19.68	19.68	0.5
		120	60	20.49	20.78	20.55	20.62	20.63	0
		120	122	19.42	19.83	19.53	19.58	19.58	0.5
		240	0	19.29	19.74	19.45	19.51	19.52	0.5
90M	DFT-S QPSK	1	1	20.60	20.90	20.63	20.74	20.65	0
		1	123	20.59	20.96	20.62	20.73	20.72	0
		1	243	20.45	20.90	20.52	20.66	20.65	0
		120	0	19.59	19.94	19.61	19.66	19.70	1
		120	60	20.58	20.85	20.60	20.72	20.60	0
		120	122	19.47	19.87	19.59	19.68	19.64	1
		240	0	19.35	19.74	19.46	19.53	19.57	1
90M	DFT-S 16QAM	1	1	19.60	19.93	19.66	19.69	19.74	1
90M	DFT-S 64QAM	1	1	19.60	19.93	19.66	19.69	19.74	2.5
90M	DFT-S 256QAM	1	1	19.60	19.93	19.66	19.69	19.74	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		507204	512901	518598	524295	529998	3GPP MPR
		Frequency (MHz)		2536.02	2564.505	2592.99	2621.475	2649.99	
80M	DFT-S PI/2 BPSK	1	1	20.47	20.88	20.55	20.74	20.65	0
		1	109	20.51	20.93	20.53	20.64	20.63	0
		1	215	20.40	20.81	20.58	20.67	20.53	0
		108	0	19.62	19.88	19.62	19.59	19.61	0.5
		108	54	20.51	20.78	20.54	20.56	20.67	0
		108	108	19.35	19.80	19.57	19.61	19.53	0.5
		216	0	19.33	19.72	19.44	19.54	19.51	0.5
80M	DFT-S QPSK	1	1	20.54	20.91	20.63	20.67	20.71	0
		1	109	20.52	20.97	20.61	20.69	20.72	0
		1	215	20.50	20.85	20.58	20.62	20.63	0
		108	0	19.61	19.98	19.69	19.72	19.65	1
		108	54	20.53	20.89	20.64	20.65	20.60	0
		108	108	19.52	19.87	19.58	19.59	19.63	1
		216	0	19.40	19.71	19.43	19.53	19.47	1
80M	DFT-S 16QAM	1	1	19.61	19.96	19.71	19.72	19.67	1
80M	DFT-S 64QAM	1	1	19.61	19.96	19.71	19.72	19.67	2.5
80M	DFT-S 256QAM	1	1	19.61	19.96	19.71	19.72	19.67	4.5
BW	MCS Index	Channel		505200	511899	518598	525297	531996	3GPP MPR
		Frequency (MHz)		2526	2559.495	2592.99	2626.485	2659.98	
60M	DFT-S PI/2 BPSK	1	1	20.44	20.85	20.55	20.68	20.57	0
		1	81	20.44	20.85	20.62	20.59	20.66	0
		1	160	20.38	20.84	20.54	20.64	20.55	0
		81	0	19.52	19.88	19.56	19.64	19.67	0.5
		81	40	20.52	20.76	20.60	20.64	20.66	0
		81	81	19.37	19.83	19.55	19.60	19.52	0.5
		162	0	19.30	19.68	19.45	19.50	19.53	0.5
60M	DFT-S QPSK	1	1	20.59	20.98	20.69	20.71	20.75	0
		1	81	20.57	20.95	20.69	20.71	20.70	0
		1	160	20.50	20.88	20.53	20.67	20.57	0
		81	0	19.59	19.95	19.65	19.70	19.69	1
		81	40	20.49	20.87	20.59	20.66	20.60	0
		81	81	19.51	19.86	19.58	19.58	19.61	1
		162	0	19.36	19.77	19.51	19.52	19.50	1
60M	DFT-S 16QAM	1	1	19.59	19.90	19.68	19.75	19.75	1
60M	DFT-S 64QAM	1	1	19.59	19.90	19.68	19.75	19.75	2.5
60M	DFT-S 256QAM	1	1	19.59	19.90	19.68	19.75	19.75	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		504204	511401	518598	525795	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.005	2592.99	2628.975	2664.99	
50M	DFT-S PI/2 BPSK	1	1	20.50	20.86	20.56	20.67	20.65	0
		1	67	20.47	20.91	20.59	20.61	20.69	0
		1	131	20.41	20.80	20.52	20.60	20.50	0
		64	0	19.56	19.83	19.62	19.64	19.62	0.5
		64	32	20.50	20.74	20.57	20.57	20.67	0
		64	66	19.39	19.86	19.57	19.58	19.56	0.5
		128	0	19.31	19.65	19.35	19.49	19.55	0.5
50M	DFT-S QPSK	1	1	20.53	20.90	20.71	20.68	20.73	0
		1	67	20.57	20.90	20.63	20.69	20.73	0
		1	131	20.45	20.86	20.53	20.60	20.65	0
		64	0	19.62	19.88	19.64	19.70	19.68	1
		64	32	20.51	20.89	20.56	20.67	20.60	0
		64	66	19.44	19.90	19.53	19.59	19.65	1
		128	0	19.40	19.81	19.50	19.49	19.53	1
50M	DFT-S 16QAM	1	1	19.55	19.98	19.64	19.77	19.65	1
50M	DFT-S 64QAM	1	1	19.55	19.98	19.64	19.77	19.65	2.5
50M	DFT-S 256QAM	1	1	19.55	19.98	19.64	19.77	19.65	4.5
BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	20.51	20.82	20.63	20.72	20.58	0
		1	53	20.49	20.93	20.60	20.68	20.69	0
		1	104	20.35	20.81	20.61	20.66	20.52	0
		50	0	19.53	19.88	19.62	19.59	19.69	0.5
		50	25	20.47	20.77	20.62	20.57	20.63	0
		50	53	19.40	19.80	19.50	19.62	19.54	0.5
		100	0	19.28	19.71	19.40	19.49	19.54	0.5
40M	DFT-S QPSK	1	1	20.56	20.95	20.61	20.67	20.74	0
		1	53	20.58	20.91	20.67	20.71	20.63	0
		1	104	20.44	20.80	20.52	20.63	20.57	0
		50	0	19.57	19.95	19.66	19.69	19.74	1
		50	25	20.56	20.90	20.62	20.62	20.66	0
		50	53	19.50	19.87	19.61	19.60	19.65	1
		100	0	19.38	19.77	19.50	19.55	19.48	1
40M	DFT-S 16QAM	1	1	19.54	19.96	19.64	19.67	19.72	1
40M	DFT-S 64QAM	1	1	19.54	19.96	19.64	19.67	19.72	2.5
40M	DFT-S 256QAM	1	1	19.54	19.96	19.64	19.67	19.72	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		502200	510399	518598	526797	534996	3GPP MPR
		Frequency (MHz)		2511	2551.995	2592.99	2633.985	2674.98	
30M	DFT-S PI/2 BPSK	1	1	20.49	20.87	20.62	20.74	20.60	0
		1	39	20.45	20.88	20.61	20.68	20.66	0
		1	76	20.43	20.83	20.54	20.65	20.57	0
		36	0	19.58	19.82	19.57	19.64	19.62	0.5
		36	18	20.47	20.78	20.62	20.61	20.62	0
		36	39	19.37	19.80	19.48	19.57	19.56	0.5
		75	0	19.29	19.66	19.41	19.49	19.47	0.5
30M	DFT-S QPSK	1	1	20.59	20.95	20.63	20.72	20.70	0
		1	39	20.60	20.87	20.69	20.75	20.66	0
		1	76	20.52	20.87	20.58	20.60	20.62	0
		36	0	19.62	19.94	19.69	19.73	19.68	1
		36	18	20.55	20.89	20.60	20.67	20.65	0
		36	39	19.50	19.83	19.58	19.65	19.64	1
		75	0	19.45	19.75	19.49	19.56	19.48	1
30M	DFT-S 16QAM	1	1	19.60	19.98	19.63	19.67	19.70	1
30M	DFT-S 64QAM	1	1	19.60	19.98	19.63	19.67	19.70	2.5
30M	DFT-S 256QAM	1	1	19.60	19.98	19.63	19.67	19.70	4.5
BW	MCS Index	Channel		501204	509901	518598	527295	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.505	2592.99	2636.475	2679.99	
20M	DFT-S PI/2 BPSK	1	1	20.46	20.88	20.61	20.72	20.60	0
		1	26	20.46	20.83	20.58	20.64	20.65	0
		1	49	20.35	20.85	20.55	20.64	20.53	0
		25	0	19.59	19.85	19.57	19.66	19.59	0.5
		25	12	20.45	20.78	20.60	20.57	20.65	0
		25	26	19.39	19.89	19.52	19.57	19.55	0.5
		50	0	19.26	19.64	19.45	19.47	19.51	0.5
20M	DFT-S QPSK	1	1	20.57	20.92	20.61	20.70	20.69	0
		1	26	20.51	20.89	20.69	20.69	20.70	0
		1	49	20.52	20.90	20.56	20.63	20.62	0
		25	0	19.55	19.90	19.66	19.71	19.73	1
		25	12	20.50	20.92	20.59	20.69	20.61	0
		25	26	19.49	19.84	19.57	19.58	19.58	1
		50	0	19.35	19.71	19.43	19.57	19.54	1
20M	DFT-S 16QAM	1	1	19.63	19.93	19.63	19.68	19.68	1
20M	DFT-S 64QAM	1	1	19.63	19.93	19.63	19.68	19.68	2.5
20M	DFT-S 256QAM	1	1	19.63	19.93	19.63	19.68	19.68	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		500700	509649	518598	527547	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.245	2592.99	2637.735	2682.48	
15M	DFT-S PI/2 BPSK	1	1	20.44	20.89	20.59	20.68	20.64	0
		1	19	20.48	20.91	20.58	20.62	20.70	0
		1	36	20.37	20.82	20.57	20.65	20.50	0
		18	0	19.58	19.89	19.63	19.67	19.69	0.5
		18	9	20.50	20.74	20.56	20.58	20.67	0
		18	19	19.44	19.83	19.56	19.59	19.52	0.5
		36	0	19.26	19.67	19.35	19.50	19.51	0.5
15M	DFT-S QPSK	1	1	20.57	20.90	20.71	20.73	20.68	0
		1	19	20.59	20.96	20.61	20.69	20.69	0
		1	36	20.46	20.84	20.62	20.60	20.64	0
		18	0	19.57	19.93	19.67	19.73	19.74	1
		18	9	20.58	20.89	20.57	20.68	20.68	0
		18	19	19.54	19.80	19.55	19.66	19.61	1
		36	0	19.43	19.73	19.49	19.55	19.54	1
15M	DFT-S 16QAM	1	1	19.58	19.89	19.71	19.72	19.68	1
15M	DFT-S 64QAM	1	1	19.58	19.89	19.71	19.72	19.68	2.5
15M	DFT-S 256QAM	1	1	19.58	19.89	19.71	19.72	19.68	4.5
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	20.50	20.81	20.64	20.69	20.65	0
		1	12	20.52	20.83	20.55	20.61	20.69	0
		1	22	20.35	20.86	20.57	20.62	20.54	0
		12	0	19.52	19.88	19.54	19.65	19.67	0.5
		12	6	20.51	20.76	20.54	20.64	20.65	0
		12	12	19.35	19.84	19.53	19.53	19.51	0.5
		24	0	19.32	19.71	19.37	19.55	19.51	0.5
10M	DFT-S QPSK	1	1	20.54	20.92	20.68	20.68	20.67	0
		1	12	20.61	20.87	20.69	20.71	20.64	0
		1	22	20.45	20.82	20.60	20.63	20.64	0
		12	0	19.59	19.94	19.64	19.75	19.73	1
		12	6	20.53	20.89	20.59	20.66	20.66	0
		12	12	19.49	19.81	19.60	19.63	19.64	1
		24	0	19.41	19.75	19.52	19.59	19.55	1
10M	DFT-S 16QAM	1	1	19.59	19.92	19.65	19.76	19.67	1
10M	DFT-S 64QAM	1	1	19.59	19.92	19.65	19.76	19.67	2.5
10M	DFT-S 256QAM	1	1	19.59	19.92	19.65	19.76	19.67	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523299	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.495	2640	
100M	DFT-S PI/2 BPSK	1	1	11.76	11.87	11.94	11.87	11.90	0
		1	137	11.71	11.78	11.87	11.75	11.74	0
		1	271	11.62	11.64	11.77	11.65	11.67	0
		135	0	10.64	10.71	10.73	10.72	10.64	0.5
		135	67	11.69	11.83	11.84	11.78	11.81	0
		135	136	10.55	10.62	10.71	10.66	10.61	0.5
		270	0	10.47	10.52	10.59	10.60	10.50	0.5
100M	DFT-S QPSK	1	1	11.85	11.89	11.96	11.92	11.90	0
		1	137	11.79	11.84	11.90	11.85	11.82	0
		1	271	11.69	11.74	11.80	11.75	11.72	0
		135	0	10.66	10.71	10.77	10.72	10.69	1
		135	67	11.78	11.83	11.89	11.84	11.81	0
		135	136	10.63	10.68	10.74	10.69	10.66	1
		270	0	10.55	10.60	10.66	10.61	10.58	1
100M	DFT-S 16QAM	1	1	10.79	10.84	10.90	10.85	10.82	1
100M	DFT-S 64QAM	1	1	9.29	9.34	9.40	9.35	9.32	2.5
100M	DFT-S 256QAM	1	1	7.32	7.37	7.43	7.38	7.35	4.5
BW	MCS Index	Channel		508200	513399	518598	523797	528996	3GPP MPR
		Frequency (MHz)		2541	2566.995	2592.99	2618.985	2644.98	
90M	DFT-S PI/2 BPSK	1	1	11.75	11.81	11.86	11.91	11.83	0
		1	123	11.69	11.82	11.82	11.76	11.78	0
		1	243	11.67	11.68	11.79	11.75	11.65	0
		120	0	10.60	10.66	10.77	10.63	10.69	0.5
		120	60	11.74	11.83	11.79	11.84	11.80	0
		120	122	10.63	10.68	10.64	10.60	10.66	0.5
		240	0	10.49	10.59	10.65	10.61	10.51	0.5
90M	DFT-S QPSK	1	1	11.76	11.86	11.87	11.86	11.85	0
		1	123	11.79	11.74	11.83	11.76	11.82	0
		1	243	11.59	11.66	11.72	11.69	11.65	0
		120	0	10.63	10.68	10.71	10.66	10.63	1
		120	60	11.72	11.81	11.89	11.81	11.80	0
		120	122	10.55	10.67	10.72	10.65	10.63	1
		240	0	10.45	10.51	10.61	10.52	10.56	1
90M	DFT-S 16QAM	1	1	10.69	10.81	10.80	10.84	10.82	1
90M	DFT-S 64QAM	1	1	9.20	9.27	9.35	9.25	9.29	2.5
90M	DFT-S 256QAM	1	1	7.25	7.37	7.41	7.36	7.26	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		507204	512901	518598	524295	529998	3GPP MPR
		Frequency (MHz)		2536.02	2564.505	2592.99	2621.475	2649.99	
80M	DFT-S PI/2 BPSK	1	1	11.82	11.84	11.91	11.83	11.90	0
		1	109	11.76	11.76	11.90	11.77	11.77	0
		1	215	11.66	11.73	11.73	11.70	11.71	0
		108	0	10.60	10.70	10.69	10.68	10.63	0.5
		108	54	11.69	11.73	11.82	11.82	11.71	0
		108	108	10.59	10.61	10.65	10.59	10.63	0.5
		216	0	10.47	10.53	10.66	10.53	10.49	0.5
80M	DFT-S QPSK	1	1	11.81	11.80	11.88	11.90	11.82	0
		1	109	11.70	11.84	11.83	11.80	11.72	0
		1	215	11.69	11.74	11.77	11.73	11.67	0
		108	0	10.66	10.65	10.77	10.64	10.62	1
		108	54	11.73	11.81	11.89	11.83	11.78	0
		108	108	10.62	10.66	10.67	10.62	10.66	1
		216	0	10.54	10.60	10.62	10.54	10.50	1
80M	DFT-S 16QAM	1	1	10.76	10.79	10.87	10.84	10.72	1
80M	DFT-S 64QAM	1	1	9.19	9.25	9.39	9.33	9.25	2.5
80M	DFT-S 256QAM	1	1	7.22	7.34	7.33	7.43	7.32	4.5
BW	MCS Index	Channel		505200	511899	518598	525297	531996	3GPP MPR
		Frequency (MHz)		2526	2559.495	2592.99	2626.485	2659.98	
60M	DFT-S PI/2 BPSK	1	1	11.78	11.79	11.87	11.82	11.88	0
		1	81	11.71	11.78	11.90	11.81	11.82	0
		1	160	11.64	11.66	11.77	11.65	11.72	0
		81	0	10.66	10.69	10.75	10.62	10.61	0.5
		81	40	11.78	11.82	11.81	11.75	11.75	0
		81	81	10.63	10.60	10.73	10.59	10.60	0.5
		162	0	10.45	10.56	10.58	10.61	10.51	0.5
60M	DFT-S QPSK	1	1	11.79	11.85	11.94	11.83	11.82	0
		1	81	11.79	11.81	11.88	11.77	11.80	0
		1	160	11.61	11.64	11.72	11.75	11.71	0
		81	0	10.62	10.61	10.71	10.68	10.63	1
		81	40	11.68	11.74	11.84	11.80	11.79	0
		81	81	10.57	10.58	10.73	10.60	10.64	1
		162	0	10.55	10.53	10.63	10.58	10.57	1
60M	DFT-S 16QAM	1	1	10.73	10.78	10.83	10.76	10.74	1
60M	DFT-S 64QAM	1	1	9.22	9.29	9.39	9.26	9.22	2.5
60M	DFT-S 256QAM	1	1	7.32	7.29	7.38	7.33	7.34	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		504204	511401	518598	525795	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.005	2592.99	2628.975	2664.99	
50M	DFT-S PI/2 BPSK	1	1	11.77	11.81	11.94	11.92	11.81	0
		1	67	11.75	11.74	11.84	11.82	11.79	0
		1	131	11.66	11.66	11.70	11.75	11.67	0
		64	0	10.64	10.71	10.77	10.66	10.66	0.5
		64	32	11.71	11.75	11.87	11.83	11.77	0
		64	66	10.58	10.68	10.72	10.61	10.64	0.5
		128	0	10.48	10.55	10.61	10.58	10.49	0.5
50M	DFT-S QPSK	1	1	11.77	11.83	11.92	11.88	11.80	0
		1	67	11.76	11.78	11.80	11.85	11.78	0
		1	131	11.59	11.67	11.75	11.71	11.67	0
		64	0	10.61	10.63	10.72	10.69	10.60	1
		64	32	11.78	11.82	11.83	11.77	11.80	0
		64	66	10.60	10.68	10.74	10.62	10.61	1
		128	0	10.48	10.58	10.58	10.61	10.56	1
50M	DFT-S 16QAM	1	1	10.76	10.84	10.84	10.85	10.76	1
50M	DFT-S 64QAM	1	1	9.22	9.26	9.39	9.33	9.24	2.5
50M	DFT-S 256QAM	1	1	7.22	7.28	7.37	7.39	7.35	4.5
BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	11.76	11.88	11.95	11.83	11.87	0
		1	53	11.69	11.74	11.85	11.76	11.72	0
		1	104	11.64	11.69	11.71	11.70	11.70	0
		50	0	10.64	10.64	10.73	10.69	10.59	0.5
		50	25	11.74	11.82	11.79	11.80	11.73	0
		50	53	10.61	10.58	10.67	10.61	10.66	0.5
		100	0	10.49	10.51	10.60	10.57	10.57	0.5
40M	DFT-S QPSK	1	1	11.77	11.89	11.91	11.86	11.90	0
		1	53	11.73	11.78	11.86	11.79	11.79	0
		1	104	11.64	11.67	11.77	11.75	11.72	0
		50	0	10.64	10.68	10.75	10.67	10.61	1
		50	25	11.74	11.75	11.88	11.79	11.77	0
		50	53	10.59	10.58	10.66	10.62	10.58	1
		100	0	10.48	10.59	10.63	10.53	10.55	1
40M	DFT-S 16QAM	1	1	10.79	10.75	10.80	10.85	10.73	1
40M	DFT-S 64QAM	1	1	9.26	9.28	9.40	9.32	9.30	2.5
40M	DFT-S 256QAM	1	1	7.27	7.34	7.36	7.34	7.29	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		502200	510399	518598	526797	534996	3GPP MPR
		Frequency (MHz)		2511	2551.995	2592.99	2633.985	2674.98	
30M	DFT-S PI/2 BPSK	1	1	11.85	11.87	11.95	11.85	11.86	0
		1	39	11.69	11.82	11.85	11.77	11.78	0
		1	76	11.59	11.69	11.77	11.67	11.64	0
		36	0	10.66	10.68	10.76	10.63	10.60	0.5
		36	18	11.70	11.80	11.85	11.78	11.72	0
		36	39	10.63	10.59	10.73	10.64	10.56	0.5
		75	0	10.50	10.55	10.66	10.61	10.53	0.5
30M	DFT-S QPSK	1	1	11.77	11.82	11.94	11.89	11.84	0
		1	39	11.79	11.82	11.83	11.82	11.78	0
		1	76	11.60	11.70	11.75	11.70	11.67	0
		36	0	10.58	10.69	10.68	10.70	10.67	1
		36	18	11.72	11.74	11.80	11.82	11.77	0
		36	39	10.55	10.62	10.65	10.65	10.65	1
		75	0	10.45	10.55	10.64	10.55	10.53	1
30M	DFT-S 16QAM	1	1	10.74	10.78	10.87	10.75	10.75	1
30M	DFT-S 64QAM	1	1	9.29	9.31	9.39	9.26	9.24	2.5
30M	DFT-S 256QAM	1	1	7.28	7.36	7.42	7.37	7.35	4.5
BW	MCS Index	Channel		501204	509901	518598	527295	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.505	2592.99	2636.475	2679.99	
20M	DFT-S PI/2 BPSK	1	1	11.84	11.89	11.96	11.90	11.81	0
		1	26	11.73	11.78	11.81	11.77	11.80	0
		1	49	11.63	11.66	11.74	11.75	11.63	0
		25	0	10.57	10.63	10.72	10.65	10.62	0.5
		25	12	11.78	11.78	11.84	11.75	11.78	0
		25	26	10.58	10.60	10.71	10.68	10.62	0.5
		50	0	10.46	10.51	10.64	10.61	10.51	0.5
20M	DFT-S QPSK	1	1	11.84	11.82	11.88	11.87	11.83	0
		1	26	11.71	11.79	11.82	11.77	11.78	0
		1	49	11.68	11.70	11.78	11.74	11.63	0
		25	0	10.62	10.65	10.67	10.64	10.63	1
		25	12	11.72	11.75	11.82	11.80	11.75	0
		25	26	10.63	10.61	10.72	10.69	10.58	1
		50	0	10.48	10.60	10.65	10.61	10.52	1
20M	DFT-S 16QAM	1	1	10.72	10.77	10.89	10.80	10.82	1
20M	DFT-S 64QAM	1	1	9.25	9.31	9.32	9.31	9.28	2.5
20M	DFT-S 256QAM	1	1	7.29	7.27	7.34	7.39	7.29	4.5

NR Conducted Power (P-Sensor_On_Ant2_Tablet)									
NR Band 41									
BW	MCS Index	Channel		500700	509649	518598	527547	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.245	2592.99	2637.735	2682.48	
15M	DFT-S PI/2 BPSK	1	1	11.83	11.81	11.91	11.92	11.90	0
		1	19	11.74	11.76	11.88	11.83	11.79	0
		1	36	11.66	11.67	11.77	11.71	11.72	0
		18	0	10.57	10.64	10.73	10.72	10.65	0.5
		18	9	11.75	11.80	11.85	11.77	11.74	0
		18	19	10.56	10.64	10.69	10.59	10.64	0.5
		36	0	10.54	10.59	10.56	10.61	10.52	0.5
15M	DFT-S QPSK	1	1	11.80	11.80	11.93	11.84	11.89	0
		1	19	11.72	11.77	11.81	11.75	11.74	0
		1	36	11.65	11.73	11.80	11.66	11.64	0
		18	0	10.56	10.61	10.69	10.69	10.67	1
		18	9	11.77	11.75	11.86	11.82	11.72	0
		18	19	10.59	10.58	10.67	10.60	10.57	1
		36	0	10.45	10.54	10.62	10.53	10.49	1
15M	DFT-S 16QAM	1	1	10.70	10.77	10.85	10.79	10.77	1
15M	DFT-S 64QAM	1	1	9.22	9.33	9.40	9.26	9.26	2.5
15M	DFT-S 256QAM	1	1	7.30	7.33	7.42	7.36	7.35	4.5
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	11.78	11.81	11.91	11.82	11.83	0
		1	12	11.74	11.76	11.88	11.81	11.75	0
		1	22	11.62	11.68	11.77	11.70	11.69	0
		12	0	10.56	10.62	10.71	10.65	10.63	0.5
		12	6	11.77	11.82	11.88	11.77	11.74	0
		12	12	10.53	10.67	10.65	10.61	10.65	0.5
		24	0	10.45	10.55	10.66	10.56	10.56	0.5
10M	DFT-S QPSK	1	1	11.76	11.80	11.92	11.85	11.86	0
		1	12	11.74	11.83	11.88	11.83	11.77	0
		1	22	11.69	11.70	11.70	11.66	11.66	0
		12	0	10.65	10.66	10.71	10.65	10.66	1
		12	6	11.72	11.73	11.89	11.78	11.71	0
		12	12	10.61	10.66	10.70	10.63	10.58	1
		24	0	10.54	10.54	10.56	10.53	10.57	1
10M	DFT-S 16QAM	1	1	10.74	10.81	10.89	10.84	10.80	1
10M	DFT-S 64QAM	1	1	9.21	9.31	9.38	9.26	9.32	2.5
10M	DFT-S 256QAM	1	1	7.22	7.37	7.38	7.42	7.30	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	23.83	23.74	23.88	0
		1	53	23.78	23.72	23.82	0
		1	104	23.78	23.69	23.84	0
		50	0	23.41	23.43	23.44	0.5
		50	25	23.77	23.75	23.74	0
		50	53	23.32	23.30	23.34	0.5
		100	0	23.44	23.41	23.45	0.5
20M	DFT-S QPSK	1	1	23.89	23.82	23.88	0
		1	53	23.88	23.81	23.87	0
		1	104	23.86	23.79	23.85	0
		50	0	22.98	22.91	22.97	1
		50	25	23.83	23.76	23.82	0
		50	53	22.87	22.80	22.86	1
		100	0	22.98	22.91	22.97	1
20M	DFT-S 16QAM	1	1	22.97	22.94	22.96	1
20M	DFT-S 64QAM	1	1	21.48	21.43	21.49	2.5
20M	DFT-S 256QAM	1	1	19.48	19.41	19.47	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	23.76	23.70	23.84	0
		1	40	23.72	23.68	23.75	0
		1	77	23.74	23.59	23.76	0
		36	0	23.39	23.36	23.35	0.5
		36	18	23.71	23.67	23.70	0
		36	40	23.28	23.23	23.34	0.5
		75	0	23.42	23.38	23.37	0.5
15M	DFT-S QPSK	1	1	23.84	23.82	23.81	0
		1	40	23.79	23.71	23.87	0
		1	77	23.83	23.78	23.83	0
		36	0	22.89	22.85	22.88	1
		36	18	23.81	23.71	23.76	0
		36	40	22.86	22.80	22.85	1
		75	0	22.90	22.83	22.97	1
15M	DFT-S 16QAM	1	1	22.89	22.86	22.96	1
15M	DFT-S 64QAM	1	1	21.45	21.40	21.46	2.5
15M	DFT-S 256QAM	1	1	19.45	19.31	19.40	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	23.82	23.70	23.87	0
		1	26	23.72	23.68	23.72	0
		1	50	23.68	23.64	23.81	0
		25	0	23.32	23.43	23.39	0.5
		25	12	23.72	23.73	23.73	0
		25	26	23.22	23.26	23.29	0.5
		50	0	23.40	23.32	23.42	0.5
10M	DFT-S QPSK	1	1	23.84	23.76	23.80	0
		1	26	23.79	23.80	23.84	0
		1	50	23.82	23.79	23.76	0
		25	0	22.97	22.91	22.94	1
		25	12	23.78	23.67	23.79	0
		25	26	22.77	22.73	22.86	1
		50	0	22.98	22.81	22.96	1
10M	DFT-S 16QAM	1	1	22.92	22.84	22.87	1
10M	DFT-S 64QAM	1	1	21.42	21.38	21.43	2.5
10M	DFT-S 256QAM	1	1	19.45	19.31	19.43	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	23.83	23.68	23.87	0
		1	13	23.74	23.71	23.79	0
		1	23	23.68	23.59	23.84	0
		12	0	23.32	23.38	23.41	0.5
		12	6	23.67	23.75	23.64	0
		12	13	23.24	23.23	23.28	0.5
		25	0	23.37	23.38	23.36	0.5
5M	DFT-S QPSK	1	1	23.87	23.77	23.78	0
		1	13	23.84	23.74	23.87	0
		1	23	23.77	23.74	23.77	0
		12	0	22.98	22.90	22.91	1
		12	6	23.74	23.72	23.74	0
		12	13	22.78	22.76	22.78	1
		25	0	22.98	22.88	22.89	1
5M	DFT-S 16QAM	1	1	22.90	22.93	22.96	1
5M	DFT-S 64QAM	1	1	21.49	21.35	21.46	2.5
5M	DFT-S 256QAM	1	1	19.48	19.35	19.39	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	23.69	23.73	23.72	0
		1	53	23.71	23.65	23.64	0
		1	104	23.66	23.68	23.71	0
		50	0	23.21	23.16	23.25	0.5
		50	25	23.70	23.69	23.65	0
		50	53	23.29	23.21	23.22	0.5
		100	0	23.22	23.12	23.18	0.5
20M	DFT-S QPSK	1	1	23.79	23.77	23.76	0
		1	53	23.76	23.74	23.73	0
		1	104	23.74	23.72	23.71	0
		50	0	22.78	22.76	22.75	1
		50	25	23.77	23.75	23.74	0
		50	53	22.79	22.77	22.76	1
		100	0	22.73	22.71	22.70	1
20M	DFT-S 16QAM	1	1	22.56	22.54	22.53	1
20M	DFT-S 64QAM	1	1	21.41	21.39	21.38	2.5
20M	DFT-S 256QAM	1	1	19.43	19.41	19.40	4.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	23.65	23.63	23.69	0
		1	40	23.70	23.64	23.64	0
		1	77	23.64	23.59	23.66	0
		36	0	23.12	23.08	23.24	0.5
		36	18	23.61	23.67	23.62	0
		36	40	23.27	23.16	23.19	0.5
		75	0	23.18	23.11	23.08	0.5
15M	DFT-S QPSK	1	1	23.74	23.72	23.72	0
		1	40	23.70	23.71	23.73	0
		1	77	23.65	23.63	23.66	0
		36	0	22.76	22.69	22.75	1
		36	18	23.72	23.73	23.67	0
		36	40	22.70	22.67	22.69	1
		75	0	22.64	22.62	22.62	1
15M	DFT-S 16QAM	1	1	22.48	22.49	22.46	1
15M	DFT-S 64QAM	1	1	21.31	21.34	21.36	2.5
15M	DFT-S 256QAM	1	1	19.35	19.40	19.30	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 5							
BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	23.65	23.67	23.69	0
		1	26	23.68	23.55	23.62	0
		1	50	23.56	23.66	23.63	0
		25	0	23.19	23.09	23.22	0.5
		25	12	23.66	23.59	23.62	0
		25	26	23.20	23.11	23.15	0.5
		50	0	23.13	23.07	23.09	0.5
10M	DFT-S QPSK	1	1	23.78	23.68	23.76	0
		1	26	23.74	23.70	23.68	0
		1	50	23.73	23.72	23.67	0
		25	0	22.71	22.74	22.71	1
		25	12	23.76	23.70	23.64	0
		25	26	22.69	22.71	22.66	1
		50	0	22.72	22.70	22.66	1
10M	DFT-S 16QAM	1	1	22.50	22.52	22.49	1
10M	DFT-S 64QAM	1	1	21.40	21.38	21.32	2.5
10M	DFT-S 256QAM	1	1	19.35	19.32	19.34	4.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	23.61	23.73	23.65	0
		1	13	23.62	23.60	23.62	0
		1	23	23.65	23.63	23.70	0
		12	0	23.15	23.07	23.22	0.5
		12	6	23.66	23.69	23.64	0
		12	13	23.22	23.18	23.15	0.5
		25	0	23.15	23.11	23.08	0.5
5M	DFT-S QPSK	1	1	23.77	23.71	23.75	0
		1	13	23.66	23.72	23.63	0
		1	23	23.66	23.64	23.64	0
		12	0	22.70	22.69	22.65	1
		12	6	23.72	23.71	23.73	0
		12	13	22.73	22.67	22.69	1
		25	0	22.67	22.69	22.61	1
5M	DFT-S 16QAM	1	1	22.51	22.52	22.44	1
5M	DFT-S 64QAM	1	1	21.34	21.29	21.38	2.5
5M	DFT-S 256QAM	1	1	19.39	19.40	19.39	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		141300	141500	141700	
		Frequency (MHz)		706.5	707.5	708.5	
15M	DFT-S PI/2 BPSK	1	1	23.30	23.43	23.36	0
		1	40	23.09	23.18	23.19	0
		1	77	23.14	23.22	23.09	0
		36	0	22.63	22.73	22.67	0.5
		36	18	23.16	23.23	23.16	0
		36	40	22.61	22.64	22.60	0.5
		75	0	22.60	22.67	22.64	0.5
15M	DFT-S QPSK	1	1	23.37	23.46	23.38	0
		1	40	23.18	23.27	23.19	0
		1	77	23.14	23.23	23.15	0
		36	0	22.22	22.31	22.23	1
		36	18	23.20	23.29	23.21	0
		36	40	22.12	22.21	22.13	1
		75	0	22.14	22.23	22.15	1
15M	DFT-S 16QAM	1	1	22.04	22.13	22.05	1
15M	DFT-S 64QAM	1	1	21.18	21.27	21.19	2.5
15M	DFT-S 256QAM	1	1	19.24	19.33	19.25	4.5
BW	MCS Index	Channel		140800	141500	142200	3GPP MPR
		Frequency (MHz)		704	707.5	711	
10M	DFT-S PI/2 BPSK	1	1	23.28	23.33	23.28	0
		1	26	23.01	23.12	23.15	0
		1	50	23.13	23.22	23.03	0
		25	0	22.54	22.66	22.63	0.5
		25	12	23.16	23.22	23.13	0
		25	26	22.55	22.54	22.52	0.5
		50	0	22.56	22.62	22.59	0.5
10M	DFT-S QPSK	1	1	23.37	23.45	23.28	0
		1	26	23.08	23.25	23.17	0
		1	50	23.04	23.15	23.15	0
		25	0	22.16	22.22	22.14	1
		25	12	23.16	23.23	23.11	0
		25	26	22.02	22.17	22.07	1
		50	0	22.06	22.23	22.13	1
10M	DFT-S 16QAM	1	1	22.02	22.10	22.05	1
10M	DFT-S 64QAM	1	1	21.10	21.18	21.10	2.5
10M	DFT-S 256QAM	1	1	19.19	19.28	19.16	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 12							
BW	MCS Index	Channel		140300	141500	142700	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	DFT-S PI/2 BPSK	1	1	23.21	23.40	23.30	0
		1	13	23.02	23.14	23.13	0
		1	23	23.10	23.20	23.01	0
		12	0	22.53	22.68	22.59	0.5
		12	6	23.09	23.14	23.10	0
		12	13	22.59	22.62	22.55	0.5
		25	0	22.54	22.59	22.56	0.5
5M	DFT-S QPSK	1	1	23.28	23.37	23.30	0
		1	13	23.09	23.26	23.13	0
		1	23	23.08	23.15	23.15	0
		12	0	22.13	22.26	22.18	1
		12	6	23.17	23.21	23.17	0
		12	13	22.06	22.15	22.09	1
		25	0	22.08	22.14	22.13	1
5M	DFT-S 16QAM	1	1	22.02	22.04	22.05	1
5M	DFT-S 64QAM	1	1	21.11	21.18	21.09	2.5
5M	DFT-S 256QAM	1	1	19.23	19.28	19.17	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	23.90	23.96	23.88	0
		1	53	23.78	23.79	23.72	0
		1	104	23.39	23.13	23.00	0
		50	0	23.35	23.32	23.21	0.5
		50	25	23.71	23.78	23.63	0
		50	53	23.26	23.36	23.21	0.5
		100	0	23.13	23.15	23.08	0.5
20M	DFT-S QPSK	1	1	23.91	24.00	23.83	0
		1	53	23.98	23.90	23.86	0
		1	104	23.82	23.90	23.79	0
		50	0	22.90	23.00	22.91	1
		50	25	23.80	23.88	23.77	0
		50	53	22.86	22.96	22.69	1
		100	0	22.77	22.78	22.74	1
20M	DFT-S 16QAM	1	1	22.71	22.83	22.68	1
20M	DFT-S 64QAM	1	1	21.29	21.33	21.20	2.5
20M	DFT-S 256QAM	1	1	19.44	19.50	19.40	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	23.88	23.86	23.82	0
		1	40	23.73	23.73	23.68	0
		1	77	23.33	23.09	22.96	0
		36	0	23.33	23.23	23.13	0.5
		36	18	23.66	23.76	23.59	0
		36	40	23.18	23.34	23.15	0.5
		75	0	23.08	23.14	22.98	0.5
15M	DFT-S QPSK	1	1	23.91	23.98	23.82	0
		1	40	23.89	23.89	23.81	0
		1	77	23.76	23.86	23.70	0
		36	0	22.86	22.92	22.86	1
		36	18	23.74	23.78	23.70	0
		36	40	22.85	22.93	22.59	1
		75	0	22.75	22.77	22.74	1
15M	DFT-S 16QAM	1	1	22.62	22.77	22.64	1
15M	DFT-S 64QAM	1	1	21.22	21.28	21.17	2.5
15M	DFT-S 256QAM	1	1	19.34	19.45	19.40	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	23.89	23.88	23.84	0
		1	26	23.75	23.75	23.68	0
		1	50	23.34	23.10	22.93	0
		25	0	23.31	23.24	23.18	0.5
		25	12	23.62	23.71	23.55	0
		25	26	23.26	23.36	23.21	0.5
		50	0	23.04	23.12	23.02	0.5
10M	DFT-S QPSK	1	1	23.90	23.96	23.83	0
		1	26	23.88	23.80	23.77	0
		1	50	23.73	23.86	23.76	0
		25	0	22.88	22.96	22.82	1
		25	12	23.72	23.80	23.70	0
		25	26	22.81	22.92	22.67	1
		50	0	22.73	22.72	22.64	1
10M	DFT-S 16QAM	1	1	22.67	22.73	22.67	1
10M	DFT-S 64QAM	1	1	21.25	21.24	21.10	2.5
10M	DFT-S 256QAM	1	1	19.35	19.50	19.36	4.5

NR Conducted Power (P-Sensor_Off_Ant0_Laptop)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	23.83	23.87	23.85	0
		1	13	23.74	23.73	23.68	0
		1	23	23.34	23.11	22.90	0
		12	0	23.25	23.22	23.21	0.5
		12	6	23.64	23.70	23.57	0
		12	13	23.16	23.30	23.15	0.5
		25	0	23.10	23.08	23.07	0.5
5M	DFT-S QPSK	1	1	23.85	23.98	23.77	0
		1	13	23.95	23.89	23.85	0
		1	23	23.82	23.88	23.79	0
		12	0	22.86	23.00	22.88	1
		12	6	23.76	23.86	23.72	0
		12	13	22.83	22.86	22.65	1
		25	0	22.73	22.71	22.64	1
5M	DFT-S 16QAM	1	1	22.62	22.82	22.58	1
5M	DFT-S 64QAM	1	1	21.27	21.24	21.11	2.5
5M	DFT-S 256QAM	1	1	19.38	19.41	19.30	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	15.23	15.04	15.08	0
		1	53	15.20	15.01	15.10	0
		1	104	15.09	14.95	14.94	0
		50	0	14.72	14.56	14.50	0.5
		50	25	15.04	14.92	14.92	0
		50	53	14.67	14.58	14.57	0.5
		100	0	14.67	14.54	14.59	0.5
20M	DFT-S QPSK	1	1	15.27	15.14	15.25	0
		1	53	15.24	15.11	15.22	0
		1	104	15.11	14.98	15.09	0
		50	0	14.44	14.31	14.42	1
		50	25	15.08	14.95	15.06	0
		50	53	14.43	14.30	14.41	1
		100	0	14.46	14.33	14.44	1
20M	DFT-S 16QAM	1	1	14.43	14.30	14.41	1
20M	DFT-S 64QAM	1	1	12.75	12.62	12.73	2.5
20M	DFT-S 256QAM	1	1	10.96	10.83	10.94	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	15.13	15.04	15.00	0
		1	40	15.16	14.94	15.03	0
		1	77	14.99	14.95	14.89	0
		36	0	14.71	14.49	14.40	0.5
		36	18	15.02	14.87	14.86	0
		36	40	14.65	14.49	14.53	0.5
		75	0	14.61	14.46	14.54	0.5
15M	DFT-S QPSK	1	1	15.27	15.07	15.12	0
		1	40	15.17	15.08	15.02	0
		1	77	15.10	14.96	14.96	0
		36	0	14.37	14.25	14.29	1
		36	18	14.98	14.86	14.89	0
		36	40	14.43	14.25	14.24	1
		75	0	14.38	14.31	14.27	1
15M	DFT-S 16QAM	1	1	14.33	14.20	14.28	1
15M	DFT-S 64QAM	1	1	12.70	12.56	12.51	2.5
15M	DFT-S 256QAM	1	1	10.93	10.82	10.80	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	15.20	15.04	15.08	0
		1	26	15.19	15.00	15.03	0
		1	50	15.00	14.85	14.86	0
		25	0	14.69	14.48	14.45	0.5
		25	12	14.94	14.84	14.85	0
		25	26	14.64	14.52	14.57	0.5
		50	0	14.62	14.49	14.51	0.5
10M	DFT-S QPSK	1	1	15.27	15.07	15.03	0
		1	26	15.23	15.08	15.04	0
		1	50	15.10	14.98	14.89	0
		25	0	14.39	14.28	14.26	1
		25	12	15.07	14.89	14.85	0
		25	26	14.37	14.27	14.20	1
		50	0	14.42	14.26	14.25	1
10M	DFT-S 16QAM	1	1	14.35	14.23	14.28	1
10M	DFT-S 64QAM	1	1	12.73	12.52	12.60	2.5
10M	DFT-S 256QAM	1	1	10.92	10.83	10.78	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	15.19	14.94	15.00	0
		1	13	15.11	14.94	15.03	0
		1	23	15.05	14.91	14.91	0
		12	0	14.62	14.49	14.42	0.5
		12	6	15.03	14.82	14.91	0
		12	13	14.65	14.56	14.57	0.5
		25	0	14.57	14.44	14.59	0.5
5M	DFT-S QPSK	1	1	15.27	15.14	15.10	0
		1	13	15.18	15.03	15.09	0
		1	23	15.08	14.91	14.91	0
		12	0	14.42	14.28	14.27	1
		12	6	15.02	14.86	14.93	0
		12	13	14.39	14.30	14.20	1
		25	0	14.41	14.32	14.27	1
5M	DFT-S 16QAM	1	1	14.35	14.27	14.24	1
5M	DFT-S 64QAM	1	1	12.74	12.54	12.52	2.5
5M	DFT-S 256QAM	1	1	10.88	10.79	10.73	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		166800	167300	167800	
		Frequency (MHz)		834	836.5	839	
20M	DFT-S PI/2 BPSK	1	1	17.41	17.38	17.37	0
		1	53	17.26	17.39	17.23	0
		1	104	17.26	17.34	17.22	0
		50	0	16.69	16.60	16.50	0.5
		50	25	17.18	17.20	17.15	0
		50	53	16.40	16.33	16.30	0.5
		100	0	16.35	16.33	16.20	0.5
20M	DFT-S QPSK	1	1	17.41	17.44	17.37	0
		1	53	17.35	17.40	17.32	0
		1	104	17.32	17.36	17.28	0
		50	0	16.12	16.14	16.04	1
		50	25	17.25	17.30	17.20	0
		50	53	16.26	16.29	16.20	1
		100	0	16.25	16.30	16.22	1
20M	DFT-S 16QAM	1	1	16.24	16.29	16.20	1
20M	DFT-S 64QAM	1	1	14.00	14.89	14.81	2.5
20M	DFT-S 256QAM	1	1	12.95	13.00	12.92	4.5
BW	MCS Index	Channel		166300	167300	168300	3GPP MPR
		Frequency (MHz)		831.5	836.5	841.5	
15M	DFT-S PI/2 BPSK	1	1	17.34	17.38	17.29	0
		1	40	17.25	17.36	17.22	0
		1	77	17.17	17.27	17.22	0
		36	0	16.68	16.60	16.40	0.5
		36	18	17.14	17.19	17.07	0
		36	40	16.31	16.26	16.28	0.5
		75	0	16.30	16.32	16.14	0.5
15M	DFT-S QPSK	1	1	17.39	17.41	17.27	0
		1	40	17.35	17.40	17.32	0
		1	77	17.23	17.31	17.21	0
		36	0	16.03	16.12	16.03	1
		36	18	17.24	17.21	17.15	0
		36	40	16.26	16.29	16.20	1
		75	0	16.15	16.30	16.18	1
15M	DFT-S 16QAM	1	1	16.14	16.24	16.11	1
15M	DFT-S 64QAM	1	1	13.93	14.81	14.77	2.5
15M	DFT-S 256QAM	1	1	12.87	12.98	12.84	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 5							
BW	MCS Index	Channel		165800	167300	168800	3GPP MPR
		Frequency (MHz)		829	836.5	844	
10M	DFT-S PI/2 BPSK	1	1	17.40	17.36	17.29	0
		1	26	17.25	17.37	17.16	0
		1	50	17.20	17.29	17.12	0
		25	0	16.69	16.59	16.45	0.5
		25	12	17.09	17.20	17.15	0
		25	26	16.40	16.33	16.24	0.5
		50	0	16.25	16.33	16.14	0.5
10M	DFT-S QPSK	1	1	17.38	17.40	17.33	0
		1	26	17.32	17.31	17.28	0
		1	50	17.23	17.29	17.27	0
		25	0	16.09	16.10	16.04	1
		25	12	17.21	17.22	17.13	0
		25	26	16.21	16.19	16.10	1
		50	0	16.24	16.27	16.14	1
10M	DFT-S 16QAM	1	1	16.20	16.27	16.10	1
10M	DFT-S 64QAM	1	1	13.95	14.85	14.78	2.5
10M	DFT-S 256QAM	1	1	12.95	12.91	12.82	4.5
BW	MCS Index	Channel		165300	167300	169300	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	DFT-S PI/2 BPSK	1	1	17.31	17.28	17.29	0
		1	13	17.19	17.35	17.16	0
		1	23	17.26	17.28	17.17	0
		12	0	16.64	16.59	16.42	0.5
		12	6	17.16	17.20	17.07	0
		12	13	16.30	16.30	16.25	0.5
		25	0	16.31	16.25	16.13	0.5
5M	DFT-S QPSK	1	1	17.40	17.42	17.36	0
		1	13	17.25	17.30	17.28	0
		1	23	17.30	17.28	17.20	0
		12	0	16.02	16.05	16.03	1
		12	6	17.24	17.23	17.10	0
		12	13	16.25	16.22	16.17	1
		25	0	16.18	16.21	16.14	1
5M	DFT-S 16QAM	1	1	16.21	16.20	16.15	1
5M	DFT-S 64QAM	1	1	13.97	14.85	14.76	2.5
5M	DFT-S 256QAM	1	1	12.94	13.00	12.83	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		141300	141500	141700	
		Frequency (MHz)		706.5	707.5	708.5	
15M	DFT-S PI/2 BPSK	1	1	16.21	16.21	16.13	0
		1	40	16.09	16.05	15.91	0
		1	77	15.96	15.94	15.86	0
		36	0	15.62	15.59	15.54	0.5
		36	18	16.03	15.99	15.85	0
		36	40	15.90	15.83	15.76	0.5
		75	0	15.86	15.80	15.67	0.5
15M	DFT-S QPSK	1	1	16.27	16.24	16.20	0
		1	40	16.10	16.05	15.99	0
		1	77	16.00	15.95	15.89	0
		36	0	15.21	15.16	15.10	1
		36	18	16.05	16.00	15.94	0
		36	40	15.44	15.39	15.33	1
		75	0	15.39	15.34	15.28	1
15M	DFT-S 16QAM	1	1	15.46	15.41	15.35	1
15M	DFT-S 64QAM	1	1	13.95	13.90	13.84	2.5
15M	DFT-S 256QAM	1	1	11.86	11.81	11.75	4.5
BW	MCS Index	Channel		140800	141500	142200	3GPP MPR
		Frequency (MHz)		704	707.5	711	
10M	DFT-S PI/2 BPSK	1	1	16.19	16.13	16.13	0
		1	26	15.99	15.98	15.84	0
		1	50	15.86	15.87	15.81	0
		25	0	15.57	15.57	15.44	0.5
		25	12	15.99	15.98	15.76	0
		25	26	15.84	15.80	15.75	0.5
		50	0	15.81	15.78	15.60	0.5
10M	DFT-S QPSK	1	1	16.21	16.14	16.11	0
		1	26	16.05	15.97	15.94	0
		1	50	15.92	15.88	15.83	0
		25	0	15.12	15.08	15.06	1
		25	12	15.97	15.97	15.89	0
		25	26	15.39	15.30	15.29	1
		50	0	15.35	15.31	15.21	1
10M	DFT-S 16QAM	1	1	15.36	15.34	15.34	1
10M	DFT-S 64QAM	1	1	13.92	13.85	13.81	2.5
10M	DFT-S 256QAM	1	1	11.81	11.75	11.67	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 12							
BW	MCS Index	Channel		140300	141500	142700	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	DFT-S PI/2 BPSK	1	1	16.18	16.19	16.11	0
		1	13	16.00	15.99	15.81	0
		1	23	15.95	15.92	15.84	0
		12	0	15.57	15.52	15.54	0.5
		12	6	15.98	15.95	15.84	0
		12	13	15.80	15.74	15.66	0.5
		25	0	15.78	15.71	15.65	0.5
5M	DFT-S QPSK	1	1	16.24	16.19	16.12	0
		1	13	16.07	15.95	15.93	0
		1	23	15.99	15.88	15.79	0
		12	0	15.19	15.14	15.00	1
		12	6	15.97	15.93	15.86	0
		12	13	15.38	15.34	15.23	1
		25	0	15.35	15.29	15.25	1
5M	DFT-S 16QAM	1	1	15.39	15.39	15.26	1
5M	DFT-S 64QAM	1	1	13.87	13.87	13.81	2.5
5M	DFT-S 256QAM	1	1	11.84	11.80	11.68	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	11.87	11.97	10.84	0
		1	53	11.73	11.85	11.69	0
		1	104	11.68	11.81	11.72	0
		50	0	11.23	11.29	11.25	0.5
		50	25	11.68	11.80	11.67	0
		50	53	11.20	11.30	11.23	0.5
		100	0	11.16	11.23	11.12	0.5
20M	DFT-S QPSK	1	1	11.96	11.99	11.91	0
		1	53	11.88	11.92	11.82	0
		1	104	11.86	11.90	11.80	0
		50	0	10.90	10.94	10.84	1
		50	25	11.82	11.86	11.76	0
		50	53	10.86	10.90	10.80	1
		100	0	10.84	10.88	10.78	1
20M	DFT-S 16QAM	1	1	10.83	10.87	10.77	1
20M	DFT-S 64QAM	1	1	9.42	9.46	9.36	2.5
20M	DFT-S 256QAM	1	1	7.45	7.49	7.39	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	11.83	11.87	10.74	0
		1	40	11.65	11.81	11.62	0
		1	77	11.67	11.72	11.65	0
		36	0	11.16	11.27	11.22	0.5
		36	18	11.67	11.77	11.59	0
		36	40	11.15	11.26	11.20	0.5
		75	0	11.11	11.16	11.05	0.5
15M	DFT-S QPSK	1	1	11.96	11.90	11.81	0
		1	40	11.87	11.86	11.76	0
		1	77	11.81	11.83	11.71	0
		36	0	10.84	10.89	10.84	1
		36	18	11.76	11.80	11.73	0
		36	40	10.81	10.88	10.74	1
		75	0	10.82	10.80	10.75	1
15M	DFT-S 16QAM	1	1	10.82	10.83	10.68	1
15M	DFT-S 64QAM	1	1	9.40	9.40	9.28	2.5
15M	DFT-S 256QAM	1	1	7.43	7.46	7.36	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	11.83	11.90	10.76	0
		1	26	11.68	11.80	11.59	0
		1	50	11.64	11.71	11.72	0
		25	0	11.18	11.23	11.19	0.5
		25	12	11.59	11.80	11.57	0
		25	26	11.18	11.29	11.14	0.5
		50	0	11.11	11.23	11.11	0.5
10M	DFT-S QPSK	1	1	11.95	11.95	11.84	0
		1	26	11.78	11.91	11.76	0
		1	50	11.76	11.80	11.74	0
		25	0	10.88	10.94	10.80	1
		25	12	11.80	11.81	11.71	0
		25	26	10.76	10.90	10.77	1
		50	0	10.83	10.83	10.74	1
10M	DFT-S 16QAM	1	1	10.82	10.84	10.73	1
10M	DFT-S 64QAM	1	1	9.34	9.37	9.34	2.5
10M	DFT-S 256QAM	1	1	7.45	7.39	7.37	4.5

NR Conducted Power (P-Sensor_On_Ant0_Laptop)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	11.83	11.93	10.79	0
		1	13	11.71	11.83	11.64	0
		1	23	11.61	11.71	11.70	0
		12	0	11.21	11.23	11.22	0.5
		12	6	11.63	11.71	11.64	0
		12	13	11.16	11.27	11.23	0.5
		25	0	11.09	11.18	11.10	0.5
5M	DFT-S QPSK	1	1	11.96	11.89	11.85	0
		1	13	11.82	11.84	11.82	0
		1	23	11.85	11.85	11.79	0
		12	0	10.90	10.88	10.82	1
		12	6	11.75	11.77	11.72	0
		12	13	10.77	10.89	10.75	1
		25	0	10.84	10.83	10.77	1
5M	DFT-S 16QAM	1	1	10.79	10.87	10.76	1
5M	DFT-S 64QAM	1	1	9.34	9.39	9.26	2.5
5M	DFT-S 256QAM	1	1	7.43	7.43	7.30	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	23.71	23.79	23.80	0
		1	53	23.63	23.70	23.78	0
		1	104	23.64	23.73	23.74	0
		50	0	22.55	22.60	22.76	0.5
		50	25	23.62	23.63	23.67	0
		50	53	22.57	22.68	22.73	0.5
		100	0	22.61	22.68	22.69	0.5
20M	DFT-S QPSK	1	1	23.78	23.84	23.88	0
		1	53	23.70	23.77	23.83	0
		1	104	23.68	23.75	23.81	0
		50	0	22.63	22.70	22.76	1
		50	25	23.63	23.70	23.76	0
		50	53	22.63	22.70	22.76	1
		100	0	22.66	22.73	22.79	1
20M	DFT-S 16QAM	1	1	22.76	22.83	22.89	1
20M	DFT-S 64QAM	1	1	21.22	21.29	21.35	2.5
20M	DFT-S 256QAM	1	1	19.26	19.33	19.39	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	23.67	23.79	23.75	0
		1	40	23.53	23.70	23.70	0
		1	77	23.61	23.65	23.68	0
		36	0	22.50	22.60	22.68	0.5
		36	18	23.57	23.59	23.58	0
		36	40	22.52	22.64	22.66	0.5
		75	0	22.57	22.64	22.67	0.5
15M	DFT-S QPSK	1	1	23.78	23.75	23.82	0
		1	40	23.61	23.71	23.83	0
		1	77	23.60	23.71	23.76	0
		36	0	22.62	22.61	22.75	1
		36	18	23.59	23.65	23.70	0
		36	40	22.56	22.62	22.72	1
		75	0	22.59	22.72	22.78	1
15M	DFT-S 16QAM	1	1	22.70	22.76	22.84	1
15M	DFT-S 64QAM	1	1	21.20	21.21	21.29	2.5
15M	DFT-S 256QAM	1	1	19.24	19.23	19.31	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	23.71	23.73	23.76	0
		1	26	23.57	23.63	23.73	0
		1	50	23.64	23.66	23.65	0
		25	0	22.53	22.58	22.70	0.5
		25	12	23.52	23.57	23.65	0
		25	26	22.53	22.61	22.69	0.5
		50	0	22.52	22.60	22.63	0.5
10M	DFT-S QPSK	1	1	23.78	23.80	23.83	0
		1	26	23.61	23.76	23.76	0
		1	50	23.62	23.71	23.75	0
		25	0	22.58	22.60	22.74	1
		25	12	23.56	23.66	23.72	0
		25	26	22.54	22.61	22.66	1
		50	0	22.64	22.72	22.74	1
10M	DFT-S 16QAM	1	1	22.76	22.81	22.89	1
10M	DFT-S 64QAM	1	1	21.19	21.24	21.30	2.5
10M	DFT-S 256QAM	1	1	19.18	19.25	19.38	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	23.69	23.74	23.79	0
		1	13	23.61	23.68	23.72	0
		1	23	23.60	23.66	23.74	0
		12	0	22.49	22.54	22.67	0.5
		12	6	23.56	23.59	23.64	0
		12	13	22.54	22.63	22.68	0.5
		25	0	22.56	22.62	22.66	0.5
5M	DFT-S QPSK	1	1	23.75	23.79	23.79	0
		1	13	23.70	23.71	23.80	0
		1	23	23.60	23.70	23.74	0
		12	0	22.60	22.65	22.73	1
		12	6	23.56	23.67	23.67	0
		12	13	22.58	22.62	22.75	1
		25	0	22.66	22.67	22.69	1
5M	DFT-S 16QAM	1	1	22.66	22.79	22.79	1
5M	DFT-S 64QAM	1	1	21.14	21.24	21.27	2.5
5M	DFT-S 256QAM	1	1	19.18	19.29	19.36	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 7							
BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	23.86	23.96	23.90	0
		1	53	23.78	23.86	23.80	0
		1	104	23.78	23.91	23.79	0
		50	0	22.86	23.00	22.91	0.5
		50	25	23.73	23.87	23.82	0
		50	53	22.79	22.91	22.90	0.5
		100	0	22.85	22.92	22.89	0.5
20M	DFT-S QPSK	1	1	23.90	24.00	23.96	0
		1	53	23.85	23.96	23.90	0
		1	104	23.82	23.93	23.87	0
		50	0	22.89	23.00	22.94	1
		50	25	23.80	23.91	23.85	0
		50	53	22.86	22.97	22.91	1
		100	0	22.88	22.99	22.93	1
20M	DFT-S 16QAM	1	1	22.89	23.00	22.94	1
20M	DFT-S 64QAM	1	1	21.33	21.44	21.38	2.5
20M	DFT-S 256QAM	1	1	19.37	19.48	19.42	4.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	23.86	23.96	23.90	0
		1	40	23.69	23.86	23.76	0
		1	77	23.68	23.81	23.75	0
		36	0	22.81	22.90	22.82	0.5
		36	18	23.67	23.85	23.76	0
		36	40	22.77	22.83	22.86	0.5
		75	0	22.75	22.89	22.89	0.5
15M	DFT-S QPSK	1	1	23.89	23.93	23.86	0
		1	40	23.83	23.89	23.80	0
		1	77	23.82	23.85	23.86	0
		36	0	22.88	22.97	22.88	1
		36	18	23.71	23.84	23.78	0
		36	40	22.78	22.95	22.88	1
		75	0	22.86	22.89	22.89	1
15M	DFT-S 16QAM	1	1	22.81	22.92	22.85	1
15M	DFT-S 64QAM	1	1	21.25	21.39	21.33	2.5
15M	DFT-S 256QAM	1	1	19.29	19.40	19.34	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 7							
BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	23.85	23.91	23.81	0
		1	26	23.76	23.86	23.77	0
		1	50	23.70	23.82	23.77	0
		25	0	22.77	22.90	22.86	0.5
		25	12	23.67	23.83	23.75	0
		25	26	22.71	22.90	22.87	0.5
		50	0	22.83	22.87	22.79	0.5
10M	DFT-S QPSK	1	1	23.86	23.95	23.95	0
		1	26	23.78	23.89	23.84	0
		1	50	23.74	23.89	23.79	0
		25	0	22.80	22.96	22.86	1
		25	12	23.75	23.89	23.82	0
		25	26	22.80	22.90	22.83	1
		50	0	22.88	22.89	22.85	1
10M	DFT-S 16QAM	1	1	22.81	22.91	22.85	1
10M	DFT-S 64QAM	1	1	21.29	21.44	21.34	2.5
10M	DFT-S 256QAM	1	1	19.30	19.44	19.32	4.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	23.76	23.90	23.89	0
		1	13	23.78	23.82	23.79	0
		1	23	23.68	23.91	23.77	0
		12	0	22.85	23.00	22.82	0.5
		12	6	23.65	23.85	23.82	0
		12	13	22.76	22.87	22.85	0.5
		25	0	22.82	22.87	22.84	0.5
5M	DFT-S QPSK	1	1	23.88	24.00	23.89	0
		1	13	23.76	23.90	23.83	0
		1	23	23.81	23.83	23.80	0
		12	0	22.85	22.91	22.89	1
		12	6	23.72	23.90	23.81	0
		12	13	22.77	22.97	22.85	1
		25	0	22.84	22.95	22.88	1
5M	DFT-S 16QAM	1	1	22.82	22.96	22.92	1
5M	DFT-S 64QAM	1	1	21.23	21.40	21.33	2.5
5M	DFT-S 256QAM	1	1	19.32	19.48	19.36	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	23.90	23.98	23.90	0
		1	53	23.81	23.86	23.81	0
		1	104	23.85	23.85	23.84	0
		50	0	22.86	22.93	22.86	0.5
		50	25	23.69	23.76	23.80	0
		50	53	22.74	22.80	22.86	0.5
		100	0	22.77	22.87	22.81	0.5
20M	DFT-S QPSK	1	1	23.93	24.00	23.94	0
		1	53	23.86	23.92	23.87	0
		1	104	23.87	23.85	23.87	0
		50	0	22.92	22.97	22.95	1
		50	25	23.72	23.80	23.80	0
		50	53	22.80	22.84	22.81	1
		100	0	22.84	22.87	22.83	1
20M	DFT-S 16QAM	1	1	22.90	22.97	22.93	1
20M	DFT-S 64QAM	1	1	21.39	21.46	21.42	2.5
20M	DFT-S 256QAM	1	1	19.43	19.50	19.46	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	23.88	23.89	23.80	0
		1	40	23.72	23.77	23.79	0
		1	77	23.81	23.83	23.82	0
		36	0	22.77	22.89	22.82	0.5
		36	18	23.69	23.73	23.79	0
		36	40	22.72	22.76	22.86	0.5
		75	0	22.74	22.77	22.72	0.5
15M	DFT-S QPSK	1	1	23.87	23.93	23.92	0
		1	40	23.78	23.86	23.85	0
		1	77	23.80	23.85	23.86	0
		36	0	22.87	22.88	22.89	1
		36	18	23.64	23.74	23.71	0
		36	40	22.73	22.81	22.74	1
		75	0	22.77	22.78	22.83	1
15M	DFT-S 16QAM	1	1	22.89	22.87	22.91	1
15M	DFT-S 64QAM	1	1	21.36	21.43	21.34	2.5
15M	DFT-S 256QAM	1	1	19.37	19.41	19.45	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	23.80	23.95	23.87	0
		1	26	23.76	23.76	23.76	0
		1	50	23.82	23.79	23.80	0
		25	0	22.84	22.91	22.83	0.5
		25	12	23.68	23.70	23.78	0
		25	26	22.67	22.78	22.80	0.5
		50	0	22.67	22.84	22.71	0.5
10M	DFT-S QPSK	1	1	23.90	23.99	23.89	0
		1	26	23.79	23.86	23.87	0
		1	50	23.79	23.82	23.86	0
		25	0	22.84	22.88	22.90	1
		25	12	23.72	23.75	23.79	0
		25	26	22.80	22.76	22.72	1
		50	0	22.77	22.79	22.75	1
10M	DFT-S 16QAM	1	1	22.85	22.94	22.88	1
10M	DFT-S 64QAM	1	1	21.37	21.40	21.42	2.5
10M	DFT-S 256QAM	1	1	19.34	19.43	19.46	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	23.80	23.88	23.84	0
		1	13	23.75	23.83	23.80	0
		1	23	23.83	23.79	23.84	0
		12	0	22.81	22.92	22.83	0.5
		12	6	23.62	23.66	23.73	0
		12	13	22.68	22.79	22.76	0.5
		25	0	22.74	22.86	22.81	0.5
5M	DFT-S QPSK	1	1	23.91	24.00	23.91	0
		1	13	23.86	23.85	23.84	0
		1	23	23.79	23.75	23.84	0
		12	0	22.89	22.96	22.93	1
		12	6	23.63	23.75	23.74	0
		12	13	22.78	22.75	22.75	1
		25	0	22.81	22.83	22.75	1
5M	DFT-S 16QAM	1	1	22.85	22.89	22.91	1
5M	DFT-S 64QAM	1	1	21.38	21.37	21.36	2.5
5M	DFT-S 256QAM	1	1	19.41	19.41	19.44	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		372000	376000	380000	
		Frequency (MHz)		1860	1880	1900	
20M	DFT-S PI/2 BPSK	1	1	15.19	15.21	15.30	0
		1	53	15.04	15.15	15.26	0
		1	104	15.05	15.11	15.22	0
		50	0	14.24	14.30	14.40	0.5
		50	25	15.09	15.08	15.22	0
		50	53	14.09	14.09	14.23	0.5
		100	0	14.11	14.14	14.24	0.5
20M	DFT-S QPSK	1	1	15.20	15.24	15.29	0
		1	53	15.14	15.20	15.27	0
		1	104	15.10	15.17	15.24	0
		50	0	14.30	14.40	14.45	1
		50	25	15.10	15.16	15.23	0
		50	53	14.12	14.18	14.25	1
		100	0	14.12	14.21	14.28	1
20M	DFT-S 16QAM	1	1	14.24	14.30	14.40	1
20M	DFT-S 64QAM	1	1	12.81	12.87	12.94	2.5
20M	DFT-S 256QAM	1	1	10.88	10.94	10.94	4.5
BW	MCS Index	Channel		371500	376000	380500	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	DFT-S PI/2 BPSK	1	1	15.16	15.19	15.26	0
		1	40	15.00	15.06	15.24	0
		1	77	15.05	15.03	15.13	0
		36	0	14.14	14.22	14.37	0.5
		36	18	15.06	14.98	15.12	0
		36	40	14.02	14.01	14.23	0.5
		75	0	14.08	14.08	14.15	0.5
15M	DFT-S QPSK	1	1	15.20	15.16	15.22	0
		1	40	15.05	15.11	15.27	0
		1	77	15.03	15.13	15.24	0
		36	0	14.22	14.36	14.37	1
		36	18	15.06	15.07	15.19	0
		36	40	14.04	14.10	14.18	1
		75	0	14.08	14.16	14.25	1
15M	DFT-S 16QAM	1	1	14.19	14.20	14.32	1
15M	DFT-S 64QAM	1	1	12.76	12.78	12.85	2.5
15M	DFT-S 256QAM	1	1	10.84	10.85	10.93	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 2							
BW	MCS Index	Channel		371000	376000	381000	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	DFT-S PI/2 BPSK	1	1	15.15	15.11	15.23	0
		1	26	14.97	15.11	15.26	0
		1	50	15.03	15.11	15.12	0
		25	0	14.18	14.26	14.36	0.5
		25	12	15.09	14.98	15.15	0
		25	26	14.02	14.06	14.20	0.5
		50	0	14.05	14.14	14.15	0.5
10M	DFT-S QPSK	1	1	15.18	15.23	15.23	0
		1	26	15.12	15.15	15.17	0
		1	50	15.00	15.09	15.19	0
		25	0	14.30	14.35	14.41	1
		25	12	15.05	15.11	15.21	0
		25	26	14.11	14.11	14.18	1
		50	0	14.09	14.18	14.28	1
10M	DFT-S 16QAM	1	1	14.14	14.25	14.39	1
10M	DFT-S 64QAM	1	1	12.78	12.79	12.94	2.5
10M	DFT-S 256QAM	1	1	10.88	10.86	10.90	4.5
BW	MCS Index	Channel		370500	376000	381500	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	DFT-S PI/2 BPSK	1	1	15.15	15.13	15.26	0
		1	13	14.97	15.15	15.19	0
		1	23	15.01	15.11	15.18	0
		12	0	14.20	14.29	14.36	0.5
		12	6	15.08	15.01	15.22	0
		12	13	14.02	13.99	14.16	0.5
		25	0	14.06	14.10	14.19	0.5
5M	DFT-S QPSK	1	1	15.15	15.15	15.28	0
		1	13	15.04	15.18	15.23	0
		1	23	15.02	15.08	15.23	0
		12	0	14.25	14.37	14.39	1
		12	6	15.08	15.12	15.17	0
		12	13	14.03	14.18	14.16	1
		25	0	14.04	14.20	14.21	1
5M	DFT-S 16QAM	1	1	14.17	14.27	14.39	1
5M	DFT-S 64QAM	1	1	12.77	12.79	12.92	2.5
5M	DFT-S 256QAM	1	1	10.80	10.84	10.94	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 7							
BW	MCS Index	Channel		502000	507000	512000	3GPP MPR
		Frequency (MHz)		2510	2535	2560	
20M	DFT-S PI/2 BPSK	1	1	11.88	11.87	11.99	0
		1	53	11.83	11.85	11.95	0
		1	104	11.75	11.85	11.81	0
		50	0	10.92	10.88	10.93	0.5
		50	25	11.73	11.86	11.86	0
		50	53	10.81	10.94	10.95	0.5
		100	0	10.89	10.93	10.90	0.5
20M	DFT-S QPSK	1	1	11.93	11.97	12.00	0
		1	53	11.89	11.94	11.96	0
		1	104	11.83	11.88	11.90	0
		50	0	10.92	10.97	10.99	1
		50	25	11.83	11.88	11.90	0
		50	53	10.89	10.94	10.96	1
		100	0	10.91	10.96	10.98	1
20M	DFT-S 16QAM	1	1	10.90	10.95	10.97	1
20M	DFT-S 64QAM	1	1	9.36	9.41	9.43	2.5
20M	DFT-S 256QAM	1	1	7.40	7.45	7.47	4.5
BW	MCS Index	Channel		501500	507000	512500	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	DFT-S PI/2 BPSK	1	1	11.87	11.85	11.90	0
		1	40	11.77	11.76	11.90	0
		1	77	11.67	11.81	11.77	0
		36	0	10.91	10.83	10.90	0.5
		36	18	11.69	11.82	11.83	0
		36	40	10.73	10.90	10.88	0.5
		75	0	10.79	10.87	10.84	0.5
15M	DFT-S QPSK	1	1	11.88	11.95	11.95	0
		1	40	11.87	11.90	11.91	0
		1	77	11.79	11.86	11.87	0
		36	0	10.84	10.87	10.93	1
		36	18	11.77	11.84	11.80	0
		36	40	10.82	10.91	10.95	1
		75	0	10.85	10.91	10.98	1
15M	DFT-S 16QAM	1	1	10.88	10.92	10.92	1
15M	DFT-S 64QAM	1	1	9.33	9.38	9.36	2.5
15M	DFT-S 256QAM	1	1	7.35	7.38	7.46	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 7							
BW	MCS Index	Channel		501000	507000	513000	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	DFT-S PI/2 BPSK	1	1	11.87	11.78	11.89	0
		1	26	11.74	11.78	11.87	0
		1	50	11.69	11.80	11.73	0
		25	0	10.84	10.80	10.89	0.5
		25	12	11.67	11.83	11.80	0
		25	26	10.77	10.89	10.86	0.5
		50	0	10.83	10.89	10.89	0.5
10M	DFT-S QPSK	1	1	11.90	11.93	12.00	0
		1	26	11.85	11.93	11.92	0
		1	50	11.78	11.87	11.80	0
		25	0	10.85	10.93	10.95	1
		25	12	11.79	11.82	11.83	0
		25	26	10.80	10.91	10.95	1
		50	0	10.90	10.96	10.89	1
10M	DFT-S 16QAM	1	1	10.83	10.93	10.97	1
10M	DFT-S 64QAM	1	1	9.32	9.39	9.35	2.5
10M	DFT-S 256QAM	1	1	7.34	7.37	7.41	4.5
BW	MCS Index	Channel		500500	507000	513500	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	DFT-S PI/2 BPSK	1	1	11.88	11.80	11.94	0
		1	13	11.77	11.79	11.88	0
		1	23	11.74	11.76	11.72	0
		12	0	10.82	10.82	10.90	0.5
		12	6	11.66	11.85	11.85	0
		12	13	10.80	10.86	10.88	0.5
		25	0	10.81	10.87	10.83	0.5
5M	DFT-S QPSK	1	1	11.85	11.90	11.94	0
		1	13	11.86	11.84	11.89	0
		1	23	11.81	11.85	11.82	0
		12	0	10.85	10.89	10.94	1
		12	6	11.80	11.88	11.81	0
		12	13	10.87	10.84	10.90	1
		25	0	10.88	10.92	10.89	1
5M	DFT-S 16QAM	1	1	10.90	10.93	10.97	1
5M	DFT-S 64QAM	1	1	9.27	9.31	9.39	2.5
5M	DFT-S 256QAM	1	1	7.32	7.38	7.39	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 66							
BW	MCS Index	Channel		344000	349000	354000	3GPP MPR
		Frequency (MHz)		1720	1745	1770	
20M	DFT-S PI/2 BPSK	1	1	11.83	11.72	11.74	0
		1	53	11.73	11.68	11.61	0
		1	104	11.71	11.63	11.60	0
		50	0	10.76	10.70	10.57	0.5
		50	25	11.69	11.58	11.53	0
		50	53	10.68	10.63	10.61	0.5
		100	0	10.72	10.63	10.61	0.5
20M	DFT-S QPSK	1	1	11.88	11.80	11.76	0
		1	53	11.82	11.72	11.67	0
		1	104	11.80	11.70	11.65	0
		50	0	10.82	10.72	10.67	1
		50	25	11.70	11.60	11.55	0
		50	53	10.76	10.66	10.61	1
		100	0	10.79	10.69	10.64	1
20M	DFT-S 16QAM	1	1	10.83	10.73	10.68	1
20M	DFT-S 64QAM	1	1	9.35	9.25	9.20	2.5
20M	DFT-S 256QAM	1	1	7.36	7.26	7.21	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 66							
BW	MCS Index	Channel		343500	349000	354500	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	DFT-S PI/2 BPSK	1	1	11.77	11.72	11.70	0
		1	40	11.73	11.67	11.53	0
		1	77	11.61	11.53	11.58	0
		36	0	10.70	10.66	10.51	0.5
		36	18	11.68	11.56	11.46	0
		36	40	10.64	10.63	10.61	0.5
		75	0	10.68	10.62	10.59	0.5
15M	DFT-S QPSK	1	1	11.87	11.73	11.67	0
		1	40	11.81	11.68	11.57	0
		1	77	11.73	11.67	11.58	0
		36	0	10.79	10.68	10.64	1
		36	18	11.64	11.57	11.48	0
		36	40	10.70	10.64	10.58	1
		75	0	10.78	10.67	10.63	1
15M	DFT-S 16QAM	1	1	10.74	10.72	10.68	1
15M	DFT-S 64QAM	1	1	9.35	9.19	9.10	2.5
15M	DFT-S 256QAM	1	1	7.27	7.19	7.18	4.5
BW	MCS Index	Channel		343000	349000	355000	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	DFT-S PI/2 BPSK	1	1	11.74	11.68	11.72	0
		1	26	11.69	11.59	11.56	0
		1	50	11.65	11.60	11.57	0
		25	0	10.66	10.67	10.52	0.5
		25	12	11.68	11.55	11.50	0
		25	26	10.58	10.60	10.57	0.5
		50	0	10.69	10.53	10.51	0.5
10M	DFT-S QPSK	1	1	11.84	11.71	11.70	0
		1	26	11.77	11.71	11.63	0
		1	50	11.73	11.62	11.59	0
		25	0	10.78	10.72	10.65	1
		25	12	11.61	11.59	11.47	0
		25	26	10.66	10.66	10.57	1
		50	0	10.74	10.59	10.60	1
10M	DFT-S 16QAM	1	1	10.80	10.66	10.58	1
10M	DFT-S 64QAM	1	1	9.27	9.20	9.13	2.5
10M	DFT-S 256QAM	1	1	7.30	7.21	7.19	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)							
NR Band 66							
BW	MCS Index	Channel		342500	349000	355500	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	DFT-S PI/2 BPSK	1	1	11.78	11.63	11.72	0
		1	13	11.65	11.64	11.56	0
		1	23	11.61	11.61	11.57	0
		12	0	10.70	10.65	10.52	0.5
		12	6	11.59	11.58	11.45	0
		12	13	10.65	10.62	10.58	0.5
		25	0	10.67	10.56	10.55	0.5
5M	DFT-S QPSK	1	1	11.82	11.78	11.72	0
		1	13	11.81	11.68	11.63	0
		1	23	11.72	11.70	11.64	0
		12	0	10.80	10.72	10.67	1
		12	6	11.62	11.54	11.53	0
		12	13	10.67	10.57	10.53	1
		25	0	10.76	10.67	10.61	1
5M	DFT-S 16QAM	1	1	10.78	10.73	10.58	1
5M	DFT-S 64QAM	1	1	9.26	9.23	9.12	2.5
5M	DFT-S 256QAM	1	1	7.27	7.20	7.17	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523299	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.495	2640	
100M	DFT-S PI/2 BPSK	1	1	25.64	25.55	25.73	25.72	25.71	0
		1	137	25.62	25.57	25.65	25.69	25.63	0
		1	271	25.54	25.47	25.62	25.62	25.58	0
		135	0	25.33	25.24	25.40	25.39	25.41	0.5
		135	67	25.48	25.46	25.60	25.53	25.53	0
		135	136	25.45	25.37	25.56	25.49	25.44	0.5
		270	0	25.59	25.50	25.66	25.64	25.58	0.5
100M	DFT-S QPSK	1	1	25.70	25.62	25.80	25.79	25.74	0
		1	137	25.67	25.59	25.75	25.73	25.68	0
		1	271	25.62	25.54	25.70	25.68	25.63	0
		135	0	25.42	25.34	25.50	25.48	25.43	1
		135	67	25.56	25.48	25.64	25.62	25.57	0
		135	136	25.52	25.44	25.60	25.58	25.53	1
		270	0	25.60	25.52	25.68	25.66	25.61	1
100M	DFT-S 16QAM	1	1	24.92	24.84	25.00	24.98	24.93	1
100M	DFT-S 64QAM	1	1	23.72	23.64	23.80	23.78	23.73	2.5
100M	DFT-S 256QAM	1	1	21.28	21.20	21.36	21.34	21.29	4.5
BW	MCS Index	Channel		508200	513399	518598	523797	528996	3GPP MPR
		Frequency (MHz)		2541	2566.995	2592.99	2618.985	2644.98	
90M	DFT-S PI/2 BPSK	1	1	25.57	25.53	25.73	25.72	25.65	0
		1	123	25.60	25.57	25.56	25.65	25.58	0
		1	243	25.46	25.37	25.56	25.58	25.57	0
		120	0	25.23	25.18	25.34	25.31	25.31	0.5
		120	60	25.41	25.39	25.56	25.49	25.53	0
		120	122	25.39	25.32	25.46	25.40	25.39	0.5
		240	0	25.59	25.43	25.58	25.59	25.54	0.5
90M	DFT-S QPSK	1	1	24.54	24.49	24.69	24.67	24.67	0
		1	123	24.62	24.54	24.62	24.59	24.54	0
		1	243	24.48	24.43	24.54	24.58	24.51	0
		120	0	24.24	24.16	24.36	24.38	24.32	1
		120	60	24.47	24.46	24.50	24.47	24.51	0
		120	122	24.39	24.35	24.52	24.40	24.36	1
		240	0	24.52	24.40	24.66	24.62	24.57	1
90M	DFT-S 16QAM	1	1	24.83	24.81	24.95	24.95	24.85	1
90M	DFT-S 64QAM	1	1	23.64	23.56	23.80	23.73	23.70	2.5
90M	DFT-S 256QAM	1	1	21.25	21.17	21.32	21.33	21.27	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		507204	512901	518598	524295	529998	3GPP MPR
		Frequency (MHz)		2536.02	2564.505	2592.99	2621.475	2649.99	
80M	DFT-S PI/2 BPSK	1	1	25.54	25.52	25.70	25.69	25.69	0
		1	109	25.58	25.54	25.61	25.65	25.53	0
		1	215	25.53	25.41	25.60	25.57	25.55	0
		108	0	25.23	25.19	25.35	25.34	25.38	0.5
		108	54	25.46	25.44	25.59	25.46	25.51	0
		108	108	25.37	25.33	25.54	25.41	25.38	0.5
		216	0	25.55	25.47	25.62	25.57	25.50	0.5
80M	DFT-S QPSK	1	1	24.64	24.52	24.71	24.71	24.66	0
		1	109	24.59	24.48	24.64	24.61	24.62	0
		1	215	24.44	24.38	24.52	24.58	24.48	0
		108	0	24.25	24.16	24.35	24.39	24.39	1
		108	54	24.41	24.46	24.52	24.46	24.51	0
		108	108	24.41	24.34	24.46	24.39	24.42	1
		216	0	24.56	24.44	24.59	24.62	24.51	1
80M	DFT-S 16QAM	1	1	24.89	24.79	24.90	24.97	24.87	1
80M	DFT-S 64QAM	1	1	23.63	23.60	23.80	23.70	23.65	2.5
80M	DFT-S 256QAM	1	1	21.25	21.15	21.32	21.34	21.21	4.5
BW	MCS Index	Channel		505200	511899	518598	525297	531996	3GPP MPR
		Frequency (MHz)		2526	2559.495	2592.99	2626.485	2659.98	
60M	DFT-S PI/2 BPSK	1	1	25.56	25.49	25.71	25.67	25.66	0
		1	81	25.58	25.50	25.60	25.64	25.58	0
		1	160	25.50	25.46	25.58	25.54	25.55	0
		81	0	25.31	25.15	25.36	25.34	25.38	0.5
		81	40	25.38	25.44	25.52	25.51	25.48	0
		81	81	25.38	25.36	25.56	25.49	25.42	0.5
		162	0	25.53	25.46	25.64	25.58	25.56	0.5
60M	DFT-S QPSK	1	1	24.63	24.45	24.63	24.69	24.65	0
		1	81	24.56	24.56	24.63	24.62	24.59	0
		1	160	24.45	24.42	24.52	24.56	24.50	0
		81	0	24.24	24.21	24.33	24.34	24.32	1
		81	40	24.38	24.39	24.51	24.46	24.46	0
		81	81	24.35	24.31	24.56	24.47	24.42	1
		162	0	24.51	24.50	24.64	24.61	24.49	1
60M	DFT-S 16QAM	1	1	24.85	24.79	24.96	24.93	24.91	1
60M	DFT-S 64QAM	1	1	23.65	23.59	23.71	23.73	23.72	2.5
60M	DFT-S 256QAM	1	1	21.19	21.19	21.32	21.27	21.22	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		504204	511401	518598	525795	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.005	2592.99	2628.975	2664.99	
50M	DFT-S PI/2 BPSK	1	1	25.54	25.47	25.63	25.69	25.66	0
		1	67	25.56	25.47	25.61	25.68	25.63	0
		1	131	25.50	25.42	25.58	25.60	25.53	0
		64	0	25.24	25.21	25.31	25.32	25.38	0.5
		64	32	25.38	25.43	25.57	25.45	25.53	0
		64	66	25.37	25.30	25.48	25.43	25.35	0.5
		128	0	25.49	25.40	25.66	25.59	25.53	0.5
50M	DFT-S QPSK	1	1	24.64	24.47	24.63	24.67	24.63	0
		1	67	24.53	24.51	24.65	24.64	24.57	0
		1	131	24.50	24.43	24.56	24.58	24.51	0
		64	0	24.26	24.19	24.37	24.31	24.37	1
		64	32	24.44	24.39	24.54	24.50	24.43	0
		64	66	24.39	24.32	24.47	24.48	24.35	1
		128	0	24.55	24.47	24.62	24.55	24.53	1
50M	DFT-S 16QAM	1	1	24.88	24.78	24.96	24.94	24.89	1
50M	DFT-S 64QAM	1	1	23.68	23.60	23.79	23.70	23.73	2.5
50M	DFT-S 256QAM	1	1	21.23	21.19	21.34	21.25	21.28	4.5
BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	25.58	25.50	25.69	25.67	25.67	0
		1	53	25.59	25.57	25.59	25.67	25.58	0
		1	104	25.47	25.37	25.57	25.52	25.50	0
		50	0	25.32	25.19	25.30	25.35	25.31	0.5
		50	25	25.39	25.37	25.50	25.44	25.43	0
		50	53	25.42	25.27	25.50	25.44	25.35	0.5
		100	0	25.58	25.50	25.57	25.54	25.51	0.5
40M	DFT-S QPSK	1	1	24.57	24.50	24.66	24.72	24.63	0
		1	53	24.58	24.50	24.60	24.67	24.60	0
		1	104	24.51	24.39	24.55	24.61	24.54	0
		50	0	24.33	24.21	24.32	24.31	24.37	1
		50	25	24.47	24.44	24.53	24.48	24.51	0
		50	53	24.41	24.33	24.50	24.41	24.37	1
		100	0	24.58	24.50	24.62	24.59	24.54	1
40M	DFT-S 16QAM	1	1	24.90	24.74	24.94	24.96	24.93	1
40M	DFT-S 64QAM	1	1	23.62	23.58	23.79	23.75	23.73	2.5
40M	DFT-S 256QAM	1	1	21.22	21.17	21.27	21.28	21.20	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		502200	510399	518598	526797	534996	3GPP MPR
		Frequency (MHz)		2511	2551.995	2592.99	2633.985	2674.98	
30M	DFT-S PI/2 BPSK	1	1	25.61	25.51	25.65	25.66	25.68	0
		1	39	25.55	25.50	25.62	25.62	25.56	0
		1	76	25.45	25.43	25.60	25.59	25.54	0
		36	0	25.23	25.22	25.35	25.37	25.38	0.5
		36	18	25.39	25.37	25.57	25.46	25.53	0
		36	39	25.40	25.30	25.56	25.48	25.40	0.5
		75	0	25.56	25.45	25.66	25.59	25.55	0.5
30M	DFT-S QPSK	1	1	24.54	24.52	24.69	24.62	24.71	0
		1	39	24.60	24.47	24.62	24.65	24.59	0
		1	76	24.54	24.39	24.59	24.52	24.54	0
		36	0	24.31	24.18	24.33	24.35	24.38	1
		36	18	24.38	24.39	24.54	24.52	24.44	0
		36	39	24.35	24.27	24.54	24.39	24.38	1
		75	0	24.51	24.47	24.60	24.61	24.49	1
30M	DFT-S 16QAM	1	1	24.92	24.75	24.98	24.97	24.90	1
30M	DFT-S 64QAM	1	1	23.70	23.58	23.72	23.72	23.64	2.5
30M	DFT-S 256QAM	1	1	21.22	21.13	21.26	21.29	21.26	4.5
BW	MCS Index	Channel		501204	509901	518598	527295	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.505	2592.99	2636.475	2679.99	
20M	DFT-S PI/2 BPSK	1	1	25.61	25.54	25.65	25.69	25.62	0
		1	26	25.54	25.56	25.61	25.66	25.55	0
		1	49	25.50	25.42	25.53	25.54	25.56	0
		25	0	25.23	25.21	25.32	25.32	25.36	0.5
		25	12	25.48	25.44	25.54	25.51	25.48	0
		25	26	25.36	25.27	25.55	25.39	25.44	0.5
		50	0	25.49	25.42	25.60	25.55	25.51	0.5
20M	DFT-S QPSK	1	1	24.64	24.51	24.72	24.68	24.65	0
		1	26	24.52	24.49	24.58	24.62	24.56	0
		1	49	24.54	24.44	24.60	24.62	24.52	0
		25	0	24.25	24.24	24.34	24.29	24.39	1
		25	12	24.44	24.46	24.56	24.43	24.52	0
		25	26	24.35	24.37	24.46	24.47	24.38	1
		50	0	24.52	24.42	24.65	24.60	24.52	1
20M	DFT-S 16QAM	1	1	24.85	24.76	25.00	24.90	24.93	1
20M	DFT-S 64QAM	1	1	23.71	23.60	23.78	23.74	23.71	2.5
20M	DFT-S 256QAM	1	1	21.19	21.17	21.34	21.27	21.23	4.5

NR Conducted Power (P-Sensor_Off_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		500700	509649	518598	527547	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.245	2592.99	2637.735	2682.48	
15M	DFT-S PI/2 BPSK	1	1	25.55	25.52	25.69	25.63	25.70	0
		1	19	25.54	25.48	25.62	25.63	25.60	0
		1	36	25.50	25.37	25.54	25.61	25.50	0
		18	0	25.24	25.20	25.37	25.36	25.40	0.5
		18	9	25.45	25.42	25.56	25.51	25.45	0
		18	19	25.45	25.34	25.53	25.39	25.41	0.5
		36	0	25.59	25.42	25.63	25.55	25.49	0.5
15M	DFT-S QPSK	1	1	24.57	24.54	24.72	24.62	24.67	0
		1	19	24.58	24.55	24.59	24.59	24.58	0
		1	36	24.46	24.47	24.57	24.56	24.50	0
		18	0	24.25	24.16	24.33	24.34	24.33	1
		18	9	24.39	24.41	24.57	24.53	24.46	0
		18	19	24.37	24.27	24.47	24.43	24.40	1
		36	0	24.50	24.41	24.63	24.64	24.49	1
15M	DFT-S 16QAM	1	1	24.83	24.82	24.96	24.88	24.88	1
15M	DFT-S 64QAM	1	1	23.65	23.59	23.72	23.70	23.68	2.5
15M	DFT-S 256QAM	1	1	21.24	21.18	21.28	21.27	21.25	4.5
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	25.62	25.45	25.66	25.71	25.61	0
		1	12	25.53	25.56	25.65	25.62	25.55	0
		1	22	25.52	25.39	25.58	25.52	25.58	0
		12	0	25.26	25.22	25.30	25.29	25.31	0.5
		12	6	25.43	25.45	25.51	25.49	25.43	0
		12	12	25.45	25.37	25.56	25.46	25.36	0.5
		24	0	25.54	25.50	25.63	25.54	25.49	0.5
10M	DFT-S QPSK	1	1	24.57	24.55	24.70	24.65	24.63	0
		1	12	24.53	24.48	24.56	24.66	24.56	0
		1	22	24.52	24.42	24.52	24.60	24.56	0
		12	0	24.30	24.16	24.33	24.30	24.34	1
		12	6	24.42	24.40	24.52	24.46	24.48	0
		12	12	24.41	24.34	24.53	24.43	24.40	1
		24	0	24.50	24.47	24.63	24.60	24.50	1
10M	DFT-S 16QAM	1	1	24.89	24.79	25.00	24.98	24.93	1
10M	DFT-S 64QAM	1	1	23.67	23.54	23.77	23.69	23.72	2.5
10M	DFT-S 256QAM	1	1	21.21	21.19	21.36	21.31	21.27	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		509202	513900	518598	523299	528000	
		Frequency (MHz)		2546.01	2569.5	2592.99	2616.495	2640	
100M	DFT-S PI/2 BPSK	1	1	9.81	9.89	9.71	9.76	9.86	0
		1	137	9.84	9.85	9.69	9.83	9.80	0
		1	271	9.74	9.73	9.67	9.72	9.82	0
		135	0	8.62	8.69	9.31	8.61	8.74	0.5
		135	67	9.58	9.53	9.66	9.56	9.60	0
		135	136	8.69	8.70	9.27	8.63	8.66	0.5
		270	0	8.66	8.57	9.25	8.60	8.68	0.5
100M	DFT-S QPSK	1	1	9.89	9.90	9.74	9.86	9.91	0
		1	137	9.78	9.84	9.72	9.80	9.85	0
		1	271	9.82	9.75	9.67	9.76	9.78	0
		135	0	8.65	8.66	8.57	8.68	8.70	1
		135	67	9.52	9.55	9.45	9.52	9.55	0
		135	136	8.63	8.60	8.54	8.56	8.63	1
		270	0	8.59	8.66	8.51	8.56	8.69	1
100M	DFT-S 16QAM	1	1	8.55	8.51	8.42	8.52	8.50	1
100M	DFT-S 64QAM	1	1	8.55	8.51	7.11	8.52	8.50	2.5
100M	DFT-S 256QAM	1	1	8.55	8.51	5.11	8.52	8.50	4.5
BW	MCS Index	Channel		508200	513399	518598	523797	528996	3GPP MPR
		Frequency (MHz)		2541	2566.995	2592.99	2618.985	2644.98	
90M	DFT-S PI/2 BPSK	1	1	9.84	9.80	9.68	9.85	9.83	0
		1	123	9.80	9.88	9.72	9.78	9.83	0
		1	243	9.82	9.76	9.66	9.70	9.75	0
		120	0	8.69	8.73	8.53	8.59	8.68	0.5
		120	60	9.53	9.56	9.45	9.47	9.62	0
		120	122	8.68	8.60	8.54	8.57	8.70	0.5
		240	0	8.65	8.57	8.51	8.54	8.68	0.5
90M	DFT-S QPSK	1	1	9.80	9.85	9.74	9.79	9.82	0
		1	123	9.82	9.86	9.62	9.79	9.88	0
		1	243	9.75	9.77	9.63	9.75	9.78	0
		120	0	8.66	8.67	8.56	8.65	8.72	1
		120	60	9.53	9.61	9.40	9.50	9.56	0
		120	122	8.64	8.66	8.49	8.59	8.62	1
		240	0	8.63	8.62	8.51	8.56	8.58	1
90M	DFT-S 16QAM	1	1	8.48	8.54	8.34	8.50	8.54	1
90M	DFT-S 64QAM	1	1	8.48	8.54	8.34	8.50	8.54	2.5
90M	DFT-S 256QAM	1	1	8.48	8.54	8.34	8.50	8.54	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		507204	512901	518598	524295	529998	3GPP MPR
		Frequency (MHz)		2536.02	2564.505	2592.99	2621.475	2649.99	
80M	DFT-S PI/2 BPSK	1	1	9.89	9.81	9.71	9.82	9.87	0
		1	109	9.85	9.82	9.62	9.75	9.81	0
		1	215	9.73	9.75	9.61	9.74	9.75	0
		108	0	8.65	8.63	8.56	8.67	8.74	0.5
		108	54	9.54	9.58	9.37	9.55	9.56	0
		108	108	8.62	8.66	8.47	8.60	8.67	0.5
		216	0	8.64	8.59	8.50	8.56	8.65	0.5
80M	DFT-S QPSK	1	1	9.87	9.84	9.73	9.80	9.86	0
		1	109	9.80	9.81	9.65	9.79	9.86	0
		1	215	9.79	9.80	9.63	9.71	9.79	0
		108	0	8.70	8.66	8.47	8.64	8.72	1
		108	54	9.53	9.51	9.39	9.49	9.58	0
		108	108	8.61	8.67	8.45	8.59	8.68	1
		216	0	8.62	8.58	8.50	8.55	8.62	1
80M	DFT-S 16QAM	1	1	8.50	8.53	8.40	8.45	8.59	1
80M	DFT-S 64QAM	1	1	8.50	8.53	8.40	8.45	8.59	2.5
80M	DFT-S 256QAM	1	1	8.50	8.53	8.40	8.45	8.59	4.5
BW	MCS Index	Channel		505200	511899	518598	525297	531996	3GPP MPR
		Frequency (MHz)		2526	2559.495	2592.99	2626.485	2659.98	
60M	DFT-S PI/2 BPSK	1	1	9.81	9.82	9.73	9.79	9.84	0
		1	81	9.77	9.83	9.68	9.83	9.82	0
		1	160	9.81	9.83	9.60	9.76	9.83	0
		81	0	8.66	8.64	8.51	8.67	8.74	0.5
		81	40	9.53	9.61	9.39	9.51	9.60	0
		81	81	8.62	8.65	8.47	8.58	8.70	0.5
		162	0	8.62	8.59	8.49	8.57	8.63	0.5
60M	DFT-S QPSK	1	1	9.87	9.81	9.70	9.84	9.83	0
		1	81	9.77	9.87	9.66	9.79	9.79	0
		1	160	9.72	9.73	9.61	9.75	9.80	0
		81	0	8.67	8.63	8.54	8.69	8.69	1
		81	40	9.55	9.51	9.40	9.55	9.54	0
		81	81	8.65	8.68	8.46	8.63	8.67	1
		162	0	8.65	8.67	8.42	8.57	8.59	1
60M	DFT-S 16QAM	1	1	8.53	8.58	8.40	8.49	8.53	1
60M	DFT-S 64QAM	1	1	8.53	8.58	8.40	8.49	8.53	2.5
60M	DFT-S 256QAM	1	1	8.53	8.58	8.40	8.49	8.53	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		504204	511401	518598	525795	532998	3GPP MPR
		Frequency (MHz)		2521.02	2557.005	2592.99	2628.975	2664.99	
50M	DFT-S PI/2 BPSK	1	1	9.81	9.83	9.74	9.79	9.91	0
		1	67	9.84	9.85	9.69	9.74	9.84	0
		1	131	9.77	9.80	9.60	9.79	9.79	0
		64	0	8.72	8.64	8.47	8.66	8.73	0.5
		64	32	9.50	9.61	9.41	9.51	9.61	0
		64	66	8.63	8.69	8.47	8.61	8.64	0.5
		128	0	8.56	8.62	8.50	8.55	8.66	0.5
50M	DFT-S QPSK	1	1	9.80	9.83	9.71	9.83	9.87	0
		1	67	9.80	9.78	9.63	9.75	9.89	0
		1	131	9.77	9.83	9.63	9.74	9.78	0
		64	0	8.71	8.66	8.55	8.69	8.68	1
		64	32	9.55	9.51	9.36	9.51	9.62	0
		64	66	8.64	8.66	8.51	8.64	8.69	1
		128	0	8.60	8.67	8.41	8.62	8.65	1
50M	DFT-S 16QAM	1	1	8.48	8.51	8.38	8.51	8.59	1
50M	DFT-S 64QAM	1	1	8.48	8.51	8.38	8.51	8.59	2.5
50M	DFT-S 256QAM	1	1	8.48	8.51	8.38	8.51	8.59	4.5
BW	MCS Index	Channel		503202	510900	518598	526296	534000	3GPP MPR
		Frequency (MHz)		2516.01	2554.5	2592.99	2631.48	2670	
40M	DFT-S PI/2 BPSK	1	1	9.89	9.85	9.69	9.79	9.83	0
		1	53	9.83	9.87	9.71	9.74	9.87	0
		1	104	9.79	9.79	9.63	9.73	9.74	0
		50	0	8.64	8.69	8.48	8.60	8.64	0.5
		50	25	9.60	9.59	9.36	9.56	9.61	0
		50	53	8.60	8.65	8.51	8.57	8.67	0.5
		100	0	8.61	8.63	8.46	8.55	8.61	0.5
40M	DFT-S QPSK	1	1	9.79	9.86	9.64	9.77	9.82	0
		1	53	9.80	9.80	9.70	9.84	9.87	0
		1	104	9.75	9.75	9.66	9.73	9.74	0
		50	0	8.63	8.63	8.50	8.67	8.70	1
		50	25	9.54	9.53	9.40	9.52	9.55	0
		50	53	8.59	8.61	8.52	8.66	8.68	1
		100	0	8.59	8.60	8.44	8.57	8.65	1
40M	DFT-S 16QAM	1	1	8.47	8.48	8.40	8.47	8.54	1
40M	DFT-S 64QAM	1	1	8.47	8.48	8.40	8.47	8.54	2.5
40M	DFT-S 256QAM	1	1	8.47	8.48	8.40	8.47	8.54	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		502200	510399	518598	526797	534996	3GPP MPR
		Frequency (MHz)		2511	2551.995	2592.99	2633.985	2674.98	
30M	DFT-S PI/2 BPSK	1	1	9.83	9.84	9.68	9.82	9.87	0
		1	39	9.79	9.87	9.63	9.76	9.81	0
		1	76	9.82	9.82	9.67	9.74	9.79	0
		36	0	8.62	8.66	8.52	8.67	8.67	0.5
		36	18	9.50	9.56	9.38	9.49	9.59	0
		36	39	8.63	8.62	8.50	8.63	8.69	0.5
		75	0	8.65	8.67	8.46	8.55	8.63	0.5
30M	DFT-S QPSK	1	1	9.89	9.85	9.73	9.81	9.90	0
		1	39	9.78	9.86	9.70	9.80	9.87	0
		1	76	9.82	9.82	9.66	9.72	9.79	0
		36	0	8.72	8.71	8.48	8.63	8.69	1
		36	18	9.53	9.55	9.35	9.52	9.58	0
		36	39	8.60	8.60	8.50	8.62	8.62	1
		75	0	8.64	8.61	8.41	8.59	8.68	1
30M	DFT-S 16QAM	1	1	8.57	8.50	8.39	8.44	8.56	1
30M	DFT-S 64QAM	1	1	8.57	8.50	8.39	8.44	8.56	2.5
30M	DFT-S 256QAM	1	1	8.57	8.50	8.39	8.44	8.56	4.5
BW	MCS Index	Channel		501204	509901	518598	527295	535998	3GPP MPR
		Frequency (MHz)		2506.02	2549.505	2592.99	2636.475	2679.99	
20M	DFT-S PI/2 BPSK	1	1	9.88	9.83	9.65	9.81	9.88	0
		1	26	9.79	9.81	9.71	9.82	9.86	0
		1	49	9.74	9.74	9.62	9.78	9.78	0
		25	0	8.67	8.72	8.52	8.67	8.68	0.5
		25	12	9.60	9.61	9.38	9.54	9.58	0
		25	26	8.59	8.70	8.54	8.56	8.61	0.5
		50	0	8.61	8.67	8.43	8.57	8.59	0.5
20M	DFT-S QPSK	1	1	9.88	9.83	9.70	9.82	9.87	0
		1	26	9.86	9.84	9.62	9.82	9.81	0
		1	49	9.81	9.82	9.60	9.72	9.83	0
		25	0	8.71	8.65	8.52	8.64	8.66	1
		25	12	9.59	9.59	9.41	9.55	9.57	0
		25	26	8.65	8.63	8.54	8.56	8.63	1
		50	0	8.62	8.64	8.41	8.54	8.63	1
20M	DFT-S 16QAM	1	1	8.49	8.57	8.37	8.48	8.51	1
20M	DFT-S 64QAM	1	1	8.49	8.57	8.37	8.48	8.51	2.5
20M	DFT-S 256QAM	1	1	8.49	8.57	8.37	8.48	8.51	4.5

NR Conducted Power (P-Sensor_On_Ant2_Laptop)									
NR Band 41									
BW	MCS Index	Channel		500700	509649	518598	527547	536496	3GPP MPR
		Frequency (MHz)		2503.5	2548.245	2592.99	2637.735	2682.48	
15M	DFT-S PI/2 BPSK	1	1	9.86	9.80	9.71	9.83	9.87	0
		1	19	9.81	9.84	9.63	9.81	9.80	0
		1	36	9.77	9.78	9.66	9.78	9.74	0
		18	0	8.70	8.64	8.54	8.68	8.70	0.5
		18	9	9.60	9.59	9.35	9.49	9.58	0
		18	19	8.63	8.62	8.45	8.63	8.64	0.5
		36	0	8.66	8.58	8.48	8.53	8.64	0.5
15M	DFT-S QPSK	1	1	9.83	9.83	9.69	9.80	9.83	0
		1	19	9.79	9.79	9.66	9.75	9.86	0
		1	36	9.77	9.79	9.57	9.73	9.74	0
		18	0	8.66	8.67	8.51	8.68	8.68	1
		18	9	9.56	9.59	9.45	9.54	9.52	0
		18	19	8.59	8.67	8.48	8.58	8.69	1
		36	0	8.60	8.66	8.43	8.55	8.64	1
15M	DFT-S 16QAM	1	1	8.48	8.58	8.39	8.48	8.56	1
15M	DFT-S 64QAM	1	1	8.48	8.58	8.39	8.48	8.56	2.5
15M	DFT-S 256QAM	1	1	8.48	8.58	8.39	8.48	8.56	4.5
BW	MCS Index	Channel		500202	509400	518598	527796	537000	3GPP MPR
		Frequency (MHz)		2501.01	2547	2592.99	2638.98	2685	
10M	DFT-S PI/2 BPSK	1	1	9.82	9.85	9.70	9.79	9.86	0
		1	12	9.77	9.78	9.68	9.78	9.88	0
		1	22	9.75	9.79	9.65	9.78	9.80	0
		12	0	8.70	8.71	8.51	8.64	8.67	0.5
		12	6	9.51	9.57	9.40	9.47	9.59	0
		12	12	8.69	8.68	8.46	8.63	8.70	0.5
		24	0	8.62	8.57	8.51	8.55	8.67	0.5
10M	DFT-S QPSK	1	1	9.83	9.87	9.73	9.82	9.83	0
		1	12	9.81	9.86	9.62	9.74	9.81	0
		1	22	9.78	9.75	9.62	9.79	9.78	0
		12	0	8.72	8.70	8.53	8.67	8.73	1
		12	6	9.59	9.56	9.41	9.57	9.55	0
		12	12	8.61	8.60	8.45	8.65	8.63	1
		24	0	8.62	8.58	8.45	8.58	8.67	1
10M	DFT-S 16QAM	1	1	8.54	8.51	8.41	8.50	8.52	1
10M	DFT-S 64QAM	1	1	8.54	8.51	8.41	8.50	8.52	2.5
10M	DFT-S 256QAM	1	1	8.54	8.51	8.41	8.50	8.52	4.5

Uplink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Tablet

Confugure	Combination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequen cy (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	Tx Power with UL-CA Active (dBm)
																		Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	24.5	24.04	15.90
					1	49						1	0			24.5	23.94	23.82
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	24.5	24.01	15.81
					1	49						1	0			24.5	23.88	23.82
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	24.5	23.92	15.79
					1	49						1	0			24.5	23.77	23.76
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	24	23.86	15.71
					1	99						1	0			24	23.71	23.69
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	24	23.82	15.61
					1	99						1	0			24	23.69	23.63
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	24	23.85	15.61
					1	99						1	0			24	23.61	23.59
	38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	24	23.84	15.71
					1	99						1	0			24	23.64	23.61
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	24	23.67	15.52
					1	99						1	0			24	23.49	23.48
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	24	23.55	15.47
					1	99						1	0			24	23.31	23.30
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	24	23.96	15.58
					1	99						1	0			24	23.88	23.83
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	24	23.98	15.62
					1	99						1	0			24	23.93	23.80
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	24	23.52	15.54
					1	99						1	0			24	23.38	23.37
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	16	15.96	14.18
					1	99						1	0			16	15.87	15.78
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	16	15.91	14.14
					1	99						1	0			16	15.89	15.82
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	16	15.87	14.21
					1	99						1	0			16	15.85	15.76
	66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	24	23.75	15.85
					1	49						1	0			24	23.51	23.45
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	24	23.79	15.81
					1	49						1	0			24	23.55	23.47
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	24	23.57	15.71
					1	49						1	0			24	23.33	23.31
	66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	24	23.76	15.82
					1	99						1	0			24	23.53	23.39
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	24	23.77	15.79
					1	99						1	0			24	23.51	23.36
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	24	23.55	15.82
					1	99						1	0			24	23.28	23.27

Uplink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Tablet

Confugure	Combination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequen cy (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	Tx Power with UL-CA Active (dBm)
																		Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	16	15.74	15.54
					1	49						1	0			16	15.64	15.61
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	16	15.69	15.47
					1	49						1	0			16	15.6	15.54
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	16	15.62	15.45
					1	49						1	0			16	15.51	15.48
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	8.5	8.23	7.99
					1	99						1	0			8.5	8.12	8.09
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	8.5	8.22	8.03
					1	99						1	0			8.5	8.08	8.06
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	8.5	8.14	7.97
					1	99						1	0			8.5	8.03	7.99
	38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	12	11.99	11.75
					1	99						1	0			12	11.81	11.79
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	12	11.79	11.54
					1	99						1	0			12	11.64	11.59
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	12	11.71	11.49
					1	99						1	0			12	11.58	11.55
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	11	11	10.81
					1	99						1	0			11	10.86	10.85
		41	20	QPSK	1	0	40529	2583.9	41	20	QPSK	1	99	40727	2603.7	11	10.89	10.68
					1	99						1	0			11	10.77	10.72
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	11	10.71	10.61
					1	99						1	0			11	10.65	10.63
	42C	42	20	QPSK	1	0	43190	3560	42	20	QPSK	1	99	43388	3579.8	8	7.97	7.81
					1	99						1	0			8	7.86	7.84
		42	20	QPSK	1	0	43340	3575	42	20	QPSK	1	99	43538	3594.8	8	7.95	7.77
					1	99						1	0			8	7.84	7.81
		42	20	QPSK	1	0	43490	3590	42	20	QPSK	1	99	43292	3570.2	8	7.96	7.72
					1	99						1	0			8	7.85	7.83
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	8.5	8.07	6.93
					1	99						1	0			8.5	7.99	7.96
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	8.5	8.13	6.93
					1	99						1	0			8.5	8.03	8.01
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	8.5	8.31	7.10
					1	99						1	0			8.5	8.24	8.11
	66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	11	10.78	10.66
					1	49						1	0			11	10.77	10.69
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	11	10.89	10.58
					1	49						1	0			11	10.71	10.64
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	11	10.77	10.51
					1	49						1	0			11	10.68	10.61
	66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	11	10.86	10.69
					1	99						1	0			11	10.8	10.76
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	11	10.85	10.69
					1	99						1	0			11	10.69	10.69
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	11	10.79	10.61
					1	99						1	0			11	10.71	10.64

Uplink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Laptop

Confugure	Combination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequen cy (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	Tx Power with UL-CA Active (dBm)
																		Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	24.5	24.04	15.90
					1	49						1	0			24.5	23.94	23.82
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	24.5	24.01	15.81
					1	49						1	0			24.5	23.88	23.82
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	24.5	23.92	15.79
					1	49						1	0			24.5	23.77	23.76
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	24	23.86	15.71
					1	99						1	0			24	23.71	23.69
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	24	23.82	15.61
					1	99						1	0			24	23.69	23.63
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	24	23.85	15.61
					1	99						1	0			24	23.61	23.59
	38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	24	23.84	15.71
					1	99						1	0			24	23.64	23.61
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	24	23.67	15.52
					1	99						1	0			24	23.49	23.48
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	24	23.55	15.47
					1	99						1	0			24	23.31	23.30
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	24	23.96	15.58
					1	99						1	0			24	23.88	23.83
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	24	23.98	15.62
					1	99						1	0			24	23.93	23.80
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	24	23.52	15.54
					1	99						1	0			24	23.38	23.37
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	22	21.8	14.18
					1	99						1	0			22	21.71	21.62
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	22	21.73	14.14
					1	99						1	0			22	21.64	21.57
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	22	21.82	14.21
					1	99						1	0			22	21.7	21.59
	66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	24	23.75	15.85
					1	49						1	0			24	23.51	23.45
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	24	23.79	15.81
					1	49						1	0			24	23.55	23.47
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	24	23.57	15.71
					1	49						1	0			24	23.33	23.31
	66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	24	23.76	15.82
					1	99						1	0			24	23.53	23.39
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	24	23.77	15.79
					1	99						1	0			24	23.51	23.36
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	24	23.55	15.82
					1	99						1	0			24	23.28	23.27

Uplink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Laptop

Confugure	Combination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequen cy (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Maximum Tune-up Power	Single Carrier Tx Power without UL-CA Active (dBm)	Tx Power with UL-CA Active (dBm)
																		Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	49	20549	838.9	17.5	17.39	16.70
					1	49						1	0			17.5	17.27	17.21
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	49	20575	841.5	17.5	17.33	16.66
					1	49						1	0			17.5	17.21	17.16
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	49	20600	844	17.5	17.26	16.64
					1	49						1	0			17.5	17.13	17.10
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	9.5	9.2	8.89
					1	99						1	0			9.5	9.14	9.10
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	9.5	9.23	8.88
					1	99						1	0			9.5	9.12	9.06
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	9.5	9.13	8.84
					1	99						1	0			9.5	9.02	9.01
	38C	38	20	QPSK	1	0	37850	2580	38	20	QPSK	1	99	38048	2599.8	13	12.61	11.98
					1	99						1	0			13	12.51	12.48
		38	20	QPSK	1	0	37901	2585.1	38	20	QPSK	1	99	38099	2604.9	13	12.47	12.05
					1	99						1	0			13	12.33	12.32
		38	20	QPSK	1	0	37952	2590.2	38	20	QPSK	1	99	38150	2610	13	12.35	11.91
					1	99						1	0			13	12.26	12.20
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	11.5	11.26	10.92
					1	99						1	0			11.5	11.19	11.18
		41	20	QPSK	1	0	40529	2583.9	41	20	QPSK	1	99	40727	2603.7	11.5	11.27	10.88
					1	99						1	0			11.5	11.16	11.12
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	11.5	11.08	10.82
					1	99						1	0			11.5	11.02	11.00
	42C	42	20	QPSK	1	0	43190	3560	42	20	QPSK	1	99	43388	3579.8	10.5	10.48	10.21
					1	99						1	0			10.5	10.44	10.40
		42	20	QPSK	1	0	43340	3575	42	20	QPSK	1	99	43538	3594.8	10.5	10.45	10.28
					1	99						1	0			10.5	10.41	10.34
		42	20	QPSK	1	0	43490	3590	42	20	QPSK	1	99	43292	3570.2	10.5	10.47	10.21
					1	99						1	0			10.5	10.43	10.35
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	10	9.51	9.50
					1	99						1	0			10	9.62	9.58
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	10	9.87	9.59
					1	99						1	0			10	9.72	9.65
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	10	9.69	9.49
					1	99						1	0			10	9.73	9.60
	66B	66	10	QPSK	1	0	132022	1715	66	10	QPSK	1	49	132121	1724.9	13.5	13.27	12.99
					1	49						1	0			13.5	13.11	13.09
		66	10	QPSK	1	0	132373	1750.1	66	10	QPSK	1	49	132472	1760	13.5	13.45	13.05
					1	49						1	0			13.5	13.27	13.22
		66	10	QPSK	1	0	132523	1765.1	66	10	QPSK	1	49	132622	1775	13.5	13.31	13.10
					1	49						1	0			13.5	13.15	13.13
	66C	66	20	QPSK	1	0	132072	1720	66	20	QPSK	1	99	132270	1739.8	13.5	13.3	13.00
					1	99						1	0			13.5	13.14	13.07
		66	20	QPSK	1	0	132323	1745.1	66	20	QPSK	1	99	132521	1764.9	13.5	13.47	13.12
					1	99						1	0			13.5	13.32	13.27
		66	20	QPSK	1	0	132374	1750.2	66	20	QPSK	1	99	132572	1770	13.5	13.31	13.04
					1	99						1	0			13.5	13.14	13.11

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Tablet

Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active Total
Intra Band Contiguous	CA_7B(4x4)	7	15	20825	2507.5	1	0	2825	2627.5	7	5	2918	2636.8																			24	23.79	23.71		
	CA_38C(4x4)	38	20	37850	2580	1	0	37850	2580	38	20	38048	2599.8																			24	23.84	23.82		
	CA_42E(4x4)	42	20	42140	3455	1	0	42140	3455	42	20	42338	3474.8	42	20	42536	3494.6	42	20	42734	3514.4											15.5	15.45	15.39		
	CA_48F(4x4)	48	20	56210	3647	1	0	56210	3647	48	20	56012	3627.2	48	20	55814	3607.4	48	20	55616	3587.6	48	20	55418	3567.8							16	15.91	15.85		
	CA_2A(4x4)-17A	2	20	18900	1880	1	0	900	1960	17	10	5790	740																				24	23.51	23.47	
	CA_2A(4x4)-4A(4x4)-13A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	13	10	5230	751																24	23.51	23.45	
	CA_2A(4x4)-5A-46A	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5																24	23.51	23.43	
	CA_2A(4x4)-5A-7A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	7	20	3100	2655																24	23.51	23.46	
	CA_2A(4x4)-2A(4x4)-46A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50665	5537.5																24	23.51	23.38	
	CA_2A(4x4)-29A-30A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	29	10	9715	722.5	30	10	9820	2355	66	20	66786	2145												24	23.51	23.37	
	CA_2A(4x4)-4A(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	10	5060	734	30	10	9820	2355												24	23.51	23.42	
	CA_2A(4x4)-4A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	29	10	9715	722.5	30	10	9820	2355												24	23.51	23.44	
	CA_2A(4x4)-4A(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2525	881.5	30	10	9820	2355												24	23.51	23.47	
	CA_2A(4x4)-4A(4x4)-7A(4x4)-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3100	2655	12	10	5060	734												24	23.51	23.46	
	CA_2A(4x4)-7A(4x4)-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50665	5537.5	66	20	66786	2145												24	23.51	23.45	
	CA_2A(4x4)-46A-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	66	20	66786	2145												24	23.51	23.44	
	CA_2A(4x4)-12A-66C(4x4)	2	20	18900	1880	1	0	900	1960	12	10	5095	737.5	66	20	66536	2120	66	20	66734	2139.8												24	23.51	23.41	
	CA_2A(4x4)-2A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355												24	23.51	23.38	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-12A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	12	10	5095	737.5												24	23.51	23.37	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	5	10	2525	881.5												24	23.51	23.39	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	71	20	68761	634.5												24	23.51	23.44	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66786	2145	71	20	68761	634.5												24	23.51	23.47	
	CA_2A(4x4)-46A-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	46890	5160	46	20	54340	5905	66	20	66786	2145												24	23.51	23.41	
	CA_2A(4x4)-4A(4x4)-12A-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5035	731.5	12	5	5155	743.5												24	23.51	23.42	
	CA_2A(4x4)-4A(4x4)-12B	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5048	732.8	12	10	5120	740												24	23.51	23.38	
	CA_2A(4x4)-4A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	5	10	2525	881.5												24	23.51	23.35	
	CA_2A(4x4)-4A(4x4)-7C(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3001	2645.1	7	20	3199	2664.9												24	23.51	23.42	
	CA_2A(4x4)-5A-46C	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50692	5540.2	46	20	50890	5560												24	23.51	23.41	
	CA_2A(4x4)-66A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66536	2120	66	20	67036	2170	71	20	68761	634.5												24	23.51	23.44	
	CA_2A(4x4)-66C(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66787	2145.1	66	20	66985	2164.9	71	20	68761	634.5												24	23.51	23.47	
	CA_2A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	66	20	66536	2120	66	20	67036	2170												24	23.51	23.45	
	CA_2C(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	12	10	5095	737.5	30	10	9820	2355												24	23.51	23.41	
	CA_2C(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355												24	23.51	23.43	
	CA_2C(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2525	881.5	30	10	9820	2355												24	23.51	23.47	
	CA_2A(4x4)-7A(4x4)-46C	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50692	5540.2	46	20	50890	5560												24	23.51	23.42	
	CA_2A(4x4)-48A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	66	20	66536	2120	66	20	67036	2170												24	23.51	23.46	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-13A	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	13	10	5230	751												24	23.51	23.38	
	CA_2A(4x4																																			

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Tablet																																					
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximu m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active Total	
Inter Band	CA_2A(4x4)-5B-66C(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	66787	2145.1	66	20	66985	2164.9									24	23.51	23.37	
	CA_2C(4x4)-5B-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2476	876.6	5	10	2575	886.5	30	10	9820	2355									24	23.51	23.37	
	CA_2A(4x4)-12B-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	12	5	5048	732.8	12	10	5120	740	66	20	66536	2120	66	20	67036	2170									24	23.51	23.44	
	CA_2A(4x4)-7C(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3001	2645.1	7	20	3199	2664.9	66	20	66536	2120	66	20	67036	2170									24	23.51	23.41	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	66	20	66536	2120	66	20	67036	2170									24	23.51	23.39	
	CA_2A(4x4)-2A(4x4)-46D	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8									24	23.51	23.33	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66B(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	10	67187	2185.1	66	10	67286	2195									24	23.51	23.31	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66C(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	20	67038	2170.2	66	20	67236	2190									24	23.51	23.32	
	CA_2A(4x4)-46C-46C	2	20	18900	1880	1	0	900	1960	46	20	50692	5540.2	46	20	50890	5560	46	20	54142	5885.2	46	20	54340	5905									24	23.51	23.48	
	CA_2A(4x4)-48A(4x4)-48D(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8									24	23.51	23.43	
	CA_2A(4x4)-48C(4x4)-48C(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8									24	23.51	23.39	
	CA_2A(4x4)-46E-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	48	20	55780	3603	66	20	66786	2145	24	23.51	23.33	
	CA_2A(4x4)-46D-46C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145	24	23.51	23.33	
	CA_2A(4x4)-5A-46E-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145	24	23.51	23.30	
	CA_2A(4x4)-5A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	24	23.51	23.28	
	CA_2A(4x4)-13A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	24	23.51	23.35	
	CA_2A(4x4)-46A-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145					24	23.51	23.28	
	CA_2A(4x4)-46C-48C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145					24	23.51	23.39	
	CA_2A(4x4)-46D-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55780	3603	66	20	66786	2145					24	23.51	23.26	
	CA_2A(4x4)-46C-48E	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	24	23.51	23.35	
	CA_2A(4x4)-46E-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	67036	2170	66	20	66786	2145	24	23.51	23.39	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46E	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	24	23.51	23.33	
	CA_2A(4x4)-13A-46A-46D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8					24	23.51	23.40	
	CA_2A(4x4)-13A-46E	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9					24	23.51	23.41	
	CA_2A(4x4)-48E(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145					24	23.51	23.35	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46D	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50692	5560.2	46	20	51090	5580	46	20	51288	5599.8					24	23.51	23.30	
	CA_2A(4x4)-46C-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145	24	23.51	23.26	
	CA_4A(4x4)-45A(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55340	3560																						24	23.35	23.31
	CA_4A(4x4)-17A	4	20	20050	1720	1	0	2050	2120	17	10	5790	740																						24	23.35	23.28
	CA_4A(4x4)-46A-46A	4	20	20050	1720	1	0	2050	2120	46	20	46890	5160	46	20	54340	5905																	24	23.35	23.32	
	CA_4A(4x4)-48C(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55891	3615.1	48	20	56089	3634.9																	24	23.35	23.25	
	CA_4A(4x4)-4A(4x4)-13A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	13	10	5230	751																	24	23.35	23.27	
	CA_4A(4x4)-4A(4x4)-7-1A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	71	20	68761	634.5																				

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Tablet

Configure	Combination	PCC							SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power			
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active
																																				Total
	CA_7C(4x4)-46A	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50665	5537.5																24	23.86	23.83	
	CA_7A(4x4)-7A(4x4)-66A(4x4)	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	66	20	66786	2145																24	23.86	23.77	
	CA_7A(4x4)-40D(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	39051	2340.1	40	20	39249	2359.9	40	20	39447	2379.7											24	23.86	23.82		
	CA_7A(4x4)-46D	7	20	20850	2510	1	0	2085	2630	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8											24	23.86	23.81		
	CA_7A(4x4)-7A(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	46	20	50692	5540.2	46	20	50890	5560												24	23.86	23.79	
	CA_7C(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50692	5540.2	46	20	50890	5560												24	23.86	23.81	
	CA_7A(4x4)-40E(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	38853	2320.3	40	20	39051	2340.1	40	20	39249	2359.9	40	20	39447	2379.9							24	23.86	23.82		
	CA_7C(4x4)-46D	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8								24	23.86	23.78	
	CA_12A-25A(4x4)	12	10	23060	704	1	0	5060	734	25	20	8590	1985																				24.5	23.79	23.73	
	CA_13A-46A-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	66786	2145																24.5	23.83	23.77	
	CA_13A-46C-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50892	5560.2	46	20	51090	5580	66	20	66786	2145												24.5	23.83	23.71	
	CA_13A-48A(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	10	66536	2120	66	10	66635	2129.9												24.5	23.83	23.79	
	CA_13A-48A(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	20	66536	2120	66	20	66734	2139.8												24.5	23.83	23.75	
	CA_13A-66A(4x4)-66A(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120												24.5	23.83	23.71	
	CA_13A-48A(4x4)-48C(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	66	20	66786	2145								24.5	23.83	23.74	
	CA_13A-48C(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	66	10	66536	2120	66	10	66635	2129.9								24.5	23.83	23.73	
	CA_13A-48C(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	66	20	66536	2120	66	20	66734	2139.8								24.5	23.83	23.78	
	CA_13A-48D(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8	66	20	66786	2145								24.5	23.83	23.76	
	CA_13A-48A(4x4)-48D(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8								24.5	23.83	23.73	
	CA_13A-48C(4x4)-48C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8								24.5	23.83	23.75	
	CA_13A-46E-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145				24.5	23.83	23.74	
	CA_13A-48E-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145				24.5	23.83	23.77	
	CA_25A(4x4)-46A	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50665	5537.5																					24	23.57	23.52
	CA_25A(4x4)-26A-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	40620	2593																	24	23.57	23.51
	CA_25A(4x4)-25A(4x4)-26A	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	26	15	8865	876.5																	24	23.57	23.55
	CA_25A(4x4)-25A(4x4)-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	40620	2593																	24	23.57	23.47
	CA_25A(4x4)-46C	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50892	5560.2	46	20	51090	5580																	24	23.57	23.53
	CA_25A(4x4)-25A(4x4)-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506	41	20	39948	2525.8													24	23.57	23.49
	CA_25A(4x4)-26A-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	39750	2506	41	20	39948	2525.8													24	23.57	23.44
	CA_25A(4x4)-25A(4x4)-41D(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506	41	20	39948	2525.8													24	23.57	23.47
	CA_25A(4x4)-25A(4x4)-46D	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8								24	23.57	23.43	
	CA_25A(4x4)-41E(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	41	20	39750	2506	41	20	39948	2525.8	41	20	40146	2545.6	41	20	40344	2565.4									24	23.57	23.44
	CA_26A-41C(4x4)	26	15	26865	831.5	1	0	8865	876.5	41	20	39750	2506	41	20	39948	2525.8																	24.5	24.06	23.92
	CA_30A(4x4)-29A-66A(4x4)-66A(4x4)	30	10	27710	2310	1	0	9820	2355	29	10	9715	722.5	66	20	67036	2170	66	20	66786	2145													23	22.72	22.66
	CA_66C(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66734	2139.8	46	20	50665	5537.5																	24	23.60	23.44
	CA_66A(4x4)-46A-46C	66	20	132572	1770	1	0	67036	2170	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540													24	23.60	23.29
	CA_66A(4x4)-66A(4x4)-66A(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66786	2145	66	20	66536	2120	46	20	50665	5537.5													24	23.60	23.41
	CA_46A-46D-66A(4x4)	66	20	132572	1770	1	0	67036	2170	46	20	46892	5160.2	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8											

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Tablet																																				
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active
Total																																				
Intra Band Contiguous	CA_7B(4x4)	7	15	20825	2507.5	1	0	2825	2627.5	7	5	2918	2636.8																				8.5	8.12	8.03	
	CA_38C(4x4)	38	20	37850	2580	1	0	37850	2580	38	20	38048	2599.8																				12	11.99	11.85	
	CA_42E(4x4)	42	20	42140	3455	1	0	42140	3455	42	20	42338	3474.8	42	20	42536	3494.6	42	20	42734	3514.4												8	7.95	7.81	
	CA_48F(4x4)	48	20	56210	3647	1	0	56210	3647	48	20	56012	3627.2	48	20	55814	3607.4	48	20	55616	3587.6	48	20	55418	3567.8									8.5	8.27	8.03
	CA_2A(4x4)-17A	2	20	18900	1880	1	0	900	1960	17	10	5790	740																					11.5	11.01	10.93
	CA_2A(4x4)-4A(4x4)-13A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	13	10	5230	751																	11.5	11.01	10.85
	CA_2A(4x4)-5A-46A	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5																	11.5	11.01	10.92
	CA_2A(4x4)-5A-7A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	7	20	3100	2655																	11.5	11.01	10.90
	CA_2A(4x4)-2A(4x4)-46A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50665	5537.5																	11.5	11.01	10.81
	CA_2A(4x4)-29A-30A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	29	10	9715	722.5	30	10	9820	2355	66	20	66786	2145													11.5	11.01	10.79
	CA_2A(4x4)-4A(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	10	5060	734	30	10	9820	2355													11.5	11.01	10.83
	CA_2A(4x4)-4A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	29	10	9715	722.5	30	10	9820	2355													11.5	11.01	10.86
	CA_2A(4x4)-4A(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2525	881.5	30	10	9820	2355													11.5	11.01	10.92
	CA_2A(4x4)-4A(4x4)-7A(4x4)-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3100	2655	12	10	5060	734													11.5	11.01	10.79
	CA_2A(4x4)-7A(4x4)-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50665	5537.5	66	20	66786	2145													11.5	11.01	10.83
	CA_2A(4x4)-46A-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	66	20	66786	2145													11.5	11.01	10.77
	CA_2A(4x4)-12A-66C(4x4)	2	20	18900	1880	1	0	900	1960	12	10	5095	737.5	66	20	66536	2120	66	20	66734	2139.8													11.5	11.01	10.86
	CA_2A(4x4)-2A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355													11.5	11.01	10.89
	CA_2A(4x4)-2A(4x4)-4A(4x4)-12A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	12	10	5095	737.5													11.5	11.01	10.85
	CA_2A(4x4)-2A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	5	10	2525	881.5													11.5	11.01	10.91
	CA_2A(4x4)-2A(4x4)-4A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	71	20	68761	634.5													11.5	11.01	10.85
	CA_2A(4x4)-2A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66786	2145	71	20	68761	634.5													11.5	11.01	10.77
	CA_2A(4x4)-46A-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	46890	5160	46	20	54340	5905	66	20	66786	2145													11.5	11.01	10.87
	CA_2A(4x4)-4A(4x4)-12A-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5035	731.5	12	5	5155	743.5													11.5	11.01	10.91
	CA_2A(4x4)-4A(4x4)-12B	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5048	732.8	12	10	5120	740													11.5	11.01	10.91
	CA_2A(4x4)-4A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	5	10	2525	881.5													11.5	11.01	10.79
	CA_2A(4x4)-4A(4x4)-4A(4x4)-7C(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3001	2645.1	7	20	3199	2664.9													11.5	11.01	10.88
	CA_2A(4x4)-5A-46C	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50692	5540.2	46	20	50890	5560													11.5	11.01	10.80
	CA_2A(4x4)-66A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66536	2120	66	20	67036	2170	71	20	68761	634.5													11.5	11.01	10.71
	CA_2A(4x4)-66C(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66787	2145.1	66	20	66985	2164.9	71	20	68761	634.5													11.5	11.01	10.79
	CA_2A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	66	20	66536	2120	66	20	67036	2170													11.5	11.01	10.76
	CA_2C(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	12	10	5095	737.5	30	10	9820	2355													11.5	11.01	10.82
	CA_2C(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355													11.5	11.01	10.85
	CA_2C(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2525	881.5	30	10	9820	2355													11.5	11.01	10.73
	CA_2A(4x4)-7A(4x4)-46C	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50692	5540.2	46	20	50890	5560													11.5	11.01	10.73
	CA_2A(4x4)-48A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880																															

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Tablet																																					
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active	
Inter Band	CA_2A(4x4)-5B-66C(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	66787	2145.1	66	20	66985	2164.9									11.5	11.01	10.77	
	CA_2C(4x4)-5B-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2476	876.6	5	10	2575	886.5	30	10	9820	2355									11.5	11.01	10.76	
	CA_2A(4x4)-12B-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	12	5	5048	732.8	12	10	5120	740	66	20	66536	2120	66	20	67036	2170									11.5	11.01	10.83	
	CA_2A(4x4)-7C(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3001	2645.1	7	20	3199	2664.9	66	20	66536	2120	66	20	67036	2170									11.5	11.01	10.92	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	66	20	66536	2120	66	20	67036	2170									11.5	11.01	10.72	
	CA_2A(4x4)-2A(4x4)-46D	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8									11.5	11.01	10.71	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66B(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	10	67187	2185.1	66	10	67286	2195									11.5	11.01	10.68	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66C(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	20	67038	2170.2	66	20	67236	2190									11.5	11.01	10.80	
	CA_2A(4x4)-46C-46C	2	20	18900	1880	1	0	900	1960	46	20	50692	5540.2	46	20	50890	5560	46	20	54142	5885.2	46	20	54340	5905									11.5	11.01	10.74	
	CA_2A(4x4)-48A(4x4)-48D(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8									11.5	11.01	10.74	
	CA_2A(4x4)-48C(4x4)-48C(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8									11.5	11.01	10.69	
	CA_2A(4x4)-46E-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	48	20	55780	3603	66	20	66786	2145	11.5	11.01	10.70	
	CA_2A(4x4)-46D-48C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145	11.5	11.01	10.88	
	CA_2A(4x4)-5A-46E-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145	11.5	11.01	10.69	
	CA_2A(4x4)-5A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	11.5	11.01	10.61	
	CA_2A(4x4)-13A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	11.5	11.01	10.61	
	CA_2A(4x4)-46A-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145					11.5	11.01	10.78	
	CA_2A(4x4)-46C-48C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145					11.5	11.01	10.72	
	CA_2A(4x4)-46D-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55780	3603	66	20	66786	2145					11.5	11.01	10.78	
	CA_2A(4x4)-46C-48E	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	11.5	11.01	10.78	
	CA_2A(4x4)-46E-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	67036	2170	66	20	66786	2145	11.5	11.01	10.72	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46E	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	11.5	11.01	10.71	
	CA_2A(4x4)-13A-46A-46D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8					11.5	11.01	10.78	
	CA_2A(4x4)-13A-46E	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9					11.5	11.01	10.86	
	CA_2A(4x4)-48E(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145					11.5	11.01	10.83	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46D	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50692	5560.2	46	20	51090	5580	46	20	51288	5599.8					11.5	11.01	10.91	
	CA_2A(4x4)-46C-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145	11.5	11.01	10.92	
	CA_4A(4x4)-45A(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55340	3560																						11	10.42	10.35
	CA_4A(4x4)-17A	4	20	20050	1720	1	0	2050	2120	17	10	5790	740																						11	10.42	10.33
	CA_4A(4x4)-46A-46A	4	20	20050	1720	1	0	2050	2120	46	20	46890	5160	46	20	54340	5905																	11	10.42	10.37	
	CA_4A(4x4)-48C(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55891	3615.1	48	20	56089	3634.9																	11	10.42	10.29	
	CA_4A(4x4)-4A(4x4)-13A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	13	10	5230	751																	11	10.42	10.34	
	CA_4A(4x4)-4A(4x4)-7-1A	4	20	20050	1720	1	0	2050																													

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Tablet																																				
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active
	CA_7C(4x4)-46A	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50665	5537.5																8.5	8.23	8.17	
	CA_7A(4x4)-7A(4x4)-66A(4x4)	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	66	20	66786	2145																8.5	8.23	8.12	
	CA_7A(4x4)-40D(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	39051	2340.1	40	20	39249	2359.9	40	20	39447	2379.7												8.5	8.23	8.03	
	CA_7A(4x4)-46D	7	20	20850	2510	1	0	2085	2630	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8												8.5	8.23	8.04	
	CA_7A(4x4)-7A(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	46	20	50692	5540.2	46	20	50890	5560												8.5	8.23	8.11	
	CA_7C(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50692	5540.2	46	20	50890	5560												8.5	8.23	8.13	
	CA_7A(4x4)-40E(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	38853	2320.3	40	20	39051	2340.1	40	20	39249	2359.9	40	20	39447	2379.9								8.5	8.23	8.09	
	CA_7C(4x4)-46D	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8								8.5	8.23	8.14	
	CA_12A-25A(4x4)	12	10	23060	704	1	0	5060	734	25	20	6590	1985																				16.5	16.18	16.11	
	CA_13A-46A-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	66786	2145																16	15.84	15.81	
	CA_13A-46C-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50892	5560.2	46	20	51090	5580	66	20	66786	2145												16	15.84	15.77	
	CA_13A-48A(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	10	66536	2120	66	10	66635	2129.9												16	15.84	15.69	
	CA_13A-48A(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	20	66536	2120	66	20	66734	2139.8												16	15.84	15.67	
	CA_13A-66A(4x4)-66A(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120												16	15.84	15.74	
	CA_13A-48A(4x4)-48C(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	66	20	66786	2145								16	15.84	15.69	
	CA_13A-48C(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	66	10	66536	2120	66	10	66635	2129.9								16	15.84	15.66	
	CA_13A-48C(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	66	20	66536	2120	66	20	66734	2139.8								16	15.84	15.73	
	CA_13A-48D(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8	66	20	66786	2145								16	15.84	15.71	
	CA_13A-48A(4x4)-48D(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8								16	15.84	15.72	
	CA_13A-48C(4x4)-48C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8								16	15.84	15.74	
	CA_13A-46E-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145				16	15.84	15.72	
	CA_13A-48E-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145				16	15.84	15.69	
	CA_25A(4x4)-46A	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50665	5537.5																				11.5	11.50	11.41	
	CA_25A(4x4)-26A-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	40620	2593																11.5	11.50	11.35	
	CA_25A(4x4)-25A(4x4)-26A	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	26	15	8865	876.5																11.5	11.50	11.37	
	CA_25A(4x4)-25A(4x4)-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	40620	2593																11.5	11.50	11.31	
	CA_25A(4x4)-46C	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50892	5560.2	46	20	51090	5580																11.5	11.50	11.28	
	CA_25A(4x4)-25A(4x4)-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506	41	20	39948	2525.8												11.5	11.50	11.38	
	CA_25A(4x4)-26A-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	39750	2506	41	20	39948	2525.8												11.5	11.50	11.37	
	CA_25A(4x4)-25A(4x4)-41D(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506	41	20	39948	2525.8												11.5	11.50	11.34	
	CA_25A(4x4)-25A(4x4)-46D	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8								11.5	11.50	11.42	
	CA_25A(4x4)-41E(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	41	20	39750	2506	41	20	39948	2525.8	41	20	40146	2545.6	41	20	40344	2565.4								11.5	11.50	11.41	
	CA_26A-41C(4x4)	26	15	26865	831.5	1	0	8865	876.5	41	20	39750	2506	41	20	39948	2525.8																16.5	16.47	16.38	
	CA_30A(4x4)-29A-66A(4x4)-66A(4x4)	30	10	27710	2310	1	0	9820	2355	29	10	9715	722.5	66	20	67036	2170	66	20	66786	2145												12	11.99	11.91	
	CA_66C(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66734	2139.8	46	20	50665	5537.5																11	10.80	10.72	
	CA_66A(4x4)-46A-46C	66	20	132572	1770	1	0	67036	2170	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540												11	10.80	10.68	
	CA_66A(4x4)-66A(4x4)-66A(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66786	2145	66	20	66536	2120	46	20	50665	5537.5												11	10.80	10.65	
	CA_46A-46D-66A(4x4)	66	20</																																	

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Laptop																																			
Configure	Combination	PCC							SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)
Intra Band Contiguous	CA_7B(4x4)	7	15	20825	2507.5	1	0	2825	2627.5	7	5	2918	2636.8																			24	23.79	23.75	
	CA_38C(4x4)	38	20	37850	2580	1	0	37850	2580	38	20	38048	2599.8																			24	23.84	23.79	
	CA_42E(4x4)	42	20	42140	3455	1	0	42140	3455	42	20	42338	3474.8	42	20	42536	3494.6	42	20	42734	3514.4											24	23.85	23.81	
	CA_48F(4x4)	48	20	56210	3647	1	0	56210	3647	48	20	56012	3627.2	48	20	55814	3607.4	48	20	55616	3587.6	48	20	55418	3567.8							22	21.90	21.85	
	CA_2A(4x4)-17A	2	20	18900	1880	1	0	900	1960	17	10	5790	740																			24	23.51	23.47	
	CA_2A(4x4)-4A(4x4)-13A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	13	10	5230	751															24	23.51	23.45	
	CA_2A(4x4)-5A-46A	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5															24	23.51	23.43	
	CA_2A(4x4)-5A-7A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	7	20	3100	2655															24	23.51	23.46	
	CA_2A(4x4)-2A(4x4)-46A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50665	5537.5															24	23.51	23.38	
	CA_2A(4x4)-29A-30A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	29	10	9715	722.5	30	10	9820	2355	66	20	66786	2145											24	23.51	23.37	
	CA_2A(4x4)-4A(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	10	5060	734	30	10	9820	2355											24	23.51	23.42	
	CA_2A(4x4)-4A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	29	10	9715	722.5	30	10	9820	2355											24	23.51	23.44	
	CA_2A(4x4)-4A(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2525	881.5	30	10	9820	2355											24	23.51	23.47	
	CA_2A(4x4)-4A(4x4)-7A(4x4)-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3100	2655	12	10	5060	734											24	23.51	23.46	
	CA_2A(4x4)-7A(4x4)-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50665	5537.5	66	20	66786	2145											24	23.51	23.45	
	CA_2A(4x4)-46A-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	66	20	66786	2145											24	23.51	23.44	
	CA_2A(4x4)-12A-66C(4x4)	2	20	18900	1880	1	0	900	1960	12	10	5095	737.5	66	20	66536	2120	66	20	66734	2139.8											24	23.51	23.41	
	CA_2A(4x4)-2A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355											24	23.51	23.38	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-12A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	12	10	5095	737.5											24	23.51	23.37	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	5	10	2525	881.5											24	23.51	23.39	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	71	20	68761	634.5											24	23.51	23.44	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66786	2145	71	20	68761	634.5											24	23.51	23.47	
	CA_2A(4x4)-46A-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	46890	5160	46	20	54340	5905	66	20	66786	2145											24	23.51	23.41	
	CA_2A(4x4)-4A(4x4)-12A-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5035	731.5	12	5	5155	743.5											24	23.51	23.42	
	CA_2A(4x4)-4A(4x4)-12B	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5048	732.8	12	10	5120	740											24	23.51	23.38	
	CA_2A(4x4)-4A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	5	10	2525	881.5											24	23.51	23.35	
	CA_2A(4x4)-4A(4x4)-7C(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3001	2645.1	7	20	3199	2664.9											24	23.51	23.42	
	CA_2A(4x4)-5A-46C	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50692	5540.2	46	20	50890	5560											24	23.51	23.41	
	CA_2A(4x4)-66A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66536	2120	66	20	67036	2170	71	20	68761	634.5											24	23.51	23.44	
	CA_2A(4x4)-66C(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66787	2145.1	66	20	66985	2164.9	71	20	68761	634.5											24	23.51	23.47	
	CA_2A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	66	20	66536	2120	66	20	67036	2170											24	23.51	23.45	
	CA_2A(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	12	10	5095	737.5	30	10	9820	2355											24	23.51	23.41	
	CA_2C(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355											24	23.51	23.43	
	CA_2C(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2525	881.5	30	10	9820	2355											24	23.51	23.47	
	CA_2A(4x4)-7A(4x4)-46C	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50692	5540.2	46	20	50890	5560											24	23.51	23.42	
	CA_2A(4x4)-48A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	66	20	66536	2120	66	20	67036	2170											24	23.51	23.46	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-13A	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	13	10	5230	751											24	23.51	23.38	
	CA_2A(4x4)-2A(4x4)-12A-12A	2	20	18900	1880	1	0	900	1960	2	20	110</																							

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor Off_Laptop																																				
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active
																																			Total	
Inter Band	CA_2A(4x4)-5B-66C(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	66787	2145.1	66	20	66985	2164.9								24	23.51	23.37	
	CA_2C(4x4)-5B-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2476	876.6	5	10	2575	886.5	30	10	9820	2355								24	23.51	23.37	
	CA_2A(4x4)-12B-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	12	5	5048	732.8	12	10	5120	740	66	20	66536	2120	66	20	67036	2170								24	23.51	23.44	
	CA_2A(4x4)-7C(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3001	2645.1	7	20	3199	2664.9	66	20	66536	2120	66	20	67036	2170								24	23.51	23.41	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	66	20	66536	2120	66	20	67036	2170								24	23.51	23.36	
	CA_2A(4x4)-2A(4x4)-46D	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8								24	23.51	23.33	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66B(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	10	67187	2185.1	66	10	67286	2195								24	23.51	23.31	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66C(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	20	67038	2170.2	66	20	67236	2190								24	23.51	23.32	
	CA_2A(4x4)-46C-46C	2	20	18900	1880	1	0	900	1960	46	20	50692	5540.2	46	20	50890	5560	46	20	54142	5885.2	46	20	54340	5905								24	23.51	23.48	
	CA_2A(4x4)-48A(4x4)-48D(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8								24	23.51	23.43	
	CA_2A(4x4)-48C(4x4)-48C(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8								24	23.51	23.39	
	CA_2A(4x4)-46E-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	48	20	55780	3603	66	20	66786	2145	24	23.51	23.33
	CA_2A(4x4)-46D-46C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145	24	23.51	23.33
	CA_2A(4x4)-5A-46E-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145	24	23.51	23.30
	CA_2A(4x4)-5A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	24	23.51	23.28
	CA_2A(4x4)-13A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	24	23.51	23.35
	CA_2A(4x4)-46A-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145				24	23.51	23.28	
	CA_2A(4x4)-46C-48C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145				24	23.51	23.39	
	CA_2A(4x4)-46D-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55780	3603	66	20	66786	2145				24	23.51	23.26	
	CA_2A(4x4)-46C-48E	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	24	23.51	23.35
	CA_2A(4x4)-46E-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	67036	2170	66	20	66786	2145	24	23.51	23.39
	CA_2A(4x4)-7A(4x4)-7A(4x4)-48E	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	24	23.51	23.33
	CA_2A(4x4)-13A-46A-46D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8					24	23.51	23.40
	CA_2A(4x4)-13A-46E	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9					24	23.51	23.41
	CA_2A(4x4)-48E(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145				24	23.51	23.35	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46D	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8					24	23.51	23.30
	CA_2A(4x4)-46C-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145	24	23.51	23.26
	CA_4A(4x4)-48A(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55340	3560																					24	23.35	23.31
	CA_4A(4x4)-17A	4	20	20050	1720	1	0	2050	2120	17	10	5790	740																					24	23.35	23.28
	CA_4A(4x4)-46A-46A	4	20	20050	1720	1	0	2050	2120	46	20	46890	5160	46	20	54340	5905																24	23.35	23.32	
	CA_4A(4x4)-48C(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55891	3615.1	48	20	56089	3634.9																24	23.35	23.25	
	CA_4A(4x4)-4A(4x4)-13A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	13	10	5230	751																24	23.35	23.27	
	CA_4A(4x4)-4A(4x4)-7-1A	4	20	20050	1720	1	0	2050	2120	4	20																									

Downlink Carrier Aggregation Scenarios Conducted Power__P-Sensor Off_Laptop																																				
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active Total
	CA_7C(4x4)-46A	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50665	5537.5																24	23.86	23.83	
	CA_7A(4x4)-7A(4x4)-66A(4x4)	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	66	20	66786	2145																24	23.86	23.77	
	CA_7A(4x4)-40D(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	39051	2340.1	40	20	39249	2359.9		40	20	39447	2379.7											24	23.86	23.82	
	CA_7A(4x4)-46D	7	20	20850	2510	1	0	2085	2630	46	20	50892	5560.2	46	20	51090	5580		46	20	51288	5599.8											24	23.86	23.81	
	CA_7A(4x4)-7A(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	46	20	50692	5540.2		46	20	50890	5560											24	23.86	23.79	
	CA_7C(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50692	5540.2		46	20	50890	5560											24	23.86	23.81	
	CA_7A(4x4)-40E(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	38653	2320.3	40	20	39051	2340.1		40	20	39249	2359.9		40	20	39447	2379.9						24	23.86	23.82	
	CA_7C(4x4)-46D	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50892	5560.2		46	20	51090	5580		46	20	51288	5599.8						24	23.86	23.78	
	CA_12A-25A(4x4)	12	10	23060	704	1	0	5069	734	25	20	6599	1985																				24.5	23.79	23.73	
	CA_13A-46A-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	66786	2145																24.5	23.83	23.77	
	CA_13A-46C-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50892	5560.2	46	20	51090	5580		66	20	66786	2145										24.5	23.83	23.71		
	CA_13A-48A(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	10	66536	2120		66	10	66635	2129.9										24.5	23.83	23.79		
	CA_13A-48A(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	20	66536	2120		66	20	66734	2139.8										24.5	23.83	23.75		
	CA_13A-66A(4x4)-66A(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	66	20	67036	2170	66	20	66786	2145		66	20	66536	2120										24.5	23.83	23.71		
	CA_13A-48A(4x4)-48C(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2		48	20	55990	3625		66	20	66786	2145						24.5	23.83	23.74	
	CA_13A-48C(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8		66	10	66536	2120		66	10	66635	2129.9						24.5	23.83	23.73	
	CA_13A-48C(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8		66	20	66536	2120		66	20	66734	2139.8						24.5	23.83	23.78	
	CA_13A-48D(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55792	3605.2	48	20	55990	3625		48	20	56188	3644.8		66	20	66786	2145						24.5	23.83	23.76	
	CA_13A-48A(4x4)-48D(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2		48	20	55990	3625		48	20	56188	3644.8						24.5	23.83	23.73	
	CA_13A-48C(4x4)-48C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55891	3615.1	48	20	56089	3634.9		48	20	56290	3655		48	20	56488	3674.8						24.5	23.83	23.75	
	CA_13A-46E-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50863	5557.3		46	20	51061	5577.1		46	20	51259	5596.9		66	20	66786	2145	24.5	23.83	23.74	
	CA_13A-48E-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55780	3603	48	20	55968	3622.8		48	20	56166	3642.6		48	20	56364	3662.4		66	20	66786	2145	24.5	23.83	23.77	
	CA_25A(4x4)-46A	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50665	5537.5																				24	23.57	23.52	
	CA_25A(4x4)-26A-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	40620	2593																24	23.57	23.51	
	CA_25A(4x4)-25A(4x4)-26A	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	26	15	8865	876.5																24	23.57	23.55	
	CA_25A(4x4)-25A(4x4)-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	40620	2593																24	23.57	23.47	
	CA_25A(4x4)-46C	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50892	5560.2	46	20	51090	5580																24	23.57	23.53	
	CA_25A(4x4)-25A(4x4)-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506		41	20	39948	2525.8										24	23.57	23.49		
	CA_25A(4x4)-26A-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	39750	2506		41	20	39948	2525.8										24	23.57	23.44		
	CA_25A(4x4)-25A(4x4)-41D(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506		41	20	39948	2525.8										24	23.57	23.47		
	CA_25A(4x4)-25A(4x4)-46D	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	46	20	50892	5560.2		46	20	51090	5580		46	20	51288	5599.8					24	23.57	23.43		
	CA_25A(4x4)-41E(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	41	20	39750	2506	41	20	39948	2525.8		41	20	40146	2545.6		41	20	40344	2565.4					24	23.57	23.44		
	CA_26A-41C(4x4)	26	15	26865	831.5	1	0	8865	876.5	41	20	39750	2506	41	20	39948	2525.8																24.5	24.06	23.92	
	CA_30A(4x4)-29A-66A(4x4)-66A(4x4)	30	10	27710	2310	1	0	9820	2355	29	10	9715	722.5	66	20	67036	2170		66	20	66786	2145										23	22.72	22.68		
	CA_66C(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	67036	2170	66	20	50665	5537.5																24	23.60	23.44	
	CA_66A(4x4)-46A-46C	66	20	132572	1770	1	0	67036	2170	46	20	50665	5537.5	46	20	50492	5520.2		46	20	50690	5540										24	23.60	23.29		
	CA_66A(4x4)-66A(4x4)-66A(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66786	2145	66	20	66536	2120		46	20	50665	5537.5										24	23.60	23.41		
	CA_46A-46D-66A(4x4)	66	20	132572	1770	1	0	67036	2170	46	20	46892	5160.2	46	20																					

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Laptop																																				
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active
Total																																				
Intra Band Contiguous	CA_7B(4x4)	7	15	20825	2507.5	1	0	2825	2627.5	7	5	2918	2636.8																			9.5	9.20	9.11		
	CA_38C(4x4)	38	20	37850	2580	1	0	37850	2580	38	20	38048	2599.8																				13	12.61	12.53	
	CA_42E(4x4)	42	20	42140	3455	1	0	42140	3455	42	20	42338	3474.8	42	20	42536	3494.6	42	20	42734	3514.4												10.5	10.47	10.41	
	CA_48F(4x4)	48	20	56210	3647	1	0	56210	3647	48	20	56012	3627.2	48	20	55814	3607.4	48	20	55616	3587.6	48	20	55418	3567.8								10	9.90	9.85	
	CA_2A(4x4)-17A	2	20	18900	1880	1	0	900	1960	17	10	5790	740																				13	12.54	12.54	
	CA_2A(4x4)-4A(4x4)-13A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	13	10	5230	751																13	12.54	12.51	
	CA_2A(4x4)-5A-46A	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5																13	12.54	12.47	
	CA_2A(4x4)-5A-7A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	7	20	3100	2655																13	12.54	12.49	
	CA_2A(4x4)-2A(4x4)-46A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50665	5537.5																13	12.54	12.38	
	CA_2A(4x4)-29A-30A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	29	10	9715	722.5	30	10	9820	2355	66	20	66786	2145												13	12.54	12.43	
	CA_2A(4x4)-4A(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	10	5060	734	30	10	9820	2355												13	12.54	12.41	
	CA_2A(4x4)-4A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	29	10	9715	722.5	30	10	9820	2355												13	12.54	12.44	
	CA_2A(4x4)-4A(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	5	10	2525	881.5	30	10	9820	2355												13	12.54	12.36	
	CA_2A(4x4)-4A(4x4)-7A(4x4)-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3100	2655	12	10	5060	734												13	12.54	12.39	
	CA_2A(4x4)-7A(4x4)-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50665	5537.5	66	20	66786	2145												13	12.54	12.43	
	CA_2A(4x4)-46A-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	66	20	66786	2145												13	12.54	12.41	
	CA_2A(4x4)-12A-66C(4x4)	2	20	18900	1880	1	0	900	1960	12	10	5095	737.5	66	20	66536	2120	66	20	66734	2139.8												13	12.54	12.35	
	CA_2A(4x4)-2A(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355												13	12.54	12.37	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-12A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	12	10	5095	737.5												13	12.54	12.42	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	5	10	2525	881.5												13	12.54	12.45	
	CA_2A(4x4)-2A(4x4)-4A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	4	20	2175	2132.5	71	20	66761	634.5												13	12.54	12.41	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66786	2145	71	20	66761	634.5												13	12.54	12.37	
	CA_2A(4x4)-46A-46A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	46890	5160	46	20	54340	5905	66	20	66786	2145												13	12.54	12.35	
	CA_2A(4x4)-4A(4x4)-12A-12A	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5035	731.5	12	5	5155	743.5												13	12.54	12.33	
	CA_2A(4x4)-4A(4x4)-12B	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	12	5	5048	732.8	12	10	5120	740												13	12.54	12.47	
	CA_2A(4x4)-4A(4x4)-4A(4x4)-5A	2	20	18900	1880	1	0	900	1960	4	20	2050	2120	4	20	2300	2145	5	10	2525	881.5												13	12.54	12.51	
	CA_2A(4x4)-4A(4x4)-7C(4x4)	2	20	18900	1880	1	0	900	1960	4	20	2175	2132.5	7	20	3001	2645.1	7	20	3199	2664.9												13	12.54	12.37	
	CA_2A(4x4)-5A-46C	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50692	5540.2	46	20	50890	5560												13	12.54	12.41	
	CA_2A(4x4)-66A(4x4)-66A(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66536	2120	66	20	67036	2170	71	20	66761	634.5												13	12.54	12.30	
	CA_2A(4x4)-66C(4x4)-71A	2	20	18900	1880	1	0	900	1960	66	20	66787	2145.1	66	20	66985	2164.9	71	20	66761	634.5												13	12.54	12.36	
	CA_2A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	66	20	66536	2120	66	20	67036	2170												13	12.54	12.32	
	CA_2A(4x4)-12A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	12	10	5095	737.5	30	10	9820	2355												13	12.54	12.44	
	CA_2C(4x4)-29A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	29	10	9715	722.5	30	10	9820	2355												13	12.54	12.28	
	CA_2C(4x4)-5A-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2525	881.5	30	10	9820	2355												13	12.54	12.31	
	CA_2A(4x4)-7A(4x4)-46C	2	20	18900	1880	1	0	900	1960	7	20	3100	2655	46	20	50692	5540.2	46	20	50890	5560												13	12.54	12.42	
	CA_2A(4x4)-48A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	66	20	66536	2120	66	20	67036	2170												13	12.54	12.38	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-13A	2	20	18900	1880	1	0	900</																												

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Laptop																																					
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power			
		LTE Band	BW [Mhz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [Mhz]	DL Channel	DL Freq. [MHz]	Maximum m Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA Active	
Inter Band	CA_2A(4x4)-5B-66C(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2450	874	5	10	2549	883.9	66	20	66787	2145.1	66	20	66985	2164.9									13	12.54	12.35	
	CA_2C(4x4)-5B-30A(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	5	10	2476	876.6	5	10	2575	886.5	30	10	9820	2355									13	12.54	12.35	
	CA_2A(4x4)-12B-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	12	5	5048	732.8	12	10	5120	740	66	20	66536	2120	66	20	67036	2170									13	12.54	12.27	
	CA_2A(4x4)-7C(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	3001	2645.1	7	20	3199	2664.9	66	20	66536	2120	66	20	67036	2170									13	12.54	12.26	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	66	20	66536	2120	66	20	67036	2170									13	12.54	12.37	
	CA_2A(4x4)-2A(4x4)-46D	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8									13	12.54	12.37	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66B(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	10	67187	2185.1	66	10	67286	2195									13	12.54	12.38	
	CA_2A(4x4)-2A(4x4)-66A(4x4)-66C(4x4)	2	20	18900	1880	1	0	900	1960	2	20	1100	1980	66	20	66536	2120	66	20	67038	2170.2	66	20	67236	2190									13	12.54	12.36	
	CA_2A(4x4)-46C-46C	2	20	18900	1880	1	0	900	1960	46	20	50692	5540.2	46	20	50890	5560	46	20	54142	5885.2	46	20	54340	5905									13	12.54	12.16	
	CA_2A(4x4)-48A(4x4)-48D(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8									13	12.54	12.35	
	CA_2A(4x4)-48C(4x4)-48C(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8									13	12.54	12.32	
	CA_2A(4x4)-46E-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	48	20	55780	3603	66	20	66786	2145	13	12.54	12.40	
	CA_2A(4x4)-46D-48C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145	13	12.54	12.27	
	CA_2A(4x4)-5A-46E-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145	13	12.54	12.28	
	CA_2A(4x4)-5A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	5	10	2525	881.5	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	13	12.54	12.33	
	CA_2A(4x4)-13A-46D-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	66	20	67036	2170	66	20	66786	2145	13	12.54	12.28	
	CA_2A(4x4)-46A-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145					13	12.54	12.26	
	CA_2A(4x4)-46C-48C-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55340	3560	48	20	55538	3579.8	66	20	66786	2145					13	12.54	12.35	
	CA_2A(4x4)-46D-48A-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8	48	20	55780	3603	66	20	66786	2145					13	12.54	12.34	
	CA_2A(4x4)-46C-48E	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	13	12.54	12.32	
	CA_2A(4x4)-46E-66A(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	66	20	67036	2170	66	20	66786	2145	13	12.54	12.41	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46E	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9	13	12.54	12.28	
	CA_2A(4x4)-13A-46A-46D	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8					13	12.54	12.37	
	CA_2A(4x4)-13A-46E	2	20	18900	1880	1	0	900	1960	13	10	5230	751	46	20	50665	5537.5	46	20	50863	5557.3	46	20	51061	5577.1	46	20	51259	5596.9					13	12.54	12.31	
	CA_2A(4x4)-48E(4x4)-66A(4x4)	2	20	18900	1880	1	0	900	1960	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145					13	12.54	12.42	
	CA_2A(4x4)-7A(4x4)-7A(4x4)-46D	2	20	18900	1880	1	0	900	1960	7	20	2850	2630	7	20	3350	2680	46	20	50692	5560.2	46	20	51090	5580	46	20	51288	5599.8					13	12.54	12.33	
	CA_2A(4x4)-46C-48D-66A(4x4)	2	20	18900	1880	1	0	900	1960	46	20	50892	5560.2	46	20	51090	5580	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	66	20	66786	2145	13	12.54	12.35	
	CA_4A(4x4)-45A(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55340	3560																						13	12.42	12.30
	CA_4A(4x4)-17A	4	20	20050	1720	1	0	2050	2120	17	10	5790	740																						13	12.42	12.33
	CA_4A(4x4)-46A-46A	4	20	20050	1720	1	0	2050	2120	46	20	46890	5160	46	20	54340	5905																	13	12.42	12.28	
	CA_4A(4x4)-48C(4x4)	4	20	20050	1720	1	0	2050	2120	48	20	55891	3615.1	48	20	56089	3634.9																	13	12.42	12.25	
	CA_4A(4x4)-4A(4x4)-13A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	13	10	5230	751																	13	12.42	12.21	
	CA_4A(4x4)-4A(4x4)-7-1A	4	20	20050	1720	1	0	2050	2120	4	20	2300	2145	71	20	68768																					

Downlink Carrier Aggregation Scenarios Conducted Power_P-Sensor On_Laptop																																				
Configure	Combination	PCC								SCC1				SCC2				SCC3				SCC4				SCC5				SCC6				Measurement Power		
		LTE Band	BW [MHz]	UL Channel	UL Freq. [MHz]	UL RB	UL Offset	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	LTE Band	BW [MHz]	DL Channel	DL Freq. [MHz]	Maximum Tune-up Power	Single Carrier Tx Power without DL-CA Active (dBm)	Tx Power with DL-CA
																																				Active
	CA_7C(4x4)-46A	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50665	5537.5																	9.5	9.20	9.08
	CA_7A(4x4)-7A(4x4)-66A(4x4)	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	66	20	66786	2145																	9.5	9.20	9.03
	CA_7A(4x4)-40D(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	39051	2340.1	40	20	39249	2359.9		40	20	39447	2379.7											9.5	9.20	9.06	
	CA_7A(4x4)-46D	7	20	20850	2510	1	0	2085	2630	46	20	50892	5560.2	46	20	51090	5580		46	20	51288	5599.8											9.5	9.20	9.12	
	CA_7A(4x4)-7A(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3100	2655	46	20	50692	5540.2		46	20	50890	5560											9.5	9.20	9.06	
	CA_7C(4x4)-46C	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50692	5540.2		46	20	50890	5560											9.5	9.20	9.01	
	CA_7A(4x4)-40E(4x4)	7	20	20850	2510	1	0	2085	2630	40	20	38853	2320.3	40	20	39051	2340.1		40	20	39249	2359.9		40	20	39447	2379.9						9.5	9.20	9.08	
	CA_7C(4x4)-46D	7	20	20850	2510	1	0	2085	2630	7	20	3152	2660.2	46	20	50892	5560.2		46	20	51090	5580		46	20	51288	5599.8						9.5	9.20	9.11	
	CA_12A-25A(4x4)	12	10	23060	704	1	0	5060	734	25	20	8590	1985																				18	17.84	17.76	
	CA_13A-46A-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	66	20	66786	2145																17.5	16.94	16.91	
	CA_13A-46C-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50892	5560.2	46	20	51090	5580		66	20	66786	2145										17.5	16.94	16.85		
	CA_13A-48A(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	10	66536	2120	66	10	66635	2129.9												17.5	16.94	16.81	
	CA_13A-48A(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	66	20	66536	2120	66	20	66734	2139.8												17.5	16.94	16.89	
	CA_13A-66A(4x4)-66A(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	66	20	67036	2170	66	20	66786	2145	66	20	66536	2120												17.5	16.94	16.83	
	CA_13A-48A(4x4)-48C(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	66	20	66786	2145								17.5	16.94	16.84	
	CA_13A-48C(4x4)-66B(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	66	10	66536	2120	66	10	66635	2129.9								17.5	16.94	16.77	
	CA_13A-48C(4x4)-66C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55538	3579.8	66	20	66536	2120	66	20	66734	2139.8								17.5	16.94	16.72	
	CA_13A-48D(4x4)-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8	66	20	66786	2145								17.5	16.94	16.73	
	CA_13A-48A(4x4)-48D(4x4)	13	10	23230	782	1	0	5230	751	48	20	55340	3560	48	20	55792	3605.2	48	20	55990	3625	48	20	56188	3644.8								17.5	16.94	16.85	
	CA_13A-48C(4x4)-48C(4x4)	13	10	23230	782	1	0	5230	751	48	20	55891	3615.1	48	20	56089	3634.9	48	20	56290	3655	48	20	56488	3674.8								17.5	16.94	16.81	
	CA_13A-46E-66A(4x4)	13	10	23230	782	1	0	5230	751	46	20	50665	5537.5	46	20	50665	5537.5	46	20	51061	5577.1	46	20	51259	5596.9	66	20	66786	2145				17.5	16.94	16.82	
	CA_13A-48E-66A(4x4)	13	10	23230	782	1	0	5230	751	48	20	55780	3603	48	20	55968	3622.8	48	20	56166	3642.6	48	20	56364	3662.4	66	20	66786	2145				17.5	16.94	16.76	
	CA_25A(4x4)-46A	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50665	5537.5																				13	12.54	12.47	
	CA_25A(4x4)-26A-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	40620	2593																13	12.54	12.43	
	CA_25A(4x4)-25A(4x4)-26A	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	26	15	8865	876.5																13	12.54	12.41	
	CA_25A(4x4)-25A(4x4)-41A(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	40620	2593																13	12.54	12.38	
	CA_25A(4x4)-46C	25	20	26365	1882.5	1	0	8365	1962.5	46	20	50892	5560.2	46	20	51090	5580																13	12.54	12.39	
	CA_25A(4x4)-25A(4x4)-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506	41	20	39948	2525.8												13	12.54	12.35	
	CA_25A(4x4)-26A-41C(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	26	15	8865	876.5	41	20	39750	2506	41	20	39948	2525.8												13	12.54	12.42	
	CA_25A(4x4)-25A(4x4)-41D(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	41	20	39750	2506	41	20	39948	2525.8												13	12.54	12.43	
	CA_25A(4x4)-25A(4x4)-46D	25	20	26365	1882.5	1	0	8365	1962.5	25	20	8140	1940	46	20	50892	5560.2	46	20	51090	5580	46	20	51288	5599.8							13	12.54	12.39		
	CA_25A(4x4)-41E(4x4)	25	20	26365	1882.5	1	0	8365	1962.5	41	20	39750	2506	41	20	39948	2525.8	41	20	40146	2545.6	41	20	40344	2565.4							13	12.54	12.31		
	CA_26A-41C(4x4)	26	15	26865	831.5	1	0	8865	876.5	41	20	39750	2506	41	20	39948	2525.8																18	17.66	17.56	
	CA_30A(4x4)-29A-66A(4x4)-66A(4x4)	30	10	27710	2310	1	0	9820	2355	29	10	9715	722.5	66	20	67036	2170	66	20	66786	2145												13.5	13.37	13.31	
	CA_66C(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66734	2139.8	46	20	50665	5537.5																13.5	13.32	13.28	
	CA_66A(4x4)-46A-46C	66	20	132572	1770	1	0	67036	2170	46	20	50665	5537.5	46	20	50492	5520.2	46	20	50690	5540												13.5	13.32	13.24	
	CA_66A(4x4)-66A(4x4)-66A(4x4)-46A	66	20	132572	1770	1	0	67036	2170	66	20	66786	2145	66	20	66536	2120	46	20	50665	5537.5												13.5	13.32	13.22	
	CA_46A-46D-66A(4x4)	66	20	132572	1770	1	0	67036	2170	46	20	46892	5160.2	46	20	50492	5520.2	46	20	50690	5540	46	20	50888	5559.8								13.5	13.32	13.26	
	CA_66A(4x4)-46C-46C	66	20	132572	1770	1	0	67036	2170	46	20	50692																								

WLAN Conducted Power (Laptop Full)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	20.93
	6	2437	20.98
	11	2462	20.97
	12	2467	19.96
	13	2472	16.97

WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11n HT40	54	5270	18.48
	62	5310	19.96

WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11n HT40	102	5510	20.99
	110	5550	20.94
	118	5590	20.94
	126	5630	20.96
	134	5670	20.97
	142	5710	20.98

WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	155	5775	20.98

WLAN Conducted Power (Laptop Full)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	20.97
	6	2437	20.99
	11	2462	20.94
	12	2467	19.97
	13	2472	16.96

Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	9.03
	39	2441	9.25
	78	2480	9.7
LE	0	2402	7.91
	19	2440	8.12
	39	2480	7.99

WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11n HT40	54	5270	18.47
	62	5310	20.57

WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11n HT40	102	5510	20.98
	110	5550	20.95
	118	5590	20.96
	126	5630	20.92
	134	5670	20.93
	142	5710	20.97

WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	155	5775	20.95

WLAN Conducted Power (Laptop Full)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT20	1	2412	16.89	16.89	19.9
	6	2437	20.3	20.39	23.36
	11	2462	17.385	17.375	20.39
	12	2467	11.82	11.84	14.84
	13	2472	8.8	8.86	11.84
	14	2484	20.96	20.96	23.97

WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT40	54	5270	15.94	15.96	18.96
	62	5310	17.93	18.32	21.14

WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT40	102	5510	18.48	18.46	21.48
	110	5550	18.49	18.47	21.49
	118	5590	20.96	20.92	23.95
	126	5630	20.98	20.93	23.97
	134	5670	19.94	19.96	22.96
	142	5710	19.98	19.92	22.96

WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT40	151	5755	20.99	20.95	23.98
	159	5795	20.95	20.91	23.94

WLAN Conducted Power (Tablet Full)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	17.92
	6	2437	18.0
	11	2462	17.92
	12	2467	17.94
	13	2472	17.99

WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT160	50	5250	14.88

WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	106	5530	13.47
	122	5610	13.44
	138	5690	13.5

WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	155	5775	13.4

WLAN Conducted Power (Tablet Full)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.9
	6	2437	17.99
	11	2462	17.83
	12	2467	17.91
	13	2472	17.88

Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	9.03
	39	2441	9.25
	78	2480	9.7
LE	0	2402	7.91
	19	2440	8.12
	39	2480	7.99

WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT160	50	5250	14.96

WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	106	5530	13.45
	122	5610	13.41
	138	5690	13.48

WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	155	5775	13.48

WLAN Conducted Power (Tablet Full)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT40	3	2422	17.96	17.86	20.92
	6	2437	17.95	17.9	20.94
	9	2452	17.95	17.8	20.89
	10	2457	17.94	17.79	20.88
	11	2462	17.87	17.82	20.86

WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT160	50	5250	14.9	14.99	17.96

WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT80	106	5530	13.5	13.41	16.47
	122	5610	13.4	13.41	16.42
	138	5690	13.48	13.46	16.48

WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT80	155	5775	13.39	13.42	16.42

WLAN Conducted Power (Laptop Reduction)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	12.45
	6	2437	12.48
	11	2462	12.47
	12	2467	12.46
	13	2472	12.47

WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT160	50	5250	9.47

WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	106	5530	9.48
	122	5610	9.45
	138	5690	9.46

WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	155	5775	8.47

WLAN Conducted Power (Laptop Reduction)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	12.48
	6	2437	12.49
	11	2462	12.45
	12	2467	12.43
	13	2472	12.46

WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT160	50	5250	9.49

WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	106	5530	9.49
	122	5610	9.44
	138	5690	9.48

WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	155	5775	8.48

WLAN Conducted Power (Laptop Reduction)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT40	3	2422	12.48	12.47	15.49
	6	2437	12.49	12.49	15.5
	9	2452	12.46	12.48	15.48
	10	2457	12.43	12.46	15.46
	11	2462	12.44	12.47	15.47

WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT160	50	5250	9.48	9.44	12.47

WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT80	106	5530	9.47	9.48	12.49
	122	5610	9.44	9.47	12.47
	138	5690	9.48	9.49	12.5

WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT80	155	5775	8.46	8.47	11.48

WLAN Conducted Power (Tablet Reduction)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	17.43
	6	2437	17.48
	11	2462	17.45
	12	2467	17.47
	13	2472	17.43

WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT160	50	5250	14.49

WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	106	5530	12.96
	122	5610	12.94
	138	5690	12.99

WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ac VHT80	155	5775	12.96

WLAN Conducted Power (Tablet Reduction)			
WLAN 2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	17.4
	6	2437	17.45
	11	2462	17.41
	12	2467	17.42
	13	2472	17.44

WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT160	50	5250	14.46

WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	106	5530	12.96
	122	5610	12.94
	138	5690	12.98

WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ac VHT80	155	5775	12.97

WLAN Conducted Power (Tablet Reduction)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11n HT40	3	2422	17.4	17.45	20.44
	6	2437	17.49	17.46	20.49
	9	2452	17.47	17.43	20.46
	10	2457	17.46	17.48	20.48
	11	2462	17.41	17.43	20.43

WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT160	50	5250	14.46	14.47	17.48

WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT80	106	5530	12.93	12.99	15.97
	122	5610	12.89	12.93	15.92
	138	5690	12.98	12.95	15.98

WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ac VHT80	155	5775	12.98	12.98	15.99

Annex F. SAR Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN was performed on the maximum power mode.
2. SAR testing for LTE / NR was performed on the maximum power mode.
3. The “< 0.001” means there is no SAR value or the SAR is too low to be measured.

Tablet SAR Test Result

System & Position								DUT & Accessory			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
1	WCDMA II	RMC12.2K	Rear Face	0	9400			1	Ant 0	w/	-	1.00	14.50	14.33	1.04	-0.01	0.582	0.61
																		-
2	WCDMA IV	RMC12.2K	Rear Face	0	1513			1	Ant 0	w/	-	1.00	15.50	15.38	1.03	-0.16	0.669	0.69
																		-
3	WCDMA V	RMC12.2K	Rear Face	0	4233			1	Ant 0	w/	-	1.00	20.00	19.71	1.07	-0.06	0.707	0.76
																		-
4	LTE 2	QPSK20M	Rear Face	0	19100	1	0	1	Ant 0	w/	-	1.00	11.50	10.97	1.13	0.15	0.273	0.31
																		-
5	LTE 2	QPSK20M	Left Side	7	18700	1	0	1	Ant 2	w/o	-	1.00	21.00	20.62	1.09	-0.06	0.162	0.18
																		-
6	LTE 4	QPSK20M	Rear Face	0	20050	1	0	1	Ant 0	w/	-	1.00	11.00	10.42	1.14	0.08	0.212	0.24
																		-
7	LTE 5	QPSK10M	Rear Face	0	20600	1	0	1	Ant 0	w/	-	1.00	16.00	15.58	1.10	0.01	0.222	0.24
																		-
8	LTE 7	QPSK20M	Bottom Side	16	20850	1	0	1	Ant 0	w/o	-	1.00	24.00	23.83	1.04	0.01	0.475	0.49
																		-
9	LTE 7	QPSK20M	Left Side	7	21350	1	0	1	Ant 2	w/o	-	1.00	20.50	20.32	1.04	0.02	0.358	0.37
																		-
10	LTE 12	QPSK10M	Rear Face	0	23060	1	0	1	Ant 0	w/	-	1.00	16.50	16.18	1.08	0.05	0.31	0.33
																		-
11	LTE 13	QPSK10M	Rear Face	0	23230	1	0	1	Ant 0	w/	-	1.00	16.00	15.84	1.04	0.01	0.248	0.26
																		-
12	LTE 14	QPSK10M	Rear Face	0	23330	1	0	1	Ant 0	w/	-	1.00	16.50	16.40	1.02	0.02	0.261	0.27
																		-
13	LTE 17	QPSK10M	Rear Face	0	23800	1	0	1	Ant 0	w/	-	1.00	16.00	15.70	1.07	0.08	0.301	0.32
																		-
14	LTE 25	QPSK20M	Rear Face	0	26365	1	0	1	Ant 0	w/	-	1.00	11.50	11.50	1.00	0.03	0.328	0.33
																		-
15	LTE 26	QPSK15M	Rear Face	0	26965	1	0	1	Ant 0	w/	-	1.00	16.50	16.50	1.00	0.03	0.331	0.33
																		-
16	LTE 30	QPSK10M	Rear Face	0	27710	1	0	1	Ant 0	w/	-	1.00	12.00	11.99	1.00	0.07	0.326	0.33
																		-
17	LTE 38	QPSK20M	Bottom Side	16	37850	1	0	1	Ant 0	w/o	-	1.00	24.00	23.84	1.04	-0.13	0.367	0.38
																		-
18	LTE 41	QPSK20M	Bottom Side	16	40185	1	0	1	Ant 0	w/o	-	1.00	24.00	23.90	1.02	0.01	0.537	0.55
																		-
19	LTE 42	QPSK20M	Left Side	0	43340	1	0	1	Ant 2	w/	-	1.00	8.00	7.95	1.01	0.03	0.182	0.18
																		-
20	LTE 48	QPSK20M	Left Side	0	56640	1	0	1	Ant 2	w/	-	1.00	8.50	8.12	1.09	0.12	0.216	0.24
																		-
21	LTE 66	QPSK20M	Rear Face	0	132072	1	0	1	Ant 0	w/	-	1.00	11.00	10.86	1.03	0.02	0.264	0.27
																		-
22	LTE 66	QPSK20M	Left Side	0	132072	1	0	1	Ant 2	w/	-	1.00	14.50	14.32	1.04	0.07	0.207	0.22
																		-
23	5GNR-n2	DFTS-QPSK20M	Rear Face	0	372000	1	1	1	Ant 0	w/	-	1.00	13.50	13.29	1.05	0.09	0.338	0.35
																		-

Tablet SAR Test Result

System & Position								DUT & Accessory			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
24	5GNR-n2	DFTS-QPSK20M	Left Side	0	380000	1	1	1	Ant 2	w/	-	1.00	13.50	13.47	1.01	0.04	0.401	0.41
																		-
25	5GNR-n5	DFTS-QPSK20M	Rear Face	0	167300	1	1	1	Ant 0	w/	-	1.00	15.50	15.47	1.01	-0.08	0.243	0.25
																		-
26	5GNR-n7	DFTS-QPSK20M	Left Side	0	512000	1	1	1	Ant 2	w/	-	1.00	12.00	12.00	1.00	0.11	0.554	0.55
																		-
27	5GNR-n12	DFTS-QPSK15M	Rear Face	0	141300	1	1	1	Ant 0	w/	-	1.00	15.00	14.81	1.04	-0.16	0.2	0.21
																		-
28	5GNR-n41	DFTS-QPSK100M	Left Side	0	518598	1	1	1	Ant 2	w/	-	1.00	12.00	11.96	1.01	0.06	0.517	0.52
29	5GNR-n66	DFTS-QPSK20M	Rear Face	0	354000	1	1	1	Ant 0	w/	-	1.00	13.00	11.90	1.29	0.07	0.311	0.40
30	5GNR-n66	DFTS-QPSK20M	Left Side	0	349000	1	1	1	Ant 2	w/	-	1.00	13.00	12.85	1.04	-0.07	0.364	0.38
	WLAN2.4G	802.11b	Rear Face	0	6			1	Ant 0	w/o	100.00	1.00	18.00	18.00	1.00	0.06	0.363	0.36
	WLAN2.4G	802.11b	Left Side	0	6			1	Ant 0	w/o	100.00	1.00	18.00	18.00	1.00	0.14	0.31	0.31
	WLAN2.4G	802.11b	Right Side	0	6			1	Ant 0	w/o	100.00	1.00	18.00	18.00	1.00	-0.05	0.064	0.06
	WLAN2.4G	802.11b	Top Side	2	6			1	Ant 0	w/o	100.00	1.00	18.00	18.00	1.00	0.06	0.545	0.55
	WLAN2.4G	802.11b	Bottom Side	0	6			1	Ant 0	w/o	100.00	1.00	18.00	18.00	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Rear Face	0	6			1	Ant 1	w/o	100.00	1.00	18.00	17.99	1.00	-0.14	0.291	0.29
	WLAN2.4G	802.11b	Left Side	0	6			1	Ant 1	w/o	100.00	1.00	18.00	17.99	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6			1	Ant 1	w/o	100.00	1.00	18.00	17.99	1.00	-0.1	0.281	0.28
	WLAN2.4G	802.11b	Top Side	2	6			1	Ant 1	w/o	100.00	1.00	18.00	17.99	1.00	0.06	0.658	0.66
	WLAN2.4G	802.11b	Bottom Side	0	6			1	Ant 1	w/o	100.00	1.00	18.00	17.99	1.00	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Rear Face	0	6			1	Ant 0+1	w/o	98.70	1.01	21.00	20.94	1.01	-0.1	0.25	0.26
	WLAN2.4G	802.11n HT40	Left Side	0	6			1	Ant 0+1	w/o	98.70	1.01	21.00	20.94	1.01	0.14	0.456	0.47
	WLAN2.4G	802.11n HT40	Right Side	0	6			1	Ant 0+1	w/o	98.70	1.01	21.00	20.94	1.01	0.06	0.16	0.16
	WLAN2.4G	802.11n HT40	Top Side	2	6			1	Ant 0+1	w/o	98.70	1.01	21.00	20.94	1.01	0.02	0.588	0.60
	WLAN2.4G	802.11n HT40	Bottom Side	0	6			1	Ant 0+1	w/o	98.70	1.01	21.00	20.94	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6			1	Ant 0	w/	100.00	1.00	17.50	17.48	1.00	-0.15	0.905	0.91
	WLAN2.4G	802.11b	Top Side	0	6			1	Ant 1	w/	100.00	1.00	17.50	17.45	1.01	0.06	0.901	0.91
	WLAN2.4G	802.11n HT40	Top Side	0	6			1	Ant 0+1	w/	98.70	1.01	20.50	20.49	1.00	-0.08	0.909	0.92
	WLAN2.4G	802.11b	Top Side	0	1			1	Ant 0	w/	100.00	1.00	17.50	17.43	1.02	-0.1	0.876	0.89
	WLAN2.4G	802.11b	Top Side	0	11			1	Ant 0	w/	100.00	1.00	17.50	17.45	1.01	0.06	0.853	0.86
	WLAN2.4G	802.11b	Top Side	0	12			1	Ant 0	w/	100.00	1.00	17.50	17.47	1.01	0.08	0.841	0.85
	WLAN2.4G	802.11b	Top Side	0	13			1	Ant 0	w/	100.00	1.00	17.50	17.43	1.02	-0.1	0.88	0.90
	WLAN2.4G	802.11b	Top Side	0	1			1	Ant 1	w/	100.00	1.00	17.50	17.40	1.02	0.06	0.837	0.85
	WLAN2.4G	802.11b	Top Side	0	11			1	Ant 1	w/	100.00	1.00	17.50	17.41	1.02	0.08	0.865	0.88
	WLAN2.4G	802.11b	Top Side	0	12			1	Ant 1	w/	100.00	1.00	17.50	17.42	1.02	-0.1	0.815	0.83
	WLAN2.4G	802.11b	Top Side	0	13			1	Ant 1	w/	100.00	1.00	17.50	17.44	1.01	0.05	0.829	0.84
31	WLAN2.4G	802.11n HT40	Top Side	0	3			1	Ant 0+1	w/	98.70	1.01	20.50	20.44	1.01	0.03	1.03	1.05
	WLAN2.4G	802.11n HT40	Top Side	0	9			1	Ant 0+1	w/	98.70	1.01	20.50	20.46	1.01	0.02	0.641	0.65
	WLAN2.4G	802.11n HT40	Top Side	0	10			1	Ant 0+1	w/	98.70	1.01	20.50	20.48	1.00	0.04	0.973	0.98
	WLAN2.4G	802.11n HT40	Top Side	0	11			1	Ant 0+1	w/	98.70	1.01	20.50	20.43	1.02	-0.09	0.482	0.50
	WLAN2.4G	802.11n HT40	Top Side	0	3			2	Ant 0+1	w/	98.70	1.01	20.50	20.44	1.01	-0.01	0.841	0.86
	WLAN2.4G	802.11n HT40	Top Side	0	6			2	Ant 0+1	w/	98.70	1.01	20.50	20.49	1.00	-0.14	0.831	0.84
	WLAN2.4G	802.11n HT40	Top Side	0	9			2	Ant 0+1	w/	98.70	1.01	20.50	20.46	1.01	0.05	0.831	0.85

Tablet SAR Test Result

System & Position								DUT & Accessory			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11n HT40	Top Side	0	10			2	Ant 0+1	w/	98.70	1.01	20.50	20.48	1.00	0.07	0.838	0.85
	WLAN2.4G	802.11n HT40	Top Side	0	11			2	Ant 0+1	w/	98.70	1.01	20.50	20.43	1.02	0.08	0.894	0.92
	WLAN2.4G	802.11n HT40	Top Side	0	3			1	Ant 0+1	w/	98.70	1.01	20.50	20.44	1.01	0.08	0.968	0.99
																		-
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50			1	Ant 0	w/o	98.80	1.01	15.00	14.88	1.03	-0.09	0.192	0.20
	WLAN5.3G	802.11ac VHT160	Left Side	0	50			1	Ant 0	w/o	98.80	1.01	15.00	14.88	1.03	0.02	0.168	0.17
	WLAN5.3G	802.11ac VHT160	Right Side	0	50			1	Ant 0	w/o	98.80	1.01	15.00	14.88	1.03	0.11	0.036	0.04
	WLAN5.3G	802.11ac VHT160	Top Side	2	50			1	Ant 0	w/o	98.80	1.01	15.00	14.88	1.03	-0.19	0.497	0.52
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50			1	Ant 0	w/o	98.80	1.01	15.00	14.88	1.03	-0.13	0.066	0.07
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50			1	Ant 1	w/o	97.50	1.03	15.00	14.96	1.01	-0.11	0.306	0.32
	WLAN5.3G	802.11ac VHT160	Left Side	0	50			1	Ant 1	w/o	97.50	1.03	15.00	14.96	1.01	-0.02	0.082	0.09
	WLAN5.3G	802.11ac VHT160	Right Side	0	50			1	Ant 1	w/o	97.50	1.03	15.00	14.96	1.01	-0.01	0.064	0.07
	WLAN5.3G	802.11ac VHT160	Top Side	2	50			1	Ant 1	w/o	97.50	1.03	15.00	14.96	1.01	-0.1	0.624	0.65
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50			1	Ant 1	w/o	97.50	1.03	15.00	14.96	1.01	-0.03	0.08	0.08
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50			1	Ant 0+1	w/o	97.30	1.03	18.00	17.96	1.01	-0.05	0.359	0.37
	WLAN5.3G	802.11ac VHT160	Left Side	0	50			1	Ant 0+1	w/o	97.30	1.03	18.00	17.96	1.01	-0.1	0.307	0.32
	WLAN5.3G	802.11ac VHT160	Right Side	0	50			1	Ant 0+1	w/o	97.30	1.03	18.00	17.96	1.01	0.08	0.077	0.08
	WLAN5.3G	802.11ac VHT160	Top Side	2	50			1	Ant 0+1	w/o	97.30	1.03	18.00	17.96	1.01	0.18	0.727	0.76
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50			1	Ant 0+1	w/o	97.30	1.03	18.00	17.96	1.01	-0.07	0.071	0.07
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 0	w/	98.80	1.01	14.50	14.49	1.00	0.11	0.596	0.60
32	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 1	w/	97.50	1.03	14.50	14.46	1.01	0.19	0.922	0.96
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 0+1	w/	97.30	1.03	17.50	17.48	1.00	0.01	0.915	0.94
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			2	Ant 1	w/	97.50	1.03	14.50	14.46	1.01	0.04	0.745	0.78
	WLAN5.3G	802.11ac VHT160	Top Side	0	50			1	Ant 1	w/	97.50	1.03	14.50	14.46	1.01	0.12	0.906	0.94
																		-
	WLAN5.6G	802.11ac VHT80	Rear Face	0	138			1	Ant 0	w/o	98.80	1.01	13.50	13.50	1.00	-0.1	0.142	0.14
	WLAN5.6G	802.11ac VHT80	Left Side	0	138			1	Ant 0	w/o	98.80	1.01	13.50	13.50	1.00	0.04	0.056	0.06
	WLAN5.6G	802.11ac VHT80	Right Side	0	138			1	Ant 0	w/o	98.80	1.01	13.50	13.50	1.00	0.06	0.059	0.06
	WLAN5.6G	802.11ac VHT80	Top Side	2	138			1	Ant 0	w/o	98.80	1.01	13.50	13.50	1.00	-0.12	0.282	0.28
	WLAN5.6G	802.11ac VHT80	Bottom Side	0	138			1	Ant 0	w/o	98.80	1.01	13.50	13.50	1.00	-0.08	0.00132	0.00
	WLAN5.6G	802.11ac VHT80	Rear Face	0	138			1	Ant 1	w/o	98.80	1.01	13.50	13.48	1.00	0.15	0.228	0.23
	WLAN5.6G	802.11ac VHT80	Left Side	0	138			1	Ant 1	w/o	98.80	1.01	13.50	13.48	1.00	-0.08	0.028	0.03
	WLAN5.6G	802.11ac VHT80	Right Side	0	138			1	Ant 1	w/o	98.80	1.01	13.50	13.48	1.00	-0.1	0.086	0.09
	WLAN5.6G	802.11ac VHT80	Top Side	2	138			1	Ant 1	w/o	98.80	1.01	13.50	13.48	1.00	0.05	0.726	0.73
	WLAN5.6G	802.11ac VHT80	Bottom Side	0	138			1	Ant 1	w/o	98.80	1.01	13.50	13.48	1.00	0.13	0.105	0.11
	WLAN5.6G	802.11ac VHT80	Rear Face	0	138			1	Ant 0+1	w/o	98.80	1.01	16.50	16.48	1.00	0.05	0.18	0.18
	WLAN5.6G	802.11ac VHT80	Left Side	0	138			1	Ant 0+1	w/o	98.80	1.01	16.50	16.48	1.00	0.04	0.087	0.09
	WLAN5.6G	802.11ac VHT80	Right Side	0	138			1	Ant 0+1	w/o	98.80	1.01	16.50	16.48	1.00	-0.09	0.084	0.08
	WLAN5.6G	802.11ac VHT80	Top Side	2	138			1	Ant 0+1	w/o	98.80	1.01	16.50	16.48	1.00	-0.05	0.748	0.76
	WLAN5.6G	802.11ac VHT80	Bottom Side	0	138			1	Ant 0+1	w/o	98.80	1.01	16.50	16.48	1.00	-0.14	0.086	0.09
	WLAN5.6G	802.11ac VHT80	Top Side	0	138			1	Ant 0	w/	98.80	1.01	13.00	12.99	1.00	0.19	0.423	0.43
	WLAN5.6G	802.11ac VHT80	Top Side	0	138			1	Ant 1	w/	98.80	1.01	13.00	12.98	1.00	0.07	0.861	0.87
	WLAN5.6G	802.11ac VHT80	Top Side	0	138			1	Ant 0+1	w/	98.80	1.01	16.00	15.98	1.00	0.05	0.829	0.84
	WLAN5.6G	802.11ac VHT80	Top Side	0	106			1	Ant 1	w/	98.80	1.01	13.00	12.96	1.01	0.05	0.881	0.98
	WLAN5.6G	802.11ac VHT80	Top Side	0	122			1	Ant 1	w/	98.80	1.01	13.00	12.94	1.01	0.05	0.881	0.98
33	WLAN5.6G	802.11ac VHT80	Top Side	0	106			1	Ant 0+1	w/	98.80	1.01	16.00	15.97	1.01	0.19	1.03	1.05
	WLAN5.6G	802.11ac VHT80	Top Side	0	122			1	Ant 0+1	w/	98.80	1.01	16.00	15.92	1.02	0.05	0.881	0.98

[illegible]

Laptop SAR Test Result

System & Position								DUT & Accessory			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
36	WCDMA II	RMC12.2K	Bottom	0	9400			1	Ant 0	w/	-	1.00	16.50	16.35	1.04	-0.09	0.553	0.58
37	WCDMA IV	RMC12.2K	Bottom	0	1312			1	Ant 0	w/	-	1.00	17.50	17.39	1.03	-0.09	0.562	0.58
38	WCDMA V	RMC12.2K	Bottom	0	4182			1	Ant 0	w/	-	1.00	21.00	20.60	1.10	-0.08	0.523	0.58
39	LTE 2	QPSK20M	Bottom	0	19100	1	0	1	Ant 0	w/	-	1.00	13.00	12.52	1.12	0.01	0.224	0.25
40	LTE 2	QPSK20M	Bottom	0	19100	1	0	1	Ant 2	w/	-	1.00	14.00	13.84	1.04	-0.05	0.237	0.25
41	LTE 4	QPSK20M	Bottom	0	20050	1	0	1	Ant 0	w/	-	1.00	13.00	12.01	1.26	-0.01	0.213	0.27
42	LTE 5	QPSK10M	Bottom	0	20600	1	0	1	Ant 0	w/	-	1.00	17.50	17.27	1.05	-0.05	0.31	0.33
43	LTE 7	QPSK20M	Bottom	0	21100	1	0	1	Ant 0	w/	-	1.00	9.50	9.24	1.06	-0.09	0.351	0.37
44	LTE 7	QPSK20M	Bottom	0	21350	1	0	1	Ant 2	w/	-	1.00	11.50	11.48	1.00	-0.11	0.278	0.28
45	LTE 12	QPSK10M	Bottom	0	23060	1	0	1	Ant 0	w/	-	1.00	18.00	17.84	1.04	-0.09	0.327	0.34
46	LTE 13	QPSK10M	Bottom	0	23230	1	0	1	Ant 0	w/	-	1.00	17.50	16.94	1.14	-0.05	0.252	0.29
47	LTE 14	QPSK10M	Bottom	0	23330	1	0	1	Ant 0	w/	-	1.00	17.50	16.86	1.16	-0.1	0.227	0.26
48	LTE 17	QPSK10M	Bottom	0	23780	1	0	1	Ant 0	w/	-	1.00	18.00	17.54	1.11	-0.08	0.318	0.35
49	LTE 25	QPSK20M	Bottom	0	26590	1	0	1	Ant 0	w/	-	1.00	13.00	12.51	1.12	0.02	0.232	0.26
50	LTE 26	QPSK15M	Bottom	0	26965	1	0	1	Ant 0	w/	-	1.00	18.00	17.57	1.10	-0.06	0.295	0.32
51	LTE 30	QPSK10M	Bottom	0	27710	1	0	1	Ant 0	w/	-	1.00	13.50	13.37	1.03	0.04	0.252	0.26
52	LTE 38	QPSK20M	Bottom	0	37850	1	0	1	Ant 0	w/	-	1.00	13.00	12.61	1.09	-0.08	0.233	0.25
53	LTE 41	QPSK20M	Bottom	0	40185	1	0	1	Ant 0	w/	-	1.00	11.50	11.07	1.10	-0.11	0.232	0.26
54	LTE 42	QPSK20M	Bottom	0	43190	1	0	1	Ant 2	w/	-	1.00	10.50	10.48	1.00	-0.07	0.367	0.37
55	LTE 48	QPSK20M	Bottom	0	55340	1	0	1	Ant 2	w/	-	1.00	10.00	9.51	1.12	-0.11	0.241	0.27
56	LTE 66	QPSK20M	Bottom	0	132322	1	0	1	Ant 0	w/	-	1.00	13.50	13.49	1.00	-0.03	0.294	0.29
57	LTE 66	QPSK20M	Bottom	0	132072	1	0	1	Ant 2	w/	-	1.00	14.00	12.78	1.32	-0.07	0.131	0.17
58	5G NR-n2	DFTS-QPSK20M	Bottom	0	380000	1	1	1	Ant 0	w/	-	1.00	15.50	15.25	1.06	-0.15	0.321	0.34

Laptop SAR Test Result																		
System & Position								DUT & Accessory			SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Ant Status	Power Reduction	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
59	5GNR-n2	DFTS-QPSK20M	Bottom	0	380000	1	1	1	Ant 2	w/	-	1.00	15.50	15.29	1.05	-0.13	0.346	0.36
60	5GNR-n5	DFTS-QPSK20M	Bottom	0	166800	1	1	1	Ant 0	w/	-	1.00	17.50	17.41	1.02	-0.16	0.208	0.21
61	5GNR-n7	DFTS-QPSK20M	Bottom	0	512000	1	1	1	Ant 2	w/	-	1.00	12.00	12.00	1.00	0.03	0.271	0.27
62	5GNR-n12	DFTS-QPSK15M	Bottom	0	141300	1	1	1	Ant 0	w/	-	1.00	16.50	16.27	1.05	-0.15	0.173	0.18
63	5GNR-n41	DFTS-QPSK100M	Bottom	0	528000	1	1	1	Ant 2	w/	-	1.00	10.00	9.91	1.02	-0.03	0.267	0.27
64	5GNR-n66	DFTS-QPSK20M	Bottom	0	354000	1	1	1	Ant 0	w/	-	1.00	12.00	11.91	1.02	0.11	0.181	0.18
65	5GNR-n66	DFTS-QPSK20M	Bottom	0	344000	1	1	1	Ant 2	w/	-	1.00	12.00	11.88	1.03	-0.02	0.148	0.15
66	WLAN2.4G	802.11b	Bottom	0	6			1	Ant 0	w/	100.00	1.00	12.50	12.48	1.00	0.09	0.57	0.57
	WLAN2.4G	802.11b	Bottom	0	6			1	Ant 1	w/	100.00	1.00	12.50	12.49	1.00	-0.01	0.765	0.77
	WLAN2.4G	802.11n HT40	Bottom	0	6			1	Ant 0+1	w/	98.70	1.01	15.50	15.50	1.00	-0.11	0.703	0.71
	WLAN2.4G	802.11b	Bottom	0	1			1	Ant 1	w/	100.00	1.00	12.50	12.48	1.00	0.02	0.452	0.45
	WLAN2.4G	802.11b	Bottom	0	11			1	Ant 1	w/	100.00	1.00	12.50	12.45	1.01	-0.07	0.436	0.44
	WLAN2.4G	802.11b	Bottom	0	12			1	Ant 1	w/	100.00	1.00	12.50	12.43	1.02	-0.06	0.39	0.40
	WLAN2.4G	802.11b	Bottom	0	13			1	Ant 1	w/	100.00	1.00	12.50	12.46	1.01	-0.19	0.376	0.38
	WLAN2.4G	802.11b	Bottom	0	6			2	Ant 1	w/	100.00	1.00	12.50	12.49	1.00	-0.05	0.432	0.43
67	WLAN5.3G	802.11ac VHT160	Bottom	0	50			1	Ant 0	w/	98.80	1.01	9.50	9.47	1.01	0.03	0.412	0.42
	WLAN5.3G	802.11ac VHT160	Bottom	0	50			1	Ant 1	w/	97.50	1.03	9.50	9.49	1.00	0.14	0.264	0.27
	WLAN5.3G	802.11ac VHT160	Bottom	0	50			1	Ant 0+1	w/	97.30	1.03	12.50	12.47	1.01	-0.04	0.38	0.40
	WLAN5.3G	802.11ac VHT160	Bottom	0	50			2	Ant 0	w/	98.80	1.01	9.50	9.47	1.01	0.01	0.269	0.27
	WLAN5.6G	802.11ac VHT80	Bottom	0	106			1	Ant 0	w/	98.80	1.01	9.50	9.48	1.00	0.11	0.39	0.39
	WLAN5.6G	802.11ac VHT80	Bottom	0	106			1	Ant 1	w/	98.80	1.01	9.50	9.49	1.00	0.07	0.3	0.30
68	WLAN5.6G	802.11ac VHT80	Bottom	0	106			1	Ant 0+1	w/	98.80	1.01	12.50	12.49	1.00	-0.02	0.429	0.43
	WLAN5.6G	802.11ac VHT80	Bottom	0	122			1	Ant 0+1	w/	98.80	1.01	12.50	12.47	1.01	-0.17	0.395	0.40
	WLAN5.6G	802.11ac VHT80	Bottom	0	138			1	Ant 0+1	w/	98.80	1.01	12.50	12.50	1.00	-0.17	0.422	0.43
	WLAN5.6G	802.11ac VHT80	Bottom	0	106			2	Ant 0+1	w/	98.80	1.01	12.50	12.49	1.00	0.15	0.354	0.36
	WLAN5.8G	802.11ac VHT80	Bottom	0	155			1	Ant 0	w/	98.80	1.01	8.50	8.47	1.01	0.08	0.674	0.69
	WLAN5.8G	802.11ac VHT80	Bottom	0	155			1	Ant 1	w/	98.80	1.01	8.50	8.48	1.00	-0.06	0.275	0.28
69	WLAN5.8G	802.11ac VHT80	Bottom	0	155			1	Ant 0+1	w/	98.80	1.01	11.50	11.48	1.00	0.09	0.531	0.54
	WLAN5.8G	802.11ac VHT80	Bottom	0	155			2	Ant 0+1	w/	98.80	1.01	11.50	11.48	1.00	0.05	0.662	0.67
	BT	BDR	Bottom	0	78			1	Ant 1	w/o	77.10	1.30	10.50	9.70	1.20	-0.16	0.015	0.02
70	BT	BDR	Bottom	0	0			1	Ant 1	w/o	77.10	1.30	10.50	9.03	1.40	0.05	0.154	0.28
	BT	BDR	Bottom	0	39			1	Ant 1	w/o	77.10	1.30	10.50	9.25	1.33	-0.07	0.066	0.11
	BT	BDR	Bottom	0	0			2	Ant 1	w/o	77.10	1.30	10.50	9.03	1.40	-0.01	0.136	0.25

Annex G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeat SAR							
Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R31	WLAN2.4G	802.11n HT40	Top Side	6	1.03	0.968	1.06
R32	WLAN5.3G	802.11ac VHT160	Top Side	50	0.922	0.906	1.02
R33	WLAN5.6G	802.11ac VHT80	Top Side	106	1.03	0.971	1.06

Annex H. Analysis of Simultaneous Transmission SAR.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
1	WWAN + WLAN 2.4G_Ant0	Yes
2	WWAN + WLAN 2.4G_Ant1	Yes
3	WWAN + WLAN 5G_Ant0	Yes
4	WWAN + WLAN 5G_Ant1	Yes
5	WWAN + BT_Ant1	Yes
6	WWAN + WLAN 2.4G_Ant0 + BT_Ant1	Yes
7	WWAN + WLAN5G_Ant0 + BT_Ant1	Yes
8	WWAN + WLAN 2.4G_Ant0+1	Yes
9	WWAN + WLAN 5G_Ant0+1	Yes
10	WWAN + WLAN 5G_Ant0+1 + BT_Ant1	Yes

Notes

1. The WLAN 2.4G and WLAN 5G cannot transmit simultaneously.
2. The WLAN and Bluetooth cannot transmit simultaneously.
3. Simultaneous TX Combination 1 can be covered by 6
4. Simultaneous TX Combination 3 can be covered by 7
5. Simultaneous TX Combination 5 can be covered by 10
6. Simultaneous TX Combination 9 can be covered by 10

Simultaneous Transmission SAR Evaluation (Tablet Mode)															
Band	Position	A	B	C	D	E	F	G	H	2 (A+C)	4 (A+F)	6 (A+B+H)	7 (A+E+H)	8 (A+D)	10 (A+G+H)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	WLAN 5GHz Ant 0	WLAN 5GHz Ant 1	WLAN 5GHz Ant 0+1	BT Ant 1	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg						
WCDMA II	Rear Face	0.62	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.91	0.94	0.98	0.84	0.88	0.99
	Left Side	0.05	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.05	0.14	0.36	0.22	0.52	0.37
	Right Side	0.06	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.34	0.15	0.12	0.12	0.22	0.14
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.08	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.08	0.19	0.08	0.15	0.08	0.17
WCDMA IV	Rear Face	0.72	0.36	0.29	0.26	0.22	0.32	0.37	0.00	1.01	1.04	1.08	0.94	0.98	1.09
	Left Side	0.07	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.07	0.16	0.38	0.24	0.54	0.39
	Right Side	0.30	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.58	0.39	0.36	0.36	0.46	0.38
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.10	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.10	0.21	0.10	0.17	0.10	0.19
WCDMA V	Rear Face	0.76	0.36	0.29	0.26	0.22	0.32	0.37	0.00	1.05	1.08	1.12	0.98	1.02	1.13
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.36	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.36	0.47	0.36	0.43	0.36	0.45
LTE 2	Rear Face	0.34	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.63	0.66	0.70	0.56	0.60	0.71
	Left Side	0.18	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.18	0.27	0.49	0.35	0.65	0.50
	Right Side	0.09	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.37	0.18	0.15	0.15	0.25	0.17
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.10	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.10	0.21	0.10	0.17	0.10	0.19
LTE 4	Rear Face	0.31	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.60	0.63	0.67	0.53	0.57	0.68
	Left Side	0.07	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.07	0.16	0.38	0.24	0.54	0.39
	Right Side	0.28	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.56	0.37	0.34	0.34	0.44	0.36
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.13	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.13	0.24	0.13	0.20	0.13	0.22
LTE 5	Rear Face	0.30	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.59	0.62	0.66	0.52	0.56	0.67
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.16	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.16	0.27	0.16	0.23	0.16	0.25
LTE 7	Rear Face	0.03	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.32	0.35	0.39	0.25	0.29	0.40
	Left Side	0.39	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.39	0.48	0.70	0.56	0.86	0.71
	Right Side	0.20	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.48	0.29	0.26	0.26	0.36	0.28
	Top Side	0.13	0.91	0.91	1.05	0.71	0.98	1.05	0.18	1.04	1.11	1.22	1.02	1.18	1.36
	Bottom Side	0.54	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.54	0.65	0.54	0.61	0.54	0.63
LTE 12	Rear Face	0.47	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.76	0.79	0.83	0.69	0.73	0.84
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.11	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.39	0.20	0.17	0.17	0.27	0.19
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.25	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.25	0.36	0.25	0.32	0.25	0.34
LTE 13	Rear Face	0.27	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.56	0.59	0.63	0.49	0.53	0.64
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.14	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.14	0.25	0.14	0.21	0.14	0.23
LTE 14	Rear Face	0.28	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.57	0.60	0.64	0.50	0.54	0.65
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
LTE 17	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.16	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.16	0.27	0.16	0.23	0.16	0.25
	Rear Face	0.41	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.70	0.73	0.77	0.63	0.67	0.78
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.14	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.42	0.23	0.20	0.20	0.30	0.22
LTE 25	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.24	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.24	0.35	0.24	0.31	0.24	0.33
	Rear Face	0.34	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.63	0.66	0.70	0.56	0.60	0.71
	Left Side	0.13	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.13	0.22	0.44	0.30	0.60	0.45
	Right Side	0.06	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.34	0.15	0.12	0.12	0.22	0.14
LTE 26	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.06	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.06	0.17	0.06	0.13	0.06	0.15
	Rear Face	0.36	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.65	0.68	0.72	0.58	0.62	0.73
	Left Side	0.00	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.00	0.09	0.31	0.17	0.47	0.32
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
LTE 30	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.19	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.19	0.30	0.19	0.26	0.19	0.28
	Rear Face	0.50	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.79	0.82	0.86	0.72	0.76	0.87
	Left Side	0.30	0												

Simultaneous Transmission SAR Evaluation (Tablet Mode)															
Band	Position	A	B	C	D	E	F	G	H	2 (A+C)	4 (A+F)	6 (A+B+H)	7 (A+E+H)	8 (A+D)	10 (A+G+H)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	WLAN 5GHz Ant 0	WLAN 5GHz Ant 1	WLAN 5GHz Ant 0+1	BT Ant 1	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg						
LTE 42	Rear Face	0.03	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.32	0.35	0.39	0.25	0.29	0.40
	Left Side	0.19	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.19	0.28	0.50	0.36	0.66	0.51
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.00	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.00	0.11	0.00	0.07	0.00	0.09
LTE 48	Rear Face	0.02	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.31	0.34	0.38	0.24	0.28	0.39
	Left Side	0.23	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.23	0.32	0.54	0.40	0.70	0.55
	Right Side	0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28	0.09	0.06	0.06	0.16	0.08
	Top Side	0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91	0.98	1.09	0.89	1.05	1.23
	Bottom Side	0.00	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.00	0.11	0.00	0.07	0.00	0.09
LTE 66	Rear Face	0.32	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.61	0.64	0.68	0.54	0.58	0.69
	Left Side	0.58	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.58	0.67	0.89	0.75	1.05	0.90
	Right Side	0.24	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.52	0.33	0.30	0.30	0.40	0.32
	Top Side	0.22	0.91	0.91	1.05	0.71	0.98	1.05	0.18	1.13	1.20	1.31	1.11	1.27	1.45
	Bottom Side	0.09	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.09	0.20	0.09	0.16	0.09	0.18

Simultaneous Transmission SAR Evaluation (Laptop Mode)															
Band	Position	A	B	C	D	E	F	G	H	2 (A+C)	4 (A+F)	6 (A+B+H)	7 (A+E+H)	8 (A+D)	10 (A+G+H)
		Max WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	WLAN 5GHz Ant 0	WLAN 5GHz Ant 1	WLAN 5GHz Ant 0+1	BT Ant 1	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg						
WCDMA II	Bottom	0.65	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.42	0.95	1.50	1.62	1.36	1.47
WCDMA IV	Bottom	0.65	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.42	0.95	1.50	1.62	1.36	1.47
WCDMA V	Bottom	0.59	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.36	0.89	1.44	1.56	1.30	1.41
LTE 2	Bottom	0.39	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.16	0.69	1.24	1.36	1.10	1.21
LTE 4	Bottom	0.38	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.15	0.68	1.23	1.35	1.09	1.20
LTE 5	Bottom	0.35	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.12	0.65	1.20	1.32	1.06	1.17
LTE 7	Bottom	0.38	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.15	0.68	1.23	1.35	1.09	1.20
LTE 12	Bottom	0.35	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.12	0.65	1.20	1.32	1.06	1.17
LTE 13	Bottom	0.39	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.16	0.69	1.24	1.36	1.10	1.21
LTE 14	Bottom	0.37	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.14	0.67	1.22	1.34	1.08	1.19
LTE 17	Bottom	0.37	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.14	0.67	1.22	1.34	1.08	1.19
LTE 25	Bottom	0.39	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.16	0.69	1.24	1.36	1.10	1.21
LTE 26	Bottom	0.33	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.10	0.63	1.18	1.30	1.04	1.15
LTE 30	Bottom	0.37	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.14	0.67	1.22	1.34	1.08	1.19
LTE 38	Bottom	0.45	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.22	0.75	1.30	1.42	1.16	1.27
LTE41	Bottom	0.36	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.13	0.66	1.21	1.33	1.07	1.18
LTE 42	Bottom	0.54	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.31	0.84	1.39	1.51	1.25	1.36
LTE 48	Bottom	0.38	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.15	0.68	1.23	1.35	1.09	1.20
LTE 66	Bottom	0.38	0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.15	0.68	1.23	1.35	1.09	1.20

Simultaneous Transmission SAR Evaluation ENDC (Tablet Mode)																							
LTE Band	NR Band	Position	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S		
			WWAN0 + NR Ant2 1g SAR W/kg	WWAN2 + NR Ant0 1g SAR W/kg	WLAN 2.4GHz Ant 0 1g SAR W/kg	WLAN 2.4GHz Ant 1 1g SAR W/kg	WLAN 2.4GHz Ant 0+1 1g SAR W/kg	WLAN 5GHz Ant 0 1g SAR W/kg	WLAN 5GHz Ant 1 1g SAR W/kg	WLAN 5GHz Ant 0+1 1g SAR W/kg	BT Ant 1 1g SAR W/kg	2 (A+D) 1g SAR W/kg	2 (B+D) 1g SAR W/kg	4 (A+G) 1g SAR W/kg	4 (B+G) 1g SAR W/kg	6 (A+C+I) 1g SAR W/kg	6 (B+C+I) 1g SAR W/kg	7 (A+F+I) 1g SAR W/kg	7 (B+F+I) 1g SAR W/kg	8 (A+E) 1g SAR W/kg	8 (B+E) 1g SAR W/kg	10 (A+H+I) 1g SAR W/kg	10 (B+H+I) 1g SAR W/kg
LTE 5	SGNR-n2	Rear Face	0.37		0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.66		0.69		0.73		0.59		0.63		0.74	
		Left Side	0.47		0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.47		0.56		0.78		0.64		0.94		0.79	
		Right Side	0.00		0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side	0.00		0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.98		1.09		0.89		1.05		1.23	
		Bottom Side	0.16		0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.16		0.27		0.16		0.23		0.16		0.25	
		Rear Face	0.54		0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.83		0.86		0.90		0.76		0.80		0.91	
LTE 12	SGNR-n2	Left Side	0.47		0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.47		0.56		0.78		0.64		0.94		0.79	
		Right Side	0.11		0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.39		0.20		0.17		0.17		0.27		0.19	
		Top Side	0.00		0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.98		1.09		0.89		1.05		1.23	
		Bottom Side	0.25		0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.25		0.36		0.25		0.32		0.25		0.34	
		Rear Face	0.34		0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.63		0.66		0.70		0.56		0.60		0.71	
		Left Side	0.47		0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.47		0.56		0.78		0.64		0.94		0.79	
LTE 13	SGNR-n2	Right Side	0.00		0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side	0.00		0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.98		1.09		0.89		1.05		1.23	
		Bottom Side	0.14		0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.14		0.25		0.14		0.21		0.14		0.23	
		Rear Face		0.43	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.72		0.72	0.75		0.79	0.65		0.69		0.80	
		Left Side		0.30	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.30		0.39		0.61		0.47		0.77		0.62	
		Right Side		0.06	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.34		0.15		0.12		0.12		0.22		0.14	
LTE 48	SGNR-n2	Top Side		0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.98		1.09		0.89		1.05		1.23	
		Bottom Side		0.07	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.07		0.07		0.18		0.07		0.14		0.16	
		Rear Face		0.28	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.57		0.60		0.64		0.50		0.54		0.65	
		Left Side		0.18	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.18		0.27		0.49		0.35		0.65		0.50	
		Right Side		0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side		0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.91		1.09		0.89		1.05		1.23	
LTE 2	SGNR-n5	Bottom Side		0.13	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.13		0.24		0.13		0.20		0.13		0.22	
		Rear Face		0.28	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.57		0.60		0.64		0.50		0.54		0.65	
		Left Side		0.38	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.38		0.47		0.69		0.55		0.85		0.70	
		Right Side		0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side		0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.91		1.09		0.89		1.05		1.23	
		Bottom Side		0.13	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.13		0.24		0.13		0.20		0.13		0.22	
LTE 7	SGNR-n5	Rear Face		0.28	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.57		0.60		0.64		0.50		0.54		0.65	
		Left Side		0.38	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.38		0.47		0.69		0.55		0.85		0.70	
		Right Side		0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side		0.13	0.91	0.91	1.05	0.71	0.98	1.05	0.18	1.04		1.11		1.22		1.02		1.18		1.36	
		Bottom Side		0.13	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.13		0.24		0.13		0.20		0.13		0.22	
		Rear Face		0.30	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.59		0.62		0.66		0.52		0.56		0.67	
LTE 48	SGNR-n5	Left Side		0.23	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.23		0.32		0.54		0.40		0.70		0.55	
		Right Side		0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side		0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.91		1.09		0.89		1.05		1.23	
		Bottom Side		0.13	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.13		0.24		0.13		0.20		0.13		0.22	
		Rear Face		0.36	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.65		0.68		0.72		0.58		0.62		0.73	
		Left Side		0.58	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.58		0.67		0.89		0.75		1.05		0.90	
LTE 66	SGNR-n5	Right Side		0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
		Top Side		0.22	0.91	0.91	1.05	0.71	0.98	1.05	0.18	1.13		1.20		1.31		1.11		1.27		1.45	
		Bottom Side		0.13	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.13		0.24		0.13		0.20		0.13		0.22	
		Rear Face		0.30		0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.59		0.62		0.66		0.52		0.56		0.67
		Left Side		0.65		0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.65		0.74		0.96		0.82		1.12		0.97
		Right Side		0.00	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.28		0.09		0.06		0.06		0.16		0.08	
LTE 5	SGNR-n7	Top Side		0.20	0.91	0.91	1.05	0.71	0.98	1.05	0.18	1.11		1.18		1.29		1.09		1.25		1.43	
		Bottom Side		0.16	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.16		0.27		0.16		0.23		0.16		0.25	
		Rear Face		0.47	0.36	0.29	0.26	0.22	0.32	0.37	0.00	0.76		0.79		0.83		0.69		0.73		0.84	
		Left Side		0.65	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.65		0.74		0.96		0.82		1.12		0.97	
		Right Side		0.11	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.39		0.20		0.17		0.17		0.27		0.19	
		Top Side		0.20	0.91	0.91	1.05	0.71	0.98	1.05	0.18	1.11		1.18		1.29		1.09		1.25		1.43	
LTE 12	SGNR-n7	Bottom Side		0.25	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.25		0.36		0.25		0.32		0.25		0.34	
		Rear Face			0.32	0.36	0.29	0.26	0.22	0.32	0.37	0.00		0.61	0.64		0.68		0.54	0.58		0.69	
		Left Side		0.18	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.18		0.27		0.49		0.35	0.65		0.50		
		Right Side		0.20	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.48		0.29		0.26		0.26	0.36		0.28		
		Top Side		0.00	0.91	0.91	1.05	0.71	0.98	1.05	0.18	0.91		0.91		1.09		0.89	1.05		1.23		
		Bottom Side		0.15	0.00	0.00	0.00	0.07	0.11	0.09	0.00	0.15		0.26		0.15		0.22	0.15		0.24		
LTE 66	SGNR-n12	Rear Face			0.40	0.36	0.29	0.26	0.22	0.32	0.37	0.00		0.69	0.72		0.76		0.62	0.66		0.77	
		Left Side		0.58	0.31	0.00	0.47	0.17	0.09	0.32	0.00	0.58		0.67		0.89		0.75	1.05		0.90		
		Right Side		0.20	0.06	0.28	0.16	0.06	0.09	0.08	0.00	0.48		0.29									

Simultaneous Transmission SAR Evaluation ENDC (Laptop Mode)																								
LTE Band	NR Band	Position	A	B	C	D	E	F	G	H	I	2 (A+D)	2 (B+D)	4 (A+G)	4 (B+G)	6 (A+C+I)	6 (B+C+I)	7 (A+F+I)	7 (B+F+I)	8 (A+E)	8 (B+E)	10 (A+H+I)	10 (B+H+I)	
			WWAN0	WWAN2	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN	WLAN	BT Ant 1	Summing	Summing	Summing	Summing	Summing	Summing	Summing	Summing	Summing	Summing	Summing
			NR Ant2	+ NR Ant0	2.4GHz Ant 0	2.4GHz Ant 1	2.4GHz Ant 0+1	5GHz Ant 0	5GHz Ant 1	5GHz Ant 0+1	5GHz Ant 0	5GHz Ant 1	5GHz Ant 0+1	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg
LTE 5	SGNR-n2	Bottom	0.72		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.49		1.02		1.57		1.69		1.43		1.54		
LTE 12	SGNR-n2	Bottom	0.72		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.49		1.02		1.57		1.69		1.43		1.54		
LTE 13	SGNR-n2	Bottom	0.76		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.53		1.06		1.61		1.73		1.47		1.58		
LTE 48	SGNR-n2	Bottom		0.77	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.54		1.07		1.62		1.74	1.48			1.59	
LTE 2	SGNR-n5	Bottom		0.60	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.37		0.90		1.45		1.57		1.31		1.42	
LTE 7	SGNR-n5	Bottom		0.62	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.39		0.92		1.47		1.59		1.33		1.44	
LTE 48	SGNR-n5	Bottom		0.65	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.42		0.95		1.50		1.62		1.36		1.47	
LTE 66	SGNR-n5	Bottom		0.50	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.27		0.80		1.35		1.47		1.21		1.32	
LTE 5	SGNR-n7	Bottom	0.74		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.51		1.04		1.59		1.71		1.45		1.56		
LTE 12	SGNR-n7	Bottom	0.74		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.51		1.04		1.59		1.71		1.45		1.56		
LTE 2	SGNR-n12	Bottom		0.52	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.29		0.82		1.37		1.49		1.23		1.34	
LTE 66	SGNR-n12	Bottom		0.42	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.19		0.72		1.27		1.39		1.13		1.24	
LTE 2	SGNR-n41	Bottom	0.68		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.45		0.98		1.53		1.65		1.39		1.50		
LTE 25	SGNR-n41	Bottom	0.68		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.45		0.98		1.53		1.65		1.39		1.50		
LTE 26	SGNR-n41	Bottom	0.62		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.39		0.92		1.47		1.59		1.33		1.44		
LTE 66	SGNR-n41	Bottom	0.67		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.44		0.97		1.52		1.64		1.38		1.49		
LTE 5	SGNR-n66	Bottom	0.50		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.27		0.80		1.35		1.47		1.21		1.32		
LTE 12	SGNR-n66	Bottom	0.50		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.27		0.80		1.35		1.47		1.21		1.32		
LTE 13	SGNR-n66	Bottom	0.54		0.57	0.77	0.71	0.69	0.30	0.54	0.28	1.31		0.84		1.39		1.51		1.25		1.36		
LTE 48	SGNR-n66	Bottom		0.57	0.57	0.77	0.71	0.69	0.30	0.54	0.28		1.34		0.87		1.42		1.54		1.28		1.39	