

Test Report: 2W04841.1

Applicant: Samsung Electro-Mechanics CO, Ltd. 314, Maetan-3 Dong, Paldal-Gu, Suwon,

Kyungki-Do

Korea

Equipment Under Test: SDR4000M

(EUT) 27MHz Low Power Wireless Mouse

FCC ID:

In Accordance With: FCC 47 CFR Part 15, Subpart C: 2000

Tested By: Nemko Canada Inc.

303 River Road, R.R. 5 Ottawa, Ontario K1V 1H2

Authorized By:

John Harrington, RF Group Manager

John Harringt

Date: 12 April 2002

Total Number of Pages: 11

EQUIPMENT: SDR4000M

Table Of Contents

Section 1.	Summary Of Test Results	3
	General Equipment Specification	
	Radiated Emissions	
	Block Diagrams	
Section 5.	Test Equipment List	.11

EQUIPMENT: SDR4000M

Section 1. Summary Of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart C for low power devices. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated Emissions were made on an open area test site. A description of the test facility in on file with the FCC.

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. See "Summary of Test Data".

TESTED BY: Glen Westwell, Wireless Technologist DATE: 10 April 2002

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation. The results apply only to the samples tested.

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

Nemko Canada Inc.

FCC PART 15, SUBPART C PROJECT NO.:2W04841.1

EQUIPMENT: SDR4000M

Summary Of Test Data

Name Of Test	Para. No.	Result
Powerline Conducted Emissions	15.207	N/A
Radiated Emissions (Fundimental)	15.227	Complies
Radiated Emissions (Spurious)	15.209	Complies

Footnotes For N/A's:

Test Conditions:

Indoor Temperature: 22°C

Humidity: 44%

Outdoor Temperature: 9°C

Humidity: 46%

Page 4 of 11

Nemko Canada Inc.

FCC PART 15, SUBPART C PROJECT NO.:2W04841.1

EQUIPMENT:SDR4000M

Section 2. General Equipment Specification

Manufacturer: Samsung Electro-Mechanics CO, Ltd.

Model No.: SDR4000M

Serial No.: None

Date Received In Laboratory: 8 April 2002

Nemko Identification No.: #7


Transmit Frequency: 27.045MHz

Modulation: FSK

Rated Output Power: -6dBm (.251mW)

Input Power Source: 3Vdc

Emission Designator: 19K0F1D

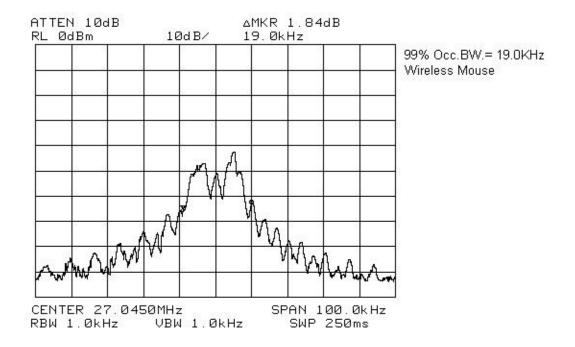

FCC PART 15, SUBPART C PROJECT NO.:2W04841.1

EQUIPMENT:SDR4000M

Section 3. Radiated Emissions

Para. No.: 15.209 15.227

Test Performed By: Glen Westwell Date of Test: 9April 2002

Minimum Standard: 15.227, 80dBuV/M at 3m.

Minimum Standard: 15.209,

Fundamental (MHz)	Field Strength (µV/m)	Field Strength (dBµV)		
0.009 - 0.490	2400/F(kHz) @ 300m	_		
0.490 - 1.705	24000/F(kHz) @ 30m	_		
1.705 - 30	30 @ 30m	_		
30 - 88	100	40.0		
88 - 216	150	43.5		
216 - 960	200	46.0		
Above 960	500	54.0		

Test Results: Complies.

Measurement Data: See attached table.

Page 7 of 11

Test Data - Radiated Emissions

Test Distance (meters): 3		Range:		Receiver: EVSP		RBW(kHz): 120		Detector: Q-Peak	
Freq. (MHz)	Ant.	Pol. (V/H)	RCVD Signal (dBµV/m)	Ant. Factor (dB)**	Amp. Gain (dB)***	Dist. Corr. (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
27.045	BC1	V	44.5	14			58.5	80.0	21.5
27.045	BC1	Н	34.3	14			48.3	80.0	31.7
54.09	BC1	V	24.5	10.9			35.4	40.0	4.6
54.09	BC1	Н	26.0	10.9			36.9	40.0	3.1

Notes:

B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole

* Re-measured using dipole antenna.

** Includes cable loss when amplifier is not used.

*** Includes cable loss.

() Denotes failing emission level.


N.D. = Not Detected

All emissions were searched up to the 10th harmonic.




Section 4. Block Diagrams

Radiated Prescan

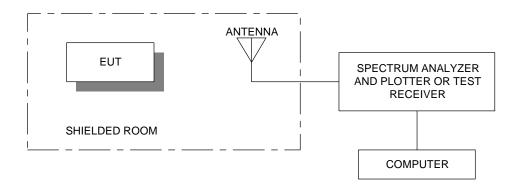

Test Site For Radiated Emissions

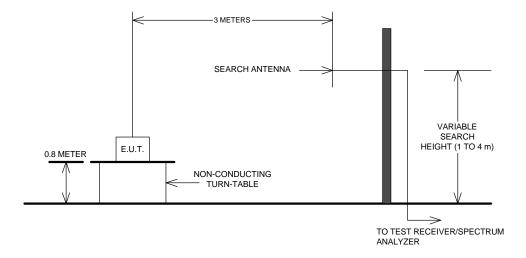

EQUIPMENT:SDR4000M

Section 5. Test Equipment List

CAL	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
CYCLE						
1 Year	Spectrum Analyzer-1	Hewlett Packard	8566B	2311A02238	27 Nov 2001	27 Nov 2002
1 Year	Spectrum Analyzer	Hewlett Packard	8566B	2314A04759	27 Nov 2001	27 Nov 2002
	Display-1					
1 Year	Quasi-peak adapter-1	Hewlett-Packard	85650A	2043A00302	27 Nov 2001	27 Nov 2002
1 Year	Receiver	Rohde & Schwarz	ESVP	892661/014	19 Sep 2001	19 Sep 2002
1 Year	Biconical 2	EMCO	3109	2708	Aug. 28/01	Aug. 28/02

Page 11 of 11