

APPLICATION FOR FCC CERTIFICATION

CLASS B DIGITAL DEVICE

Samsung Electro-Mechanics
314, Maetan-3Dong, Paldal-Gu, Suwon,
Kyunggi-Do, Korea, 442-743
+82-331-210-6662

Model: PCI Board SWL-2000P

FCC ID: E2XSWL-2000P

August 4, 1999

This report concerns (check one):	Original Grant: <input checked="" type="checkbox"/>	Class II Change:
Equipment Type: PCI Board		
Deferred grant requested per 47 CFR 0.457 (d) (1) (ii)?	Yes: <input type="checkbox"/>	No: <input checked="" type="checkbox"/>
If yes, defer until: _____ <i>Date</i>		
Company name agrees to notify the Commission by: _____ (date) of the intended date of announcement of the product so that the grant can be issued on that date.		
Transition Rules Request per 15.37? Yes: <input checked="" type="checkbox"/> No: <input type="checkbox"/> If no, assumed Part 15, subpart B for unintentional radiators - the new 47 CFR [10-1-90 Edition] provision..		

REPORT PREPARED BY:

EMI Technician: **Daniel W. Baltzell**
Administrative Writer: **Melissa Fleming**

Rhein Tech Laboratories, Inc.

Document Number: 990363

No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.

TABLE OF CONTENTS

1.0	GENERAL INFORMATION.....	1
1.1	PRODUCT DESCRIPTION	1
1.2	RELATED SUBMITTAL(S)/GRANT(S).....	2
1.3	TEST SYSTEM DETAILS	2
1.4	CONFIGURATION OF TESTED SYSTEM	3
1.5	TEST METHODOLOGY	4
1.6	TEST FACILITY	4
2.0	PRODUCT LABELING.....	ERROR! BOOKMARK NOT DEFINED.
3.0	SYSTEM TEST CONFIGURATION	5
3.1	JUSTIFICATION.....	5
3.2	EUT EXERCISE SOFTWARE	5
3.3	SPECIAL ACCESSORIES.....	5
3.4	CONFORMANCE STATEMENT	6
4.0	BLOCK DIAGRAM/SCHEMATICS OF PCI BOARD SWL-2000P	ERROR! BOOKMARK NOT DEFINED.
5.0	CONDUCTED, FIELD STRENGTH CALCULATION, & RADIATED TEST METHODOLOGY	7
5.1	FIELD STRENGTH CALCULATION	7
5.2	RADIATED MEASUREMENT	8
6.0	CONDUCTED EMISSION DATA.....	9
6.1	CONDUCTED MEASUREMENT PHOTOS WITH PATCH ANTENNA.....	ERROR! BOOKMARK NOT DEFINED.
6.2	CONDUCTED MEASUREMENT PHOTOS WITH STUB ANTENNA.....	ERROR! BOOKMARK NOT DEFINED.
7.0	RADIATED EMISSION DATA.....	11
7.1	RADIATED MEASUREMENT PHOTOS WITH PATCH ANTENNA	ERROR! BOOKMARK NOT DEFINED.
7.2	RADIATED MEASUREMENT PHOTOS WITH STUB ANTENNA	ERROR! BOOKMARK NOT DEFINED.
8.0	PHOTOS OF TESTED EUT	ERROR! BOOKMARK NOT DEFINED.

APPENDIX LISTING

APPENDIX A: EMISSIONS EQUIPMENT LIST.....	13
APPENDIX B: USER'S MANUAL	14

FIGURE INDEX

FIGURE 1: FCC LABEL	ERROR! BOOKMARK NOT DEFINED.
FIGURE 2: LOCATION OF LABEL ON EUT	ERROR! BOOKMARK NOT DEFINED.
FIGURE 3: PCI BOARD COMPONENT SIDE	ERROR! BOOKMARK NOT DEFINED.
FIGURE 4: PCI BOARD SOLDER SIDE	ERROR! BOOKMARK NOT DEFINED.
FIGURE 5: PATCH ANTENNA FRONT SIDE	ERROR! BOOKMARK NOT DEFINED.
FIGURE 6: PATCH ANTENNA COMPONENT SIDE	ERROR! BOOKMARK NOT DEFINED.
FIGURE 7: PATCH ANTENNA SOLDER SIDE	ERROR! BOOKMARK NOT DEFINED.
FIGURE 8: STUB ANTENNA	ERROR! BOOKMARK NOT DEFINED.

TABLE INDEX

TABLE 1: CONDUCTED EMISSIONS (CHANNEL 6 WITH THE STUB ANTENNA)	9
TABLE 2: CONDUCTED EMISSIONS (CHANNEL 6 WITH THE PATCH ANTENNA)	10
TABLE 3: RADIATED EMISSIONS (CHANNEL 6 WITH THE STUB ANTENNA)	11
TABLE 4: RADIATED EMISSIONS (CHANNEL 6 WITH THE PATCH ANTENNA)	12

1.0 GENERAL INFORMATION

The following Application for FCC Certification for a Direct Sequence Spread Spectrum Transmitter as a Digital Device is prepared on behalf of Samsung Electro-Mechanics in accordance with Part 15.247 of the Federal Communications Commissions rules and regulations. The Equipment Under Test (EUT) was the Samsung Electro-Mechanics PCI Board SWL-2000P, FCC ID: E2XSWL-2000P. The test results reported in this document relate only to the item that was tested.

All measurements contained in this Application were conducted in accordance with ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Some accessories are used to increase sensitivity and prevent overloading of the measuring instrument. These are explained in the appendix of this report. Calibration checks are performed regularly on the instruments, and all accessories including the high pass filter, preamplifier and cables.

All radiated and conducted emissions measurement were performed manually at Rhein Tech, Incorporated. The radiated emissions measurements required by the rules were performed on the three meter, open field, test range maintained by Rhein Tech Laboratories, Inc., 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. Complete description and site attenuation measurement data have been placed on file with the Federal Communications Commission. The power line conducted emission measurements were performed in a shielded enclosure also located at the Herndon, Virginia facility. Rhein Tech, Labs, Inc. is on the FCC accepted lab list as a Facility available to do measurement work for others on a contract basis.

1.1 PRODUCT DESCRIPTION

The model SWL-2000P (referred to as the EUT in this report) is a Direct Sequence Spread Spectrum wireless LAN, PCI network card. The EUT provides wireless communications between computers. The EUT is designed to be plugged into an ISA slot in a desktop computer. The EUT communicates with other wireless LAN cards using the frequency range from 2.411 GHz to 2.462 GHz. The EUT is powered from the desktop computer, and does not have an external power supply. The EUT uses a patch antenna attached to a left-turn SMA connector. This patch antenna has a 1.2 meter shielded coaxial cable.

1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application for certification as a digital interface device. The transmitter portion has been uploaded to the FCC under the same FCC ID: E2XSWL-2000P.

1.3 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:


External Components

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
PCI WIRELESS LAN	SAMSUNG	11M PCI WLAN	11	E2XSWL-2000P	UNSHIELDED I/O	N/A
ANTENNA	SAMSUNG	STUB	N/A	SAMPLE	N/A	N/A
ANTENNA	SAMSUNG	PATCH	N/A	SAMPLE	N/A	N/A
TERMINATION	GATEWAY 2000, INC.	USB HIGH/LOW SPEED	N/A	N/A	SHIELDED I/O	006835
AUDIO DEVICE	RADIO SHACK	SCP-63	N/A	N/A	SHIELDED I/O	900699
MICROPHONE	GATEWAY 2000, INC.	MODEM SPEAKERPHONE	N/A	N/A	SHIELDED I/O	010154
SPEAKER	CAMBRIDGE SOUNDWORKS	HUTTON	SBS52	N/A	UNSHIELDED I/O UNSHIELDED POWER	010840
SPEAKER	CAMBRIDGE	SBS52	SW00528412037019	N/A	UNSHIELDED I/O	010683
JOYSTICK	MICROSOFT	SIDEWINDER 3D PRO PLUS	97462-579-0680340-0000	C3KJ3	SHIELDED I/O	009577
MODEM	US ROBOTICS	0413	8390364645141	DoC	SHIELDED I/O UNSHIELDED POWER	900421
MOUSE	PRIMAX	MOSXK	3872B328	SAMPLE	SHIELDED I/O	010441
KEYBOARD	MAXI SWITCH	2196003-XX-XX	03110044	D7J2196003-XX	SHIELDED I/O	006324
PRINTER	HEWLETT PACKARD	C3990A	JPHG006828	DoC	SHIELDED I/O SHIELDED POWER	009905
MONITOR	LG ELECTRONICS	500-069EV (EV500)	15009A662026	BEJCS592	SHIELDED, FERRITE BOTH ENDS I/O UNSHIELDED POWER	009657
SYSTEM	DELL	8BKWW	STB B/C 12326	NA		007038

Internal Components

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
CPU	INTEL	PENTIUM 200MHZ	FV80503200	N/A	N/A	007048
MOTHERBOARD	DELL	00058220-12461-6VC-001S	AA-666244-700	N/A	INTERNAL I/O INTERNAL POWER	007047
VIDEO CARD	STB	S3 VIRGE/GX	210-0262-001	CE	SHIELDED I/O	008223
CD-ROM DRIVE	MITSUMI	CRMC-FX120T	DQF203131	EW4CRMC-FX120T	INTERNAL I/O INTERNAL POWER	007040
POWER SUPPLY	DELL	PS-5201-10	F6260982	N/A	SHIELDED POWER	007039
HARD DRIVE	WESTERN DIGITAL	AC12100-00LC	WM3801254814	N/A	INTERNAL I/O INTERNAL POWER	009743
FLOPPY DRIVE	SONY	MPF920-F	10406524	N/A	INTERNAL I/O INTERNAL POWER	007041

1.4 CONFIGURATION OF TESTED SYSTEM

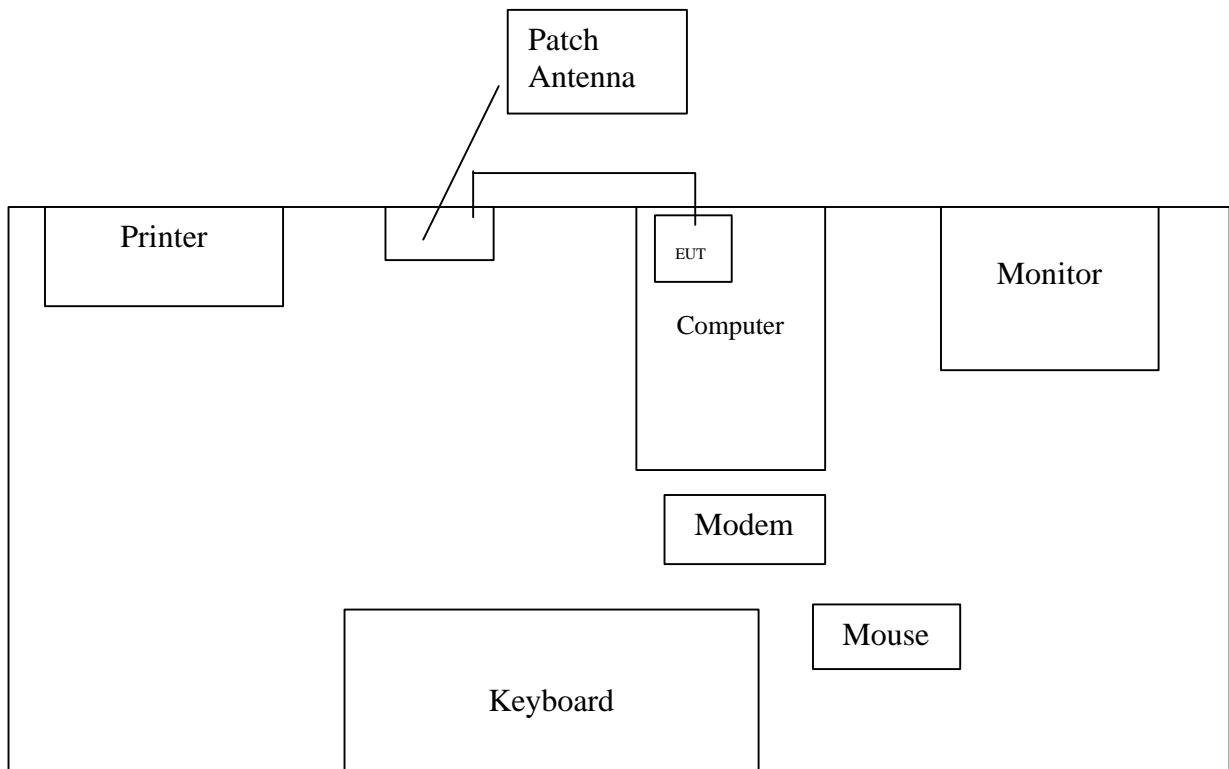

1.5 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 1992. Radiated testing was performed at an antenna to EUT distance of 3 meters. Emissions above 1 GHz were video averaged.

1.6 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

3.0 SYSTEM TEST CONFIGURATION

3.1 JUSTIFICATION

The EUT was tested in all three orthogonal planes in order to determine worst case emission. Channel 6 at 2.437GHz was tested and investigated from 30 MHz to 1 GHz. Data for channel 6 is presented in this report.

To complete the configuration required by the FCC, the transmitter was tested in a mini-tower computer with the patch antenna connected to the antenna port similar to its intended use.

The transmitter antenna connector is a unique reverse-thread and is non-interchangeable.

3.2 EUT EXERCISE SOFTWARE

The EUT was enabled to continuously transmit, which was verified by a receiving unit during testing. The carrier was also checked to verify that the information was being transmitted.

3.3 SPECIAL ACCESSORIES

N/A.


3.4 CONFORMANCE STATEMENT

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made during testing to the equipment in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the ANSI C63.4 test methodology.


Typed/Printed Name: Desmond A. Fraser

Signature



Date: August 4, 1999

Position: President, (NVLAP Signatory)



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 20061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

5.0 Conducted Field Strength Calculation, & Radiated Test Methodology

5.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FI(\text{dBuV/m}) = SAR(\text{dBuV}) + SCF(\text{dB/m})$$

FI = Field Intensity

SAR = Spectrum Analyzer Reading

SCF = Site Correction Factor

The Site Correction Factor (SCF) used in the above equation is determined empirically, and is expressed in the following equation:

$$SCF(\text{dB/m}) = - PG(\text{dB}) + AF(\text{dB/m}) + CL(\text{dB})$$

SCF = Site Correction Factor

PG = Pre-amplifier Gain

AF = Antenna Factor

CL = Cable Loss

The field intensity in microvolts per meter can then be determined according to the following equation:

$$FI(\text{uV/m}) = 10^{FI(\text{dBuV/m})/20}$$

For example, assume a signal at a frequency of 125 MHz has a received level measured as 49.3 dBuV. The total Site Correction Factor (antenna factor plus cable loss minus preamplifier gain) for 125 MHz is -11.5 dB/m. The actual radiated field strength is calculated as follows:

$$49.3 \text{ dBuV} - 11.5 \text{ dB/m} = 37.8 \text{ dBuV/m}$$

$$10^{37.8/20} = 10^{1.89} = 77.6 \text{ uV/m}$$

5.2 Radiated measurement

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one meter and three meter distances if necessary in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to insure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three-meter, open-field test site. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to 10GHz MHz (10th harmonic of carrier frequency) using a Hewlett Packard 8566B spectrum analyzer, a Hewlett Packard 85650A quasi-peak adapter, HP11790 mixers, and EMCO log periodic, EMCO horn antennas and biconical antenna. In order to gain sensitivity, a cougar preamplifier (from 30 to 2GHZ), and an HP preamplifier (from 1GHz to 26.5 GHz) was connected in series between the antenna and the input of the spectrum analyzer.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations. The spectrum analyzer's 6 dB resolution bandwidth was set to 120 kHz for measurements below 1GHz, and 1MHz for measurements above 1GHz. The analyzer was operated in peak detection mode below 1GHz and in the peak mode with 10Hz video averaging above 1 GHz. No video filter less than 10 times the resolution bandwidth was used when measuring below 1GHz. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Note: Rhein Tech Laboratories, Inc. has implemented procedures to minimize errors that occur from test instruments, calibration, procedures, and test setups. Test instrument and calibration errors are documented from the manufacturer or calibration lab. Other errors have been defined and calculated within the Rhein Tech quality manual, section 6.1. Rhein Tech implements the following procedures to minimize errors that may occur: yearly as daily calibration methods, technician training, and emphasis to employees on avoiding error.

6.0 CONDUCTED EMISSION DATA

The following table lists worst case conducted emission data. Specifically: Emission Frequency, Test Detector, Analyzer Reading, Site Correction Factor, corrected Emission Level, Quasi Peak Limit and Margin, and the Average Limit and Margin.

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. If the conducted emissions exceed the limit with the instrument set to the quasi-peak mode, then measurements are made in the average mode.

The conducted test was performed with the EUT exercise program loaded, and the emissions were scanned between 150 kHz to 30 MHz on the NEUTRAL SIDE and HOT SIDE, herein referred to as L1 and L2, respectively.

TABLE 1: CONDUCTED EMISSIONS (CHANNEL 6 WITH THE STUB ANTENNA)

NEUTRAL SIDE (Line 1)

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)
0.523	Pk	29.8	0.5	30.3	48.0	-17.7
7.995	Pk	32.1	1.9	34.0	48.0	-14.0
8.133	Pk	32.3	1.9	34.2	48.0	-13.8
8.197	Pk	32.4	1.9	34.3	48.0	-13.7
16.728	Pk	29.9	3.1	33.0	48.0	-15.0
25.092	Pk	33.7	3.2	36.9	48.0	-11.1

HOT SIDE (Line 2)

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)
0.527	Pk	29.5	0.5	30.0	48.0	-18.0
7.997	Pk	35.6	2.0	37.6	48.0	-10.4
8.131	Pk	35.4	2.0	37.4	48.0	-10.6
8.197	Pk	35.5	2.0	37.5	48.0	-10.5
16.728	Pk	31.3	3.0	34.3	48.0	-13.7
25.094	Pk	33.1	3.0	36.1	48.0	-11.9

⁽¹⁾Pk = Peak; QP = Quasi-Peak; Av = Average

TEST PERSONNEL:

Typed/Printed Name: Daniel W. Baltzell

Date: July 31, 1999

Signature:



TABLE 2: CONDUCTED EMISSIONS (CHANNEL 6 WITH THE PATCH ANTENNA)**NEUTRAL SIDE (Line 1)**

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)
0.539	Pk	30.4	0.5	30.9	48.0	-17.1
8.130	Pk	32.8	1.9	34.7	48.0	-13.3
8.200	Pk	31.7	1.9	33.6	48.0	-14.4
8.334	Pk	32.1	1.9	34.0	48.0	-14.0
16.725	Pk	29.3	3.1	32.4	48.0	-15.6
25.081	Pk	32.9	3.2	36.1	48.0	-11.9

HOT SIDE (Line 2)

Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)
0.537	Pk	29.7	0.5	30.2	48.0	-17.8
7.924	Pk	35.2	2.0	37.2	48.0	-10.8
7.996	Pk	34.8	2.0	36.8	48.0	-11.2
8.132	Pk	35.2	2.0	37.2	48.0	-10.8
16.727	Pk	30.2	3.0	33.2	48.0	-14.8
25.091	Pk	32.6	3.0	35.6	48.0	-12.4

⁽¹⁾**Pk** = Peak; **QP** = Quasi-Peak; **Av** = Average

TEST PERSONNEL:

Typed/Printed Name: Daniel W. Baltzell

Date: July 31, 1999

Signature:



7.0 RADIATED EMISSION DATA

The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, plus the limit. Explanation of the Correction Factor is given in paragraph 6.3.

TABLE 3: RADIATED EMISSIONS (CHANNEL 6 WITH THE STUB ANTENNA)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
132.000	Qp	V	95	1.0	44.1	-18.2	25.9	43.5	-17.6
220.000	Qp	V	100	1.0	43.0	-17.8	25.2	46.0	-20.8
308.000	Qp	H	340	1.0	41.2	-13.9	27.3	46.0	-18.7
484.000	Qp	H	125	1.8	52.5	-8.3	44.2	46.0	-1.8
572.000	Qp	H	220	1.4	43.0	-6.4	36.6	46.0	-9.4
836.000	Qp	H	130	1.0	44.1	-4.1	40.0	46.0	-6.0
924.000	Qp	H	130	1.0	36.1	-3.5	32.6	46.0	-13.4

TEST PERSONNEL:

Typed/Printed Name: Daniel W. Baltzell

Date: July 31, 1999

Signature:



TABLE 4: RADIATED EMISSIONS (CHANNEL 6 WITH THE PATCH ANTENNA)

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV/m)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
44.000	Qp	H	225	4.0	45.7	-18.0	27.7	40.0	-12.3
132.000	Qp	V	150	1.0	52.9	-18.2	34.7	43.5	-8.8
220.000	Qp	V	150	1.0	50.0	-17.8	32.2	46.0	-13.8
308.000	Qp	H	170	2.4	43.3	-13.9	29.4	46.0	-16.6
396.000	Qp	H	165	2.0	44.5	-11.4	33.1	46.0	-12.9
572.000	Qp	H	185	2.0	43.6	-6.4	37.2	46.0	-8.8
660.000	Qp	V	100	1.0	44.4	-6.3	38.1	46.0	-7.9
748.000	Qp	V	130	1.6	47.2	-4.8	42.4	46.0	-3.6
836.000	Qp	V	120	1.4	45.0	-4.3	40.7	46.0	-5.3
880.000	Qp	V	105	1.0	36.5	-3.2	33.3	46.0	-12.7
913.000	Qp	V	110	1.0	32.1	-3.2	28.9	46.0	-17.1
924.000	Qp	V	100	1.0	39.1	-2.9	36.2	46.0	-9.8

TEST PERSONNEL:

Typed/Printed Name: Daniel W. Baltzell

Date: July 31, 1999

Signature:



APPENDIX A: Emissions Equipment List

DESCRIPTION	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. LAB
AMPLIFIER	HEWLETT PACKARD	11975A	2304A00348	TEST EQUITY
AMPLIFIER (S/A 1)	RHEIN TECH	PR-1040	00001	RTL
AMPLIFIER (S/A 2)	RHEIN TECH	RTL2	900723	RTL
AMPLIFIER (S/A 3)	RHEIN TECH	8447F	2944A03783	RTL
AMPLIFIER (S/A 4)	RHEIN TECH	8447D	2727A05397	RTL
BICONICAL/LOG ANTENNA 1	ANTENNA RESEARCH	LPB-2520	1037	LIBERTY LABS
BICONICAL/LOG ANTENNA 2	ANTENNA RESEARCH	LPB-2520	1036	LIBERTY LABS
FIELD SITE SOURCE	EMCO	4610	9604-1313	RTL
FILTER (ROOM 1)	SOLAR	8130	947305	RTL
FILTER (ROOM 2)	SOLAR	8130	947306	RTL
HARMONIC MIXER 1	HEWLETT PACKARD	11970K	2332A00563	TELOGY
HARMONIC MIXER 2	HEWLETT PACKARD	11970A	2332A01199	TELOGY
HORN ANTENNA 1	EMCO	3160-10	9606-1033	EMCO
HORN ANTENNA 2	EMCO	3160-9	9605-1051	EMCO
HORN ANTENNA 3	EMCO	3160-7	9605-1054	EMCO
HORN ANTENNA 4	EMCO	3160-8	9605-1044	EMCO
HORN ANTENNA 5	EMCO	3160-03	9508-1024	EMCO
LISN (ROOM 1/L1)	SOLAR	7225-1	900727	ACUCAL
LISN (ROOM 1/L2)	SOLAR	7225-1	900726	ACUCAL
LISN (ROOM 2/L1)	SOLAR	7225-1	900078	ACUCAL
LISN (ROOM 2/L2)	SOLAR	7225-1	900077	ACUCAL
PRE-AMPLIFIER	HEWLETT PACKARD	8449B OPT	3008A00505	TELOGY
QUASI-PEAK ADAPTER (S/A 1)	HEWLETT PACKARD	85650A	3145A01599	ACUCAL
QUASI-PEAK ADAPTER (S/A 2)	HEWLETT PACKARD	85650A	2811A01276	ACUCAL
QUASI-PEAK ADAPTER (S/A 3)	HEWLETT PACKARD	85650A	2521A00473	ACUCAL
QUASI-PEAK ADAPTER (S/A 4)	HEWLETT PACKARD	85650A	2521A01032	ACUCAL
RF PRESELECTOR (S/A 1)	HEWLETT PACKARD	85685A	3146A01309	ACUCAL
SIGNAL GENERATOR (HP)	HEWLETT PACKARD	8660C	1947A02956	ACUCAL
SIGNAL GENERATOR (WAVETEK)	WAVETEK	3510B	4952044	ACUCAL
SPECTRUM ANALYZER 1	HEWLETT PACKARD	8566B	3138A07771	ACUCAL
SPECTRUM ANALYZER 2	HEWLETT PACKARD	8567A	2841A00614	ACUCAL
SPECTRUM ANALYZER 4	HEWLETT PACKARD	8567A	2727A00535	ACUCAL
TUNABLE DIPOLE	EMCO	3121	274	LIBERTY LABS
ANTENNA	ATM	WR08	08443-6	ATM
MIXER	OLESON	M08HW	F80814-1	OLESON
MIXER	OLESON	M05HW	G80814-1	OLESON
DIPLEXER	OLESON	M05HW	G80814-1	OLESON
MIXER	HEWLETT PACKARD	11970U	2332A01110	ACUCAL
MIXER	HEWLETT PACKARD	11970V	2521A00512	TELOGY
MIXER	HEWLETT PACKARD	11970W	2521A00710	TELOGY
ANTENNA	ATM	WR15	15-443-6	ATM
ANTENNA	ATM	WR10	10-443-6	ATM
ANTENNA	ATM	WR05	05-443-6	ATM
SWEEP GENERATOR	HEWLETT PACKARD	83752A	3610A00866	HEWLETT PACKARD

Calibration Certification available upon request.

APPENDIX B:

USER'S MANUAL
