

TEST REPORT

Issued: November 27, 2015

Name and Address of the Customer:	KYOCERA Document Solutions Inc. 2-28, 1-Chome, Tamatsukuri, Chuo-ku, Osaka, 540-8585, Japan
Test Item:	RFID Module
Identification:	2NDA0944
Serial No.:	1, 2
FCC ID:	E522NDA0944
IC Certification Number:	1059B-2NDA0944
Sample No.:	1
Sample Receipt Date:	September 7, 2015
Test Specification:	47 CFR Part 15 Subpart C RSS-210 Issue 8, RSS-Gen Issue 4
Period of Testing:	September 7, 2015 - November 24, 2015
Test Result:	PASS

Representative
Test Personnel:

K. Miyaji
(2015-11-27)

K. Miyaji (EMC Dept.)
iNARTE : EMC-003627-NE

Reviewed by:

H. Onishi
(2015-11-27)

H. Onishi (EMC Dept.)
iNARTE : EMC-003318-NT

Other Aspects:

Abbreviations: PASS = passed
 FAIL = failed
 N/A = not applicable

Note:

This Test Report should not be reproduced except in full, without the written approval of Cosmos Corporation.
The test result of this Test Report is based on the tests made for sample provided, and it is not applicable to individual product identical to the sample or similar product.
The judgment of this test report validates the test item only specified in "4. Summary of Test Results".



Contents	Page
1. General Information.....	3
1.1 Test Methodology	3
1.2 Test Facility	3
1.3 Traceability	3
2. Description of the Tested Sample	4
2.1 Product Description	4
2.2 Antenna Description	4
2.3 EUT Description	4
3. Test Condition (Manufacturer's Specification)	5
3.1 Mode of Operation	5
3.2 Additional Equipment	5
3.3 Configuration	6
3.4 EUT Angle	8
4. Summary of Test Results	9
5. Test Result	10
5.1 AC Power Line Conducted Emission (15.207, RSS-Gen 8.8)	10
5.1.1 Setting Remarks	10
5.1.2 Limit	10
5.1.3 Test Detail	11
5.2 Transmitter Spurious Emission (Radiated) (15.209, 15.225(d), RSS-Gen 8.9)	14
5.2.1 Setting Remarks	14
5.2.2 Limit	15
5.2.3 Test Detail	15
5.3 20 dB Bandwidth (15.215(c))	19
5.3.1 Setting Remarks	19
5.3.2 Limit	19
5.3.3 Test Detail	19
5.4 Field Strength of Fundamental Emission (15.225(a) (b) (c) (d), RSS-210 A2.6)	21
5.4.1 Setting Remarks	21
5.4.2 Limit	21
5.4.3 Test Detail	22
5.5 Frequency Stability (15.225(e), RSS-210 A2.6)	26
5.5.1 Setting Remarks	26
5.5.2 Limit	26
5.5.3 Test Detail	26
5.6 Occupied Bandwidth (RSS-Gen Annex A)	29
5.6.1 Setting Remarks	29
5.6.2 Test Detail	29
6. List of Test and Measurement Instruments	31
7. Appendix	33



1. General Information

1.1 Test Methodology

All measurement subject to the present test report is carried out according to the procedures in ANSI C63.10:2013.

1.2 Test Facility

The measurement was carried out at the following facility.

Cosmos Corporation EMC Lab. Oonoki
3571-2 Oonoki, Watarai-cho, Watarai-gun, Mie-ken 516-2102, Japan

- ☒ Semi anechoic Chamber 3 m (COAC3M-01)
- ☐ Shielded Room (COSR-01)
- ☒ Measurement Room

Cosmos Corporation EMC Lab. Oonoki is accredited in accordance with the International Standard ISO/IEC 17025 by the following accreditation bodies and the test facility is registered by the following bodies.

Accreditation: A2LA Accredited Laboratory No. 2900.01
VLAC Accredited Laboratory No. VLAC-039-2
FCC Designation No. JP5182

Registration: Industry Canada Registration No. 3958B
Nemko Laboratory Authorisation. No. ELA 621

1.3 Traceability

The calibration of measurement equipment used in the test subject to the present report is designed and operated to ensure that the measurement is traceable to national standards of measurement or equivalent abroad.



2. Description of the Tested Sample

2.1 Product Description

Manufacturer	KYOCERA Document Solutions Inc.
Model (referred to as the EUT)	2NDA0944
Hardware Version	A0944B
Software Version	S2ND_1000.X01.133.bin
Type of the Equipment	☐ Stand-alone ☐ Combined Equipment ☒ Plug-in Radio Device ☐ Other ()
Transmitter Type	☐ WLAN ☐ Bluetooth () ☐ ZigBee ☒ RFID ☐ Other ()
Nominal Voltage	DC 3.3/5 V
Type of Modulation	ASK
Emission Designator	6K92K1D
Antenna Type	☒ Integral Antenna ☐ Dedicated External Antenna
Operating Frequency	13.56 MHz
Type of Power Source	☐ AC Mains ☐ Dedicated AC Adaptor ☒ DC Voltage ☐ Battery
Type of Battery (if applicable)	N/A
Thermal Limitation	-20°C to 50°C

2.2 Antenna Description

Model	Gain	Antenna Type	Remarks
Un-specified *	-53 dBi	Loop antenna	---

Note:

*: The antenna does not have model name, because the antenna is part of RF Module PCB.

2.3 EUT Description

Equipment under test is as follow:

Instrument	Model	Serial No.	Rating
RFID Module (EUT1)	2NDA0944	1	DC 3.3/5 V
RFID Module (EUT2)	2NDA0944	2	DC 3.3/5 V



3. Test Condition (Manufacturer's Specification)

3.1 Mode of Operation

Mode of operation: RFID Operating

Note:

The EUT makes communication emission with the maximum RF power by a special test program. "Special test program" is that duty cycle is set 100% for a test, although it is less than 10% in normal operation. The module has 4 antennas. This module outputs the power by switching 4 antennas. However, we measured the only 1 antenna which was selected by manufacturer as worst case. The test of Field Strength of Fundamental Emission was performed under the following condition:

Voltage: DC 3.3/5 V $\pm 15\%$

The test of Frequency Stability was performed under the following condition:

Temperature: -20°C to $+50^{\circ}\text{C}$

Voltage: DC 3.3/5 V $\pm 15\%$

3.2 Additional Equipment


The equipment was tested together with additional peripherals.
The following peripherals were used during the tests:

Instrument	Model	Serial No.	Manufacturer
Multi-Function Printer	TASKalfa 6052ci	Z2L5400009	KYOCERA Document Solutions
Personal Computer	PP17L	CN-0N8719-48643-57F-1500	DELL
AC Adapter	HP-OQ065B83	CN-0N2765-47890-47D-8266	DELL
USB Mouse	M-BJ58	LNA30910367	Logitech
Jig	Un-specified	Un-specified	Un-specified

3.3 Configuration

	Instrument	Model		Cable	Length	Shield
A	EUT1 (RFID Module)	2NDA0944 (S/N:1)	a	AC Power Cord	2.5 m	×
			b	AC Power Cord	2.1 m	×
B	EUT2 (RFID Module)	2NDA0944 (S/N:2)	c	AC Power Cord	2.1 m	×
			d	AC Power Cord	0.9 m	×
C	Multi-Function Printer	TASKalfa 6052ci	e	DC Power Cord	1.9 m	○
D	Personal Computer	PP17L	f	LAN Cable	2.0 m	×
E	AC Adapter	HP-OQ065B83	g	USB Cable	2.0 m	○
F	USB Mouse	M-BJ58	h	USB Cable	1.8 m	○
G	Jig	Un-specified	i	USB Mouse Cable	1.8 m	○
			j	Telephone Cable	2.0 m	×
			k	Telephone Cable	2.0 m	×
			l	Jig Cable	0.5 m	×

AC Power Line Conducted Emission

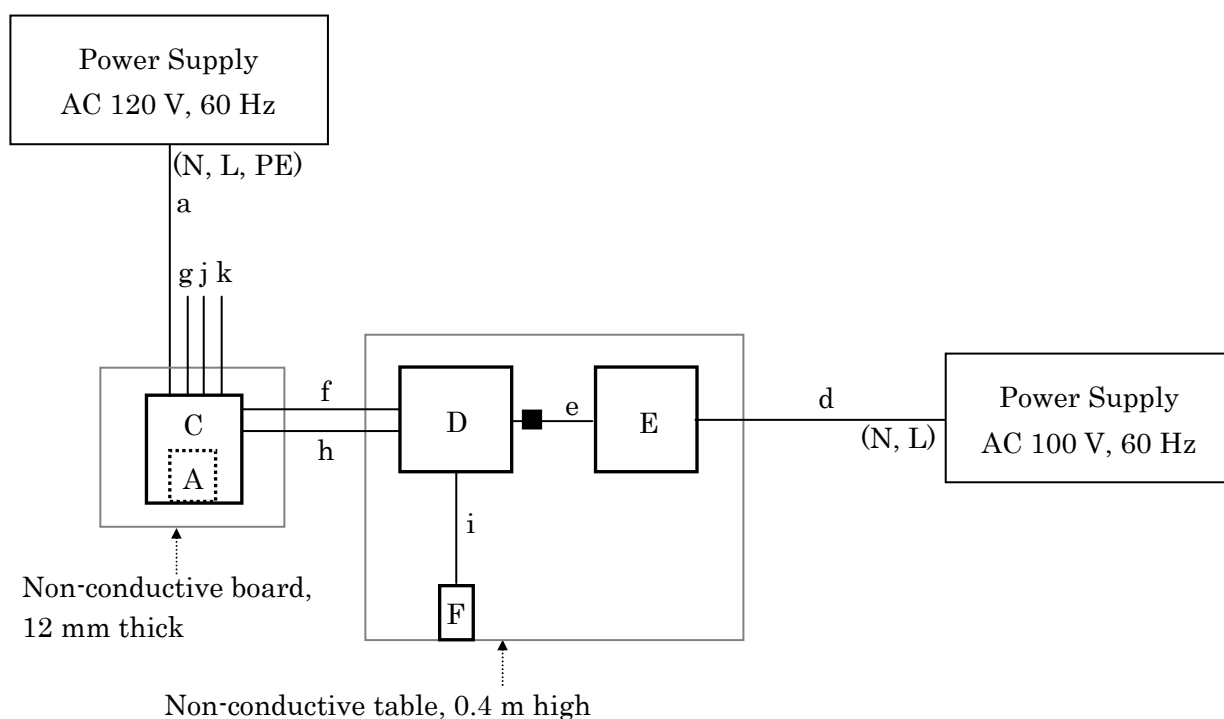

Excess cable arrangement


AC Power Line Conducted Emission

Symbol	Length	Position	Setting
a	0.4 m	Center	Bundle
e	0.35 m	Center	Bundle
f, h, i	0.3 m	Center	Bundle
g	0.35 m	End	Bundle and Hung
j, k	0.3 m	End	Bundle and Hung


3.3 Configuration (Continued)

Transmitter Spurious Emission (Radiated)

Field Strength of Fundamental Emission (normal voltage only)

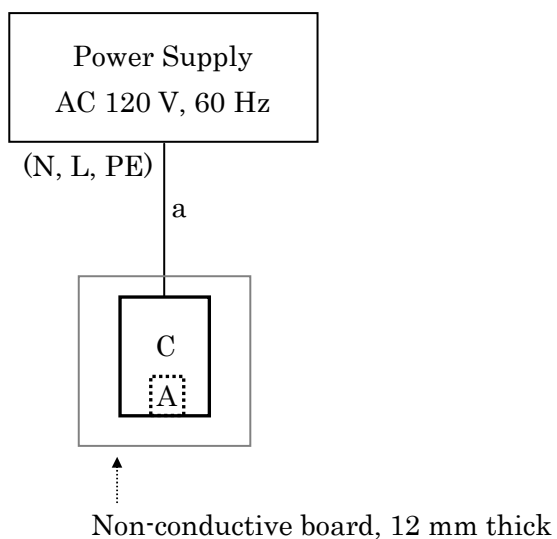


20 dB Bandwidth / Frequency Stability / Occupied Bandwidth

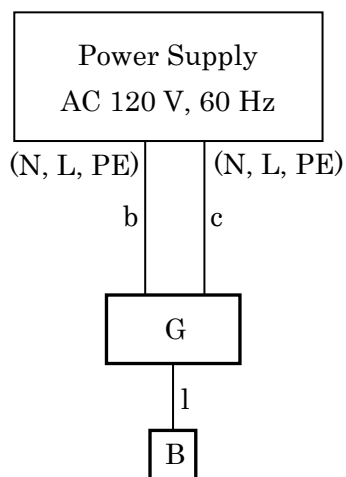


3.3 Configuration (Continued)

Field Strength of Fundamental Emission (normal and $\pm 15\%$ voltage)

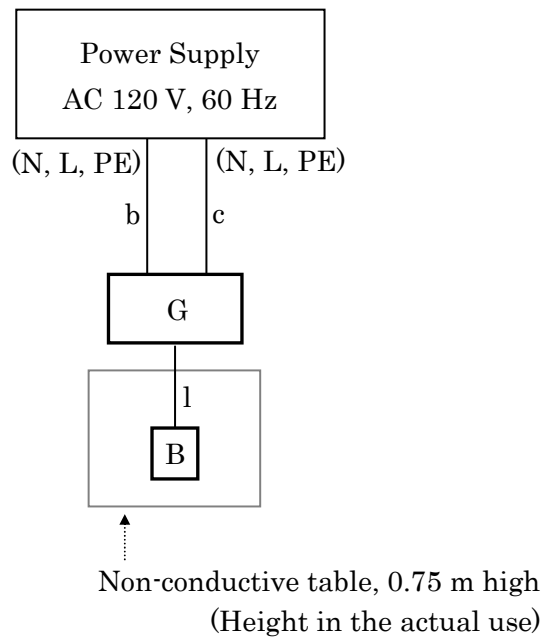

3.4 EUT Angle

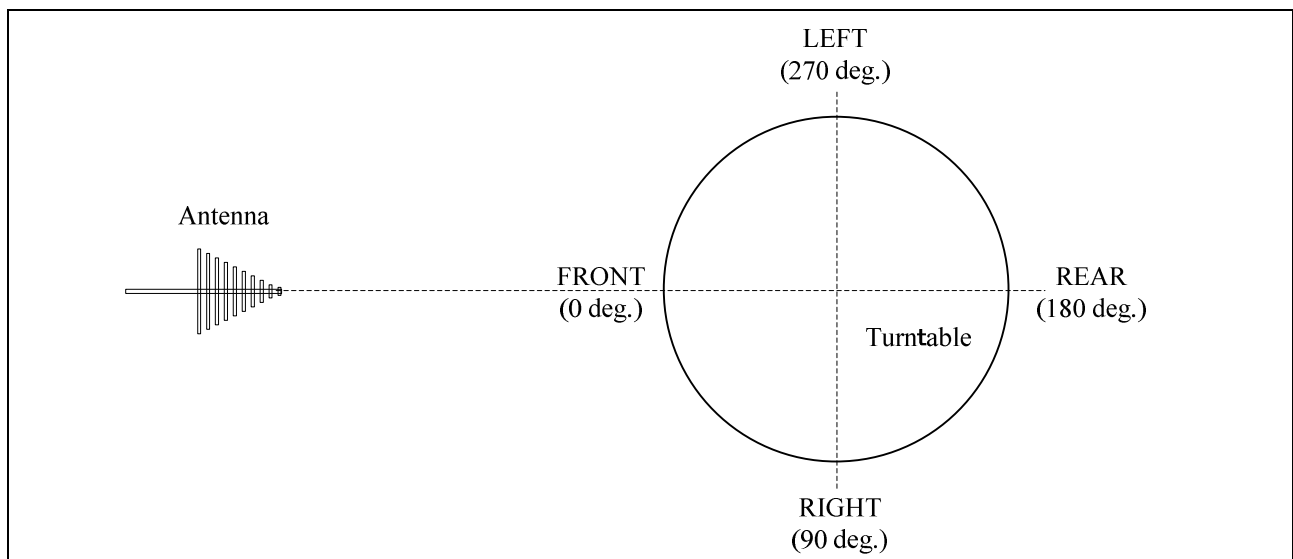



4. Summary of Test Results

These test results are the test results of the condition specified with “3. Test Condition”.

FCC Section	IC Section	Test Item	FCC Result	IC Result
15.207	RSS-Gen 8.8	AC Power Line Conducted Emission	PASS	PASS
15.209, 15.225(d)	RSS-Gen 8.9	Transmitter Spurious Emission (Radiated)	PASS	PASS
15.215(c)	---	20 dB Bandwidth	PASS	---
15.225 (a) (b) (c) (d)	RSS-210 A2.6	Field Strength of Fundamental Emission	PASS	PASS
15.225(e)	RSS-210 A2.6	Frequency Stability	PASS	PASS
---	RSS-Gen Annex A	Occupied Bandwidth	---	PASS
---	RSS-Gen 7.1	Receiver Spurious Emission (Radiated)	---	N/A *

Note:

*: This item does not apply because this device receives some data only while the radio waves are transmitted.



5. Test Result

5.1 AC Power Line Conducted Emission (15.207, RSS-Gen 8.8)

Result: **PASS**

5.1.1 Setting Remarks

The conducted disturbance voltage of AC power line in the frequency range from 150 kHz to 30 MHz was measured in accordance with ANSI C63.10:2013.

The test setup was made in accordance with ANSI C63.10:2013 in a shielded room. The non-conductive board, 12 mm thick, was placed on the reference ground plane, and the EUT was put on the non-conductive board. The used Line Impedance Stabilizing Network (LISN) has a rated impedance of 50 Ω /50 μ H as specified in CISPR16-1-2. The test receiver with Quasi Peak and Average detector is in accordance with CISPR 16-1-1.

The conducted emission level is calculated by adding Cable Attenuation Factor and Insertion Loss of LISN.

Activate the EUT System and run the software prepared for the test.

Setting Condition of Test receiver

Frequency range	Detector	RBW
150 kHz to 30 MHz	Quasi Peak	9 kHz
	Average	9 kHz

5.1.2 Limit

Frequency range	Conducted Limit [dB μ V]	
	Quasi Peak	Average
150 kHz to 500 kHz	66 to 56 *	56 to 46 *
500 kHz to 5 MHz	56	46
5 MHz to 30 MHz	60	50

Note:

*: Decrease with the logarithm of the frequency.



5.1.3 Test Detail

Uncertainty of measurement result : ± 3.45 dB
Date of testing : September 8, 2015
Room temperature : 23°C
Relative humidity : 45%

Calculation

Result = Reading + c.f
= $17.8 + 10.3$
= 28.1

Margin = Limit - Result
= $59.4 - 28.1$
= 31.3

Note:

c.f (Correction Factor) = Cable Attenuation Factor + LISN Factor



5.1.3 Test Detail (Continued)

Test Data

***** Cosmos Corporation *****
<<Conducted Emission EP5/CE Ver 5.3.20>>

8 September, 2015 11:56
131221E FCC CE 02.dat

Limit : FCC 15.207
Model : 2NDA0944 / TASKalfa 6052ci
Serial : 1 / Z2L5400009
Operator : K. Miyaji
Power : DC 3.3V, 5V / AC 120V, 60Hz
Temp., Humi. : 23 deg., 45%
Mode : RFID
Remark :
Remark :
Remark : RBW:9kHz

Final Result

--- L1 Phase ---

No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.3311	17.8	11.2	10.3	28.1	21.5	59.4	49.4	31.3	27.9
2	2.122	18.7	12.6	10.6	29.3	23.2	56.0	46.0	26.7	22.8
3	3.426	17.8	11.7	10.7	28.5	22.4	56.0	46.0	27.5	23.6
4	5.437	16.7	10.0	11.0	27.7	21.0	60.0	50.0	32.3	29.0
5	13.560	33.4	32.9	11.8	45.2	44.7	60.0	50.0	14.8	5.3
6	15.822	18.6	13.2	11.9	30.5	25.1	60.0	50.0	29.5	24.9



--- L2 Phase ---

No.	Frequency	Reading QP	Reading AV	c. f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.4085	16.9	9.7	10.3	27.2	20.0	57.7	47.7	30.5	27.7
2	1.989	22.3	15.7	10.5	32.8	26.2	56.0	46.0	23.2	19.8
3	3.344	19.9	13.5	10.7	30.6	24.2	56.0	46.0	25.4	21.8
4	5.353	18.5	11.7	10.9	29.4	22.6	60.0	50.0	30.6	27.4
5	13.560	34.1	33.4	11.7	45.8	45.1	60.0	50.0	14.2	4.9
6	15.821	20.0	14.3	11.8	31.8	26.1	60.0	50.0	28.2	23.9



5.1.3 Test Detail (Continued)

Test Data

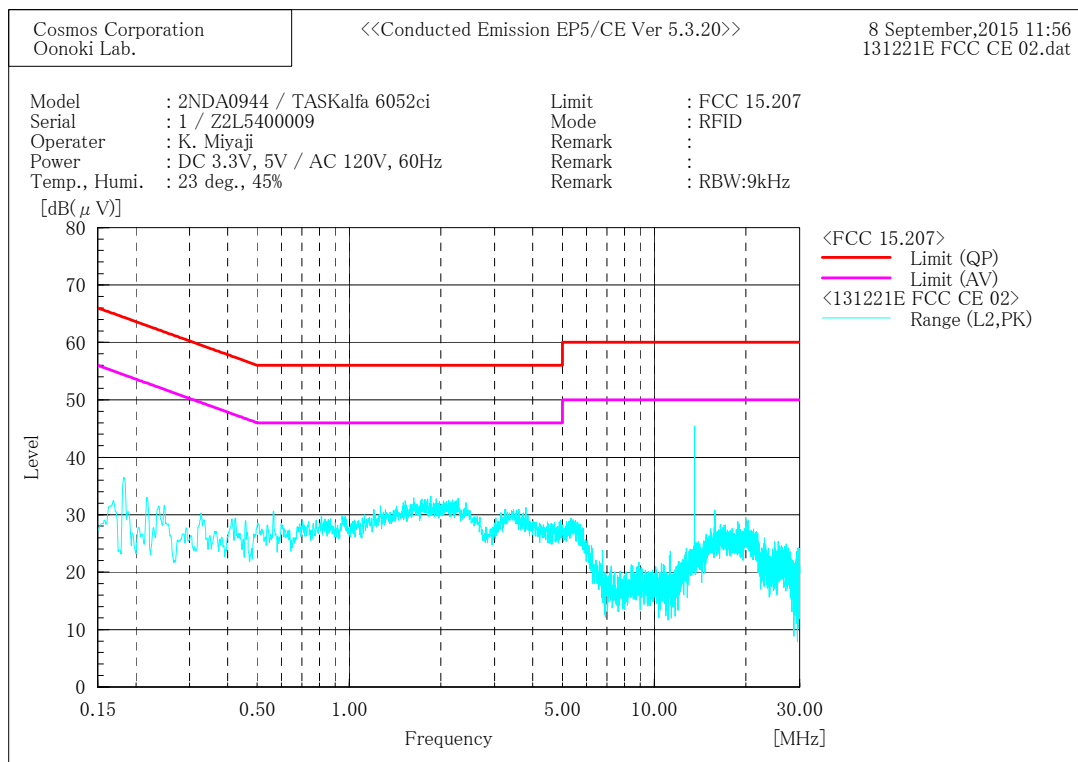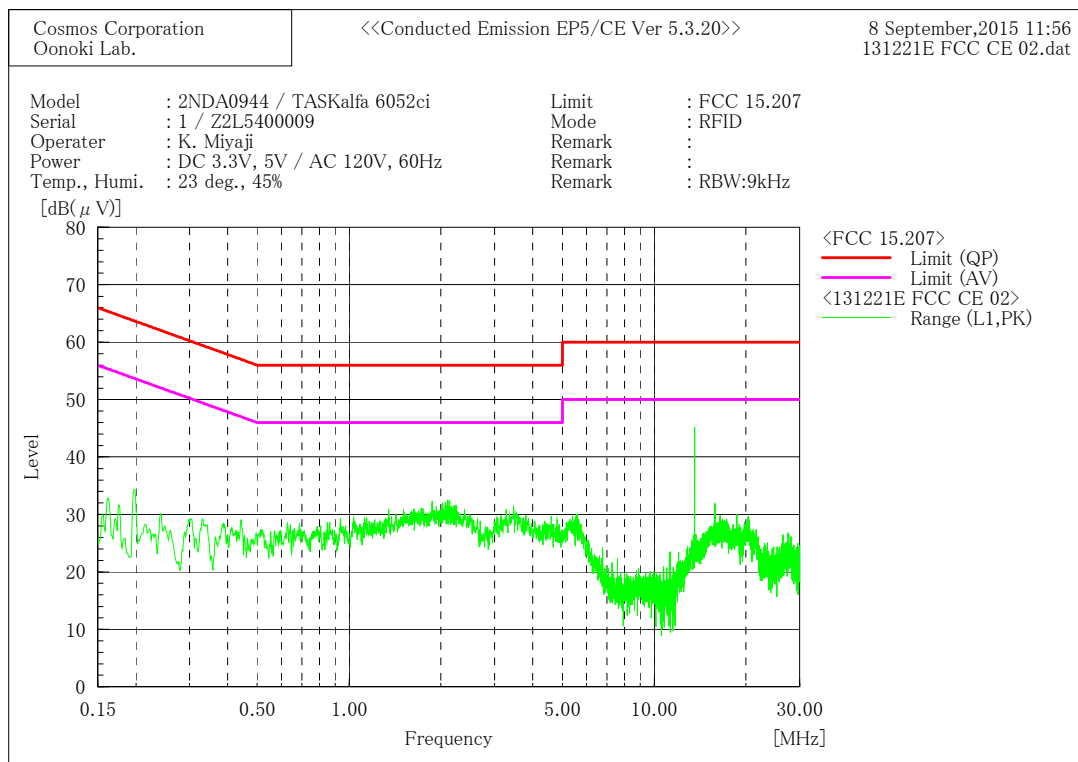



5.2 Transmitter Spurious Emission (Radiated) (15.209, 15.225(d), RSS-Gen 8.9)

Result: **PASS**

5.2.1 Setting Remarks

In the frequency range from 9 kHz to 1 GHz (over 10th harmonics), the electric field strength was measured in accordance with ANSI C63.10:2013.

The test setup was made in accordance with ANSI C63.10:2013 in a semi-anechoic chamber.

The non-conductive board, 12 mm thick, was placed on the turntable, and the EUT was put on the non-conductive board. The EUT was measured at 1 m to 4 m height of the antenna above 30 MHz.

The turntable was fully rotated. The highest radiation from the equipment was recorded. The measurement above 30 MHz was carried out with both horizontal and vertical antenna

polarization. The test receiver with Quasi Peak detector is in accordance with CISPR 16-1-1.

The measurement was carried out with the measuring distance of 3 m. Then the limit of 30 m distance below 30 MHz was converted to the limit of 3 m distance with the $40\log(30\text{ m}/3\text{ m})$.

Setting Condition of Test receiver

Frequency range	Detector	RBW
9 kHz to 90 kHz	Peak	200 Hz
	Average	200 Hz
90 kHz to 110 kHz	Quasi Peak	200 Hz
110 kHz to 150 kHz	Peak	200 Hz
	Average	200 Hz
150 kHz to 490 kHz	Peak	9 kHz
	Average	9 kHz
490 kHz to 30 MHz	Quasi Peak	9 kHz
30 MHz to 1 GHz	Quasi Peak	120 kHz



5.2.2 Limit

The emission limits shown in the following table are based on measurements employing a CISPR Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz, 110 kHz to 490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an Average detector. The limit on Peak radio frequency emissions is 20 dB above the maximum permitted Average emission limit applicable to the equipment under test.

Frequency range	Field Strength (Distance)	
	[μ V/m]	[dB μ V/m]
9 kHz to 490 kHz	2400/F (kHz) 266.6 to 4.89 (300 m)	128.5 to 93.8 (3 m)
490 kHz to 1.705 MHz	24000/F (kHz) 48.9 to 14.0 (30 m)	73.8 to 62.9 (3 m)
1.705 MHz to 30 MHz	30 (30 m)	69.5 (3 m)
30 MHz to 88 MHz	100 (3 m)	40.0 (3 m)
88 MHz to 216 MHz	150 (3 m)	43.5 (3 m)
216 MHz to 960 MHz	200 (3 m)	46.0 (3 m)
Above 960 MHz	500 (3 m)	53.9 (3 m)

5.2.3 Test Detail

Uncertainty of measurement result : ± 5.08 dB
Date of testing : September 7, 2015
Room temperature : 21 - 22°C
Relative humidity : 41 - 45%

Calculation

Result = Reading + c.f
= 55.1 + 20.9
= 76.0

Margin = Limit - Result
= 138.8 - 76.0
= 62.8

Note:

[Below 30 MHz]

c.f (Correction Factor) = Cable Attenuation Factor + Antenna Factor


[Above 30 MHz]

c.f (Correction Factor) = Cable Attenuation Factor + Antenna Factor + Amplifier Gain



5.2.3 Test Detail (Continued)

<Below 30 MHz>
Worst Test Data (Antenna: 0°, Detector: Peak)

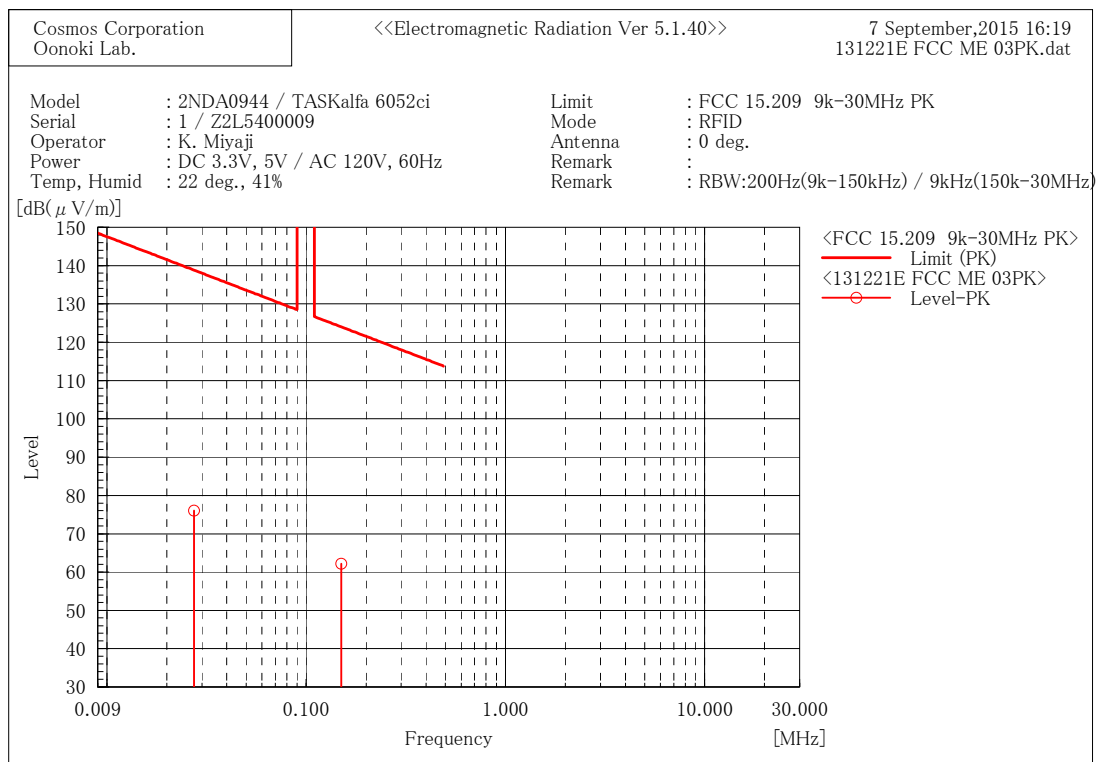


Final Result

No.	Frequency	Reading	c. f	Result	Limit	Margin	Angle	Remark
	[MHz]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[°]	
1	0.0274	55.1	20.9	76.0	138.8	62.8	151.0	
2	0.150	41.6	20.6	62.2	124.0	61.8	146.0	



5.2.3 Test Detail (Continued)

<Below 30 MHz>
Worst Test Data (Antenna: 0°, Detector: Average)

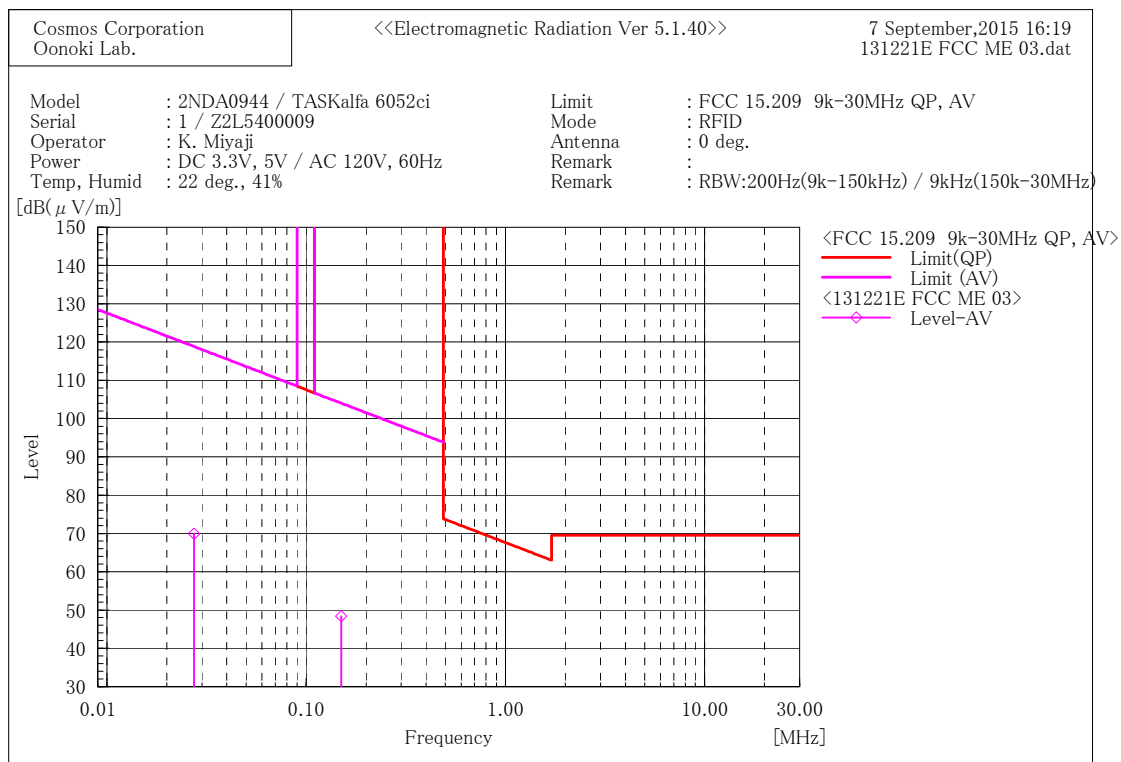

Final Result


No.	Frequency [MHz]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result AV [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin AV [dB]	Angle [°]
1	0.0274	49.0	20.9	69.9	118.8	48.9	151.0
2	0.150	27.8	20.6	48.4	104.0	55.6	146.0



5.2.3 Test Detail (Continued)

<Above 30 MHz>

Test Data

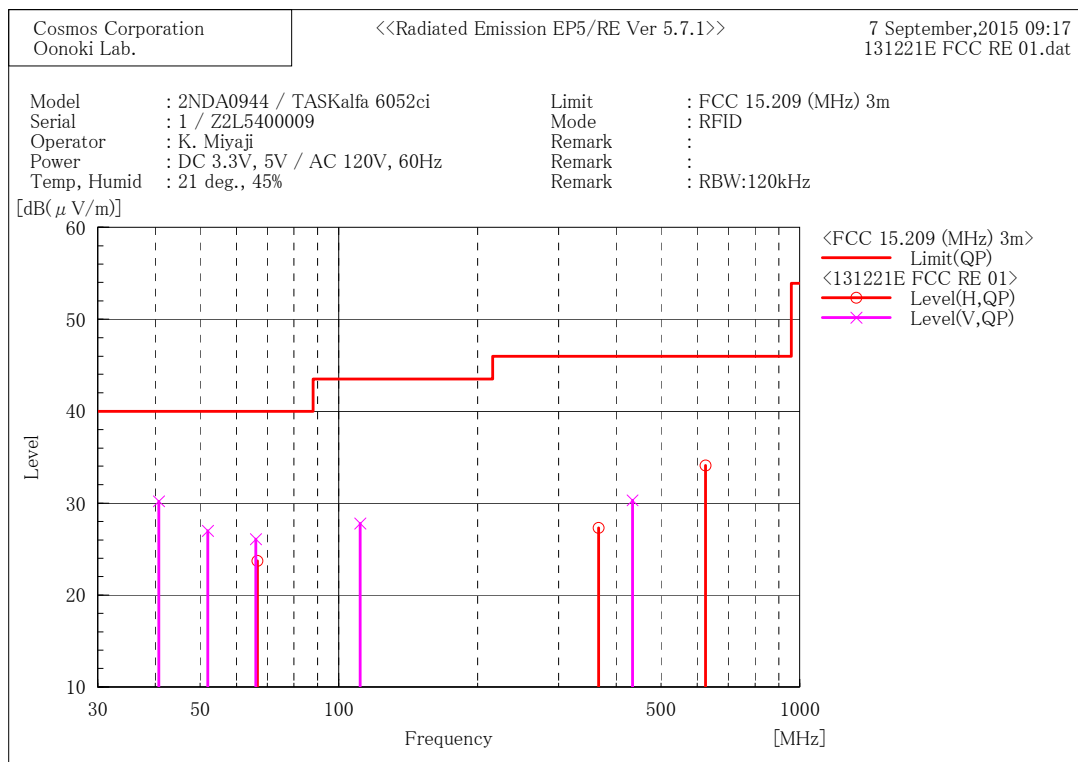

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	66.592	40.5	-16.8	23.7	40.0	16.3	246.0	98.0
2	366.139	32.6	-5.3	27.3	46.0	18.7	100.0	146.0
3	625.000	34.9	-0.8	34.1	46.0	11.9	109.0	193.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	40.703	39.3	-9.1	30.2	40.0	9.8	100.0	347.0
2	51.986	40.1	-13.1	27.0	40.0	13.0	100.0	217.0
3	66.062	42.8	-16.7	26.1	40.0	13.9	100.0	186.0
4	111.337	38.6	-10.8	27.8	43.5	15.7	100.0	212.0
5	433.936	34.6	-4.3	30.3	46.0	15.7	100.0	219.0



5.3 20 dB Bandwidth (15.215(c))

Result: **PASS**

5.3.1 Setting Remarks

The both side of 20 dB down value from peak power were measured by using 20 dB bandwidth measurement function of the spectrum analyzer.

The spectrum analyzer is set as following:

·Resolution Bandwidth	: 1% to 5% of the OBW (not less than 1 kHz)
·Video Bandwidth	: greater than RBW
·Detector Mode	: Peak
·Trace Mode	: Max Hold

5.3.2 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3.3 Test Detail


Uncertainty of measurement result	: $\pm 0.011\%$
Date of testing	: November 24, 2015
Room temperature	: 22°C
Relative humidity	: 42%

Measured Bandwidth [kHz]	Edge of Bandwidth [MHz]	Limit [MHz]	Margin [kHz]
3.0	Lower	13.5590	449
	Higher	13.5620	448



5.3.3 Test Detail (Continued)

Test Data

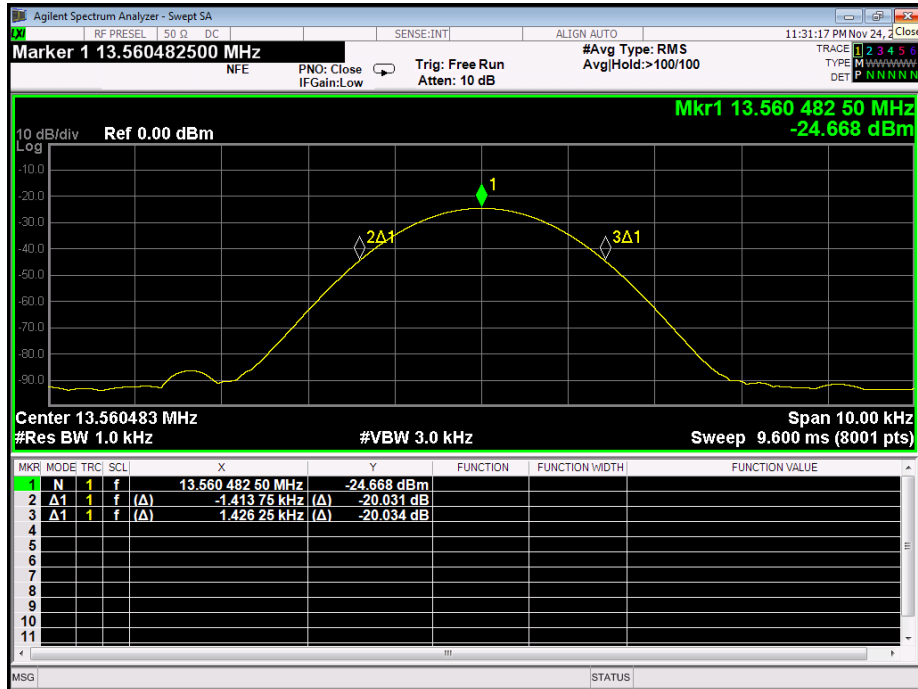



5.4 Field Strength of Fundamental Emission (15.225(a) (b) (c) (d), RSS-210 A2.6)

Result: **PASS**

5.4.1 Setting Remarks

The test setup was made in accordance with ANSI C63.10:2013 in a semi-anechoic chamber. The non-conductive board, 12 mm thick, was placed on the turntable, and the EUT was put on the non-conductive board. The turntable was fully rotated. The highest radiation from the equipment was recorded. The measurement was carried out with the measuring distance of 3 m. The test receiver with Quasi Peak detector is in accordance with CISPR 16-1-1. Then the limit of 30 m distance was converted to the limit of 3 m distance with the $40\log(30\text{ m}/3\text{ m})$.

5.4.2 Limit

Frequency range	Field Strength (Distance)	
	[$\mu\text{V}/\text{m}$]	[dB $\mu\text{V}/\text{m}$]
13.553 MHz to 13.567 MHz	15848 (30 m)	123.9 (3 m)
13.410 MHz to 13.553 MHz and 13.567 MHz to 13.710 MHz	334 (30 m)	90.4 (3 m)
13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	106 (30 m)	80.5 (3 m)
Outside of 13.110 MHz to 14.010 MHz	30 (30 m)	69.5 (3 m)



5.4.3 Test Detail

Uncertainty of measurement result	:	± 4.64 dB	
Date of testing	:	September 7, 2015	November 16, 2015
Room temperature	:	22°C	21°C
Relative humidity	:	41%	56%

Calculation

Result = Reading + c.f
= 15.6 + 22.7
= 38.3

Margin = Limit - Result
= 69.5 - 38.3
= 31.2

Result (3 m) = Reading + c.f
= 34.8 + 22.2
= 57.0

Result (30 m) = Result (3 m) - Conversion Factor
= 57.0 - 40.0
= 17.0

Margin = Limit - Result (30 m)
= 83.9 - 17.0
= 66.9

Note:


c.f (Correction Factor) = Cable Attenuation Factor + Antenna Factor



5.4.3 Test Detail (Continued)

[Test data of the module with the printer]

Worst Test Data (Antenna: 0°)

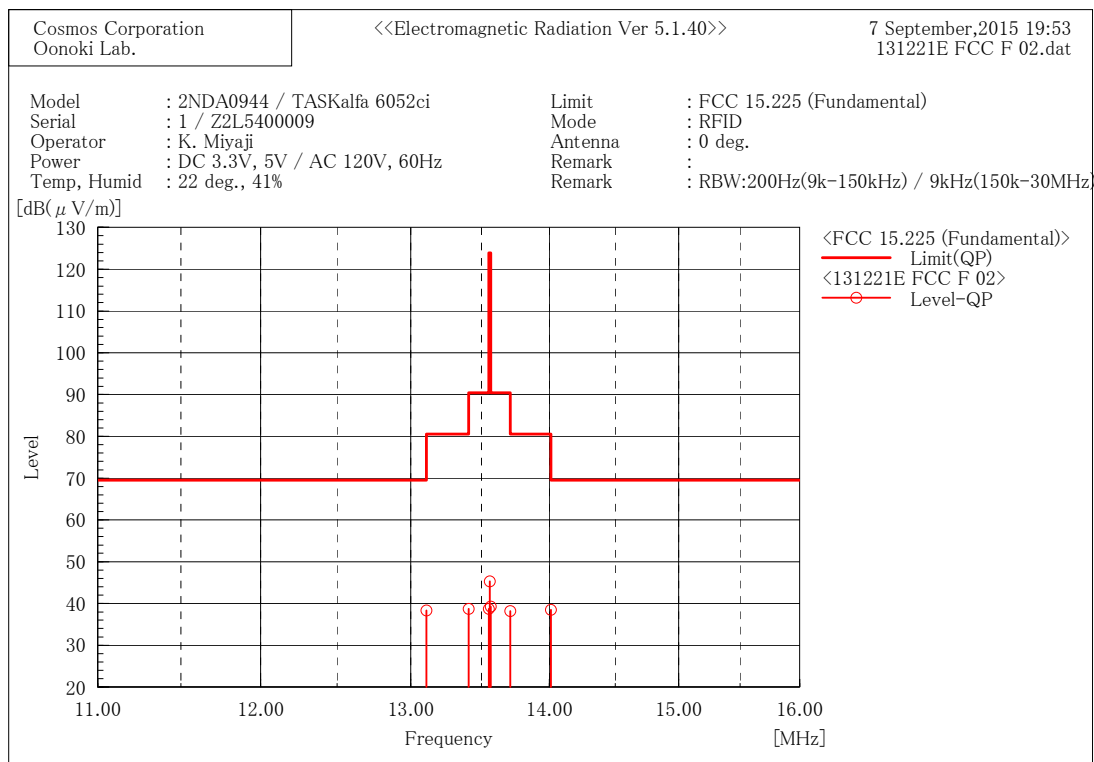

Final Result

No.	Frequency	Reading	c. f	Result	Limit	Margin	Angle	Remark
	[MHz]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[°]	
1	13.110	15.6	22.7	38.3	69.5	31.2	10.0	
2	13.410	15.8	22.9	38.7	80.5	41.8	10.0	
3	13.553	15.7	23.0	38.7	90.4	51.7	10.0	
4	13.560	22.3	23.0	45.3	123.9	78.6	10.0	
5	13.567	16.3	23.0	39.3	90.4	51.1	10.0	
6	13.710	15.2	23.0	38.2	80.5	42.3	10.0	
7	14.010	15.3	23.2	38.5	69.5	31.0	10.0	



5.4.3 Test Detail (Continued)

[Test data of the module only]

Test Data (Frequency Range: 13.553 MHz to 13.567 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
13.553 - 13.567	13.560	2.805	4.25	90	34.8	22.2	57.0	40.0	17.0	83.9	66.9
	13.560		5.00	90	36.4	22.2	58.6	40.0	18.6	83.9	65.3
	13.560		5.75	90	37.6	22.2	59.8	40.0	19.8	83.9	64.1
	13.560	3.30	4.25	90	34.9	22.2	57.1	40.0	17.1	83.9	66.8
	13.560		5.00	90	36.6	22.2	58.8	40.0	18.8	83.9	65.1
	13.560		5.75	90	37.8	22.2	60.0	40.0	20.0	83.9	63.9
	13.560	3.795	4.25	90	35.0	22.2	57.2	40.0	17.2	83.9	66.7
	13.560		5.00	90	36.6	22.2	58.8	40.0	18.8	83.9	65.1
	13.560		5.75	90	37.8	22.2	60.0	40.0	20.0	83.9	63.9

Test Data (Frequency Range: 13.410 MHz to 13.553 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
13.41 - 13.553	13.553	2.805	4.25	90	21.0	22.2	43.2	40.0	3.2	50.4	47.2
	13.553		5.00	90	22.6	22.2	44.8	40.0	4.8	50.4	45.6
	13.553		5.75	90	23.7	22.2	45.9	40.0	5.9	50.4	44.5
	13.553	3.30	4.25	90	21.0	22.2	43.2	40.0	3.2	50.4	47.2
	13.553		5.00	90	22.6	22.2	44.8	40.0	4.8	50.4	45.6
	13.553		5.75	90	23.8	22.2	46.0	40.0	6.0	50.4	44.4
	13.553	3.795	4.25	90	20.9	22.2	43.1	40.0	3.1	50.4	47.3
	13.553		5.00	90	22.6	22.2	44.8	40.0	4.8	50.4	45.6
	13.553		5.75	90	23.8	22.2	46.0	40.0	6.0	50.4	44.4

Test Data (Frequency Range: 13.567 MHz to 13.710 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
13.567 - 13.71	13.567	2.805	4.25	90	23.2	22.2	45.4	40.0	5.4	50.4	45.0
	13.567		5.00	90	24.8	22.2	47.0	40.0	7.0	50.4	43.4
	13.567		5.75	90	26.0	22.2	48.2	40.0	8.2	50.4	42.2
	13.567	3.30	4.25	90	23.5	22.2	45.7	40.0	5.7	50.4	44.7
	13.567		5.00	90	25.2	22.2	47.4	40.0	7.4	50.4	43.0
	13.567		5.75	90	26.8	22.2	49.0	40.0	9.0	50.4	41.4
	13.567	3.795	4.25	90	23.7	22.2	45.9	40.0	5.9	50.4	44.5
	13.567		5.00	90	25.3	22.2	47.5	40.0	7.5	50.4	42.9
	13.567		5.75	90	26.5	22.2	48.7	40.0	8.7	50.4	41.7



5.4.3 Test Detail (Continued)

Test Data (Frequency Range: 13.110 MHz to 13.410 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
13.11 - 13.41	13.41	2.805	4.25	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41		5.00	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41		5.75	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41	3.30	4.25	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41		5.00	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41		5.75	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41	3.795	4.25	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41		5.00	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5
	13.41		5.75	90	4.8	22.2	27.0	40.0	-13.0	40.5	53.5

Test Data (Frequency Range: 13.710 MHz to 14.010 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
13.71 - 14.01	13.71	2.805	4.25	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71		5.00	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71		5.75	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71	3.30	4.25	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71		5.00	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71		5.75	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71	3.795	4.25	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71		5.00	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4
	13.71		5.75	90	4.8	22.3	27.1	40.0	-12.9	40.5	53.4

Test Data (Frequency Range: 12.660 MHz to 13.110 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
12.66 - 13.11	13.11	2.805	4.25	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11		5.00	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11		5.75	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11	3.30	4.25	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11		5.00	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11		5.75	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11	3.795	4.25	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11		5.00	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5
	13.11		5.75	90	4.8	22.2	27.0	40.0	-13.0	29.5	42.5

Test Data (Frequency Range: 14.010 MHz to 14.460 MHz)

Frequency Range [MHz]	Measurement Frequency [MHz]	Power Supply Voltage [V]	Power Supply Voltage [V]	Antenna Polarization [deg.]	Reading [dBμV]	c.f. [dBS/m]	Result [dBμV/m] (3m)	Conversion Factor [dB]	Result [dBμV/m] (30m)	Limit [dBμV/m]	Margin [dB]
14.01 - 14.46	14.01	2.805	4.25	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01		5.00	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01		5.75	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01	3.30	4.25	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01		5.00	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01		5.75	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01	3.795	4.25	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01		5.00	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4
	14.01		5.75	90	4.8	22.3	27.1	40.0	-12.9	29.5	42.4



5.5 Frequency Stability (15.225(e), RSS-210 A2.6)

Result: **PASS**

5.5.1 Setting Remarks

The EUT was placed in an environmental test chamber, exposed in extreme temperatures until its temperature is stabilized. The measurement was carried out at every 10°C from -20°C to +50°C in the most common nominal supply voltage and the measurement was carried out at ±15% of rated voltage at 20°C.

5.5.2 Limit

The frequency stability of the carrier signal shall be maintained within ±0.01% of the operating frequency.

5.5.3 Test Detail

Uncertainty of measurement result : ±0.0021 Hz
Date of testing : November 18 and 19, 2015
Room temperature : Refer to Test Data

Calculation

Deviation [Hz] = Measured Frequency - Center Frequency
= 13560371 - 13560000
= 371

Deviation [ppm] = | Deviation [Hz] | ÷ Center Frequency × 1000000
= | 371 | ÷ 13560000 × 1000000
= 27.3

Margin = Limit - Deviation [ppm]
= 100 - 27.3
= 72.7



5.5.3 Test Detail (Continued)

Test Data

Temp [°C]	Operation Time	Measured Frequency [Hz]	Deviation [Hz]	Deviation [ppm]	Limit [ppm]	Margin [ppm]
50	Startup	13560371	371	27.3	100	72.7
	2 min	13560368	368	27.1	100	72.9
	5 min	13560367	367	27.0	100	73.0
	10 min	13560367	367	27.1	100	72.9
40	Startup	13560413	413	30.5	100	69.5
	2 min	13560408	408	30.1	100	69.9
	5 min	13560408	408	30.1	100	69.9
	10 min	13560408	408	30.1	100	69.9
30	Startup	13560460	460	33.9	100	66.1
	2 min	13560455	455	33.5	100	66.5
	5 min	13560454	454	33.5	100	66.5
	10 min	13560454	454	33.5	100	66.5
20	Startup	13560496	496	36.6	100	63.4
	2 min	13560495	495	36.5	100	63.5
	5 min	13560494	494	36.5	100	63.5
	10 min	13560494	494	36.4	100	63.6
10	Startup	13560532	532	39.2	100	60.8
	2 min	13560528	528	39.0	100	61.0
	5 min	13560528	528	38.9	100	61.1
	10 min	13560528	528	38.9	100	61.1
0	Startup	13560543	543	40.1	100	59.9
	2 min	13560542	542	40.0	100	60.0
	5 min	13560542	542	40.0	100	60.0
	10 min	13560542	542	40.0	100	60.0
-10	Startup	13560531	531	39.2	100	60.8
	2 min	13560534	534	39.4	100	60.6
	5 min	13560534	534	39.4	100	60.6
	10 min	13560534	534	39.4	100	60.6
-20	Startup	13560489	489	36.1	100	63.9
	2 min	13560495	495	36.5	100	63.5
	5 min	13560496	496	36.6	100	63.4
	10 min	13560496	496	36.6	100	63.4



5.5.3 Test Detail (Continued)

Test Data

Supply Voltage [V]	Supply Voltage [V]	Measured Frequency [Hz]	Deviation [Hz]	Deviation [ppm]	Limit [ppm]	Margin [ppm]
2.805	4.25	13560528	528	38.9	100	61.1
	5.00	13560529	529	39.0	100	61.0
	5.75	13560531	531	39.1	100	60.9
3.300	4.25	13560493	493	36.4	100	63.6
	5.00	13560494	494	36.4	100	63.6
	5.75	13560496	496	36.6	100	63.4
3.795	4.25	13560431	431	31.8	100	68.2
	5.00	13560433	433	31.9	100	68.1
	5.75	13560434	434	32.0	100	68.0

Test Data

Temp [°C]	Supply Voltage [V]	Supply Voltage [V]	Measured Frequency [Hz]	Deviation [Hz]	Deviation [ppm]	Limit [ppm]	Margin [ppm]
50	3.3	5	13560367	-127	9.4	100	90.6
20			13560494	reference value			
-20			13560496	2	0.1	100	99.9
20	2.805	4.25	13560528	34	2.5	100	97.5
		5.00	13560529	35	2.6	100	97.4
		5.75	13560531	36	2.7	100	97.3
	3.300	4.25	13560493	-1	0.1	100	99.9
		5.75	13560496	2	0.1	100	99.9
		4.25	13560431	-63	4.6	100	95.4
	3.795	5.00	13560433	-62	4.5	100	95.5
		5.75	13560434	-61	4.5	100	95.5



5.6 Occupied Bandwidth (RSS-Gen Annex A)

Result: **PASS**

5.6.1 Setting Remarks

EUT directly connects to the spectrum analyzer via calibrated coaxial cable and 10 dB attenuator.
The spectrum analyzer is set-up as following;

·Resolution Bandwidth	: Approx. 1% of the span
·Video Bandwidth	: $3 \times \text{RBW}$
·Sweep	: Auto
·Detector Mode	: RMS
·Trace Mode	: Max Hold


5.6.2 Test Detail

Uncertainty of measurement result	: $\pm 0.011\%$
Date of testing	: November 24, 2015
Room temperature	: 22°C
Relative humidity	: 42%



5.6.2 Test Detail (Continued)

Test Data

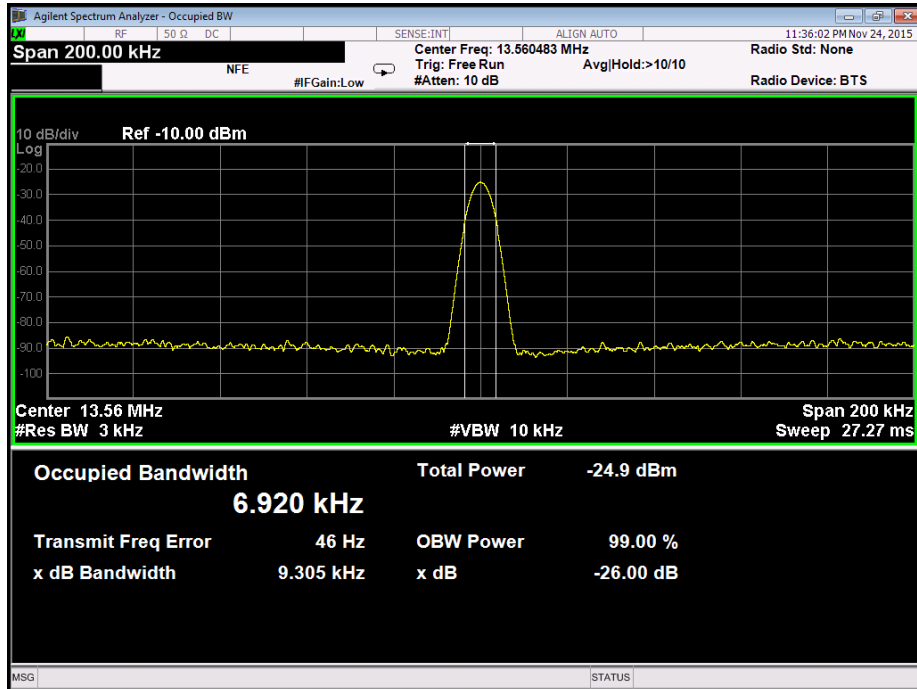



6. List of Test and Measurement Instruments

AC Power Line Conducted Emission

Instruments	Manufacturer	Model	Serial No.	Calibrated Date/Until
EMI Test Receiver	Agilent Technologies	N9038A	MY54130015	2015/06/29 2016/06/28
Artificial-Mains Network /Highpass Filter /Attenuator 10 dB	Kyoritsu /Kyoritsu /TAMAGAWA	KNW-341C (F) /KFL-007 /CFA-03	8-1659-1 /8-1708-10 /---	2015/06/18 2016/06/17
Artificial-Mains Network /Highpass Filter /Attenuator 10 dB	Kyoritsu /Kyoritsu / JFW	KNW-341 F /KFL-007 / 50FP-010-H2	8S-2996-1 /8-1741-2 /---	2015/06/25 2016/06/24
RF Cable RF Selector (9 kHz to 30 MHz)	Fujikura	5D-2W	OC09	2015/05/11 2016/05/10
	SUHNER	RG223/U	OC10 OC11 OC12	
	TSJ	RFM-E121	03149	
50 Ω Terminator	RES-NET MICROWAVE	RCX6BM	---	2015/05/28 2016/05/27
Software	TOYO	EP5/CE (ver 5.4.40)	---	---

Transmitter Spurious Emission (Radiated) (Below 30 MHz)

Field Strength of Fundamental Emission

Instruments	Manufacturer	Model	Serial No.	Calibrated Date/Until
EMI Test Receiver	Agilent Technologies	N9038A	MY54130015	2015/06/29 2016/06/28
				2015/10/14 2016/10/13
Loop Antenna (9 kHz to 30 MHz)	SCHAFFNER	HLA6120	1137	2014/10/05 2015/10/04
				2015/11/06 2016/11/05
Anechoic Chamber 3 m	JSE	COAC3M-01	---	2015/05/07 2016/05/06
RF Cable RF Selector (9 kHz to 30 MHz)	Fujikura	5D-2W	OC09	2015/05/11 2016/05/10
	SUHNER	RG223/U	OC10 OC11 OC12	
	TSJ	RFM-E121	03149	
Software	TOYO	EP5/ME (ver 5.1.40)	---	---



6. List of Test and Measurement Instruments (Continued)

Transmitter Spurious Emission (Radiated) (Above 30 MHz)

Instruments	Manufacturer	Model	Serial No.	Calibrated Date/Until
EMI Test Receiver	Agilent Technologies	N9038A	MY54130015	2015/06/29 2016/06/28
Pre-Amplifier (30 MHz to 1 GHz)	HEWLETT PACKARD	8447D OPT 010	2944A 07891	2015/03/13 2016/03/12
Biconical Antenna (30 MHz to 300 MHz)	SCHWARZBECK	VHBB9124 / BBA9106	9124-311	2015/08/31 2016/08/30
Log-Periodic Antenna (300 MHz to 1 GHz)	SCHWARZBECK	UHALP9108-A	0645	2015/08/31 2016/08/30
Anechoic Chamber 3 m	JSE	COAC3M-01	---	2015/05/07 2016/05/06
Attenuator 3 dB	JFW	50FP-003-H2	---	2015/03/13 2016/03/12
RF Cable RF Selector (30 MHz to 1 GHz)	Fujikura	8D-2W	OC14	2015/05/11 2016/05/10
	SUHNER	RG223/U	OC11	
		RG214/U	OC15 OC16	
		RG400/U	OC17	
	TSJ	RFM-E121	03149	
Software	TOYO	EP5/RE (ver 5.7.1)	---	---

20 dB Bandwidth / Frequency Stability / Occupied Bandwidth

Instruments	Manufacturer	Model	Serial No.	Calibrated Date/Until
EMI Test Receiver	Agilent Technologies	N9038A	MY54130015	2015/10/14 2016/10/13
Thermostatic Chamber	ESPEC	PU-2KP	14010409	2015/08/07 2016/08/06



7. Appendix

Refer to separated files for the following appendixes.

Appendix 1: Angle of EUT

Appendix 2: Photographs of EUT (RFID Module)

Appendix 3: Photographs of the Test Setup