

# TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: Multitone Electronics Plc  
EkoTek - Hub

To: FCC Part 15.247: 2006 (Subpart C)

**Test Report Serial No:**  
RFI/RPTE2/RP48909JD09A

**Supersedes Test Report Serial No:**  
RFI/RPTE1/RP48909JD09A

This Test Report Is Issued Under The Authority  
Of Michael Derby, Radio Performance Service Leader:



Tested By: Nirav Modi



Checked By: Michael Derby



Report Copy No: PDF01

Issue Date: 12 July 2007

Test Dates: 04 June 2007 to 21 June 2007

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

**Test of:** **Multitone Electronics Plc**  
**EkoTek - Hub**  
**To:** **FCC Part 15.247: 2006 (Subpart C)**

---

This page has been left intentionally blank.

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

---

## Table of Contents

1. Client Information.....	4
2. Equipment Under Test (EUT) .....	5
3. Test Results .....	7
4. Deviations from the Test Specification .....	7
5. Operation of the EUT during Testing .....	8
6. Summary of Test Results .....	9
7. Measurements, Examinations and Derived Results .....	10
8. Measurement Uncertainty .....	38
9. Measurement Methods .....	39
Appendix 1. Test Equipment Used .....	45
Appendix 2. Test Configuration Drawings.....	48

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

## **1. Client Information**

<b>Company Name:</b>	Multitone Electronics Plc
<b>Address:</b>	Multitone House Shortwood Copse Lane Kempshott Basingstoke Hampshire RG23 7NL UK
<b>Contact Name:</b>	Mr B Merchant

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

## **2. Equipment Under Test (EUT)**

The following information (with the exception of the Date of Receipt) has been supplied by the client:

### **2.1. Identification of Equipment Under Test (EUT)**

<b>Description:</b>	Radio Network Central Device
<b>Brand Name:</b>	Multitone
<b>Model Name or Number:</b>	EkoTek - HUB
<b>Unique Type Identification:</b>	2WHUB
<b>Serial Number:</b>	66
<b>Hardware Version:</b>	C
<b>Software Version:</b>	Issue 1 – modified for test coverage
<b>FCC ID Number:</b>	E862WHUB
<b>Country of Manufacture:</b>	Malacca
<b>Date of Receipt:</b>	04 June 2007

### **2.2. Accessories**

<b>Description:</b>	Power Supply
<b>Brand Name:</b>	Mascot
<b>Model Name or Number:</b>	Type 2126
<b>Serial Number:</b>	None
<b>Cable Length &amp; Type:</b>	2 m, 2 core
<b>Connected to Port:</b>	DC Power I/P on EUT

### **2.3. Description of EUT**

The equipment under test is a Radio network central device, providing system connections to PC via ethernet5 LAN (10/100BaseT), 2 x RS232 and 1 x RS485 ports to external systems, 2 x switched alarm contacts.

Keypad provides local access to alarm, configuration, date and time and message read functions.

LC display shows messages date and time configuration data.

### **2.4. Modifications Incorporated in EUT**

During the course of testing the EUT was not modified.

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

## **2.5. Additional Information Related to Testing**

<b>Power Supply Requirement:</b>	Nominal 110 V, 60 Hz AC Mains Supply Internal battery supply of 4.5 V trickle charge standby		
<b>Intended Operating Environment:</b>	Residential Commercial Light Industry		
<b>Equipment Category:</b>	IEEE 802.15.4		
<b>Type of Unit:</b>	Base Station (Fixed Use) Transceiver		
<b>Transmit Frequency Range:</b>	2.405 GHz to 2.480 GHz		
<b>Transmit Channels Tested:</b>	<b>Channel ID</b>	<b>Channel Number</b>	<b>Channel Frequency (GHz)</b>
	Bottom	1	2.405
	Middle	9	2.445
	Top	16	2.480
<b>Receive Frequency Range:</b>	2.405 GHz to 2.480 GHz		
<b>Receive Channels Tested:</b>	<b>Channel ID</b>	<b>Channel Number</b>	<b>Channel Frequency (GHz)</b>
	Bottom	1	2.405
	Middle	9	2.445
	Top	16	2.480
<b>Maximum Peak Power Output (EIRP)</b>	+14.8 dBm		

## **2.6. Port Identification**

<b>Port</b>	<b>Description</b>	<b>Type/Length</b>	<b>Applicable</b>
1	Low Voltage DC Power I/P	2 Core / 2m	Yes
2	Ethernet LAN Interface 10/100 BaseT	Multicore – Cat5 / ≤3m	No
3	2 x RS232 9 Pin Serial	Multicore – Cat5/ ≤3m	No
4	1 x RS485 RJ45	Multicore – Cat5/ ≤3m	No
5	2 x Dry Voltage Alarm Contact	2 Core / ≤3m	No

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

### **3. Test Results**

<b>Reference:</b>	FCC Part 15.247: 2006 Subpart C
<b>Title:</b>	Code of Federal Regulations, Part 15.247 (47CFR22) (Intentional Radiators operating within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz)

#### **3.1. Methods and Procedures**

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

#### **3.2. Definition of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

### **4. Deviations from the Test Specification**

There were no deviations from the test specification.

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

---

## **5. Operation of the EUT during Testing**

### **5.1. Operating Modes**

The EUT was tested in the following operating modes, unless otherwise stated:

Transmit and Receive.

### **5.2. Configuration and Peripherals**

The EUT was tested in the following configuration:

The EUT was tested in a stand alone configuration, without support equipment.

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

## **6. Summary of Test Results**

<b>Range of Measurements</b>	<b>Specification Reference</b>	<b>Port Type</b>	<b>Compliance Status</b>
Receiver AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2006 Section 15.107	AC Mains	Complied
Receiver Radiated Spurious Emissions	C.F.R. 47 FCC Part 15: 2006 Section 15.109	Antenna	Complied
Transmitter AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2006 Section 15.207	AC Mains	Complied
Transmitter Minimum 6 dB Bandwidth	C.F.R. 47 FCC Part 15: 2006 Section 15.247(a)(2)	Antenna	Complied
Transmitter 20 dB Bandwidth	C.F.R. 47 FCC Part 15: 2006 Section 2.1049	Antenna	Complied
Transmitter Peak Power Spectral Density	C.F.R. 47 FCC Part 15: 2006 Section 15.247(e)	Antenna	Complied
Transmitter Maximum Peak Output Power	C.F.R. 47 FCC Part 15: 2006 Section 15.247(b)(3)	Antenna	Complied
Transmitter Radiated Emissions	C.F.R. 47 FCC Part 15: 2006 Sections 15.247(d) & 15.209(a)	Antenna	Complied
Transmitter Band Edge Radiated Emissions	C.F.R. 47 FCC Part 15: 2006 Sections 15.247(d) & 15.209(a)	Antenna	Complied

### **6.1. Location of Tests**

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, UK.

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

---

## **7. Measurements, Examinations and Derived Results**

### **7.1. General Comments**

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

## **7.2. Test Results**

### **7.2.1. Receiver AC Conducted Spurious Emissions: Section 15.107**

The EUT was configured for ac conducted emission measurements, as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

#### **Results:**

##### **Quasi-Peak Detector Measurements on Live and Neutral Lines**


Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.166000	Live	54.4	65.2	10.8	Complied
0.174000	Live	39.0	64.8	25.8	Complied
0.206000	Live	51.4	63.4	12.0	Complied
0.250000	Live	46.4	61.8	15.4	Complied
0.290000	Live	43.5	60.5	17.0	Complied
0.330000	Live	41.2	59.5	18.3	Complied
3.394000	Neutral	34.3	56.0	21.7	Complied
3.474000	Neutral	34.6	56.0	21.4	Complied
3.686000	Neutral	35.1	56.0	20.9	Complied
3.766000	Neutral	35.0	56.0	21.0	Complied

##### **Average Detector Measurements on Live and Neutral Lines**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.166000	Neutral	43.2	55.2	12.0	Complied
0.206000	Neutral	43.2	53.4	10.2	Complied
0.250000	Live	42.1	51.8	9.7	Complied
0.290000	Live	39.0	50.5	11.5	Complied
0.330000	Live	38.0	49.5	11.5	Complied
0.334000	Live	33.7	49.4	15.7	Complied
0.374000	Live	29.6	48.4	18.8	Complied
3.766000	Live	22.6	46.0	23.4	Complied
3.774000	Neutral	21.0	46.0	25.0	Complied
3.830000	Neutral	23.4	46.0	22.6	Complied

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

**Receiver AC Conducted Spurious Emissions: Section 15.107 (Continued)**

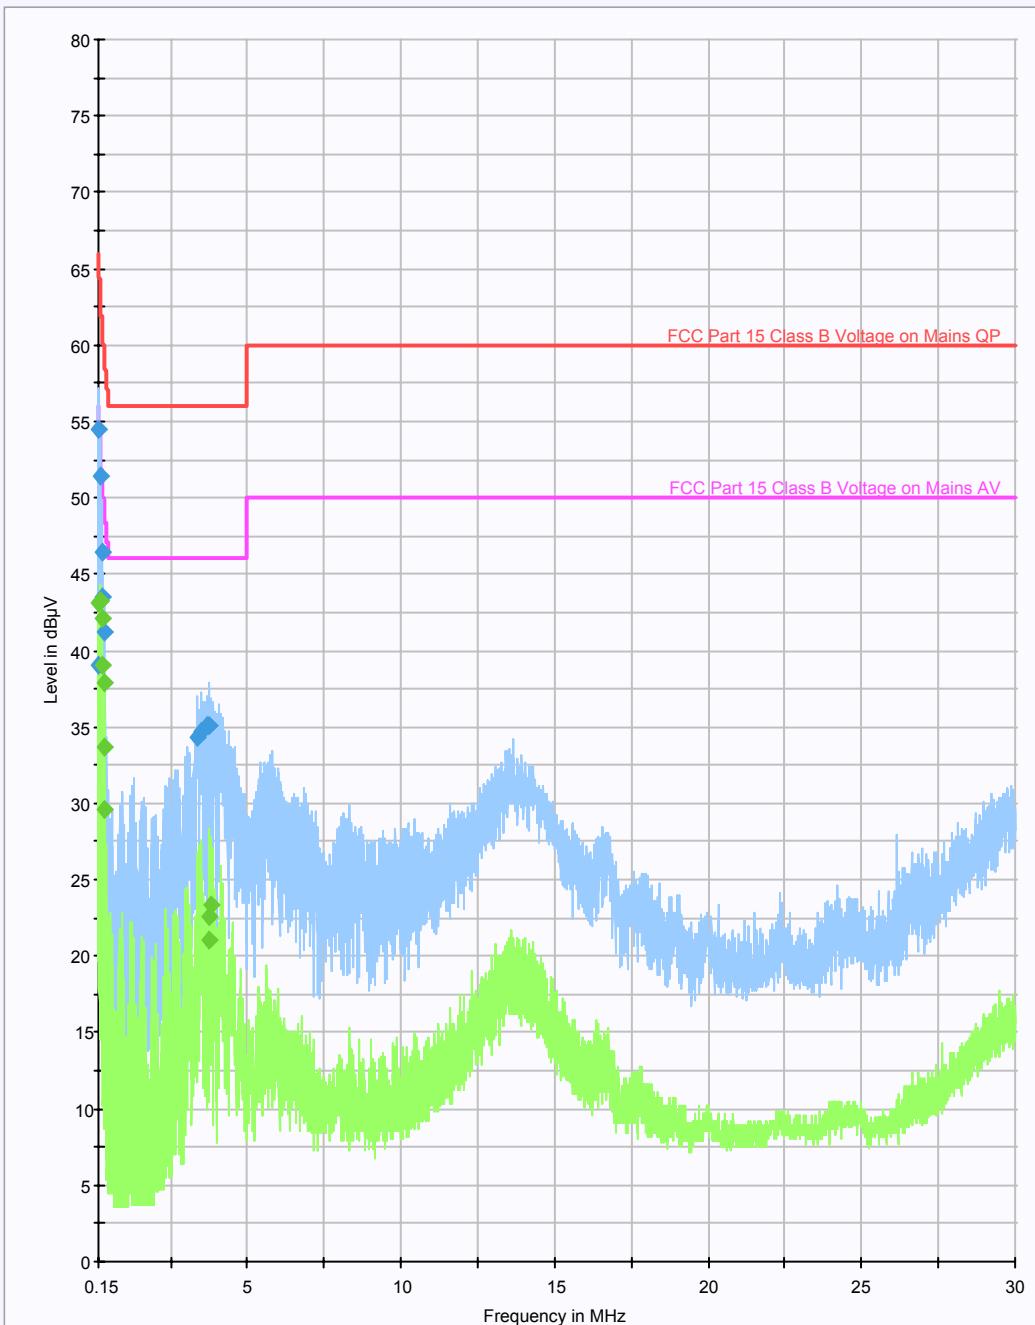

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

### **7.2.2. Receiver Radiated Spurious Emissions: Section 15.109**

The EUT was configured for radiated emission testing, as described in section 9 of this report.

Tests were performed to identify the maximum receiver or standby radiated emission levels.


#### **Results:**

#### **Electric Field Strength Measurements (Frequency Range: 30 MHz to 1000 MHz)**

Frequency (MHz)	Antenna Polarity	Q-P Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
41.326	Vertical	29.2	40.0	10.8	Complied
84.163	Vertical	28.0	40.0	12.0	Complied
101.443	Vertical	29.0	43.5	14.5	Complied
286.713	Vertical	21.4	46.0	24.6	Complied

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

**Receiver Radiated Spurious Emissions: Section 15.109 (Continued)**

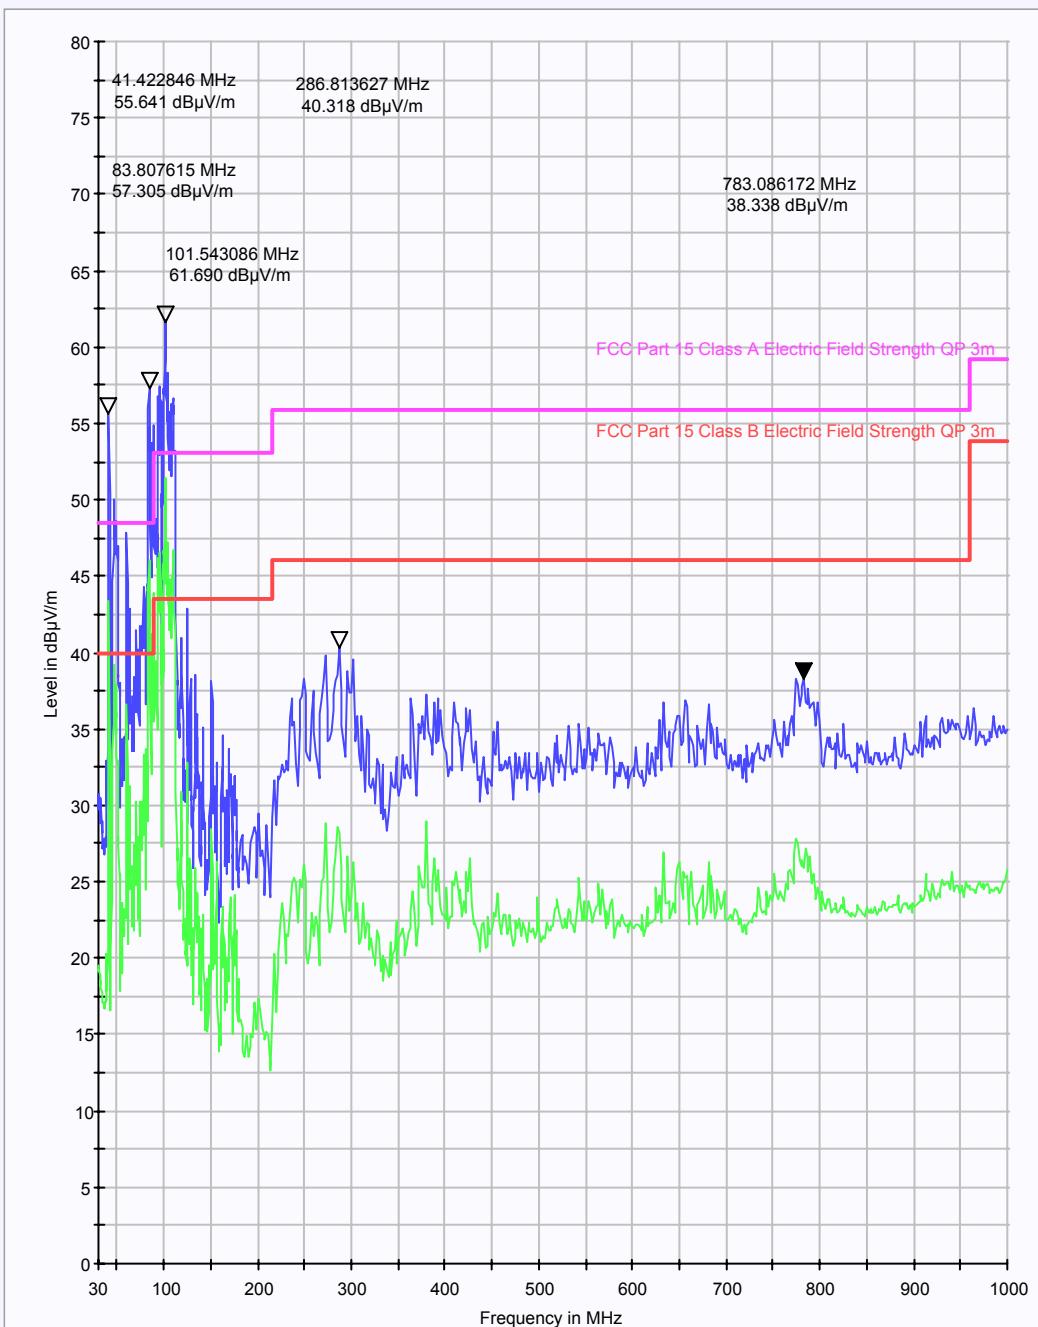

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)

**7.2.3. Receiver Radiated Spurious Emissions: Section 15.109**

**Results:**

**Electric Field Strength Measurements (Frequency Range: 1 GHz to 12.5 GHz)**

**Highest Peak Level:**



Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
3.146293	Vertical	21.3	26.1	47.4	74.0	26.6	Complied

**Highest Average Level:**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
3.146293	Vertical	21.3	26.1	47.4	54.0	6.6	Complied

**Note(s):**


1. The highest emission observed in this band was measured with a peak detector and compared to the peak and average limits.

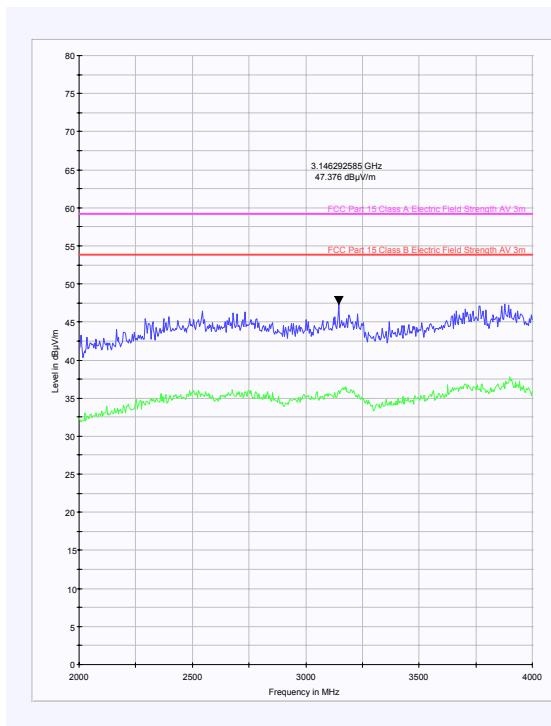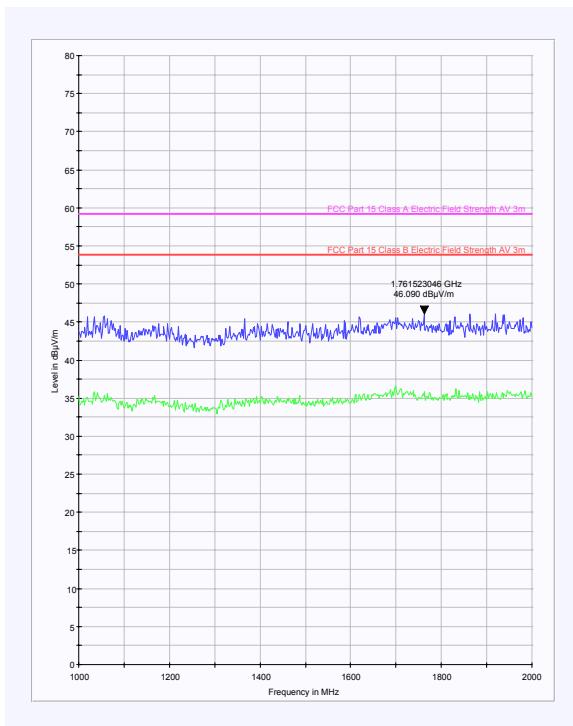


*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)


**Receiver Radiated Spurious Emissions: Section 15.109 (Continued)**

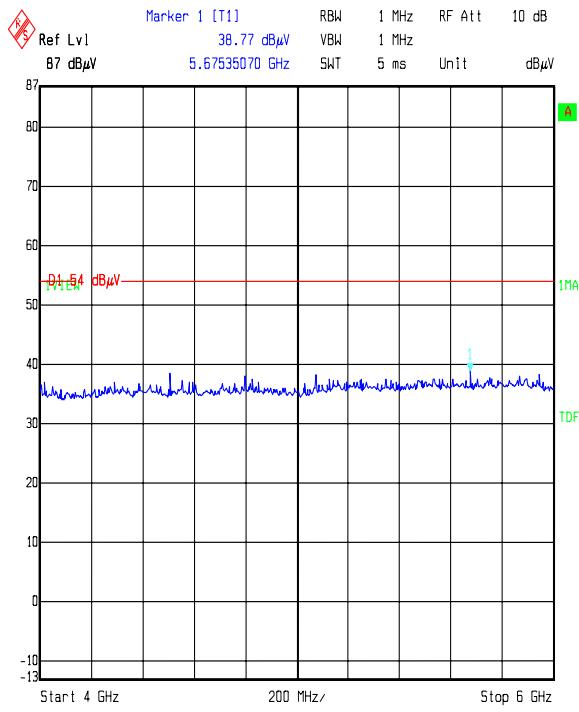

Date: 21.JUN.2007 13:52:03

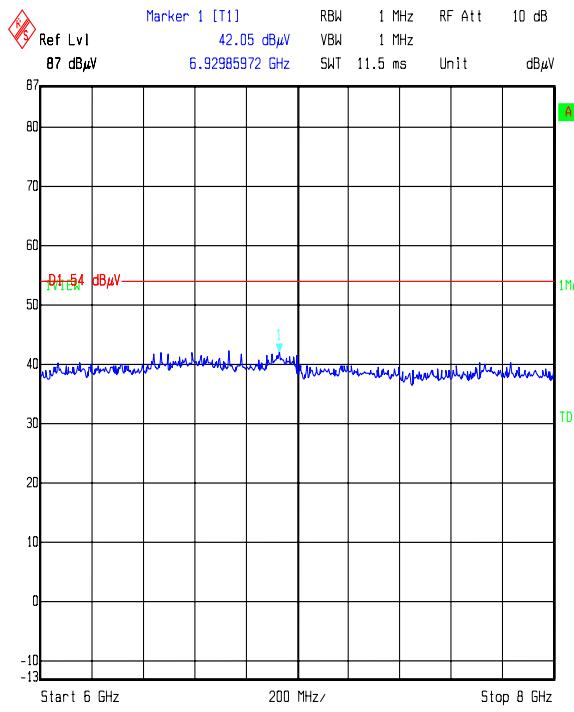

Date: 21.JUN.2007 13:56:28

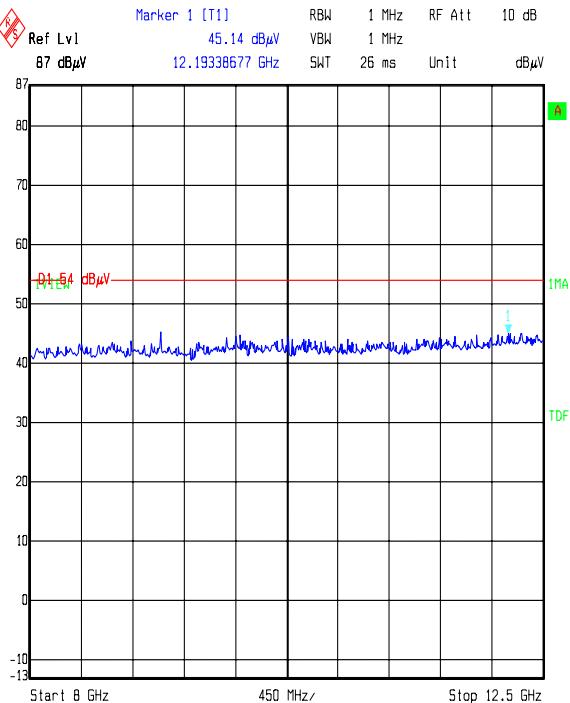

Date: 21.JUN.2007 14:01:30

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

**7.2.4. Transmitter AC Conducted Spurious Emissions: Section 15.207**

The EUT was configured for ac conducted emission measurements, as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

**Results:**

**Quasi-Peak Detector Measurements on Live and Neutral Lines**


Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.166000	Live	53.8	65.2	11.4	Complied
0.174000	Live	38.2	64.8	26.6	Complied
0.206000	Live	51.1	63.4	12.3	Complied
0.250000	Live	45.3	61.8	16.5	Complied
0.290000	Live	42.2	60.5	18.3	Complied
0.330000	Neutral	39.9	59.5	19.6	Complied
0.370000	Neutral	34.5	58.5	24.0	Complied
3.542000	Live	31.1	56.0	24.9	Complied
3.918000	Live	30.5	56.0	25.5	Complied
4.098000	Live	28.2	56.0	27.8	Complied

**Average Detector Measurements on Live and Neutral Lines**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.166000	Live	42.0	55.2	13.2	Complied
0.206000	Live	42.3	53.4	11.1	Complied
0.246000	Neutral	42.2	51.9	9.7	Complied
0.290000	Neutral	37.2	50.5	13.3	Complied
0.330000	Neutral	36.3	49.5	13.2	Complied
0.334000	Neutral	30.9	49.4	18.5	Complied
0.370000	Neutral	30.3	48.5	18.2	Complied
3.478000	Neutral	13.8	46.0	32.2	Complied
3.578000	Live	19.7	46.0	26.3	Complied
3.894000	Live	16.5	46.0	29.5	Complied

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

**Transmitter AC Conducted Spurious Emissions: Section 15.207 (Continued)**

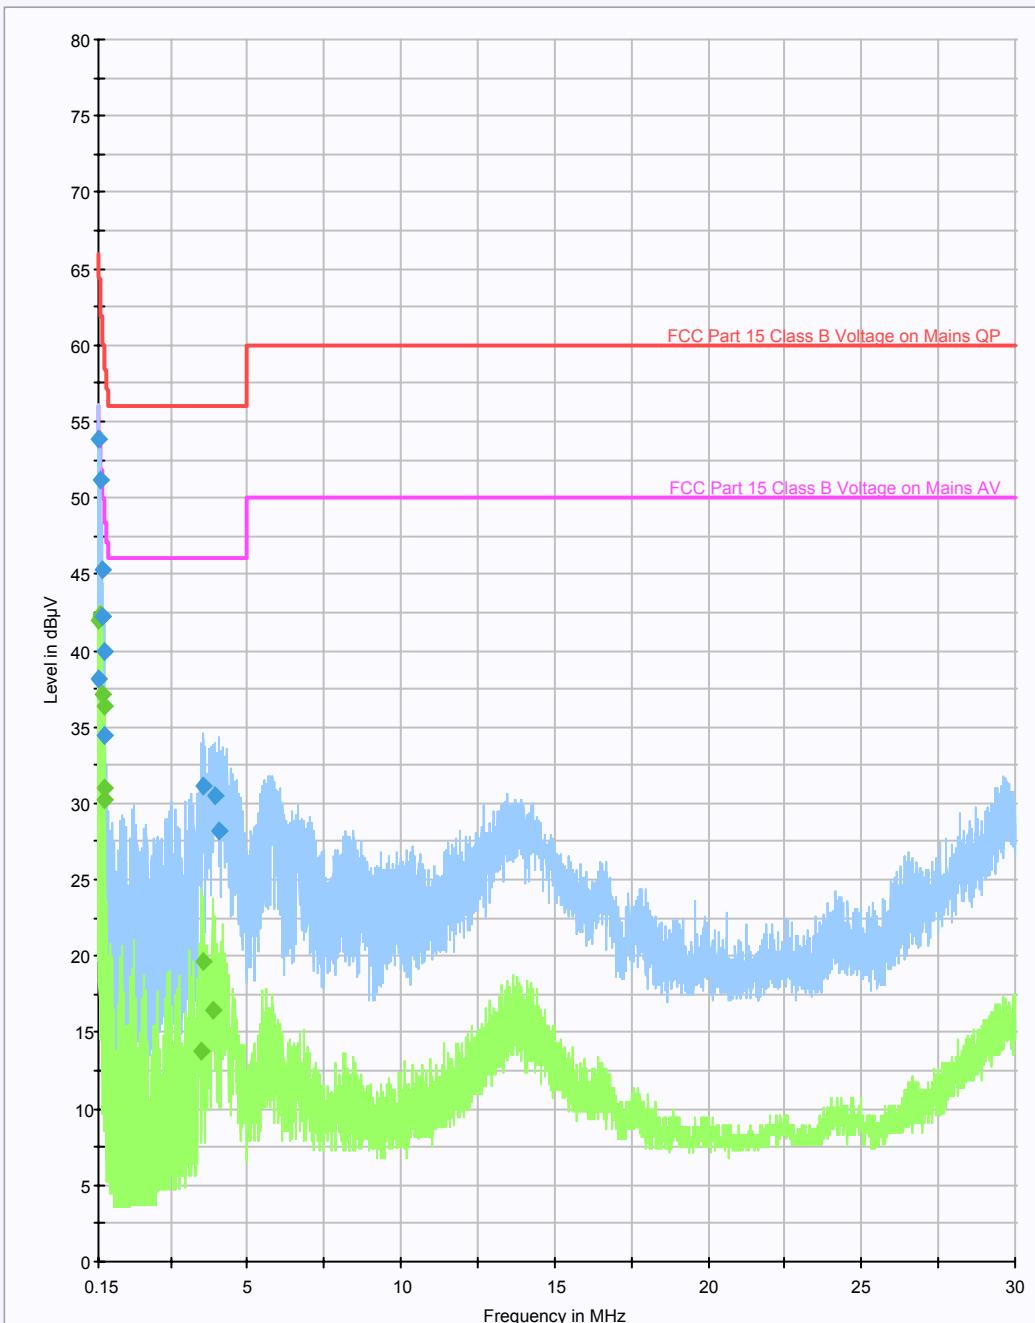

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**7.2.5. Transmitter Minimum 6 dB Bandwidth: Section 15.247(a)(2)**

The EUT was configured for 6 dB bandwidth measurements, as described in section 9 of this report.


Tests were performed to identify the 6 dB bandwidth.

**Results:**


Channel	Transmitter 6 dB Bandwidth (MHz)	Limit (MHz)	Margin (MHz)	Result
Bottom	1.579158	$\geq 0.5$	1.079158	Complied
Middle	1.575150	$\geq 0.5$	1.075150	Complied
Top	1.539078	$\geq 0.5$	1.039078	Complied

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)


**Transmitter Minimum 6 dB Bandwidth: Section 15.247(a)(2) (Continued)**

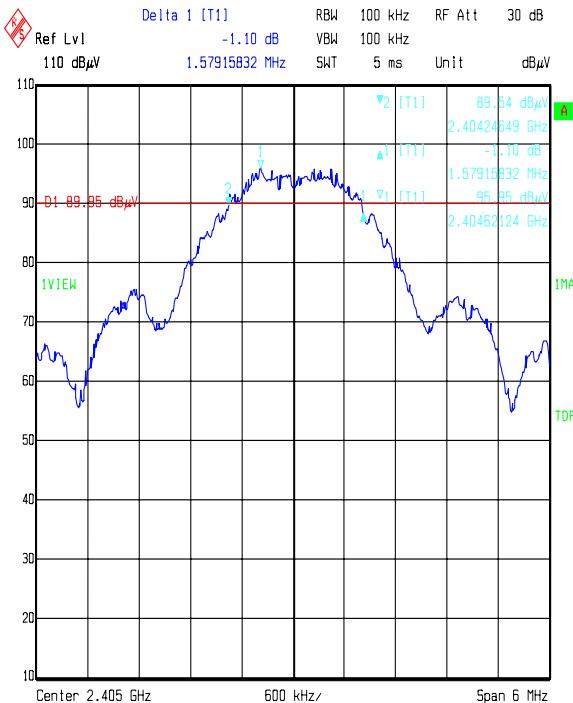

Date: 05.JUN.2007 14:30:36

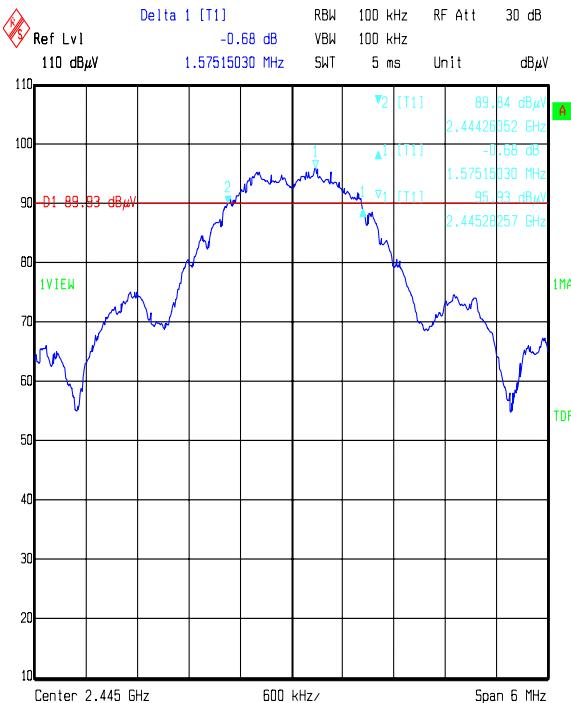

Date: 05.JUN.2007 14:39:48

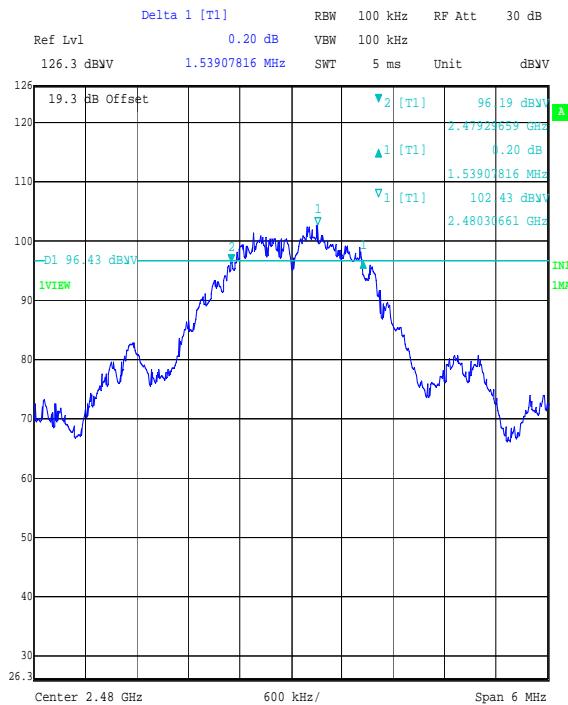

Date: 18.JUN.2007 09:24:57

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)


### **7.2.6. Transmitter 20 dB Bandwidth: Section 2.1049**

The EUT was configured for 20 dB bandwidth measurements, as described in section 9 of this report.

Tests were performed to identify the 20 dB bandwidth.

#### **Results:**

Transmitter 20 dB Bandwidth (MHz)
3.755511

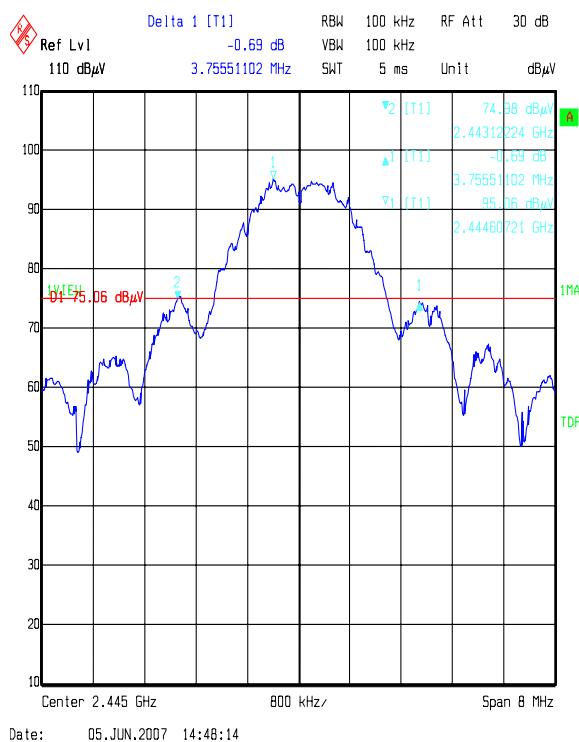

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**7.2.7. Transmitter Peak Power Spectral Density: Section 15.247(e)**

The EUT was configured for transmitter peak power spectral density measurements, as described in section 9 of this report.


Tests were performed to identify the transmitter peak power spectral density.

**Results:**


Channel	Output Power (dBm / 3 kHz)	Limit (dBm / 3 kHz)	Margin (dB)	Result
Bottom	-14.6	8.0	22.6	Complied
Middle	-14.8	8.0	22.8	Complied
Top	-16.0	8.0	24.0	Complied

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)


**Transmitter Peak Power Spectral Density: Section 15.247(e) (Continued)**

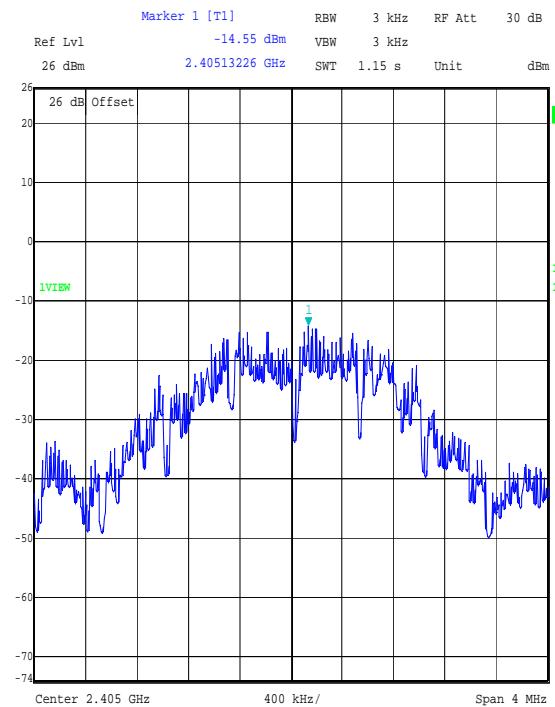

Date: 18.JUN.2007 09:51:14

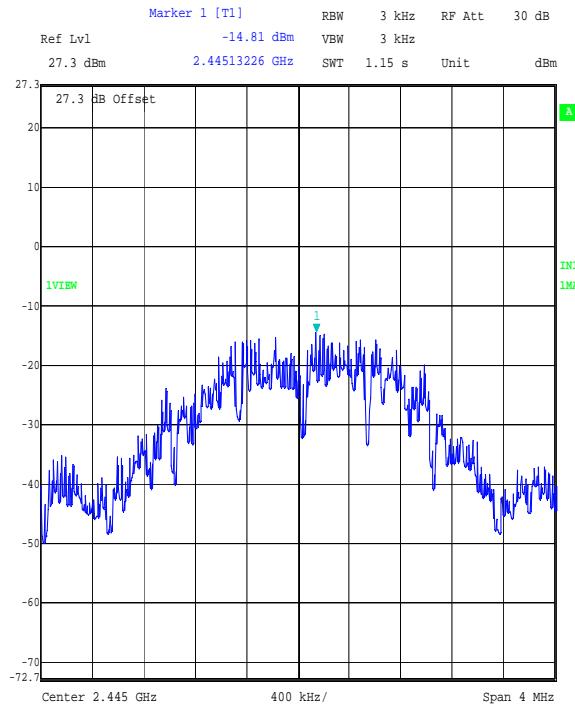

Date: 18.JUN.2007 09:45:40

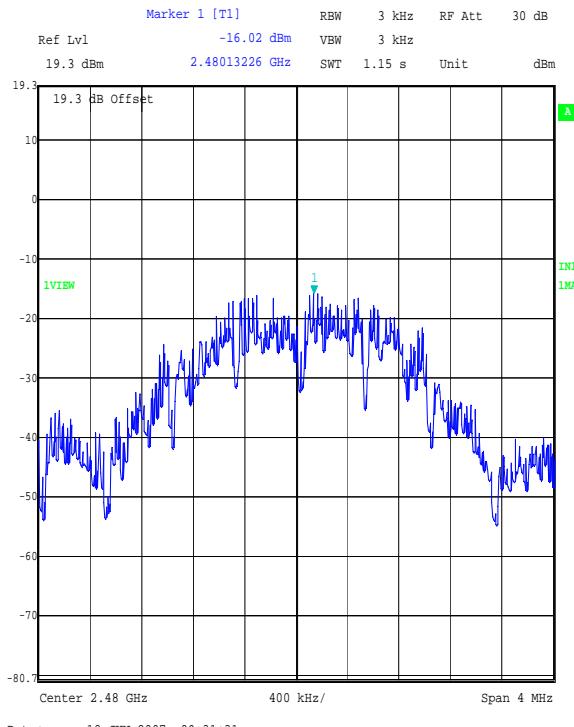

Date: 18.JUN.2007 09:31:31

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**7.2.8. Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(3)**

The EUT was configured for transmitter peak output power measurements, as described in Section 9 of this report.

Tests were performed to identify the transmitter maximum peak output power (EIRP) of the EUT.

**Results:**

**Battery Powered Devices**

Channel	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	14.8	30.0	15.2	Complied
Middle	14.6	30.0	15.4	Complied
Top	14.1	30.0	15.9	Complied

**AC Powered Devices**


Channel	Input Voltage (AC)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	93.50	14.3	30.0	15.7	Complied
Bottom	110.00	14.4	30.0	15.6	Complied
Bottom	126.50	14.3	30.0	15.7	Complied
Middle	93.50	13.6	30.0	16.4	Complied
Middle	110.00	13.7	30.0	16.3	Complied
Middle	126.50	13.6	30.0	16.4	Complied
Top	93.50	14.5	30.0	15.5	Complied
Top	110.00	14.5	30.0	15.5	Complied
Top	126.50	14.5	30.0	15.5	Complied

**Note(s):**


1. These tests were performed radiated; therefore the EUT antenna gain is encompassed in the final result and not measurable.

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)


**Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(3) (Continued)**

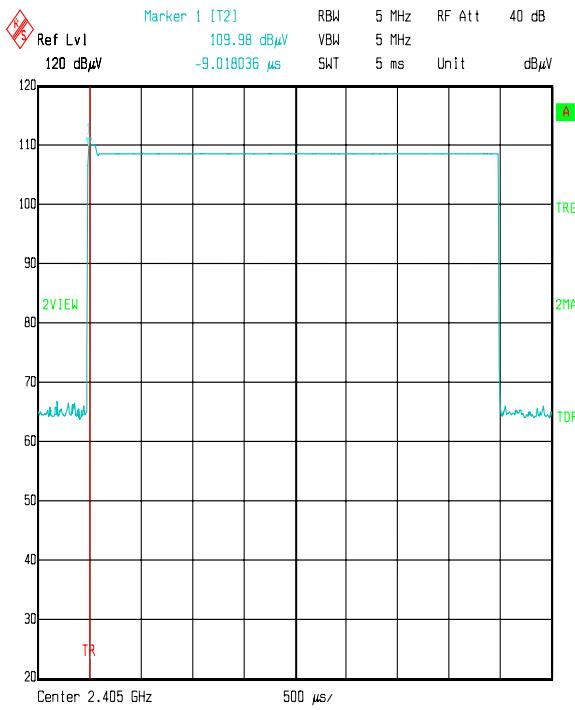

Date: 05.JUN.2007 15:46:14

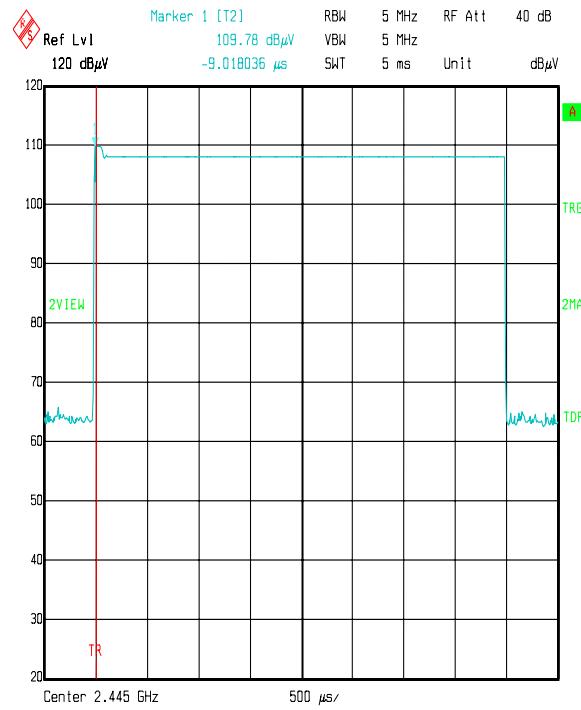

Date: 05.JUN.2007 15:38:40

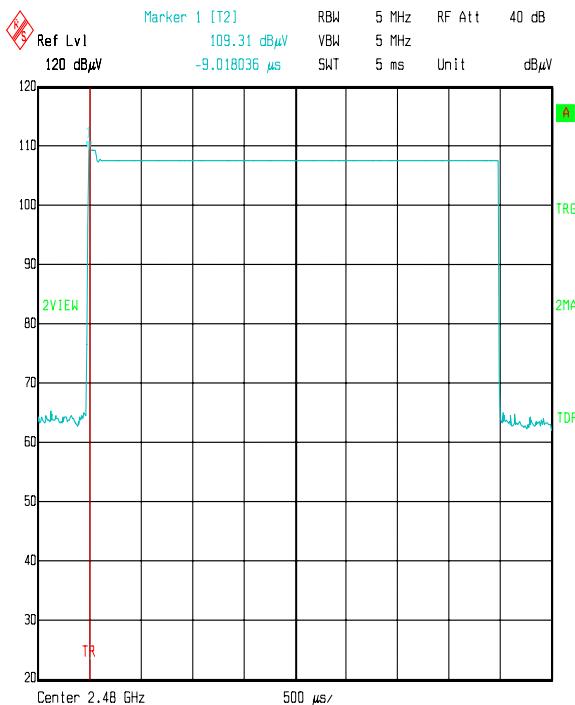

Date: 05.JUN.2007 15:50:30

*Note: Due to the pulsing nature of the transmit signal, the EIRP was measured in a zero-Hz span, to allow an accurate maximisation of the EUT position to be performed and to allow measurement of the pulse at the start of the burst.*

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

---

**7.2.9. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)**

The EUT was configured for radiated emission testing, as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

**Results:**

**Electric Field Strength Measurements: 30 MHz to 1000 MHz  
(emissions occurring in the restricted bands)**

**Top Channel**

Frequency (MHz)	Antenna Polarity	Q-P Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
273.221	Horizontal	21.4	46.0	24.6	Complied

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**7.2.10. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)**

The EUT was configured for radiated emission testing, as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

**Results:**


**Electric Field Strength Measurements: 30 MHz to 1000 MHz  
(emissions outside the restricted bands)**

**Top Channel**

Frequency (MHz)	Antenna Polarity	Peak Level (dB $\mu$ V/m)	-20 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
47.134	Vertical	29.2	82.2	53.0	Complied
84.163	Vertical	28.0	82.2	54.2	Complied
107.039	Vertical	29.0	82.2	53.2	Complied

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

**Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)**

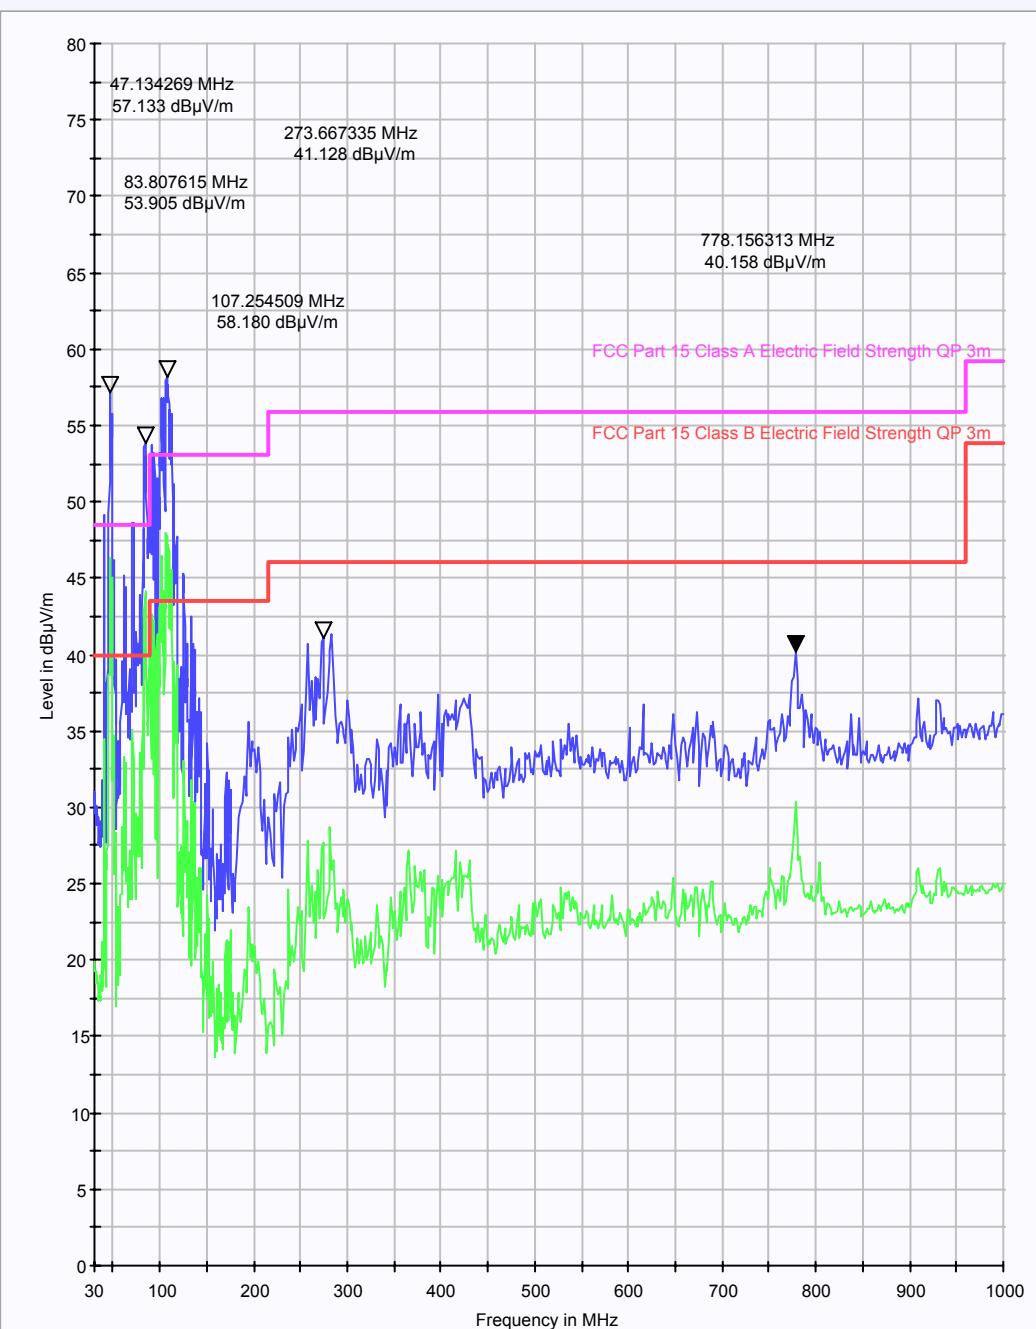

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

**7.2.11. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)**

The EUT was configured for radiated emission testing, as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

**Results:**

**Electric Field Strength Measurements (Frequency Range: 1 GHz to 25 GHz)  
 (emissions occurring in the restricted bands)**

**Highest Peak Level: Bottom Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4.809619	Horizontal	65.1	-5.3	59.8	74.0	14.2	Complied
4.889779	Horizontal	65.5	-5.0	60.5	74.0	13.5	Complied
4.961923	Horizontal	66.8	-4.7	62.1	74.0	11.9	Complied
7.338677	Horizontal	51.3	-0.2	51.1	74.0	22.9	Complied
12.22294	Horizontal	48.3	5.1	53.4	74.0	20.6	Complied
12.39829	Horizontal	49.3	5.3	54.6	74.0	19.4	Complied

**Highest Average Level: Bottom Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4.809619	Horizontal	40.1	-5.3	34.8	54.0	19.2	Complied
4.889779	Horizontal	41.6	-5.0	36.6	54.0	17.4	Complied
4.961923	Horizontal	41.2	-4.7	36.5	54.0	17.5	Complied
7.338677	Horizontal	31.8	-0.2	31.6	54.0	22.4	Complied
12.22294	Horizontal	29.3	5.1	34.4	54.0	19.6	Complied
12.39829	Horizontal	31.1	5.3	36.4	54.0	17.6	Complied

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)**

**Highest Peak Level: Middle Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4.809619	Horizontal	65.1	-5.3	59.8	74.0	14.2	Complied
4.889779	Horizontal	65.5	-5.0	60.5	74.0	13.5	Complied
4.961923	Horizontal	66.8	-4.7	62.1	74.0	11.9	Complied
7.338677	Horizontal	51.3	-0.2	51.1	74.0	22.9	Complied
12.22294	Horizontal	48.3	5.1	53.4	74.0	20.6	Complied
12.39829	Horizontal	49.3	5.3	54.6	74.0	19.4	Complied

**Highest Average Level: Middle Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4.809619	Horizontal	40.1	-5.3	34.8	54.0	19.2	Complied
4.889779	Horizontal	41.6	-5.0	36.6	54.0	17.4	Complied
4.961923	Horizontal	41.2	-4.7	36.5	54.0	17.5	Complied
7.338677	Horizontal	31.8	-0.2	31.6	54.0	22.4	Complied
12.22294	Horizontal	29.3	5.1	34.4	54.0	19.6	Complied
12.39829	Horizontal	31.1	5.3	36.4	54.0	17.6	Complied

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)**

**Highest Peak Level: Top Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4.809619	Horizontal	65.1	-5.3	59.8	74.0	14.2	Complied
4.889779	Horizontal	65.5	-5.0	60.5	74.0	13.5	Complied
4.961923	Horizontal	66.8	-4.7	62.1	74.0	11.9	Complied
7.338677	Horizontal	51.3	-0.2	51.1	74.0	22.9	Complied
12.22294	Horizontal	48.3	5.1	53.4	74.0	20.6	Complied
12.39829	Horizontal	49.3	5.3	54.6	74.0	19.4	Complied

**Highest Average Level: Top Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
4.809619	Horizontal	40.1	-5.3	34.8	54.0	19.2	Complied
4.889779	Horizontal	41.6	-5.0	36.6	54.0	17.4	Complied
4.961923	Horizontal	41.2	-4.7	36.5	54.0	17.5	Complied
7.338677	Horizontal	31.8	-0.2	31.6	54.0	22.4	Complied
12.22294	Horizontal	29.3	5.1	34.4	54.0	19.6	Complied
12.39829	Horizontal	31.1	5.3	36.4	54.0	17.6	Complied

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)

**7.2.12. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a)(Continued)**

The EUT was configured for radiated emission testing, as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

**Results:**

**Electric Field Strength Measurements (Frequency Range: 1 GHz to 25 GHz)  
(emissions outside the restricted bands)**

**Highest Peak Level: Bottom Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	-20 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2.628340	Horizontal	51.8	-9.1	42.7	83.2	40.5	Complied
2.631767	Horizontal	55.6	-9.1	46.5	83.2	36.7	Complied
7.218436	Horizontal	52.2	0.2	52.4	83.2	30.8	Complied
9.778056	Horizontal	48.6	3.5	52.1	83.2	31.1	Complied
9.918336	Horizontal	51.2	3.4	54.6	83.2	28.6	Complied

**Highest Peak Level: Middle Channel**


Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	-20 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2.628340	Horizontal	51.8	-9.1	42.7	82.4	39.7	Complied
2.631767	Horizontal	55.6	-9.1	46.5	82.4	35.9	Complied
7.218436	Horizontal	52.2	0.2	52.4	82.4	30.0	Complied
9.778056	Horizontal	48.6	3.5	52.1	82.4	30.3	Complied
9.918336	Horizontal	51.2	3.4	54.6	82.4	27.8	Complied

**Highest Peak Level: Top Channel**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	-20 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2.628340	Horizontal	51.8	-9.1	42.7	82.2	39.5	Complied
2.631767	Horizontal	55.6	-9.1	46.5	82.2	35.7	Complied
7.218436	Horizontal	52.2	0.2	52.4	82.2	29.8	Complied
9.778056	Horizontal	48.6	3.5	52.1	82.2	30.1	Complied
9.918336	Horizontal	51.2	3.4	54.6	82.2	27.6	Complied

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)

**Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)**

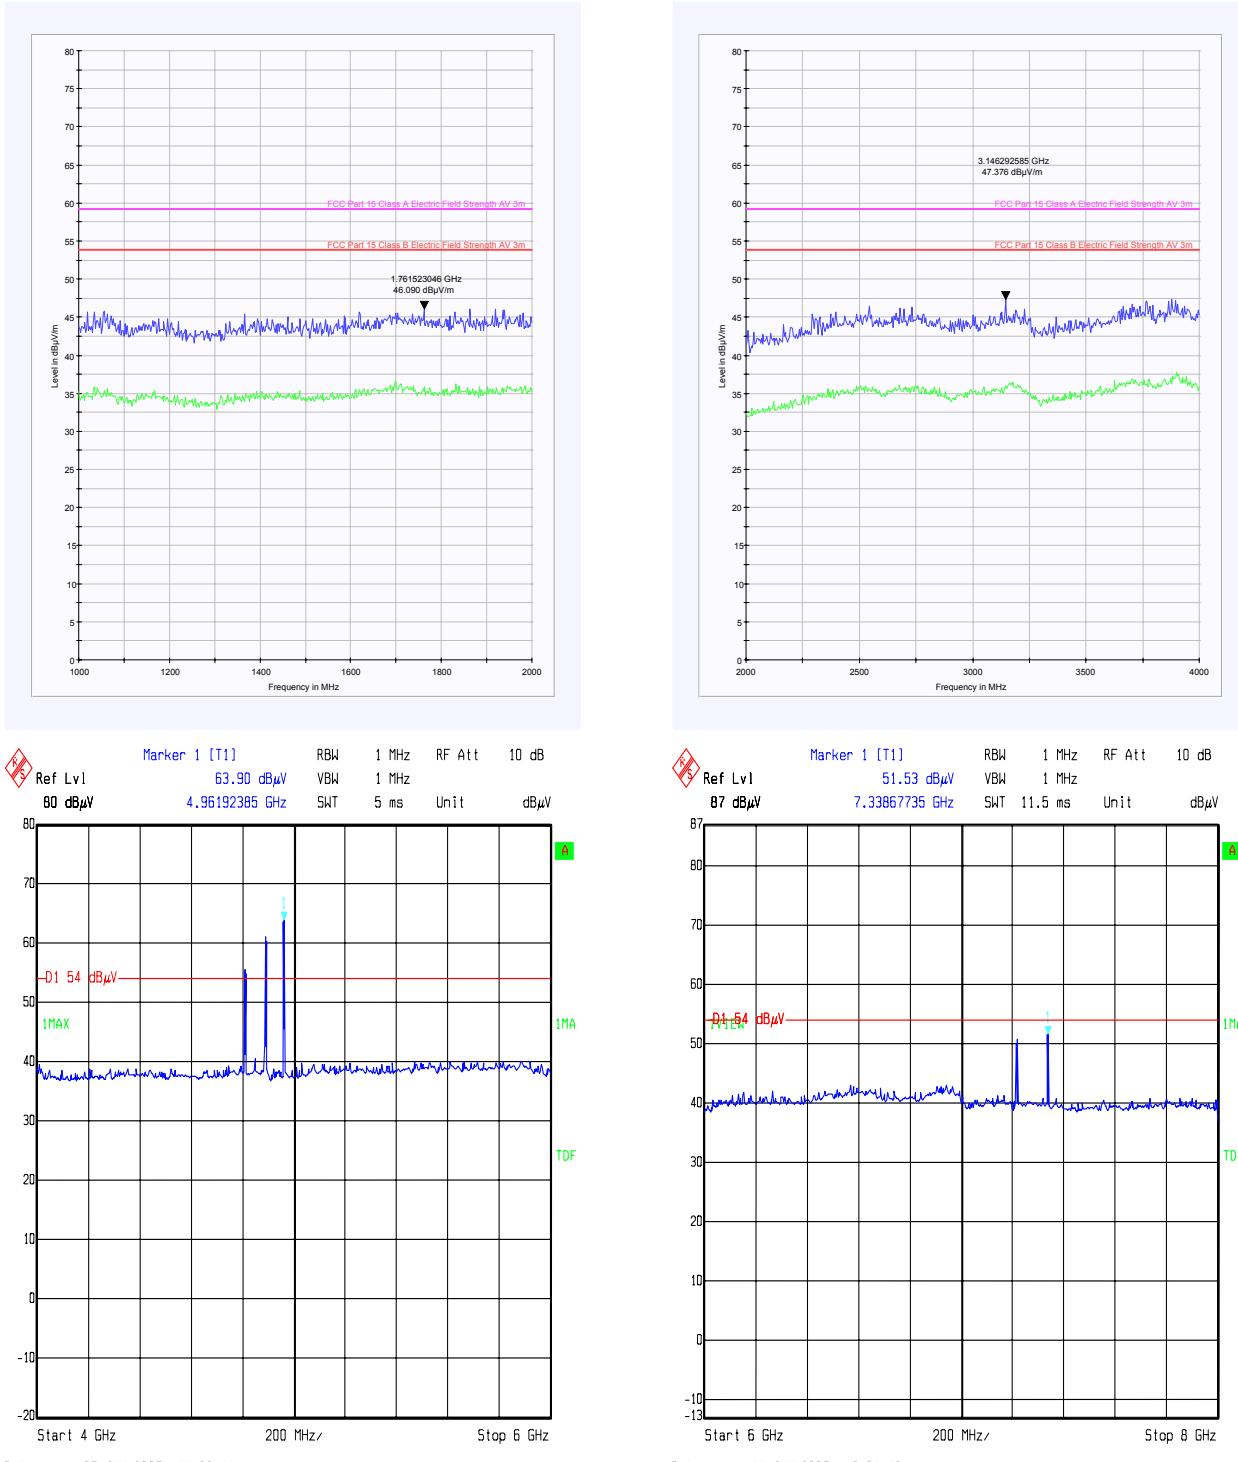


Date: 07.JUN.2007 14:22:11

Date: 11.JUN.2007 16:04:43


*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)


**Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) (Continued)**

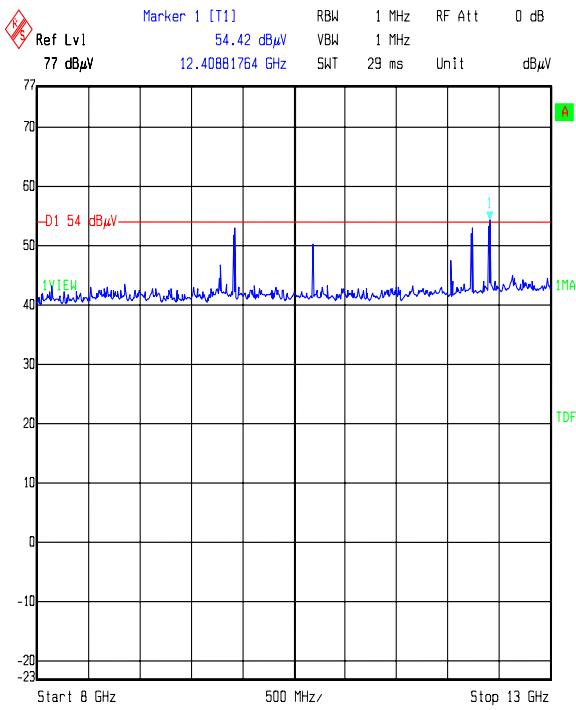

Date: 19.JUN.2007 10:07:47

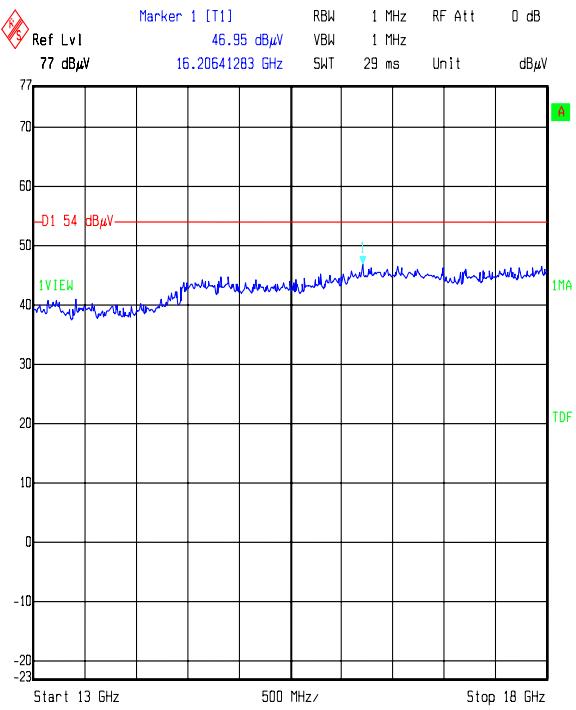

Date: 19.JUN.2007 10:36:57

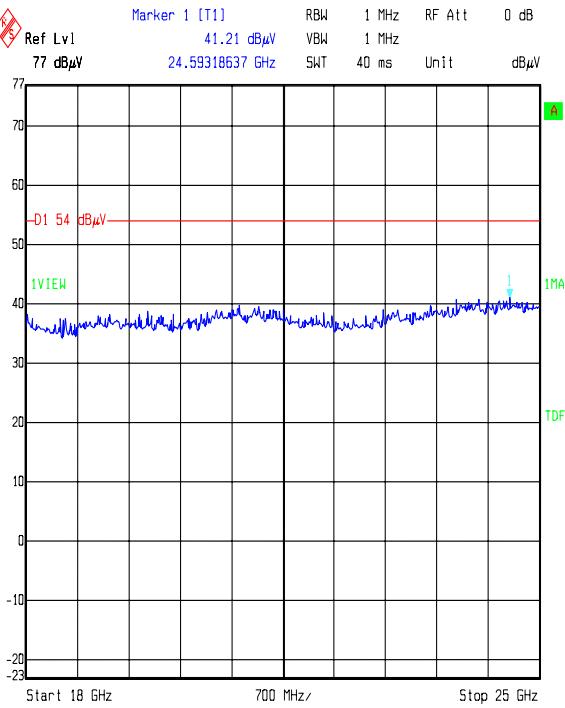

Date: 19.JUN.2007 11:16:40

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**7.2.13. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)**

The EUT was configured for band edge compliance of radiated emission measurements, as described in section 9 of this report.

Tests were performed to identify the maximum radiated band edge emissions.

**Results:**

**Electric Field Strength Measurements**

**Peak Power Level:**

Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2.4000	Horizontal	66.3	-6.5	59.8	82.7	22.9	Complied
2.4835	Horizontal	60.3	-8.0	52.3	74.0	21.7	Complied

**Note(s):**

1. The limit at 2.400 GHz is -20 dBc because it is not within a restricted band.
2. The limit at 2.4835 GHz is the FCC part 15.209 limit because it is within a restricted band.

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

---

**7.2.14. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)**

The EUT was configured for band edge compliance of radiated emission measurements, as described in section 9 of this report.

Tests were performed to identify the average radiated band edge emissions.

**Results:****Average Power Level:**


Frequency (GHz)	Antenna Polarity	Detector Level (dB $\mu$ V)	Transducer Factor (dB)	Actual Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2.4835	Horizontal	46.2	-8.0	38.2	54.0	15.8	Complied

**Note(s):**


1. *The limit at 2.4835 GHz is the FCC part 15.209 limit because it is within a restricted band.*

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)


**Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a) (Continued)**

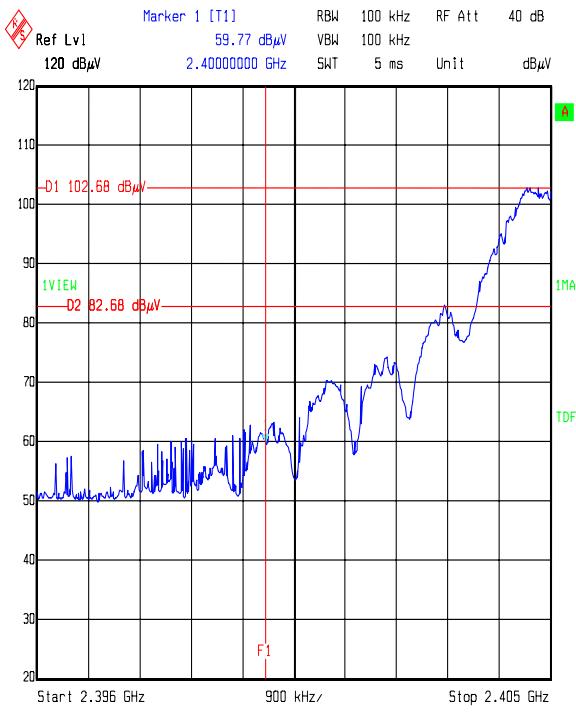

Date: 05.JUN.2007 16:32:36

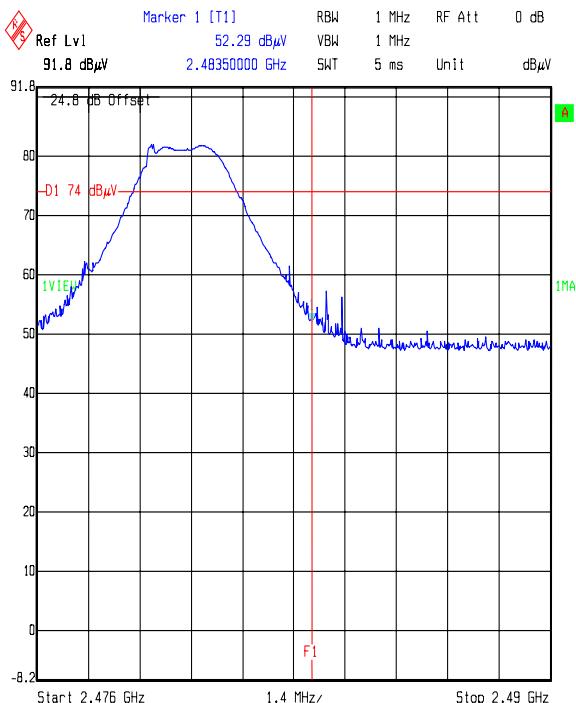

Date: 15.JUN.2007 09:32:56

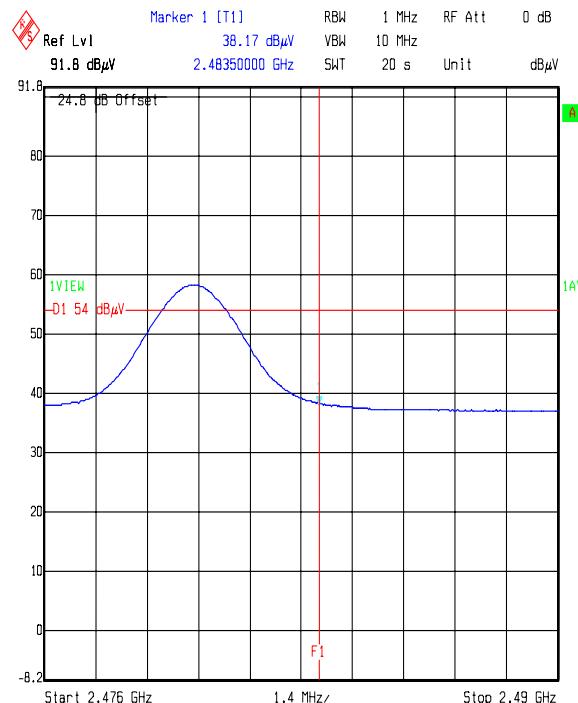

Date: 15.JUN.2007 10:49:19

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

## **8. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	+/- 3.25 dB
Transmitter Maximum Peak Output Power	Not applicable	95%	+/- 0.46 dB
Spectral Power Density	Not applicable	95%	+/- 1.2 dB
6 dB/20 dB Bandwidth	Not applicable	95%	+/- 0.12 %
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	+/- 5.26 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	+/- 1.78 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

## **9. Measurement Methods**

### **9.1. AC Mains Conducted Emissions**

AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane. The EUT was powered with 110V 60 Hz ac mains supplied via a line impedance stabilisation network (LISN).

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

<b>Receiver Function</b>	<b>Initial Scan</b>	<b>Final Measurements</b>
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	>1 s
Observation Time:	Not applicable	>15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

## **9.2. Radiated Emissions**

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. Any emission within 20 dB of the limit were then measured on the open area test site, except in cases where the noise floor was within 20 dB of the limit, in these cases the highest point of the noise floor was measured.

Where an emission fell inside a restricted band, measurements were made at the appropriate test distance using a measuring receiver with a quasi peak detector for measurements below 1000 MHz and an average and peak detector for measurements above 1000 MHz. A peak detector was used for all other measurements.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4.

All measurements on the open area test site were performed using broadband antennas in both vertical and horizontal polarisations.

On the open area test site, at each frequency where a signal was to be measured, the trace was maximised by rotating a turntable through 360°. The angle at which the maximum signal was observed was locked out. For frequencies below 1000 MHz the test antenna was varied in height between 1 m and 4 m in order to further maximise the target emission.

For frequencies above 1000 MHz where a horn antenna was used, height searching was performed to locate the optimal height of the horn with respect to the EUT. At this point the horn was locked off and the turntable was again rotated through 360° to maximise the target signal. It should be noted that the received signal from the EUT would diminish very quickly after it exits the beam width of the horn antenna, for this reason it may not be necessary to fully height search with the horns.

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**Radiated Emissions (Continued)**

At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Scans were performed to the upper frequency limits as stated in section 15.33

The final field strength was determined as the indicated level in dB $\mu$ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements <1 GHz	Final Measurements ≥1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak / Average
Mode:	Max Hold	Not applicable	Max Hold
Bandwidth:	(120 kHz <1 GHz) (1 MHz ≥1 GHz)	120 kHz	1 MHz
Amplitude Range:	100 dB	100 dB	100 dB
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

### **9.3. Minimum 6 dB Bandwidth**

The EUT and spectrum analyser were configured as for radiated measurements.

To determine the 6 dB bandwidth, a resolution bandwidth and video bandwidth of 100 kHz was used.

The analyser was set to a span of 6 MHz, which is greater than twice the 6 dB bandwidth and for a maximum hold scan to capture the profile of the signal. The peak level was then determined, and a reference established 6 dB below the peak level. The bandwidth was determined at the points where the 6 dB reference crossed the profile of the emission.

### **9.4. Transmitter 20 dB Bandwidth**

The EUT and spectrum analyser was configured as for transmitter radiated measurements.

To determine the occupied bandwidth, a resolution bandwidth of 100 kHz was used, which is greater than 1% of the 20 dB bandwidth. A video bandwidth of a least the same value was used. The analyser was set for a maximum hold scan to capture the profile of the signal. The peak level was then determined, and a reference line was drawn 20 dB below the peak level. The bandwidth was determined at the points where the 20 dB reference crossed the profile of the emission.

### **9.5. Spectral Power Density**

The EUT and spectrum analyser were configured as for conducted antenna port emissions measurements.

Prior to testing being performed a suitable RF attenuator and cables were calibrated for the required frequencies. For each frequency the calibrated level of the attenuator and cable were entered as an offset into the spectrum analyser to compensate for the losses in the measurement set up.

Prior to the measurement being taken the spectrum analyser was tuned to the fundamental frequency of the EUT.

A resolution bandwidth of 3 kHz was selected and the analyser was set to a span greater than twice the 6 dB bandwidth. The trace was max held and a reading was taken at the peak point of the trace.

### **9.6. Peak Output Power**

The EUT and spectrum analyser were configured as for conducted antenna port emissions measurements.

Prior to testing being performed a suitable RF attenuator and cables were calibrated for the required frequencies. For each frequency to be measured, the calibrated level of the attenuator and cable were entered as an offset into a spectrum analyser to compensate for the measurement set up.

To determine the transmitter output power, the EUT was operated at maximum power and a result was obtained from the spectrum analyser, using a suitable resolution bandwidth.

**Test of:** Multitone Electronics Plc  
EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

## **9.7. Band Edge Compliance of RF Radiated Emissions**

The EUT and spectrum analyser were configured as for radiated measurements.

To determine band edge compliance, the analyser resolution bandwidth was set to  $\geq 1\%$  of the analyser span. The video bandwidth was set to be  $\geq$  to the resolution bandwidth. The sweep was set to auto and the detector to peak. The trace was set to max hold and a trace was produced.

A plot of the lower band edge of the allocated frequency band was produced. A marker was set to the level of the highest in band emission with a limit line set to 20 dB below this. The marker was then placed on the highest out of band emission (the specification states that either the band edge level must be measured or the highest out of band emission, whichever is the greater). The plots show that the highest out of band emission complies with the 20 dBc Limit.

The above procedure was then repeated for the upper band edge except that, as the upper band edge fell on a restricted band edge (as defined in section 15.205(a)), the limit for the restricted band was applied instead of the 20 dBc limit i.e. the general limits defined in section 15.209(a).

Final measurements were performed on the worst-case configuration as described in part 15.31(i).

## **9.8. Effective Radiated Power (ERP)**

ERP measurements were performed in accordance with the standard, against appropriate limits.

The ERP was measured with the EUT arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4. The transmitter was fitted with an integral antenna; as such all radiated tests were performed with the unit operating into the integral antenna.

The level of the ERP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For ERP measurements a dipole antenna was used. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater PAD. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The ERP was calculated as:-

$$\text{ERP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**Effective Radiated Power (ERP) (Continued)**

Circumstances where the signal generator could not produce the desired power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The ERP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated ERP to obtain the substituted EUT ERP.

Delta (dB) = EUT – SG

Where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual ERP is calculated as:

ERP SG= Signal Generator Level - Cable Loss + Antenna Gain

The EUT ERP is calculated as:

ERP EUT = ERP SG + Delta.

The test equipment settings for ERP measurements were as follows:

Receiver Function	Setting
Detector Type:	Peak
Mode:	Not applicable
Bandwidth:	$\geq$ Emission Bandwidth
Amplitude Range:	100 dB
Sweep Time:	Coupled

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

## Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A028	Horn Antenna 1-2 GH	Eaton	91888-2	304	08 Jun 2006	36
A031	2 to 4 GHz Horn Antenna	Eaton	91889-2	557	08 Jun 2006	36
A088	Variable Transformer	Zenith	Y20-HM	9029	Not calibrated	-
A1037	Bilog Antenna	Chase EMC Ltd	CBL6112B	2413	20 Sep 2006	12
A1069	Single Phase LISN	Rohde & Schwarz	ESH3-Z5	837469/012	09 Feb 2007	12
A1362	2.3 - 4.4 GHz Horn Antenna	Stoddart Aircraft Radio Co., Inc.	91889-1	N/A	08 Jun 2006	12
A1515	1.0 to 4.4 GHz Horn Antenna	Stoddart Aircraft Radio Co., Inc	92341-1	0436	17 Nov 2006	12
A1534	Preamplifier	Hewlett Packard	8449B OPT H02	3008A00405	Cal before use	-
A1830	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100668	Cal before use	-
A253	Horn Antenna	Flann Microwave	12240-20	128	17 Nov 2006	36
A254	Horn Antenna	Flann Microwave	14240-20	139	17 Nov 2006	36
A255	Horn Antenna	Flann Microwave	16240-20	519	17 Nov 2006	36
A256	Horn Antenna	Flann Microwave	18240-20	400	17 Nov 2006	36
A259	Bilog Antenna	Chase	CBL6111	1513	13 Mar 2007	12
A276	OATS Positioning Controller	Rohde & Schwarz	HCC		Not calibrated	-
A392	Attenuator	Suhner	6803.17.B	None	Cal before use	-
A436	Horn Antenna	Flann	20240-20	330	24 Apr 2006	36
A553	Bi-log Antenna	Chase	CBL6111A	1593	01 Nov 2006	12

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**Test Equipment Used (Continued)**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
C055	Cable	RFI	None	None	05 Jun 2007	12
C1065	Cable	Rosenberger	UFA210-1-7872	0985	06 Jun 2007	12
C1165	Cable	Rosenberger Micro-Coax	FA210A1020 007070	43189-1	05 Jun 2007	12
C1167	Cable	Rosenberger Micro-Coax	FA210A1030 007070	43190-01	05 Jun 2007	12
C1191	Cable	Rosenburg	FA210A1015 M3030	27141-06	Cal before use	-
C1193	Cable	Utiflex	FA147A1015 M2020A	BUA02C 0154	Cal before use	-
C1268	Cable	Rosenberger	FA210A0075 008080	49356-1	Cal before use	-
C151	Cable	Rosenberger	UFA210A-1-1181-70x70	None	Cal before use	-
C160	Cable	Rosenberger	UFA210A-1-1181-70x70	None	Cal before use	-
C348	Cable	Rosenberger	UFA210A-1-1181-70x70	2993	Cal before use	-
C363	Cable	Rosenberger	RG142	None	Cal before use	-
C461	Cable	Rosenberger	UFA210A-1-1182-704704	98H0305	Cal before use	-
C468	Cable	Rosenberger	UFA210A-1-3937-504504	98L0440	Cal before use	-
G048	9 kHz to 1.04 GHz Frequency Range.	Rohde & Schwarz	SMY 01	841 104/032	13 Jun 2006	12
M024	EZM Spectrum Monitor	Rohde & Schwarz	EZM	873 952/006	Calibrated before use	12

**Test of:** Multitone Electronics Plc  
 EkoTek - Hub  
**To:** FCC Part 15.247: 2006 (Subpart C)

---

**Test Equipment Used (Continued)**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
M044	ESVP Receiver	Rohde & Schwarz	ESVP	891 845/026	06 Mar 2007	12
M1124	ESIB Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K	08 Sep 2006	12
M1242	Spectrum Analyser	Rohde & Schwarz, Inc.	FSEM30	845986_022	08 Sep 2006	12
M1263	EMI Test Receiver	Rohde & Schwarz	ESIB7	100265	25 Jan 2007	12
M1269	Multimeter	Fluke	179	90250210	05 Mar 2007	12
S201	3m & 10m OATS	RFI	1		25 May 2007	12
S202	3m OATS	RFI	2	S202-15011990	17 Nov 2006	12
S207	PMR Bench Site	RFI	7		Not calibrated	-
S212	Emissions Screened Room	RFI	12		Not calibrated	-

**NB** In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule. All equipment was within calibration at the time of the test.

Test of: Multitone Electronics Plc  
EkoTek - Hub  
To: FCC Part 15.247: 2006 (Subpart C)

---


## **Appendix 2. Test Configuration Drawings**

This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\48909JD09A\EMICON	Test configuration for measurement of conducted emissions.
DRG\48909JD09A\EMIRAD	Test configuration for measurement of radiated emissions.

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)

DRG\48909JD09A\EMICON

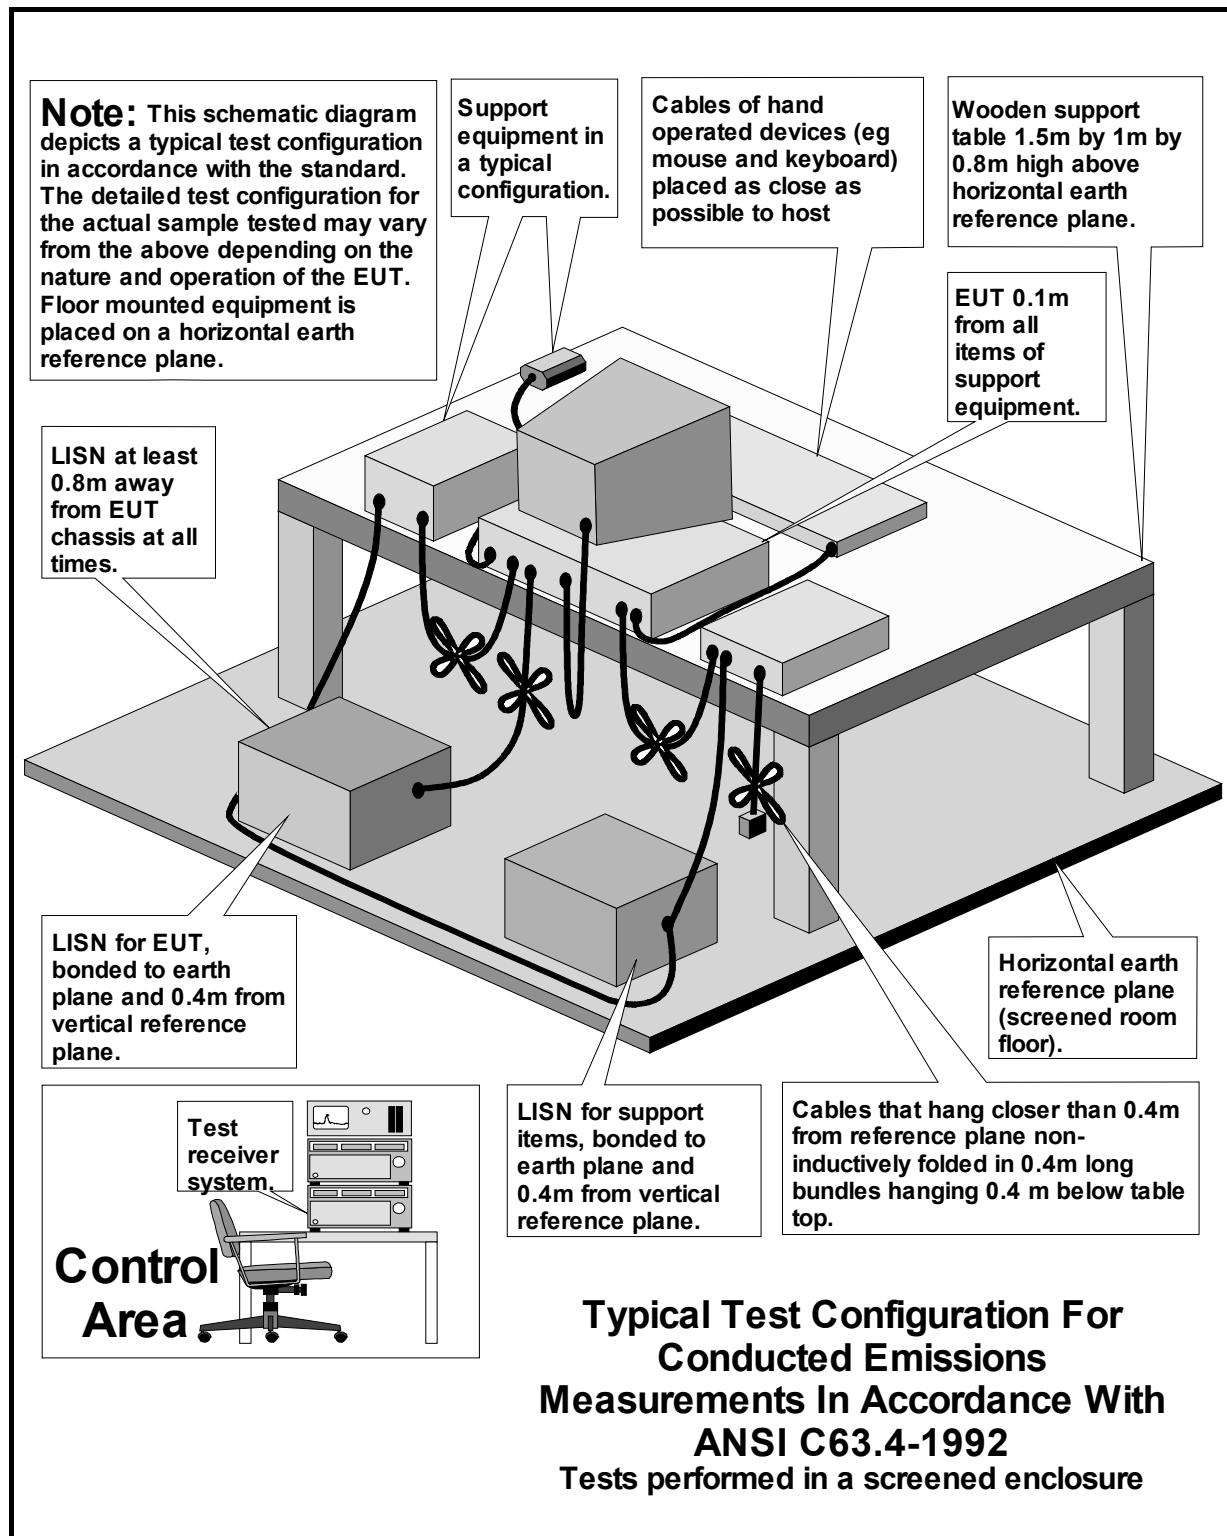

*Note: This diagram is also valid for the latest version of ANSI C63.4-2003*

**Test of:** Multitone Electronics Plc  
**EkoTek - Hub**  
**To:** FCC Part 15.247: 2006 (Subpart C)

DRG\48909JD09A\EMIRAD

