

System Check_Body_2450MHz_130125**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130125 Medium parameters used: $f = 2450$ MHz; $\sigma = 2.015$ mho/m; $\epsilon_r = 53.957$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2012/12/5
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Configuration/Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 20.7 mW/g


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.760 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.279 mW/g

SAR(1 g) = 12.2 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 19.1 mW/g

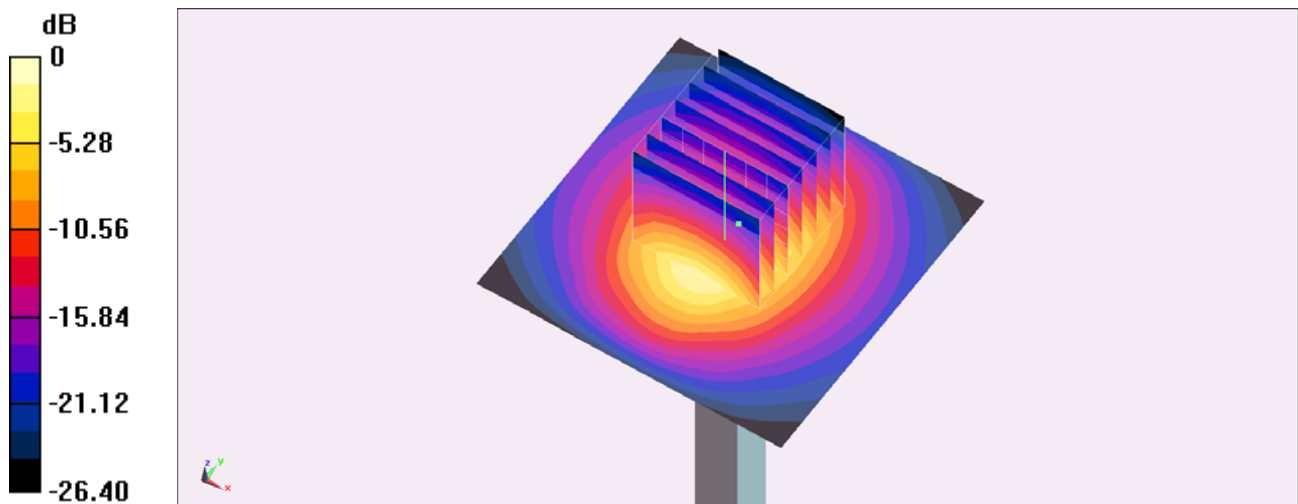

0 dB = 19.1 mW/g = 25.62 dB mW/g