

RT-220G

Manual

FCC Regulation:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

It is a rolling code transmitter for garage door opener and
Lighting remote control device with easy set up procedure.

Frequency switch –

1. Remove the transmitter cover

Remove the access cover from the front of transmitter by sliding the cover away from the top of the transmitter (Figure A) .This will expose the battery and the dip switche.





Figure A

2. Select the correct frequency according to your existing garage door opener on the dip switch (Figure B).

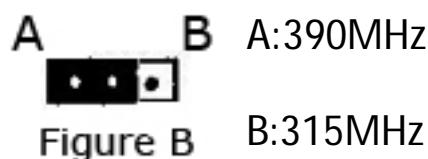

2. Programming – same as your original transmitter-receiver programming procedure. Each button has to program the device whom you wish to control.

3. Operation –

- a. There are three buttons; each button can control one remote control device.
- b. Press the button and release; it will transmit a signal once.

4. Battery –

9 Volt batteries included. (Type : 23 A)

NOTICE : The changes or modifications not expressly approved by the party responsible for compliance could void user's authority to operate the equipment .