



TEST REPORT TO FCC PART 15 SUBPART B AND EN55022 FOR:

GRAPHIC DIGITIZER MODEL NO. 11180, 11180A, 35180 AND 35180A

FCC ID: ECP11180

PREPARED FOR:

CalComp
Input Technologies Division
14555 North 82nd Street
Scottsdale, AZ 85260

PREPARED BY:

Kenneth B. Jacobson
Product Support Engineer
CalComp
Input Technologies Division
14555 North 82nd Street
Scottsdale, AZ 85260

DATE OF REPORT:

08/25/98

TABLE OF CONTENTS

<u>CONTENT</u>	<u>PAGE</u>
I. Overview of Test Report	2
II. Statement of Compliance	3
III. Description of the Test Sample	4
IV. List of Subassemblies of Test Sample (If Applicable)	5
V. Test Equipment and Calibration	6
VI. Cable Loss and Antenna Factors	7-13
VII. Description of Equipment and Cables Used for Testing	14
VIII. Radiated Test Procedure	15
IX. Radiated Test Data/Photographs	16-18
X. Conducted Test Procedure	19
XI. Conducted Test Data/Photographs	20-27
XII. Summary of Results	28

I. OVERVIEW OF TEST REPORT

The procedures used for the conducted and radiated tests were derived from the American National Standard ANSI C63.4-1991 as stated in FCC CFR 47, Part 15, Paragraph 15.31. The test side attenuation and layout was done in accordance with ANSI C63.4-1991 and is on file with the FCC as required in FCC CFR 47, Part 2, Paragraph 2.948.

PRODUCT TESTED: Digitizer Model No. 11180, 11180A, 35180 and 35180A

TRADE NAME: Creation Station

APPLICANT: CalComp Input Technologies Division
14555 North 82nd Street
Scottsdale, AZ 85260


MANUFACTURER: Same as Applicant

TEST FACILITY LOCATION: Same as Applicant

TEST DATE: 07/21/98

The measurement data contained in this report reflects an accurate representation of the emission characteristics of the produce mentioned above.

REPORT PREPARED AND APPROVED BY:

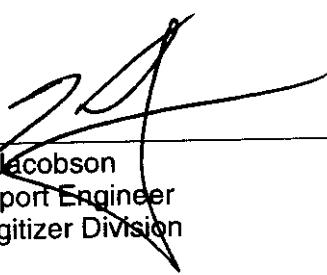
Kenneth B. Jacobson
Product Support Engineer
CalComp Digitizer Division

II. STATEMENT OF COMPLIANCE

Under the test configuration as described in this test report, the product tested has shown that it complies to the requirements of:

FCC RULES, PART 15, SUBPART B, CLASS B LIMITS

The product tested has shown that it also complies to the requirements of:

EC STANDARD EN55022/CISPR 22, CLASS B LIMITS

We, CalComp Digitizer Division, assume full responsibility to manufacture the product as shown in the enclosed photographs to uphold compliance to the FCC rules.

SIGNED:



Don Addiss

TITLE:

Director of Engineering

DATE:



III. DESCRIPTION OF TEST SAMPLE

The "Digitizer Tested" is a microprocessor-based device that can convert graphic information into accurate digital information for entry into the host computer. The digitizer can be used for drawing, drafting, mapping, desktop publishing, animation, menuing, and presentation graphics.

The basic operation of the digitizer is as follows:

The transducer electromagnetically induces voltages into precisely positioned grid conductors beneath the tablets surface. The digitizers electronics finds the grid conductors with the largest signals and converts the grid signals into digital position data. The digitizer then sends the information out the communication port to the host. The data generated indicates the distance vertically and horizontally from the origin on the digitizers surface.

The digitizer intentionally radiates a 1.8432 MHZ signal through the grid to the transducer. When the transducer receives this signal, it converts it's energy into a DC voltage source via a tank circuit and this DC voltage powers the electronic components in the transducer such that it can radiate back to the digitizer (also at 1.8432 MHZ) for positioning and button information as outlined previously.

The digitizer also can be installed in a Macintosh environment without any change to the electronics or PWB. An ADB cable is installed at the manufactured stage in place of a RS-232 cable which tells the PIC 16C65 micro to transmit ADB data instead of RS-232 data by shorting out certain pins on the connector. The micro uses an inverter to drive a transistor for the ADB interface. These parts are always installed and has shown during testing that no new emissions are produced (no new clocks are generated). For test purposes, Model 11180 was used for testing.

Model 35180 is identical to Model 11180 as well as Model 35180A is identical to Model 11180A, the model number is the only difference. The reason for the different model numbers is for marketing the digitizer in different markets, i.e., CAD design versus graphic artist use.

The digitizer operates with 5VDC which is powered from the host via the I/O cable.

IV. SUBASSEMBLIES OF TEST SAMPLE

The Model 11180, 11180A, 35180 and 35180A Digitizer has only one PWB. Any other subassemblies/accessories would be the cursor. All of these are shown in the attached photographs of the products.

V. TEST EQUIPMENT AND CALIBRATION

The following is a list of equipment and calibration dates that are used at CalComp's test site.

TEST EQUIPMENT	MODEL	CALIBRATION DATE	FREQUENCY
Com-Power Log Periodic Antenna	CPAL-100	06/08/98	1 Year
Com-Power Biconical Antenna	AB-100	05/28/98	1 Year
Com-Power Loop Antenna	AL-130	06/26/98	1 Year
EMCO LISN	3825/2	03/28/98	1.5 Year
EMCO LISN	3825/2	03/28/98	1.5 Year
HP Spectrum Analyzer with Quasi-Peak Adapter	8568B 85650A	11/24/97	1 Year
HP Signal Generator	HP8656B	03/21/98	1 Year
EMCO Turntable	1060	N/A	N/A
HP Plotter	HP7470	N/A	N/A
Cable	RG-59/U	05/13/98	1 Year

VI. **CABLE LOSS AND ANTENNA FACTORS**

Com-Power Corporation

(949) 587-9800

Antenna Calibration

Antenna Type:	Biconical
Model:	AB-100
Serial Number:	14069
Calibration Date:	5/28/98

Frequency MHz	Gain dB	Factors dB/m
30	-14.6	14.4
40	-9.8	12.1
50	-8.0	12.2
60	-5.7	11.5
70	-3.3	10.4
80	0.8	7.5
90	3.0	6.3
100	4.1	6.1
125	-0.9	13.0
150	5.1	8.6
175	-1.8	16.9
200	-1.9	18.1
250	-2.0	20.2
300	-1.4	21.2

Trans. Antenna Height	2 meter
Receiving Antenna Height	1 to 4 meter
Calibration	3 meter
Spectrum Analyzer	
Resolution Bandwidth	100 kHz
Video Bandwidth	100 kHz
Signal Generator Output	120 dBuV

Com-Power Corporation

(949) 587-9800

Antenna Calibration

Antenna Type:	Log Periodic	
Model:	AL-100	
Serial Number:	1011	
Calibration Date:	6/8/98	
Frequency MHz	Gain dBi	Factors dB/m
300	5.2	14.6
400	6.9	15.4
500	5.2	19.0
600	3.2	22.6
700	5.4	21.7
800	5.6	22.7
900	7.6	21.7
1000	3.4	26.8

Trans. Antenna Height	2 meter
Receiving Antenna Height	1 to 4 meter
Spectrum Analyzer	
Resolution Bandwidth	100 kHz
Video Bandwidth	100 kHz
Signal Generator Output	114 dBuV

Com-Power Corporation

(714) 587-9800

Antenna Calibration

Antenna Type:	Loop Antenna	
Model:	AL-130	
Serial Number:	17000	
Calibration Date:	6/26/98	
Frequency MHz	Magnetic (dB/m)	Electric dB/m
0.01	-41.3	10.2
0.02	-42.3	9.2
0.03	-40.6	10.9
0.04	-40.6	10.9
0.05	-41.8	9.7
0.06	-41.4	10.1
0.07	-41.5	10.0
0.08	-41.8	9.7
0.09	-41.9	9.6
0.1	-41.9	9.6
0.2	-44.0	7.5
0.3	-41.6	9.9
0.4	-41.6	9.9
0.5	-41.5	10.0
0.6	-41.3	10.2
0.7	-41.2	10.3
0.8	-41.2	10.3
0.9	-41.1	10.4
1	-40.4	11.1
2	-39.7	11.8
3	-40.3	11.2
4	-40.6	10.9
5	-40.2	11.3
6	-40.3	11.2
7	-40.7	10.8
8	-41.1	10.4
9	-40.3	11.2
10	-40.5	11.0
12	-41.1	10.4
14	-41.5	10.0
15	-41.7	9.8
16	-42.0	9.5
18	-42.0	9.5
20	-42.0	9.5
25	-43.4	8.1
30	-46.7	4.8

Trans. Antenna Height	2 meter
Receiving Antenna Height	2 meter

CERTIFICATE OF CALIBRATION CONFORMANCE

COM-POWER CORPORATION
20621 Pascal Way
Lake Forest, CA 92630
TEL: (949) 587-9800
FAX: (949) 587-9960

This antenna has been individually calibrated using ANSI C63.5, American National Standard for Calibration of Antennas used for radiated emission measurement in EMI control.

Certificate Number	1001
Client	Calcomp
Manufacturer	Com-Power
Model Number	AB-100
Serial Number	14069
Date of Calibration	05/28/98

Calibration Accuracy: ± 1 dB

Calibration Traceability:

All measurement instrumentation is traceable to the United States National Institute of Standards and Technology (NIST). Supporting Documentation relative to traceability is on file and is available for examination upon request.

Measurement procedure per Military Handbook-52A as guidance for Military Standard 45662A, ANSI/NCSL Z540-1-1994 and ISO Guide 25.

Notes:

Re-Certification Date: 1 Year from Calibration Date.



Calibration Engineer

CERTIFICATE OF CALIBRATION CONFORMANCE

COM-POWER CORPORATION

20621 Pascal Way
Lake Forest, CA 92630
TEL: (949) 587-9800
FAX: (949) 587-9960

This antenna has been individually calibrated using ANSI C63.5, American National Standard for Calibration of Antennas used for radiated emission measurement in EMI control.

Certificate Number	1000
Client	Calcomp
Manufacturer	Com-Power
Model Number	AL-100
Serial Number	1011
Date of Calibration	06/08/98

Calibration Accuracy: ± 1 dB

Calibration Traceability:

All measurement instrumentation is traceable to the United States National Institute of Standards and Technology (NIST). Supporting Documentation relative to traceability is on file and is available for examination upon request.

Measurement procedure per Military Handbook-52A as guidance for Military Standard 45662A, ANSI/NCSL Z540-1-1994 and ISO Guide 25.

Notes:

Re-Certification Date: 1 Year from Calibration Date.

A handwritten signature in blue ink, appearing to read 'Robert S. ...' or a similar name.

Calibration Engineer

RG 59/U 3 METER CABLE LOSS

MHZ	LOSS (db)	MHZ	LOSS (db)
		280	1.30
30	.47	290	1.37
35	.31	300	1.61
40	.64	310	1.28
45	.77	320	1.53
50	.70	330	1.71
55	.69	340	1.99
60	.76	350	1.84
65	.67	360	2.11
70	.48	370	2.06
75	.36	380	1.82
80	.23	390	2.29
85	.16	400	2.02
90	.12	410	2.18
95	.19	420	2.12
100	.24	430	2.31
105	.31	440	2.43
110	.48	450	2.57
115	.71	460	2.62
120	.45	470	3.03
125	.46	480	3.04
130	.50	490	3.18
135	.61	500	3.21
140	.61	525	2.94
145	.46	550	2.54
150	.58	575	2.85
155	.87	600	3.18
160	.95	625	3.15
165	.48	650	3.54
170	.48	675	3.71
175	.75	700	3.93
180	1.23	725	4.08
185	1.07	750	3.70
190	.43	775	3.65
195	.38	800	3.52
200	.58	825	4.41
210	.46	850	4.51
220	.58	875	4.33
230	.61	900	4.29
240	.90	925	4.78
250	.80	950	4.91
260	1.17	975	4.93
270	1.13	990	4.87

VII. DESCRIPTION OF EQUIPMENT/CABLES USED FOR TESTING

The test sample was connected and tested to the following equipment:

PERIPHERAL	MAKE/MODEL	SERIAL NO.	FCC ID
PC	DELL 466/MX	34GL1	E2K486MX
Monitor	DELL AT101R	33E2424	ARFKDM1466
Keyboard	DELL AT101R	M9310-021237	GYUR05SK
Printer	Epson FX-850	00C0042889	BKM9A8P82PA
Mouse	Logitech M-SR14	LC4293001363	DZLMSR14

DESCRIPTION OF CABLE

All cabling is shielded. See attached photographs.

VIII. RADIATED TEST PROCEDURE

Testing in the field as specified in ANSI C63.4, Section 8, the EUT was evaluated from the range of 30-1,000 mhz. The EUT was placed on a wooden turntable .8 meter above the groundplane and at a distance of 3 meters from the search antenna.

Maximum emissions were obtained by rotating the turntable and raising and lowering the search antenna while manipulating the cables which are bundled as specified. Appendix D in ANSI C63.4 was used for a reference. Both horizontal and vertical polarizations of the antenna were scanned and the position is noted on the radiated data sheet. Worst case configuration is shown in Photographs 1 and 2.

All emission levels were measured with a spectrum analyzer and represent peak readings at 100khz bandwidth resolution. Converting the spectrum analyzer readings of dbm to db μ v/m proceeds as follows:

- A. Convert dbm to db μ v by adding 107db to the reading in dbm. This is derived from the voltage for a power level into a 50ohm load.
- B. Finally, adding the antenna factor with any cable loss to the db μ v reading yields db μ v/m.

By formula: $db\mu v/m = dbm (\text{reading}) + 107db + AF + CL$

Where: AF = Antenna Factor in db
 CL = Cable Loss in db

IX. RADIATED TEST DATA/PHOTOGRAPHS

COMPANY NAME: CalComp DATE: 07/21/98

TEST SAMPLE: Digitizer Model 11180

SERIAL NUMBER: N/A

ANTENNA TYPE: DIPOLE BICONICAL LOG PER LOOP


TEST DISTANCE: 3M PEN CURSOR

EMISSION FREQUENCY	ANT. POL.	ANT. HEIGHT (M)	AZIMUTH* DEGREES	METER READ db μ V	ANTENNA FACTOR & CABLE LOSS	FINAL READING db μ V/m	FCC LIMIT db μ V/m	MARGIN
49.95	V	1.5	180	22.55	12.90	35.45	40	+4.55
79.88	V	1.5	210	22.15	7.73	29.88	40	+10.12
147.00	V	1.5	200	22.19	9.58	31.77	43.5	+11.73
161.38	V	1.5	165	20.42	13.55	33.97	43.5	+9.53
176.75	V	1.5	180	19.26	17.65	36.91	43.5	+6.59
206.53	V	1.5	180	19.07	18.68	37.75	43.5	+5.75

* A 0-degree reading means the front of the EUT is facing the antenna. 180 degrees would mean the back of the EUT is facing the antenna. Rotation is clockwise from 0 degrees.

NO. 340RL210 DIETZGEN GRAPH PAPER
SEMI-LOGARITHMIC
2 CYCLES X 10 DIVISIONS PER INCH

EUGENE DIETZGEN CO.
MADE IN U. S. A.

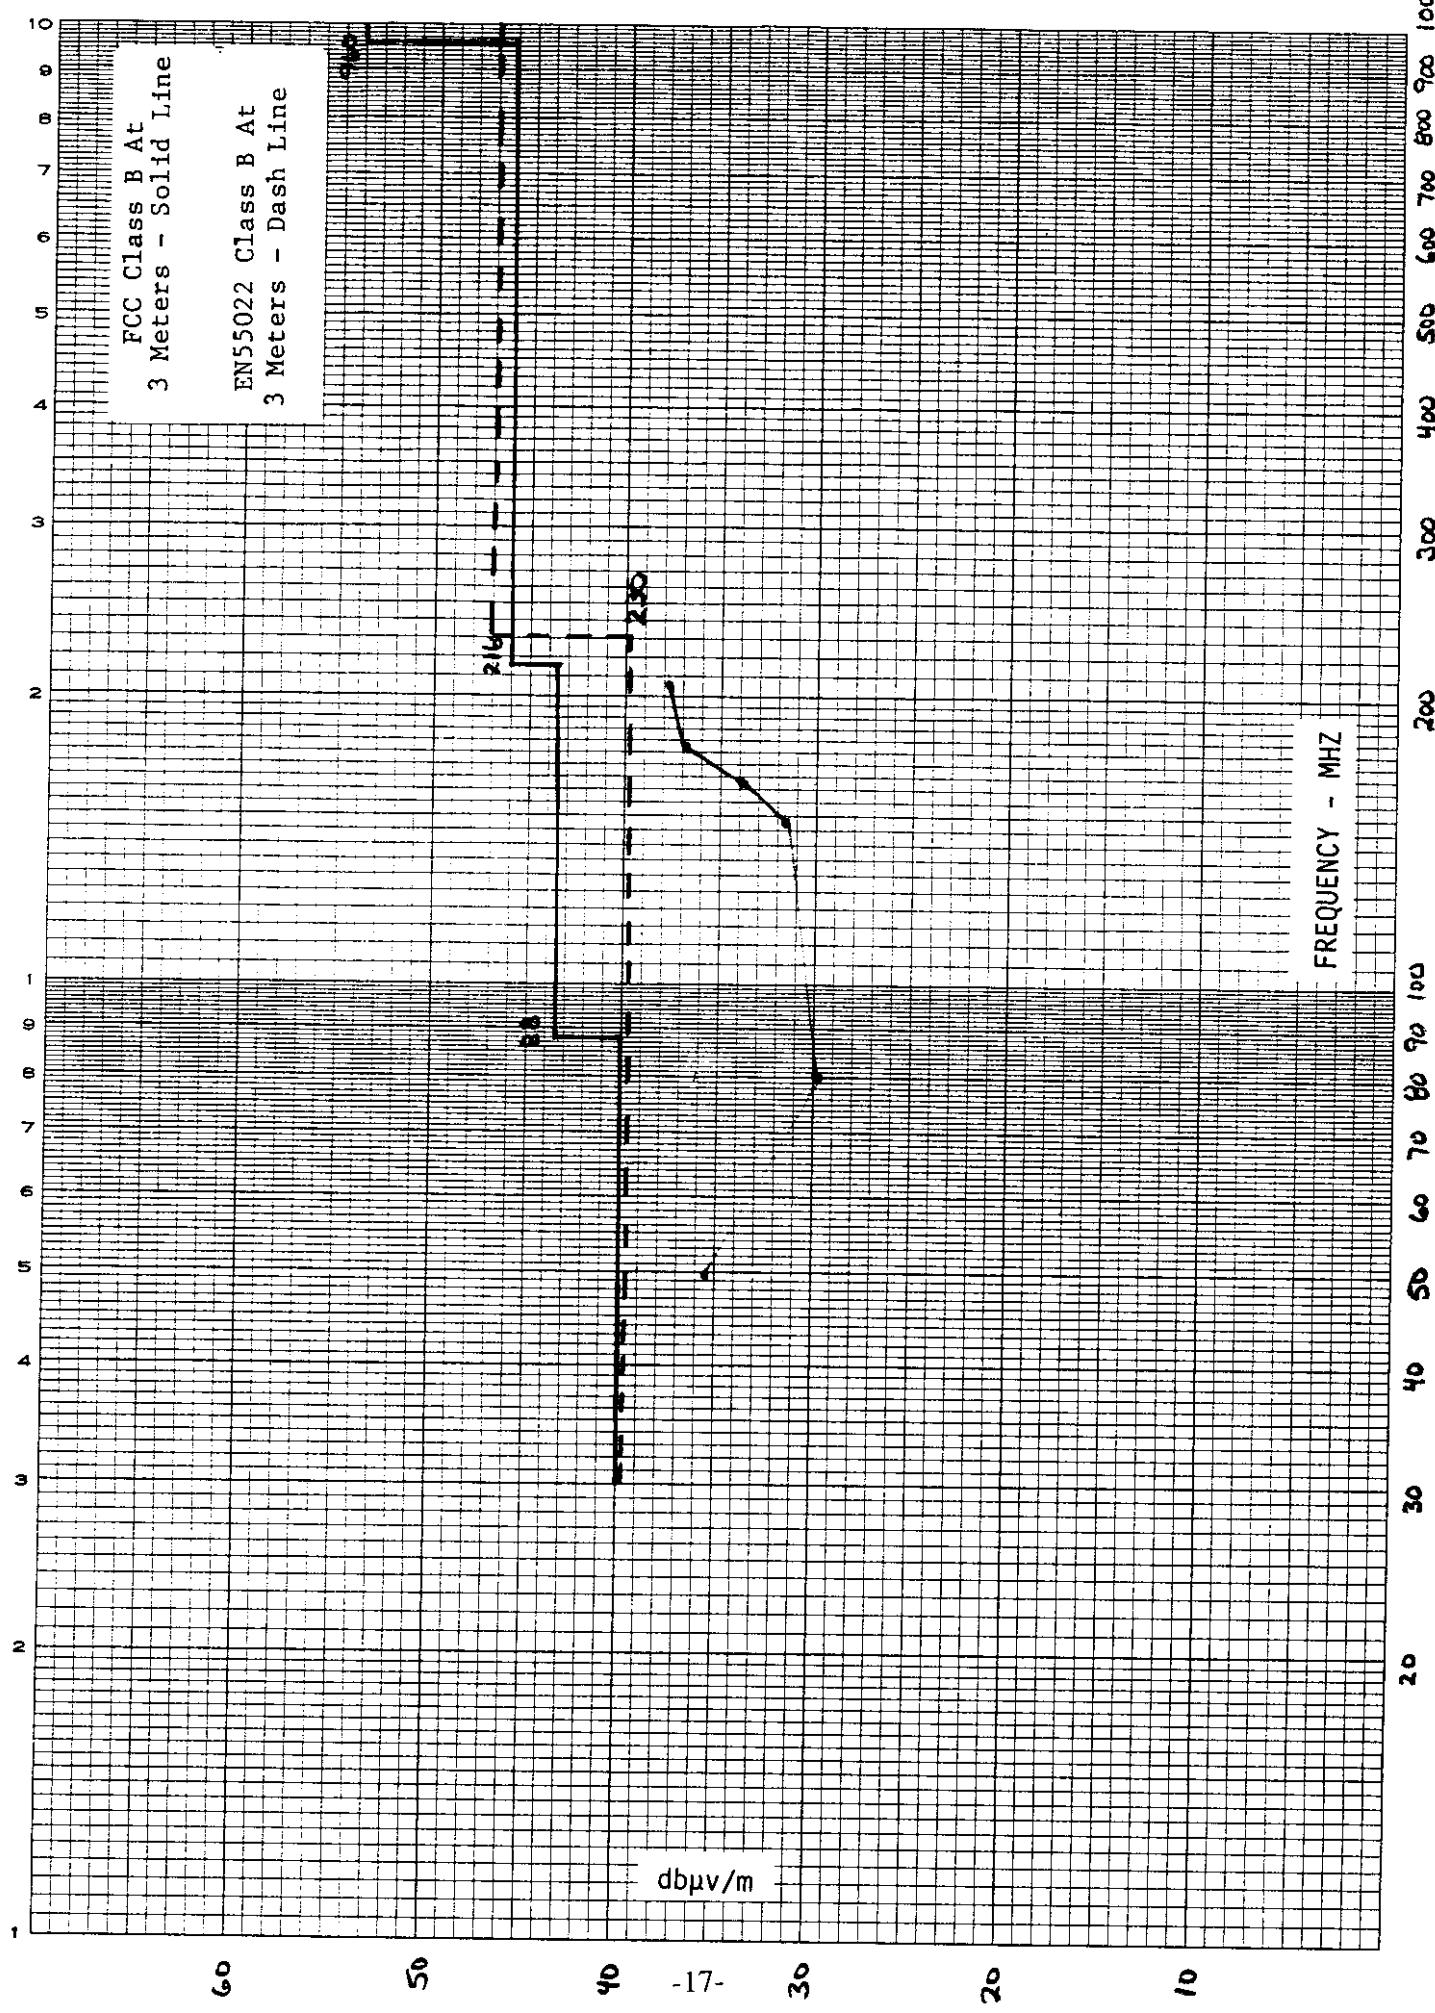

X. CONDUCTED TEST PROCEDURE


The EUT was connected to the public utility line through a separate line impedance stabilization network (LISN) and the support equipment was isolated from the utility line with a second LISN as outlined in Standard ANSI C63.4. The EUT was set up over a horizontal ground plane measuring approximately 2.5 x 3 meters and beside a vertical ground plane measuring about 2 x 2 meters as outlined in ANSI C63.4, Paragraphs 5.2.1 and 5.2.2. Any excess power cord between the LISN and EUT was folded back and forth to form a bundle not exceeding 40cm in length. All test procedures used ANSI C63.4, Paragraph 7.2.1 as a reference. Test configuration is shown in Photographs 3 and 4.

The following graphs show the resulting conducted tests and each graph shows the following:

GRAPH NUMBER	FREQUENCY RANGE, MHZ	POWER LINE SIDE	GROUNDING
1	.45-30	Line	Ungrounded
2	.45-30	Neutral	Ungrounded
3	.45-1	Line	Ungrounded
4	.45-1	Neutral	Ungrounded
5	.15-30	Line	Ungrounded
6	.15-30	Neutral	Ungrounded

On all graphs, the red horizontal line is the maximum FCC Class B Reference Level or EN55022 Class B Level.

XI. CONDUCTED TEST DATA/PHOTOGRAPHS

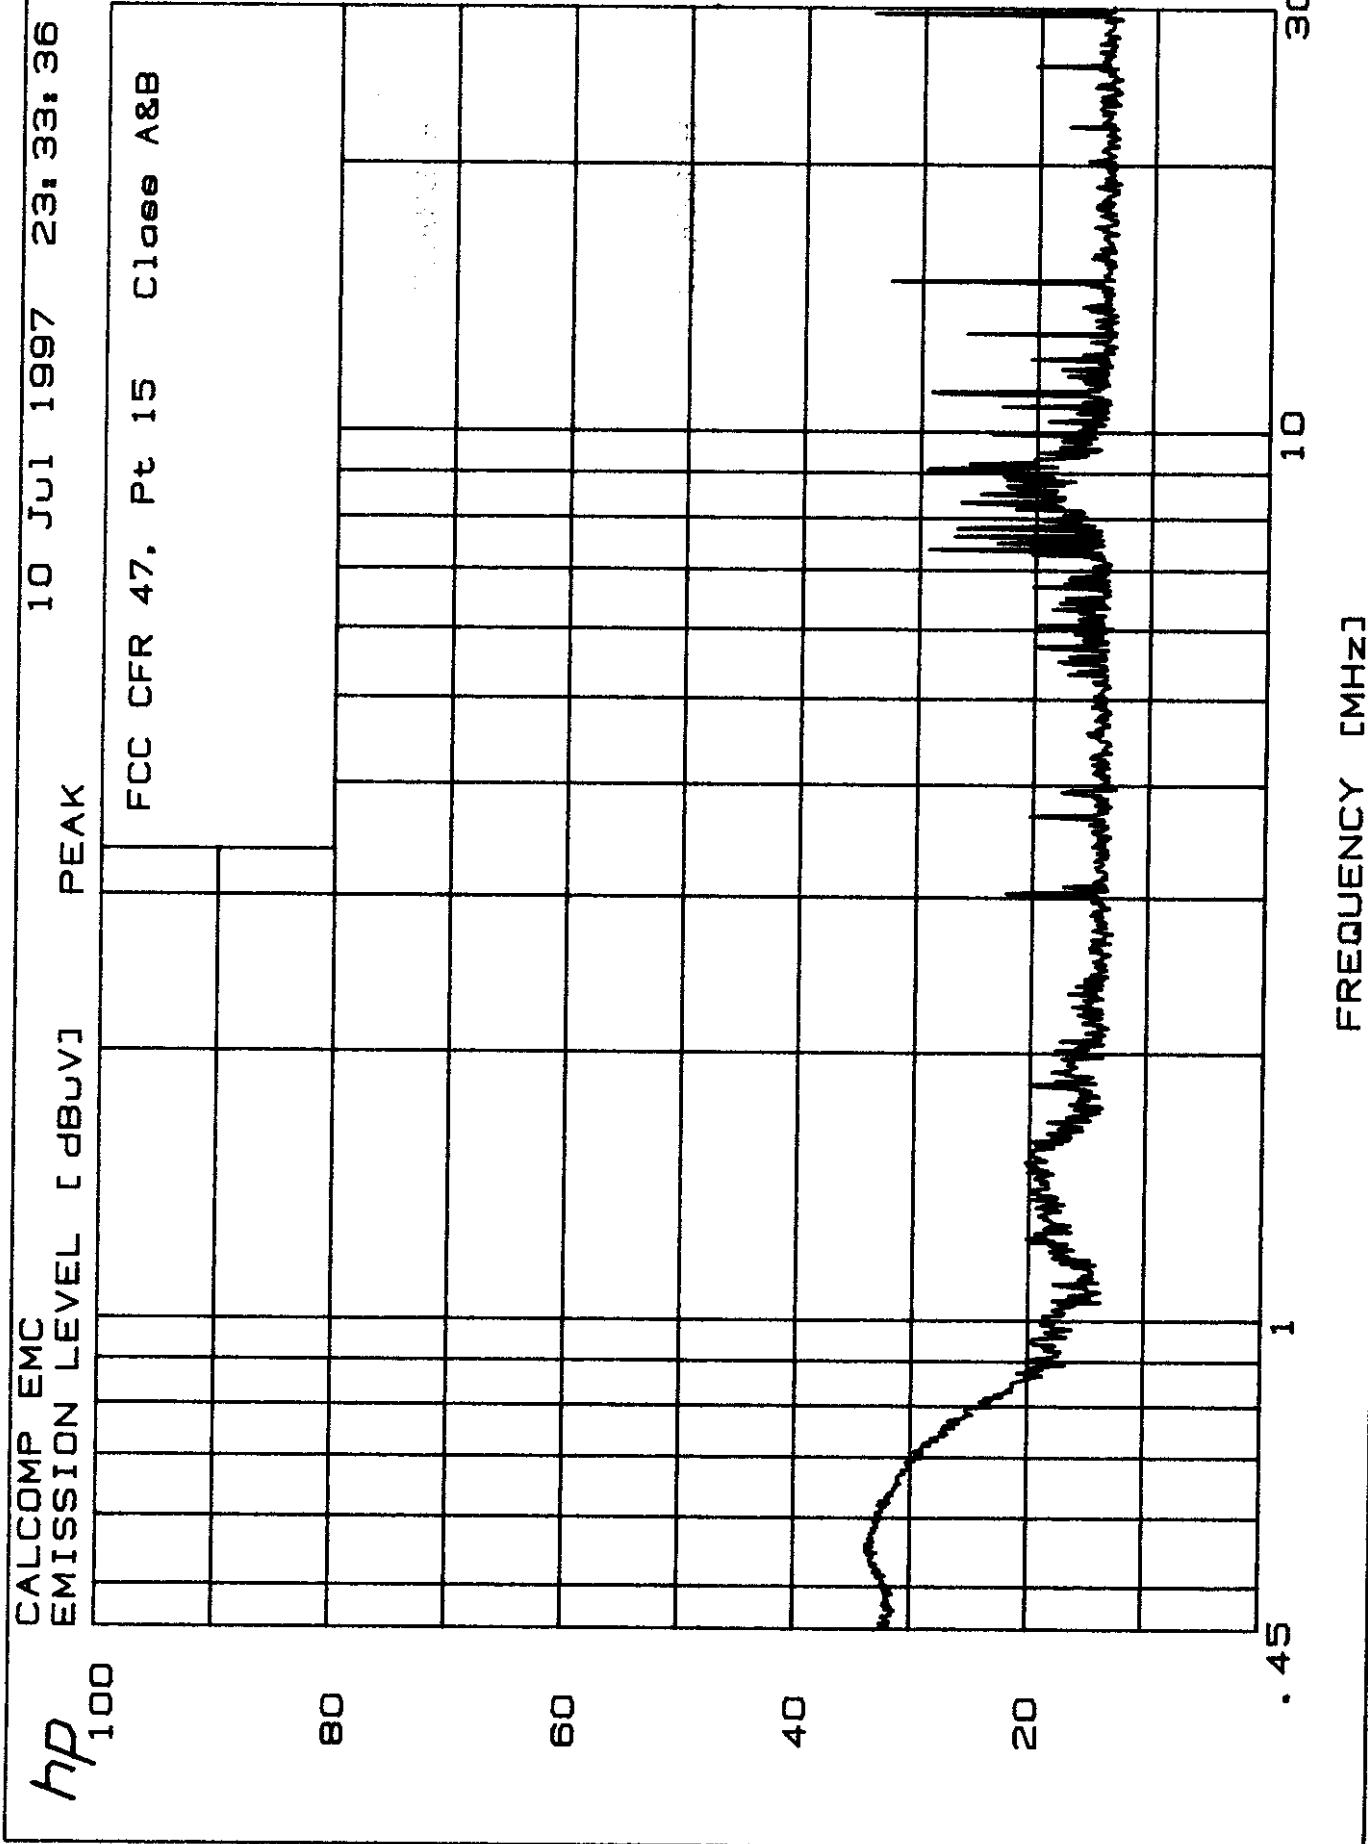

11 Jul 1997 12:11:07
CALCOMP EMC EMISSION LEVEL [dB_{UV}]

hP_{100}

PEAK FCC CFR 47, Pt 15 Class A&B

80

60

40

20

• 45

1


10

30

FREQUENCY [MHz]

CALCOMP EMC
EMISSION LEVEL [dBuV] PEAK

hP_{100}

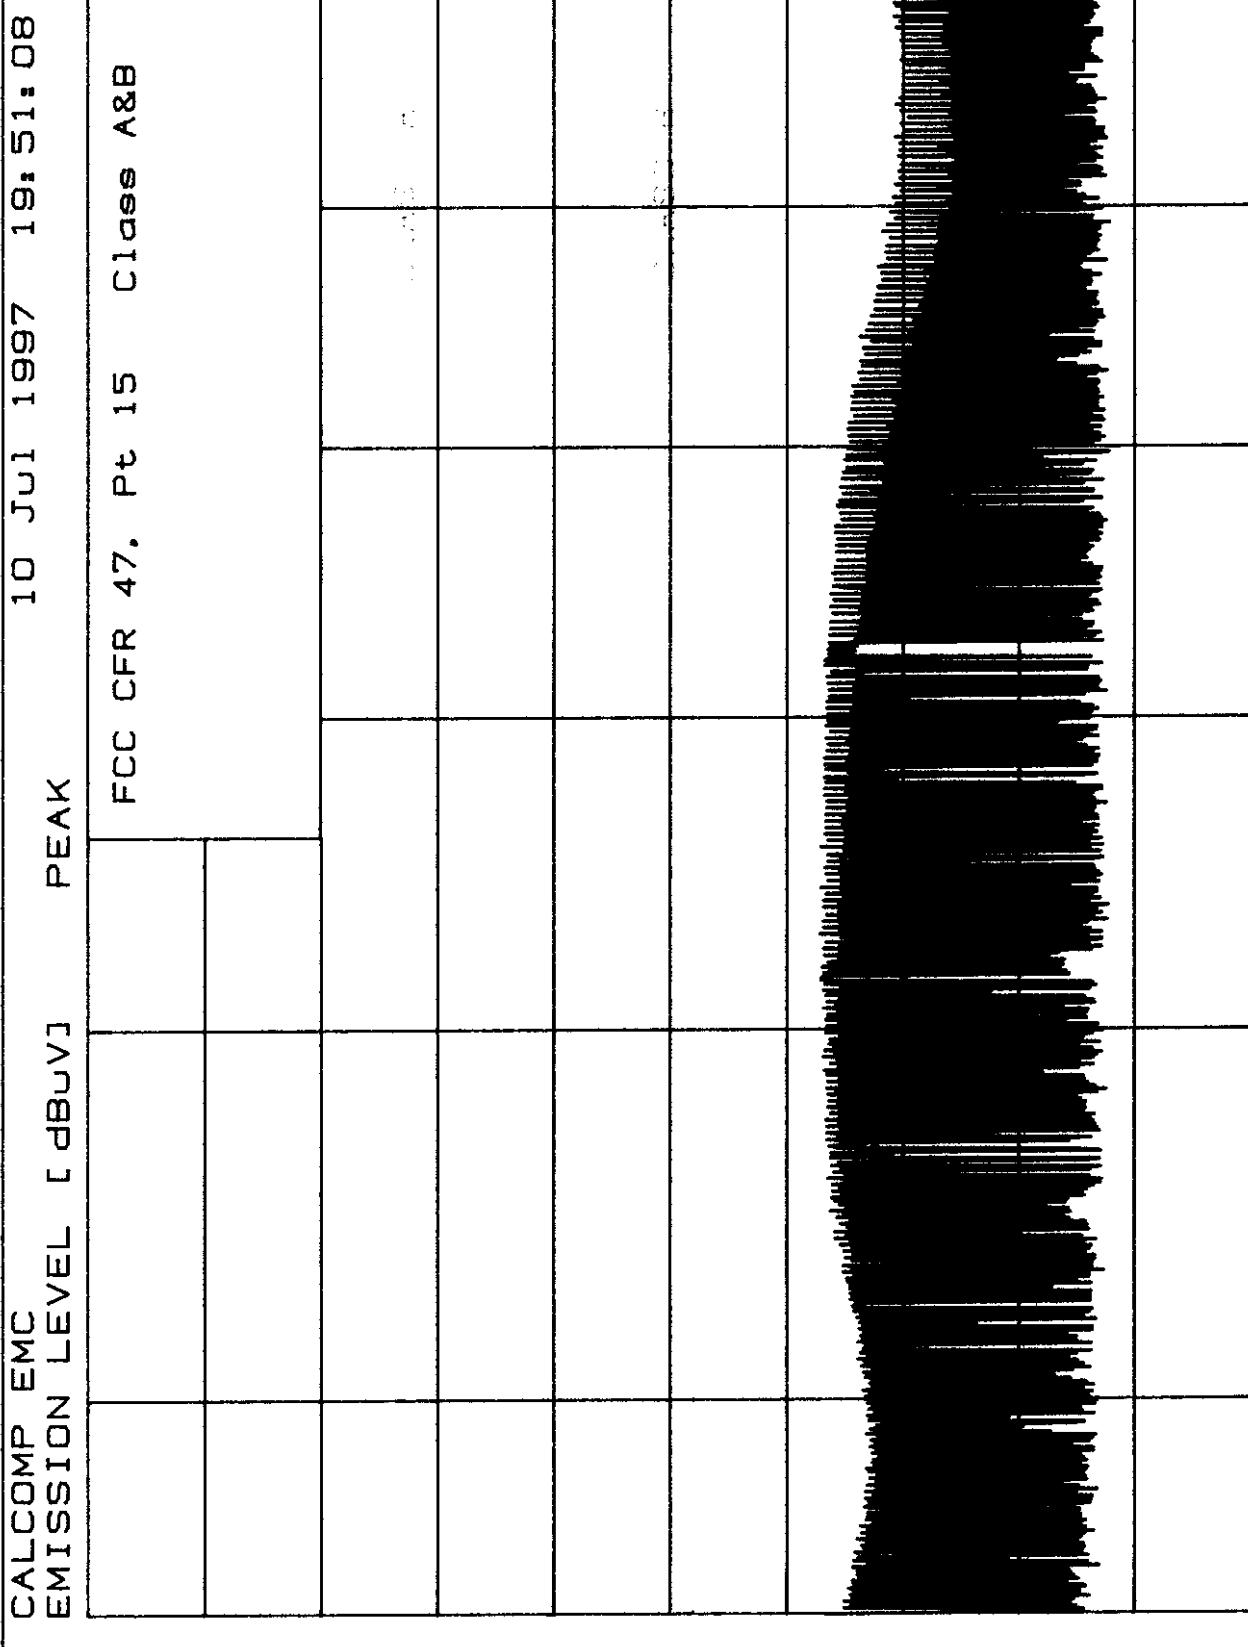

.45

1

FREQUENCY [MHz]

Graph 3

-23-



1
- 45 -

10 JUL 1997 19:22:31
CALCOMP EMC EMISSION LEVEL [dBuV] PEAK

hP_{100}

CISPR PUB. 22 CLASS B CONDUCTED

80

60

40

20


.15

1

10

30


FREQUENCY [MHz]

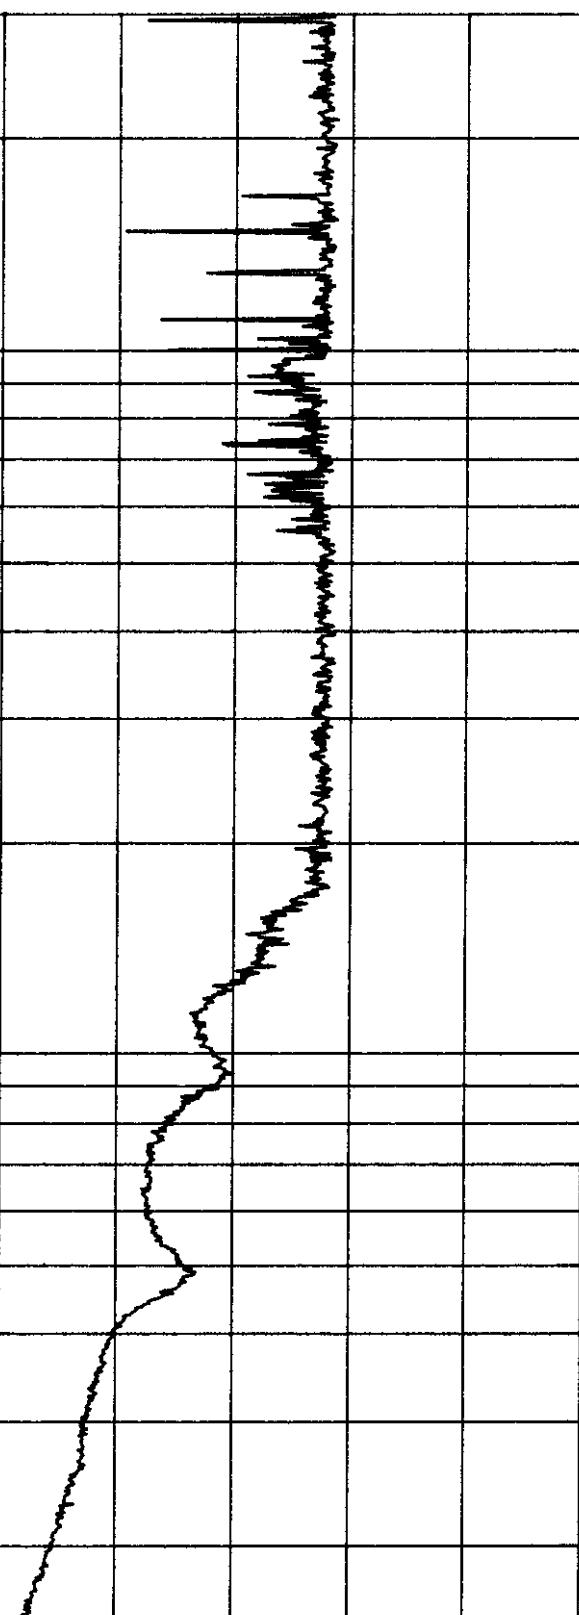

Graph 5

11 JUL 1 1997 13:39:42

CALCOMP EMC
EMISSION LEVEL [dBmV]

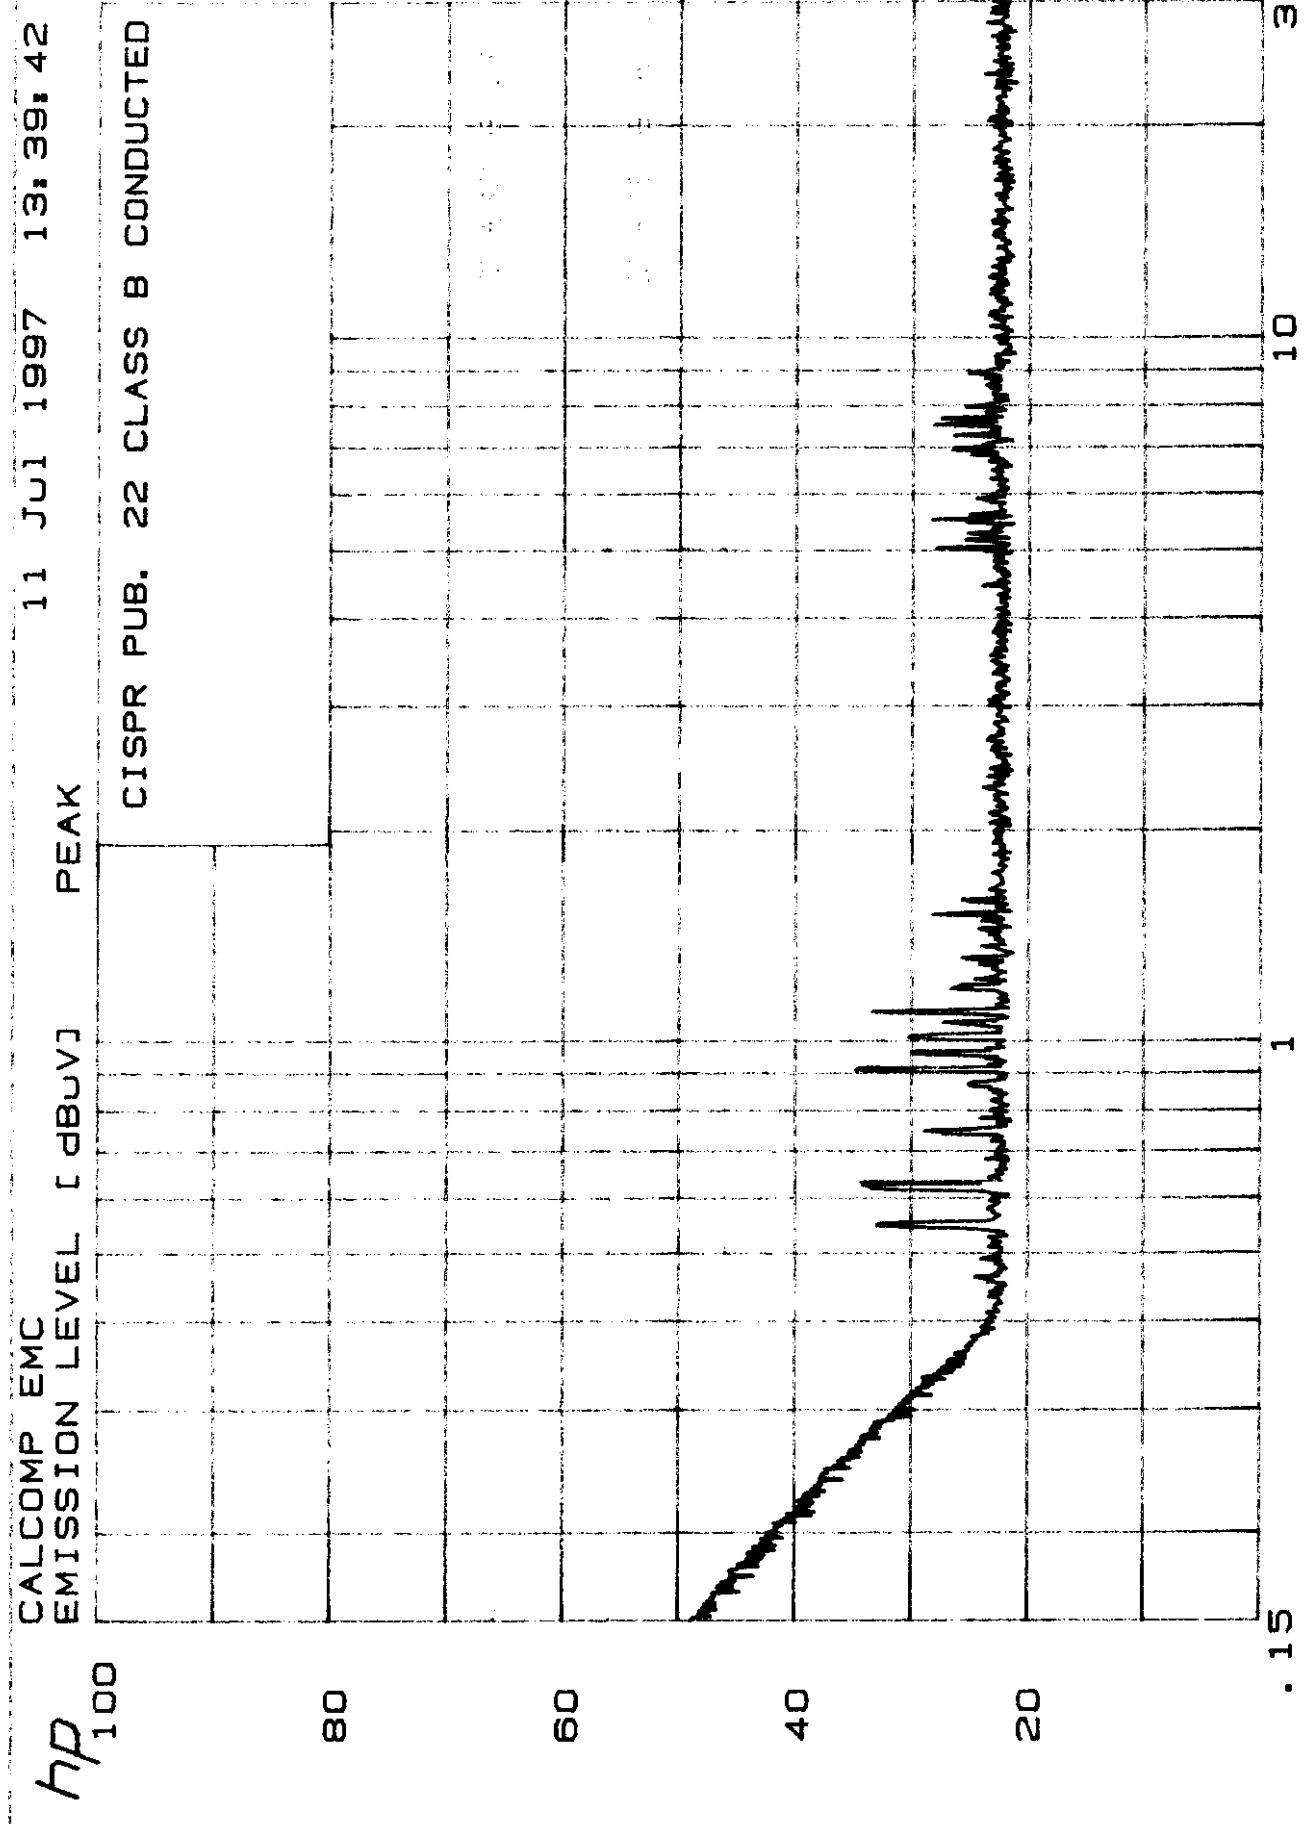

XII. SUMMARY OF RESULTS

The Digitizer Model 11180, 11180A, 35180 and 35180A has shown that it passes both radiated and conducted test limits for FCC Class B as noted in FCC's CFR 47, Part 15, Paragraphs 15.107 and 15.109. Worst case margin was noted to be +4.55db at 49.95Mhz. All margins are stated in Section IX; radiated test data, Page 16. This product has also shown that it passes the Class B limits as specified in CISPR 22/EN55022 standards as set in CISPR 22 Publication, Paragraphs 4 and 5.

The product tested had no specific modifications done to it to pass the above limits. The only specific attributes the product has is that all cables are shielded.