



FCC RF Test Report

APPLICANT : Nortek Security & Control LLC
EQUIPMENT : Wireless mPERS
BRAND NAME : Nortek
MODEL NAME : 10-1112
MARKETING NAME : Libris
FCC ID : EF4-UL-150
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Nov. 23, 2015 and testing was completed on Jan. 05, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	8
1.8 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
3 CONDUCTED TEST RESULT	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power	12
3.5 Peak-to-Average Ratio	13
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	19
4.5 Field Strength of Spurious Radiation Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 UNCERTAINTY OF EVALUATION	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG5N2308	Rev. 01	Initial issue of report	May 12, 2016
FG5N2308	Rev. 02	Revising the data of Effective Radiated Power and Effective Isotropic Radiated Power Measurement in Appendix B.	May 18, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.4	§90.635	Conducted Output Power	<100W	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 12.06 dB at 13372.500 MHz



1 General Description

1.1 Applicant

Nortek Security & Control LLC

1950 Camino Vida Roble, Suite 150, Carlsbad, CA 92008-6517

1.2 Manufacturer

Wistron NeWeb Corporation

20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless mPERS
Brand Name	Nortek
Model Name	10-1112
Marketing Name	Libris
FCC ID	EF4-UL-150
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA Bluetooth v2.1 BR/EDR
HW Version	version 1.5
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 32.34 dBm 1900: 28.98 dBm WCDMA: Band V: 22.52 dBm Band II: 21.36 dBm
Antenna Type	Fixed Internal Antenna
Antenna Gain	Cellular Band: -3.00 dBi PCS Band: 0.00 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Downlink)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.5320	0.0885 ppm	249KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.1333	0.1184 ppm	248KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0374	0.0921 ppm	4M17F9W
Part 24	GSM1900 GPRS class 8	GMSK	0.7326	0.0622 ppm	247KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.2625	0.0872 ppm	249KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.0970	0.0670 ppm	4M16F9W

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH10-HY

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link	■ GPRS class 8 Link
	■ EDGE class 8 Link	■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link	■ GPRS class 8 Link
	■ EDGE class 8 Link	■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

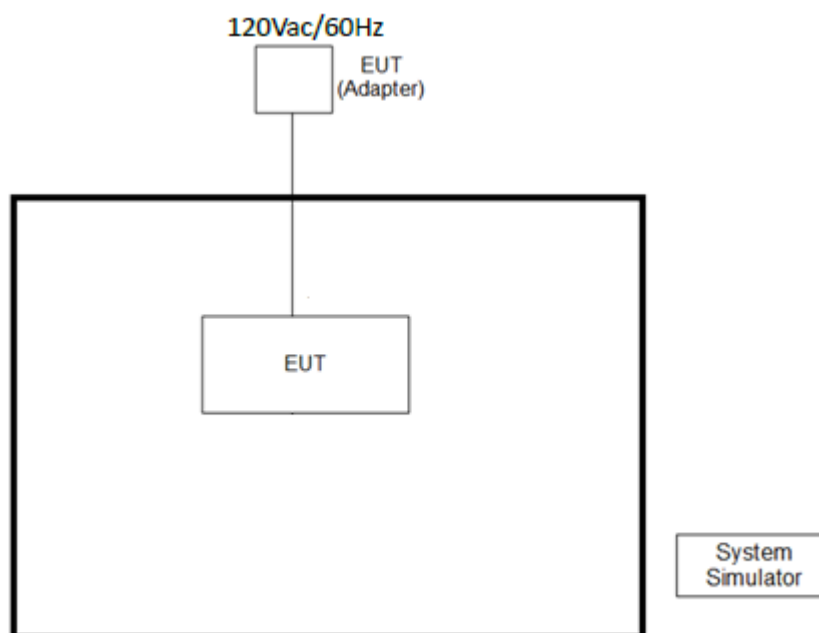

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

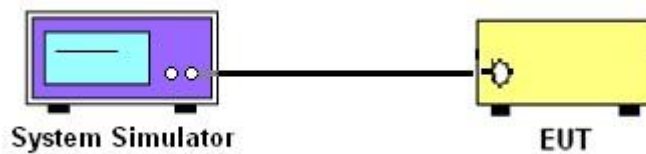

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

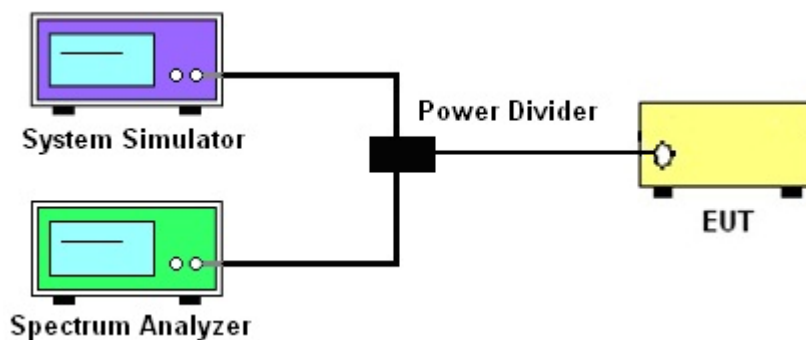

3.2.3 Frequency Stability

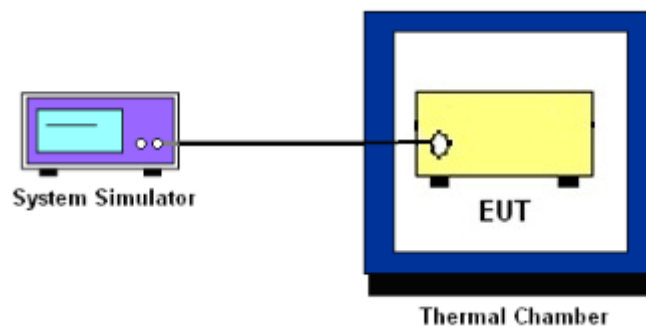

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.



3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

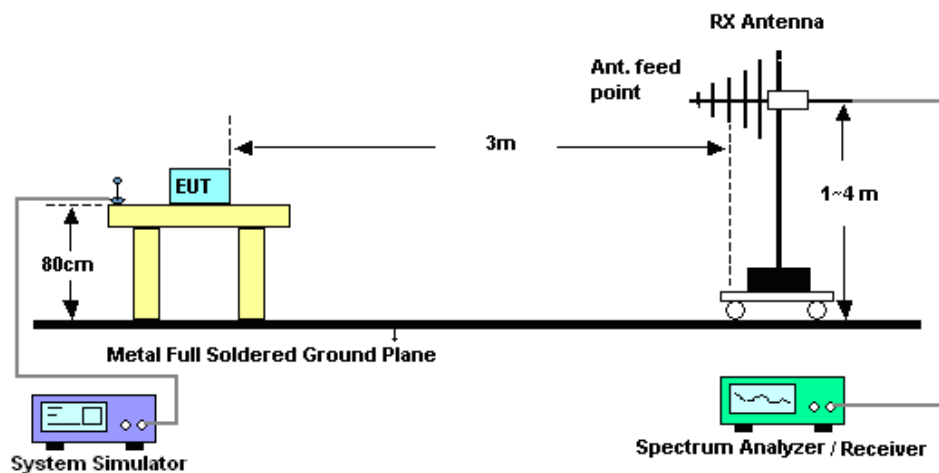

4.2.2 For radiated test above 1GHz

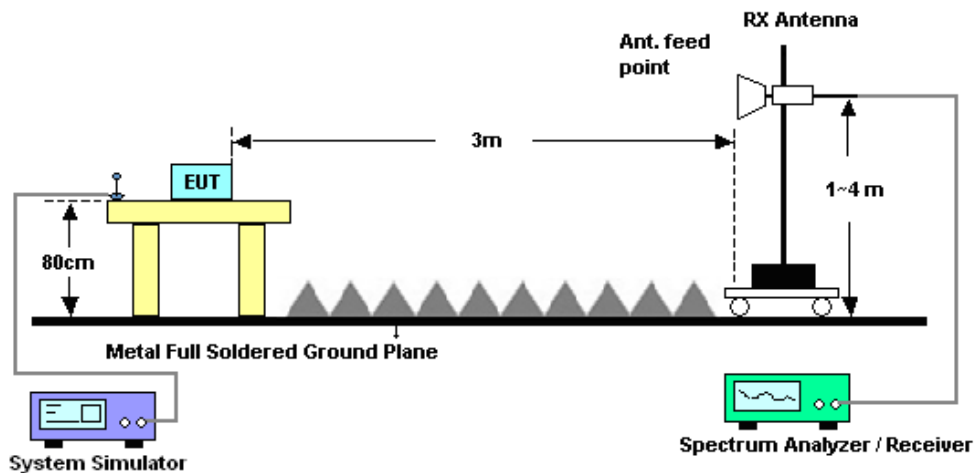

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 24, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Jun. 23, 2016	Conducted (TH03-HY)
Base Station(Measu	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Jul. 26, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Jul. 25, 2016	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;Current:0~5A	Nov. 26, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Nov. 25, 2016	Conducted (TH03-HY)
Hygrometer	Testo	608-H1	34893241	N/A	May 04, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	May 03, 2016	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 20, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Nov. 19, 2016	Conducted (TH03-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 16, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Nov. 15, 2016	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Sep. 29, 2016	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 13, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Nov. 12, 2016	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHZ	Oct. 15, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Oct. 14, 2016	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 04, 2016 ~ Jan. 05, 2016	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	N/A	Jan. 04, 2016 ~ Jan. 05, 2016	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0-360 degree	N/A	Jan. 04, 2016 ~ Jan. 05, 2016	N/A	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Nov. 16, 2016	Radiation (03CH10-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 21, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Dec. 20, 2016	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917057 6	18GHz ~ 40GHz	Apr. 20, 2015	Jan. 04, 2016 ~ Jan. 05, 2016	Apr. 19, 2016	Radiation (03CH10-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.90
--	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.16	32.24	32.31	28.85	28.83	28.93
GPRS class 8	32.19	32.26	32.34	28.88	28.85	28.98
GPRS class 10	28.37	28.35	28.38	25.37	25.32	25.48
EGPRS class 8	25.54	25.58	25.60	24.61	24.55	24.71
EGPRS class 10	25.50	25.53	25.58	24.60	24.54	24.70

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	22.33	22.35	22.52	21.30	21.32	21.36
HSDPA Subtest-1	21.99	21.90	22.11	21.12	21.20	21.28
HSDPA Subtest-2	21.92	21.88	22.10	21.01	21.02	21.17
HSDPA Subtest-3	21.89	21.81	22.08	20.97	20.84	21.20
HSDPA Subtest-4	21.88	21.83	22.07	20.89	20.83	21.16









A1. GSM







Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	3.20	PASS
Middle CH	0.24	3.24	
Highest CH	0.20	3.32	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.24	3.32	PASS
Middle CH	0.20	3.24	
Highest CH	0.24	3.40	

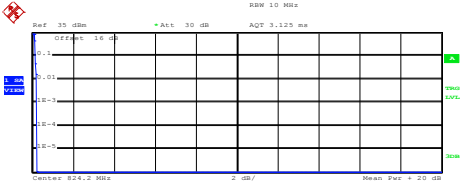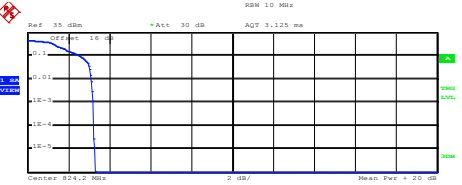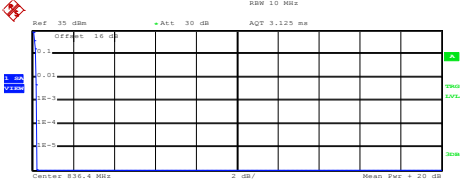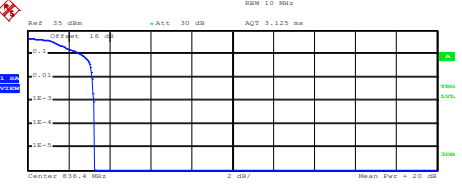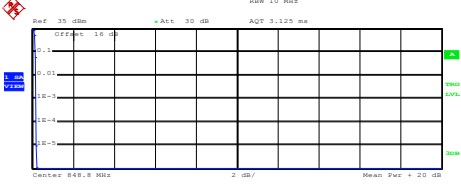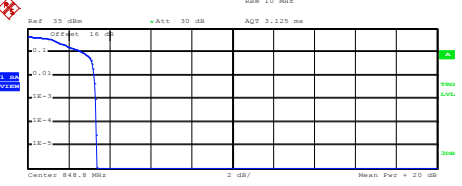GSM850 (GPRS class 8)	GSM850 (EDGE class 8)
Lowest Channel	Lowest Channel
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 824.2 MHz 2 dB/ Mean: Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 31.29 dBm Peak: 31.51 dBm Crest: 0.22 dB 10 %: 0.16 dB 1 %: 0.20 dB .1 %: 0.24 dB .01 %: 0.24 dB Date: 4.JAN.2016 17:13:00	 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 824.2 MHz 2 dB/ Mean: Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 25.25 dBm Peak: 28.55 dBm Crest: 3.30 dB 10 %: 2.56 dB 1 %: 3.12 dB .1 %: 3.20 dB .01 %: 3.24 dB Date: 4.JAN.2016 17:23:42
Middle Channel	Middle Channel
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 836.4 MHz 2 dB/ Mean: Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 32.16 dBm Peak: 32.36 dBm Crest: 0.20 dB 10 %: 0.16 dB 1 %: 0.20 dB .1 %: 0.24 dB .01 %: 0.24 dB Date: 4.JAN.2016 17:13:13	 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 836.4 MHz 2 dB/ Mean: Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 26.06 dBm Peak: 29.33 dBm Crest: 3.26 dB 10 %: 2.60 dB 1 %: 3.16 dB .1 %: 3.24 dB .01 %: 3.28 dB Date: 4.JAN.2016 17:23:56
Highest Channel	Highest Channel
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 848.8 MHz 2 dB/ Mean: Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 32.97 dBm Peak: 33.21 dBm Crest: 0.24 dB 10 %: 0.16 dB 1 %: 0.20 dB .1 %: 0.20 dB .01 %: 0.20 dB Date: 4.JAN.2016 17:13:26	 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 848.8 MHz 2 dB/ Mean: Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 26.78 dBm Peak: 30.17 dBm Crest: 3.39 dB 10 %: 2.68 dB 1 %: 3.24 dB .1 %: 3.32 dB .01 %: 3.36 dB Date: 4.JAN.2016 17:24:09

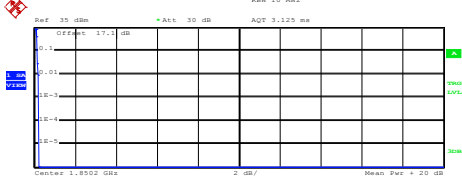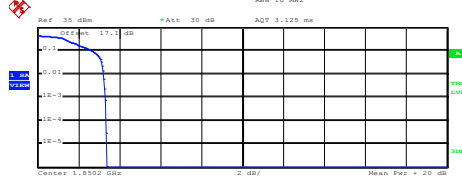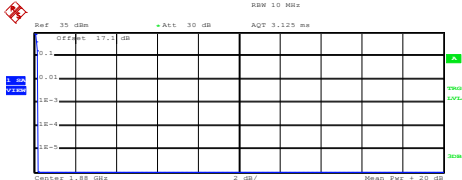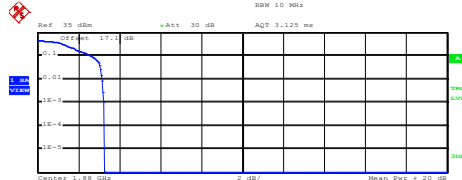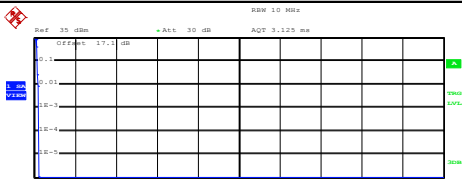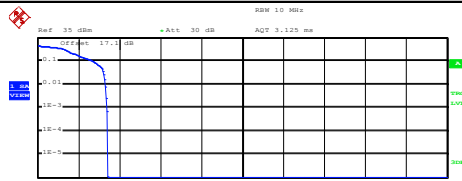


GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center 1.8502 GHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 27.48 dBm Peak 27.70 dBm Crest 0.22 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.24 dB .01 % 0.24 dB Date: 4.JAN.2016 17:38:35		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center 1.8502 GHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.71 dBm Peak 27.07 dBm Crest 3.35 dB 10 % 2.68 dB 1 % 3.24 dB .1 % 3.32 dB .01 % 3.36 dB Date: 4.JAN.2016 17:49:04	
Middle Channel		Middle Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center 1.88 GHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 28.22 dBm Peak 28.41 dBm Crest 0.19 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.20 dB .01 % 0.20 dB Date: 4.JAN.2016 17:38:45		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center 1.88 GHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 24.52 dBm Peak 27.77 dBm Crest 3.26 dB 10 % 2.64 dB 1 % 3.16 dB .1 % 3.24 dB .01 % 3.28 dB Date: 4.JAN.2016 17:49:19	
Highest Channel		Highest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center 1.9098 GHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 28.97 dBm Peak 29.18 dBm Crest 0.22 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.24 dB .01 % 0.24 dB Date: 4.JAN.2016 17:38:57		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center 1.9098 GHz 2 dB/ Mean Per + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.14 dBm Peak 28.55 dBm Crest 3.41 dB 10 % 2.72 dB 1 % 3.32 dB .1 % 3.40 dB .01 % 3.44 dB Date: 4.JAN.2016 17:49:32	




26dB Bandwidth

Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.314	0.306
Middle CH	0.312	0.293
Highest CH	0.308	0.301

Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.296	0.308
Middle CH	0.265	0.308
Highest CH	0.305	0.312

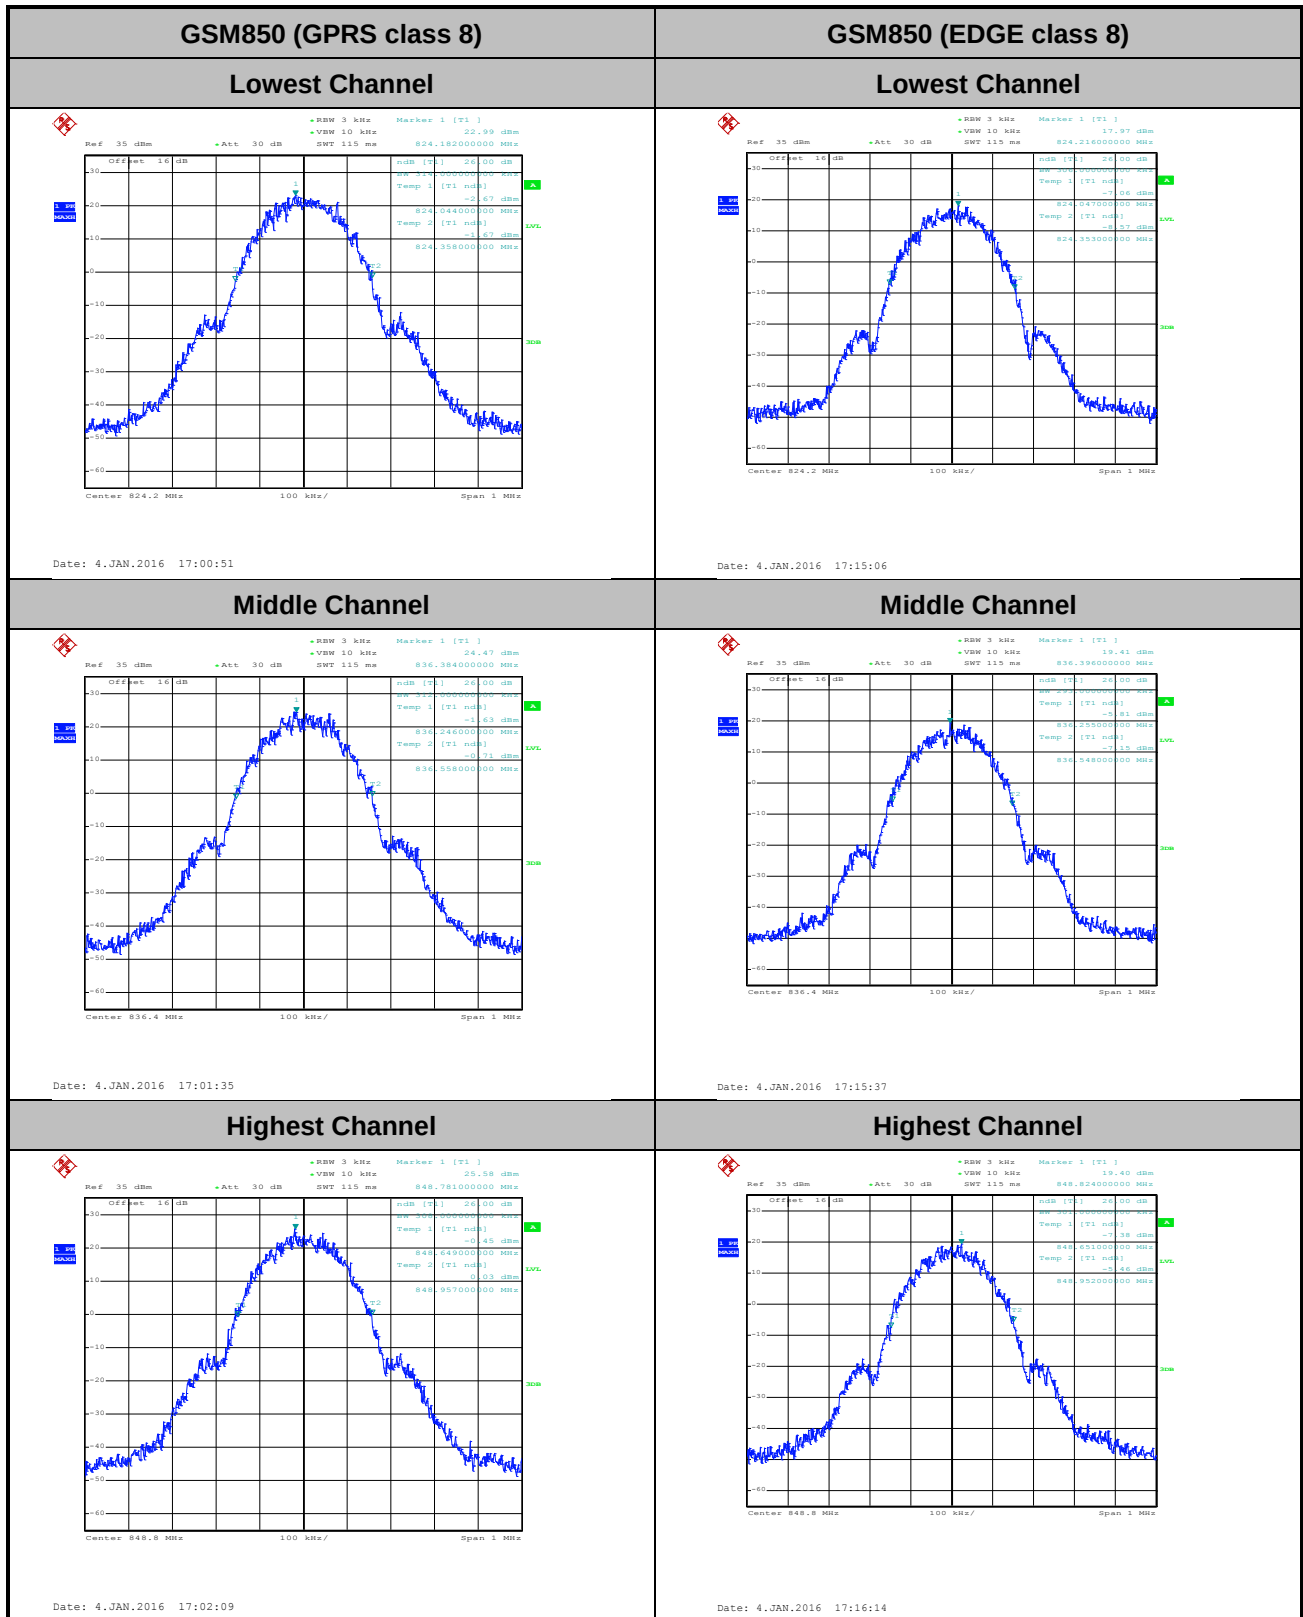


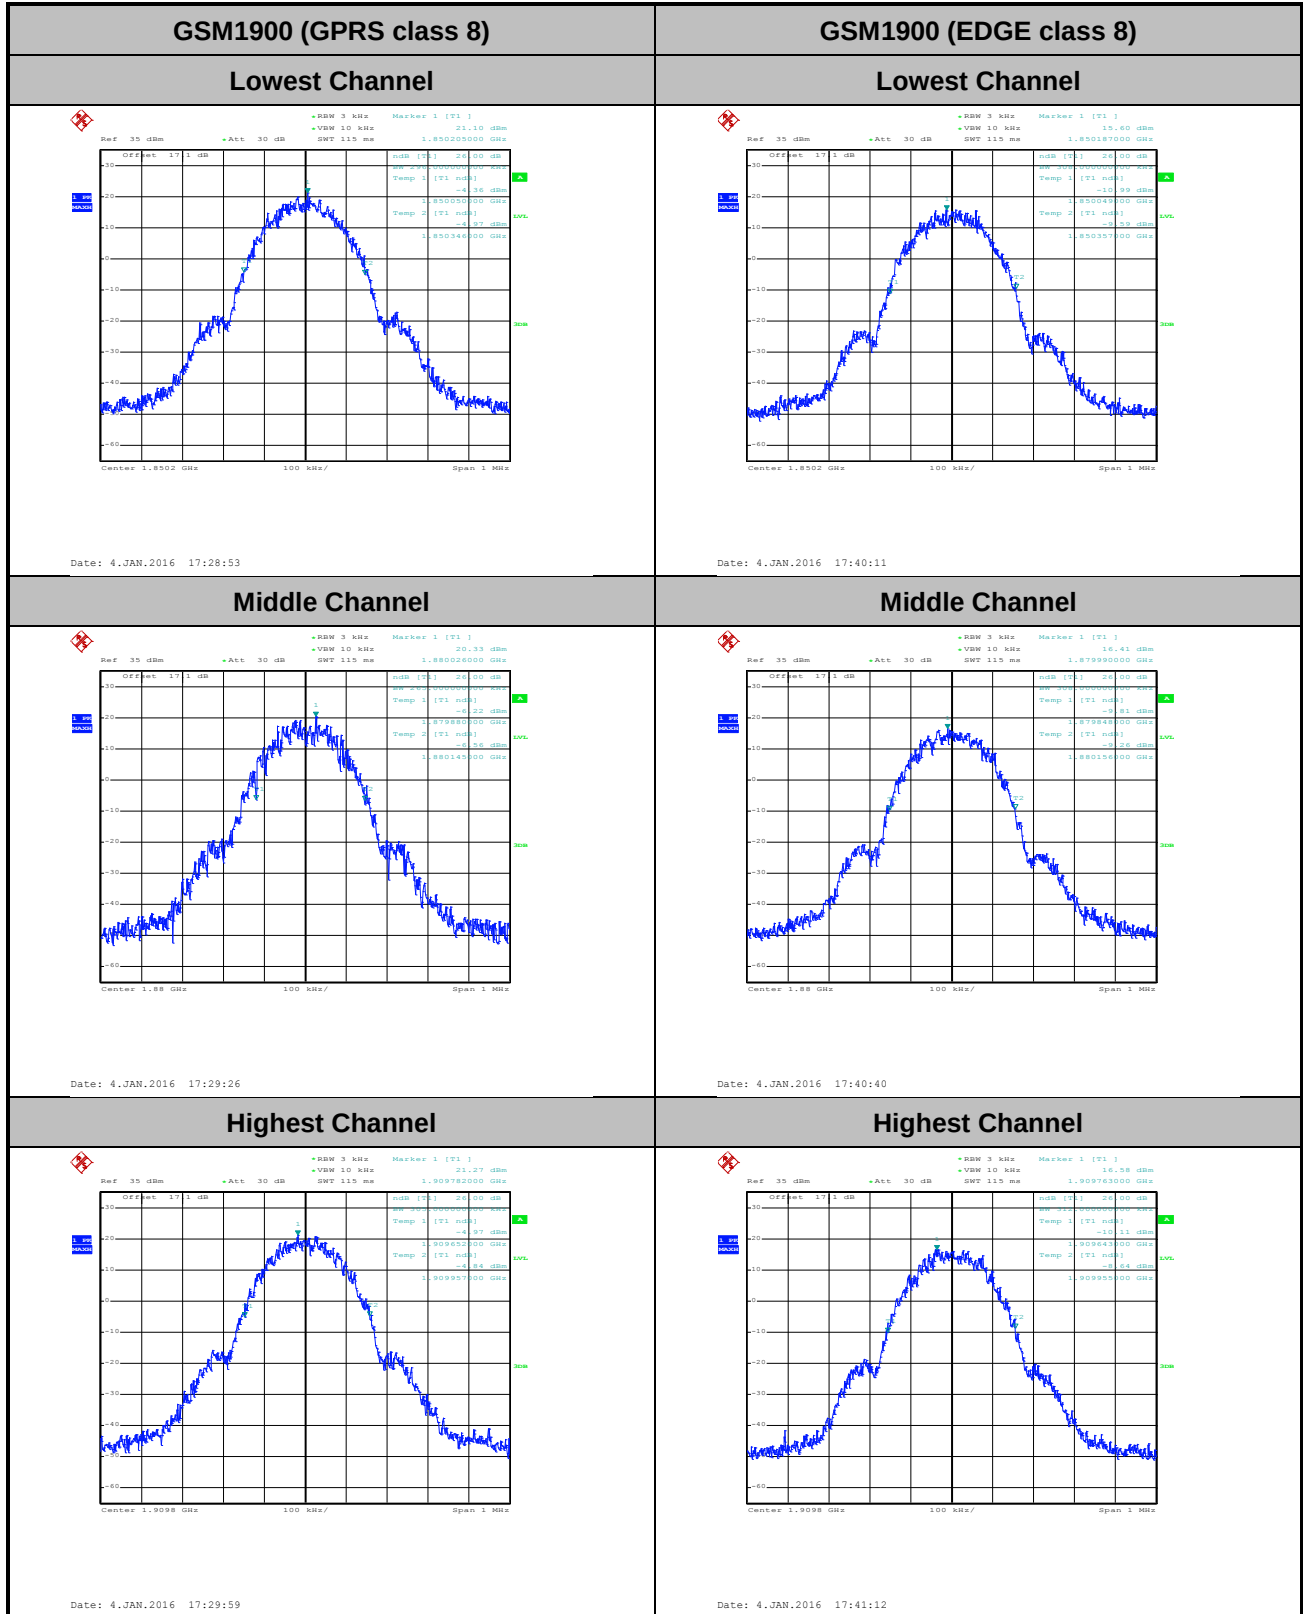


**Occupied Bandwidth**

Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.244	0.248
Middle CH	0.249	0.247
Highest CH	0.246	0.247

Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.247	0.249
Middle CH	0.244	0.247
Highest CH	0.242	0.248

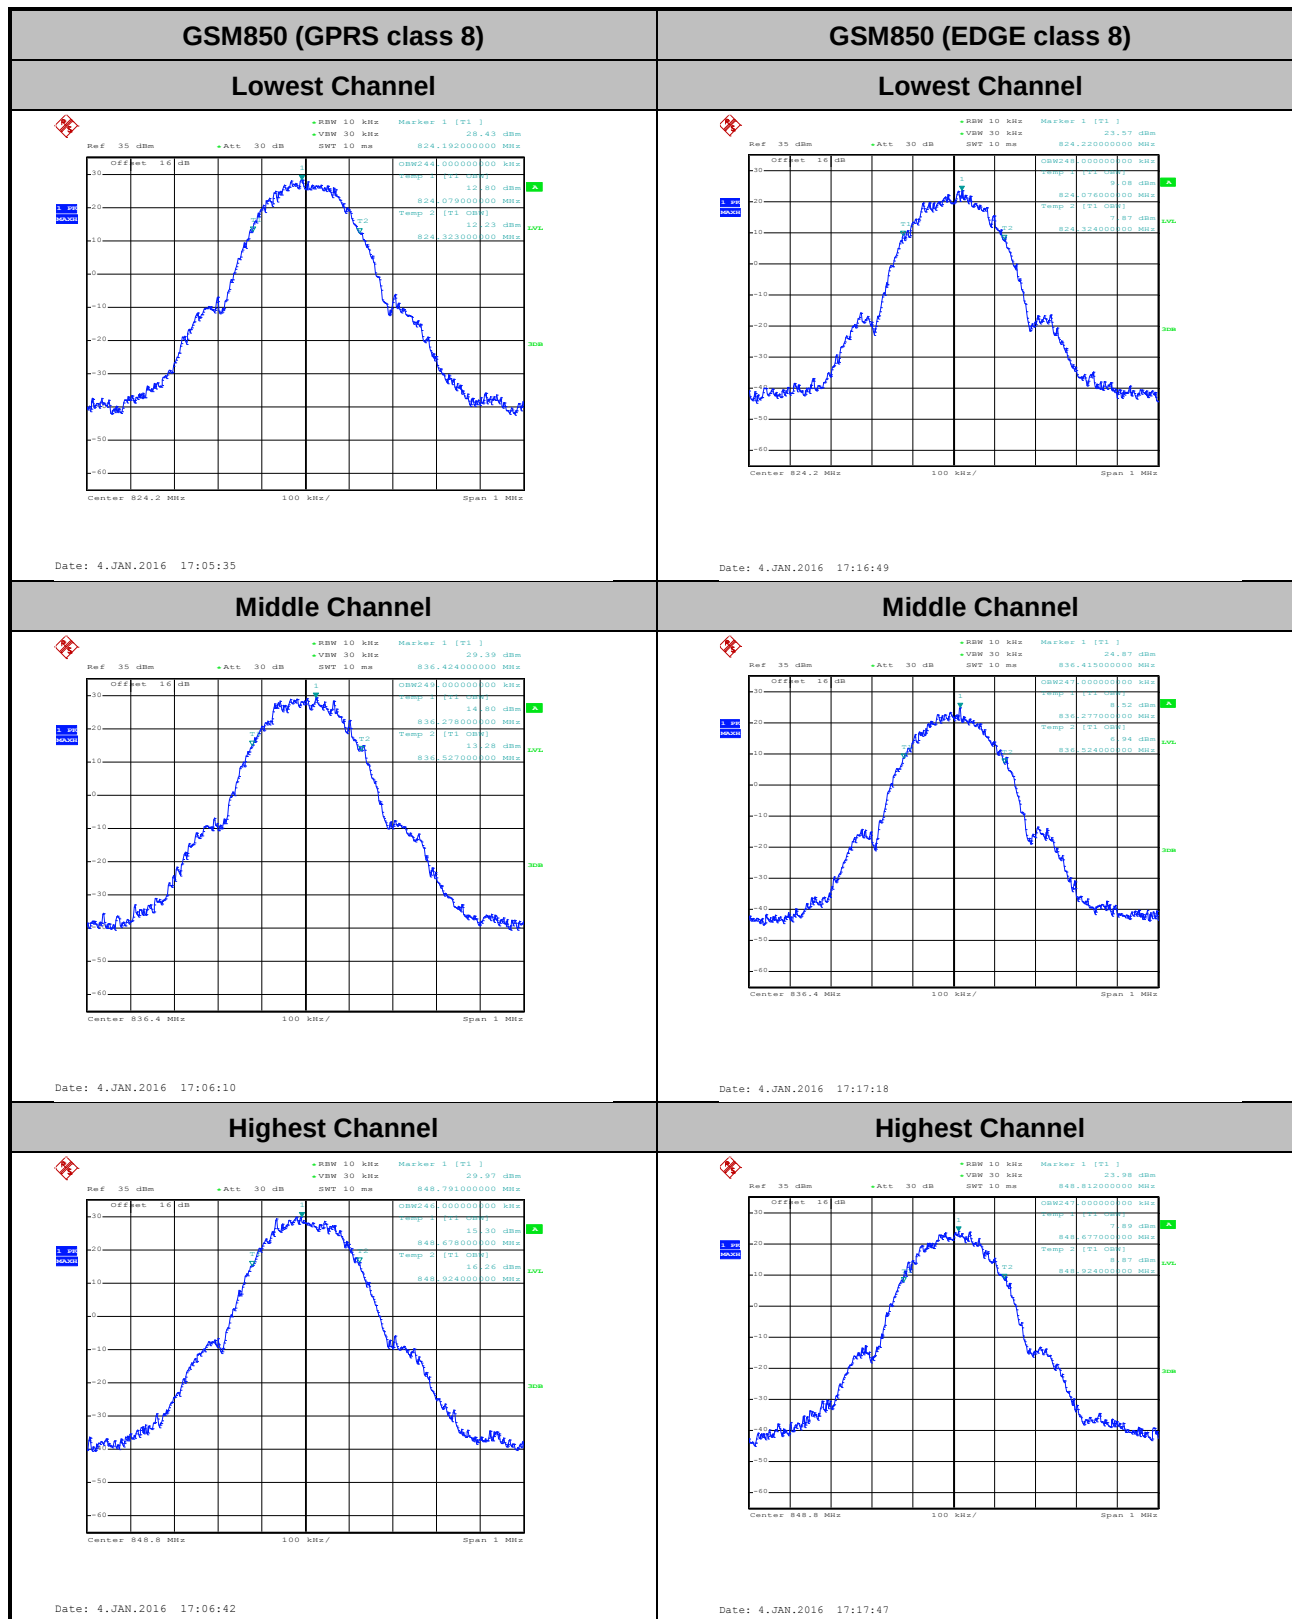

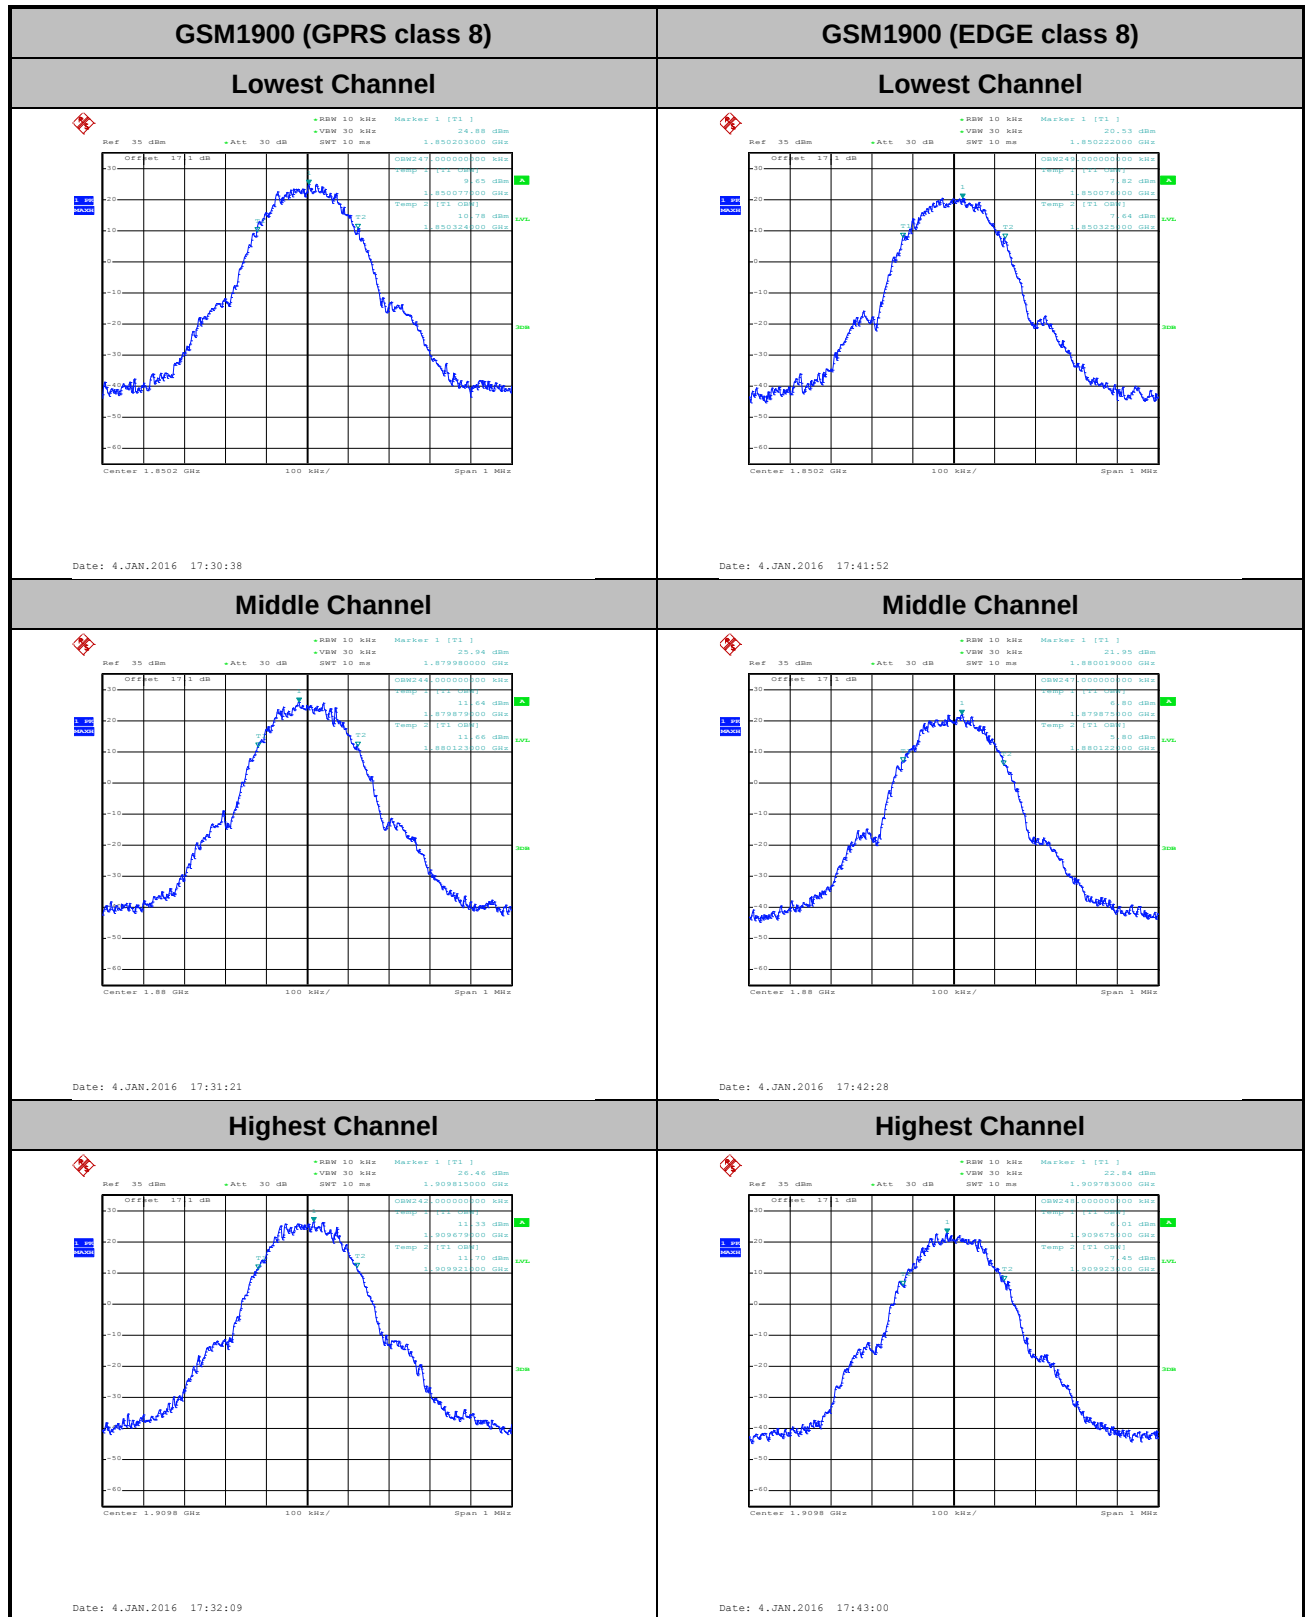




Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

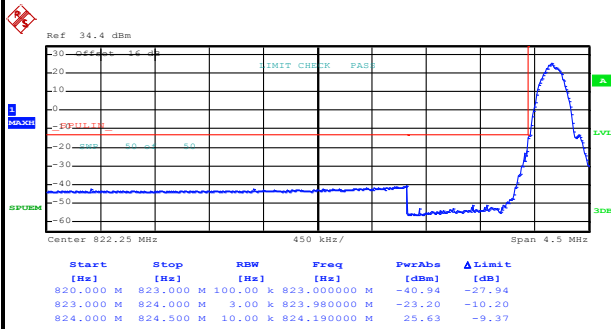

Date: 4.JAN.2016 17:08:15


Highest Band Edge

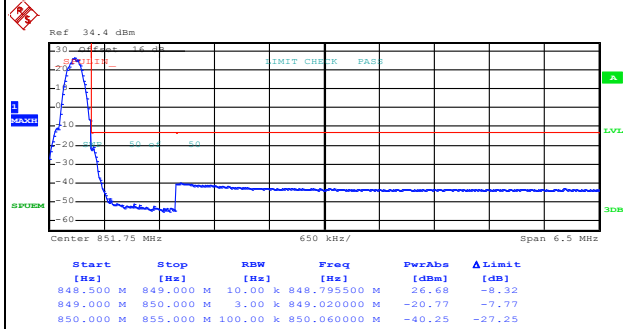

Date: 4.JAN.2016 17:09:46


GSM850 (EDGE class 8)

Lowest Band Edge

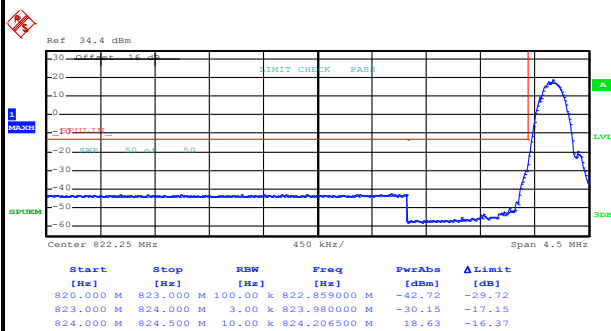

Date: 4.JAN.2016 17:19:24

Highest Band Edge

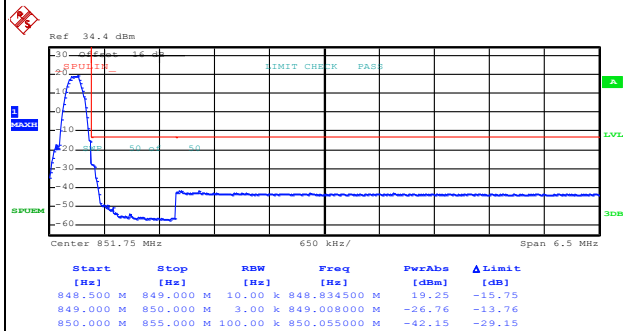


Date: 4.JAN.2016 17:20:53




GSM1900 (GPRS class 8)

Lowest Band Edge

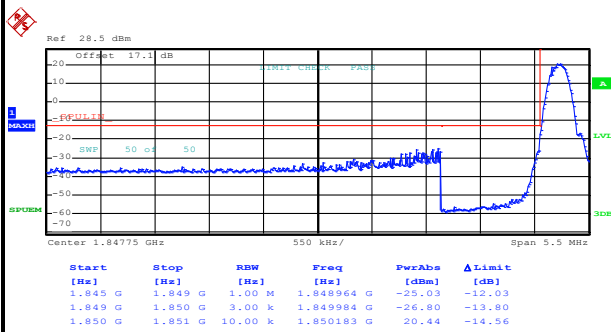

Date: 4.JAN.2016 17:33:59


Highest Band Edge

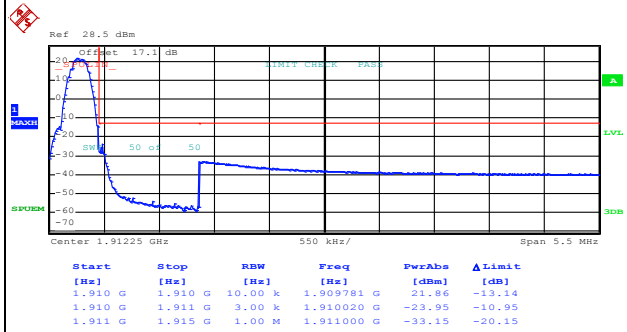

Date: 4.JAN.2016 17:35:28


GSM1900 (EDGE class 8)

Lowest Band Edge

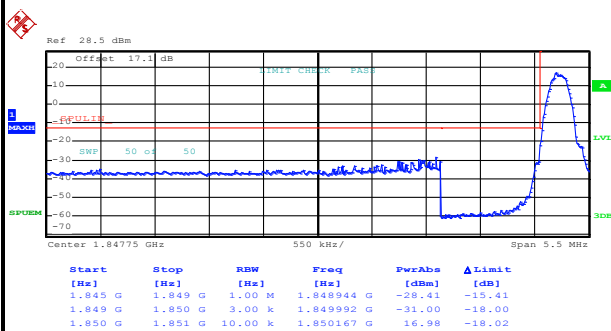

Date: 4.JAN.2016 17:44:36







Highest Band Edge

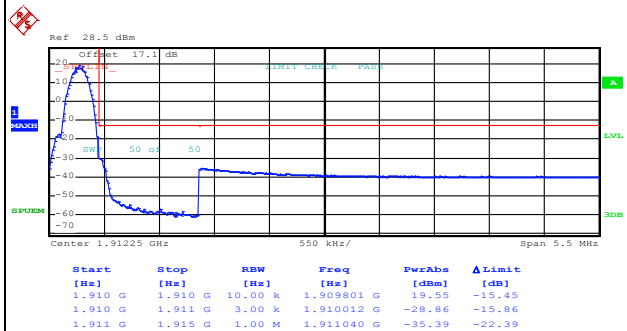


Date: 4.JAN.2016 17:46:06



Conducted Spurious Emission

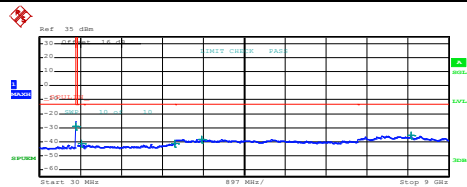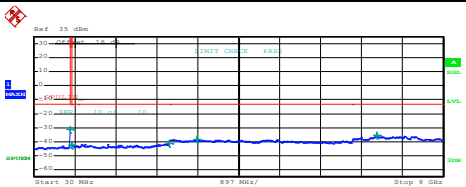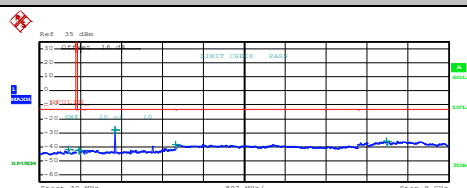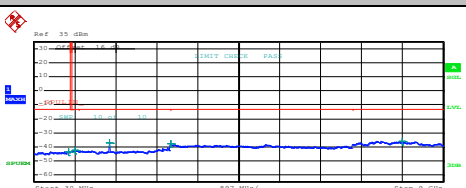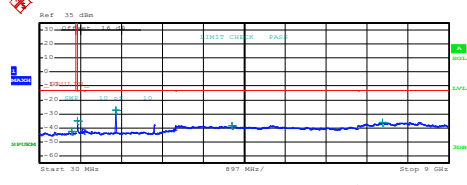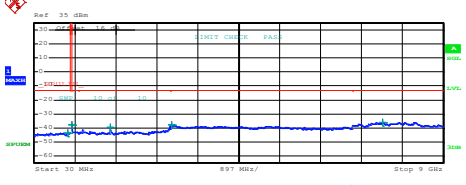GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																																					
Lowest Channel		Lowest Channel																																																																																					
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-28.80</td><td>-15.80</td></tr><tr><td>850.000 M</td><td>1.000 G</td><td>1.00 M</td><td>939.317500 M</td><td>-41.31</td><td>-28.31</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.999000 G</td><td>-41.06</td><td>-28.06</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.581000 G</td><td>-38.36</td><td>-25.36</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.166500 G</td><td>-35.57</td><td>-22.57</td></tr></table> Date: 4.JAN.2016 17:10:45		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	819.802500 M	-28.80	-15.80	850.000 M	1.000 G	1.00 M	939.317500 M	-41.31	-28.31	1.000 G	3.000 G	1.00 M	2.999000 G	-41.06	-28.06	3.000 G	7.000 G	1.00 M	3.581000 G	-38.36	-25.36	7.000 G	9.000 G	1.00 M	8.166500 G	-35.57	-22.57	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-31.66</td><td>-18.66</td></tr><tr><td>850.000 M</td><td>1.000 G</td><td>1.00 M</td><td>939.317500 M</td><td>-42.59</td><td>-29.59</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.999000 G</td><td>-41.28</td><td>-28.28</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.599000 G</td><td>-38.37</td><td>-25.37</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.546500 G</td><td>-35.73</td><td>-22.73</td></tr></table> Date: 4.JAN.2016 17:21:47		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	819.802500 M	-31.66	-18.66	850.000 M	1.000 G	1.00 M	939.317500 M	-42.59	-29.59	1.000 G	3.000 G	1.00 M	2.999000 G	-41.28	-28.28	3.000 G	7.000 G	1.00 M	3.599000 G	-38.37	-25.37	7.000 G	9.000 G	1.00 M	7.546500 G	-35.73	-22.73
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	819.802500 M	-28.80	-15.80																																																																																		
850.000 M	1.000 G	1.00 M	939.317500 M	-41.31	-28.31																																																																																		
1.000 G	3.000 G	1.00 M	2.999000 G	-41.06	-28.06																																																																																		
3.000 G	7.000 G	1.00 M	3.581000 G	-38.36	-25.36																																																																																		
7.000 G	9.000 G	1.00 M	8.166500 G	-35.57	-22.57																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	819.802500 M	-31.66	-18.66																																																																																		
850.000 M	1.000 G	1.00 M	939.317500 M	-42.59	-29.59																																																																																		
1.000 G	3.000 G	1.00 M	2.999000 G	-41.28	-28.28																																																																																		
3.000 G	7.000 G	1.00 M	3.599000 G	-38.37	-25.37																																																																																		
7.000 G	9.000 G	1.00 M	7.546500 G	-35.73	-22.73																																																																																		
Middle Channel		Middle Channel																																																																																					
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>663.975000 M</td><td>-42.19</td><td>-29.19</td></tr><tr><td>850.000 M</td><td>1.000 G</td><td>1.00 M</td><td>898.103250 M</td><td>-42.32</td><td>-29.32</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.673000 G</td><td>-27.58</td><td>-14.58</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.011000 G</td><td>-38.40</td><td>-25.40</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.638500 G</td><td>-36.09</td><td>-23.09</td></tr></table> Date: 4.JAN.2016 17:11:54		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	663.975000 M	-42.19	-29.19	850.000 M	1.000 G	1.00 M	898.103250 M	-42.32	-29.32	1.000 G	3.000 G	1.00 M	1.673000 G	-27.58	-14.58	3.000 G	7.000 G	1.00 M	5.011000 G	-38.40	-25.40	7.000 G	9.000 G	1.00 M	7.638500 G	-36.09	-23.09	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>789.005000 M</td><td>-43.41</td><td>-30.41</td></tr><tr><td>850.000 M</td><td>1.000 G</td><td>1.00 M</td><td>820.832500 M</td><td>-42.25</td><td>-29.25</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.673500 G</td><td>-37.08</td><td>-24.08</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.023000 G</td><td>-37.98</td><td>-24.98</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.087000 G</td><td>-36.18</td><td>-23.18</td></tr></table> Date: 4.JAN.2016 17:22:37		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	789.005000 M	-43.41	-30.41	850.000 M	1.000 G	1.00 M	820.832500 M	-42.25	-29.25	1.000 G	3.000 G	1.00 M	1.673500 G	-37.08	-24.08	3.000 G	7.000 G	1.00 M	5.023000 G	-37.98	-24.98	7.000 G	9.000 G	1.00 M	8.087000 G	-36.18	-23.18
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	663.975000 M	-42.19	-29.19																																																																																		
850.000 M	1.000 G	1.00 M	898.103250 M	-42.32	-29.32																																																																																		
1.000 G	3.000 G	1.00 M	1.673000 G	-27.58	-14.58																																																																																		
3.000 G	7.000 G	1.00 M	5.011000 G	-38.40	-25.40																																																																																		
7.000 G	9.000 G	1.00 M	7.638500 G	-36.09	-23.09																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	789.005000 M	-43.41	-30.41																																																																																		
850.000 M	1.000 G	1.00 M	820.832500 M	-42.25	-29.25																																																																																		
1.000 G	3.000 G	1.00 M	1.673500 G	-37.08	-24.08																																																																																		
3.000 G	7.000 G	1.00 M	5.023000 G	-37.98	-24.98																																																																																		
7.000 G	9.000 G	1.00 M	8.087000 G	-36.18	-23.18																																																																																		
Highest Channel		Highest Channel																																																																																					
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>733.692500 M</td><td>-42.50</td><td>-29.50</td></tr><tr><td>850.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.108750 M</td><td>-35.17</td><td>-22.17</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.698000 G</td><td>-27.04</td><td>-14.04</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.248000 G</td><td>-38.36</td><td>-25.36</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.539000 G</td><td>-36.04</td><td>-23.04</td></tr></table> Date: 4.JAN.2016 17:12:40		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	733.692500 M	-42.50	-29.50	850.000 M	1.000 G	1.00 M	855.108750 M	-35.17	-22.17	1.000 G	3.000 G	1.00 M	1.698000 G	-27.04	-14.04	3.000 G	7.000 G	1.00 M	4.248000 G	-38.36	-25.36	7.000 G	9.000 G	1.00 M	7.539000 G	-36.04	-23.04	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>769.045000 M</td><td>-43.68</td><td>-30.68</td></tr><tr><td>850.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-37.89</td><td>-24.89</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.698000 G</td><td>-39.79</td><td>-26.79</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.045000 G</td><td>-38.07</td><td>-25.07</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.668000 G</td><td>-35.89</td><td>-22.89</td></tr></table> Date: 4.JAN.2016 17:23:26		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	769.045000 M	-43.68	-30.68	850.000 M	1.000 G	1.00 M	855.036250 M	-37.89	-24.89	1.000 G	3.000 G	1.00 M	1.698000 G	-39.79	-26.79	3.000 G	7.000 G	1.00 M	5.045000 G	-38.07	-25.07	7.000 G	9.000 G	1.00 M	7.668000 G	-35.89	-22.89
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	733.692500 M	-42.50	-29.50																																																																																		
850.000 M	1.000 G	1.00 M	855.108750 M	-35.17	-22.17																																																																																		
1.000 G	3.000 G	1.00 M	1.698000 G	-27.04	-14.04																																																																																		
3.000 G	7.000 G	1.00 M	4.248000 G	-38.36	-25.36																																																																																		
7.000 G	9.000 G	1.00 M	7.539000 G	-36.04	-23.04																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	769.045000 M	-43.68	-30.68																																																																																		
850.000 M	1.000 G	1.00 M	855.036250 M	-37.89	-24.89																																																																																		
1.000 G	3.000 G	1.00 M	1.698000 G	-39.79	-26.79																																																																																		
3.000 G	7.000 G	1.00 M	5.045000 G	-38.07	-25.07																																																																																		
7.000 G	9.000 G	1.00 M	7.668000 G	-35.89	-22.89																																																																																		

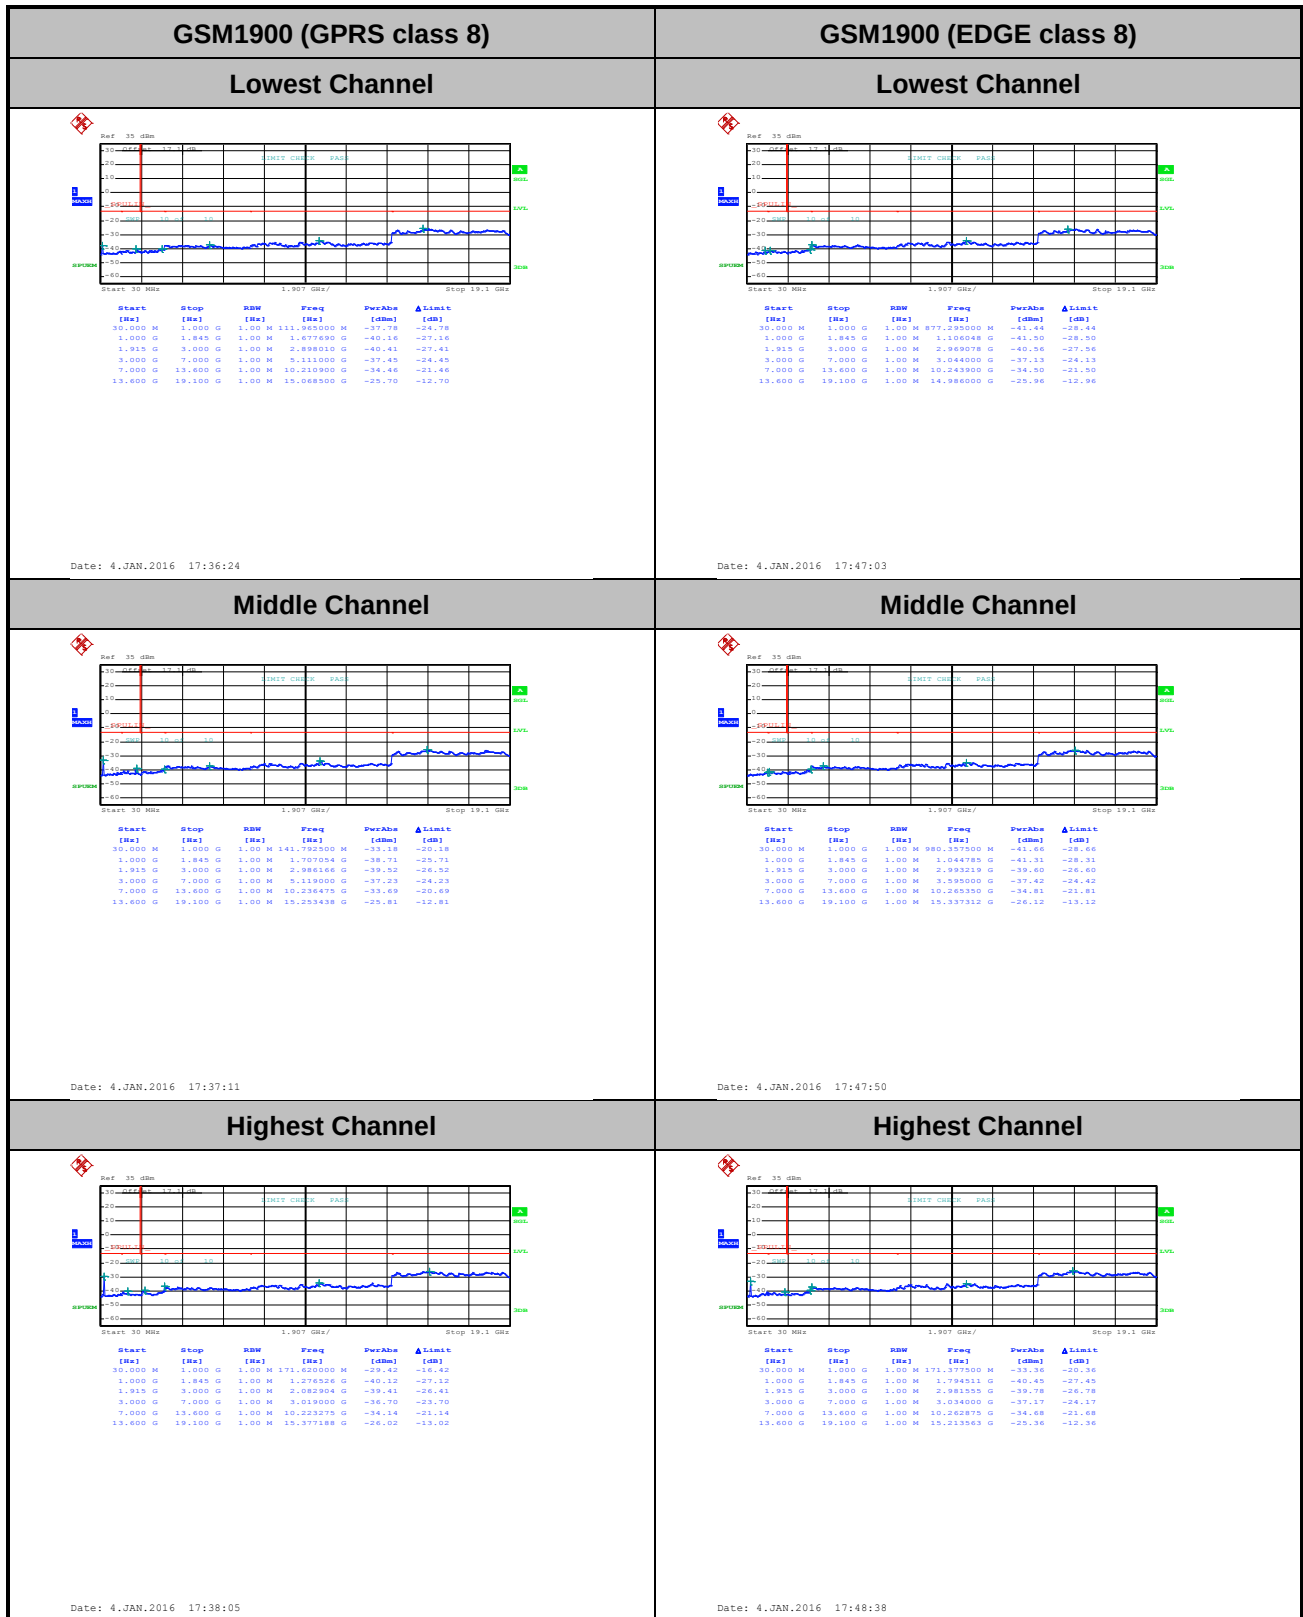

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0765	0.0956	PASS
40	Normal Voltage	0.0143	0.0060	
30	Normal Voltage	0.0813	0.0909	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0885	0.0096	
0	Normal Voltage	0.0132	0.0012	
-10	Normal Voltage	0.0036	0.1184	
-20	Normal Voltage	0.0096	0.0897	
-30	Normal Voltage	0.0801	0.1016	
20	Maximum Voltage	0.0024	0.0000	
20	Normal Voltage	0.0729	0.0933	
20	Battery End Point	0.0789	0.0980	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0016	0.0713	PASS
40	Normal Voltage	0.0011	0.0612	
30	Normal Voltage	0.0138	0.0638	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0043	0.0622	
0	Normal Voltage	0.0117	0.0872	
-10	Normal Voltage	0.0170	0.0761	
-20	Normal Voltage	0.0622	0.0676	
-30	Normal Voltage	0.0005	0.0617	
20	Maximum Voltage	0.0080	0.0021	
20	Normal Voltage	0.0059	0.0612	
20	Battery End Point	0.0048	0.0644	

Note:







1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



A2. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.04	2.96	PASS
Middle CH	2.96	3.20	
Highest CH	3.00	3.24	

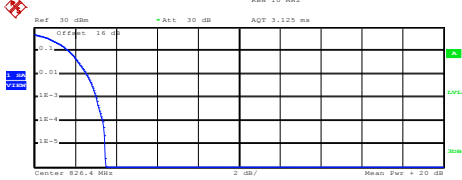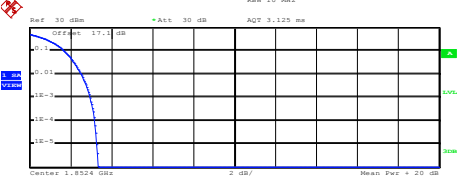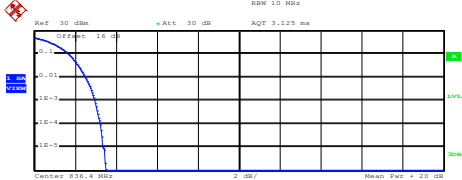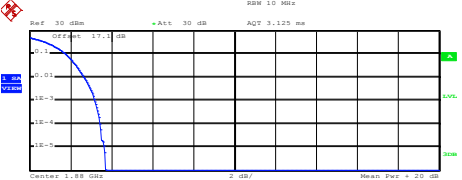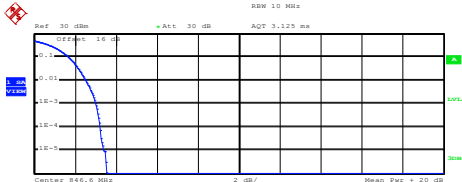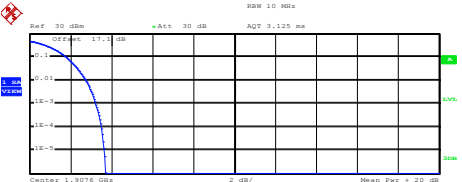WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																
Lowest Channel	Lowest Channel																
 Center 826.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.93 dBm Peak 23.41 dBm Crest 3.48 dB <table border="1"> <tr><td>10 %</td><td>1.68 dB</td></tr> <tr><td>1 %</td><td>2.56 dB</td></tr> <tr><td>.1 %</td><td>3.04 dB</td></tr> <tr><td>.01 %</td><td>3.36 dB</td></tr> </table> Date: 4.JAN.2016 18:17:09	10 %	1.68 dB	1 %	2.56 dB	.1 %	3.04 dB	.01 %	3.36 dB	 Center 1.8524 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 20.00 dBm Peak 23.34 dBm Crest 3.34 dB <table border="1"> <tr><td>10 %</td><td>1.68 dB</td></tr> <tr><td>1 %</td><td>2.52 dB</td></tr> <tr><td>.1 %</td><td>2.96 dB</td></tr> <tr><td>.01 %</td><td>3.20 dB</td></tr> </table> Date: 4.JAN.2016 18:03:21	10 %	1.68 dB	1 %	2.52 dB	.1 %	2.96 dB	.01 %	3.20 dB
10 %	1.68 dB																
1 %	2.56 dB																
.1 %	3.04 dB																
.01 %	3.36 dB																
10 %	1.68 dB																
1 %	2.52 dB																
.1 %	2.96 dB																
.01 %	3.20 dB																
Middle Channel	Middle Channel																
 Center 836.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.64 dBm Peak 23.13 dBm Crest 3.49 dB <table border="1"> <tr><td>10 %</td><td>1.68 dB</td></tr> <tr><td>1 %</td><td>2.52 dB</td></tr> <tr><td>.1 %</td><td>2.96 dB</td></tr> <tr><td>.01 %</td><td>3.24 dB</td></tr> </table> Date: 4.JAN.2016 18:17:21	10 %	1.68 dB	1 %	2.52 dB	.1 %	2.96 dB	.01 %	3.24 dB	 Center 1.85 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.55 dBm Peak 23.27 dBm Crest 3.72 dB <table border="1"> <tr><td>10 %</td><td>1.76 dB</td></tr> <tr><td>1 %</td><td>2.68 dB</td></tr> <tr><td>.1 %</td><td>3.20 dB</td></tr> <tr><td>.01 %</td><td>3.44 dB</td></tr> </table> Date: 4.JAN.2016 18:03:31	10 %	1.76 dB	1 %	2.68 dB	.1 %	3.20 dB	.01 %	3.44 dB
10 %	1.68 dB																
1 %	2.52 dB																
.1 %	2.96 dB																
.01 %	3.24 dB																
10 %	1.76 dB																
1 %	2.68 dB																
.1 %	3.20 dB																
.01 %	3.44 dB																
Highest Channel	Highest Channel																
 Center 846.6 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.52 dBm Peak 23.06 dBm Crest 3.54 dB <table border="1"> <tr><td>10 %</td><td>1.68 dB</td></tr> <tr><td>1 %</td><td>2.52 dB</td></tr> <tr><td>.1 %</td><td>3.00 dB</td></tr> <tr><td>.01 %</td><td>3.24 dB</td></tr> </table> Date: 4.JAN.2016 18:17:31	10 %	1.68 dB	1 %	2.52 dB	.1 %	3.00 dB	.01 %	3.24 dB	 Center 1.9076 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.27 dBm Peak 22.98 dBm Crest 3.71 dB <table border="1"> <tr><td>10 %</td><td>1.80 dB</td></tr> <tr><td>1 %</td><td>2.76 dB</td></tr> <tr><td>.1 %</td><td>3.24 dB</td></tr> <tr><td>.01 %</td><td>3.52 dB</td></tr> </table> Date: 4.JAN.2016 18:03:40	10 %	1.80 dB	1 %	2.76 dB	.1 %	3.24 dB	.01 %	3.52 dB
10 %	1.68 dB																
1 %	2.52 dB																
.1 %	3.00 dB																
.01 %	3.24 dB																
10 %	1.80 dB																
1 %	2.76 dB																
.1 %	3.24 dB																
.01 %	3.52 dB																




26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.67	4.66
Middle CH	4.68	4.66
Highest CH	4.67	4.66



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

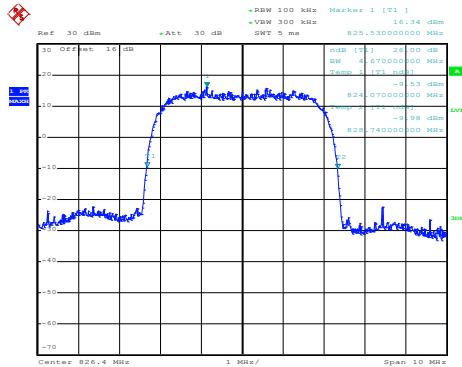

Date: 4.JAN.2016 18:05:56


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

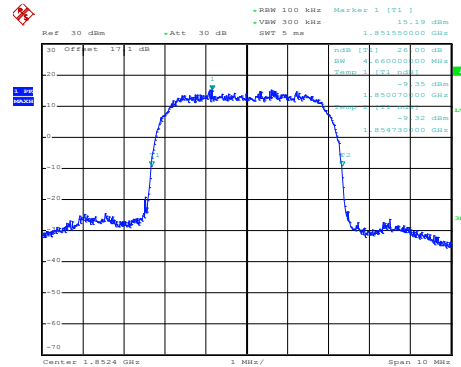


Date: 4.JAN.2016 17:52:34

Middle Channel

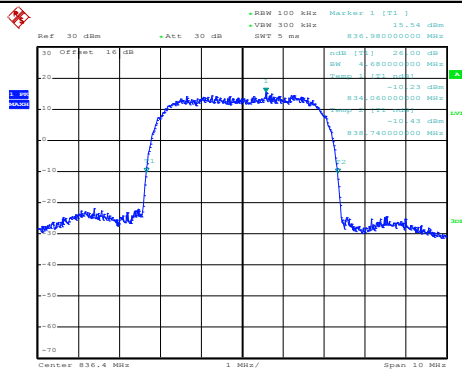


Date: 4.JAN.2016 18:06:24

Middle Channel

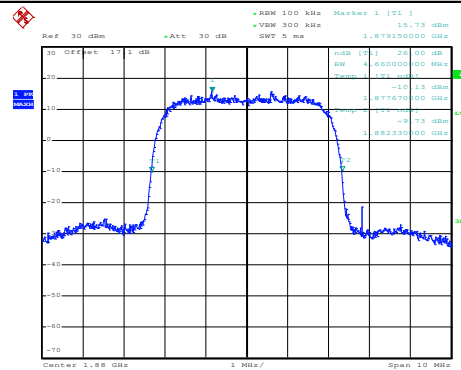


Date: 4.JAN.2016 17:53:02

Highest Channel

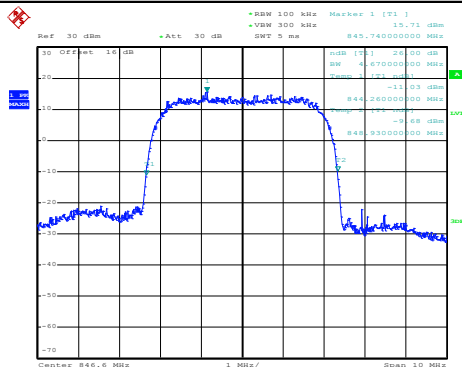

Date: 4.JAN.2016 18:06:52

Highest Channel

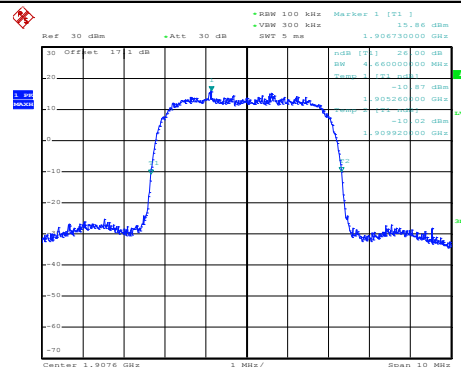


Date: 4.JAN.2016 17:53:30



Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.17	4.16
Middle CH	4.16	4.16
Highest CH	4.16	4.16

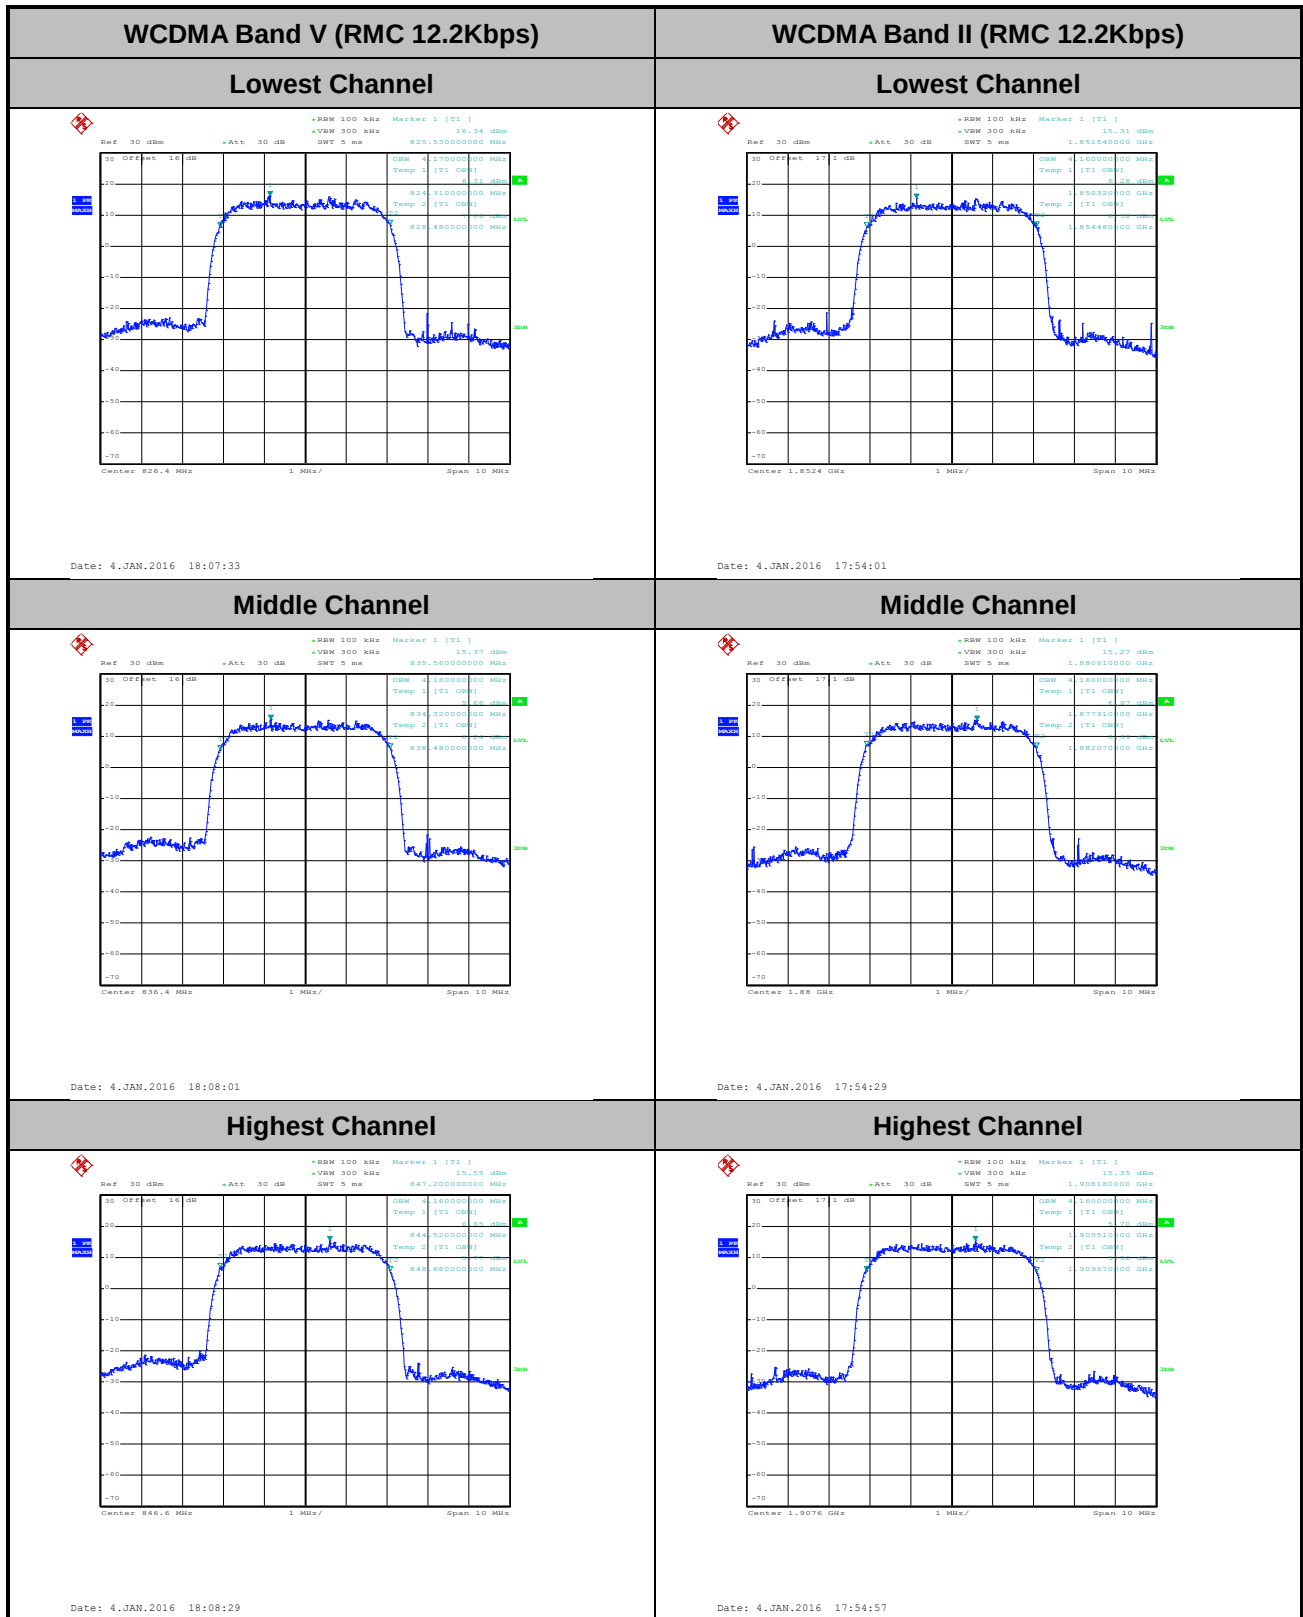




Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

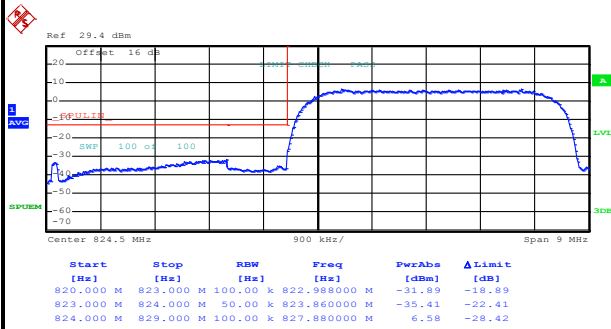

Date: 4.JAN.2016 18:11:15

Highest Band Edge

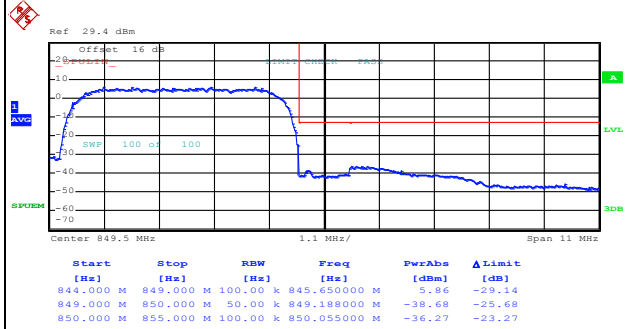


Date: 4.JAN.2016 18:13:58




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

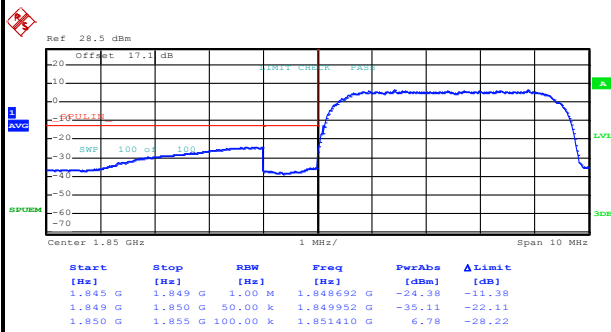

Date: 4.JAN.2016 17:57:49

Highest Band Edge

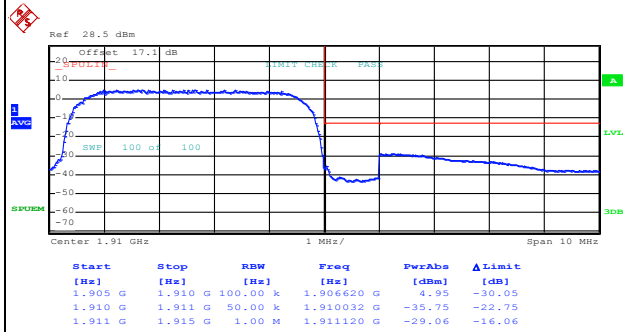


Date: 4.JAN.2016 18:00:32



Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

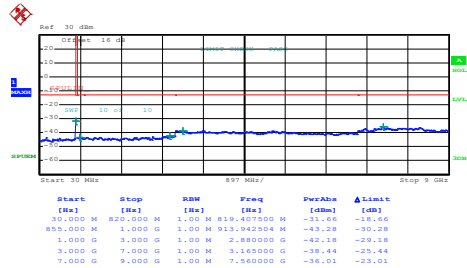

Date: 4.JAN.2016 18:18:35


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

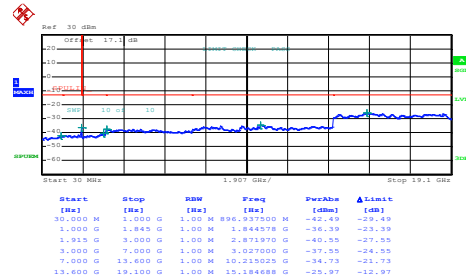


Date: 4.JAN.2016 18:01:35

Middle Channel

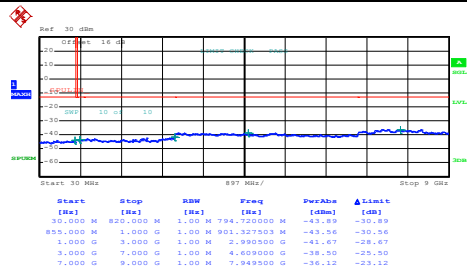


Date: 4.JAN.2016 18:19:21

Middle Channel

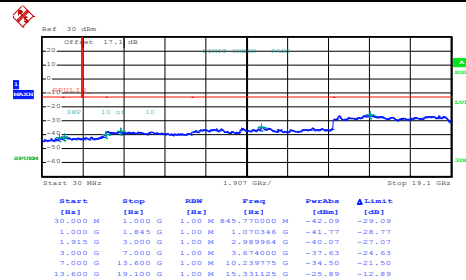


Date: 4.JAN.2016 18:02:21

Highest Channel

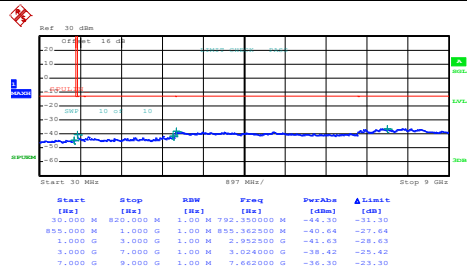

Date: 4.JAN.2016 18:20:20

Highest Channel

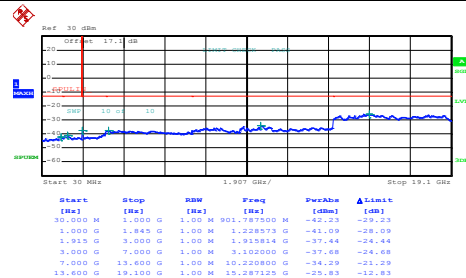

Date: 4.JAN.2016 18:03:07

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0670	PASS
40	Normal Voltage	0.0622	
30	Normal Voltage	0.0580	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0505	
0	Normal Voltage	0.0649	
-10	Normal Voltage	0.0080	
-20	Normal Voltage	0.0085	
-30	Normal Voltage	0.0516	
20	Maximum Voltage	0.0500	
20	Normal Voltage	0.0011	
20	Battery End Point	0.0027	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0084	
30	Normal Voltage	0.0036	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0108	
0	Normal Voltage	0.0837	
-10	Normal Voltage	0.0921	
-20	Normal Voltage	0.0753	
-30	Normal Voltage	0.0036	
20	Maximum Voltage	0.0777	
20	Normal Voltage	0.0179	
20	Battery End Point	0.0813	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

ERP/EIRP

Channel	Mode	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8	25.38	0.3454	14.79	0.0302
Middle		26.57	0.4539	7.82	0.0061
Highest		27.26	0.5320	8.73	0.0075
Lowest	GSM850 EDGE class 8	19.53	0.0897	1.54	0.0014
Middle		21.01	0.1261	3.06	0.0020
Highest		21.25	0.1333	3.32	0.0021
Lowest	WCDMA Band V RMC 12.2Kbps	14.64	0.0291	-4.12	0.0004
Middle		15.66	0.0368	-3.26	0.0005
Highest		15.73	0.0374	-3.34	0.0005
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8	28.65	0.7326	21.86	0.1533
Middle		27.53	0.5658	20.35	0.1083
Highest		26.53	0.4498	19.45	0.0882
Lowest	GSM1900 EDGE class 8	24.19	0.2625	17.41	0.0550
Middle		23.22	0.2097	16.27	0.0424
Highest		22.49	0.1772	15.54	0.0358
Lowest	WCDMA Band II RMC 12.2Kbps	19.66	0.0925	12.98	0.0199
Middle		19.87	0.0970	12.98	0.0199
Highest		19.41	0.0873	13.02	0.0201
Limit	EIRP < 2W	Result		PASS	



Radiated Spurious Emission

GSM850 (GPRS class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-30.78	-13	-17.78	-40.35	-32.54	0.98	4.89	H
	2472	-33.39	-13	-20.39	-46.51	-35.27	1.28	5.32	H
	3296	-32.64	-13	-19.64	-49.17	-36.05	1.54	7.10	H
	4120	-34.29	-13	-21.29	-55.41	-38.93	1.83	8.62	H
	4944	-40.08	-13	-27.08	-62.72	-45.21	2.30	9.59	H
	5768	-47.16	-13	-34.16	-71.44	-52.04	2.78	9.81	H
	1648	-34.88	-13	-21.88	-42.53	-36.64	0.98	4.89	V
	2472	-32.71	-13	-19.71	-47.91	-34.59	1.28	5.32	V
	3296	-33.77	-13	-20.77	-49.18	-37.18	1.54	7.10	V
	4120	-32.84	-13	-19.84	-52.94	-37.48	1.83	8.62	V
	4944	-40.51	-13	-27.51	-61.96	-45.64	2.30	9.59	V
	5768	-47.25	-13	-34.25	-70.69	-52.13	2.78	9.81	V
Middle	1672	-32.21	-13	-19.21	-41.51	-33.89	0.99	4.82	H
	2512	-32.22	-13	-19.22	-45.54	-34.19	1.29	5.41	H
	3344	-35.43	-13	-22.43	-51.65	-39.04	1.56	7.31	H
	4184	-34.22	-13	-21.22	-55.32	-38.84	1.87	8.64	H
	5016	-42.11	-13	-29.11	-64.92	-47.31	2.35	9.70	H
	5856	-48.18	-13	-35.18	-72.88	-53.04	2.83	9.84	H
	1672	-36.86	-13	-23.86	-44.18	-38.54	0.99	4.82	V
	2512	-33.84	-13	-20.84	-49.19	-35.81	1.29	5.41	V
	3344	-34.77	-13	-21.77	-50.02	-38.38	1.56	7.31	V
	4184	-34.21	-13	-21.21	-53.28	-38.83	1.87	8.64	V
	5016	-44.74	-13	-31.74	-66.16	-49.94	2.35	9.70	V
	5856	-47.89	-13	-34.89	-71.93	-52.75	2.83	9.84	V
Highest	1696	-32.61	-13	-19.61	-41.99	-34.21	1.00	4.75	H
	2544	-37.96	-13	-24.96	-51.68	-39.94	1.30	5.44	H
	3392	-36.31	-13	-23.31	-52.66	-40.11	1.57	7.52	H
	4248	-34.83	-13	-21.83	-56.26	-39.43	1.90	8.65	H
	5096	-42.13	-13	-29.13	-65.05	-47.29	2.39	9.70	H
	5944	-49.46	-13	-36.46	-74.53	-54.31	2.88	9.88	H
	1696	-35.88	-13	-22.88	-43.59	-37.48	1.00	4.75	V
	2544	-36.17	-13	-23.17	-51.54	-38.15	1.30	5.44	V
	3392	-32.87	-13	-19.87	-48.77	-36.67	1.57	7.52	V
	4248	-33.84	-13	-20.84	-53.96	-38.44	1.90	8.65	V
	5096	-44.52	-13	-31.52	-66.31	-49.68	2.39	9.70	V
	5944	-48.76	-13	-35.76	-73.06	-53.61	2.88	9.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-32.15	-13	-19.15	-41.72	-33.91	0.98	4.89	H
	2472	-33.16	-13	-20.16	-46.25	-35.04	1.28	5.32	H
	3296	-35.80	-13	-22.80	-52.33	-39.21	1.54	7.10	H
	4120	-33.67	-13	-20.67	-54.88	-38.31	1.83	8.62	H
	4944	-39.71	-13	-26.71	-62.25	-44.84	2.30	9.59	H
	5768	-46.05	-13	-33.05	-70.27	-50.93	2.78	9.81	H
	1648	-35.29	-13	-22.29	-42.88	-37.05	0.98	4.89	V
	2472	-33.05	-13	-20.05	-48.28	-34.93	1.28	5.32	V
	3296	-35.56	-13	-22.56	-50.89	-38.97	1.54	7.10	V
	4120	-33.50	-13	-20.50	-53.68	-38.14	1.83	8.62	V
	4944	-42.30	-13	-29.30	-63.79	-47.43	2.30	9.59	V
	5768	-47.43	-13	-34.43	-70.94	-52.31	2.78	9.81	V
Middle	1672	-33.61	-13	-20.61	-42.95	-35.29	0.99	4.82	H
	2512	-35.24	-13	-22.24	-48.45	-37.21	1.29	5.41	H
	3344	-35.77	-13	-22.77	-51.96	-39.38	1.56	7.31	H
	4184	-34.77	-13	-21.77	-55.88	-39.39	1.87	8.64	H
	5016	-40.64	-13	-27.64	-63.49	-45.84	2.35	9.70	H
	5856	-47.35	-13	-34.35	-72.07	-52.21	2.83	9.84	H
	1672	-36.93	-13	-23.93	-44.17	-38.61	0.99	4.82	V
	2512	-33.47	-13	-20.47	-48.82	-35.44	1.29	5.41	V
	3344	-34.37	-13	-21.37	-49.56	-37.98	1.56	7.31	V
	4184	-33.92	-13	-20.92	-54	-38.54	1.87	8.64	V
	5016	-44.41	-13	-31.41	-65.8	-49.61	2.35	9.70	V
	5856	-46.51	-13	-33.51	-70.52	-51.37	2.83	9.84	V
Highest	1696	-32.78	-13	-19.78	-42.22	-34.38	1.00	4.75	H
	2544	-35.55	-13	-22.55	-49.25	-37.53	1.30	5.44	H
	3392	-34.34	-13	-21.34	-50.81	-38.14	1.57	7.52	H
	4248	-34.41	-13	-21.41	-55.8	-39.01	1.90	8.65	H
	5096	-41.18	-13	-28.18	-63.96	-46.34	2.39	9.70	H
	5944	-48.96	-13	-35.96	-73.99	-53.81	2.88	9.88	H
	1696	-35.34	-13	-22.34	-43.1	-36.94	1.00	4.75	V
	2544	-36.51	-13	-23.51	-51.86	-40.64	1.30	5.44	V
	3392	-34.03	-13	-21.03	-49.88	-39.98	1.57	7.52	V
	4248	-33.52	-13	-20.52	-53.66	-40.27	1.90	8.65	V
	5096	-46.53	-13	-33.53	-68.19	-53.84	2.39	9.70	V
	5944	-49.09	-13	-36.09	-73.47	-56.09	2.88	9.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GPRS class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-44.86	-13	-31.86	-63.45	-51.43	1.67	8.24	H
	5548	-49.67	-13	-36.67	-73.41	-56.74	2.65	9.72	H
	12954.5	-29.25	-13	-16.25	-67.74	-39.28	2.92	12.94	H
	3700	-37.45	-13	-24.45	-55.99	-44.02	1.67	8.24	V
	5548	-52.19	-13	-39.19	-74.38	-59.26	2.65	9.72	V
	12954.5	-34.49	-13	-21.49	-70.58	-44.52	2.92	12.94	V
Middle	3763	-44.60	-13	-31.60	-63.72	-51.23	1.69	8.32	H
	5639	-50.07	-13	-37.07	-73.76	-57.12	2.71	9.76	H
	13163.5	-29.07	-13	-16.07	-68.09	-39.33	2.97	13.23	H
	3763	-38.25	-13	-25.25	-56.78	-44.88	1.69	8.32	V
	5639	-54.04	-13	-41.04	-76.36	-61.09	2.71	9.76	V
	13163.5	-29.88	-13	-16.88	-66.86	-40.14	2.97	13.23	V
Highest	3819	-45.26	-13	-32.26	-64.87	-51.94	1.70	8.38	H
	5730	-51.50	-13	-38.50	-75.65	-58.53	2.76	9.79	H
	13372.5	-29.09	-13	-16.09	-68.4	-39.59	3.02	13.52	H
	3819	-39.14	-13	-26.14	-57.84	-45.82	1.70	8.38	V
	5730	-52.97	-13	-39.97	-76.05	-60	2.76	9.79	V
	13372.5	-25.06	-13	-12.06	-63.1	-35.56	3.02	13.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-47.77	-13	-34.77	-66.43	-54.34	1.67	8.24	H
	5548	-51.60	-13	-38.60	-75.36	-58.67	2.65	9.72	H
	12954.5	-34.98	-13	-21.98	-73.42	-45.01	2.92	12.94	H
	3700	-42.57	-13	-29.57	-61.07	-49.14	1.67	8.24	V
	5548	-52.24	-13	-39.24	-74.44	-59.31	2.65	9.72	V
	12954.5	-38.44	-13	-25.44	-74.54	-48.47	2.92	12.94	V
Middle	3763	-48.23	-13	-35.23	-67.37	-54.86	1.69	8.32	H
	5639	-51.61	-13	-38.61	-75.28	-58.66	2.71	9.76	H
	13163.5	-31.82	-13	-18.82	-70.8	-42.08	2.97	13.23	H
	3763	-42.74	-13	-29.74	-61.33	-49.37	1.69	8.32	V
	5639	-54.54	-13	-41.54	-76.8	-61.59	2.71	9.76	V
	13163.5	-34.85	-13	-21.85	-71.84	-45.11	2.97	13.23	V
Highest	3819	-48.01	-13	-35.01	-67.6	-54.69	1.70	8.38	H
	5730	-53.25	-13	-40.25	-77.33	-60.28	2.76	9.79	H
	13372.5	-32.04	-13	-19.04	-71.35	-42.54	3.02	13.52	H
	3819	-43.29	-13	-30.29	-61.9	-49.97	1.70	8.38	V
	5730	-53.79	-13	-40.79	-76.97	-60.82	2.76	9.79	V
	13372.5	-33.57	-13	-20.57	-71.61	-44.07	3.02	13.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V (RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-42.76	-13	-29.76	-52.33	-44.52	0.98	4.89	H
	2480	-48.94	-13	-35.94	-61.91	-50.85	1.28	5.34	H
	3304	-50.71	-13	-37.71	-67.34	-54.15	1.54	7.14	H
	4128	-50.92	-13	-37.92	-72.14	-55.56	1.83	8.63	H
	1648	-50.29	-13	-37.29	-57.94	-52.05	0.98	4.89	V
	2480	-48.40	-13	-35.40	-63.55	-50.31	1.28	5.34	V
	3304	-51.70	-13	-38.70	-67.04	-55.14	1.54	7.14	V
	4128	-51.23	-13	-38.23	-71.36	-55.87	1.83	8.63	V
Middle	1672	-42.77	-13	-29.77	-52.07	-44.45	0.99	4.82	H
	2512	-45.80	-13	-32.80	-59.05	-47.77	1.29	5.41	H
	3352	-49.72	-13	-36.72	-65.95	-53.36	1.56	7.35	H
	4184	-50.27	-13	-37.27	-71.37	-54.89	1.87	8.64	H
	1672	-47.33	-13	-34.33	-54.51	-49.01	0.99	4.82	V
	2512	-47.61	-13	-34.61	-62.96	-49.58	1.29	5.41	V
	3352	-50.01	-13	-37.01	-65.17	-53.65	1.56	7.35	V
	4184	-50.56	-13	-37.56	-70.63	-55.18	1.87	8.64	V
Highest	1696	-50.26	-13	-37.26	-59.68	-51.86	1.00	4.75	H
	2536	-54.35	-13	-41.35	-67.74	-56.33	1.30	5.43	H
	3384	-54.40	-13	-41.40	-70.77	-58.17	1.57	7.49	H
	4232	-53.43	-13	-40.43	-74.7	-58.03	1.89	8.65	H
	1696	-50.32	-13	-37.32	-58.1	-51.92	1.00	4.75	V
	2536	-52.82	-13	-39.82	-68.18	-54.8	1.30	5.43	V
	3384	-53.45	-13	-40.45	-69.11	-57.22	1.57	7.49	V
	4232	-53.65	-13	-40.65	-73.74	-58.25	1.89	8.65	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II (RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-55.89	-13	-42.89	-74.63	-62.46	1.67	8.24	H
	5548	-54.10	-13	-41.10	-77.72	-61.17	2.65	9.72	H
	7403	-48.29	-13	-35.29	-77.13	-57.44	2.46	11.61	H
	3700	-50.04	-13	-37.04	-68.64	-56.61	1.67	8.24	V
	5548	-55.51	-13	-42.51	-77.71	-62.58	2.65	9.72	V
	7403	-49.34	-13	-36.34	-77.37	-58.49	2.46	11.61	V
Middle	3756	-54.81	-13	-41.81	-73.83	-61.43	1.68	8.31	H
	5639	-53.60	-13	-40.60	-77.32	-60.65	2.71	9.76	H
	7522	-48.77	-13	-35.77	-77.33	-58.16	2.42	11.81	H
	3763	-48.01	-13	-35.01	-66.63	-54.64	1.69	8.32	V
	5639	-55.04	-13	-42.04	-77.29	-62.09	2.71	9.76	V
	7522	-48.93	-13	-35.93	-77.25	-58.32	2.42	11.81	V
Highest	3812	-54.86	-13	-41.86	-74.14	-61.53	1.70	8.37	H
	5716	-53.52	-13	-40.52	-77.6	-60.56	2.75	9.79	H
	7627	-48.53	-13	-35.53	-76.94	-58.02	2.39	11.88	H
	3812	-52.49	-13	-39.49	-71.13	-59.16	1.70	8.37	V
	5716	-54.51	-13	-41.51	-77.5	-61.55	2.75	9.79	V
	7627	-48.52	-13	-35.52	-76.45	-58.01	2.39	11.88	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.