



RADIO TEST REPORT

Report No.:STS1901190W01

Issued for

Nortek Security & Control LLC

1950 Camino Vida Roble, Suite 150,Calsbad,CA,United States

Product Name:	ELAN 12" Touch Panel User Interface
Brand Name:	ELAN
Model Name:	ITP-12
Series Model:	N/A
FCC ID:	EF400183
IC ID:	1078A-00183
HVIN:	ITP-12
Test Standard:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109
	RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 April 2018
	ICES-003 Issue 6 January 2016

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





TEST RESULT CERTIFICATION

Applicant's name: **Nortek Security & Control LLC**
Address: 1950 Camino Vida Roble, Suite 150, Calsbad, CA, United States
Manufacture's Name: **Linear Electronics(Shenzhen) Limited**
Address: Hourui Second Industrila Zone, Hourui village, Hangcheng, Baoan, Shenzhen, P.R.C

Product description

Product Name: ELAN 12" Touch Panel User Interface
Brand Name: ELAN
Model Name: ITP-12
SeriesModel: N/A

Test Standards: CFR47 FCC Part 15: Subpart C Section 15.247
CFR47 FCC Part 15: Subpart C Section 15.207
CFR47 FCC Part 15: Subpart C Section 15.209
CFR47 FCC Part 15: Subpart B Section 15.107
CFR47 FCC Part 15: Subpart B Section 15.109
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 April 2018
ICES-003 Issue 6 January 2016

Test procedure: ANSI C63.10: 2013, ANSI C63.4: 2014

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: 09 Nov. 2018 -01 Feb. 2019

Date of Issue: 19 Feb. 2019

Test Result: **Pass**

Testing Engineer :

Chris Chen

(Chris Chen)

Technical Manager :

Sunday Hu

(Sunday Hu)

Authorized Signatory :

Vita Li

(Vita Li)





Table of Contents

Page

1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACTORY	7
1.2	MEASUREMENT UNCERTAINTY	7
2	GENERAL INFORMATION	8
2.1	GENERAL DESCRIPTION OF EUT	8
2.2	DESCRIPTION OF TEST MODES	10
2.3	BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4	DESCRIPTION OF SUPPORT UNITS	11
2.5	EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3	EMC EMISSION TEST	14
3.1	CONDUCTED EMISSION MEASUREMENT	14
3.2	RADIATED EMISSION MEASUREMENT	22
3.3	RADIATED SPURIOUS EMISSION MEASUREMENT	32
4	CONDUCTED SPURIOUS & BAND EDGE EMISSION	50
4.1	APPLIED PROCEDURES / LIMIT	50
4.2	TEST PROCEDURE	50
4.3	DEVIATION FROM STANDARD	50
4.4	TEST SETUP	50
4.5	EUT OPERATION CONDITIONS	50
4.6	TEST RESULTS	51
5	POWER SPECTRAL DENSITY TEST	60
5.1	APPLIED PROCEDURES / LIMIT	60
5.2	TEST PROCEDURE	60
5.3	DEVIATION FROM STANDARD	60
5.4	TEST SETUP	60
5.5	EUT OPERATION CONDITIONS	60
5.6	TEST RESULTS	61
6	BANDWIDTH TEST	67
6.1	APPLIED PROCEDURES / LIMIT	67
6.2	TEST PROCEDURE	67
6.3	DEVIATION FROM STANDARD	67
6.4	TEST SETUP	67
6.5	EUT OPERATION CONDITIONS	67
6.6	TEST RESULTS	68



7	PEAK OUTPUT POWER TEST	80
7.1	APPLIED PROCEDURES / LIMIT	80
7.2	TEST PROCEDURE	80
7.3	DEVIATION FROM STANDARD	80
7.4	TEST SETUP	80
7.5	EUT OPERATION CONDITIONS	80
7.6	TEST RESULTS	81
8	ANTENNA REQUIREMENT	82
8.1	STANDARD REQUIREMENT	82
8.2	EUT ANTENNA	82



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	19 Feb. 2019	STS1901190W01	ALL	Initial Issue





1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 558074 D01 DTS Meas Guidance v05

FCC Part 15, Subpart C RSS-247 Issue 2			
Standard Section	Test Item	Judgment	Remark
FCC Part 15.207(a) RSS-Gen Clause 8.8	Conducted Emission	PASS	
FCC Part 15.247(a)(2) RSS-247 Clause 5.2(a)	6dB Bandwidth	PASS	
RSS-Gen Clause 6.6	99% Bandwidth	PASS	
FCC Part 15.247(b)(3) RSS-247 Clause 5.4(d)	Output Power	PASS	
FCC Part 15.247(d) RSS-247 Clause 3.3	Radiated Spurious Emission	PASS	
FCC Part 15.247(d) RSS-247 Clause 5.5	Conducted Spurious & Band Edge Emission	PASS	
FCC Part 15.247(e) RSS-247 Clause 5.2(b)	Power Spectral Density	PASS	
FCC Part 15.205	Restricted Band Edge Emission	PASS	
FCC Part 15.247(d)&15.209(a) RSS-247 Clause 5.5	Band Edge Emission	PASS	
FCC Part 15.247(b)(4) &15.203	Antenna Requirement	PASS	
RSS-Gen Issue 5 April 2018	Frequency Stability	PASS	

FCC Part 15, Subpart B ICES-003 Issue 6			
Standard Section	Test Item	Judgment	Remark
FCC Part 15.107(a) ICES-003	Conducted Emission	PASS	Class B limit
FCC Part 15.109(a) ICES-003	Radiated Emission	PASS	Class B limit

NOTE:

- 1) 'N/A' denotes test is not applicable in this test report
- 2) All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add.: 1/F., Building B, Zhuoke Science Park, No.190,Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong,China

FCC Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 3.18\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.70\text{dB}$
3	RF power,conducted	$\pm 0.71\text{dB}$
4	Spurious emissions,conducted	$\pm 0.63\text{dB}$
5	All emissions,radiated (9KHz-30MHz)	$\pm 2.50\text{dB}$
6	All emissions,radiated(30MHz-200MHz)	$\pm 3.43\text{dB}$
7	All emissions,radiated(200MHz-1000MHz)	$\pm 3.57\text{dB}$
8	All emissions,radiated(>1G)	$\pm 4.13\text{dB}$



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	ELAN 12" Touch Panel User Interface	
Trade Name	ELAN	
Model Name	ITP-12	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a ELAN 12" Touch Panel User Interface which supports Wi-Fi 802.11 b/g/n wireless technology.	
	Operation Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20)
	Modulation Type:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
	Bit Rate of Transmitter:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
	Number OfChannel:	11 channels for 802.11b/g/n(HT20)
	Antenna Designation:	Please see Note 4
	AntennaGain(dBi):	3.5dBi
	Duty Cycle:	>98%
Channel List	Please refer to the Note 2.	
Power Rating	Input:DC 12~14V; POE Interface	
Hardware version	N/A	
Software version	N/A	
Radio Hardware version	N/A	
Radio Software version	N/A	
Test Software	N/A	
RF Power Setting TEST Software (power class)	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	



Note:

- 1 For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

RF Channel and Frequency of Wi-Fi 802.11 b/g/n	
802.11b/g/n (HT20)	
RF Channel	Freq.(MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

- 3 Note:

- 1) In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test;
- 2) Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	ITP-12	Eternal FPC Antenna	N/A	3.5	WLAN Antenna



2.2 DESCRIPTION OF TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode10	Wi-Fi transmitting mode	/
Mode 11	Data transfer of RJ45 port (DC 12V)	/
Mode 12	Data transfer of RJ45 port (POE Interface)	/

Note:


- 1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- 2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.
- 3) Controlled using a bespoke application on the laptop PC supplied by the customer. The application was used to enable a continuous transmission mode and to select the test channels, data rates and modulation schemes as required.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

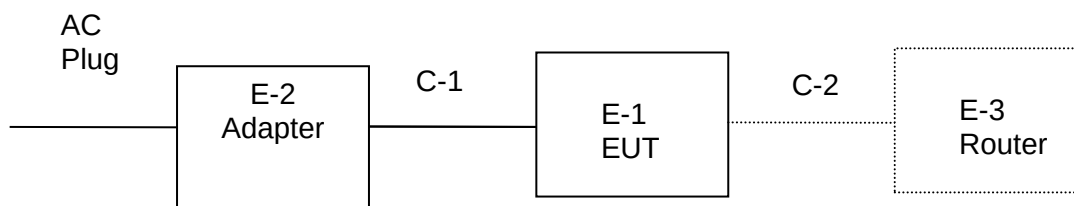

Conduction Test Set

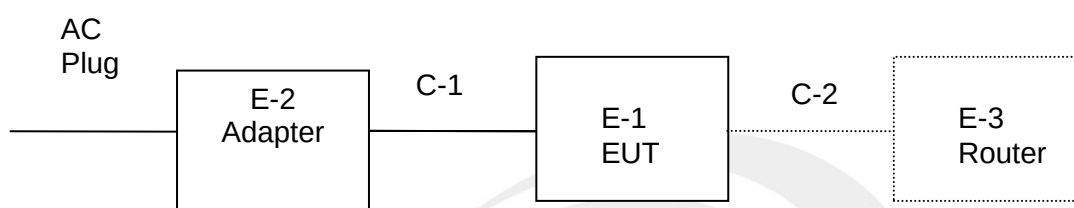

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Adapter	LITEON	PA-1650-86	N/A	N/A
E-3	Router	TP-LINK	TL-WR710N	N/A	N/A
E-4	PoE Injector	TP-LINK	TL-POE150S	N/A	N/A
E-5	Adapter	TP-LINK	T480050-2A1	N/A	N/A
E-6	Personal computer	HP	500-320cx	4CV428DQYN	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	DC Cable	YES	20cm	N/A
C-2	Ethernet cable	YES	60cm	N/A
C-3	Ethernet cable	NO	100cm	N/A

Note:

- 1) The support equipment was authorized by Declaration of Confirmation.
- 2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- 3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test Equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2017.10.27	2020.10.26
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	N/A	2018.03.11	2021.03.10
Temperature & Humidity	HH660	Mieo	N/A	2018.10.13	2019.10.12
Pre-mpplier (0.1M-3GHz)	EM	EM330	N/A	2018.03.09	2019.03.08
PreAmplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2018.10.13	2019.10.12
Passive Loop (9K--30MHz)	ZHINAN	ZN30900C	16035	2017.03.11	2020.03.10
Low frequency cable	EM	R01	N/A	2018.03.11	2019.03.10
Low frequency cable	EM	R06	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R04	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R02	N/A	2018.03.11	2019.03.10
Semi-anechoic chamber	Changling	966	N/A	2018.10.24	2020.10.23
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Max-full Antenna Corp	MF	MFA-440H	N/A	N/A	N/A

Conduction Test Equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
LISN	R&S	ENV216	101242	2018.10.13	2019.10.12
conduction Cable	EM	C01	N/A	2018.03.11	2019.03.10
Temperature & Humidity	Mieo	HH660	N/A	2018.10.13	2019.10.12



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2018.10.13	2019.10.12
MXA Signal analyzer	Agilent	N9020A	MY51110105	2018.03.08	2019.03.07
MXA Signal analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.





3 EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

operating frequency band. In case the emission fall within the restricted band specified on Part 15. 207(a), 107(a), RSS-Gen Table3 and ICES-003 Table2 limit in the table below has to be followed. This item was performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- 1) The tighter limit applies at the band edges.
- 2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

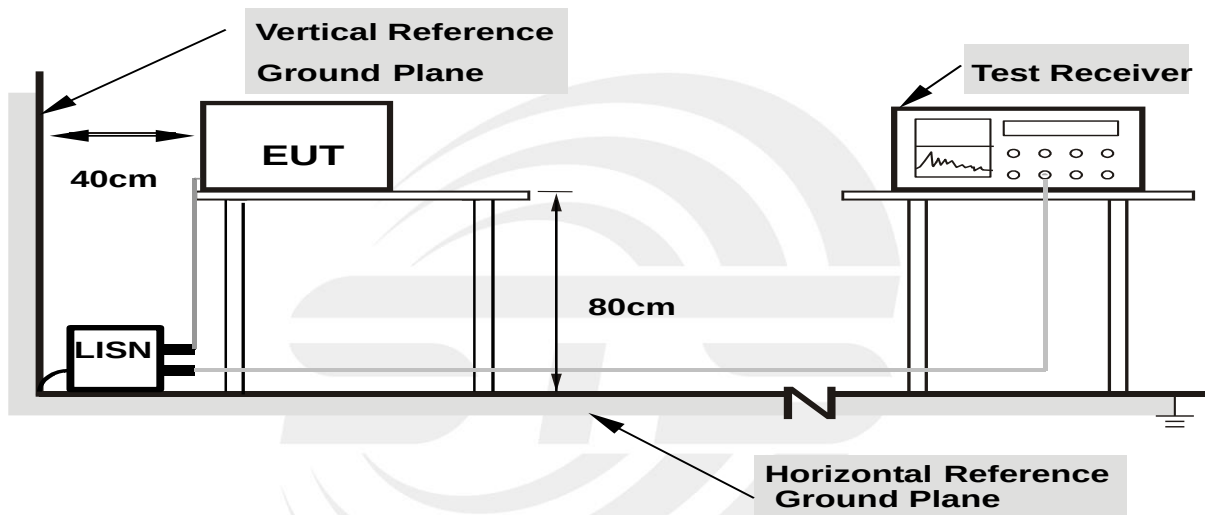

**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.5 TEST RESULT


Temperature:	23.5°C	Relative Humidity:	59%
Test Voltage:	120V/60Hz	Phase:	L
Test Mode:	Mode 10		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
0.1740	39.69	20.24	59.93	64.77	-4.84	QP
0.1740	4.74	20.24	24.98	54.77	-29.79	AVG
0.3980	32.11	20.49	52.60	57.90	-5.30	QP
0.3980	15.17	20.49	35.66	47.90	-12.24	AVG
0.9500	29.34	20.18	49.52	56.00	-6.48	QP
0.9500	8.20	20.18	28.38	46.00	-17.62	AVG
1.7260	28.79	20.09	48.88	56.00	-7.12	QP
1.7260	10.80	20.09	30.89	46.00	-15.11	AVG
6.1700	23.88	19.89	43.77	60.00	-16.23	QP
6.1700	11.79	19.89	31.68	50.00	-18.32	AVG
11.1420	27.14	20.10	47.24	60.00	-12.76	QP
11.1420	14.00	20.10	34.10	50.00	-15.90	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

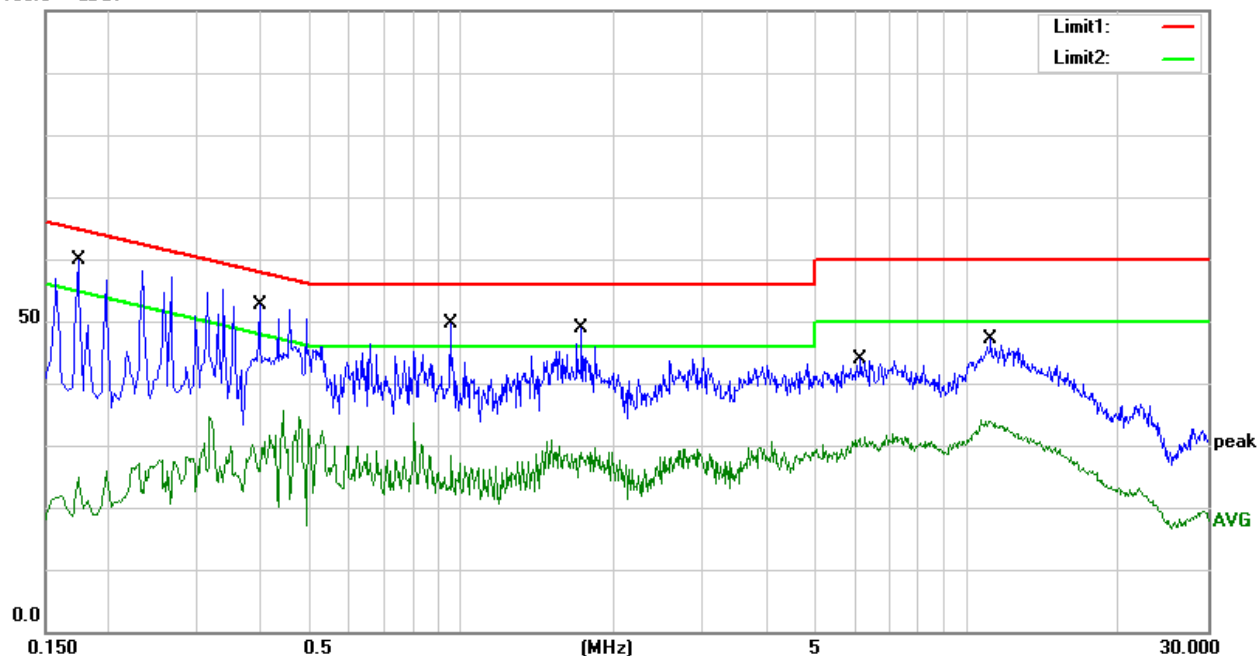




Temperature:	23.5°C	Relative Humidity:	59%
Test Voltage:	120V/60Hz	Phase:	N
Test Mode:	Mode 10		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.2020	38.22	20.25	58.47	63.53	-5.06	QP
0.2020	4.61	20.25	24.86	53.53	-28.67	AVG
0.2740	35.05	20.59	55.64	61.00	-5.36	QP
0.2740	9.04	20.59	29.63	51.00	-21.37	AVG
0.4740	29.95	20.48	50.43	56.44	-6.01	QP
0.4740	11.62	20.48	32.10	46.44	-14.34	AVG
1.5060	21.06	20.11	41.17	56.00	-14.83	QP
1.5060	4.52	20.11	24.63	46.00	-21.37	AVG
4.7580	14.72	19.95	34.67	56.00	-21.33	QP
4.7580	3.42	19.95	23.37	46.00	-22.63	AVG
11.8980	22.12	20.08	42.20	60.00	-17.80	QP
11.8980	8.28	20.08	28.36	50.00	-21.64	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

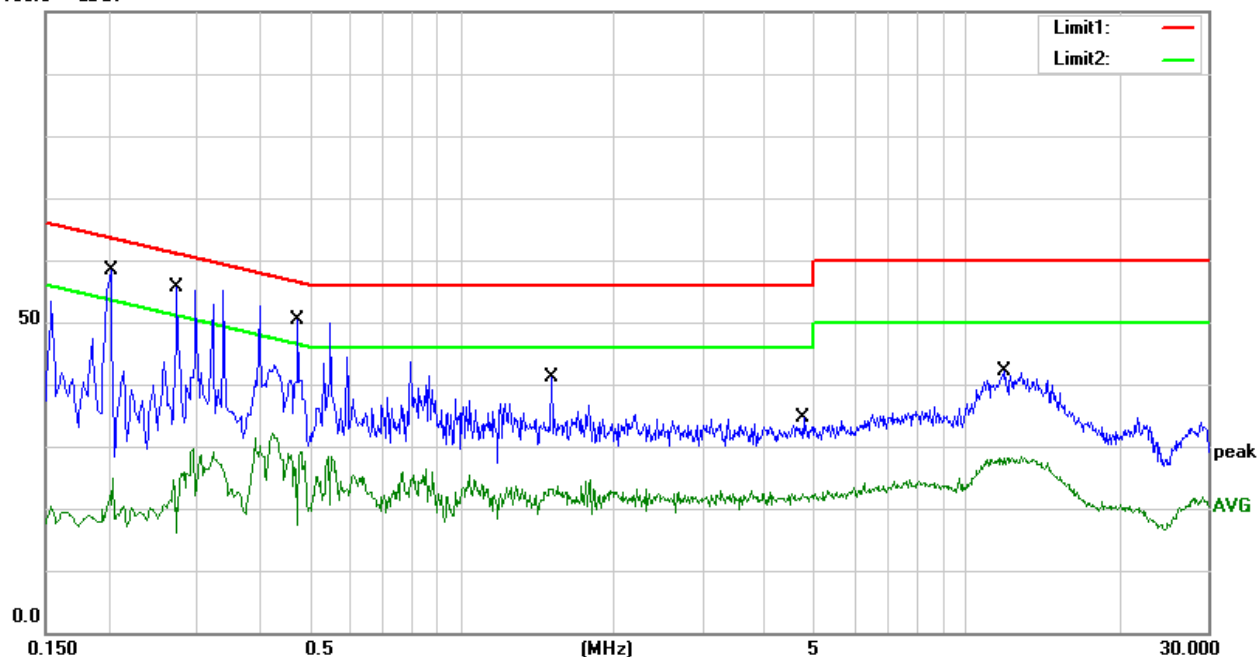


Temperature:	23.5°C	Relative Humidity:	59%
Test Voltage:	120V/60Hz	Phase:	N
Test Mode:	Mode 11 (Part 15B & ICES-003)		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
0.2020	38.75	20.25	59.00	63.53	-4.53	QP
0.2020	9.24	20.25	29.49	53.53	-24.04	AVG
0.3183	35.74	20.68	56.42	59.75	-3.33	QP
0.3183	22.44	20.68	43.12	49.75	-6.63	AVG
0.5180	31.83	20.46	52.29	56.00	-3.71	QP
0.5180	10.09	20.46	30.55	46.00	-15.45	AVG
1.7380	29.11	20.09	49.20	56.00	-6.80	QP
1.7380	11.32	20.09	31.41	46.00	-14.59	AVG
5.7340	23.17	19.91	43.08	60.00	-16.92	QP
5.7340	11.68	19.91	31.59	50.00	-18.41	AVG
11.2340	26.67	20.10	46.77	60.00	-13.23	QP
11.2340	13.95	20.10	34.05	50.00	-15.95	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

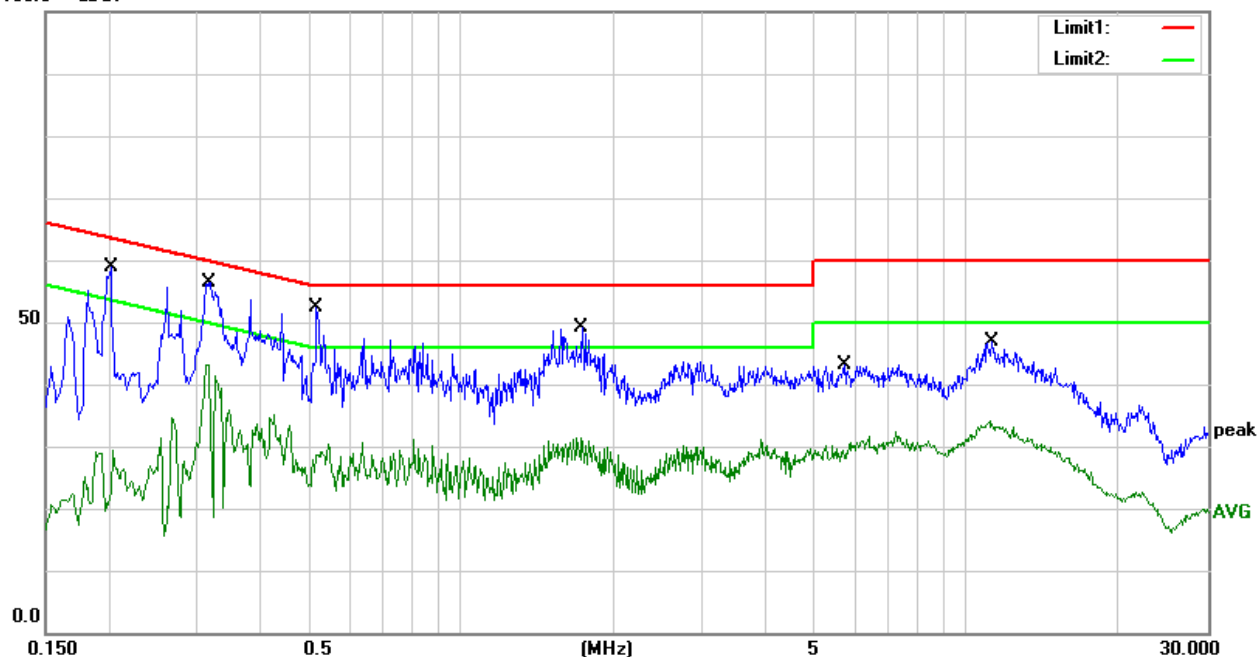




Temperature:	23.5°C	Relative Humidity:	59%
Test Voltage:	120V/60Hz	Phase:	L
Test Mode:	Mode 11 (Part 15B& ICES-003)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1860	38.78	20.23	59.01	64.21	-5.20	QP
0.1860	9.42	20.23	29.65	54.21	-24.56	AVG
0.2900	35.36	20.67	56.03	60.52	-4.49	QP
0.2900	13.98	20.67	34.65	50.52	-15.87	AVG
0.4860	31.80	20.48	52.28	56.24	-3.96	QP
0.4860	14.61	20.48	35.09	46.24	-11.15	AVG
1.6500	31.49	20.10	51.59	56.00	-4.41	QP
1.6500	13.65	20.10	33.75	46.00	-12.25	AVG
3.9580	26.51	19.95	46.46	56.00	-9.54	QP
3.9580	12.32	19.95	32.27	46.00	-13.73	AVG
10.7980	22.79	20.11	42.90	60.00	-17.10	QP
10.7980	9.79	20.11	29.90	50.00	-20.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

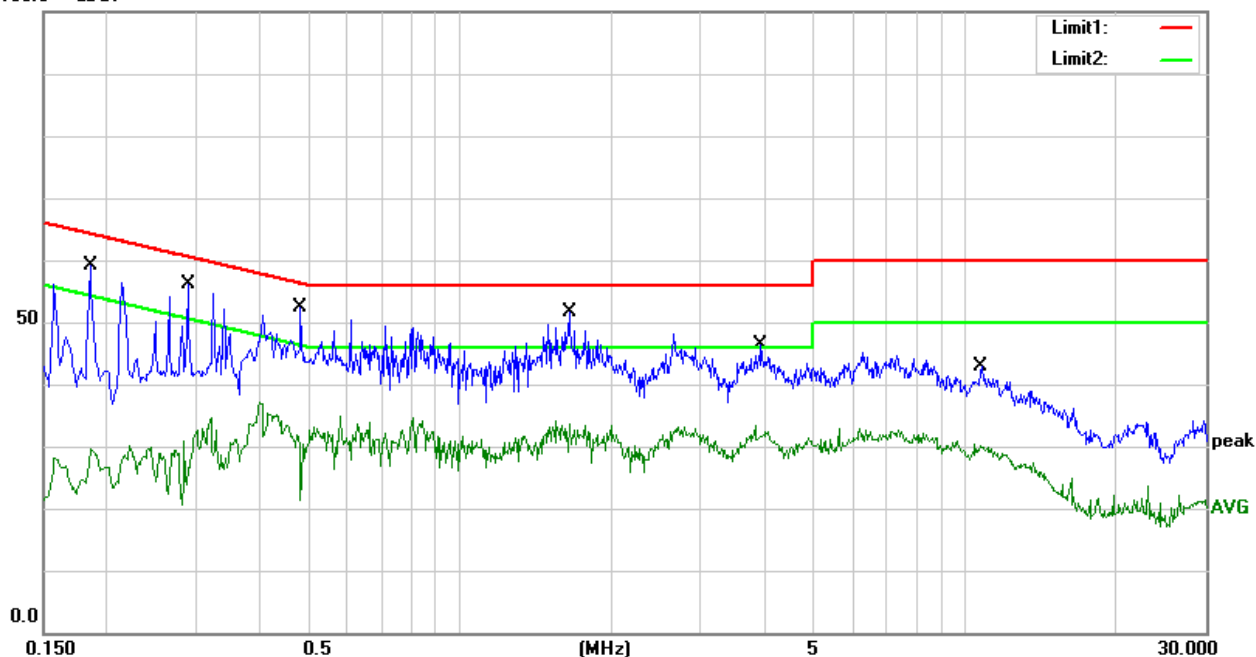




Temperature:	23.5°C	Relative Humidity:	59%
Test Voltage:	120V/60Hz	Phase:	N
Test Mode:	Mode 12 (Part 15B & ICES-003)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1580	27.85	20.23	48.08	65.57	-17.49	QP
0.1580	12.64	20.23	32.87	55.57	-22.70	AVG
0.4980	25.72	20.48	46.20	56.03	-9.83	QP
0.4980	17.80	20.48	38.28	46.03	-7.75	AVG
1.6860	18.39	20.10	38.49	56.00	-17.51	QP
1.6860	8.60	20.10	28.70	46.00	-17.30	AVG
4.0220	18.61	19.95	38.56	56.00	-17.44	QP
4.0220	8.02	19.95	27.97	46.00	-18.03	AVG
9.3700	14.61	20.09	34.70	60.00	-25.30	QP
9.3700	4.22	20.09	24.31	50.00	-25.69	AVG
23.1300	11.55	19.58	31.13	60.00	-28.87	QP
23.1300	5.79	19.58	25.37	50.00	-24.63	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

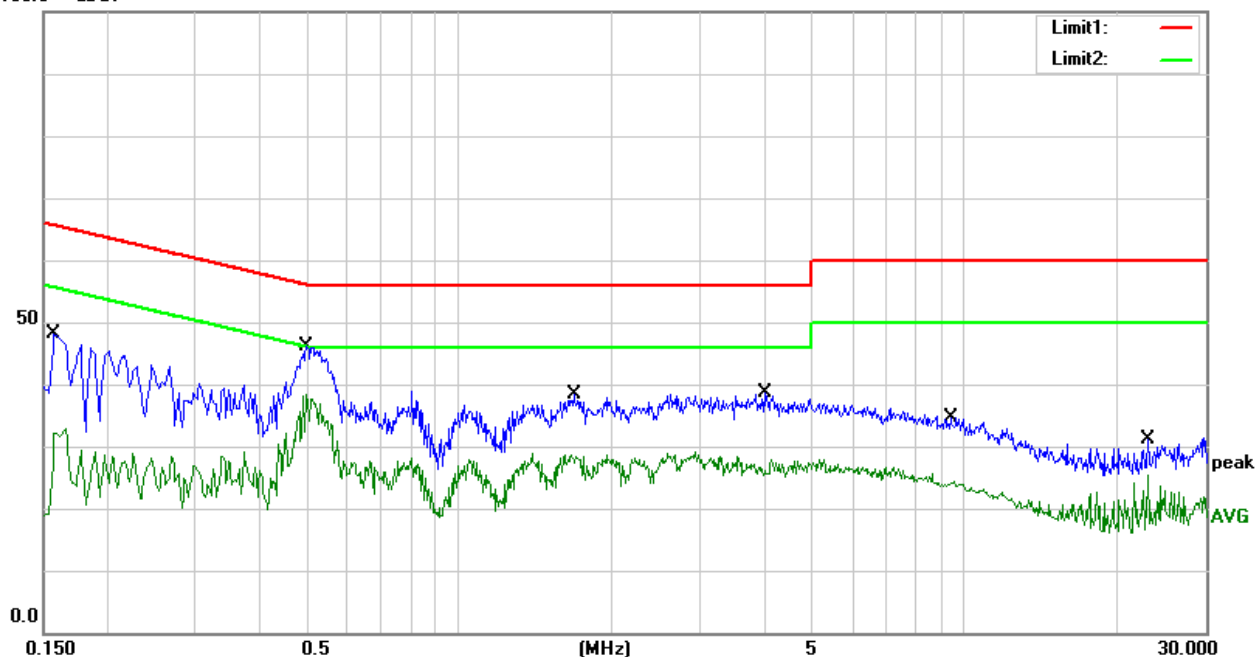


Temperature:	23.5°C	Relative Humidity:	59%
Test Voltage:	120V/60Hz	Phase:	L
Test Mode:	Mode 12 (Part 15B& ICES-003)		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
0.1580	28.25	20.23	48.48	65.57	-17.09	QP
0.1580	16.80	20.23	37.03	55.57	-18.54	AVG
0.5060	27.17	20.47	47.64	56.00	-8.36	QP
0.5060	18.14	20.47	38.61	46.00	-7.39	AVG
1.6820	20.91	20.10	41.01	56.00	-14.99	QP
1.6820	9.38	20.10	29.48	46.00	-16.52	AVG
4.0420	18.14	19.95	38.09	56.00	-17.91	QP
4.0420	6.96	19.95	26.91	46.00	-19.09	AVG
7.4020	16.13	19.93	36.06	60.00	-23.94	QP
7.4020	5.05	19.93	24.98	50.00	-25.02	AVG
23.1300	13.73	19.58	33.31	60.00	-26.69	QP
23.1300	9.17	19.58	28.75	50.00	-21.25	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

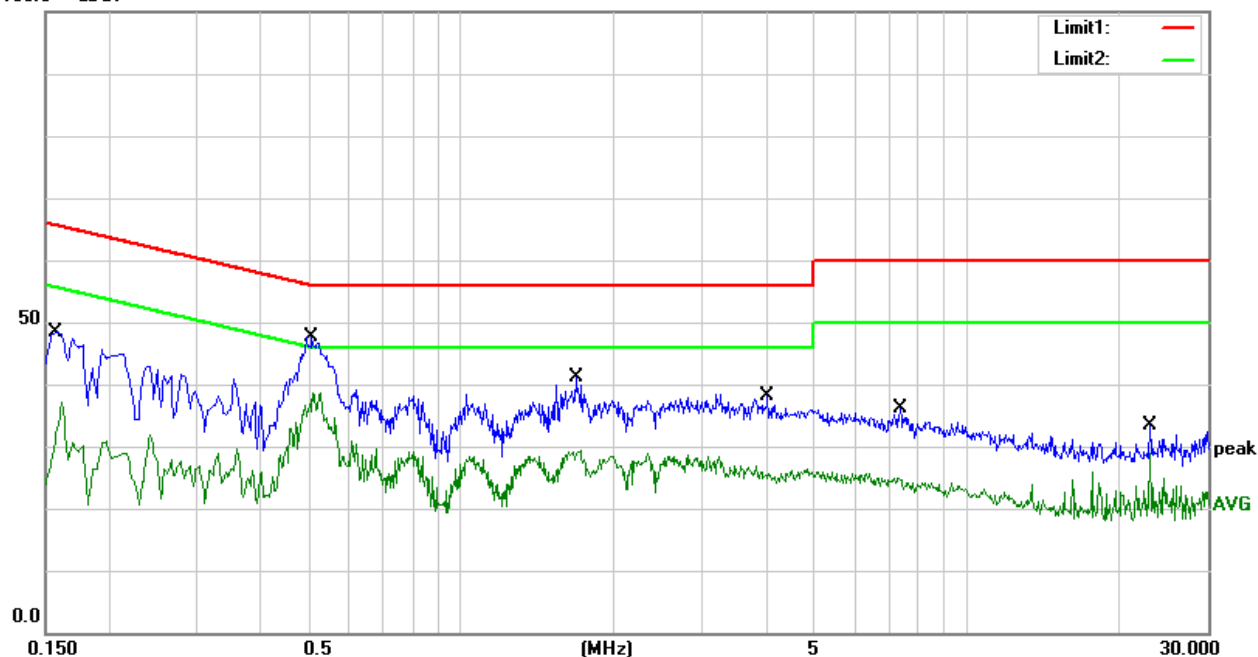



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Class A (at 10m) dBuV/m	Class B (at 3m) dBuV/m
30~88	39.0	40.0
88~216	43.5	43.5
216~960	46.5	46.0
Above 960	49.5	54.0

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Note:

- 1) The tighter limit applies at the band edges.
- 2) Emission level (dBuV/m)=20log Emission level (uV/m).


3.2.2 TEST PROCEDURE

- a) The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 0.8 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f) For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 TEST SETUP

a) Radiated Emission Test-Up Frequency 30MHz~1GHz

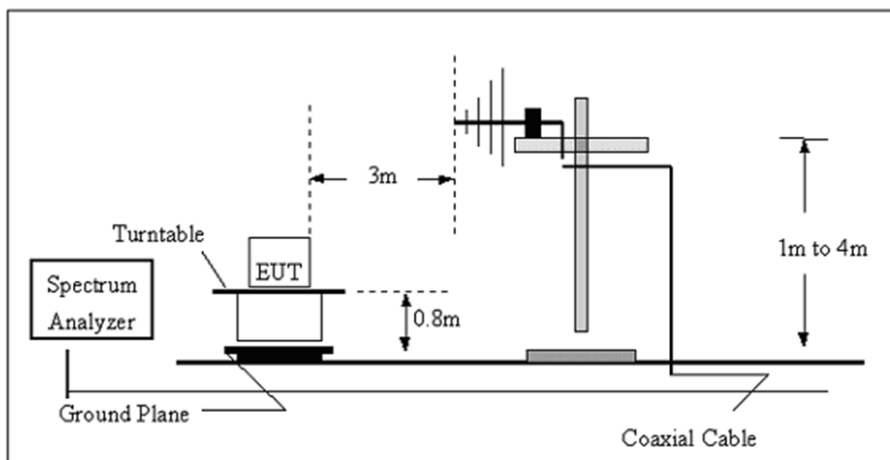

b) Radiated Emission Test-Up Frequency Above 1GHz

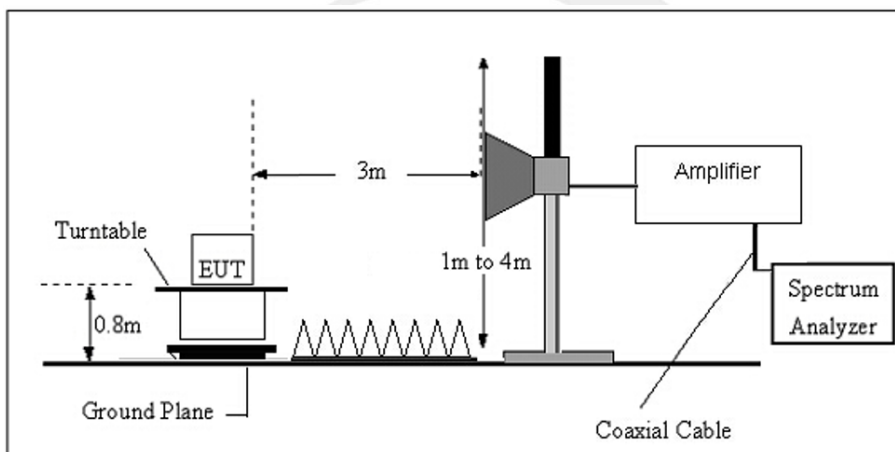

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS


Between 30-1000MHz:

Temperature:	23.3℃	Relative Humidity:	49%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	120V/60Hz	Test Mode:	Mode 11 (Part 15B & ICES-003)

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	90.2205	60.26	-20.18	40.08	43.50	-3.42	QP
2	150.0107	57.54	-17.97	39.57	43.50	-3.93	QP
3	303.5437	57.45	-14.71	42.74	46.00	-3.26	QP
4	460.7271	50.87	-10.74	40.13	46.00	-5.87	QP
5	580.7025	47.70	-6.73	40.97	46.00	-5.03	QP
6	801.7862	43.05	-3.49	39.56	46.00	-6.44	QP

Remark:


1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)-Limit

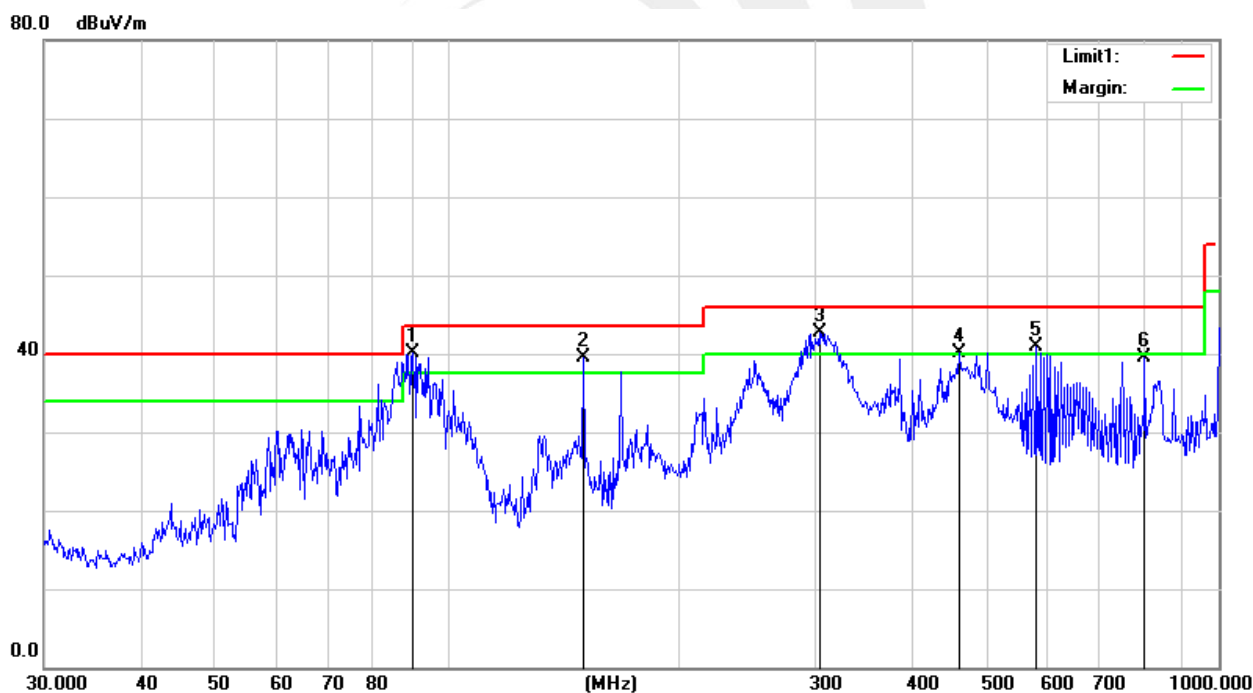



Temperature:	23.3℃	Relative Humidity:	49%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	120V/60Hz	Test Mode:	Mode 11 (Part 15B & ICES-003)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.9420	56.01	-21.75	34.26	40.00	-5.74	QP
2	98.4866	52.84	-19.35	33.49	43.50	-10.01	QP
3	257.4222	50.96	-15.38	35.58	46.00	-10.42	QP
4	460.7271	51.20	-10.11	41.09	46.00	-4.91	QP
5	586.7437	51.02	-6.87	44.15	46.00	-1.85	QP
6	1000.0000	43.92	-0.07	43.85	54.00	-10.15	QP

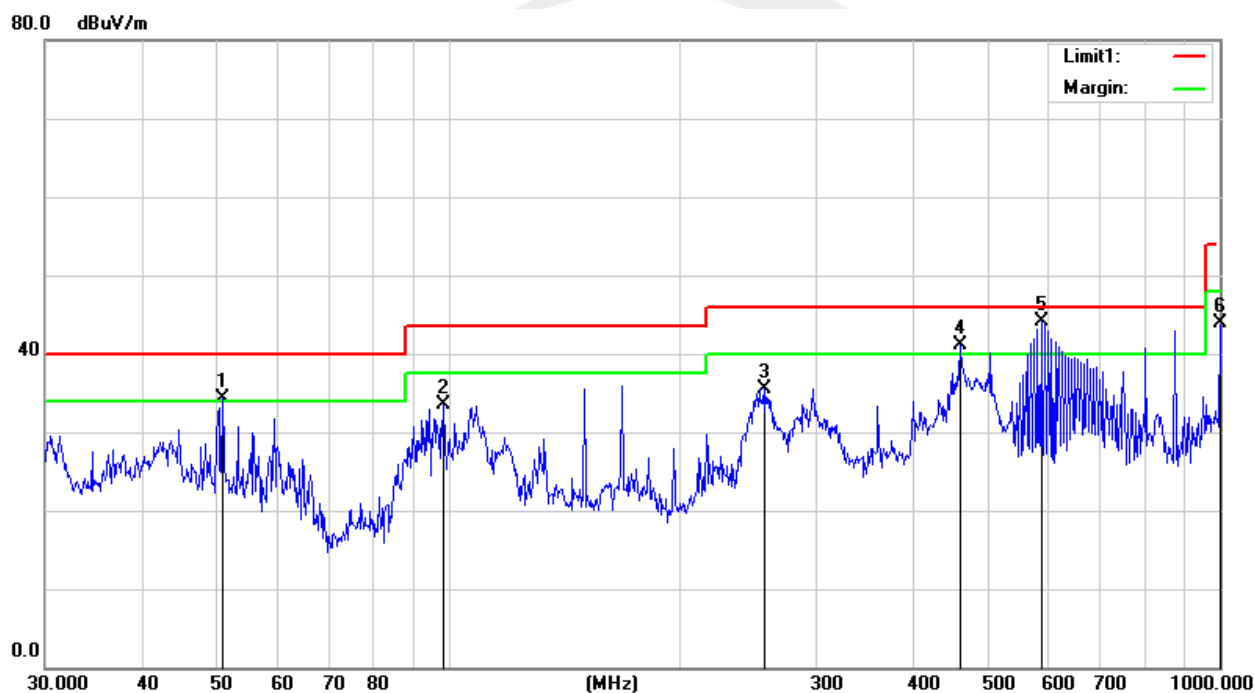Remark:**1. All readings are Quasi-Peak .****2. Margin = Result (Result =Reading + Factor)-Limit**



Temperature:	23.3℃	Relative Humidity:	49%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	120V/60Hz	Test Mode:	Mode 12 (Part 15B & ICES-003)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.9618	29.61	-11.68	17.93	40.00	-22.07	QP
2	53.8817	38.14	-22.59	15.55	40.00	-24.45	QP
3	167.8240	48.28	-19.15	29.13	43.50	-14.37	QP
4	306.7536	51.47	-14.60	36.87	46.00	-9.13	QP
5	593.0497	43.32	-7.00	36.32	46.00	-9.68	QP
6	900.1471	41.28	-2.26	39.02	46.00	-6.98	QP

Remark:

1. All readings are Quasi-Peak .


2. Margin = Result (Result =Reading + Factor)-Limit





Temperature:	23.3℃	Relative Humidity:	49%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	120V/60Hz	Test Mode:	Mode 12 (Part 15B & ICES-003)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.0250	42.54	-14.79	27.75	40.00	-12.25	QP
2	62.2128	52.44	-24.30	28.14	40.00	-11.86	QP
3	167.8240	53.44	-19.15	34.29	43.50	-9.21	QP
4	305.6800	52.29	-14.63	37.66	46.00	-8.34	QP
5	593.0497	49.38	-7.00	42.38	46.00	-3.62	QP
6	962.1621	38.07	-0.12	37.95	54.00	-16.05	QP

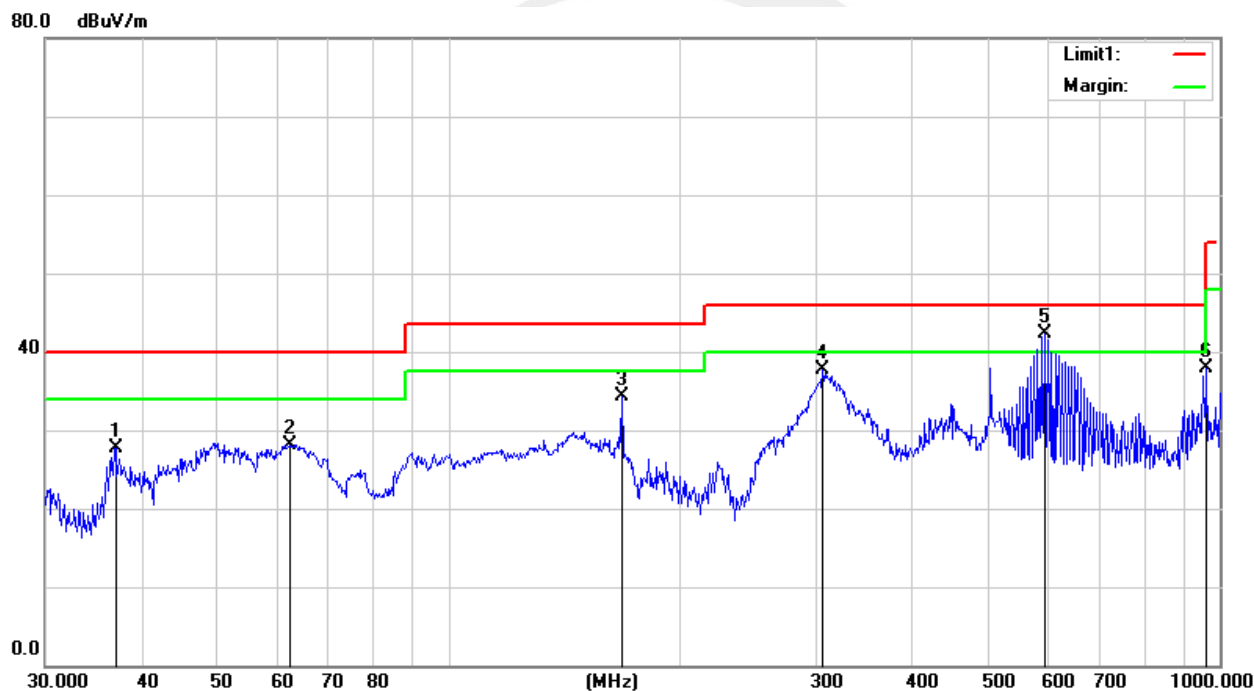
Remark:**1. All readings are Quasi-Peak .****2. Margin = Result (Result =Reading + Factor)–Limit**



Above 1GHz:

Temperature:	25°C	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	120V/60Hz	Test Mode:	Mode 11 (Part 15B & ICES-003)

RE_FCC Test Case_FCC 15B 1GHz-25GHz

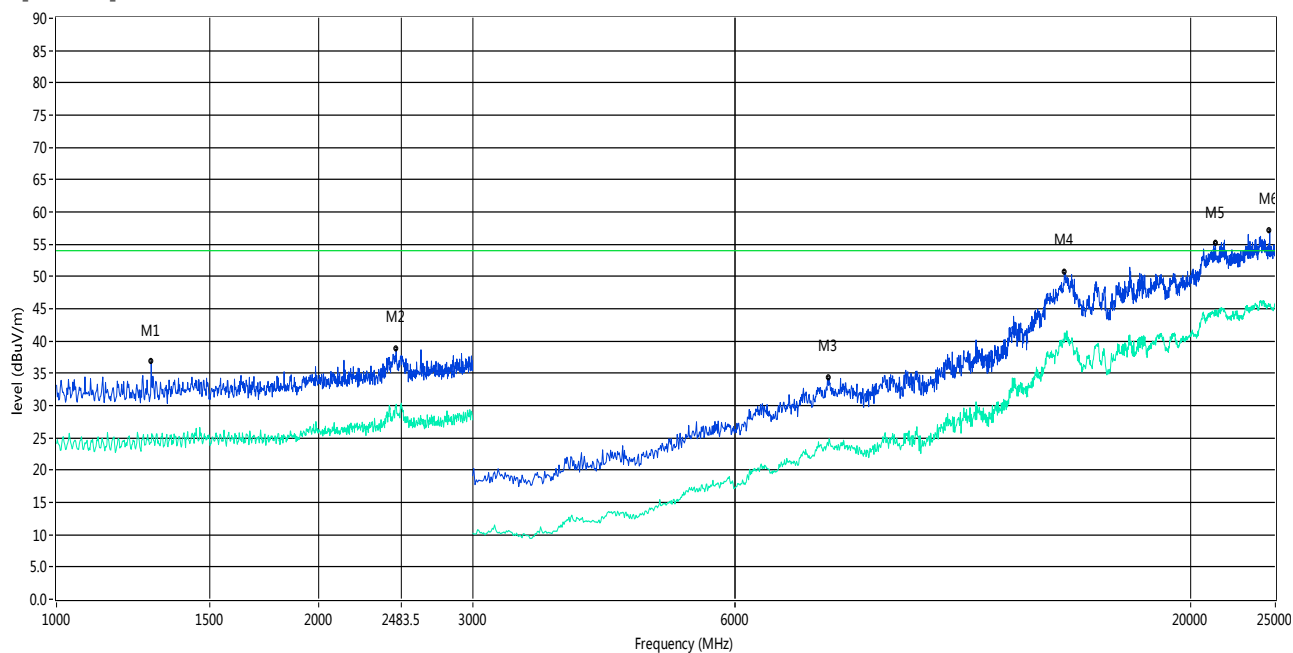


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	1284.000	24.28	-4.46	54.0	-29.72	AV	H	Pass
1	1284.000	36.78	-4.46	74.0	-37.22	Peak	H	Pass
2**	2452.000	30.19	1.22	54.0	-23.81	AV	H	Pass
2	2452.000	38.77	1.22	74.0	-35.23	Peak	H	Pass
3**	7690.000	24.86	10.40	54.0	-29.14	AV	H	Pass
3	7690.000	34.26	10.40	74.0	-39.74	Peak	H	Pass
4**	14320.000	41.25	24.92	54.0	-12.75	AV	H	Pass
4	14320.000	50.64	24.92	74.0	-23.36	Peak	H	Pass
5**	21340.000	43.98	24.05	54.0	-10.02	AV	H	Pass
5	21340.000	55.07	24.05	74.0	-18.93	Peak	H	Pass
6**	24628.001	45.72	23.10	54.0	-8.28	AV	H	Pass
6	24628.001	57.12	23.10	74.0	-16.88	Peak	H	Pass



Temperature:	25℃	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	120V/60Hz	Test Mode:	Mode 11 (Part 15B & ICES-003)

RE_FCC Test Case_FCC 15B 1GHz-25GHz

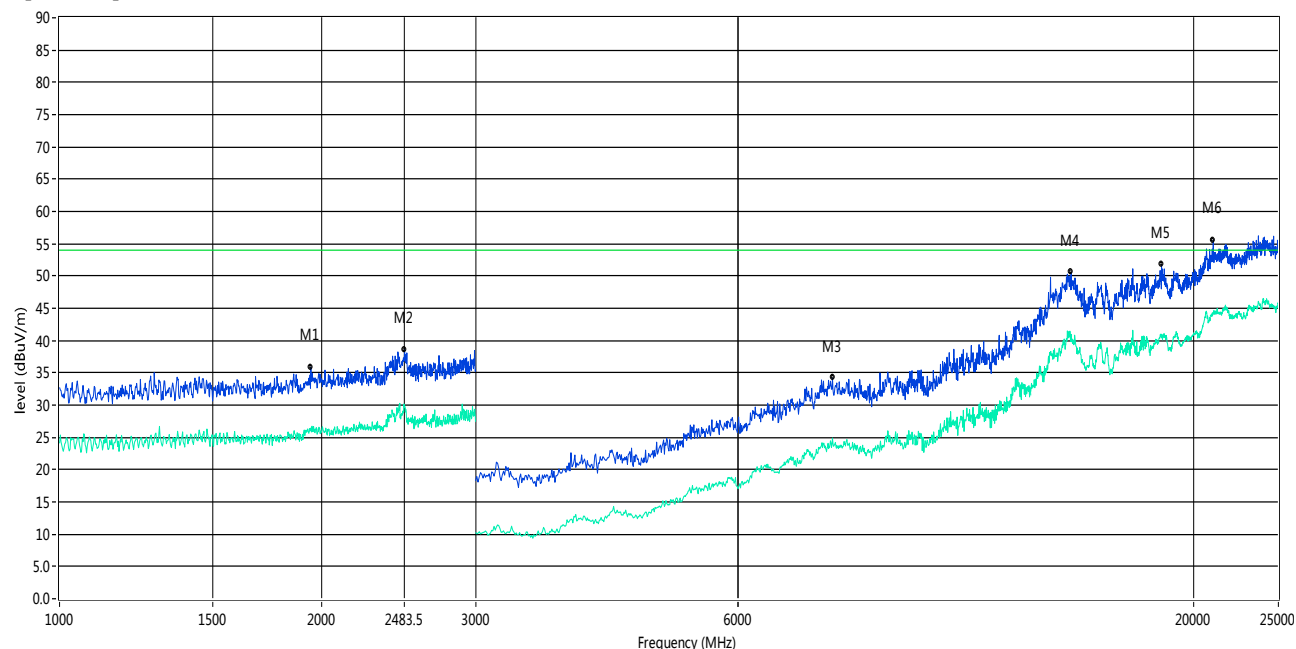


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	1942.000	26.15	-2.55	54.0	-27.85	AV	V	Pass
1	1942.000	35.87	-2.55	74.0	-38.13	Peak	V	Pass
2**	2488.000	29.67	1.54	54.0	-24.33	AV	V	Pass
2	2488.000	38.65	1.54	74.0	-35.35	Peak	V	Pass
3**	7700.000	24.89	10.88	54.0	-29.11	AV	V	Pass
3	7700.000	34.21	10.88	74.0	-39.79	Peak	V	Pass
4**	14464.000	40.96	24.63	54.0	-13.04	AV	V	Pass
4	14464.000	50.57	24.63	74.0	-23.43	Peak	V	Pass
5**	18364.000	40.47	22.81	54.0	-13.53	AV	V	Pass
5	18364.000	51.77	22.81	74.0	-22.23	Peak	V	Pass
6**	21052.000	44.34	24.12	54.0	-9.66	AV	V	Pass
6	21052.000	55.58	24.12	74.0	-18.42	Peak	V	Pass



Temperature:	25°C	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	120V/60Hz	Test Mode:	Mode 12 (Part 15B & ICES-003)

RE_FCC Test Case_FCC 15B 1GHz-25GHz

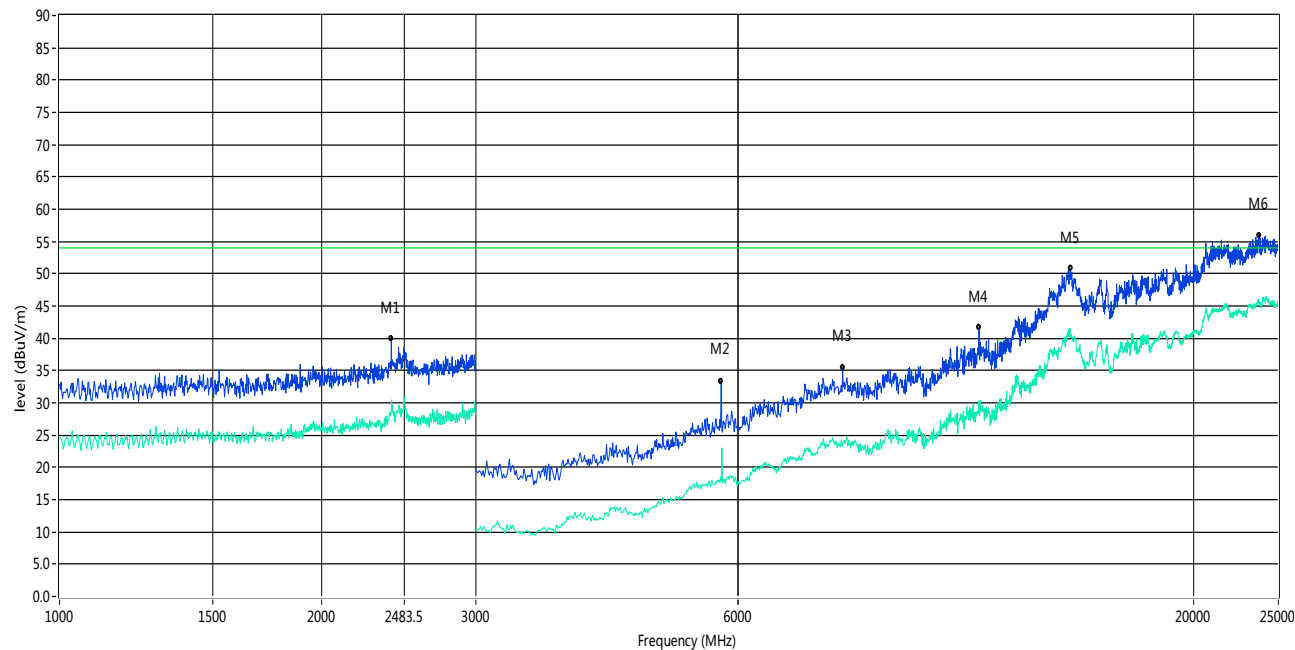


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	2402.000	28.69	0.82	54.0	-25.31	AV	H	Pass
1	2402.000	39.87	0.82	74.0	-34.13	Peak	H	Pass
2**	5740.000	17.91	4.14	54.0	-36.09	AV	H	Pass
2	5740.000	33.40	4.14	74.0	-40.60	Peak	H	Pass
3**	7910.000	23.64	9.55	54.0	-30.36	AV	H	Pass
3	7910.000	35.42	9.55	74.0	-38.58	Peak	H	Pass
4**	11340.000	30.32	16.89	54.0	-23.68	AV	H	Pass
4	11340.000	41.61	16.89	74.0	-32.39	Peak	H	Pass
5**	14428.000	41.25	25.10	54.0	-12.75	AV	H	Pass
5	14428.000	50.76	25.10	74.0	-23.24	Peak	H	Pass
6**	23740.000	45.78	23.39	54.0	-8.22	AV	H	Pass
6	23740.000	56.00	23.39	74.0	-18.00	Peak	H	Pass



Temperature:	25℃	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	120V/60Hz	Test Mode:	Mode 12 (Part 15B & ICES-003)

RE_FCC Test Case_FCC 15B 1GHz-25GHz

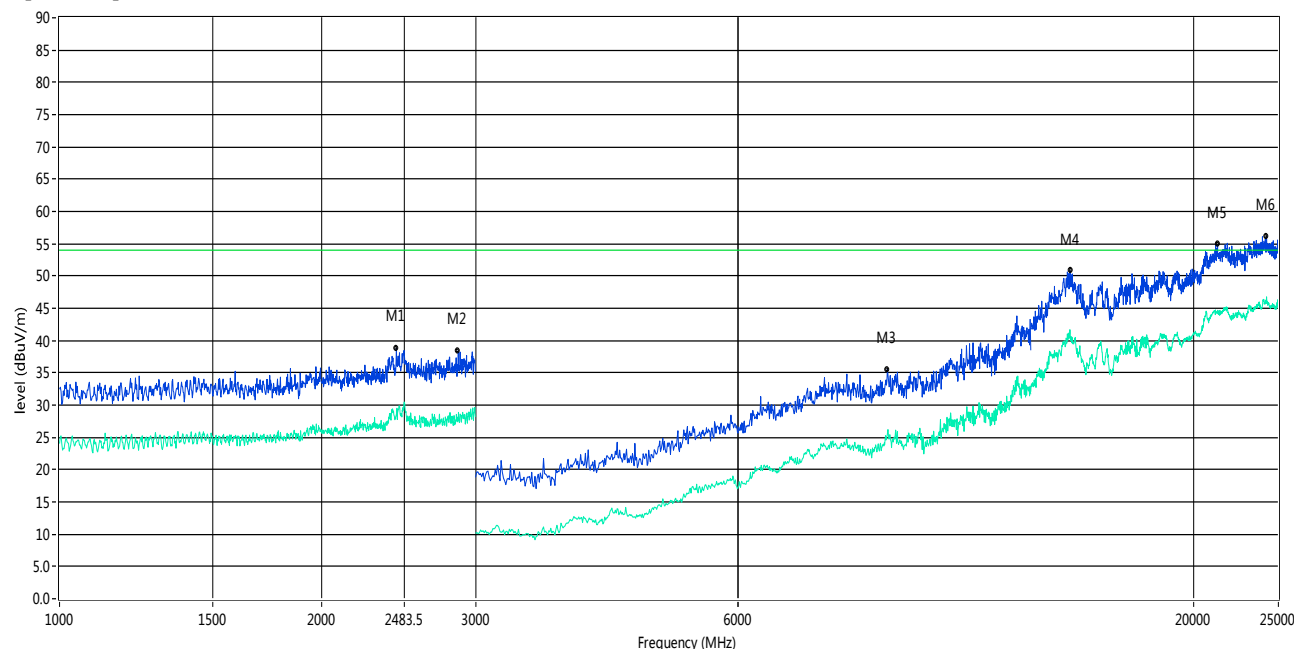

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	2434.000	28.60	1.05	54.0	-25.40	AV	V	Pass
1	2434.000	38.85	1.05	74.0	-35.15	Peak	V	Pass
2**	2866.000	28.07	1.42	54.0	-25.93	AV	V	Pass
2	2866.000	38.41	1.42	74.0	-35.59	Peak	V	Pass
3**	8900.000	25.41	12.29	54.0	-28.59	AV	V	Pass
3	8900.000	35.54	12.29	74.0	-38.46	Peak	V	Pass
4**	14428.000	41.15	25.10	54.0	-12.85	AV	V	Pass
4	14428.000	50.79	25.10	74.0	-23.21	Peak	V	Pass
5**	21291.999	44.64	24.06	54.0	-9.36	AV	V	Pass
5	21291.999	54.84	24.06	74.0	-19.16	Peak	V	Pass
6**	24231.999	46.78	23.23	54.0	-7.22	AV	V	Pass
6	24231.999	56.15	23.23	74.0	-17.85	Peak	V	Pass



3.3 RADIATED SPURIOUS EMISSION MEASUREMENT

3.3.1 RADIATED EMISSION LIMITS

in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) and RSS-247 Issue 2 limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted	1 MHz /3MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2422 MHz Upper Band Edge: 2452to 2500 MHz
RB / VB (emission in restricted band)	1 MHz /3MHz



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.3.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.3.3 TEST SETUP


a) Radiated Emission Test-Up Frequency Below 30MHz

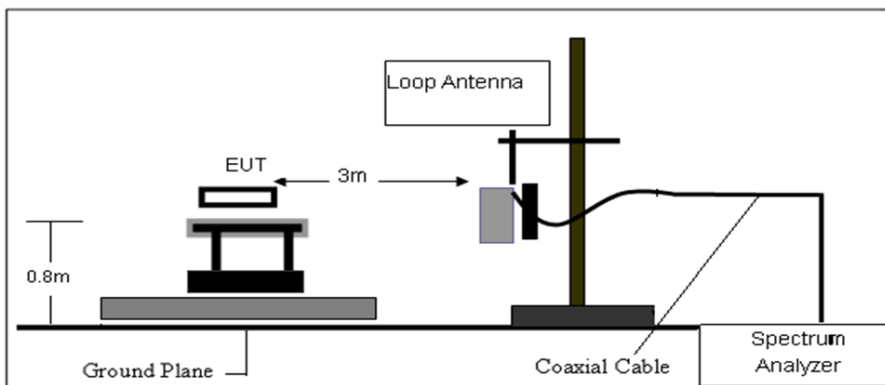

b) Radiated Emission Test-Up Frequency 30MHz~1GHz

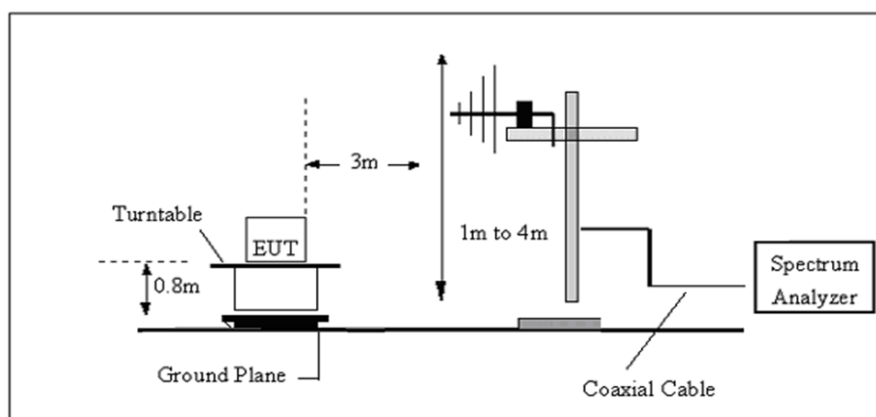

c) Radiated Emission Test-Up Frequency Above 1GHz

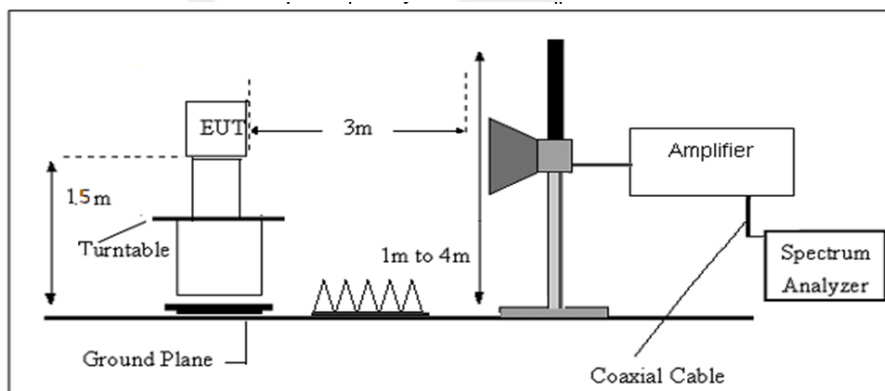

3.3.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.3.6 TEST RESULT

9KHz-30MHz

Temperature:	23.3°C	Relative Humidity:	49%
Test Voltage:	120V/60Hz	Polarization :	--
Test Mode :	TX Mode		

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dB μ v) + distance extrapolation factor.



(30MHz - 1000MHz)


Temperature:	23.3°C	Relative Humidity:	49%
Test Voltage:	120V/60Hz	Polarization :	Horizontal
Test Mode :	Mode 1/2/3/4/5/6/7/8/9 (Mode 2-1Mbps worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
50.2324	43.09	-21.55	21.54	40.00	-18.46	QP
95.4270	45.03	-19.65	25.38	43.50	-18.12	QP
167.8243	46.42	-19.15	27.27	43.50	-16.23	QP
306.7537	51.85	-14.60	37.25	46.00	-8.75	QP
504.7062	48.50	-8.89	39.61	46.00	-6.39	QP
599.3212	46.84	-7.14	39.70	46.00	-6.30	QP

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit

80.0 dBuV/m

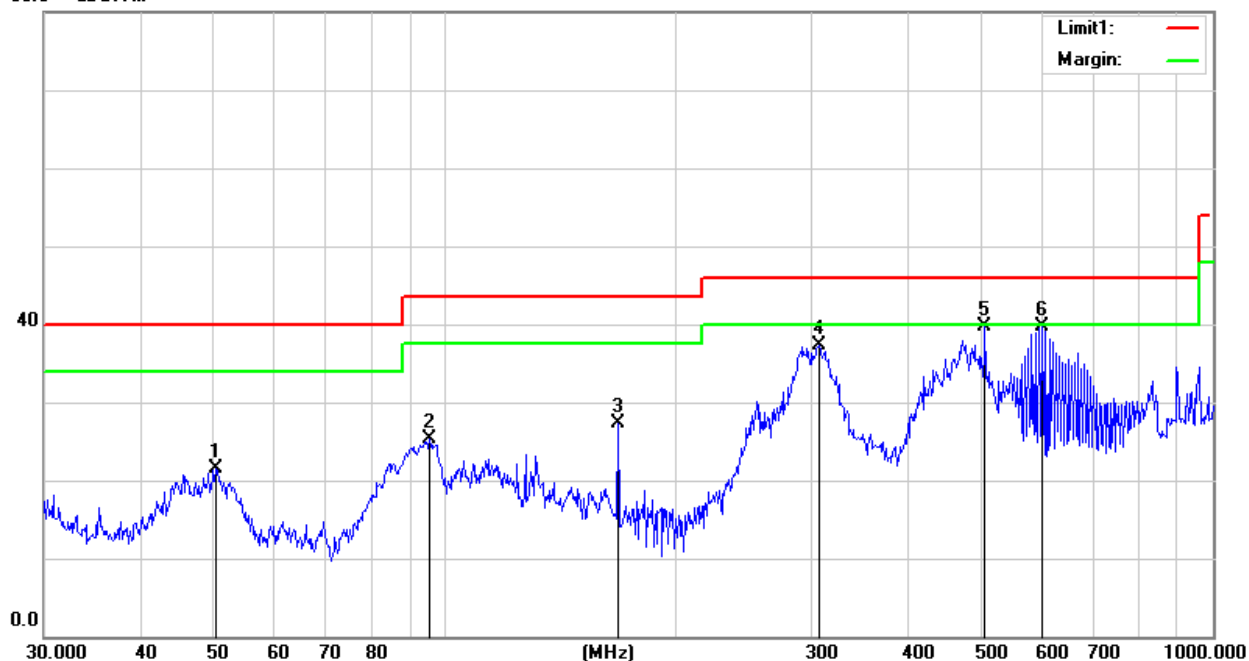




Temperature:	23.3°C	Relative Humidity:	49%
Test Voltage:	120V/60Hz	Polarization :	Vertical
Test Mode :	Mode 1/2/3/4/5/6/7/8/9 (Mode 2-1Mbps worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
50.7637	53.16	-21.70	31.46	40.00	-8.54	QP
116.5401	45.06	-17.91	27.15	43.50	-16.35	QP
167.8243	46.73	-19.15	27.58	43.50	-15.92	QP
290.0172	52.34	-15.41	36.93	46.00	-9.07	QP
586.7437	51.32	-6.87	44.45	46.00	-1.55	QP
900.1474	42.30	-2.26	40.04	46.00	-5.96	QP

Remark:.

1. Margin = Result (Result =Reading + Factor)-Limit

80.0 dBuV/m

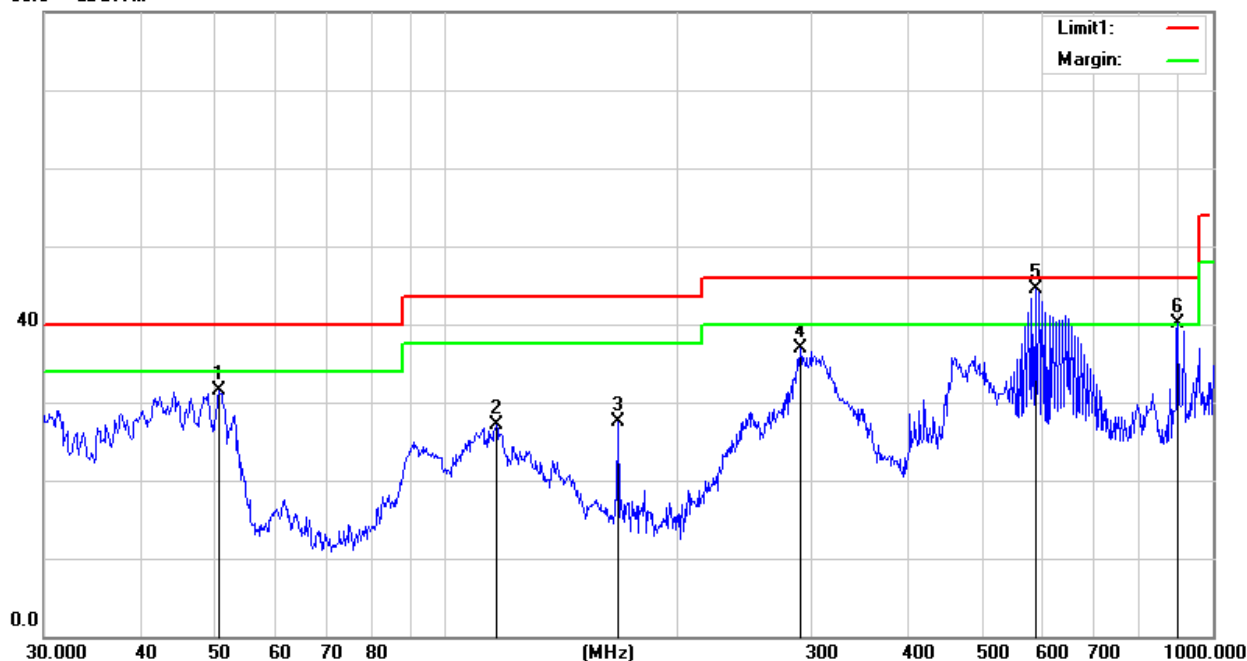




Restricted band and Spurious emission Requirements

(Above1GHz)

802.11g Low Channel

Temperature:	25°C	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Horizontal

RSE_FCC Test Case_FCC 15C 1GHz-25GHz

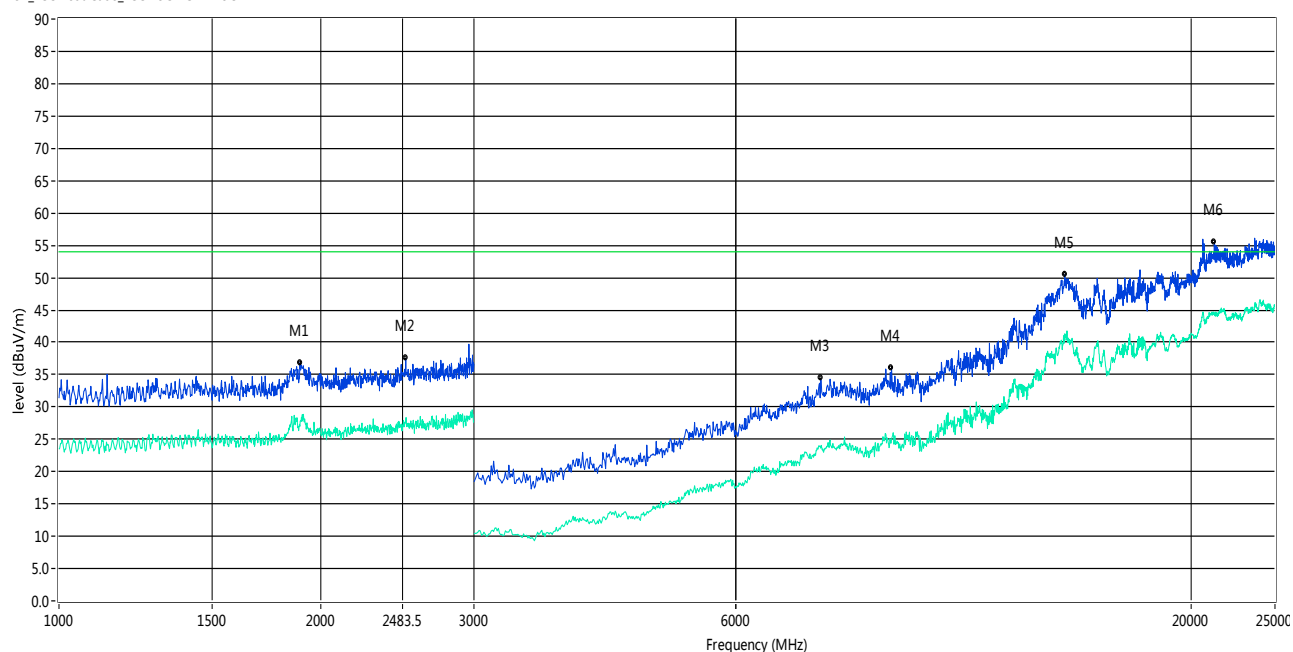


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	1892.000	26.99	-0.76	54.0	-27.01	AV	H	Pass
1	1892.000	36.84	-0.76	74.0	-37.16	Peak	H	Pass
2**	2504.000	27.75	-0.42	54.0	-26.25	AV	H	Pass
2	2504.000	37.53	-0.42	74.0	-36.47	Peak	H	Pass
3**	7510.000	23.62	10.59	54.0	-30.38	AV	H	Pass
3	7510.000	34.40	10.59	74.0	-39.60	Peak	H	Pass
4**	9060.000	24.88	12.01	54.0	-29.12	AV	H	Pass
4	9060.000	35.96	12.01	74.0	-38.04	Peak	H	Pass
5**	14332.000	40.72	24.28	54.0	-13.28	AV	H	Pass
5	14332.000	50.45	24.28	74.0	-23.55	Peak	H	Pass
6**	21291.999	44.47	24.06	54.0	-9.53	AV	H	Pass
6	21291.999	55.42	24.06	74.0	-18.58	Peak	H	Pass



Temperature:	25°C	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Vertical

RSE_FCC Test Case_FCC 15C 1GHz-25GHz

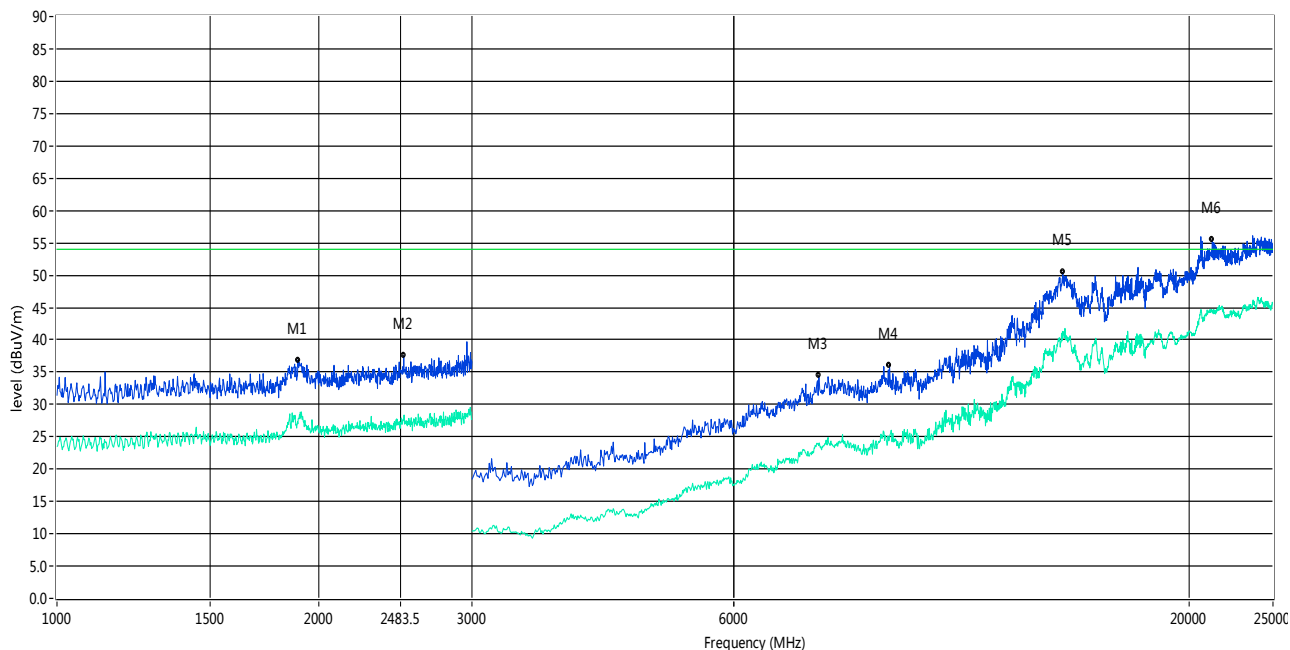


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	1892.000	26.99	-0.76	54.0	-27.01	AV	V	Pass
1	1892.000	36.84	-0.76	74.0	-37.16	Peak	V	Pass
2**	2504.000	27.75	-0.42	54.0	-26.25	AV	V	Pass
2	2504.000	37.53	-0.42	74.0	-36.47	Peak	V	Pass
3**	7510.000	23.62	10.59	54.0	-30.38	AV	V	Pass
3	7510.000	34.40	10.59	74.0	-39.60	Peak	V	Pass
4**	9060.000	24.88	12.01	54.0	-29.12	AV	V	Pass
4	9060.000	35.96	12.01	74.0	-38.04	Peak	V	Pass
5**	14332.000	40.72	24.28	54.0	-13.28	AV	V	Pass
5	14332.000	50.45	24.28	74.0	-23.55	Peak	V	Pass
6**	21291.999	44.47	24.06	54.0	-9.53	AV	V	Pass
6	21291.999	55.42	24.06	74.0	-18.58	Peak	V	Pass



802.11g Middle Channel

Temperature:	25°C	Relative Humidity:	65%
Pressure:	1010hPa	Phase:	Horizontal

RSE_FCC Test Case_FCC 15C 1GHz-25GHz

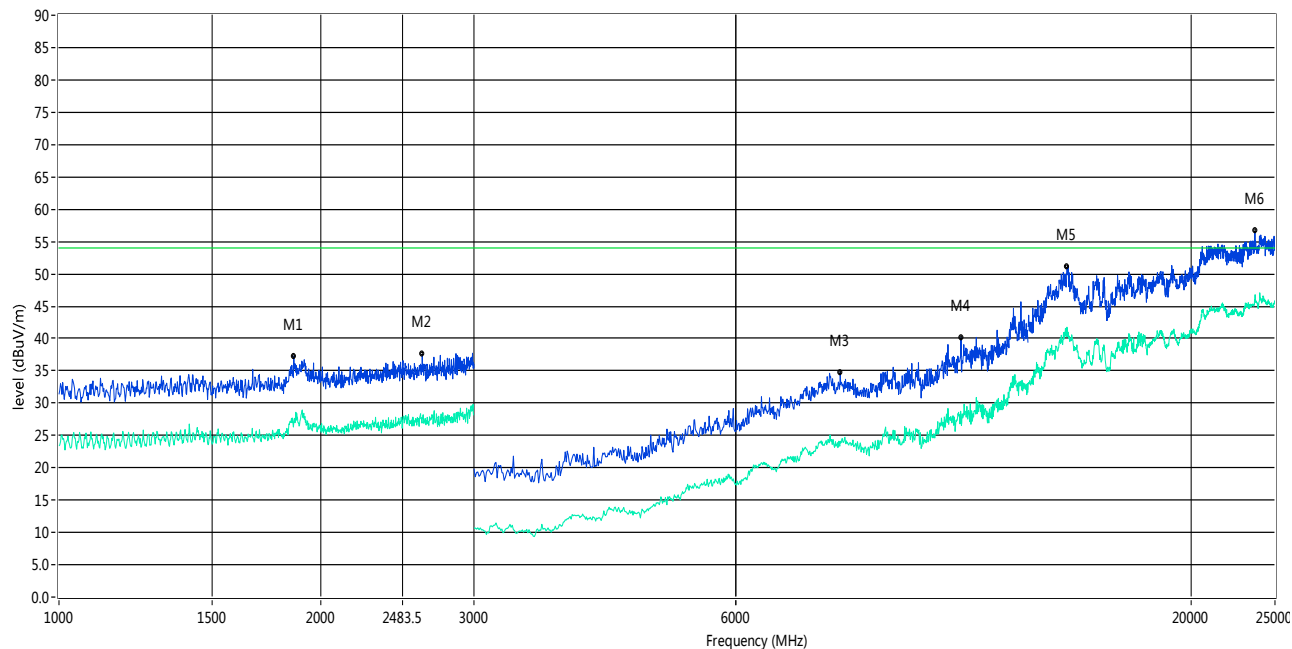

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1**	1862.000	26.94	-1.08	54.0	-27.06	AV	H	Pass
1	1862.000	37.24	-1.08	74.0	-36.76	Peak	H	Pass
2**	2616.000	27.51	0.16	54.0	-26.49	AV	H	Pass
2	2616.000	37.52	0.16	74.0	-36.48	Peak	H	Pass
3**	7910.000	24.11	9.55	54.0	-29.89	AV	H	Pass
3	7910.000	34.75	9.55	74.0	-39.25	Peak	H	Pass
4**	10890.000	27.37	13.57	54.0	-26.63	AV	H	Pass
4	10890.000	40.11	13.57	74.0	-33.89	Peak	H	Pass
5**	14428.000	41.16	25.10	54.0	-12.84	AV	H	Pass
5	14428.000	51.09	25.10	74.0	-22.91	Peak	H	Pass
6**	23704.001	45.76	23.40	54.0	-8.24	AV	H	Pass
6	23704.001	56.58	23.40	74.0	-17.42	Peak	H	Pass