

FCC/ISED DTS RF TEST REPORT



Test Report Number.....	NSC-19081521-LC-FCC-IC-BLE
Applicant.....	Nortek Security & Control LLC
Applicant Address.....	5919 Sea Otter Place, Carlsbad, CA 92010 USA
Product Name.....	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number.....	GD00BLE-1
Family Product/Model.....	N/A
FCC ID.....	EF400190
ISED ID.....	1078A-00190
Date of EUT received.....	09/04/2019
Date of Test.....	09/04/2019 – 09/13/2019
Report Issue Date.....	09/13/2019
Test Standards.....	47CFR Part 15.247: 2019 RSS-247 Issue 2.0: Feb 2017 RSS-Gen Issue 5: Apr 2018
Test Result.....	Pass

Issued By:

Vista Laboratories

1261 Puerta Del Sol, San Clemente, CA 92673 USA

www.vista-compliance.com

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This report is not to be reproduced by any means except in full and in any case not without the written approval of Vista Laboratories.

Tested by:

Bruce Li/Test Engineer

Approved By:

David Zhang/Technical Manager

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



Laboratory Introduction

Vista Labs is an A2LA accredited 17025 compliant regulatory compliance testing laboratories (Cert. number: 4848-01) strategically located in Orange County, providing services in the electrical and telecommunication industries. Vista labs is also recognized testing facility for Australia (ACMA), Chinese Taipei (BSMI), Chinese Taipei (NCC), Hong Kong (OFCA), Israel (MOC), Korea (RRA), Singapore (IMDA), Vietnam (MIC), etc.

Our comprehensive testing services include safety testing, EMC emission and susceptibility testing, RF and wireless testing (including DFS).

As your partner, Vista investigates appropriate test standards, develops test plans, performs troubleshooting & failure analysis, reviews documentation, and provides test reports for a complete compliance testing and certification package.



17025 Product Testing Accreditation Certificate



17065 Product Certification Accreditation Certificate

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	Applicant	5
1.2	Product information	5
1.3	Test standard and method	5
1.4	Test Purpose and statement	5
2	TEST SITE INFORMATION	6
3	MODIFICATION OF EUT	6
4	TEST CONFIGURATION AND OPERATION	6
4.1	EUT test configuration.....	6
4.2	EUT test mode	6
4.3	Supporting Equipment	7
4.4	EUT setup diagram	7
4.5	EUT operation	7
4.6	Test software.....	7
5	EUT AND TEST SETUP PICTURES	8
5.1	EUT pictures	8
5.2	EUT test setup pictures	10
6	TEST SUMMARY	13
7	UNCERTAINTY OF MEASUREMENT	14
8	TEST SUMMARY AND RESULT	15
8.1	Antenna Requirement.....	15
8.2	DTS (6 dB) Bandwidth.....	16
8.3	Occupied Bandwidth (99%)	19
8.4	Maximum Output Power.....	21
8.5	Power Spectral Density	24
8.6	Conducted Band-Edge & Unwanted Emissions Measurement	27
8.7	Radiated Band-Edge & Spurious Emissions into Restricted Frequency Bands.....	30
8.8	Conducted Emissions	39
9	TEST INSTRUMENT LIST	44

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



REVISION HISTORY

Revision	Issue Date	Description	Note
Original	09/13/2019	Original release	N/A

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



1 General Information

1.1 Applicant

Applicant:	Nortek Security & Control LLC
Applicant address:	5919 Sea Otter Place, Carlsbad, CA 92010 USA
Manufacturer:	Nortek Security & Control LLC
Manufacturer Address:	5919 Sea Otter Place, Carlsbad, CA 92010 USA

1.2 Product information

Product Name	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number	GD00BLE-1
Serial Number	N/A
Frequency Band	2.4GHz BLE: 2402-2480MHz
Type of modulation	BLE: GFSK
Equipment Class/ Category	DTS
Maximum output power	BLE: 5.012 dBm
Antenna Information	BLE: Internal antenna, 2.1 dBi Gain.
Clock Frequencies	N/A
Port/Connectors	Charging interface
Input Power	12VDC, 1.0A
Power Adapter Manu/Model	ZBPower / ZB-H120010A-K
Power Adapter SN	N/A
Hardware version	N/A
Software version	N/A
Simultaneous Transmission	N/A
Additional Info	N/A

1.3 Test standard and method

Test standard	47CFR Part 15.247: 2019 RSS-247 Issue 2.0: Feb 2017 RSS-Gen Issue 5: Apr 2018
Test method	RSS-Gen Issue 5: Apr 2018 ANSI C63.10: 2013 558074 D01 15.247 Meas Guidance v05r02

1.4 Test Purpose and statement

The purpose of this test report is intended to demonstrate the compliance of product listed in section 1.2, received from company listed in section 1.1, to the requirements of standard and method listed in section 1.3. Based on our test results, we conclude that the product tested complies with the requirements of the standards indicated.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



2 Test site information

Lab performing tests	Vista Laboratories
Lab Address	1261 Puerta Del Sol, San Clemente, CA 92673 USA
Phone Number	+1 (949) 393-1123
Website	www.Vista-compliance.com

Test condition	Test Engineer	Test Environment	Test Date
RF conducted	Bruce Lee	23.5°C / 58.2%/996 mbar	09/04/2019 – 09/13/2019
Radiated	Bruce Lee	23.5°C / 58.2%/996 mbar	09/04/2019 – 09/13/2019

3 Modification of EUT

The EUT is an engineering test sample loaded with RF test firmware specifically designed to support the RF TX/RX measurement in different aspects. No modification on the hardware.

4 Test configuration and operation

4.1 EUT test configuration

EUT is powered by external power supply. For RF conducted measurement, the original antenna is bypassed and the antenna port is connected to spectrum analyzer for measurement. The test command is used to set EUT to different transmission mode test channel, data rate, etc.

4.2 EUT test mode

Radio	Channel	Frequency (MHz)	Data Rate
BLE	0	2402	250Kbps
BLE	19	2440	250Kbps
BLE	39	2480	250Kbps
BLE	0	2402	2Mbps
BLE	19	2440	2Mbps
BLE	39	2480	2Mbps


Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



4.3 Supporting Equipment

Index	Description	Model	S/N	Brand	Remark
1	Laptop	G752V	F9N0CY758592398	ASUS	With test software
2	AC/DC adapter	ADP-180MB	N/A	ASUS	-

4.4 EUT setup diagram



4.5 EUT operation

EUT is pre-installed with test firmware. The test software on laptop is used to send the command to EUT to enable the continuous transmission at different channel and mode.

4.6 Test software


Index	Description	Remark
1	EMISoft Vasona 6.0049	EMC/Spurious emission test software used during testing
2	Teraterm.exe	Send command to EUT to enter different test mode

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




5 EUT and test setup pictures

5.1 EUT pictures

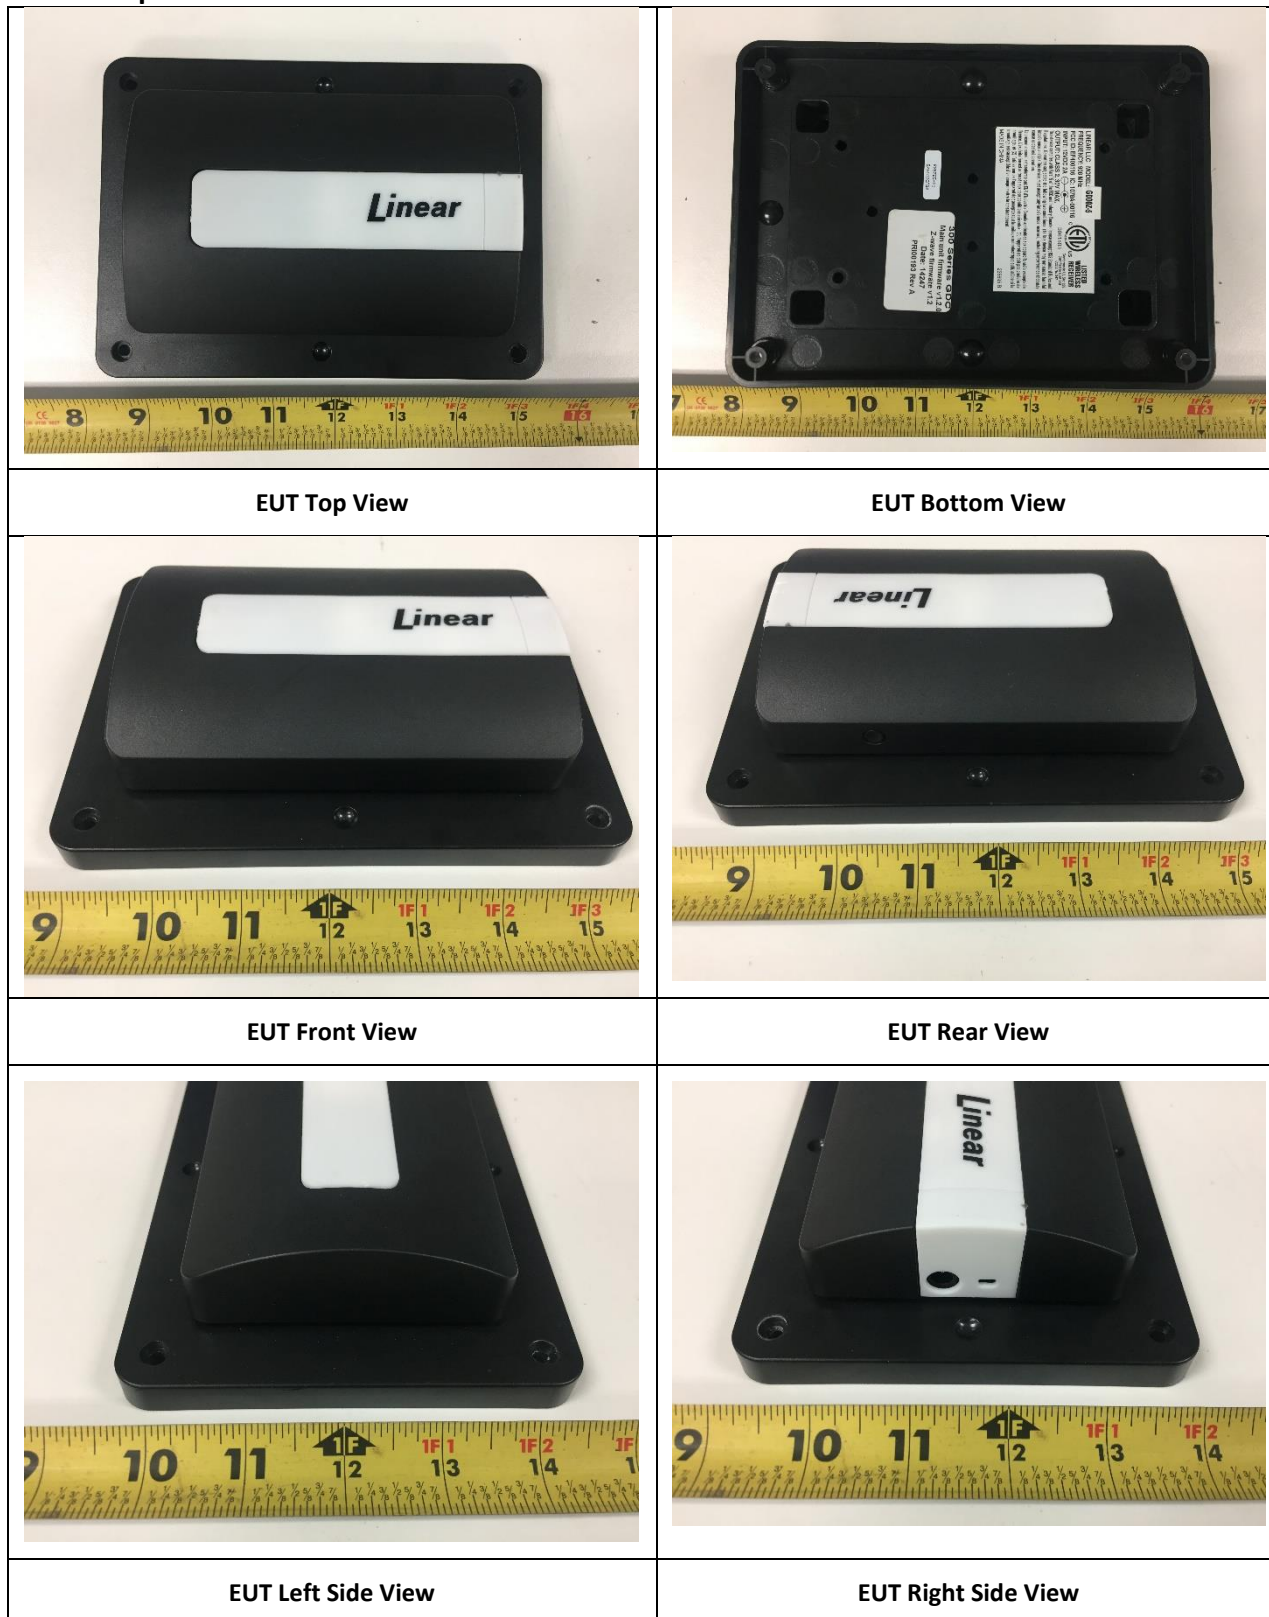

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1

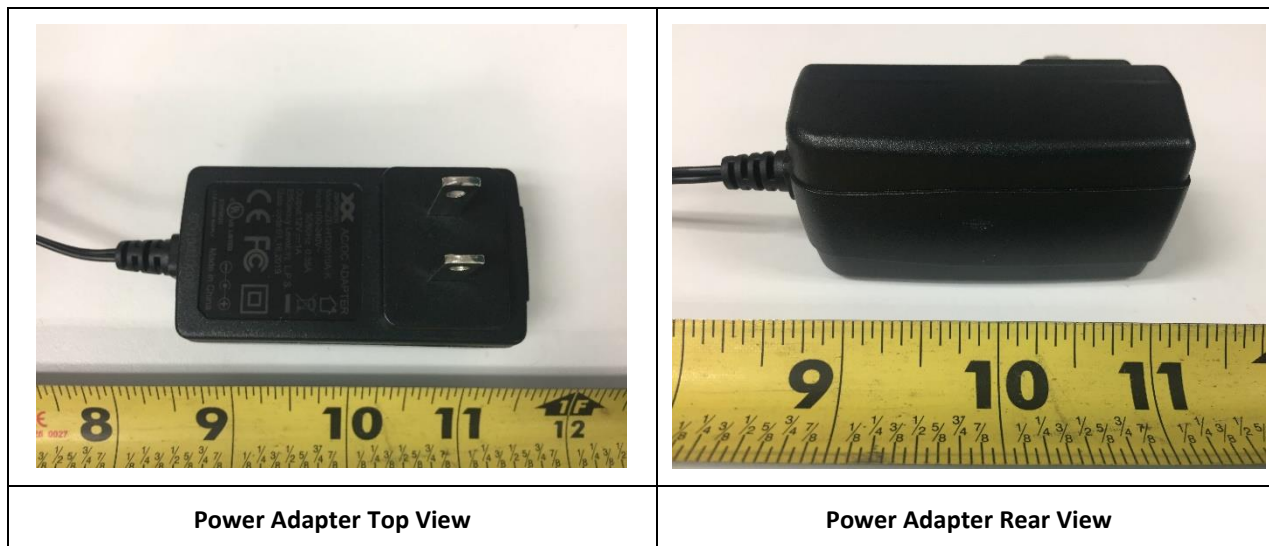


Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



5.2 EUT test setup pictures



AC Line Conducted Emission setup – Front

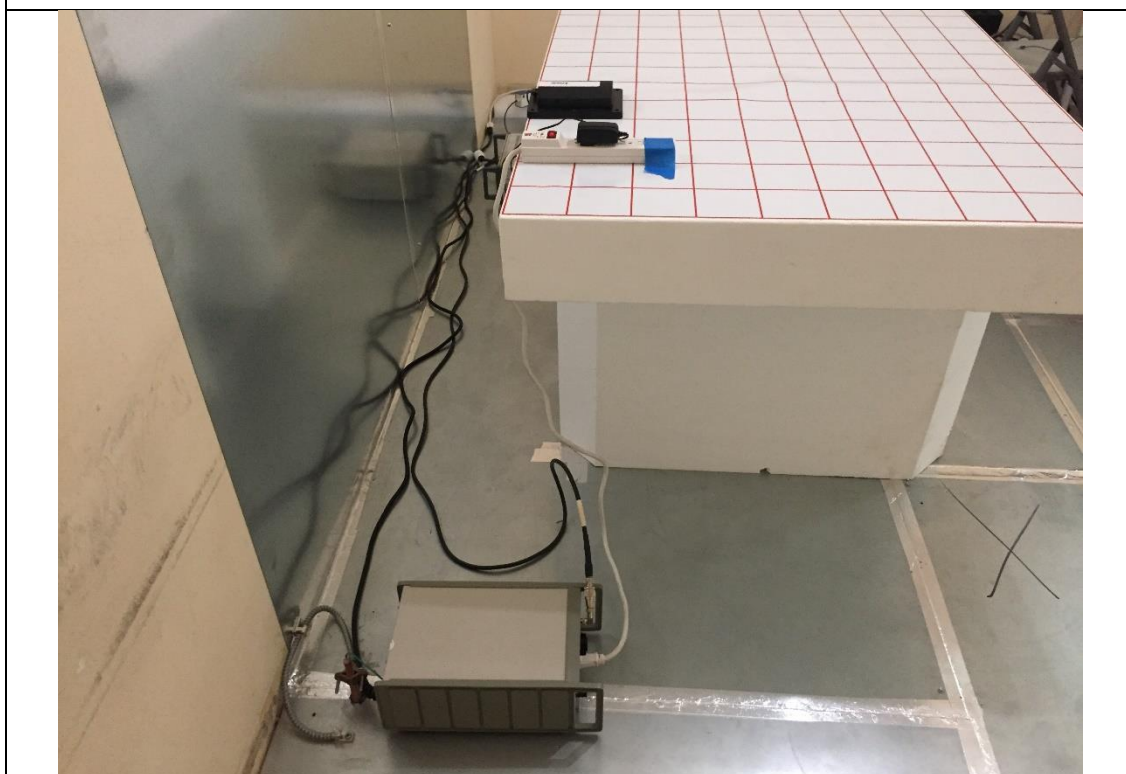


AC Line Conducted Emission setup – Rear

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




Radiated Emissions Below 1GHz setup – Front

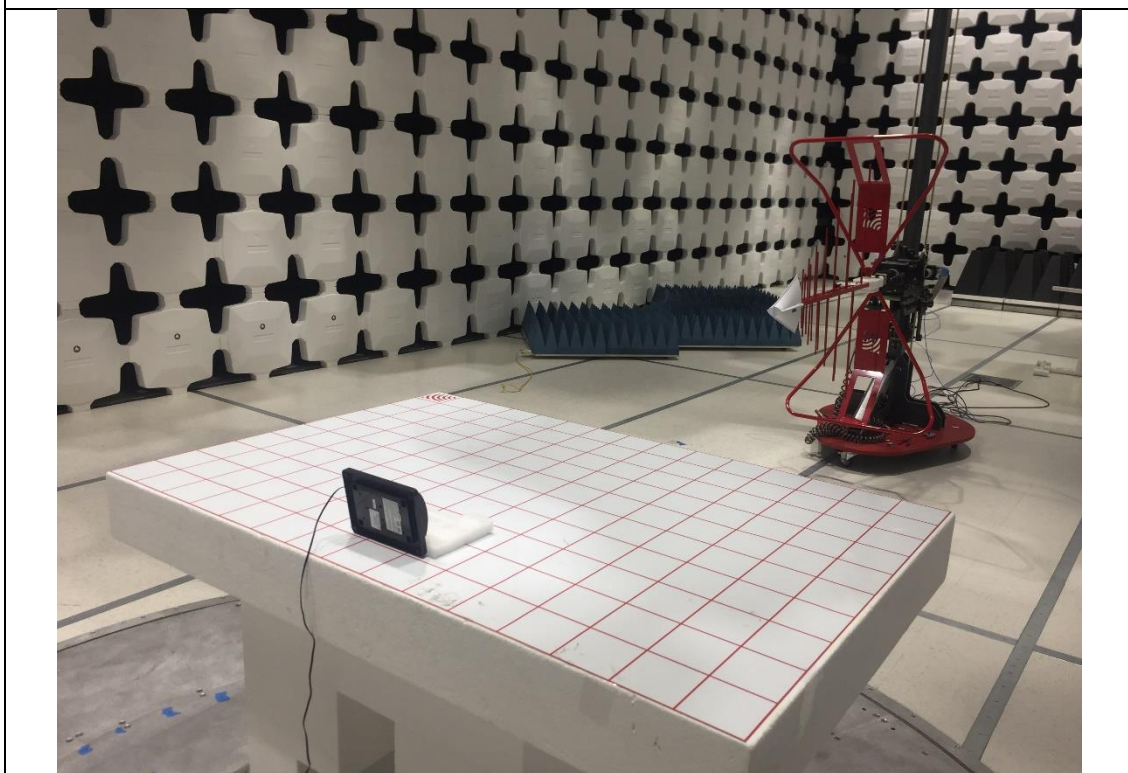


Radiated Emissions Below 1GHz setup – Rear

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1

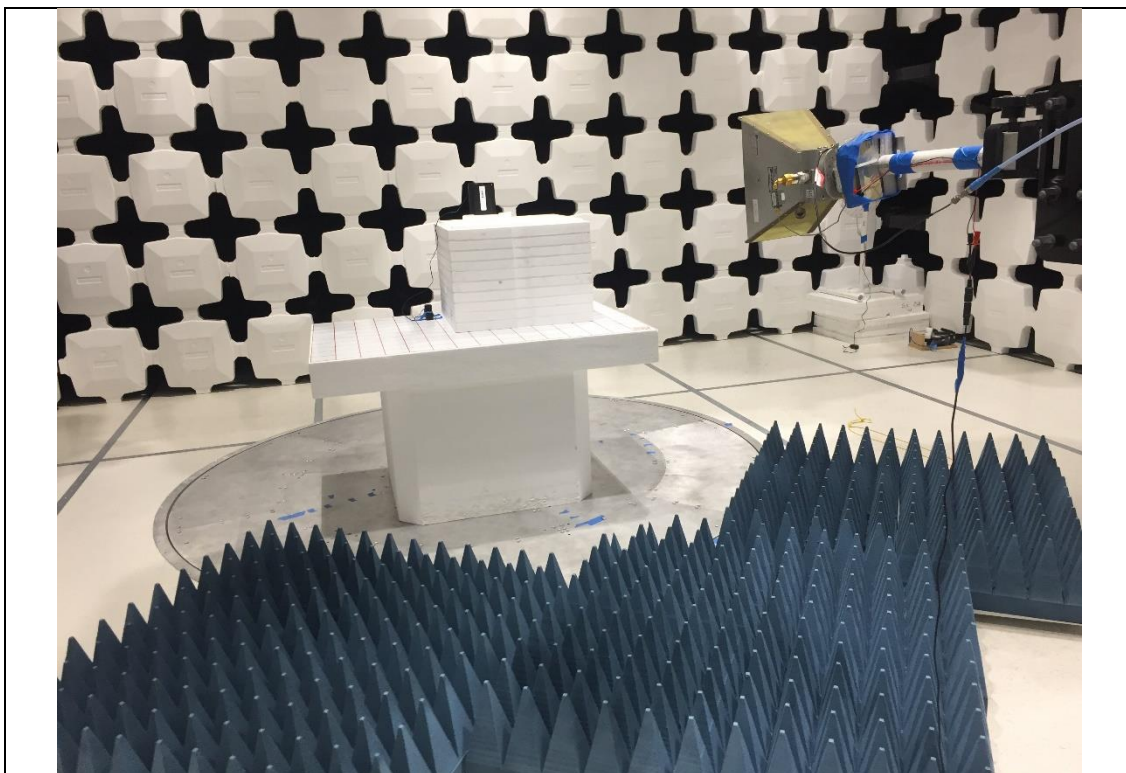

Radiated Emissions Above 1GHz setup – Front

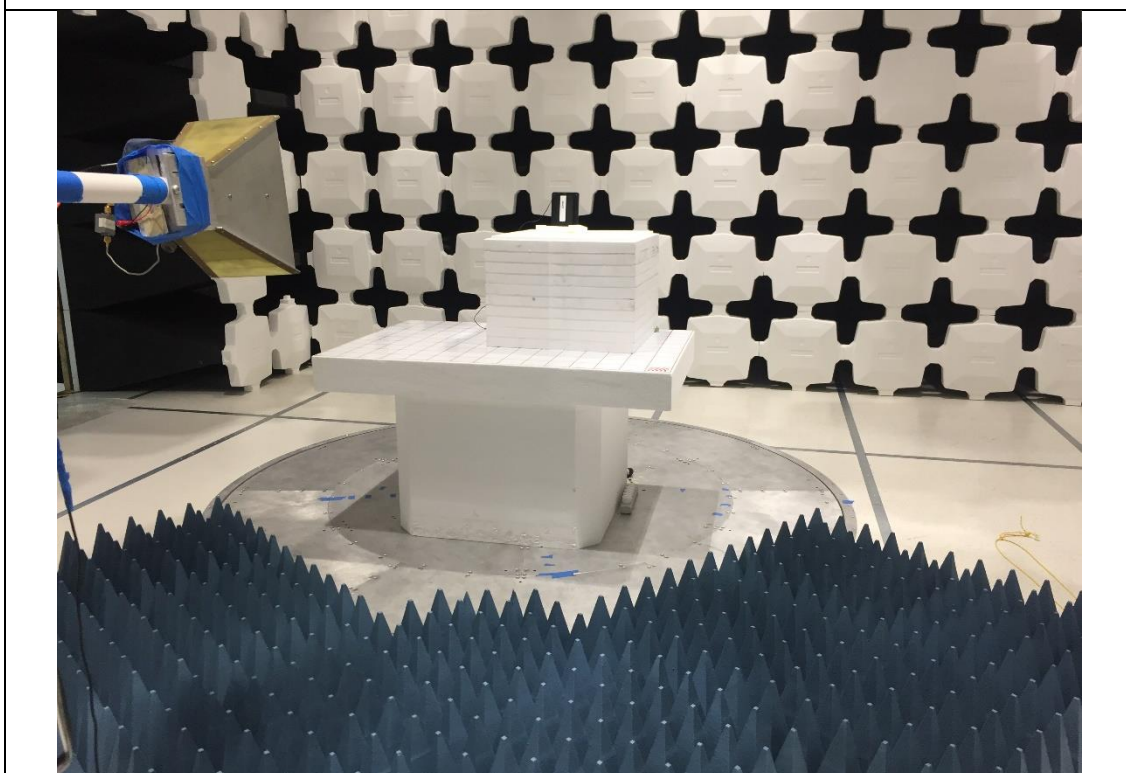

Radiated Emissions Above 1GHz setup – Rear

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



6 Test Summary

FCC Rules	ISED Rules	Test Item	Section	Verdict
§15.203	-	Antenna Requirement	8.1	Pass
§15.247 (a)(2)	RSS-247 §5.2	DTS (6 dB) Channel Bandwidth	8.2	Pass
-	RSS-Gen §6.7	Occupied Bandwidth	8.3	N/A
§15.247(b)(3)	RSS-247 §5.4	Conducted Maximum Output Power	8.4	Pass
§15.247(e)	RSS-247 §5.2	Power Spectral Density	8.5	Pass
§15.247(d)	RSS-247 §5.5	Conducted Band-Edge & Unwanted Emissions	8.6	Pass
§15.205, §15.209, §15.247(d)	RSS-247 §5.5	Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands	8.7	Pass
-	RSS-Gen §7.3	Receiver Spurious Emission	N/A	N/A ¹⁾
§15.207 (a)	RSS-Gen §8.8	AC Power Line Conducted Emissions	8.8	Pass

Note:

- 1) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



7 Uncertainty of Measurement

Test item	Measurement Uncertainty (dB)
RF Output Power (Conducted)	±1.2 dB
Power Spectral Density	±0.9 dB
Unwanted Emission (conducted)	±2.6 dB
Occupied Channel Bandwidth	±5 %
Radiated Emission (9KHz-30MHz)	±3.5 dB
Radiated Emission (30MHz-1GHz)	±4.6 dB
Radiated Emission (1-18GHz)	±4.9 dB
Radiated Emission (18-40GHz)	±3.5 dB

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8 Test summary and result

8.1 Antenna Requirement

8.1.1 Requirement

Per § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.1.2 Result

Analysis:

- EUT has one internal PCB trace antenna which is printed on the main PCB. It's not removable.

Conclusion:

- EUT complies with antenna requirement in § 15.203.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




8.2 DTS (6 dB) Bandwidth

8.2.1 Requirement

§ 15.247 (a)(2), RSS-247 §5.2

Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 KHz.

8.2.2 Test setup



8.2.3 Test Procedure

According to section 8.2, option 2, in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.8 of ANSI C63.10-2013:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Use automatic bandwidth measurement capability on instrument to obtain BW result.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




8.2.4 Test Result

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured Bandwidth (KHz)	Minimum Bandwidth (KHz)	Result
BLE	2402	250Kbps	701.3	500	Pass
BLE	2440	250Kbps	725.0	500	Pass
BLE	2480	250Kbps	727.9	500	Pass
BLE	2402	2Mbps	1197	500	Pass
BLE	2440	2Mbps	1125	500	Pass
BLE	2480	2Mbps	1313	500	Pass


Report Number: NSC-19081521-LC-FCC-IC-BLE
Product: Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number: GD00BLE-1




8.2.5 Test Plots

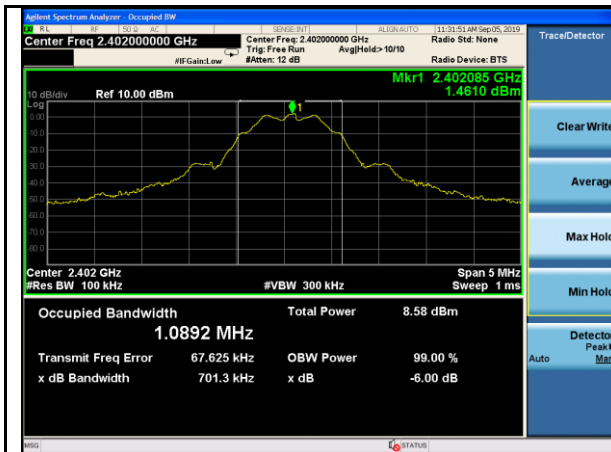


BLE-6 dB BW-Low-250Kbps

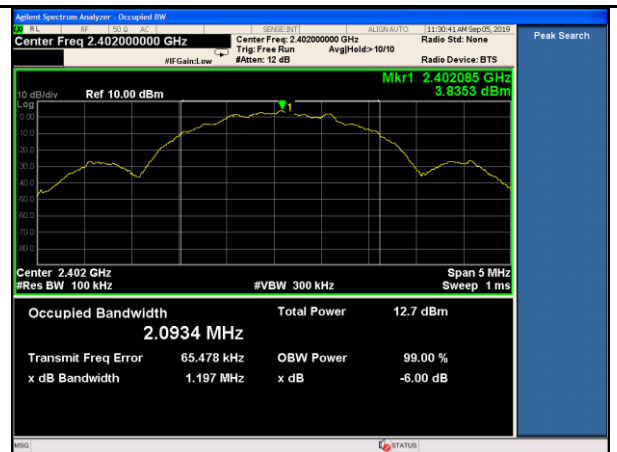


BLE-6 dB BW-Low-2Mbps

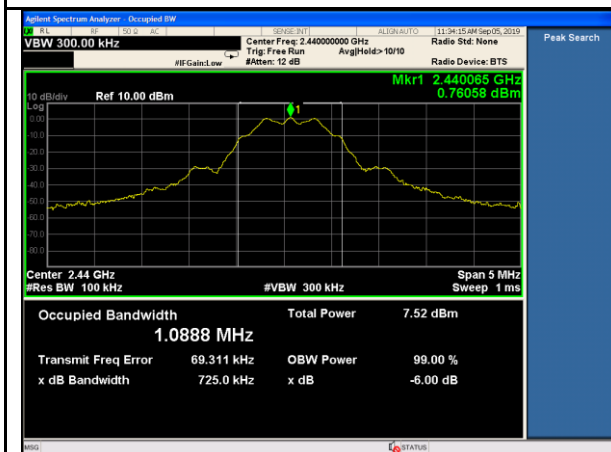


BLE-6 dB BW-Mid-250Kbps

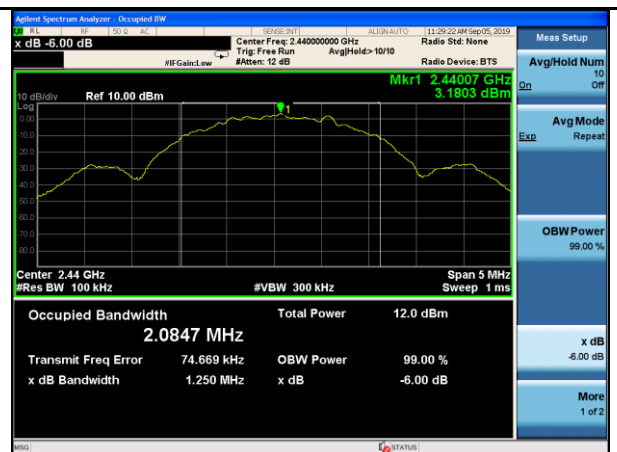

BLE-6 dB BW-Mid-2Mbps

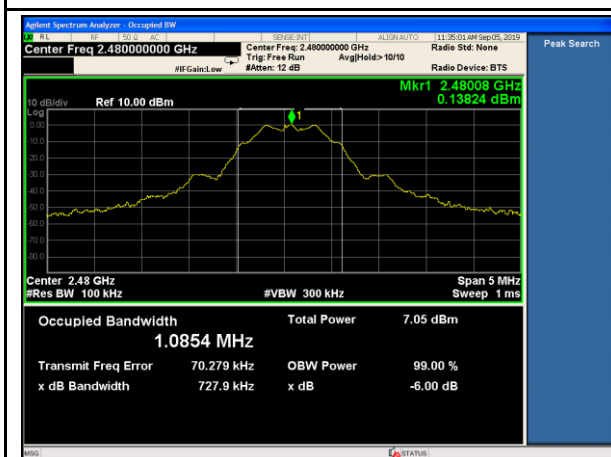

BLE-6 dB BW-High-250Kbps

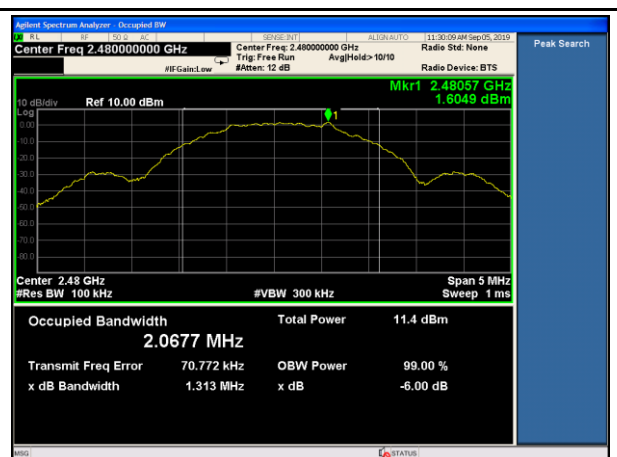

BLE-6 dB BW-High-2Mbps

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




8.3 Occupied Bandwidth (99%)

8.3.1 Requirement

RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

8.3.2 Test setup



8.3.3 Test Procedure

According to section RSS-Gen §6.7

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

1. Set RBW = 1% to 5% of the actual occupied BW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Span = large enough to capture all products of the modulation process
7. Allow the trace to stabilize.
8. Use automatic bandwidth measurement capability on instrument to obtain BW result.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.3.4 Test Result

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured 99% OBW (KHz)	Limit (KHz)	Result
BLE	2402	250Kbps	1089.2	N/A	N/A
BLE	2440	250Kbps	1088.8	N/A	N/A
BLE	2480	250Kbps	1085.4	N/A	N/A
BLE	2402	2Mbps	2093.4	N/A	N/A
BLE	2440	2Mbps	2084.7	N/A	N/A
BLE	2480	2Mbps	2067.7	N/A	N/A

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.4 Maximum Output Power

8.4.1 Requirement

§ 15.247 (b)(3), RSS-247 §5.4

or systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: the maximum output power is 1 Watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.4.2 Test setup



8.4.3 Test Procedure

For BLE, power measurement is according to subclause 11.9.1.1 of ANSI C63.10-2013:

1. Set the RBW $\geq$ DTS bandwidth
2. Set VBW $\geq 3 \times$ RBW.
2. Set SPAN $\geq 3 \times$ RBW.
3. Sweep time = auto couple.
4. Detector = peak.
5. Trace mode = max hold
6. Allow trace to fully stabilize.
7. Use peak marker function to determine the peak amplitude level.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.4.4 Test Result

Conducted Output Power

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured Output Power (dBm)	Max Output Power (dBm)	Result
BLE	2402	250Kbps	5.012	30	Pass
BLE	2440	250Kbps	4.043	30	Pass
BLE	2480	250Kbps	3.519	30	Pass
BLE	2402	2Mbps	5.005	30	Pass
BLE	2440	2Mbps	4.060	30	Pass
BLE	2480	2Mbps	3.534	30	Pass


Max e.i.r.p

Radio	Data rate	Test Frequency (MHz)	Measured Output Power (dBm)	Antenna Gain (dBi)	Max e.i.r.p (dBm)	Limit	Result
BLE	250Kbps	2402	5.012	2.1	7.112	36	Pass
	250Kbps	2440	4.043	2.1	6.143	36	Pass
	250Kbps	2480	3.519	2.1	5.619	36	Pass
	2Mbps	2402	5.005	2.1	7.105	36	Pass
	2Mbps	2440	4.060	2.1	6.160	36	Pass
	2Mbps	2480	3.534	2.1	5.634	36	Pass

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.4.5 Test Plots

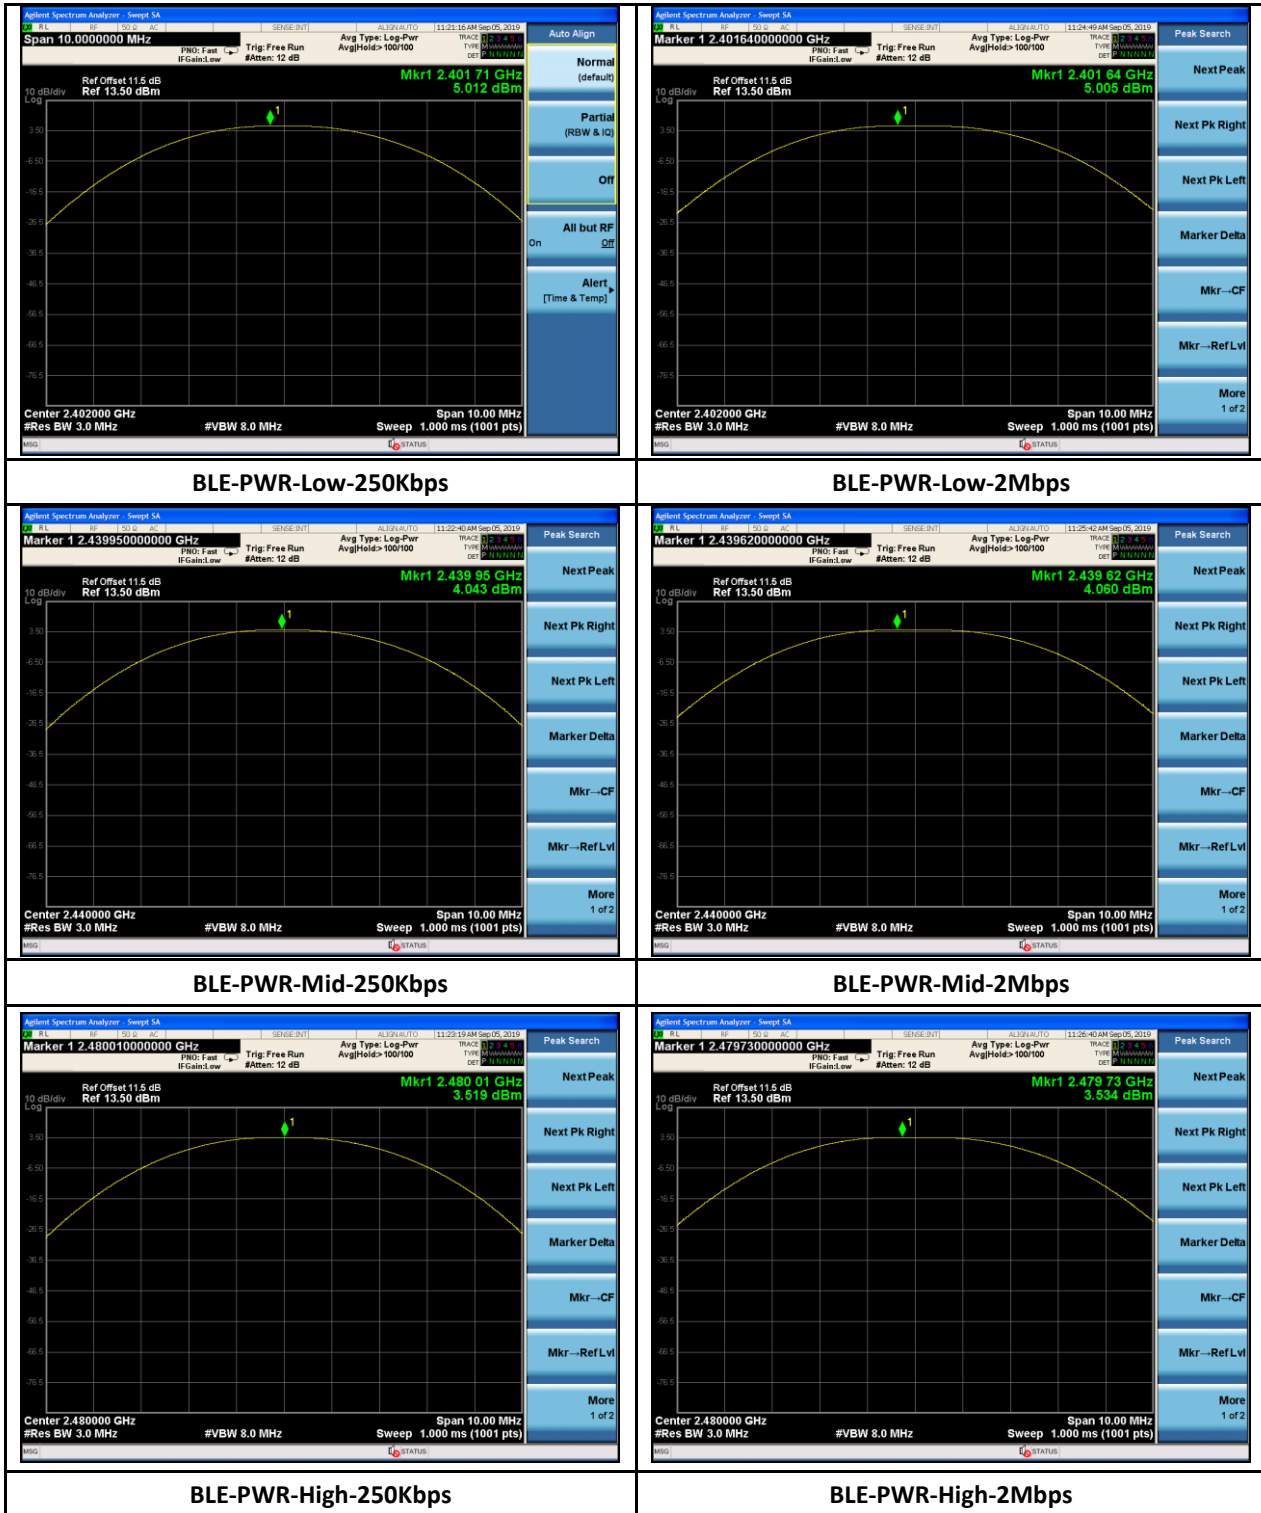

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




8.5 Power Spectral Density

8.5.1 Requirement

§ 15.247 (e), RSS-247 §5.2

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power is used to determine the power spectral density.

8.5.2 Test setup



8.5.3 Test Procedure

For BLE, PSD measurement is according to section 8.4 in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.10.2 PKPSD of ANSI C63.10-2013:

1. Set analyser centre frequency to DTS channel centre frequency.
2. Set the span to 1.5 X DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




8.5.4 Test Result

Mode/ Bandwidth	Frequency (MHz)	Data rate	Measured PSD (dBm/3KHz)	Max PSD (dBm/3KHz)	Result
BLE	2402	250Kbps	-1.090	8	Pass
BLE	2440	250Kbps	-2.031	8	Pass
BLE	2480	250Kbps	-2.575	8	Pass
BLE	2402	2Mbps	-10.417	8	Pass
BLE	2440	2Mbps	-12.291	8	Pass
BLE	2480	2Mbps	-11.963	8	Pass

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.5.5 Test Plots

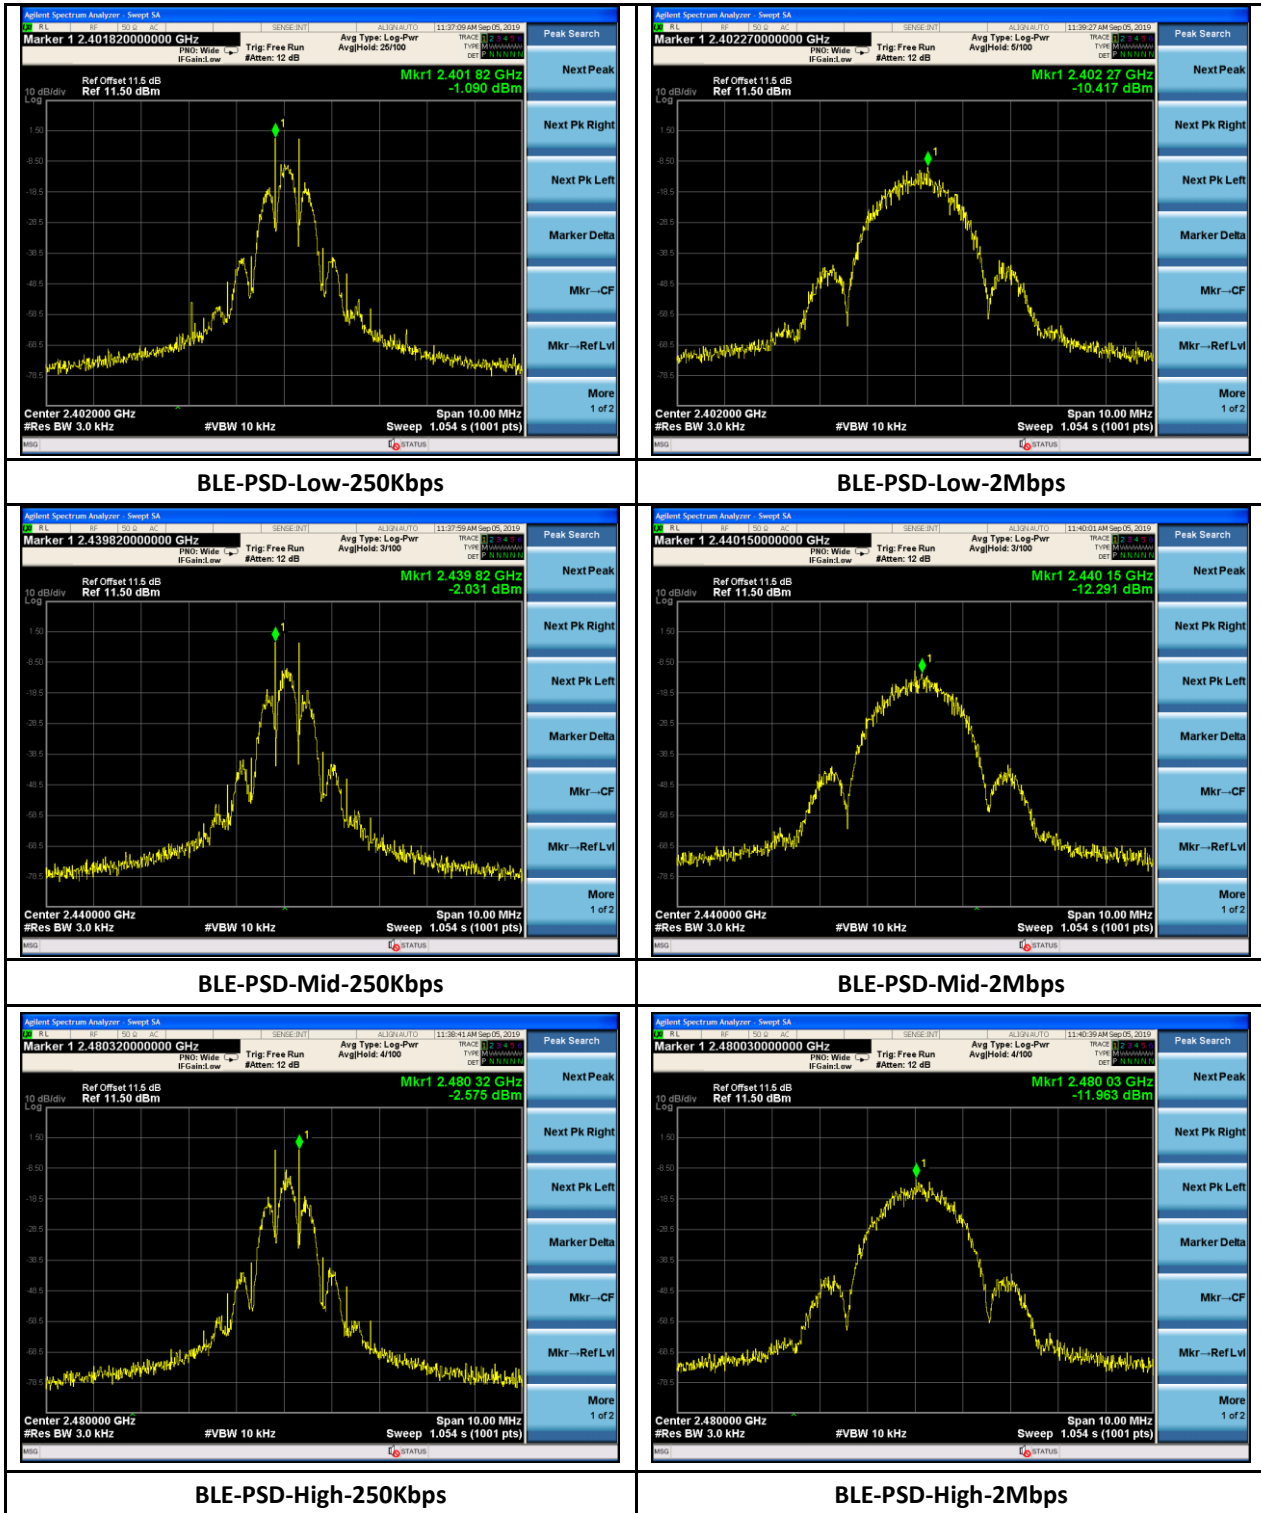

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.6 Conducted Band-Edge & Unwanted Emissions Measurement

8.6.1 Requirement

§ 15.247 (d), RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

8.6.2 Test setup



8.6.3 Test Procedure


According to section 8.5 Emission level measurement, in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.11.3 in ANSI C63.10-2013:


1. Set the centre frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

8.6.4 Test Result


See test plots

8.6.5 Test Plots

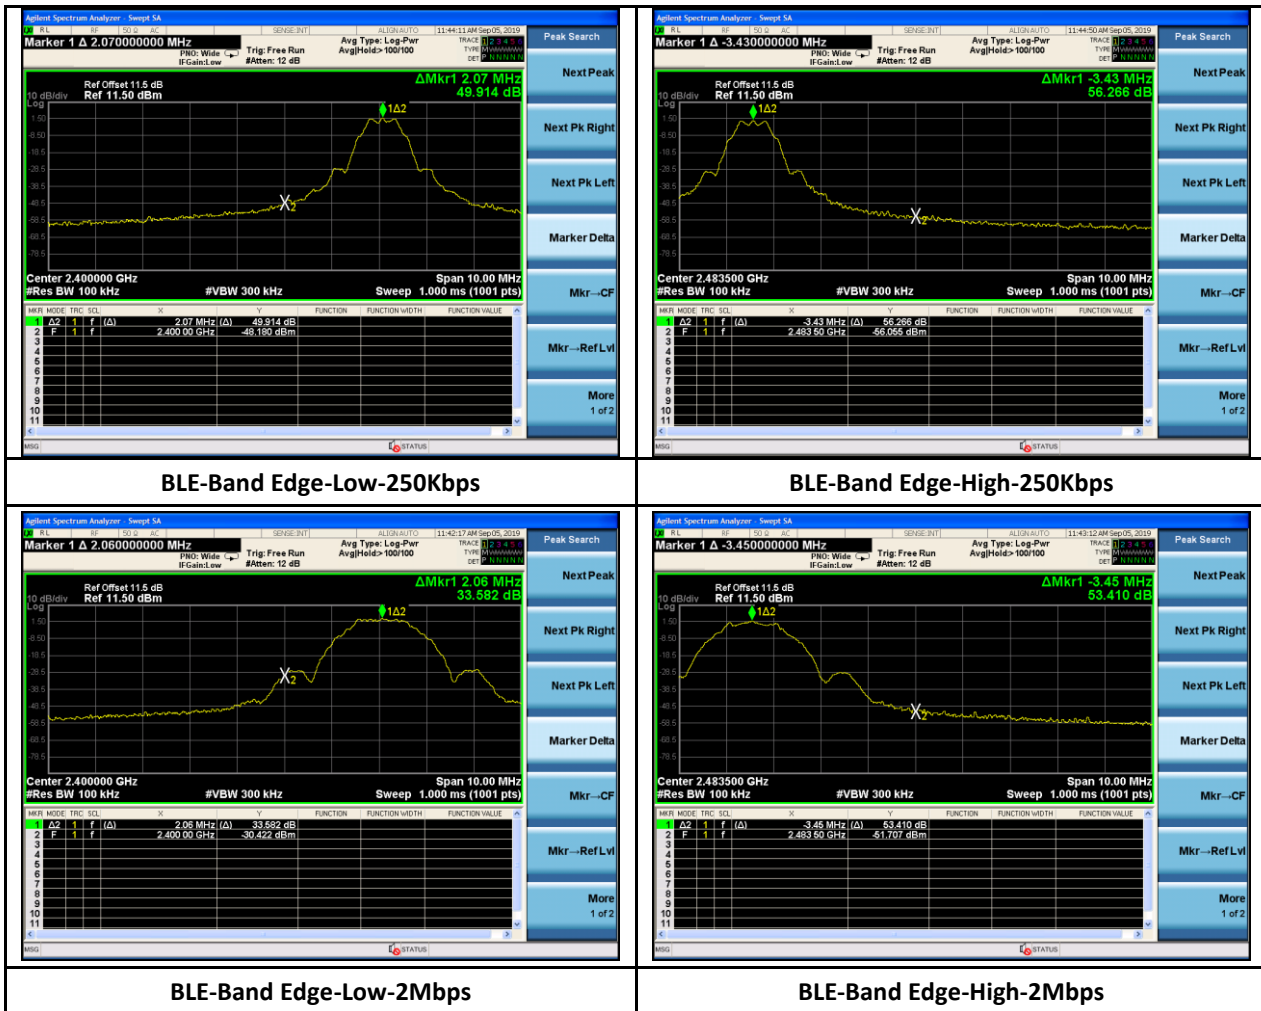


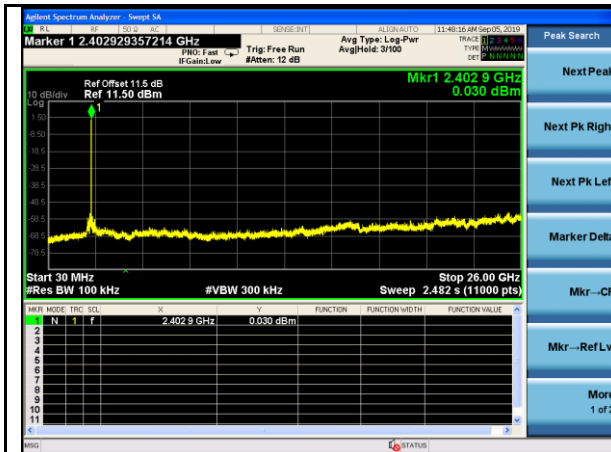


BLE-Out Of Band Emission-Low-250Kbps

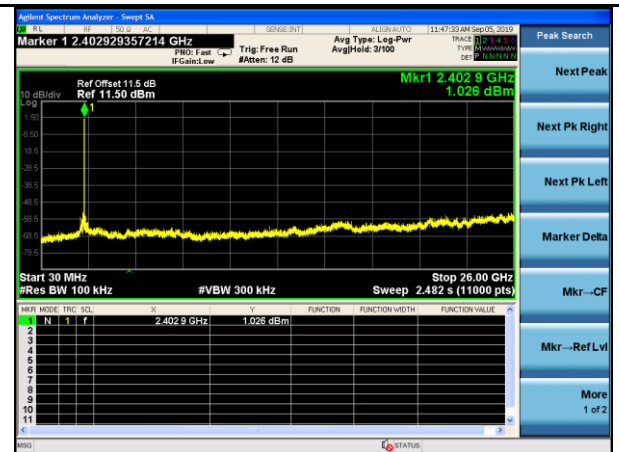


BLE-Out Of Band Emission-Low-2Mbps

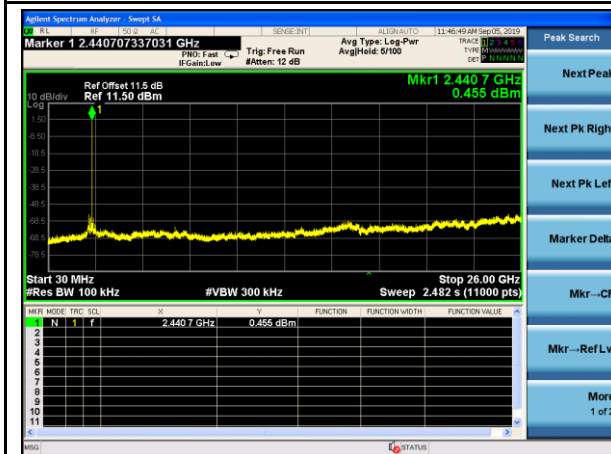


BLE-Out Of Band Emission-Mid-250Kbps

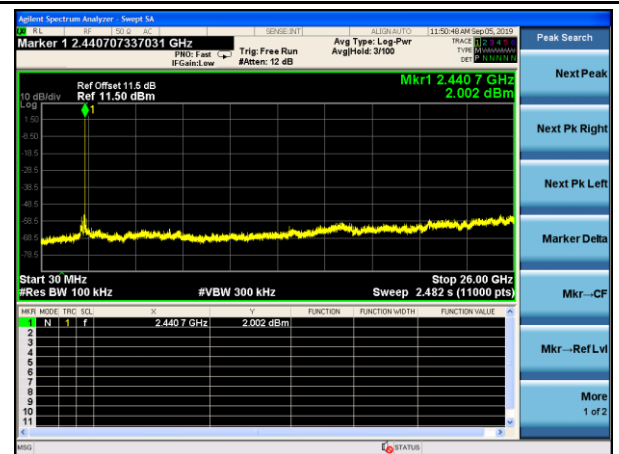

BLE-Out Of Band Emission-Mid-2Mbps

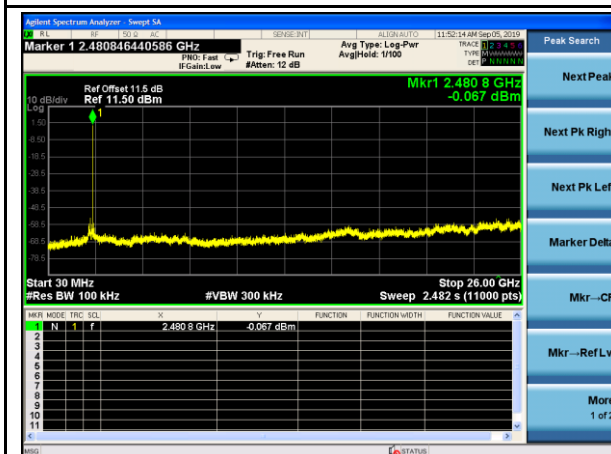

BLE-Out Of Band Emission-High-250Kbps

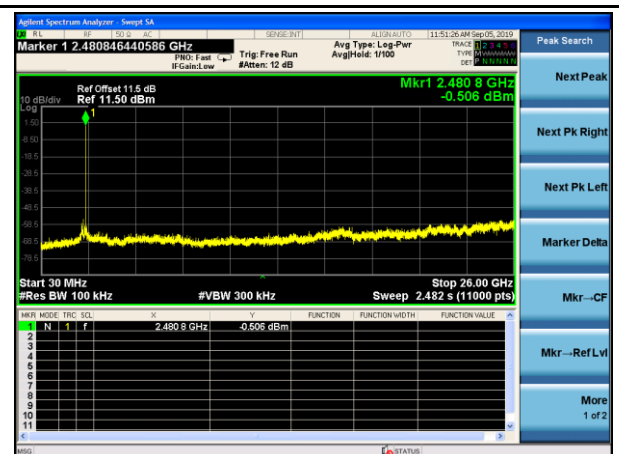

BLE-Out Of Band Emission-High-2Mbps

8.7 Radiated Band-Edge & Spurious Emissions into Restricted Frequency Bands

8.7.1 Requirement


§ 15.247 (d), RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency range (MHz)	Field Strength ($\mu\text{V/m}$)
0.009~0.490	2400/F(KHz)
0.490~1.705	24000/F(KHz)
1.705~30.0	30
30 – 88	100
88 – 216	150
216 960	200
Above 960	500


8.7.2 Test setup

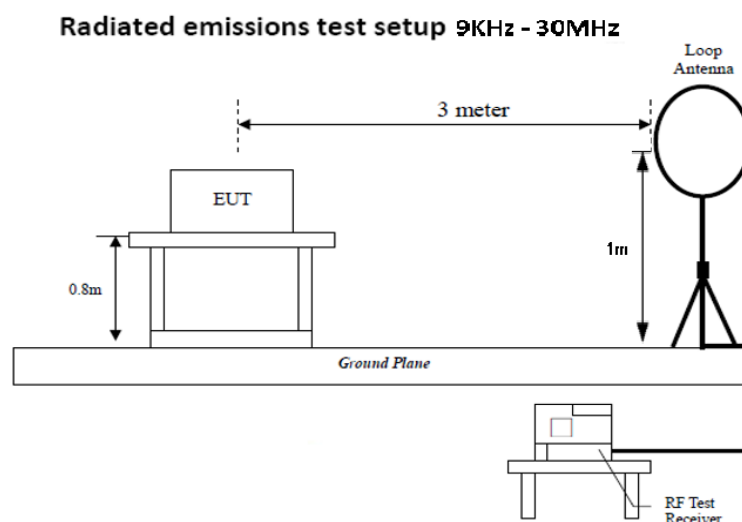


Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



Radiated emissions test setup 30 MHz - 1 GHz

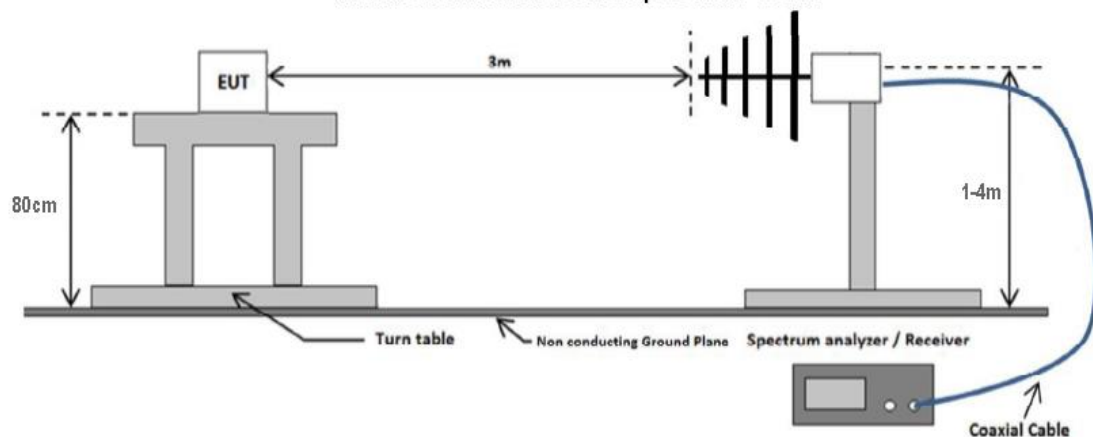

Radiated emissions test setup above 1 GHz

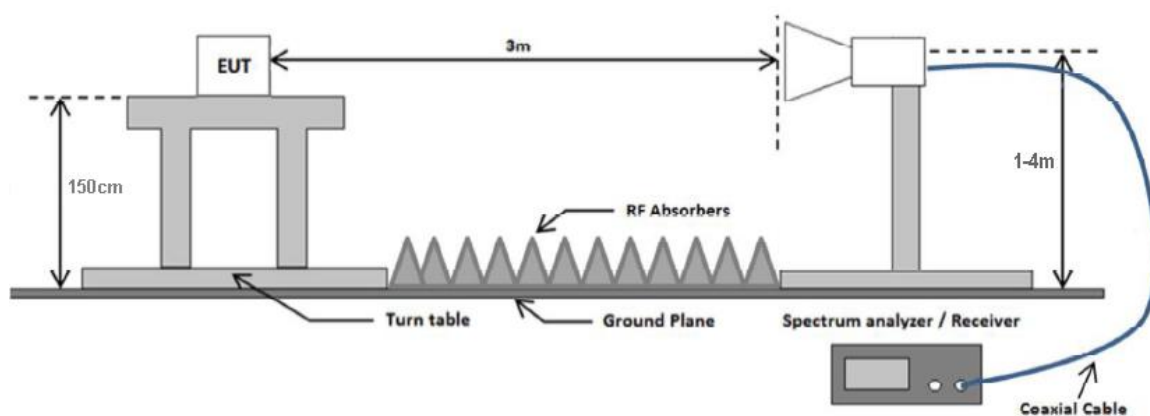

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.7.3 Test Procedure

According to section 8.6 in KDB 558074 D01 DTS Meas Guidance v05r02 and subclause 11.12.2.7 Radiated spurious emission measurements in ANSI C62.10-2013 as well as the procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 was followed. Boresight antenna mast was used during the scanning to point to EUT to maximize the emission. The process will be repeated in 3 EUT orientations.

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 300 Hz for frequency below 150KHz.
4. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for frequency between 150KHz – 30MHz.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-Peak detection at frequency between 30MHz - 1GHz.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak and average measurement at frequency above 1GHz.
7. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.


Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.7.4 Test Result

30-1000MHz test result

Test Standard:	15.209, RSS-247	Mode:	BLE
Frequency Range:	30-1000MHz	Test Date:	09/10/2019
Antenna Type/Polarity:	Bi-Log/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

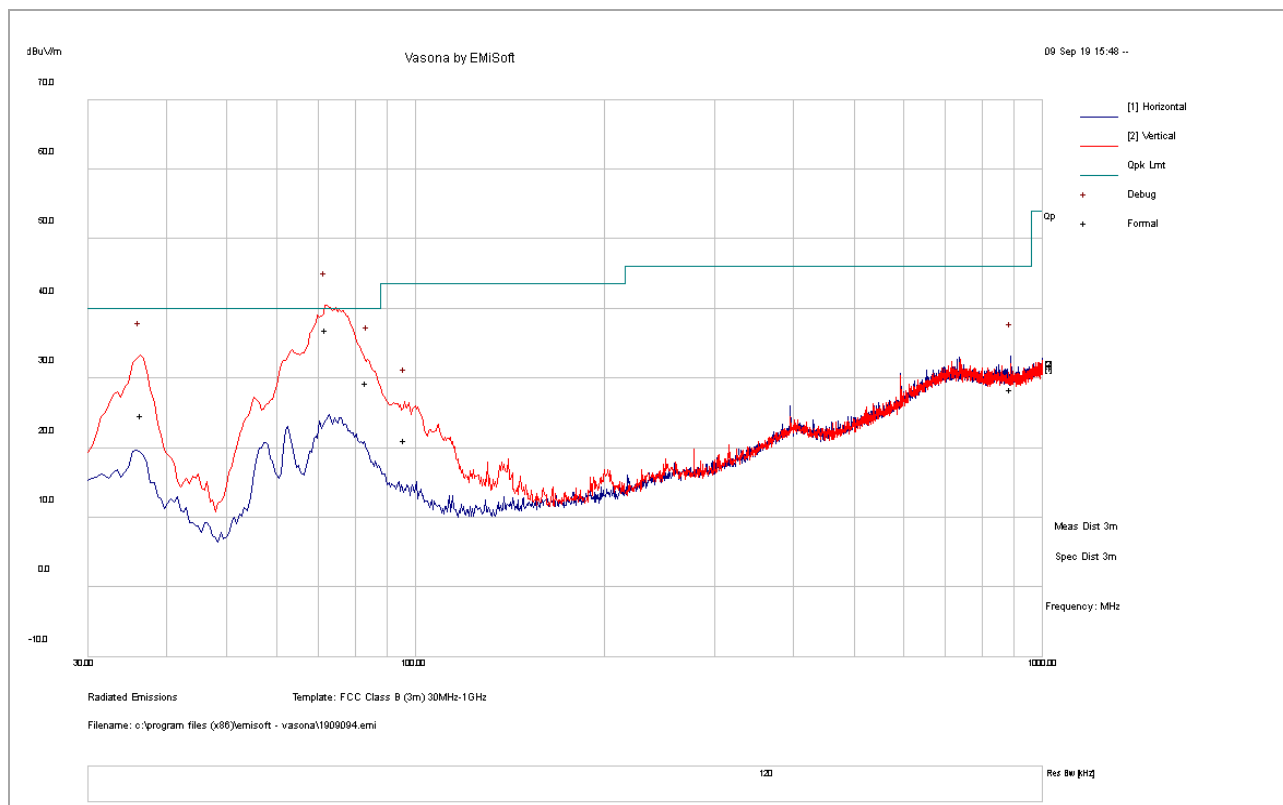

Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
71.94	58.03	3.20	-24.29	36.94	QP	V	135	189	40.00	-3.06
36.51	40.69	2.44	-18.49	24.65	QP	V	238	344	40.00	-15.35
83.67	50.65	3.37	-24.61	29.41	QP	V	100	177	40.00	-10.59
890.14	28.05	7.58	-7.19	28.44	QP	H	162	57	46.00	-17.56
95.94	41.71	3.52	-24.05	21.18	QP	V	146	340	43.50	-22.32

Note:


- 1) For below 1GHz, all different channel and modes were verified but only the worst case result under mid channel is shown here.
- 2) For below 30MHz, no outstanding noise is found other than the noise floor.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



1GHz – 18GHz test result

Test Standard:	15.209, RSS-247	Mode:	BLE-2402MHz-250Kbps
Frequency Range:	1GHz-18GHz	Test Date:	09/10/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

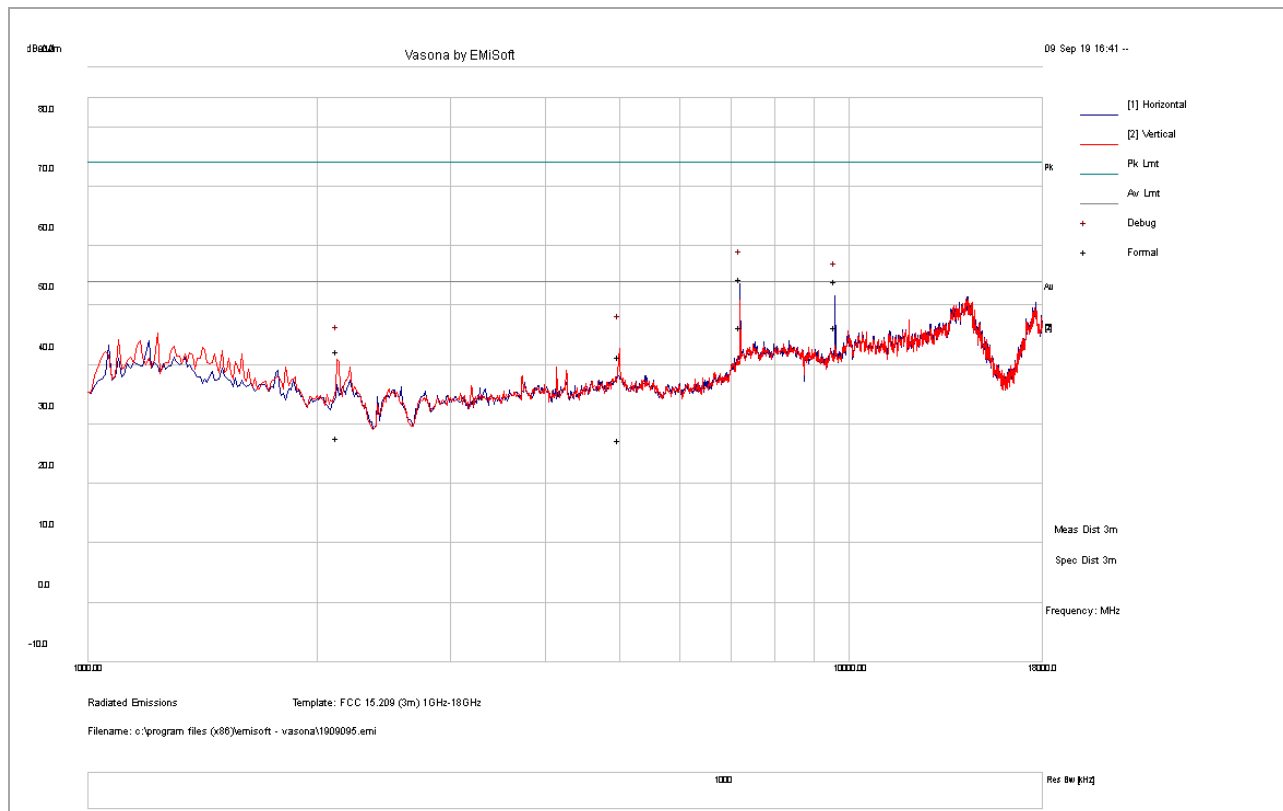


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7205.34	42.34	20.45	-8.35	54.44	PK	H	206	59	74.00	-19.56
9607.27	37.10	21.88	-4.83	54.15	PK	H	172	34	74.00	-19.85
4994.26	37.06	17.39	-13.07	41.38	PK	V	227	279	74.00	-32.62
2128.22	50.28	14.41	-22.40	42.29	PK	V	134	236	74.00	-31.71
7205.34	34.18	20.45	-8.35	46.28	AV	H	206	59	54.00	-7.72
9607.27	29.21	21.88	-4.83	46.26	AV	H	172	34	54.00	-7.74
4994.26	22.98	17.39	-13.07	27.30	AV	V	227	279	54.00	-26.70
2128.22	35.73	14.41	-22.40	27.73	AV	V	134	236	54.00	-26.27

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



1GHz – 18GHz test result

Test Standard:	15.209, RSS-247	Mode:	BLE-2440MHz-250Kbps
Frequency Range:	1GHz-18GHz	Test Date:	09/10/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

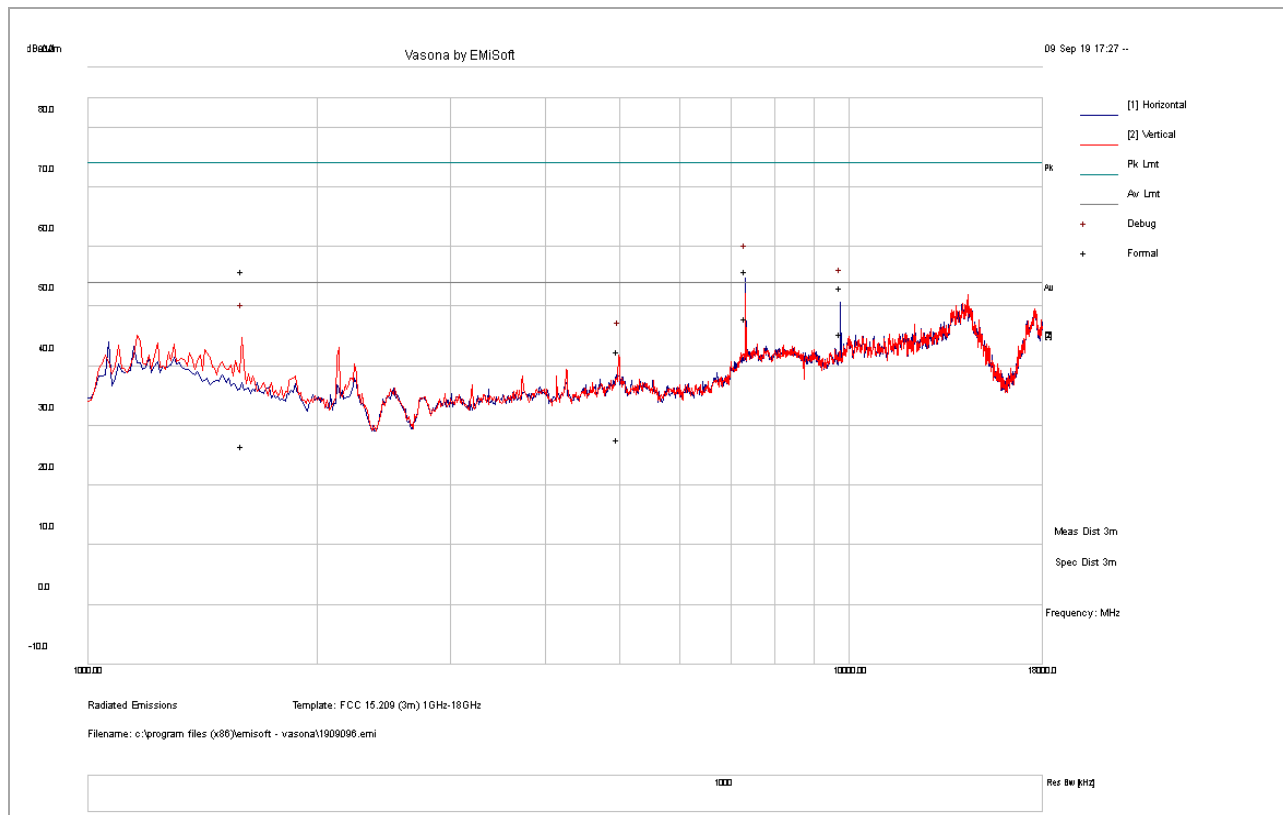


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7321.12	43.15	20.68	-7.90	55.93	PK	H	175	72	74.00	-18.07
9759.39	35.71	22.07	-4.56	53.23	PK	H	193	360	74.00	-20.77
1596.43	63.34	14.73	-22.15	55.92	PK	V	150	297	74.00	-18.08
4982.53	38.30	17.39	-13.13	42.56	PK	V	100	276	74.00	-31.44
7321.12	35.25	20.68	-7.90	48.03	AV	H	175	72	54.00	-5.97
9759.39	27.95	22.07	-4.56	45.46	AV	H	193	360	54.00	-8.54
1596.43	34.00	14.73	-22.15	26.58	AV	V	150	297	54.00	-27.42
4982.53	23.44	17.39	-13.13	27.70	AV	V	100	276	54.00	-26.30

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



1GHz – 18GHz test result

Test Standard:	15.209, RSS-247	Mode:	BLE-2480MHz-250Kbps
Frequency Range:	1GHz-18GHz	Test Date:	09/10/2019
Antenna Type/Polarity:	Horn/Hor & Ver	Test Personnel:	Bruce Li
Remark:	N/A	Test Result:	Pass

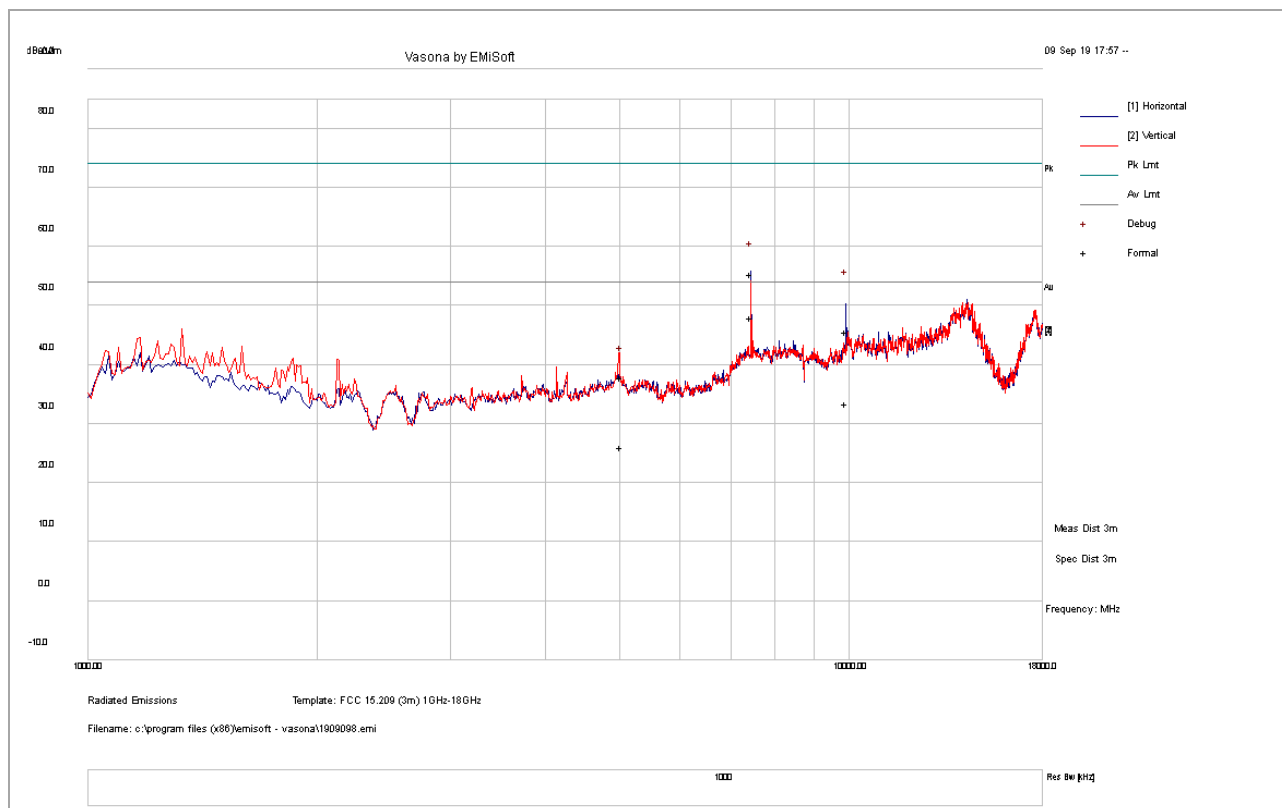


Frequency MHz	Raw dB	Cable dB	AF dB	Level dBuV/m	Det	Pol deg	Height cm	Table deg	Limit dBuV/m	Margin dB
7439.49	42.13	20.90	-7.64	55.39	PK	V	100.0	28.00	74.00	-18.61
9921.37	27.56	22.27	-4.30	45.53	PK	V	181	340	74.00	-28.48
5016.78	33.46	17.40	-12.98	37.88	PK	V	270	320	74.00	-36.12
7439.49	34.68	20.90	-7.64	47.94	AV	V	100	28	54.00	-6.06
9921.37	15.49	22.27	-4.30	33.46	AV	V	181	340	54.00	-20.54
5016.78	21.59	17.40	-12.98	26.01	AV	V	270	320	54.00	-27.99



Note:

- 1) 2Mbps data rate also has been verified and found that the spurious emission is almost same as under 250Kbps data rate mode. Only the worst case result is presented here.
- 2) 18-40GHz was evaluated and no substantial emission was found for above 18 GHz other than noise floor.

Restricted Band Measurement Plots:

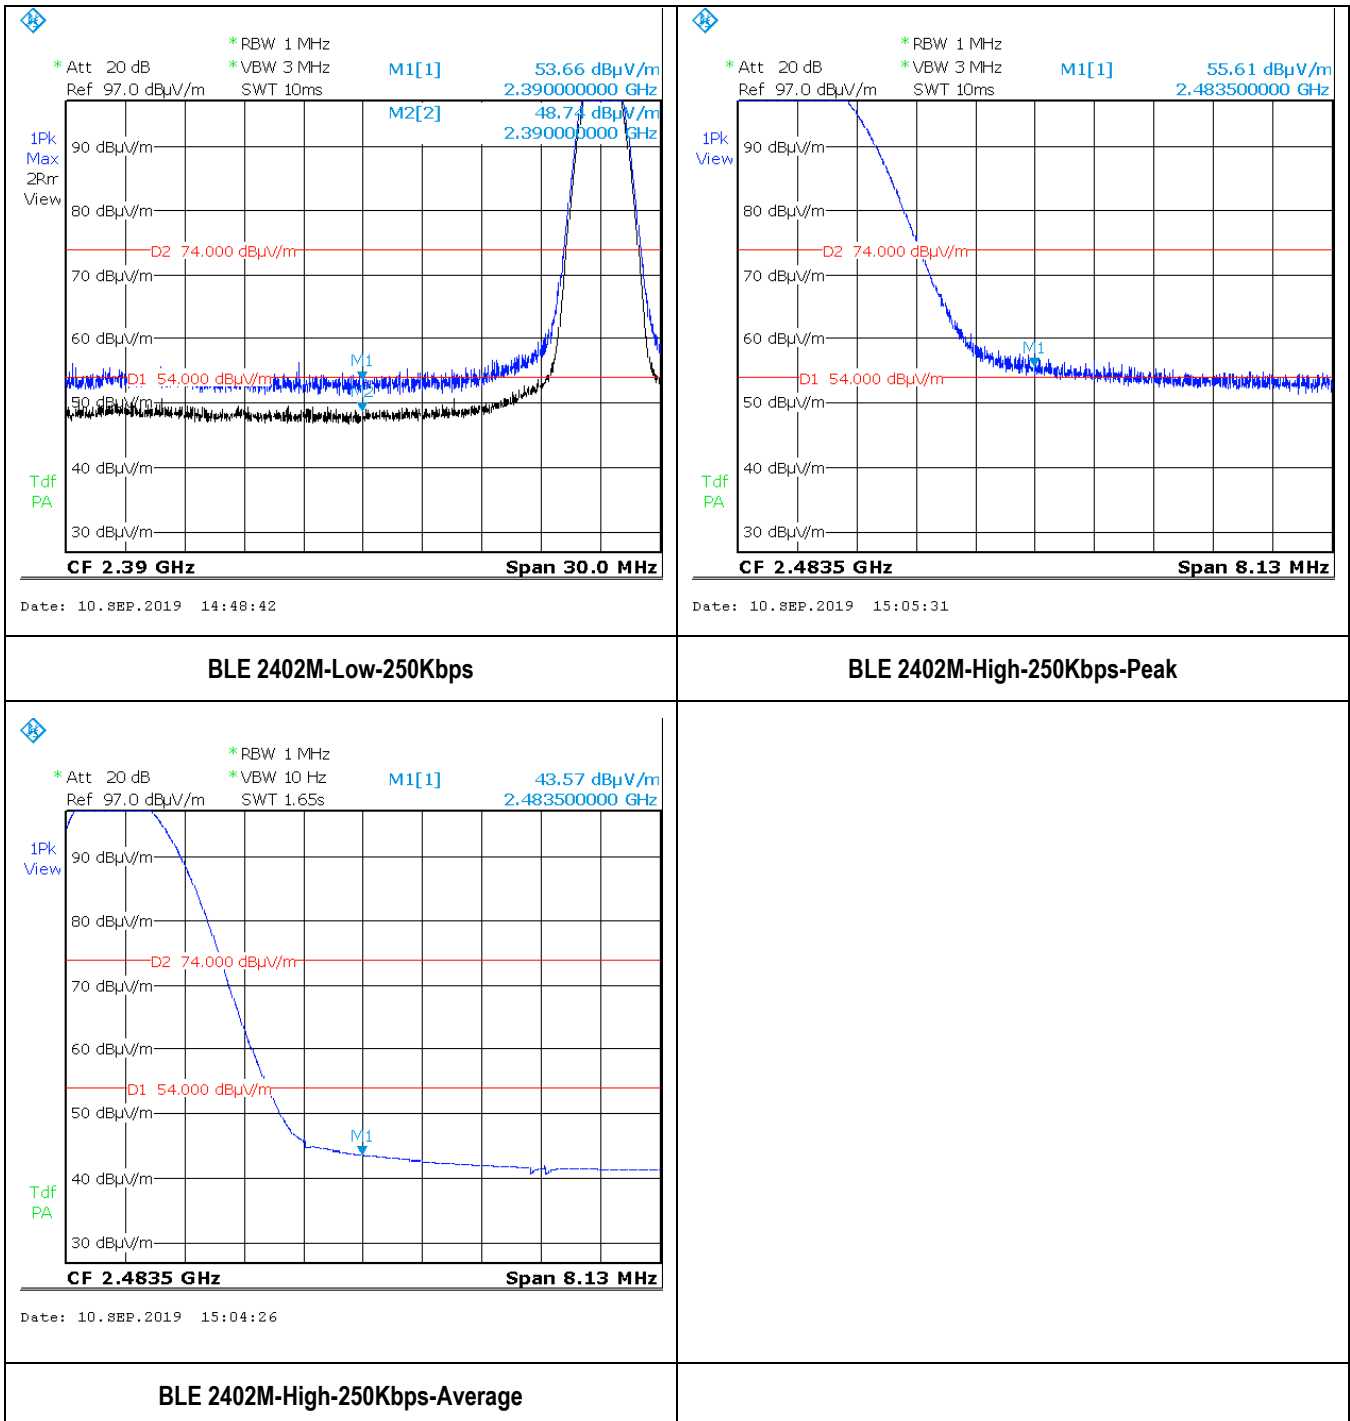


Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1

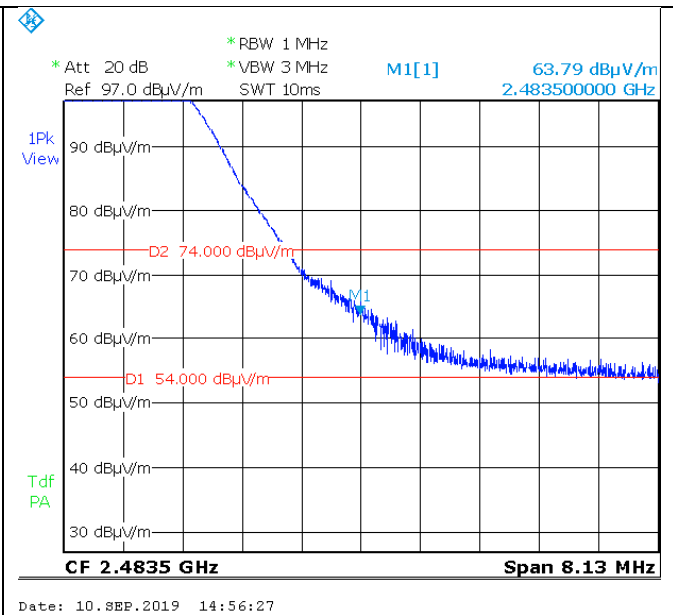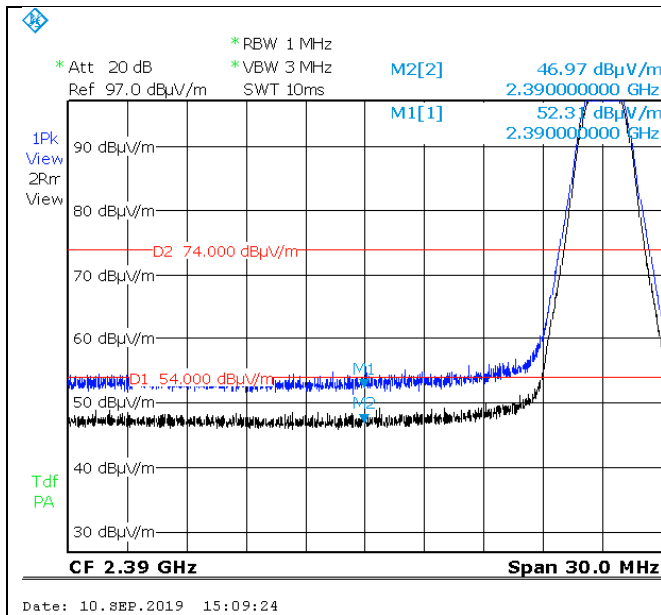

BLE 2402M-Low-2Mbps

BLE 2402M-High-2Mbps-Peak

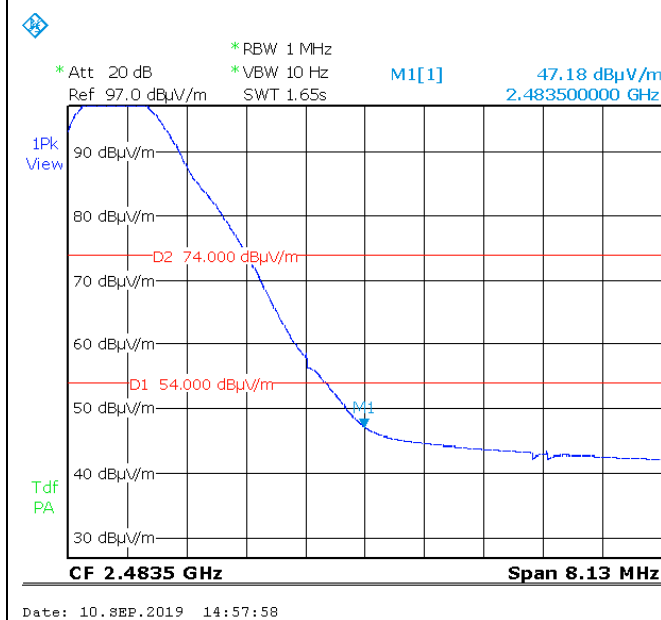

BLE 2402M-High-2Mbps-Average

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.8 Conducted Emissions

8.8.1 Requirement


Per RSS-Gen §8.8, an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limits for Conducted Emissions at the Mains Ports

Section	Frequency ranges (MHz)	Limit (dBuV)	
		QP	Average
Class B devices	0.15 – 0.5	66 – 56	56 – 46
	0.5 – 5	56	46
	5 - 30	60	50

NOTE 1 The lower limit shall apply at the transition frequencies.

8.8.2 Test setup

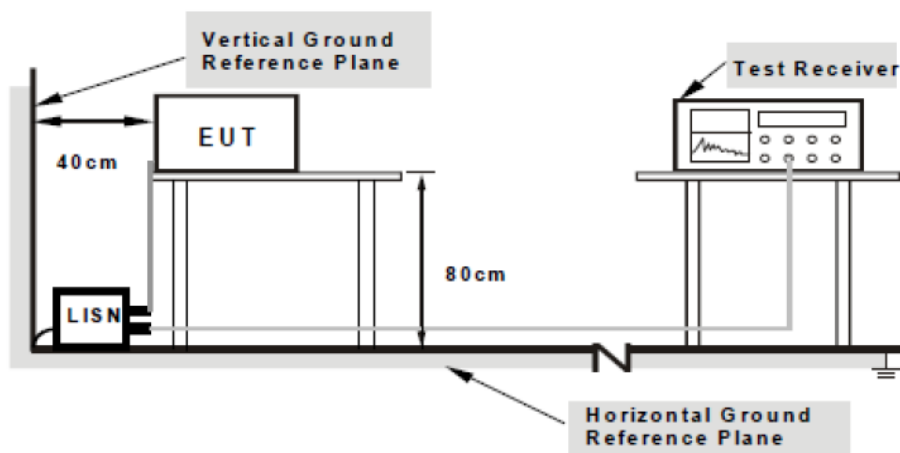

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.8.3 Test Procedure

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipment was powered separately from another main supply.
5. The EUT was switched on and allowed to warm up to its normal operating condition.
6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
7. High peaks, relative to the limit line, were then selected.
8. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made
9. All possible modes of operation were investigated. Only the worst case emissions were measured and reported. All other emissions were relatively insignificant.


Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



8.8.4 Test Result

Live Line

Test Standard:	15.207, RSS-Gen	Mode:	Line
Frequency Range:	0.15-30MHz	Test Date:	09/10/2019
Antenna Type/Polarity:	N/A	Test Personnel:	Bruce Li
Remark:	120VAC, 60Hz	Test Result:	Pass

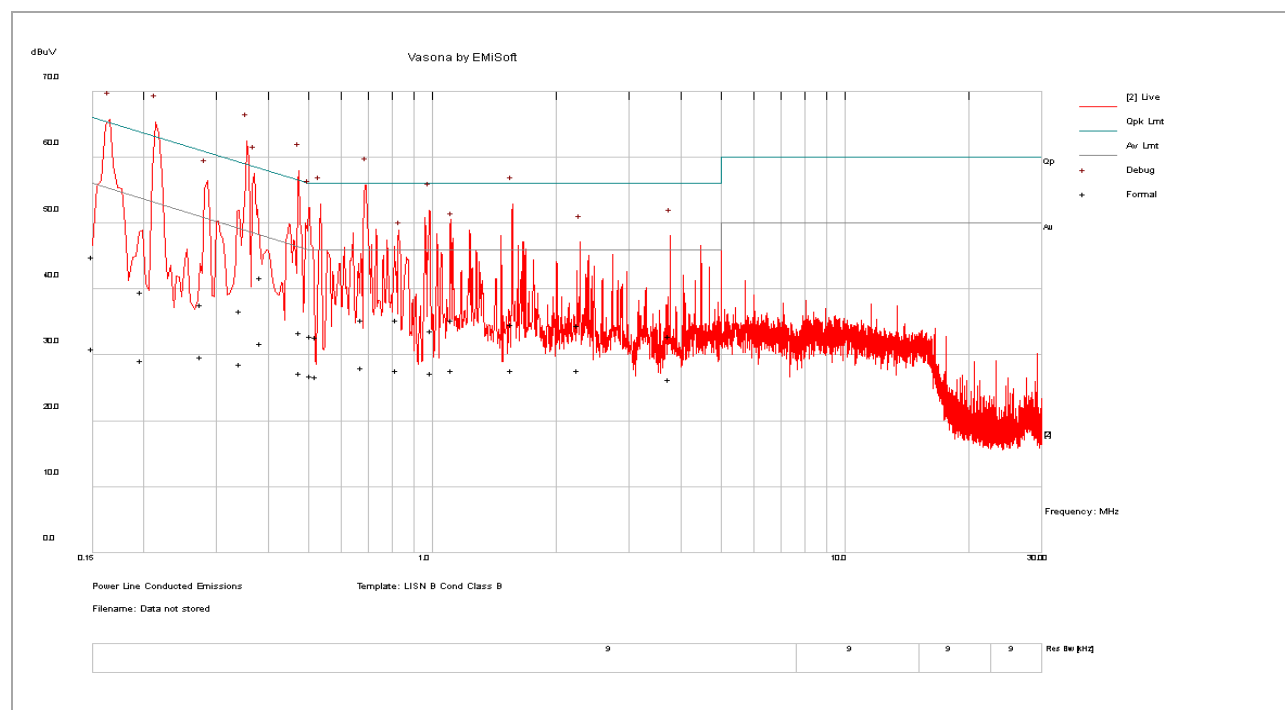

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV/m)	Meas. Type	Line	Limit (dBuV/m)	Margin (dB)	Pass / Fail
0.34	26.50	10.09	0.13	36.72	QP	Live	59.15	-22.42	Pass
0.20	29.31	10.07	0.19	39.58	QP	Live	63.71	-24.14	Pass
0.48	23.21	10.11	0.11	33.43	QP	Live	56.39	-22.96	Pass
0.15	34.70	10.07	0.24	45.02	QP	Live	65.99	-20.97	Pass
0.67	25.22	10.12	0.11	35.45	QP	Live	56.00	-20.55	Pass
0.38	31.62	10.10	0.12	41.83	QP	Live	58.19	-16.36	Pass
1.56	24.43	10.19	0.10	34.73	QP	Live	56.00	-21.27	Pass
0.52	22.59	10.11	0.11	32.81	QP	Live	56.00	-23.19	Pass
0.51	22.64	10.11	0.11	32.86	QP	Live	56.00	-23.14	Pass
1.00	23.46	10.15	0.11	33.72	QP	Live	56.00	-22.28	Pass
0.27	27.55	10.08	0.14	37.77	QP	Live	60.97	-23.20	Pass
3.76	22.42	10.32	0.13	32.87	QP	Live	56.00	-23.13	Pass
1.11	25.13	10.16	0.10	35.39	QP	Live	56.00	-20.61	Pass
2.26	24.19	10.24	0.11	34.54	QP	Live	56.00	-21.46	Pass
0.82	25.21	10.14	0.10	35.44	QP	Live	56.00	-20.56	Pass
0.34	18.40	10.09	0.13	28.62	AV	Live	49.15	-20.53	Pass
0.20	19.00	10.07	0.19	29.26	AV	Live	53.71	-24.45	Pass
0.48	17.06	10.11	0.11	27.27	AV	Live	46.39	-19.12	Pass

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1




Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV/m)	Meas. Type	Line	Limit (dBuV/m)	Margin (dB)	Pass /Fail
0.15	20.64	10.07	0.24	30.96	AV	Live	55.99	-25.03	Pass
0.67	17.93	10.12	0.11	28.16	AV	Live	46.00	-17.84	Pass
0.38	21.61	10.10	0.12	31.82	AV	Live	48.19	-16.37	Pass
1.56	17.45	10.19	0.10	27.74	AV	Live	46.00	-18.26	Pass
0.52	16.58	10.11	0.11	26.79	AV	Live	46.00	-19.21	Pass
0.51	16.63	10.11	0.11	26.85	AV	Live	46.00	-19.15	Pass
1.00	16.99	10.15	0.11	27.25	AV	Live	46.00	-18.75	Pass
0.27	19.56	10.08	0.14	29.79	AV	Live	50.97	-21.18	Pass
3.76	15.87	10.32	0.13	26.31	AV	Live	46.00	-19.69	Pass
1.11	17.51	10.16	0.10	27.77	AV	Live	46.00	-18.23	Pass
2.26	17.43	10.24	0.11	27.78	AV	Live	46.00	-18.22	Pass
0.82	17.52	10.14	0.10	27.75	AV	Live	46.00	-18.25	Pass

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



Neutral Line

Test Standard:	15.207, RSS-Gen	Mode:	Neutral
Frequency Range:	0.15-30MHz	Test Date:	09/10/2019
Antenna Type/Polarity:	N/A	Test Personnel:	Bruce Li
Remark:	120VAC, 60Hz	Test Result:	Pass

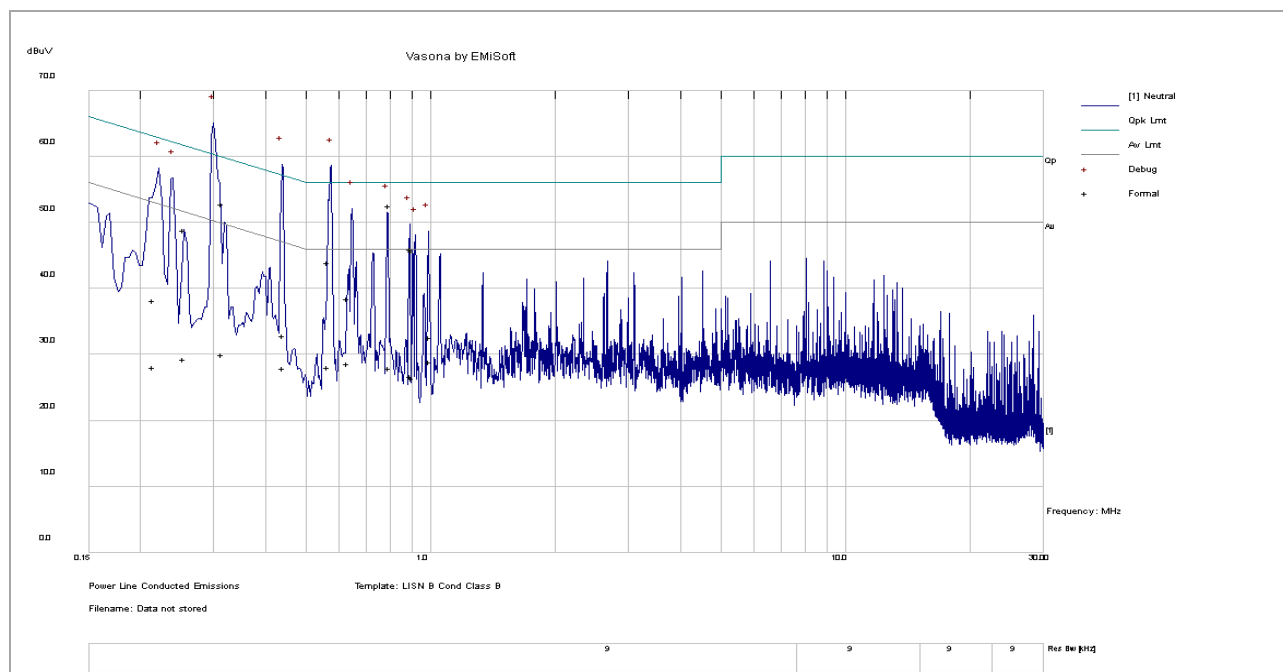

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV/m)	Meas. Type	Line	Limit (dBuV/m)	Margin (dB)	Pass /Fail
0.32	42.67	10.09	0.13	52.89	QP	Neutral	59.83	-6.94	Pass
0.57	33.81	10.11	0.10	44.02	QP	Neutral	56.00	-11.98	Pass
0.44	22.76	10.10	0.12	32.98	QP	Neutral	57.00	-24.02	Pass
0.63	28.26	10.12	0.10	38.48	QP	Neutral	56.00	-17.52	Pass
0.80	42.37	10.13	0.10	52.60	QP	Neutral	56.00	-3.40	Pass
0.21	28.05	10.08	0.17	38.30	QP	Neutral	63.01	-24.71	Pass
0.25	38.72	10.08	0.15	48.95	QP	Neutral	61.61	-12.66	Pass
0.90	35.79	10.14	0.10	46.04	QP	Neutral	56.00	-9.96	Pass
1.00	22.37	10.15	0.11	32.63	QP	Neutral	56.00	-23.37	Pass
0.90	35.54	10.14	0.10	45.78	QP	Neutral	56.00	-10.22	Pass
0.32	19.77	10.09	0.13	29.99	AV	Neutral	49.83	-19.84	Pass
0.57	17.87	10.11	0.10	28.09	AV	Neutral	46.00	-17.91	Pass
0.44	17.77	10.10	0.12	27.99	AV	Neutral	47.00	-19.01	Pass
0.63	18.43	10.12	0.10	28.65	AV	Neutral	46.00	-17.35	Pass
0.80	17.79	10.13	0.10	28.02	AV	Neutral	46.00	-17.98	Pass
0.21	17.92	10.08	0.17	28.17	AV	Neutral	53.01	-24.85	Pass
0.25	19.10	10.08	0.15	29.33	AV	Neutral	51.61	-22.28	Pass
0.90	16.46	10.14	0.10	26.70	AV	Neutral	46.00	-19.30	Pass
1.00	18.67	10.15	0.11	28.93	AV	Neutral	46.00	-17.07	Pass
0.90	16.20	10.14	0.10	26.44	AV	Neutral	46.00	-19.56	Pass

Report Number:	NSC-19081521-LC-FCC-IC-BLE
Product:	Garage Door Opener Remote Command Transceiver with TILT Sensor
Model Number:	GD00BLE-1



9 Test instrument list

Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
Semi-Anechoic Chamber	ETS-Lindgren	10M	VL001	5/11/2019	5/11/2020
Shielding Control Room	ETS-Lindgren	Series 81	VL006	N/A	N/A
Spectrum Analyzer	Keysight	N9020A	MY50110074	5/4/2019	5/4/2020
EMC Test Receiver	R&S	ESL6	100230	5/7/2019	5/7/2020
LISN (9KHz – 30MHz)	EMCO	3816/2	9705-1066	5/4/2019	5/4/2020
Bi-Log Antenna	ETS-Lindgren	3142E	217921	11/15/2018	11/15/2019
Horn Antenna (1-18GHz)	Electro-Metrics	EM-6961	6292	5/2/2019	5/2/2020
Horn Antenna (18-40GHz)	Com-Power	AH-840	101109	5/2/2019	5/2/2020
Preamplifier	RF Bay, Inc.	LPA-10-20	11180621	5/10/2019	5/10/2020
True RMS Multi-meter	UNI-T	UT181A	C173014829	5/10/2019	5/10/2020
Temp / Humidity / Pressure Meter	PCE Instruments	PCE-THB 40	R062028	5/9/2019	5/9/2020
RF Attenuator	Pasternack	PE7005-3	VL061	5/10/2019	5/10/2020
Preamplifier 100KHz - 40GHz	Aeroflex	33711-392-77150-11	064	5/10/2019	5/10/2020
EM Center Control	ETS-Lindgren	7006-001	160136	N/A	N/A
Turn Table	ETS-Lindgren	2181-3.03	VL002	N/A	N/A
Boresight Antenna Tower	ETS-Lindgren	2171B	VL003	N/A	N/A
Loop Antenna (9k-30MHz)	Com-Power	AL-130	121012	5/9/2019	5/9/2020
RE test cable(below 6GHz)	Vista	RE-6GHz-01	RE-6GHz-01	5/10/2019	5/10/2020
RE test cable (1-18GHz)	PhaseTrack	II-240	RE-18GHz-01	5/10/2019	5/10/2020
RE test cable (>18GHz)	Sucoflex	104	344903/4	5/10/2019	5/10/2020
Pulse limiter	Com-Power	LIT-930A	531727	5/15/2019	5/15/2020
CE test cable #1	FIRST RF	FRF-C-1002-001	CE-6GHz-01	5/10/2019	5/10/2020
CE test cable#2	FIRST RF	FRF-C-1002-001	CE-6GHz-02	5/9/2019	5/9/2020