

TEST REPORT

Applicant: Nice North America LLC
Address: 5919 Sea Otter Place, Suite 100, Carlsbad, CA
92010 USA
Equipment Type: Wireless Flood and Temperature Detector
Model Name: 2GIG-FT100-345
Brand Name: 2GIG
FCC ID: EF400261
47 CFR Part 15 Subpart B
Test Standard: ICES-003 (Issue 7, October 15, 2020)
ANSI C63.4-2014
Sample Arrival Date: Apr. 09, 2025
Test Date: Apr. 10, 2025 - Apr. 10, 2025
Date of Issue: Jun. 20, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Qiu Yongjing

Checked by: Liu Zhenxiang

Approved by: Tolan Tu
(Testing Director)

Qiu Yongjing

Liu zhen xiang

Tolan Tu

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>May 15, 2025</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 20, 2025</u>	<u>Update Equipment Type.</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location.....	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information.....	4
2.2	Manufacturer Information	4
2.3	General Description for Equipment under Test (EUT)	4
2.4	Ancillary Equipment.....	4
2.5	Technical Information	4
3	SUMMARY OF TEST RESULTS	5
3.1	Test Standards	5
3.2	Verdict.....	5
3.3	Test Uncertainty	5
4	GENERAL TEST CONFIGURATIONS	6
4.1	Test Enclosure List.....	6
4.2	Test Configurations	6
4.3	Test Setups	7
5	TEST ITEMS	9
5.1	Emission Tests	9
ANNEX A	TEST RESULTS	14
A.1	Radiated Emission	14
A.2	Conducted Emission, AC Ports	22
ANNEX B	TEST SETUP PHOTOS	23
ANNEX C	EUT EXTERNAL PHOTOS.....	23
ANNEX D	EUT INTERNAL PHOTOS.....	23

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Nice North America LLC
Address	5919 Sea Otter Place, Suite 100, Carlsbad, CA 92010 USA

2.2 Manufacturer Information

Manufacturer	Nice North America LLC
Address	5919 Sea Otter Place, Suite 100, Carlsbad, CA 92010 USA

2.3 General Description for Equipment under Test (EUT)

EUT Name	Wireless Flood and Temperature Detector
Model Name Under Test	2GIG-FT100-345
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	X1
Software Version	X1
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	Huiderui
	Model No.	CR2
	Serial No.	N/A
	Nominal Capacity	1000mAh
	Rated Voltage	3.0V
	Manufacturer	Huizhou Huiderui Lithium Battery Technology Co., Ltd

2.5 Technical Information

Network and Wireless connectivity	SRD 345 MHz
Classification of equipment	Class B
The highest internal frequency of EUT	345 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 (Issue 7, October 15, 2020)	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	N/A	Note1
Note1: This product does not have an AC ports, therefore testing is not applicable					

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (30 MHz-1 GHz)-966#2	4.4 dB
Radiated emissions (1 GHz-18 GHz)-966#2	5.0 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

N.A

4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Working Test Mode</u> EUT + Battery


Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1	1

4.3 Test Setups


Test Setup 1

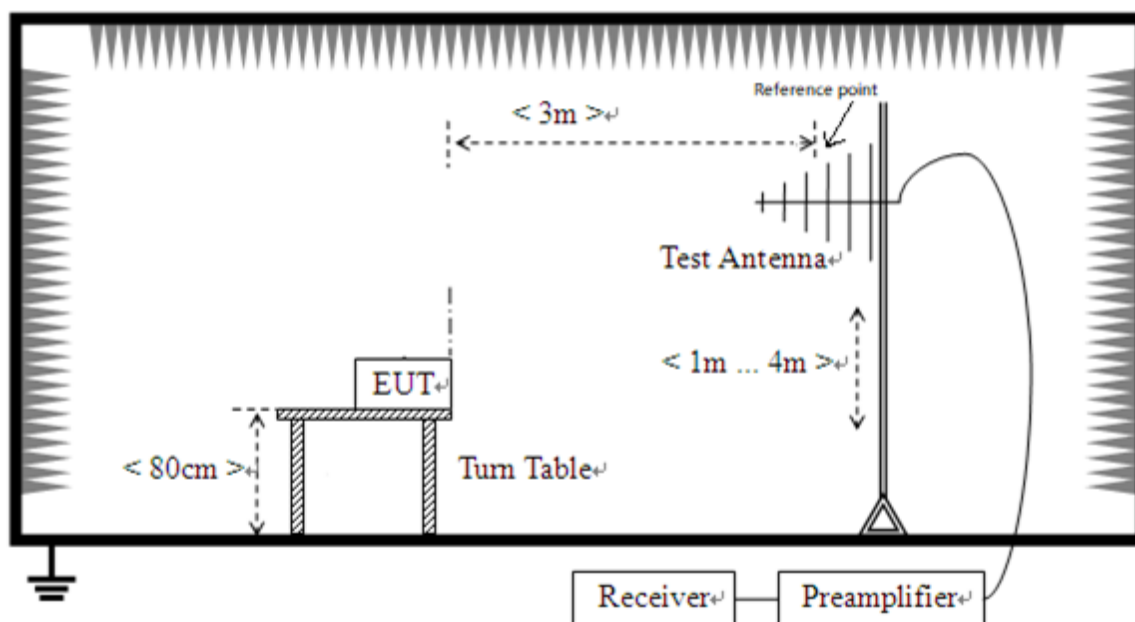

Radiated Emission (30 MHz-1 GHz)

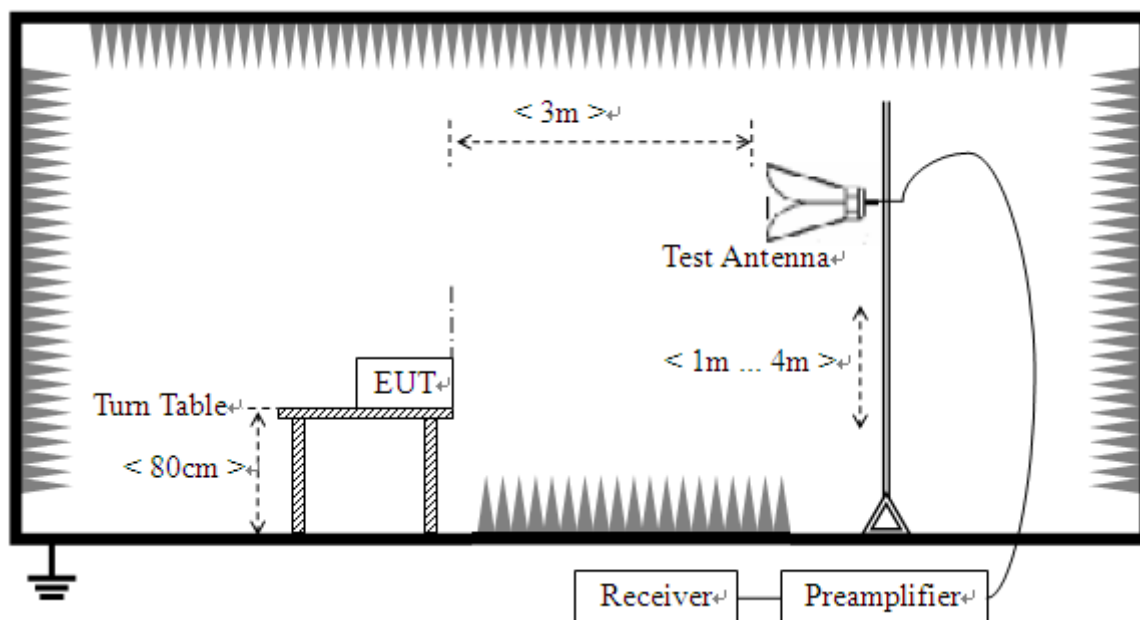

Radiated Emission (above 1 GHz)

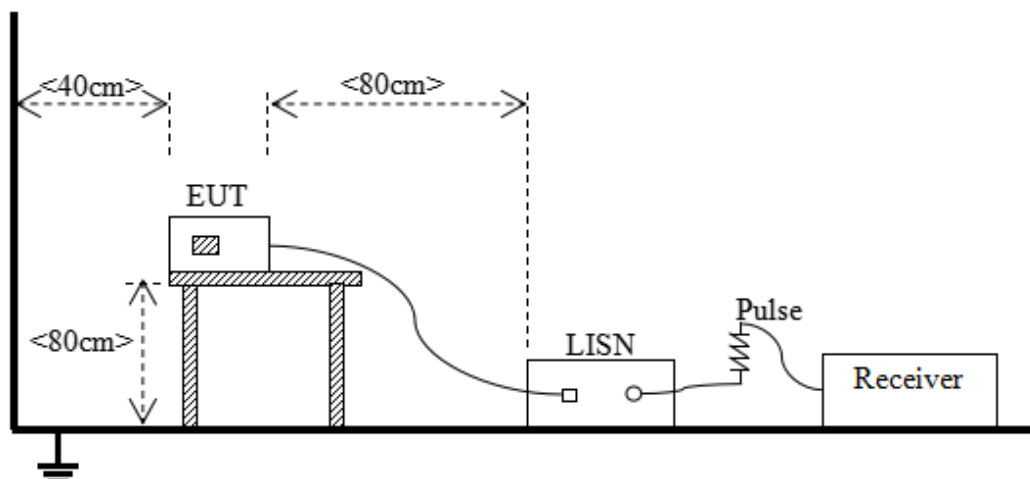Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 \cdot F_X$

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
	or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

IC:

Frequency range (MHz)	Class A (3 m)	Class B (3 m)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960 - 1000	60.0	54.0
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m)		Class B (3 m)	
	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)
1 - F_M	60	80	54	74

Note:

1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table.
2. The measurement bandwidth shall be 1 MHz or greater.
3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.
4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test.

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108$ MHz	1GHz
$108 \text{ MHz} \leq F_X \leq 500$ MHz	2GHz
$500 \text{ MHz} \leq F_X \leq 1$ GHz	5GHz
$F_X \geq 1$ GHz	$5 * F_X$ up to a maximum of 40 GHz

Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in ICES-003 Section 3(b) (ANSI C63.4) and ANSI C63.4;

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function =peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 2: The Radiated Emission is required to be investigated to the upper frequency of 5th harmonic of the highest internal frequency of EUT or 40 GHz, whichever is lower. The test results above 18GHz are only noise and are not recorded in the report.

Sample No.	S02	Temperature	22.6℃
Humidity	44%RH	Pressure	101kPa
Test Engineer	Chen Jingran	Test Date	2025.04.10


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz (FCC)

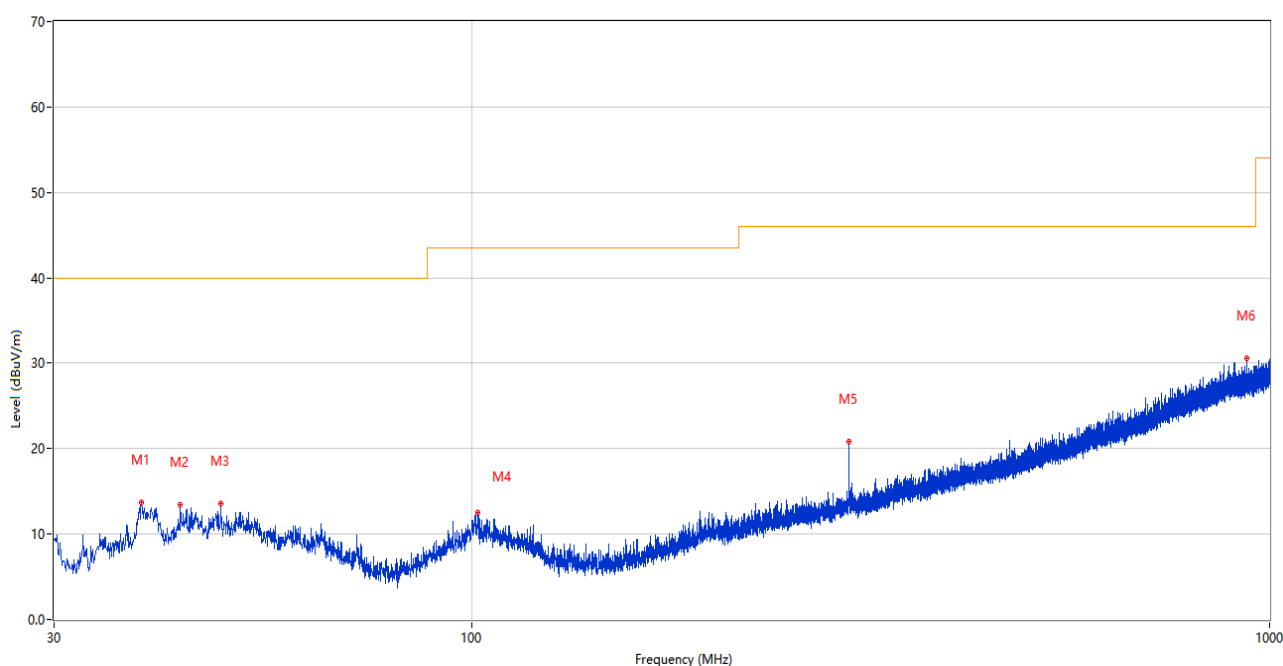


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.584	13.78	-25.78	40.0	26.22	Peak	104.00	100	Vertical	Pass
2	43.192	13.38	-25.35	40.0	26.62	Peak	218.00	200	Vertical	Pass
3	48.527	13.55	-25.45	40.0	26.45	Peak	348.00	100	Vertical	Pass
4	101.877	12.47	-26.88	43.5	31.03	Peak	188.00	100	Vertical	Pass
5	296.992	20.84	-23.54	46.0	25.16	Peak	114.00	200	Vertical	Pass
6	935.834	30.54	-9.42	46.0	15.46	Peak	26.00	200	Vertical	Pass

2) Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

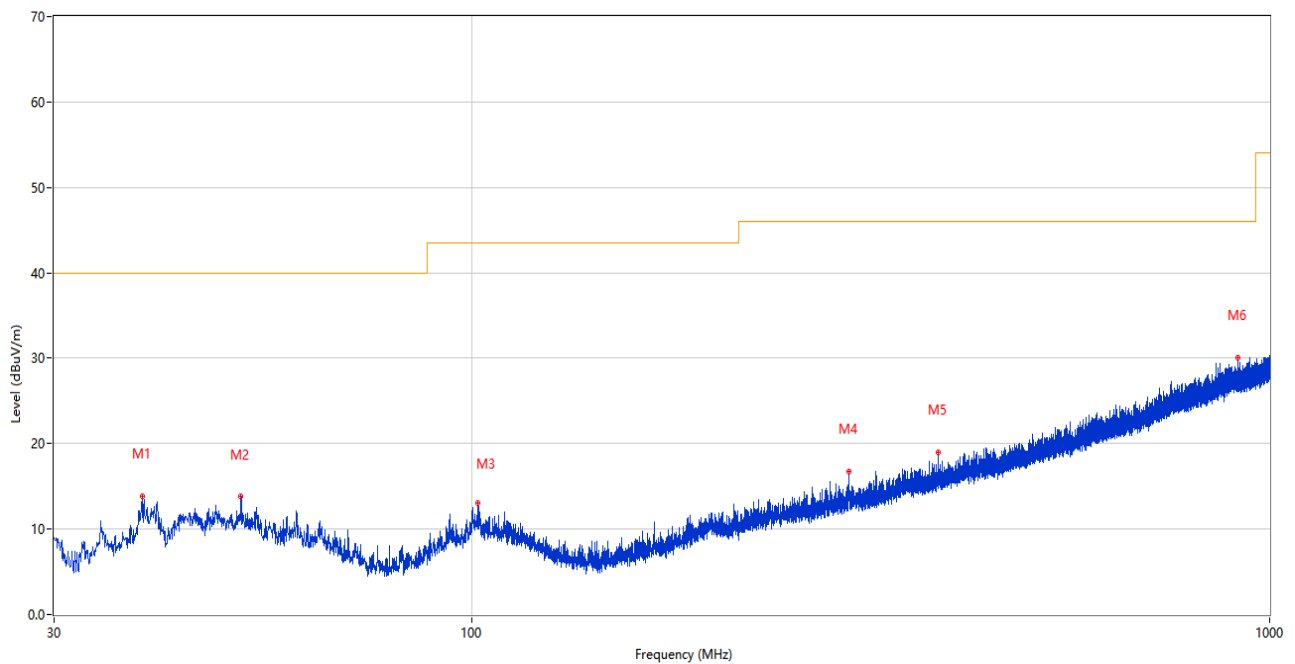


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.681	13.80	-26.08	40.0	26.20	Peak	360.00	100	Horizontal	Pass
2	51.437	13.78	-24.14	40.0	26.22	Peak	62.00	200	Horizontal	Pass
3	101.877	12.99	-26.88	43.5	30.51	Peak	196.00	200	Horizontal	Pass
4	297.041	16.74	-23.54	46.0	29.26	Peak	360.00	100	Horizontal	Pass
5	384.390	18.95	-21.47	46.0	27.05	Peak	202.00	200	Horizontal	Pass
6	912.409	30.11	-9.80	46.0	15.89	Peak	279.00	200	Horizontal	Pass

3) Test Antenna Vertical, 30 MHz – 1 GHz (IC)

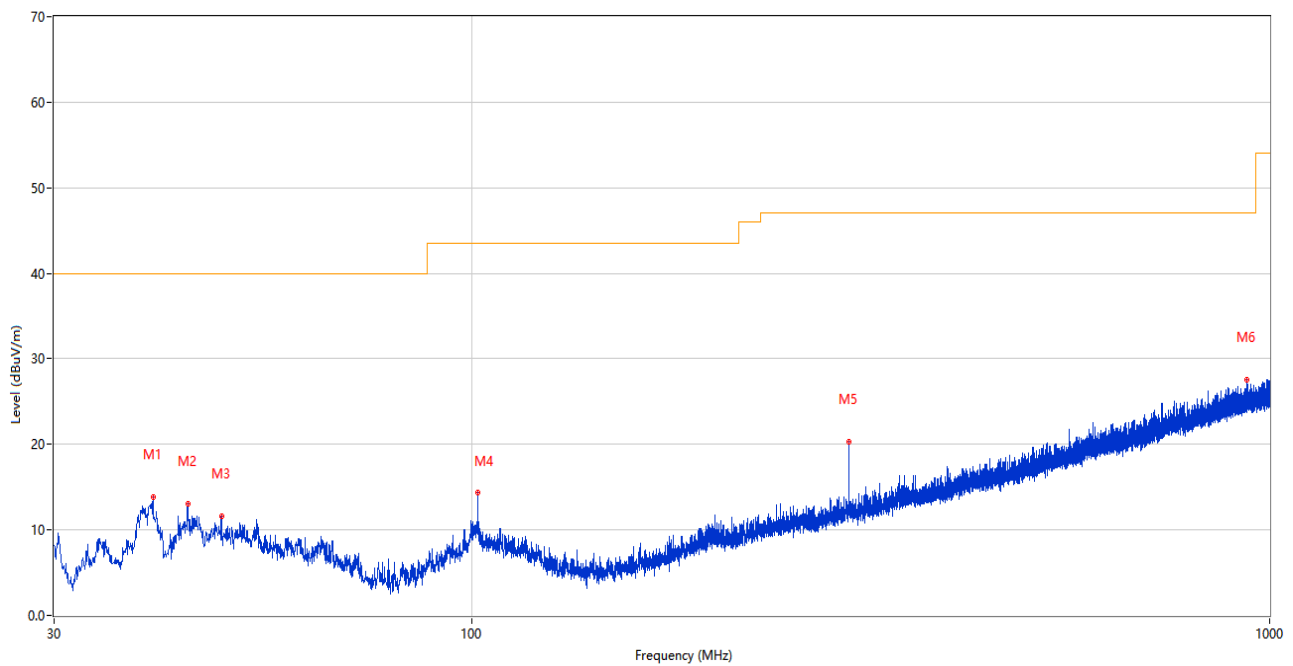

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.894	13.86	-27.32	40.0	26.14	Peak	6.00	200	Vertical	Pass
2	44.114	13.00	-25.79	40.0	27.00	Peak	34.00	100	Vertical	Pass
3	48.624	11.56	-25.55	40.0	28.44	Peak	218.00	100	Vertical	Pass
4	101.925	14.30	-26.86	43.5	29.20	Peak	0.00	200	Vertical	Pass
5	297.041	20.34	-23.54	47.0	26.66	Peak	134.00	100	Vertical	Pass
6	936.174	27.53	-9.40	47.0	19.47	Peak	289.00	100	Vertical	Pass


4) Test Antenna Horizontal, 30 MHz – 1 GHz (IC)

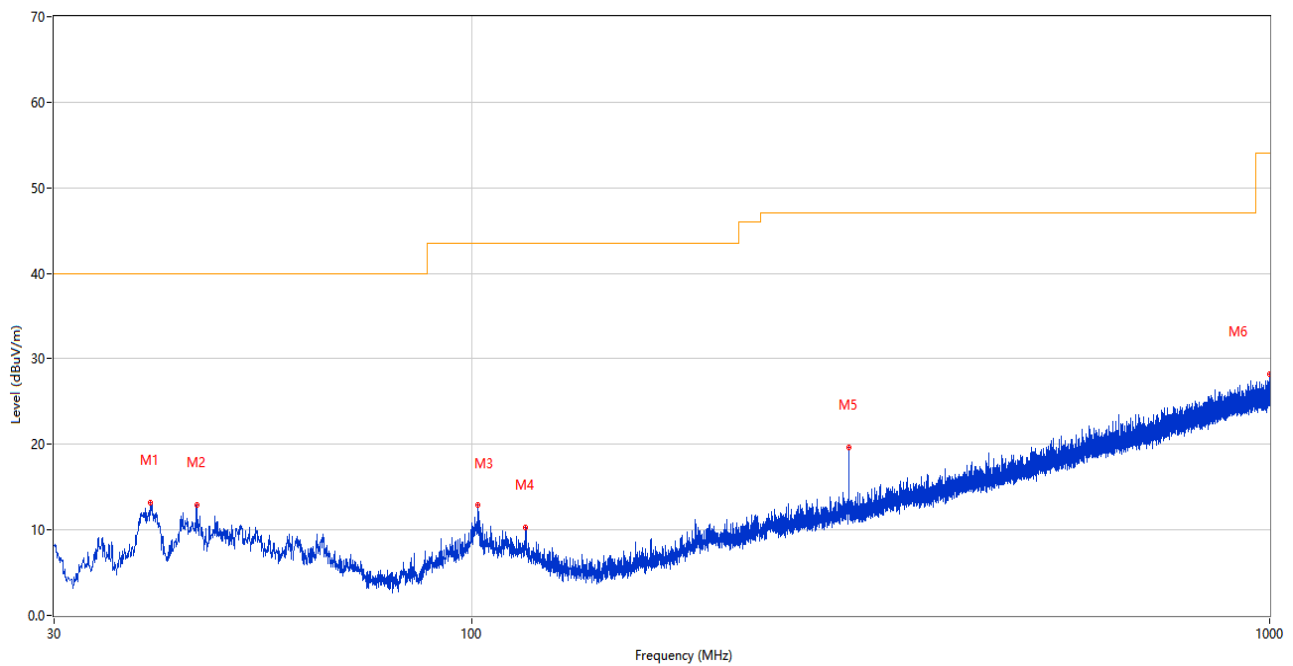

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.603	13.20	-27.89	40.0	26.80	Peak	258.00	100	Horizontal	Pass
2	45.278	12.96	-25.97	40.0	27.04	Peak	293.00	100	Horizontal	Pass
3	101.925	12.95	-26.86	43.5	30.55	Peak	72.00	200	Horizontal	Pass
4	117.009	10.25	-27.61	43.5	33.25	Peak	128.00	200	Horizontal	Pass
5	297.041	19.61	-23.54	47.0	27.39	Peak	90.00	200	Horizontal	Pass
6	998.836	28.22	-8.29	54.0	25.78	Peak	227.00	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2024.08.01	2025.07.31	☒
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2017119081	2024.11.28	2025.11.27	☒
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9168	9168-00867	2022.04.12	2025.04.11	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2024.07.21	2027.07.20	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

5) Test Antenna Vertical, 1 GHz – 2 GHz

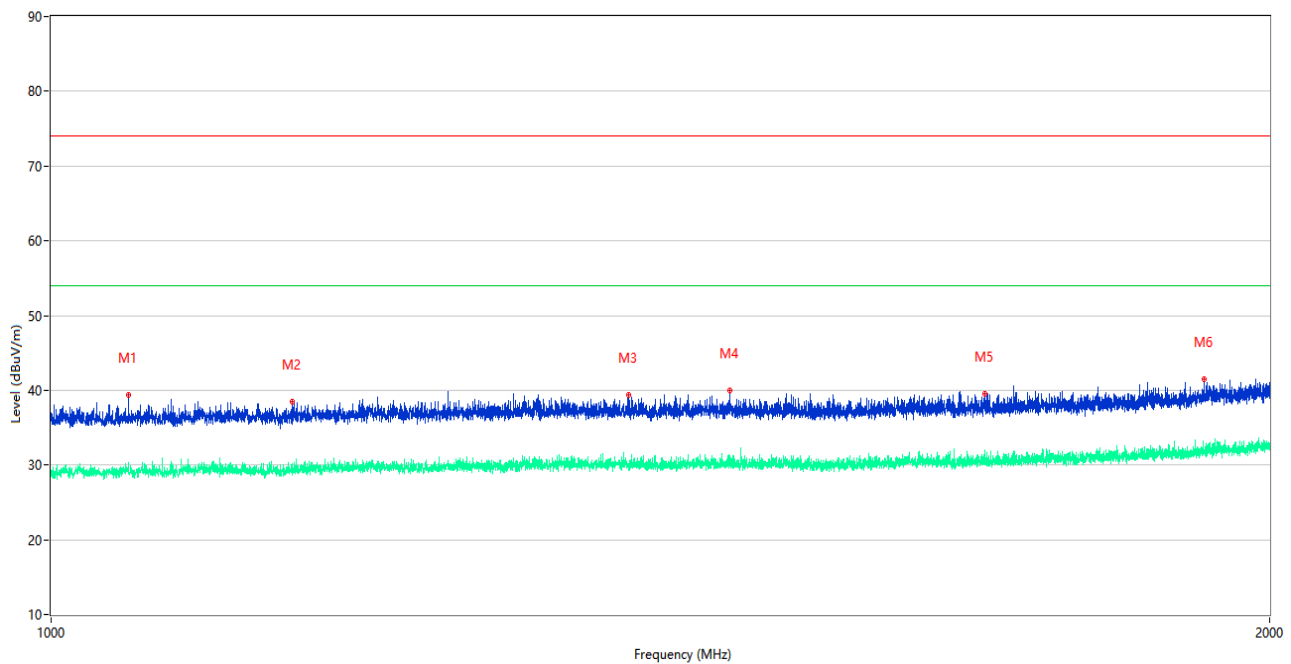

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1044.850	39.33	-15.70	74.0	34.67	Peak	349.00	100	Vertical	Pass
1**	1044.850	29.26	-15.70	54.0	24.74	AV	349.00	100	Vertical	Pass
2	1146.770	38.49	-15.76	74.0	35.51	Peak	334.00	100	Vertical	Pass
2**	1146.770	28.85	-15.76	54.0	25.15	AV	334.00	100	Vertical	Pass
3	1388.570	39.34	-15.41	74.0	34.66	Peak	48.00	100	Vertical	Pass
3**	1388.570	29.35	-15.41	54.0	24.65	AV	48.00	100	Vertical	Pass
4	1470.990	39.92	-15.62	74.0	34.08	Peak	182.00	100	Vertical	Pass
4**	1470.990	30.23	-15.62	54.0	23.77	AV	182.00	100	Vertical	Pass
5	1700.440	39.59	-15.43	74.0	34.41	Peak	325.00	100	Vertical	Pass
5**	1700.440	31.40	-15.43	54.0	22.60	AV	325.00	100	Vertical	Pass
6	1926.640	41.50	-13.55	74.0	32.50	Peak	238.00	100	Vertical	Pass
6**	1926.640	31.90	-13.55	54.0	22.10	AV	238.00	100	Vertical	Pass

6) Test Antenna Horizontal, 1 GHz – 2 GHz

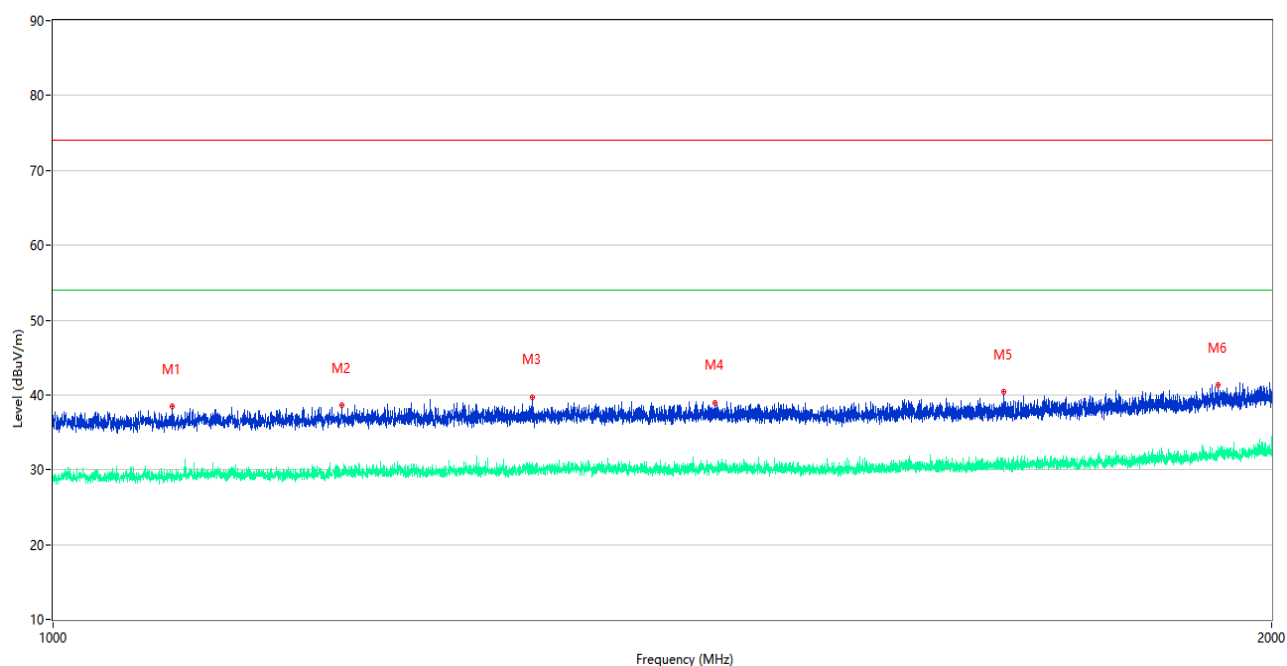

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1069.810	38.49	-16.02	74.0	35.51	Peak	276.00	100	Horizontal	Pass
1**	1069.810	29.45	-16.02	54.0	24.55	AV	276.00	100	Horizontal	Pass
2	1178.230	38.59	-15.86	74.0	35.41	Peak	360.00	100	Horizontal	Pass
2**	1178.230	29.60	-15.86	54.0	24.40	AV	360.00	100	Horizontal	Pass
3	1313.560	39.75	-15.45	74.0	34.25	Peak	358.00	100	Horizontal	Pass
3**	1313.560	29.51	-15.45	54.0	24.49	AV	358.00	100	Horizontal	Pass
4	1457.470	38.93	-15.60	74.0	35.07	Peak	101.00	100	Horizontal	Pass
4**	1457.470	30.10	-15.60	54.0	23.90	AV	101.00	100	Horizontal	Pass
5	1717.730	40.42	-15.41	74.0	33.58	Peak	281.00	100	Horizontal	Pass
5**	1717.730	30.39	-15.41	54.0	23.61	AV	281.00	100	Horizontal	Pass
6	1939.510	41.31	-13.56	74.0	32.69	Peak	158.00	100	Horizontal	Pass
6**	1939.510	31.82	-13.56	54.0	22.18	AV	158.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2024.08.01	2025.07.31	☒
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2024.11.28	2025.11.27	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2024.11.28	2025.11.27	☒
Test Antenna- Horn	SCHWARZBECK	BBHA 9120D	01917	2022.06.09	2025.06.08	☒
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2024.07.21	2027.07.20	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.2 Conducted Emission, AC Ports

Note: Not applicable.

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2540500-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2540500-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2540500-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--