


FCC PART 15 CLASS B
EMI MEASUREMENT AND TEST REPORT
FOR

MICROTEK LABS. INC.

3715 Doolittle Drive
Redondo, CA 90278

FCC ID: EF9ID-600

November 19, 1998

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Scanner - Subassembly, ITE
Test Engineer: Philip Wei / Thomas Huang	
Test Date: November 16, 1998	
Certified By:  John Y. Chan - Director, Compliance Engineering	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street, Suite 2 Sunnyvale, CA 94086 (408) 732-9162	

Note: This report may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 TEST EQUIPMENT LIST AND DETAILS	5
1.6 EQUIPMENT UNDER TEST (EUT)	5
1.7 EUT CONFIGURATION DETAILS	5
1.9 EXTERNAL I/O CABLING LIST AND DETAILS	6
2 - SYSTEM TEST CONFIGURATION	7
2.1 JUSTIFICATION	7
2.2 EUT EXERCISE SOFTWARE	7
2.3 SPECIAL ACCESSORIES	7
2.4 SCHEMATICS / BLOCK DIAGRAM	7
2.5 CONFIGURATION OF TEST SYSTEM	8
2.6 TEST SETUP BLOCK DIAGRAM	9
2.7 EQUIPMENT MODIFICATIONS	10
3 - CONDUCTED EMISSIONS TEST DATA	11
3.1 MEASUREMENT UNCERTAINTY	11
3.2 EUT SETUP	11
3.3 SPECTRUM ANALYZER SETUP	11
3.4 TEST PROCEDURE	11
3.5 SUMMARY OF TEST RESULTS	12
3.6 CONDUCTED EMISSIONS TEST DATA	12
3.7 PLOT OF CONDUCTED EMISSIONS TEST DATA	12
4 - RADIATED EMISSION DATA	13
4.1 MEASUREMENT UNCERTAINTY	13
4.2 EUT SETUP	13
4.3 SPECTRUM ANALYZER SETUP	13
4.4 TEST PROCEDURE	14
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.6 SUMMARY OF TEST RESULTS	14
4.7 RADIATED EMISSIONS TEST DATA	15
5 - FCC PRODUCT LABELING AND WARNING STATEMENT	16
5.1 FCC ID LABEL	16
5.2 PROPOSED LABEL LOCATION ON EUT	16
5.3 FCC WARNING STATEMENT	16
6 - CONDUCTED AND RADIATED SETUP PHOTOGRAPHS	17
6.1 CONDUCTED EMISSION PHOTOGRAPH – FRONT VIEW	17
6.2 CONDUCTED EMISSION PHOTOGRAPH – REAR VIEW	18
6.3 RADIATED EMISSION PHOTOGRAPH – FRONT VIEW	19
6.4 RADIATED EMISSION PHOTOGRAPH – REAR VIEW	20
7 - PHOTOGRAPHS	21
7.1 EUT: FRONT VIEW	21
7.2 EUT: REAR VIEW	22
7.3 EUT: SIDE VIEW	23
7.4 EUT: INSIDE BEZEL AND FRONT VIEW	24
7.5 EUT: WITHOUT COVER VIEW	25
7.6 EUT: INSIDE ENCLOSURE WITH MAIN PART OF THE EUT	26
7.7 EUT: SCAN PART BOTTOM VIEW	27
7.8 EUT: SCAN HEAD ASSEMBLE VIEW	28

7.9 EUT: MAIN BOARD SETUP VIEW.....	29
7.10 EUT: MAIN BOARD COMPONENT VIEW.....	30
7.11 EUT: MAIN BOARD CIRCUIT VIEW.....	31
7.12 EUT: POWER SUPPLY COMPONENT VIEW	32
7.13 EUT: POWER SUPPLY CIRCUIT VIEW	33
7.14 EUT: SCAN HEAD FRONT VIEW.....	34
7.15 EUT: SCAN HEAD BOTTOM VIEW.....	35
7.16 EUT: SCAN HEAD TOP VIEW.....	36
7.17 EUT: SCAN CIRCUIT BOARD COMPONENT VIEW	37
7.18 EUT: SCAN CIRCUIT BOARD CIRCUIT VIEW.....	38
7.19 EUT: SWITCH BOARD COMPONENT VIEW.....	39
7.20 EUT: SWITCH BOARD CIRCUIT VIEW.....	40
7.21 EUT: SCAN LAMP CIRCUIT BOARD COMPONENT VIEW	41
7.22 EUT: SCAN LAMP CIRCUIT BOARD CIRCUIT VIEW	42
APPENDIX A – EUT SCHEMATICS / BLOCK DIAGRAM	43
APPENDIX B – PLOT(S) OF CONDUCTED EMISSION TEST DATA	44
APPENDIX C – USER MANUAL.....	45

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *MICROTEK LAB. INC.*'s *ID-600* or the "EUT" as referred to in this report is a 36-bit, legal-size high-resolution scanner.

The EUT has a four-layered main circuit board, an one-layered Power Supply circuit boards, a four-layered Scanner circuit board, a two-layered Switch circuit board, and a two-layered Scanner Lamp circuit board.

The EUT measures approximately 19.0" L x 13.5" W x 5.0" H.

1.2 Objective

The following Class B report is prepared on behalf of *MICROTEK LAB. INC.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules and regulations and to ICES-003 of the Canadian Interference-Causing Equipment Regulations.

The objective of the manufacturer is to demonstrate compliance with FCC Part 15 Class B limits and to ICES-003 requirements for Information Technology Equipment.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 -1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.4 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Suite 2, Sunnyvale, California, USA.

Test sites at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-674 and R-657. The test sites has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices,

IEC/CISPR 22: 1993, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167.

1.5 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2610A02165	2/6/99
HP	Spectrum Analyzer	8593B	2919A00242	12/20/98
HP	Amplifier	8349B	2644A02662	12/20/98
HP	Quasi-Peak Adapter	85650A	917059	2/6/99
HP	Amplifier	8447E	1937A01046	2/6/99
A.H. System	Horn Antenna	SAS0200/571	261	2/27/99
Com-Power	Log Periodic Antenna	AL-100	16005	1/2/99
Com-Power	Biconical Antenna	AB-100	14012	1/2/99
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/98
Com-Power	LISN	LI-200	12208	12/20/98
Com-Power	LISN	LI-200	12005	12/20/98
BACL	Data Entry Software	DES1	0001	12/20/98

1.6 Equipment Under Test (EUT)

Manufacturer	Description	Model	Serial Number	FCC ID
MICROTEK LABS. NC.	Scanner	ID-600	None	EF9ID-600

1.7 EUT Configuration Details

Manufacturer	Description	Model	Serial Number	FCC ID
Mitsumi	Floppy Drive	D359M3	8E22DT5003	DOC
Iomaga	Zip Drive	Z100S1	HCCJ1923Y8	DOC

1.8 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Quantum3D	PC System	Desktop	None	DOC
Honeywell	Keyboard	102RXi	A0339	GJK101RX-5
Microsoft	Mouse	Mouse2.0A	00826824	C3JSMP1
NEC	Monitor	JC-14W1VMA	5122300408	C5F7NFCMC1423B
EVEREX	Modem	EV-945	None	E3E5UVEV-945
Citizen Watch Ltd.	Printer	LSP-10	1177256-7Y	DLK66LSP-10

1.9 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Shielded Cable	1.8	SCSI 1 Port / EUT	SCSI Card /Host
Shielded Cable	1.8	SCSI 2 Port/EUT	Terminator
Shielded Cable	1.5	SCSI 3 Port/EUT	Terminator
Shielded Printer Cable	2.0	Parallel Port/Host	Printer
Shielded Keyboard Cable	1.6	Keyboard /Host	Keyboard
Shielded Mouse Cable	1.8	Mouse/Host	Mouse
Shielded Video Cable	1.8	Video Card/Host	Monitor
Shielded Cable	1.8	Serial Port/Host	Modem

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a normally used by a typical user).

The motherboard provided the following I/O ports and connectors: two (2) serial ports, one (1) parallel port, one (1) ATX keyboard port, one (1) floppy interface connector, and two (2) IDE interface connectors.

The EUT was tested in the native mode to represent worst case results during the final qualification test. The parallel port (LPT1), ATX keyboard port, and both serial ports (COM1 and COM2) were also tested.

2.2 EUT Exercise Software

various system components in a manner similar to a typical use. The test software, Scantest.exe, contained on the hard drive is started the Windows 95 terminal program under the Windows 95 operating system. Once loaded, the program sequentially exercises each system component.

The sequence used is as follows:

- 1) Activated the scanner.
- 2) The scanner moved from one end to other end to scan documents.
- 3) The host received data from scanner and stored in hard drive.

This process is continuous throughout all tests.

At the same time, a test software, emctest.exe, contained on the hard drive is started the Windows 95 terminal program under the Windows 95 operating system. Once loaded, the program sequentially exercises each system component.

The sequence used is as follows:

1. Send H pattern to the monitor
2. The H program sends commands to the PC System.
3. The modem receives Hs.

This process is continuous throughout all tests.


2.3 Special Accessories

As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied by INMAC and their respective support equipment manufacturers. The monitor featured shielded metal connectors.


2.4 Schematics / Block Diagram

Appendix A contains a copy of the EUT's schematics diagram as reference.

2.5 Configuration of Test System

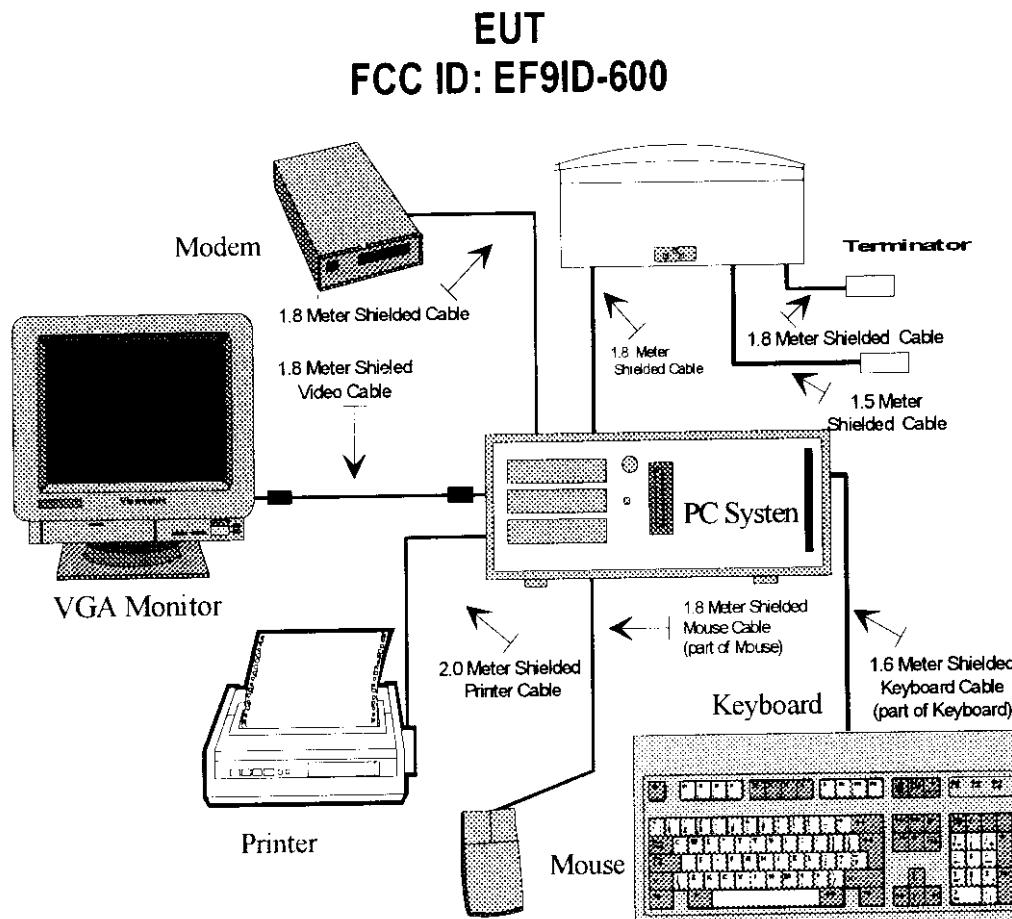

2.6 Test Setup Block Diagram

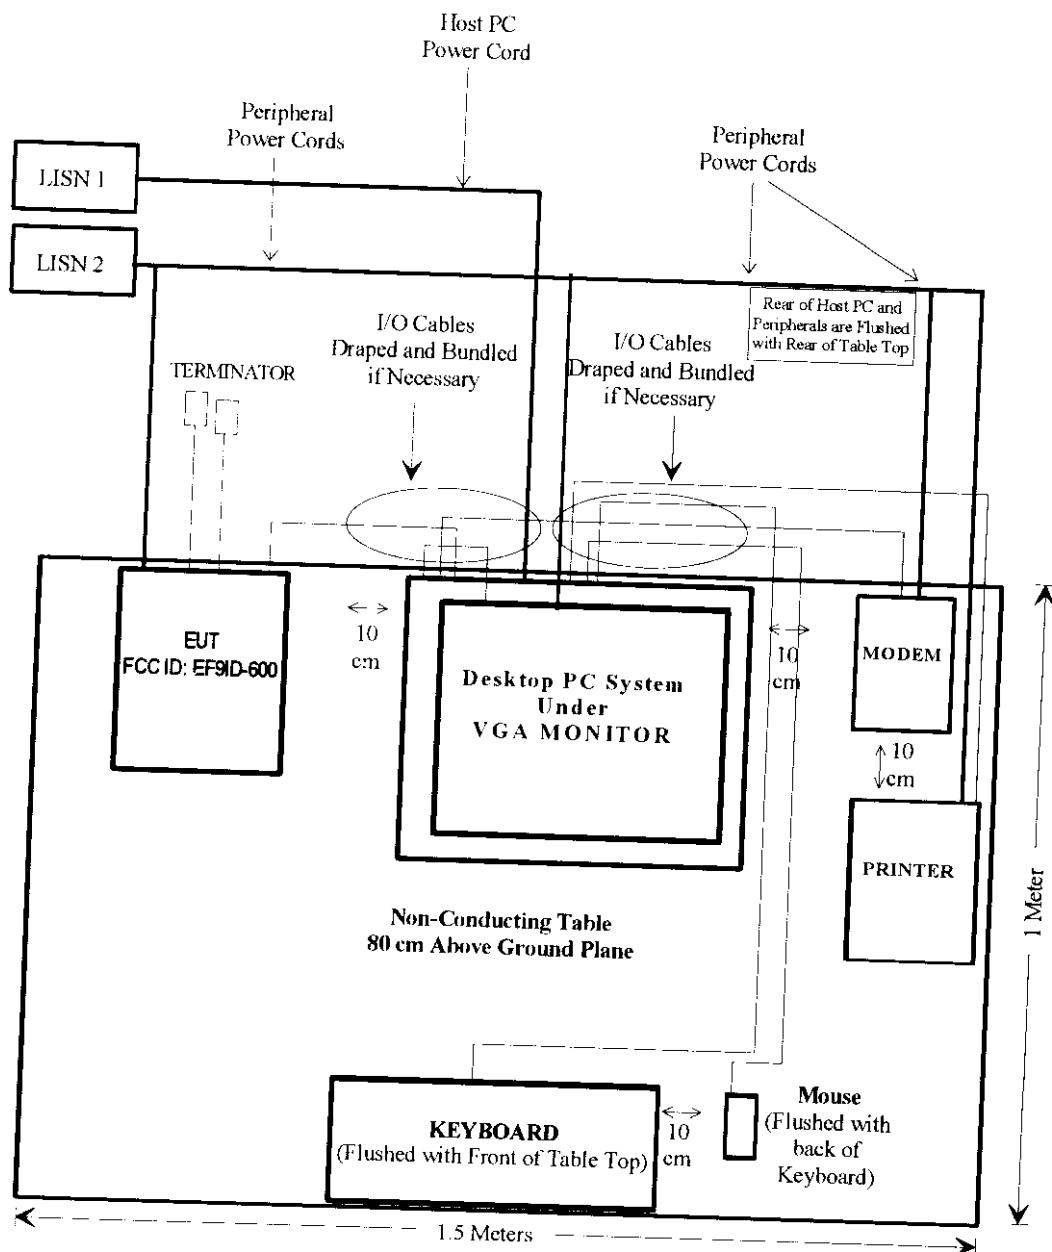

2.7 Equipment Modifications

No modification(s) were necessary for the EUT to comply with the applicable standards and limits.

3 - CONDUCTED EMISSIONS TEST DATA

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

3.2 EUT Setup

The measurement was performed at the Open Area Test Site, using the same setup per ANSI C63.4 - 1992 measurement procedure. The specification used was the FCC Class B limits.

The EUT was placed on the left side of the test table. The VGA monitor was placed on the top of the Desktop PC system next to the EUT, the printer and the modem were placed next to the PC system on the right side of the test table. The rear of the PC system and peripherals were placed flushed with the rear/sides of the tabletop.

The keyboard was placed in front of the Desktop PC system, flushed with the front of the tabletop. The mouse was placed next to the keyboard and flushed with the back of the keyboard.

The spacing between the peripherals was 10 cm.

3.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configuration during the conduction test:

Start Frequency.....	450 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	100 kHz
Video Bandwidth.....	100 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal

3.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN. All the support equipment power cords were connected to the auxiliary power outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (less than -4 dB μ V). Quasi-peak readings are distinguished with a "Qp".

The EUT was operating at normal (native) mode tested during the final qualification test to represent worst case results.

Additionally, the EUT was tested with the *EUT Inside Power Supply (110 V)*.

3.5 Summary of Test Results

According to the data in section 3.6, the EUT complied with the FCC Conducted margin for a Class B device and these test results is deemed as satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, with the *worst* margin reading of:

-3.2 dB μ V at 0.450 MHz in the Neutral mode, native operating mode with the *EUT Inside* power supply (110V).

3.6 Conducted Emissions Test Data

3.6.1 Test Data with EUT Inside Power Supply, 110V, 0.45 - 30 MHz.

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB μ V	QP/Ave/Peak	Line/Neutral	dB μ V	dB
0.450	44.8	QP	Neutral	48.0	-3.2
0.450	41.4	QP	Line	48.0	-6.6
6.510	28.3	QP	Line	48.0	-19.7
6.390	26.3	QP	Neutral	48.0	-21.7
21.840	26.0	QP	Line	48.0	-22.0
21.900	25.6	QP	Neutral	48.0	-22.4

3.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data with *EUT Inside Power Supply* is presented in Appendix B of this report as reference.

4 - RADIATED EMISSION DATA

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

4.2 EUT Setup

The radiated emission tests were performed in the open area *3 meter* test site, using the setup accordance with the ANSI C63.4 - 1992. The specification used was the FCC Part 15 Class B limits.

The EUT was placed on the left side of the test table. The VGA monitor was placed on the top of the Desktop PC system next to the EUT, the printer and the modem were placed next to the PC system on the right side of the test table. The rear of the PC system and peripherals were placed flushed with the rear/sides of the tabletop.

The keyboard was placed in front of the Desktop PC system, flushed with the front of the tabletop. The mouse was placed next to the keyboard and flushed with the back of the keyboard.

The spacing between the peripherals was 10 cm.

4.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33, since the internal operating clock speed is below 108 MHz, the system was tested to 1000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed	Auto
IF Bandwidth	100 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	1MHz

4.4 Test Procedure

For the radiated emissions test, the power cord of all support equipment were connected to the AC floor outlet since the power supply used inside the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (less than -4 dB μ V), and are distinguished with a "Qp" in the data table.

The EUT was operating at normal (native) mode tested during the final qualification test to represent worst case results.

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for FCC Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Class B Limit}$$

4.6 Summary of Test Results

According to the data in section 4.7, the EUT complied with the FCC Class B standards and these test results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations, and had the worst margin of:

-3.0 dB μ V at 290.01 MHz in the Vertical polarization.

-2.1 dB μ V at 290.01 MHz in the Vertical polarization – After maximized procedure.

4.7 Radiated Emissions Test Data

4.7.1 Test Data for Normal (Native) Mode, 30-1000 MHz –3 meters


INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC CLASS B	
Frequency	Ampl.		Angle	Height	Polar	Antenna	Cable	Ampl.	Corr. Ampl.	Limit
MHz	dB μ V/m	Degrees	Meter	H/V	dB μ V/m	dB	dB	dB μ V/m	dB μ V/m	dB
290.01	40.7	225	1.2	V	18.5	5.9	22.1	43.0 ✓	46.0	-3.0
290.01	36.6	315	1.4	H	19.5	5.9	22.1	39.9 ✓	46.0	-6.1
270.01	36.9	340	1.1	V	19.3	5.5	22.2	39.5 ✓	46.0	-6.5
512.27	38.2	270	1.1	V	16.3	7.7	23.3	38.9 ✓	46.0	-7.1
110.01	44.2	90	1.6	H	10.5	3.0	21.4	36.3 ✓	43.5	-7.2
480.30	38.2	225	1.1	V	16.2	7.4	23.7	38.1 ✓	46.0	-7.9
250.01	37.9	315	1.6	H	17.5	5.1	22.9	37.6 ✓	46.0	-8.4
390.01	37.6	350	1.6	H	15.5	6.4	22.8	36.7 ✓	46.0	-9.3
270.01	35.0	135	1.5	H	18.0	5.5	22.2	36.3 ✓	46.0	-9.7
358.09	37.3	135	1.6	H	14.7	6.3	23.0	35.3 ✓	46.0	-10.7
130.01	38.7	91	1.1	H	11.5	3.7	21.4	32.5 ✓	43.5	-11.0
370.30	35.8	270	1.1	V	14.5	6.5	23.2	33.6 ✓	46.0	-12.4
190.01	33.2	315	1.5	H	14.5	4.7	21.6	30.8 ✓	43.5	-12.7
390.03	33.6	225	1.1	V	15.0	6.4	22.8	32.2 ✓	46.0	-13.8
430.03	32.1	225	1.1	V	15.5	7.0	23.4	31.2 ✓	46.0	-14.8

4.7.2 Test Data for Normal (Native) mode, 30-1000 MHz –3 meters – After Maximized Procedure

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC CLASS B	
Frequency	Ampl.		Angle	Height	Polar	Antenna	Cable	Ampl.	Corr. Ampl.	Limit
MHz	dB μ V/m	Degrees	Meter	H/V	dB μ V/m	dB	dB	dB μ V/m	dB μ V/m	dB
290.01	41.6	225	1.2	V	18.5	5.9	22.1	43.9 ✓	46	-2.1
290.01	39.1	260	1.4	H	19.5	5.9	22.1	42.4 ✓	46	-3.6
512.27	40.4	270	1.1	V	16.3	7.7	23.3	41.1 ✓	46	-4.9
480.30	39.5	225	1.1	V	16.2	7.4	23.7	39.4 ✓	46	-6.6
270.01	37.1	340	1.1	V	19.3	5.5	22.2	39.7 ✓	46	-6.3
250.01	38.7	315	1.6	H	17.5	5.1	22.9	38.4 ✓	46	-7.6


5- FCC PRODUCT LABELING AND WARNING STATEMENT

5.1 FCC ID Label

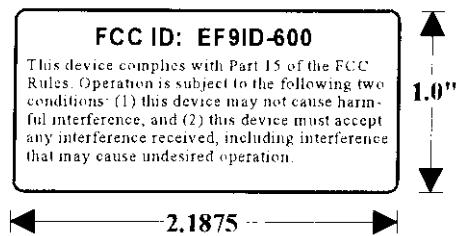

Specifications: Text is black in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT.

5.2 Proposed Label Location on EUT

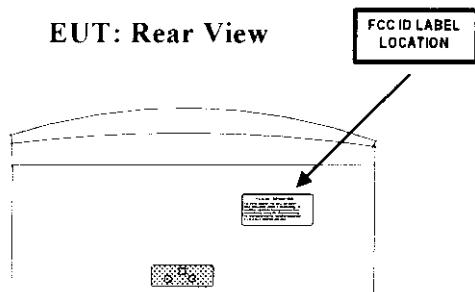

5.3 FCC Warning Statement

The FCC Warning Statement is provided with the product manual. A sample of the statement is presented in Appendix C of this report as reference.