



Test Report

For

Applicant : MICROTEK INTERNATIONAL INC.
Equipment Type : Image Scanner
Model : MRS-1200V6UP
FCC ID : EF9MRS-1200V6UP

Report No. : 999H025FI



Test Report Certification

QuieTek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859

E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : MICROTEK INTERNATIONAL INC.
Address : No.6, Industry East Rd.3, Science-Based Industrial Park,
Hsin-Chu , Taiwan, R.O.C.
Equipment Type : Image Scanner
Model : MRS-1200V6UP
FCC ID : EF9MRS-1200V6UP
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
Operation Voltage : 120VAC/60Hz
Classification : Class B
Test Result : Complied
Test Date : September 20, 1999
Report No. : 999H025FI



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Zoe Lee

Test Engineer: Arthur Liu

Approved: Gene Chang

Zoe Lee

Arthur Liu

Gene Chang



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1 EUT Description	4
1.2 Tested System Details	5
1.3 EUT Configuration.....	7
1.4 EUT Exercise Software.....	8
1.5 Test performed	8
1.6 Test Facility.....	9
2. CONDUCTED EMISSION	10
2.1 Test Equipment List	10
2.2 Test Setup	10
2.3 Limits	10
2.4 Test Procedure	11
2.5 Test Results	11
3. RADIATED EMISSION.....	12
3.1 Test Equipment.....	12
3.2 Test Setup	12
3.3 Limits	13
3.4 Test Procedure	13
3.5 Test Results	13
4. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	14
5. ATTACHMENT	15
ATTACHMENT 1: SUMMARY OF TEST RESULTS	
ATTACHMENT 2: EUT TEST PHOTOGRAPHS	
ATTACHMENT 3: EUT DETAIL PHOTOGRAPHS	

1. General Information

1.1 EUT Description

Applicant : MICROTEK INTERNATIONAL INC.

Address : No.6, Industry East Rd.3, Science-Based Industrial Park,
Hsin-Chu , Taiwan, R.O.C.

Equipment Type : Image Scanner

Model : MRS-1200V6UP

FCC ID : EF9MRS-1200V6UP

Operation Voltage : 120VAC/60Hz

EPP Cable : Shielded, 1.5m
(PARALLEL)

USB Cable : Non-Shielded, 1.5m

Power Adapter : Mode 1:KENTEX, KA18-150, Non-Shielded, 1.8m
Mode 2: LSE, LSE9801B15, Non-Shielded, 1.8m
Mode 3:Bestec, BPA-201S-15V, Non-Shielded, 1.5m

Bonded a ferrite core

Remark:

- 1.The EUT is a 600dpi (Horizontal) and 1200dpi (Vertical) Image Scanner ,and three kinds of adapter are used.
2. QuieTek had verified both construction and function in typical operation, then shown in this test report.



1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Host Personal Computer

Model Number : P2L97
Serial Number : 92M4Y00768
FCC ID : DoC
Manufacturer : ASUS
Power Cord : Non-Shielded, 1.8m

1.2.2 Monitor

Model Number : CM752ET-311
Serial Number : T8E004443
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.5m
Power Cord : Shielded, 1.8m

1.2.3 Keyboard

Model Number : 6311-TW2C
Serial Number : N/A
FCC ID : DoC
Manufacturer : ACER
Data Cable : Shielded, 1.8m

1.2.4 Modem

Model Number : 1414
Serial Number : 980033038
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, M/N: SCP41-91000A
Cable Output : Shielded, 1.5m

1.2.5 Modem

Model Number : 1414
Serial Number : 980033034
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, M/N: SCP41-91000A
Cable Output : Shielded, 1.5m

1.2.6 Printer

Model Number : C2642A
Serial Number : MY75J1D1D0
FCC ID : B94C2642X
Manufacturer : HP
Data Cable : Shielded, 1.2m
Power Adapter : NMB, M/N: C2175A
Cable for AC IN: Non-Shielded, 0.7m
Cable for AC Out: Non-Shielded, 1.5m

1.2.7 Mouse

Model Number : M-S34
Serial Number : LZB75078478
FCC ID : DZL211029
Manufacturer : HP
Data Cable : Shielded, 1.8m

1.2.8 Mouse

Model Number : MUS2U
Serial Number : N/A
FCC ID : DoC
Manufacturer : TREMON
Data Cable : Shielded, 1.8m

1.2.9 Video Camera


Model Number : Vcam 3X
Serial Number : N/A
FCC ID : DoC
Manufacturer : Mustek
Data Cable (USB) : Shielded, 1.5m




1.3 EUT Configuration

QTK99-F033
FCCID: EF9MR9-1200V64P

Test Mode: USB

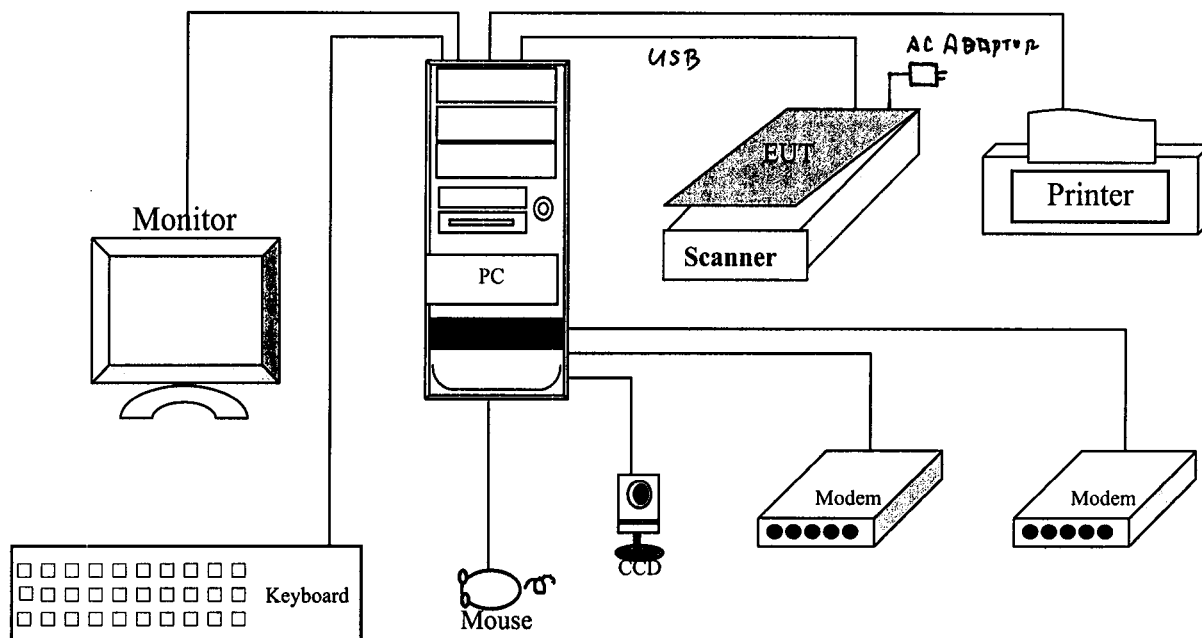

Test Mode: EPP (PARALLEL)

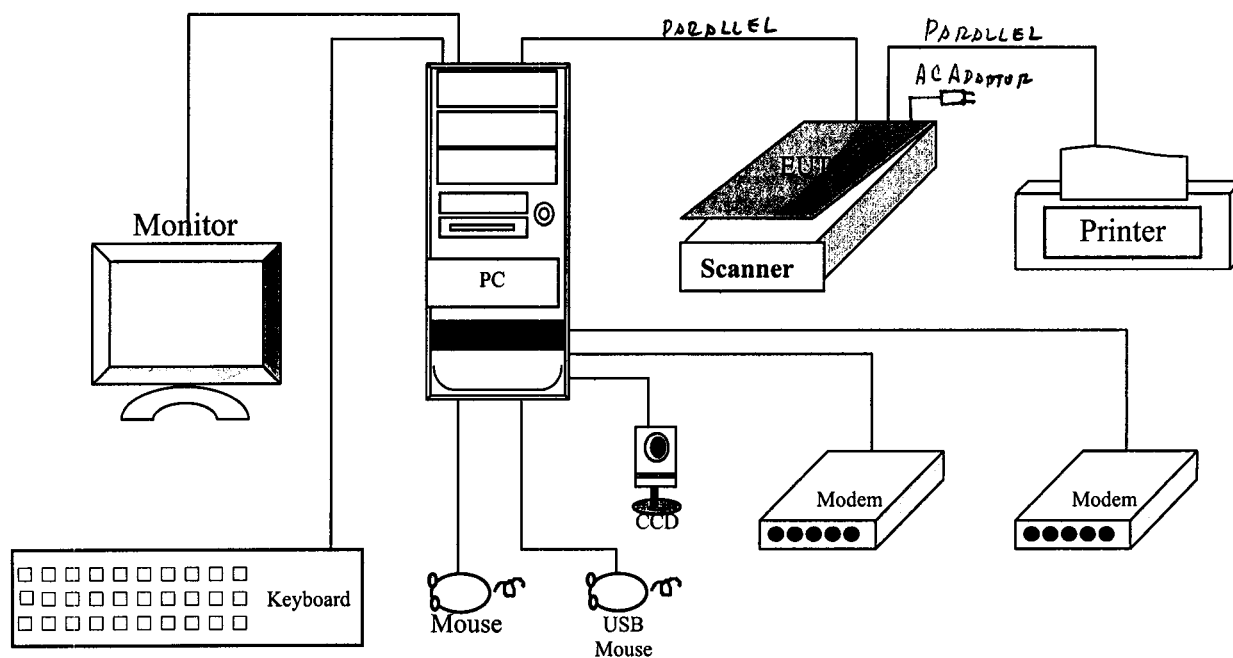

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Boot the PC from Hard Disk.
- 1.4.4 PC reads test software from the control BIOS of scanner and then sent to scanner.
- 1.4.5 The Scanner (EUT) will start to operate and scan the video figure into PC.
- 1.4.6 PC will display "video figure" on monitor.
- 1.4.7 Printer and modem will keep at standby mode during Scanner operation.
- 1.4.8 Repeat the above procedure 1.4.4 to 1.4.7

1.5 Test performed

Conducted emissions were investigated over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were investigated over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters .

1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on

Federal Communications Commission

FCC Engineering Laboratory

7435 Oakland Mills Road

Columbia, MD 21046

Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP

NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV

Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI

Registration No. for No.2 Shielded Room C-858

Registration No. for No.1 Open Area Test Site R-823

Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland

Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 1999	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 1999	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 1999	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

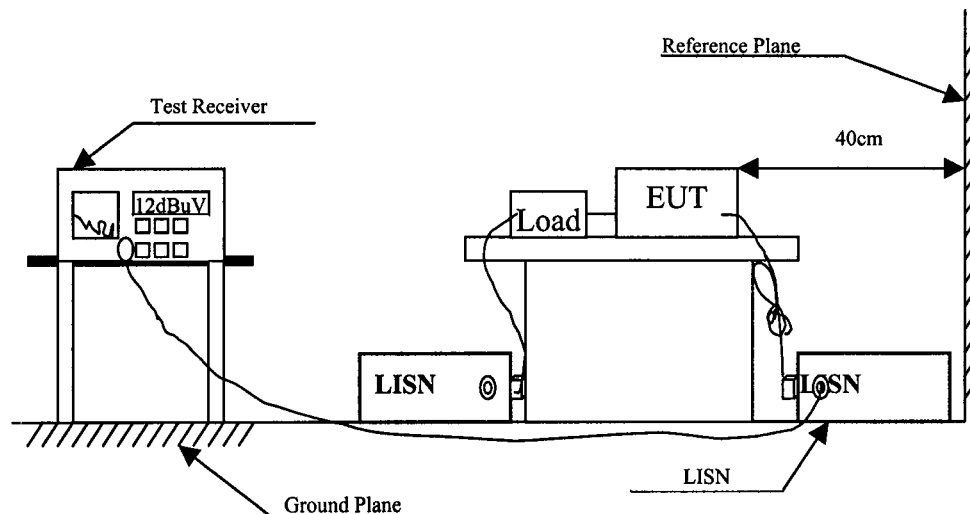

2.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency MHz	Class A		Class B	
	QP	AV	MHz	AV		uV	dBuV	uV	dBuV
0.15 - 0.50	79	66	66-56	56-46	0.45-1.705	1000	60.0	250	48.0
0.50-5.0	73	60	56	46	1.705-30	3000	69.5	250	48.0
5.0 - 30	73	60	60	50					

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in attachment 1 of test report.

The acceptance criterion was met and the EUT passed the test.



3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 1999
		Pre-Amplifier	HP	8447D/3307A01812	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 1999
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 1999
		Pre-Amplifier	HP	8447D/3307A01814	May, 1999
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X	Horn Antenna	EM	EM6917 / 103325	May, 1999

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
 - 2.. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

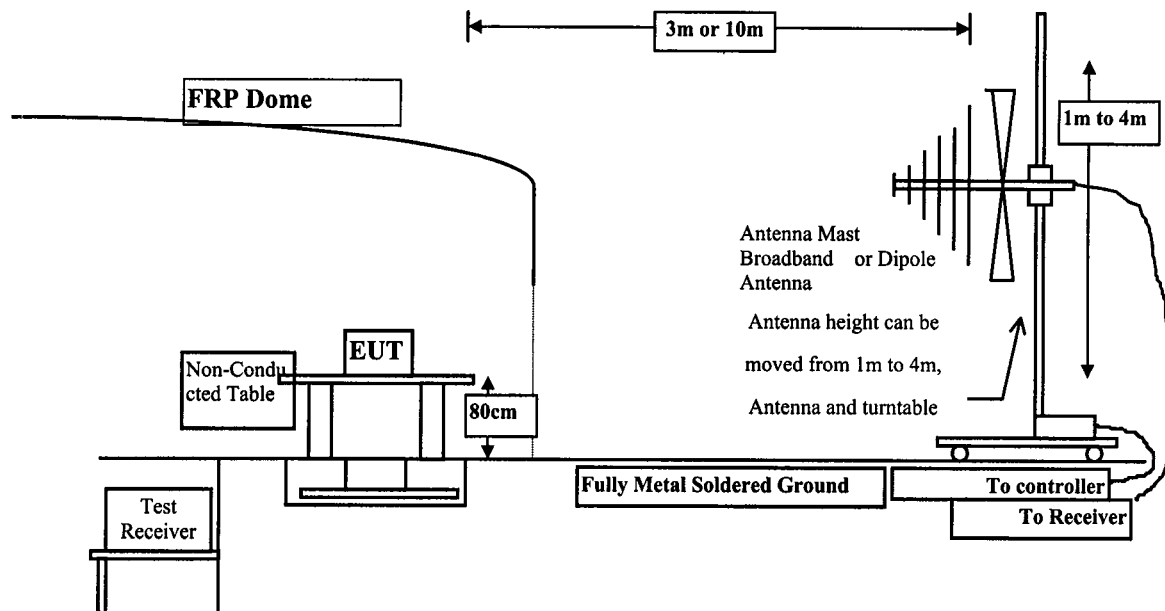

3.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV	dBuV	uV	DBuV
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV) = $20 \log$ RF Line Voltage (uV)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.



5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 13
Attachment 2: EUT Test Photographs	Number of Pages: 6
Attachment 3: EUT detailed photographs	Number of Pages: 3

Attachment 1 : Summary of Test Results

The test results in the emission was performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission is listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

Mode 1 : Link PC W/EPP Port+KENTEX (Adapter)

Mode 2 : Link PC W/USB Port+LSE (Adapter)

Mode 3 : Link PC W/USB Port+Bestec (Adapter)

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

➤ **Emission Test**

- Uncertainty in the Conducted Emission Test: $< \pm 2.0 \text{ dB}$
- Uncertainty in the field strength measured: $< \pm 4.0 \text{ dB}$

CONDUCTED EMISSION DATA

Date of Test : September 15, 1999 EUT : Image Scanner
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss dB	Factor dB	Line1 dBuV	Line1 dBuV	dBuV
0.177	0.01	0.10	44.13	44.24	64.61
0.252	0.03	0.10	41.50	41.63	61.71
0.341	0.04	0.10	46.81	46.95	59.17
0.377	0.05	0.10	46.11	46.26	58.35
*0.420	0.05	0.10	49.03	49.18	57.46
0.623	0.08	0.10	45.51	45.69	56.00

Average:

0.177	0.01	0.10	33.70	33.81	54.63
0.252	0.03	0.10	32.90	33.03	51.69
0.341	0.04	0.10	37.10	37.24	49.18
0.377	0.05	0.10	41.40	41.55	48.35
0.420	0.05	0.10	42.10	42.25	47.45
0.623	0.08	0.10	36.90	37.08	46.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test	: September 15, 1999	EUT	: Image Scanner
Test Mode	: Mode 1	Detect Mode	: Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss dB	Factor dB	Line2 dBuV	Line2 dBuV	dBuV
0.209	0.02	0.10	47.23	47.35	63.26
0.369	0.05	0.10	46.75	46.90	58.53
*0.412	0.05	0.10	48.58	48.73	57.61
0.552	0.07	0.10	41.88	42.05	56.00
1.220	0.11	0.11	40.32	40.54	56.00
1.533	0.13	0.12	45.24	45.49	56.00

Average:

0.209	0.02	0.10	45.20	45.32	53.24
0.369	0.05	0.10	36.10	36.25	48.52
0.412	0.05	0.10	42.20	42.35	47.61
0.552	0.07	0.10	27.60	27.77	46.00
1.220	0.11	0.11	27.80	28.02	46.00
1.533	0.13	0.12	29.70	29.95	46.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test	September 15, 1999	EUT	Image Scanner
Test Mode	Mode 2	Detect Mode	Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
0.205	0.02	0.10	41.54	41.66	63.42
0.243	0.03	0.10	42.04	42.17	61.98
0.459	0.06	0.10	34.78	34.94	56.72
0.494	0.06	0.10	43.89	44.05	56.10
*1.822	0.14	0.13	44.06	44.32	56.00
2.197	0.15	0.13	43.11	43.39	56.00

Average:

0.205	0.02	0.10	32.70	32.82	53.41
0.243	0.03	0.10	37.80	37.93	51.99
0.459	0.06	0.10	33.30	33.46	46.71
0.494	0.06	0.10	35.90	36.06	46.10
1.822	0.14	0.13	26.90	27.16	46.00
2.197	0.15	0.13	26.10	26.38	46.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test	: September 15, 1999	EUT	: Image Scanner
Test Mode	: Mode 2	Detect Mode	: Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line2	Line2	
	dB	dB	dBuV	dBuV	dBuV
0.197	0.01	0.10	43.06	43.17	63.74
0.244	0.03	0.10	43.64	43.77	61.97
*0.435	0.06	0.10	42.54	42.70	57.15
0.486	0.06	0.10	34.22	34.38	56.24
1.908	0.14	0.13	37.08	37.35	56.00
2.162	0.15	0.13	38.88	39.16	56.00

Average:

0.197	0.01	0.10	34.30	34.41	53.74
0.244	0.03	0.10	40.90	41.03	51.96
0.435	0.06	0.10	31.30	31.46	47.16
0.486	0.06	0.10	24.30	24.46	46.24
1.908	0.14	0.13	25.80	26.07	46.00
2.162	0.15	0.13	21.50	21.78	46.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test	: September 15, 1999	EUT	: Image Scanner
Test Mode	: Mode 3	Detect Mode	: Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
*0.154	0.00	0.10	52.49	52.59	65.79
0.232	0.02	0.10	42.20	42.32	62.38
0.252	0.03	0.10	40.41	40.54	61.71
0.283	0.03	0.10	39.32	39.45	60.73
0.404	0.05	0.10	32.54	32.69	57.77
1.173	0.11	0.11	31.16	31.38	56.00

Average:

0.154	0.00	0.10	35.90	36.00	55.78
0.232	0.02	0.10	25.70	25.82	52.38
0.252	0.03	0.10	25.10	25.23	51.69
0.283	0.03	0.10	21.50	21.63	50.73
0.404	0.05	0.10	17.50	17.65	47.77
1.173	0.11	0.11	22.10	22.32	46.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test	: September 15, 1999	EUT	: Image Scanner
Test Mode	: Mode 3	Detect Mode	: Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line2 dBuV	Measurement Level Line2 dBuV	Limits dBuV
*0.162	0.00	0.10	49.38	49.48	65.38
0.209	0.02	0.10	44.04	44.16	63.26
0.232	0.02	0.10	41.82	41.94	62.38
0.306	0.04	0.10	36.69	36.83	60.07
0.767	0.09	0.10	32.48	32.67	56.00
1.853	0.14	0.13	30.71	30.97	56.00

Average:

0.162	0.00	0.10	32.90	33.00	55.36
0.209	0.02	0.10	24.30	24.42	53.24
0.232	0.02	0.10	25.50	25.62	52.38
0.306	0.04	0.10	21.10	21.24	50.08
0.767	0.09	0.10	22.20	22.39	46.00
1.853	0.14	0.13	19.80	20.06	46.00

Remarks :

1. " * " means that this data is the worst emission level.



RADIATED EMISSION DATA

Date of Test	: September 15, 1999	EUT	:	Image Scanner
Test Mode	: Mode 1	Test Site	:	No.1 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Horizontal				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
55.710	1.40	5.73	0.00	4.35	11.48	18.52	30.00	394	105
56.570	1.40	5.73	0.00	4.45	11.58	18.42	30.00	394	105
79.360	1.63	8.10	0.00	3.46	13.18	16.82	30.00	394	140
85.070	1.68	8.88	0.00	5.27	15.84	14.16	30.00	394	122
158.430	2.39	10.44	0.00	4.35	17.18	12.82	30.00	394	77
197.590	2.77	9.15	0.00	4.52	16.44	13.56	30.00	394	63
*200.910	2.79	9.30	0.00	5.66	17.75	12.25	30.00	394	88
223.000	3.01	9.78	0.00	1.82	14.61	15.39	30.00	394	70

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : September 15, 1999 EUT : Image Scanner
 Test Mode : Mode 1 Test Site : No.1 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Vertical				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
36.930	1.22	14.31	0.00	3.52	19.05	10.95	30.00	100	73
48.290	1.33	8.03	0.00	8.75	18.11	11.89	30.00	100	53
*57.210	1.41	6.65	0.00	13.42	21.48	8.52	30.00	100	190
78.930	1.62	6.53	0.00	8.57	16.72	13.28	30.00	100	104
84.140	1.67	8.26	0.00	8.96	18.89	11.11	30.00	100	29
134.011	2.15	11.29	0.00	4.94	18.38	11.62	30.00	100	71
154.622	2.35	10.29	0.00	4.19	16.83	13.17	30.00	100	167
196.210	2.76	8.94	0.00	5.67	17.37	12.63	30.00	100	33

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : September 15, 1999 EUT : Image Scanner
 Test Mode : Mode 2 Test Site : No.1 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Horizontal				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
54.000	1.38	6.64	0.00	3.72	11.74	18.26	30.00	394	53
59.000	1.43	5.52	0.00	3.03	9.98	20.02	30.00	394	53
64.930	1.49	5.93	0.00	4.61	12.02	17.98	30.00	394	55
*67.210	1.50	6.16	0.00	7.47	15.14	14.86	30.00	394	97
69.860	1.53	6.52	0.00	5.05	13.10	16.90	30.00	394	76
159.210	2.39	10.44	0.00	0.45	13.28	16.72	30.00	394	116
181.550	2.61	9.37	0.00	2.81	14.78	15.22	30.00	394	4

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

RADIATED EMISSION DATA

Date of Test : September 15, 1999 EUT : Image Scanner
 Test Mode : Mode 2 Test Site : No.1 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Vertical				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
40.780	1.25	12.98	0.00	6.47	20.70	9.30	30.00	99	31
44.890	1.29	9.96	0.00	4.58	15.83	14.17	30.00	99	17
48.290	1.33	8.03	0.00	6.84	16.20	13.80	30.00	99	2
64.140	1.48	6.58	0.00	7.55	15.61	14.39	30.00	99	74
*66.747	1.50	5.46	0.00	16.08	23.04	6.96	30.00	99	203
77.850	1.61	6.93	0.00	4.14	12.68	17.32	30.00	99	23
154.016	2.35	10.33	0.00	4.87	17.55	12.45	30.00	99	184

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

RADIATED EMISSION DATA

Date of Test : September 15, 1999 EUT : Image Scanner
 Test Mode : Mode 3 Test Site : No.1 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Horizontal				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
57.860	1.42	5.52	0.00	2.40	9.34	20.66	30.00	394	58
64.930	1.49	5.93	0.00	3.60	11.01	18.99	30.00	394	112
*66.884	1.50	6.16	0.00	8.75	16.42	13.58	30.00	394	77
70.140	1.53	6.52	0.00	4.90	12.95	17.05	30.00	394	76
72.860	1.56	6.94	0.00	3.72	12.23	17.77	30.00	394	83
124.070	2.06	11.84	0.00	1.43	15.33	14.67	30.00	394	77
159.850	2.40	10.32	0.00	-0.13	12.59	17.41	30.00	394	33

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test	: September 15, 1999	EUT	:	Image Scanner
Test Mode	: Mode 3	Test Site	:	No.1 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Vertical				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
41.850	1.26	11.88	0.00	3.48	16.62	13.38	30.00	99	127
47.360	1.32	8.93	0.00	6.48	16.73	13.27	30.00	99	31
51.710	1.36	7.29	0.00	6.33	14.98	15.02	30.00	99	123
*66.882	1.50	5.46	0.00	13.45	20.41	9.59	30.00	99	93
70.740	1.54	5.48	0.00	5.87	12.90	17.10	30.00	99	81
126.930	2.08	11.87	0.00	2.35	16.30	13.70	30.00	99	46

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

