

EXHIBIT 4

Test Report

Test Report

TTEMC-F98026

EUT AND SIMULATORS CONFIGURATION

Description of EUT

Applicant : Microtek International Inc.
No. 6, Industry East Road 3, Science-Based
Industrial Park, Hsinchu, Taiwan, R.O.C.

Manufacturer : Microtek International Inc.
No. 6, Industry East Road 3, Science-Based
Industrial Park, Hsinchu, Taiwan, R.O.C.

Product Name : Image Scanner

Model Number. : MRS-1200VX6S

FCC ID : EF9MRS-1200VX6S

Switching Power Supply : Kentex
P/N 01-311333201

Light Plate (Optional) : Microtek, M/N MLP-VX
Cable: Shielded, Undetachable, 0.2m
Bonded a ferrite core

Interface Data Cable : Shielded, Detachable, 1.5m
Bonded a ferrite core

Power Cord : Nonshielded, Detachable, 1.8m

TTEMC Report No. : TTEMC-F98026

Date of Test : Feb. 18/ 21, 1998

Description of Simulators

@ Personal Computer

Model Number	:	D3498A
Serial Number	:	SG54300543
FCC ID	:	HCJVECTRAVE4
VGA Card	:	Within Mother Board
SCSI Driver Card	:	Adaptec, M/N AVA-1505AE FCC ID. By FCC DoC
Manufacturer	:	Hewlett Packard

@ Monitor

Model Number	:	PM36A
Serial Number	:	W70204674A
FCC ID	:	LLW9ZB1564
Manufacturer	:	Funai Electric Company of Taiwan

@ Keyboard

Model Number	:	E0366QLTWQ
Serial Number	:	N/A
FCC ID	:	CIGE03614
Manufacturer	:	Hewlett Packard

@ Printer

Model Number	:	2225C+
Serial Number	:	3007S68643
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard

@ Modem #1

Model Number	:	1414
Serial Number	:	950098201
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex

@ Modem #2

Model Number	:	1414
Serial Number	:	950098203
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex

@ Mouse

Model Number : M-S34
Serial Number : LCA53202204
FCC ID : DZL210582
Manufacturer : Hewlett Packard

@ Scan Maker

Model Number : PTS-1800
Serial Number : N/A
FCC ID : EF9PTS-1800
Manufacturer : Microtek International Inc.

APPLICATION FOR CERTIFICATION
On Behalf of
Microtek International Inc.
Image Scanner

Model : MRS-1200VX6S

FCC ID : EF9MRS-1200VX6S

Prepared for : Microtek International Inc.
No. 6 Industry East Road 3,
Science-Based Industrial Park,
Hsincu, Taiwan, R.O.C.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel: 2609-9301, 2609-2133

File Number : ATM-G98047
Report Number : TTEMC-F98026
Date of Test : Feb. 18/ 21, 1998
Date of Report : Mar. 04, 1998

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	1.-1
1.1. Description of Device (EUT).....	1.-1
1.2. Details of Support Equipments	1.-1
1.3. Description of Test Facility	1.-3
2. POWERLINE CONDUCTED TEST.....	2.-1
2.1. Test Equipment	2.-1
2.2. Block Diagram of Test Setup.....	2.-1
2.3. Conducted Powerline Emission Limit (CLASS B).....	2.-1
2.4. EUT Configuration on Measurement.....	2.-2
2.5. Operating Condition of EUT.....	2.-2
2.6. Test Procedure.....	2.-3
2.7. Line Conducted RF Voltage Measurement Results.....	2.-4
3. RADIATED EMISSION TEST	3.-1
3.1. Test Equipment	3.-1
3.2. Block Diagram of Test Setup.....	3.-1
3.3. Radiation Limit (CLASS B)	3.-2
3.4. EUT Configuration on Measurement.....	3.-2
3.5. Operating Condition of EUT.....	3.-2
3.6. Test Procedure.....	3.-2
3.7. Radiated Emission Noise Measurement Results.....	3.-3
4. DEVIATION TO TEST SPECIFICATIONS	4.-1
5. PHOTOGRAPHS.....	5.-1
5.1. Photos of Powerline Conducted Measurement	5.-1
5.2. Photos of Radiated Measurement on Open Field Test Site	5.-2

Tok98-F025

TEST REPORT CERTIFICATION

Applicant : Microtek International Inc.
Manufacturer : Microtek International Inc.
FCC ID : EF9MRS-1200VX6S
EUT Description : Image Scanner
(A) MODEL NO. : MRS-1200VX6S
(B) SERIAL NO. : N/A
(C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used :

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1996
AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results are contained in this test report and TAIWAN TOKIN EMC ENG. CORP. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits. TAIWAN TOKIN EMC ENG. CORP. recommends that this data was submitted for FCC certification purposes if a 6dB margin below FCC limits is obtained. This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Feb. 18 / 21, 1998

Prepared by : Julie Hsu
(JULIE HSU)

Test Engineer : Allen Wang
(ALLEN WANG)

Approve & Authorized Signer : Jackie Deng
(JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Image Scanner
Model Number	:	MRS-1200VX6S
FCC ID	:	EF9MRS-1200VX6S
Applicant	:	Microtek International Inc. No. 6 Industry East Road 3, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Manufacturer	:	Microtek International Inc. No. 6 Industry East Road 3, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.
Switching Power Supply	:	Kentex, P/N 01-311333201
Light Plate	:	Microtek, M/N MLP-VX Cable : Shielded, Undetachable, 0.2m Bonded a ferrite core
Data Cable	:	Shielded, Detachable, 1.5m Bonded a ferrite core
Power Cord	:	Nonshielded, Detachable, 1.8m
Date of Test	:	Feb. 18 / 21, 1998

1.2. Details of Support Equipments

1.2.1. PERSONAL COMPUTER

Model Number : D3498A
Serial Number : SG54300543
FCC ID : HCJVECTRAVE4
Manufacturer : Hewlett Packard
VGA Card : Within Mother Board
SCSI Card : Adaptec, M/N AVA-1505AE
FCC ID By FCC DoC
Power Cord : Nonshielded, Detachable, 1.8m

1.2.2. MONITOR

Model Number	:	PM36A
Serial Number	:	W70204674A
FCC ID	:	LLW9ZB1564
Manufacturer	:	Funai Electric Company of Taiwan
Data Cable	:	Shielded, Undetachable, 1.2m
Power Cord	:	Nonshielded, Detachable, 1.5m

1.2.3. KEYBOARD

Model Number	:	E03633QLTWQ
Serial Number	:	N/A
FCC ID	:	CIGE03614
Manufacturer	:	Hewlett Packard
Data Cable	:	Shielded, Undetachable, 1.8m

1.2.4. PRINTER

Model Number	:	2225C+
Serial Number	:	3007S68643
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Hewlett Packard, M/N 82241A
Power Cord	:	Nonshielded, Undetachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.5. MODEM #1

Model Number	:	1414
Serial Number	:	950098201
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Nonshielded, Undetachable, 1.8m

1.2.6. MODEM #2

Model Number	:	1414
Serial Number	:	950098203
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Nonshielded, Undetachable, 1.8m

1.2.7. MOUSE

Model Number	:	M-S34
Serial Number	:	LCA53202204
FCC ID	:	DZL210582
Manufacturer	:	Hewlett Packard
Data Cable	:	Shielded, Undetachable, 1.8m

1.2.8. SCAN MAKER

Model Number	:	PTS-1800
Serial Number	:	N/A
FCC ID	:	EF9PTS-1800
Manufacturer	:	Microtek International Inc.
SCSI Interface Cable	:	Shielded, Detachable, 2m Bonded a ferrite core
Power Cord	:	Nonshielded, Detachable, 1.8m

1.3. Description of Test Facility

Site Description (No. 2 Open Site)	:	Jul. 15, 1996 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP Lab Code	:	200077-0


2. POWERLINE CONDUCTED TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESH3	893044/015	Aug.01, 97'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KMW-407	8-855-9	May.01, 97'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KMW-407	8-881-13	May.01, 97'	1 Year

2.2. Block Diagram of Test Setup

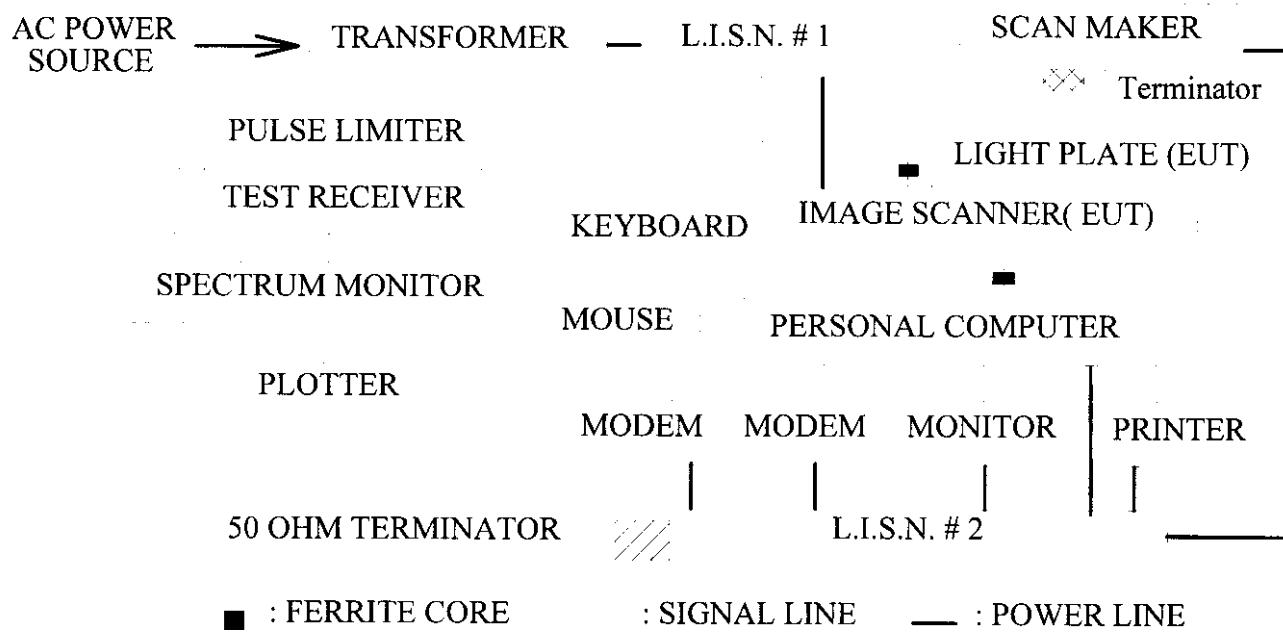

2.3. Conducted Powerline Emission Limit (CLASS B)

Frequency	Maximum RF Line Voltage	
	uV	dBuV
0.45MHz ~ 30MHz	250	48

REMARKS : RF LINE VOLTAGE (dBuV) = 20 log RF LINE VOLTAGE (uV)

2.4. EUT Configuration on Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

2.4.1. Image Scanner (EUT)

Model Number	:	MRS-1200VX6S
Serial Number	:	N/A
FCC ID	:	EF9MRS-1200VX6S
Manufacturer	:	Microtek International Inc.
Switching Power Supply	:	Kentex, M/N KTX-3332-2
Light Plate	:	Microtek, P/N 01-311333201 Cable : Shielded, Undetachable, 0.2m Bonded a ferrite core
Data Cable	:	Shielded, Detachable, 1.5m Bonded a ferrite core
Power Cord	:	Nonshielded, Detachable, 1.8m
2.4.2. Support Simulators	:	As in section 1.2.

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulators as shown on 2.2.
- 2.5.2. Turned on the power of all equipments.
- 2.5.3. Setup the personal computer to drive the EUT through the Microtek's scanner software driver "Scan Test" by windows.
- 2.5.4. Data was communicated between host personal computer and Image Scanner (EUT) through SCSI drive card.
- 2.5.5. The Light Plate (EUT) was lighting.
- 2.5.6. Personal Computer displayed the test software image by windows to monitor.
- 2.5.7. The other peripheral devices were driven and operated in turn during all testing.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N. #1) and the other peripheral devices power cord were connected to the power mains through a line impedance stabilization network (L.I.S.N. #2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions simulators of the interface cables should be manipulated according to FCC ANSI C63.4-1992 during conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESH3) was set at 10KHz.

The frequency range from 450KHz to 30MHz was checked.

All the test results are listed in section 2.7.

2.7. Line Conducted RF Voltage Measurement Results

The frequency range from 450KHz to 30 MHz was investigated.


All emissions not reported below are too low against the prescribed limits.

Date of Test : Feb. 21, 1998 Temperature : 19 °C

EUT : Image Scanner Humidity : 71 %

Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.4704	0.2	40.1	*	40.3	*	48.0	7.7	*
0.4716	0.2	*	40.0	*	40.2	48.0	*	7.8
1.3701	0.2	32.8	*	33.0	*	48.0	15.0	*
1.4122	0.2	*	33.9	*	34.1	48.0	*	13.9
2.6145	0.2	*	34.4	*	34.6	48.0	*	13.4
7.3151	0.2	35.6	*	35.8	*	48.0	12.2	*
11.5505	0.6	37.6	*	38.2	*	48.0	9.8	*
11.7416	0.6	*	37.4	*	38.0	48.0	*	10.0
14.7594	0.6	35.9	*	36.5	*	48.0	11.5	*
14.8231	0.6	*	40.6	*	41.2	48.0	*	6.8
21.6624	1.1	31.5	*	32.6	*	48.0	15.4	*
22.7962	1.1	*	34.0	*	35.1	48.0	*	12.9


Remark : 1. All readings are Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 14.8231MHz with corrected signal level of 41.2dBuV (limit is 48dBuV) when the VB side of the EUT was connected to L.I.S.N.

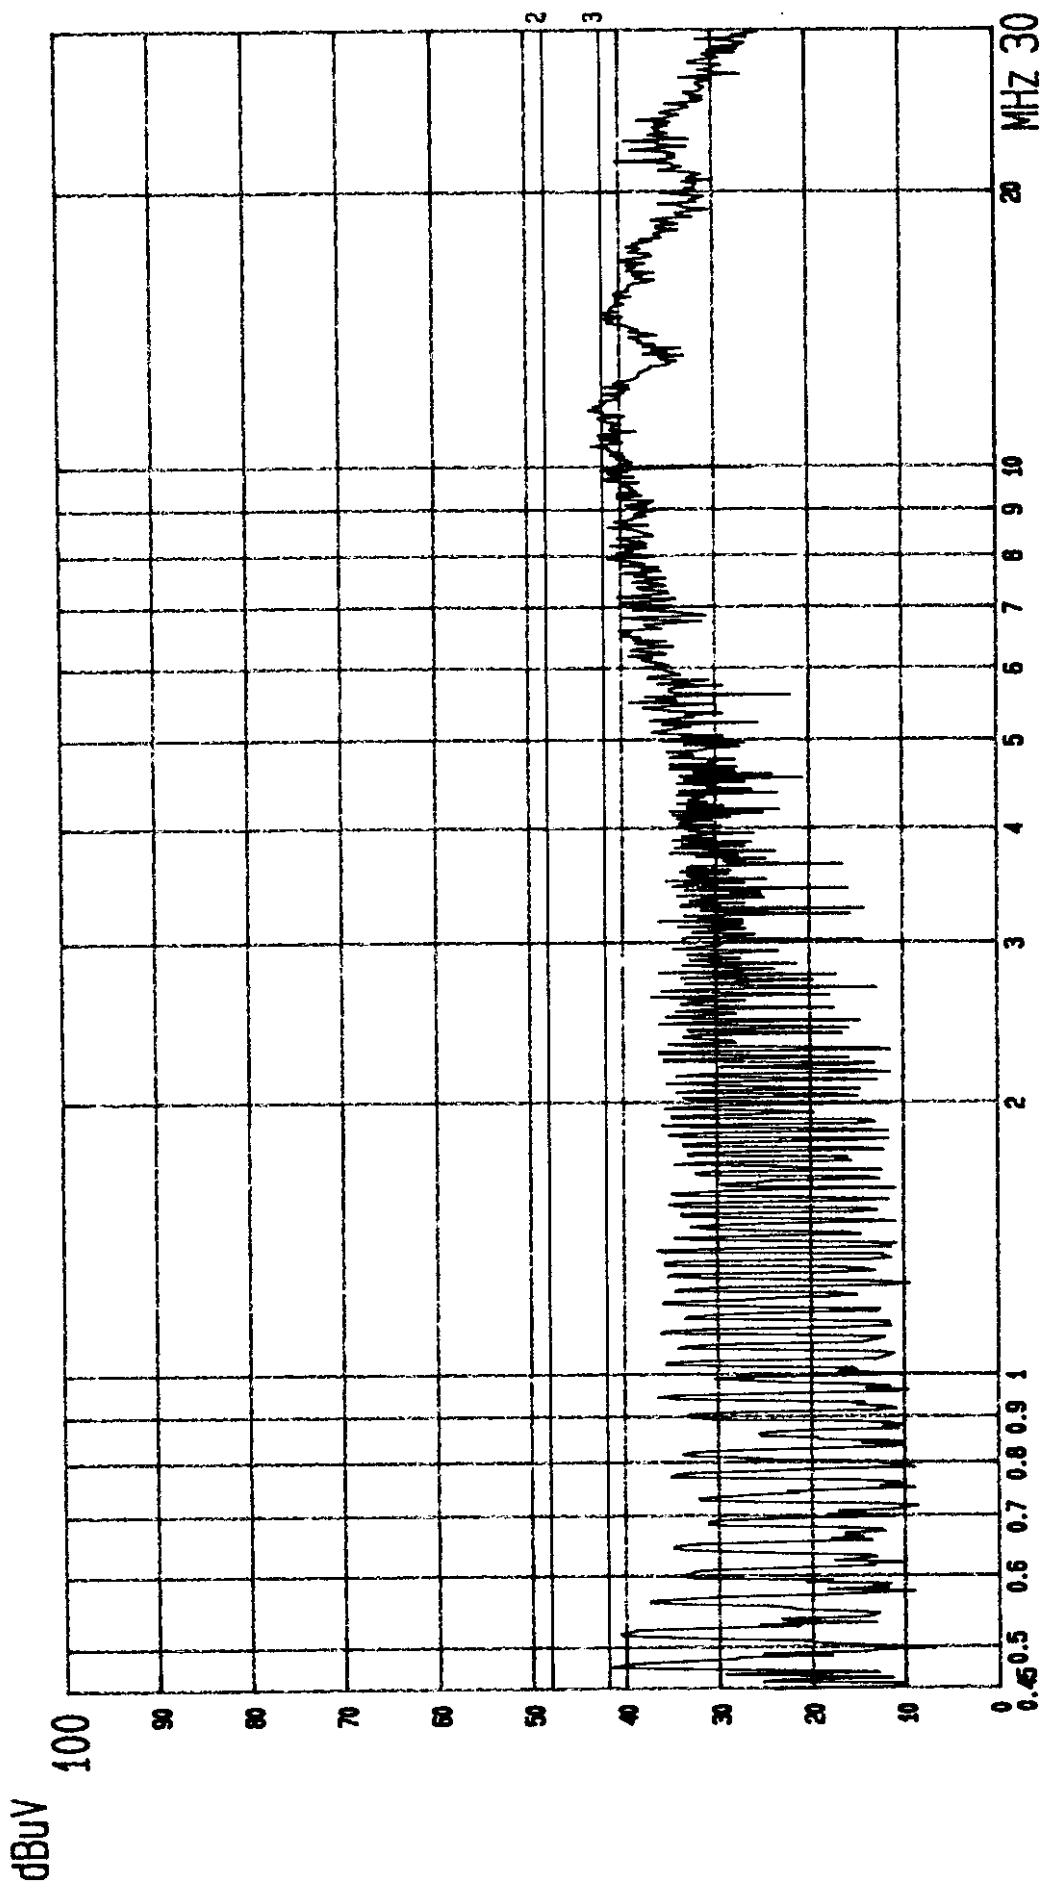

--- Date 21.FEB '98 Time 11:52:25
EUT: IMAGE SCANNER
MEMO: W/MLP-VX
MICROTEK
LINE: VA.

M/N: MRS-1200VX6S
(PEAK VALUE) TAIWAN TOKIN EMC. ENG. CORP.


PAGE: 002.

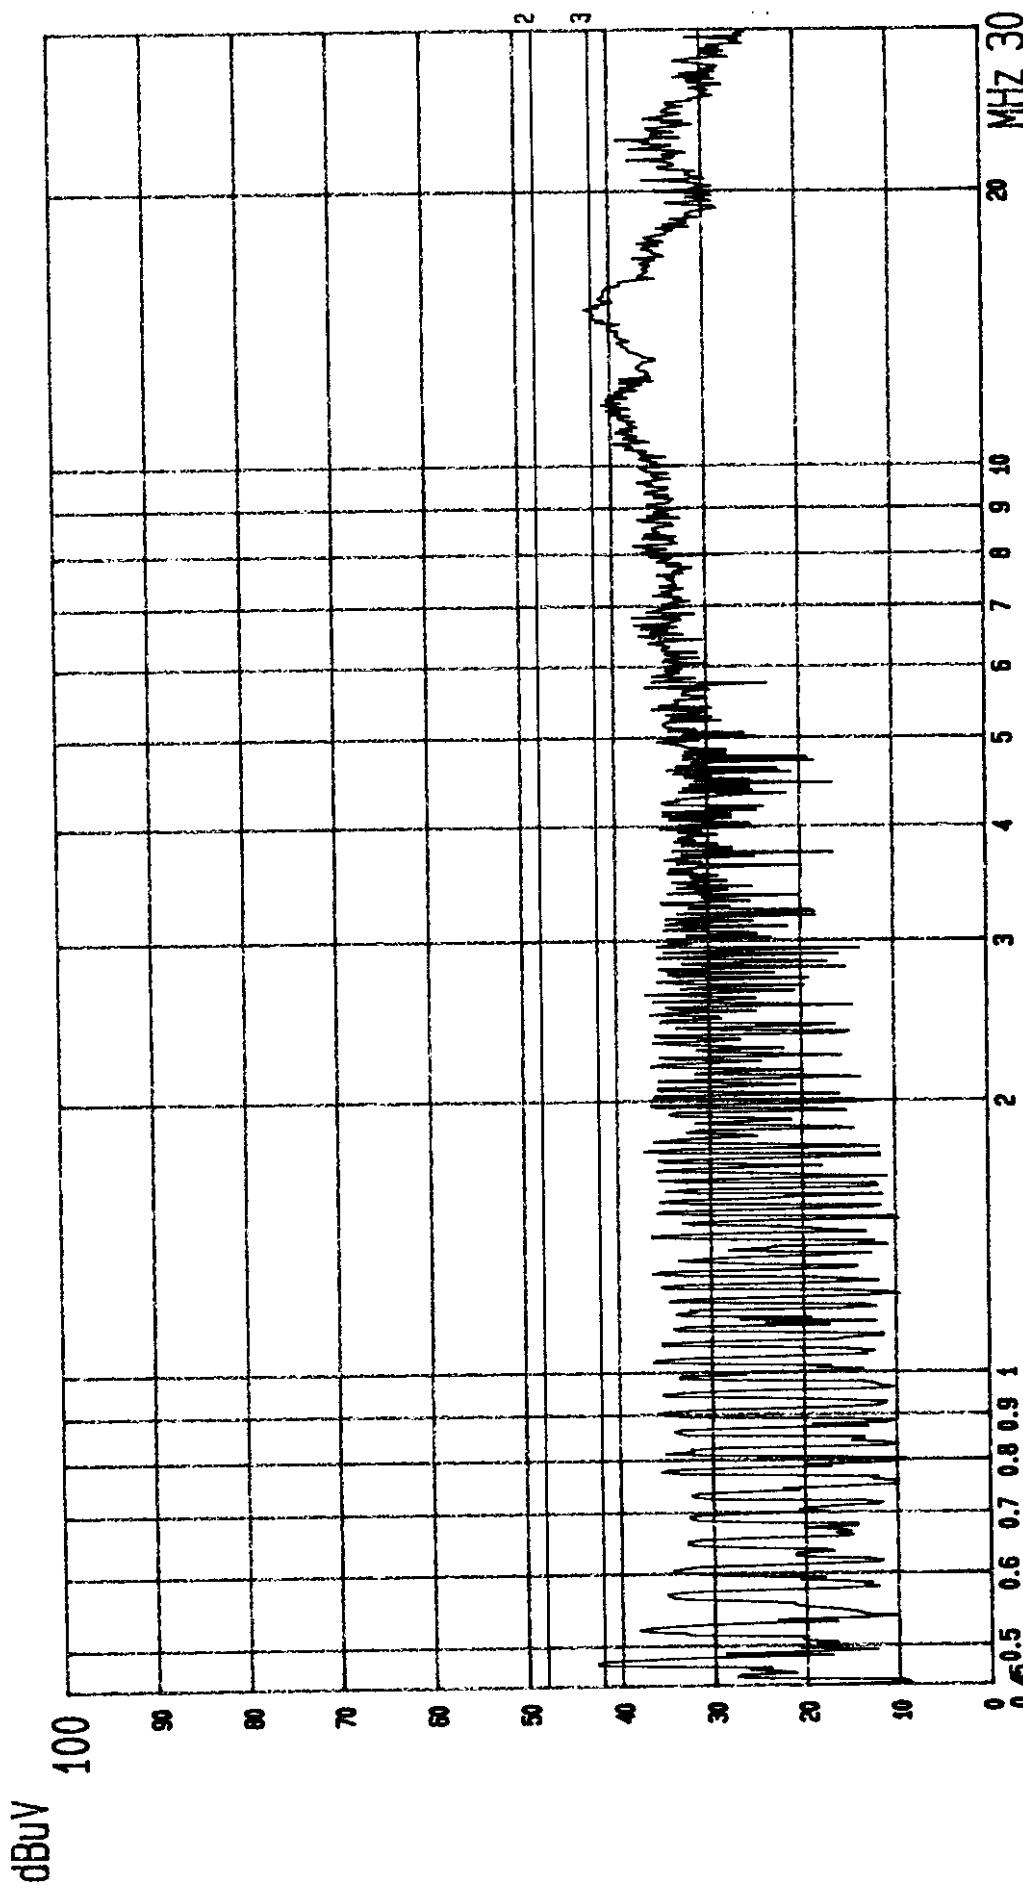

--- Date 21.FEB '98 Time 14:47:29
MICROTEK EUT: TMA/GP SCANNER
MEMO: W/MLP-VX
LINE: VB.

W/N: MRS-1200VX6S
(PEAK VALUE) TAIWAN TOKIN EMC.ENG.CORP.

PAGE: 001.

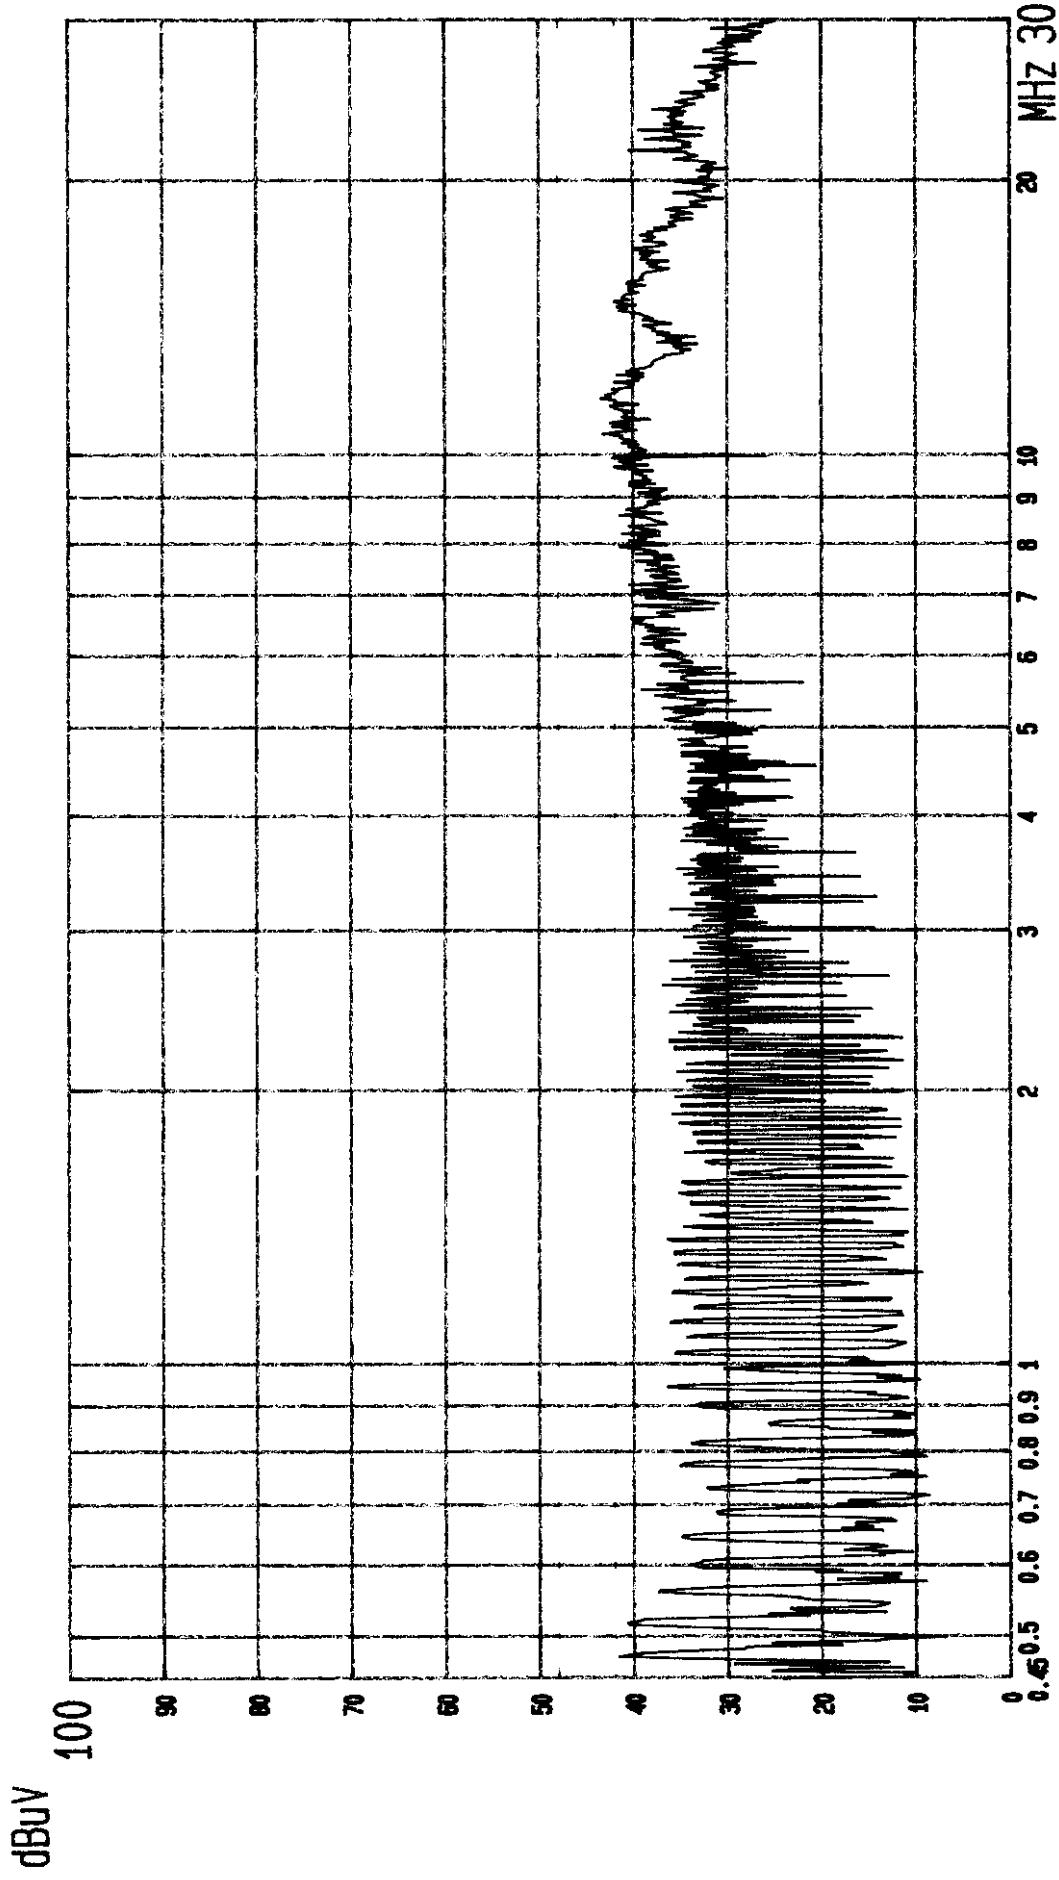

--- Date 21.FEB '98 Time 14:52:25
MICROTEK EUT: IMAGP SCANNER
LINE: VA. MEMO: W/MLP-VX

M/N: MRS-1200VX6S
(PEAK VALUE) TAIWAN TOKIN EMC. ENG. CORP.
PAGE: 002.

3. RADIATED EMISSION TEST


3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESVP	893202/001	Aug.04, 97'	1 Year
2.	Broadband Antenna	CHASE	VBA6106A	1240	Mar.12, 97'	1 Year
3.	Broadband Antenna	Schwarzbeck	UHALP 9108-A	0139	Jun.16, 97'	1 Year

3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

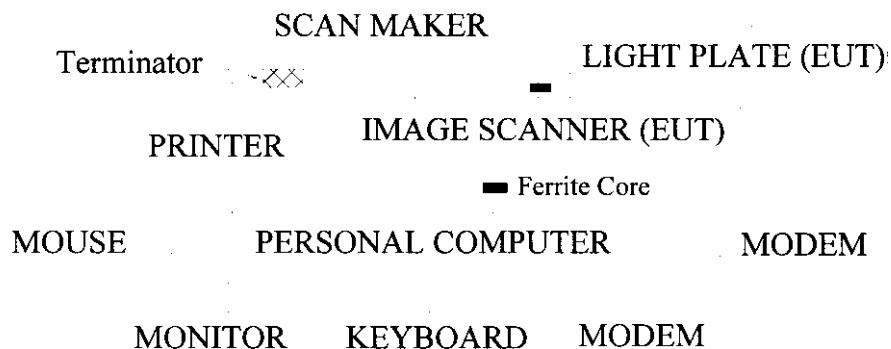

3.2.2. Open Field Test Site Setup Diagram

ANTENNA TOWER

ANTENNA ELEVATION VARIES FROM 1METER TO 4 METER

3 METERS

EUT

0.8
METER

TURN TABLE

GROUND PLANE

3.3. Radiation Limit (CLASS B)

FREQUENCY		FIELD STRENGTHS LIMITS	
MHz	Meters	uV/M	dBuV/M
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Remark : (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 (2) The tighter limit applies at the edge between two frequency bands.
 (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT Configuration on Measurement

The configuration of EUT and its simulators are same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which is listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 during radiated measurement.

The bandwidth setting on the field strength meter (R&S TEST RECEIVER ESVP) was 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

All the test results are listed in section 3.7.

3.7. Radiated Emission Noise Measurement Results

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All the emissions not reported below are too low against the FCC CLASS B limit..

Date of Test : Feb. 18, 1998 Temperature : 22 °C

EUT : Image Scanner Humidity : 60 %

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading dBuV	Emission Level dBuV/m	Limits dBuV/m	Margin dBuV/m
39.995	20.22	1.77	1.60	23.59	40.00	16.41
49.993	16.21	2.00	12.20	30.41	40.00	9.59
69.994	11.78	2.35	12.10	26.23	40.00	13.77
85.008	15.04	2.56	3.60	21.20	40.00	18.80
123.750	19.83	3.07	4.70	27.60	43.50	15.90
140.000	20.85	3.33	8.70	32.88	43.50	10.62
148.749	20.88	3.40	8.80	33.08	43.50	10.42
164.997	21.27	3.69	7.40	32.36	43.50	11.14
174.999	21.55	3.78	4.60	29.93	43.50	13.57
*	200.000	22.19	3.98	12.20	38.37	43.50
	210.000	22.18	4.13	8.30	34.61	43.50
	220.109	22.31	4.27	7.90	34.48	46.00
	270.000	24.75	4.85	5.00	34.60	46.00
	330.000	13.94	5.43	12.50	31.87	46.00
	350.000	14.76	5.70	11.90	32.36	46.00
	400.895	17.03	6.08	7.80	30.91	46.00
	430.003	16.78	6.36	5.70	28.84	46.00
	469.999	17.30	6.89	2.70	26.89	46.00
	480.001	17.38	6.95	4.60	28.93	46.00
	549.999	18.87	7.60	3.10	29.57	46.00
	600.007	19.17	7.79	0.40	27.36	46.00

- Remark : 1. All readings are Quasi-Peak values.
2. The worst emission was detected at 200.000MHz with corrected signal level of 38.37dBuV/m (limit is 43.5dBuV/m) when the antenna was at horizontal polarization and was at 1.8m high and the turn table was at 260°.
3. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Date of Test : Feb. 18, 1998 Temperature : 22 °CEUT : Image Scanner Humidity : 60 %

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading dBuV	Emission Level dBuV/m	Limits dBuV/m	Margin dBuV/m
35.005	21.88	1.60	- 2.90	20.58	40.00	19.42
40.000	19.26	1.77	3.70	24.73	40.00	15.27
* 58.190	13.65	2.20	13.70	29.55	40.00	10.45
79.995	15.39	2.48	5.90	23.77	40.00	16.23
110.000	17.36	2.83	4.60	24.79	43.50	18.71
120.001	18.56	3.05	3.80	25.41	43.50	18.09
130.000	19.48	3.17	5.80	28.45	43.50	15.05
136.250	18.81	3.26	6.20	28.27	43.50	15.23
140.000	19.03	3.33	5.80	28.16	43.50	15.34
160.001	21.46	3.64	3.10	28.20	43.50	15.30
180.001	21.73	3.82	4.10	29.65	43.50	13.85
200.000	20.98	3.98	6.70	31.66	43.50	11.84
220.004	22.63	4.27	6.80	33.70	46.00	12.30
260.001	24.29	4.73	0.30	29.32	46.00	16.68
330.000	14.27	5.43	11.60	31.30	46.00	14.70
372.415	15.09	5.85	5.40	26.34	46.00	19.66
390.000	15.86	5.96	5.90	27.72	46.00	18.28
420.000	16.12	6.22	7.80	30.14	46.00	15.86
479.999	17.23	6.95	5.20	29.38	46.00	16.62
519.999	19.36	7.33	3.10	29.79	46.00	16.21
549.999	19.24	7.60	2.70	29.54	46.00	16.46
639.997	20.30	8.03	- 3.00	25.33	46.00	20.67

- Remark : 1. All readings are Quasi-Peak values.
2. The worst emission was detected at 58.190MHz with corrected signal level of 29.55dBuV/m (limit is 40dBuV/m) when the antenna was at vertical polarization and was at 1.3m high and the turn table was at 190°.
3. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

4. DEVIATION TO TEST SPECIFICATIONS

【 NONE 】