



Test Report

Product Name : Image Scanner

Model No. : MRS-600V48U

FCC ID.: EF9MRS-600V48U

Applicant : Microtek International Inc.

Address : No.6, Industry East Rd.3, Science-Based
Industrial Park, Hsin Chu, Taiwan, R.O.C.

Date of Receipt : May 8, 2001

Date of Test : May 14, 2001

Report No. : 015H042FI

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : May 14, 2001

Report No. : 015H042FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200347-0

Product Name : Image Scanner

Applicant : Microtek International Inc.

Address : No.6, Industry East Rd.3, Science-Based
Industrial Park, Hsin Chu, Taiwan, R.O.C.

Manufacturer : Microtek International Inc.

Model No. : MRS-600V48U

FCC ID. : EF9MRS-600V48U

Rated Voltage : AC 120V/60Hz

Trade Name : Microtek

Measurement Standard : CISPR 22:1997

Measurement Procedure : ANSI C63.4:1992

Classification : Class B

Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : _____
(Kim Hung)

Tested By : _____
(Guofeng Fang)

Approved By : _____
(Gene Chang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description	4
1.2. Tested System Details	5
1.3. Configuration of tested System.....	5
1.4. EUT Exercise Software	6
1.5. Test Facility	6
2. Conducted Emission.....	7
2.1. Test Equipment List.....	7
2.2. Test Setup	7
2.3. Limits	8
2.4. Test Procedure.....	8
2.5. Test Result	8
3. Radiated Emission.....	9
3.1. Test Equipment	9
3.2. Test Setup	9
3.3. Limits	10
3.4. Test Procedure.....	10
3.5. Test Result	10
4. EMI Reduction Method During Compliance Testing	11
5. Summary of Test Datas	12
5.1. Test Data of Conducted Emission	13
5.2. Test Data of Radiated Emission.....	15
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	: Image Scanner
Trade Name	: Microtek
FCC ID.	: EF9MRS-600V48U
Model No.	: MRS-600V48U
USB Cable	: Shielded, 1.5m, a ferrite core bonded
Power Adapter	: High Power, HPW-1512A, Cable Out: Non-shielded, 1.8m, a ferrite core bonded
Power Adapter	: Li Shin, LSE9801B12(USA), Cable Out: Non-shielded, 1.8m, a ferrite core bonded

Note:

1. The EUT is an Image Scanner with max resolution 600*1200dpi.
2. QuietTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode:	Mode 1: Link PC, W/USB, W/35TA, Adapter: High Power, HPW-1512A
	Mode 2: Link PC, W/USB, W/35TA, Adapter: Li Shin, LSE9801B12(USA)


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
(1)	PC	ASUS	P2L97	AS10226	Non-shielded,1.8m
(2)	Monitor	HITACHI	CM752ET-311	T8F005799	Shielded, 1.8m
(3)	Keyboard	MITSUMI	KFKEA4SA	KFKEA4SA94Q20474	N/A
(4)	Mouse	IBM	M-SAU-IBM6	23-029014	N/A
(5)	USB Mouse	Logitech	M-UE55	LTC93813283	N/A
(6)	Printer	HP	C2642A	MY75J1D1D0	Shielded, 1.2m
(7)	Modem	ACEEX	1414	980033033	Shielded, 1.5m
(8)	Modem	ACEEX	1414	980033035	Shielded, 1.5m

	Signal Cable Type	Signal cable Description
A.	VGA cable	Shielded, 1.8m, with a ferrite Core
B.	Keyboard cable	Non-shielded, 1.5m
C.	Mouse cable	Non-shielded, 1.5m
D.	USB Mouse cable	Shielded, 0.8m
E.	USB Mouse cable	Shielded, 1.5m
F.	Modem cable	Non-shielded, 1.5m
G.	Modem cable	Non-shielded, 1.5m
H.	Printer cable	Shielded, 1.5m

1.3. Configuration of tested System

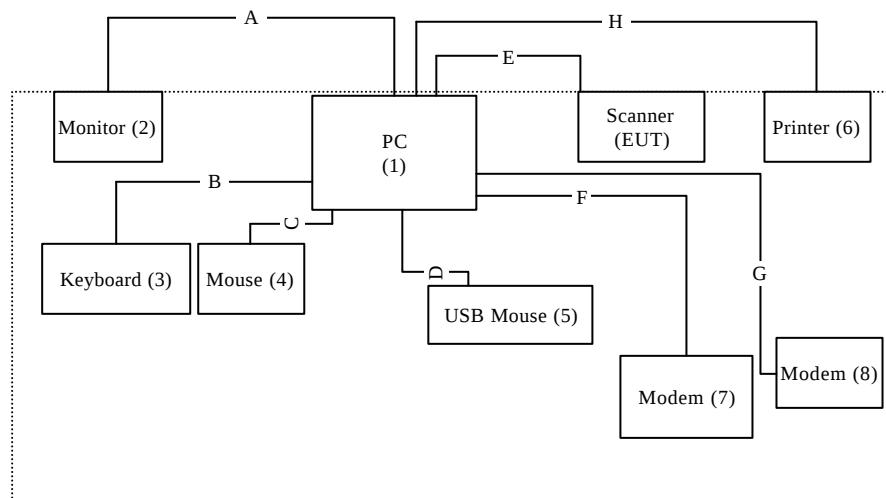

1.4. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.3
- (2) Turn on the power of all equipment.
- (3) Boot the PC from Hard Disk.
- (4) PC reads test software from the control BIOS of scanner and then sent to scanner.
- (5) The Scanner (EUT) will start to operate and scan the video figure into PC.
- (6) PC will display "video figure" on monitor.
- (7) Printer and modem will keep at standby mode during EUT operation.
- (8) Repeat the above procedure (4) to (7).

1.5. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2
September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: N0.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwa, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

2.3. Limits

CISPR 22 Limits (dBuV)				
Frequency MHz	Class A		Class B	
	QP	AV	QP	AV
0.15 - 0.50	79	66	66-56	56-46
0.50-5.0	73	60	56	46
5.0 - 30	73	60	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result

The emission from the EUT was below the specified limits. The worst-case emissions are shown in section 5. The acceptance criterion was met and the EUT passed the test.

3. Radiated Emission


3.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2001
		Pre-Amplifier	HP	8447D/3307A01812	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2001
		Pre-Amplifier	HP	8447D/3307A01814	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

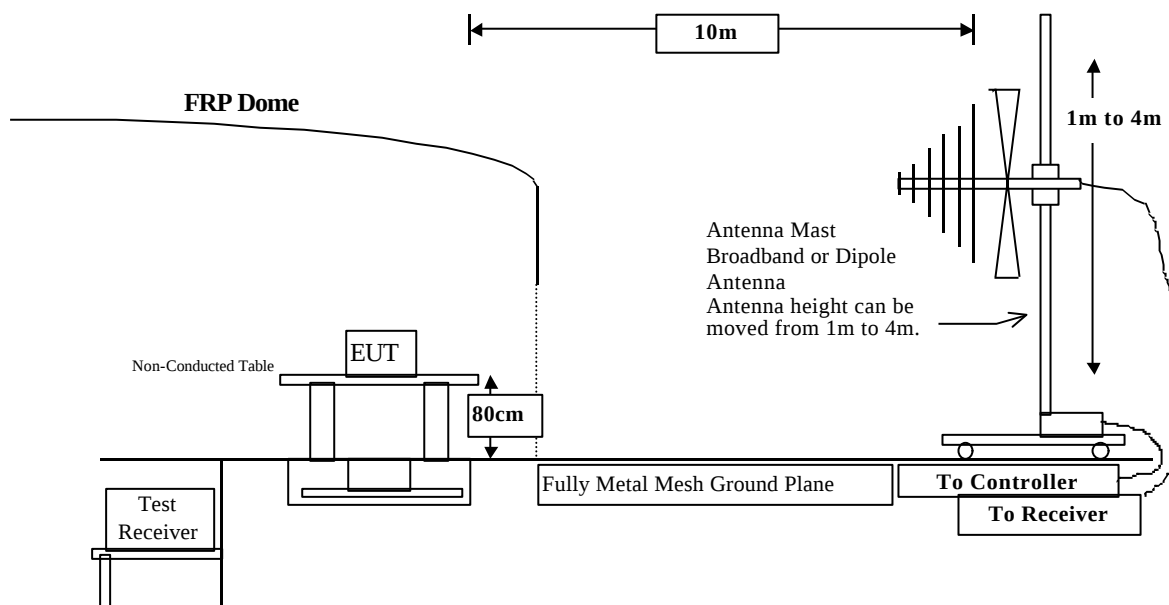

3.3. Limits

CISPR 22 Limits (dBuV)				
Frequency MHz	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m
30 – 230	10	40	10	30
230 – 1000	10	47	10	37

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV/m) = 20 log RF Line Voltage (uV/m)

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz. Radiated was performed at an antenna to EUT distance of 10 meters.

3.5. Test Result

The emission from the EUT was below the specified limits. The worst-case emissions are shown in section 5. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.

5. Summary of Test Datas

The test results in the emission was performed according to the requirements of measurement standard and process. Quietek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission is listed as below.

All the tests were carried out with the EUT in normal operation, which was defined as:

Test Mode:

Mode 1: Link PC, W/USB, W/35TA, Adapter: High Power, HPW-1512A

Mode 2: Link PC, W/USB, W/35TA, Adapter: Li Shin, LSE9801B12(USA)

5.1. Test Data of Conducted Emission

Product : Image Scanner
 Test Item : Conducted Emission Test
 Test Mode : Mode 1: Link PC, W/USB, W/35TA, Adapter: High Power, HPW-1512A

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Measurement Level dBuV	Limits dBuV
=====					
Line 1					
Quasi-Peak					
0.154	0.00	0.10	39.50	39.60	65.79
*0.172	0.01	0.10	49.49	49.60	64.84
0.371	0.05	0.10	36.90	37.05	58.47
1.313	0.12	0.11	36.50	36.73	56.00
2.877	0.17	0.15	34.66	34.97	56.00
27.003	0.39	0.56	34.78	35.73	60.00
Average					
0.153	0.00	0.10	40.40	40.50	55.84
0.172	0.01	0.10	42.60	42.71	54.86
0.371	0.05	0.10	33.20	33.35	48.48
1.312	0.12	0.11	25.10	25.33	46.00
2.877	0.17	0.15	24.10	24.41	46.00
27.003	0.39	0.56	32.30	33.25	50.00
Line 2					
Quasi-Peak					
*0.166	0.01	0.10	54.70	54.81	65.18
0.232	0.02	0.10	45.65	45.77	62.37
0.372	0.05	0.10	35.19	35.34	58.46
1.090	0.11	0.10	35.22	35.43	56.00
2.044	0.14	0.13	32.56	32.84	56.00
27.005	0.39	0.56	30.02	30.97	60.00
Average					
0.165	0.01	0.10	49.70	49.81	55.21
0.232	0.02	0.10	35.40	35.52	52.38
0.371	0.05	0.10	29.90	30.05	48.48
1.090	0.11	0.10	24.20	24.41	46.00
2.043	0.14	0.13	19.20	19.48	46.00
27.004	0.39	0.56	28.50	29.45	50.00

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Measurement = Reading Level + LISN Factor + Cable loss.

Product : Image Scanner
Test Item : Conducted Emission Test
Test Mode : Mode 2: Link PC, W/USB, W/35TA, Adapter: Li Shin, LSE9801B12(USA)

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Measurement Level dBuV	Limits dBuV
Line 1					
Quasi-Peak					
0.180	0.01	0.10	45.02	45.13	64.50
0.232	0.02	0.10	35.11	35.23	62.38
*0.551	0.07	0.10	41.90	42.07	56.00
1.020	0.10	0.10	39.59	39.79	56.00
2.693	0.16	0.14	37.90	38.20	56.00
27.002	0.39	0.56	34.52	35.47	60.00
Average					
0.179	0.01	0.10	37.10	37.21	54.53
0.232	0.02	0.10	32.20	32.32	52.38
0.550	0.07	0.10	36.70	36.87	46.00
1.019	0.10	0.10	32.40	32.60	46.00
2.692	0.16	0.14	24.40	24.70	46.00
27.001	0.39	0.56	32.90	33.85	50.00
Line 2					
Quasi-Peak					
*0.178	0.01	0.10	50.84	50.95	64.59
0.269	0.03	0.10	39.66	39.79	61.15
0.360	0.05	0.10	40.62	40.77	58.73
1.051	0.10	0.10	40.48	40.69	56.00
2.810	0.16	0.14	35.27	35.58	56.00
27.003	0.39	0.56	33.37	34.32	60.00
Average					
0.177	0.01	0.10	44.80	44.91	54.63
0.269	0.03	0.10	32.80	32.93	51.15
0.360	0.05	0.10	29.80	29.95	48.73
1.051	0.10	0.10	29.90	30.11	46.00
2.810	0.16	0.14	23.70	24.01	46.00
27.002	0.39	0.56	32.30	33.25	50.00

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Measurement = Reading Level + LISN Factor + Cable loss.

5.2. Test Data of Radiated Emission

Product : Image Scanner
 Test Item : Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Mode 1: Link PC, W/USB, W/35TA, Adapter: High Power, HPW-1512A

Freq.	Cable Loss	Probe Factor	PreAMP Reading Level	Emission Level	Margin	Limit	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
=====							
Horizontal							
144.015	2.24	11.16	0.00	9.03	22.43	7.57	30.00
171.015	2.50	9.56	0.00	14.37	26.44	3.56	30.00
207.020	2.86	9.46	0.00	13.50	25.82	4.18	30.00
*229.500	3.06	10.22	0.00	15.21	27.50	2.50	30.00
252.025	3.29	12.84	0.00	19.32	34.45	2.55	37.00
378.038	4.16	14.85	0.00	9.71	28.72	8.28	37.00
Vertical							
153.000	2.34	10.53	0.00	7.56	20.43	9.57	30.00
*180.250	2.60	9.21	0.00	10.89	22.70	7.30	30.00
192.025	2.71	8.88	0.00	6.15	17.74	12.26	30.00
400.000	4.28	16.05	0.00	1.41	21.74	15.26	37.00
450.000	4.53	16.91	0.00	6.14	27.58	9.42	37.00
630.000	5.47	18.53	0.00	2.10	26.10	10.90	37.00

Note:

1. All Reading Levels below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss – Preamp.

Product : Image Scanner
 Test Item : Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Mode 2: Link PC, W/USB, W/35TA, Adapter: Li Shin, LSE9801B12(USA)

Freq.	Cable Loss	Probe Factor	PreAMP Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB dBuV/m

Horizontal

171.012	2.50	9.56	0.00	13.18	25.25	4.75	30.00
189.012	2.68	8.80	0.00	10.62	22.10	7.90	30.00
198.012	2.77	9.15	0.00	10.34	22.26	7.74	30.00
232.525	3.10	10.57	0.00	13.24	26.91	10.09	37.00
270.025	3.47	13.00	0.00	11.38	27.84	9.16	37.00
324.038	3.88	13.64	0.00	9.31	26.84	10.16	37.00
360.038	4.07	14.70	0.00	14.17	32.94	4.06	37.00
*432.038	4.44	16.31	0.00	14.81	34.56	2.44	37.00
450.050	4.53	16.51	0.00	11.62	32.66	4.34	37.00
504.050	4.82	17.29	0.00	10.20	32.30	4.70	37.00

Vertical

*171.012	2.50	9.42	0.00	12.16	24.09	5.91	30.00
198.012	2.77	8.97	0.00	9.30	21.04	8.96	30.00
214.525	2.92	9.30	0.00	9.40	21.63	8.37	30.00
232.525	3.10	10.41	0.00	8.60	22.11	14.89	37.00
360.038	4.07	15.48	0.00	9.92	29.46	7.54	37.00
432.038	4.44	16.83	0.00	7.39	28.67	8.33	37.00
450.050	4.53	16.91	0.00	4.79	26.23	10.77	37.00

Note:

1. All Reading Levels below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss – Preamp.

Attachment 1 : EUT Test Photographs

Attachment 2 : EUT Detailed Photographs