

Test Laboratory: Compliance Certification Services

UMTS1900 Left Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

L-Touch - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.412 mW/g


L-Touch - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.10 V/m; Power Drift = 0.174 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.414 mW/g

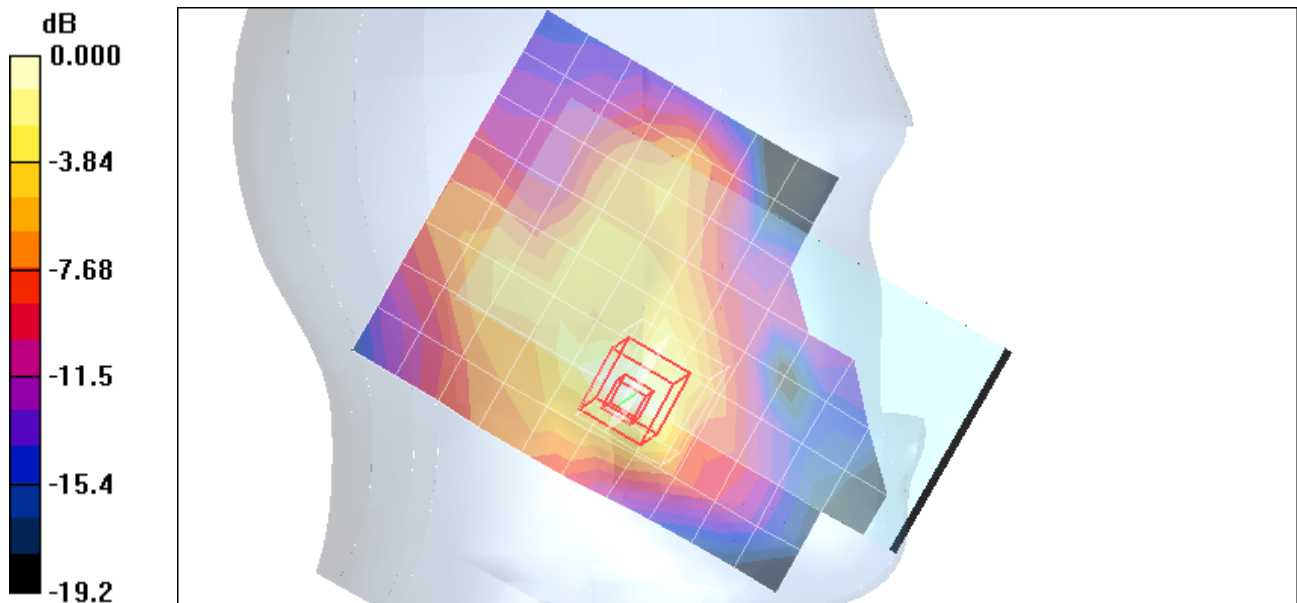

0 dB = 0.414mW/g


Test Laboratory: Compliance Certification Services

UMTS1900 Left Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

L-Touch - M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.038 mW/g

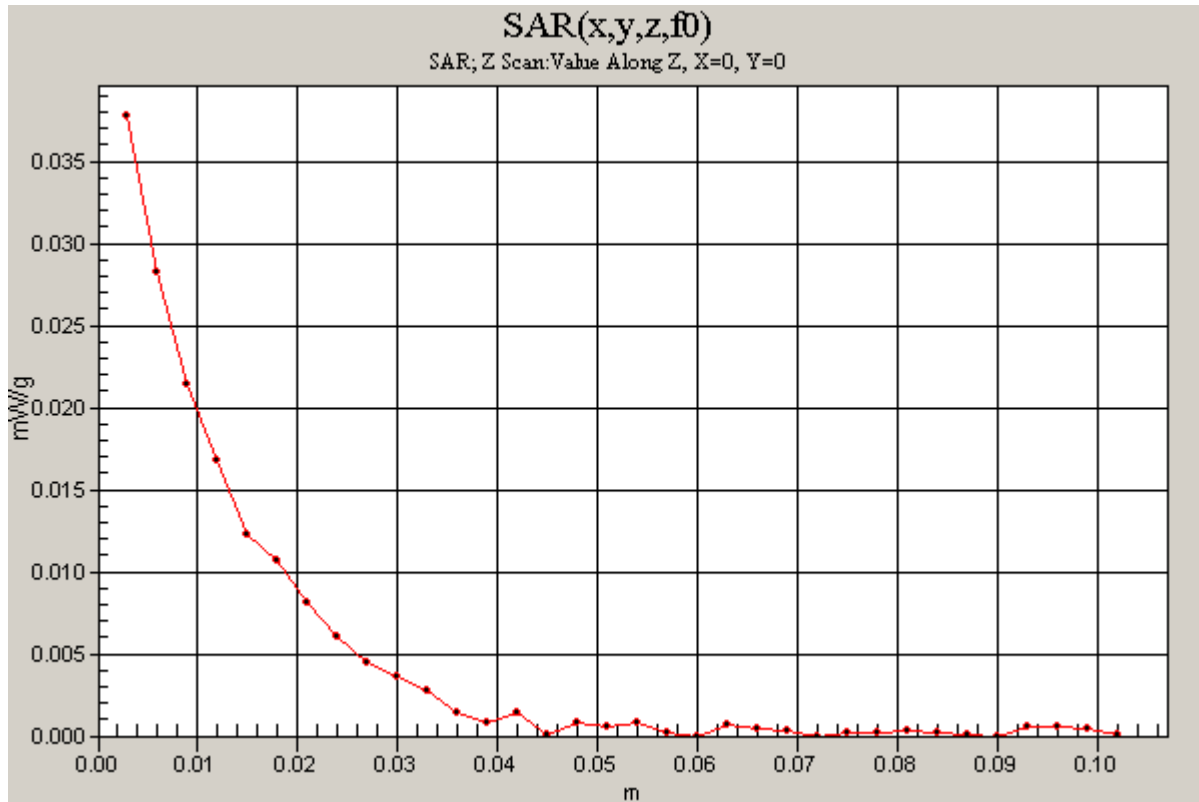

Test Laboratory: Compliance Certification Services

UMTS1900 Left Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

L-Tilt - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 mW/g


L-Tilt - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.05 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

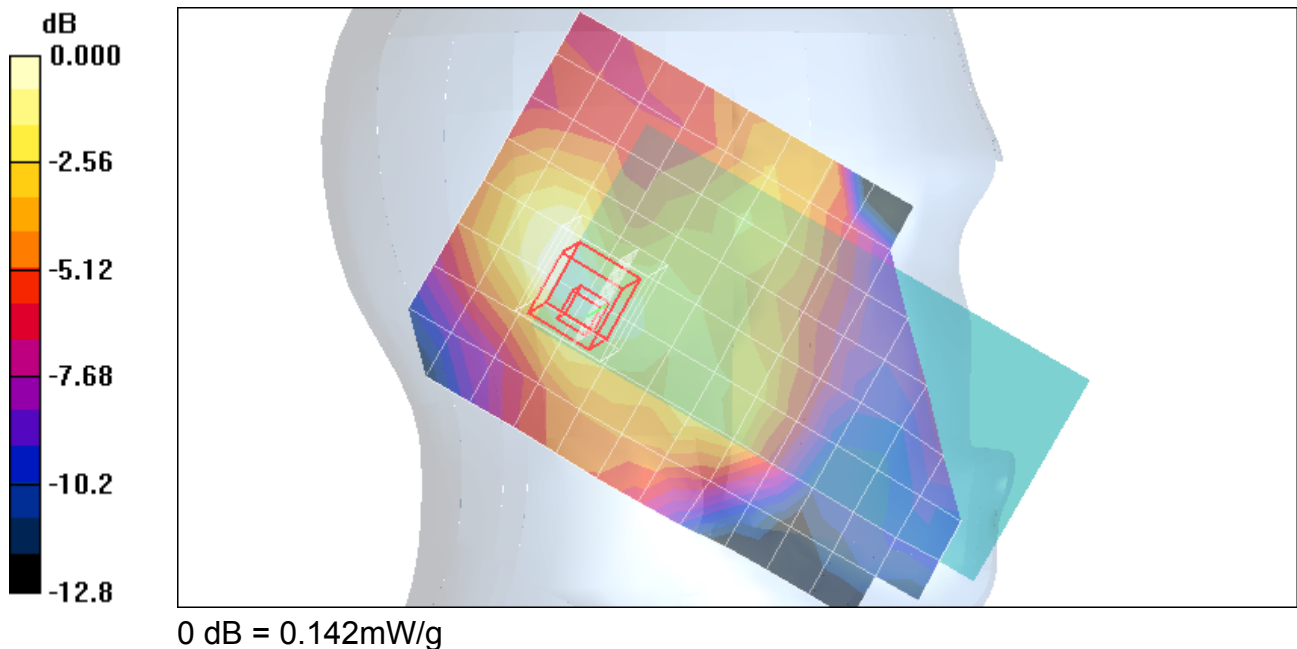

Test Laboratory: Compliance Certification Services

UMTS1900 Right Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

R-Touch - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.333 mW/g


R-Touch - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.52 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.340 mW/g

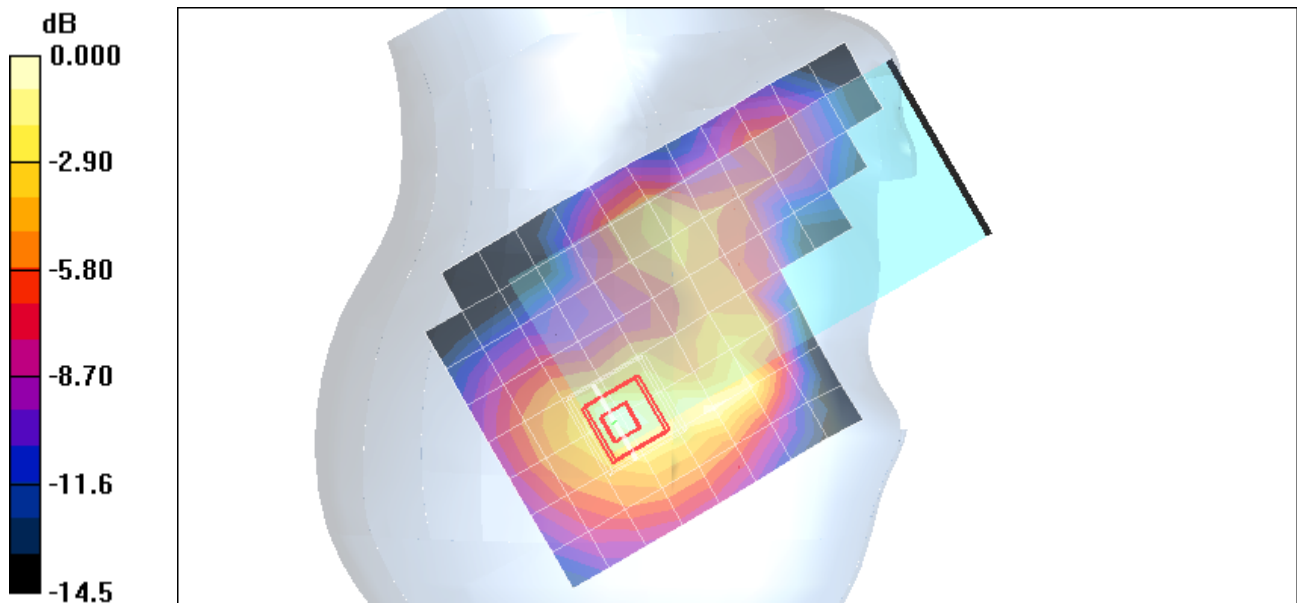

0 dB = 0.340mW/g

Test Laboratory: Compliance Certification Services

UMTS1900 Right Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

R-Tilt - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.223 mW/g


R-Tilt - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.51 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.265 mW/g

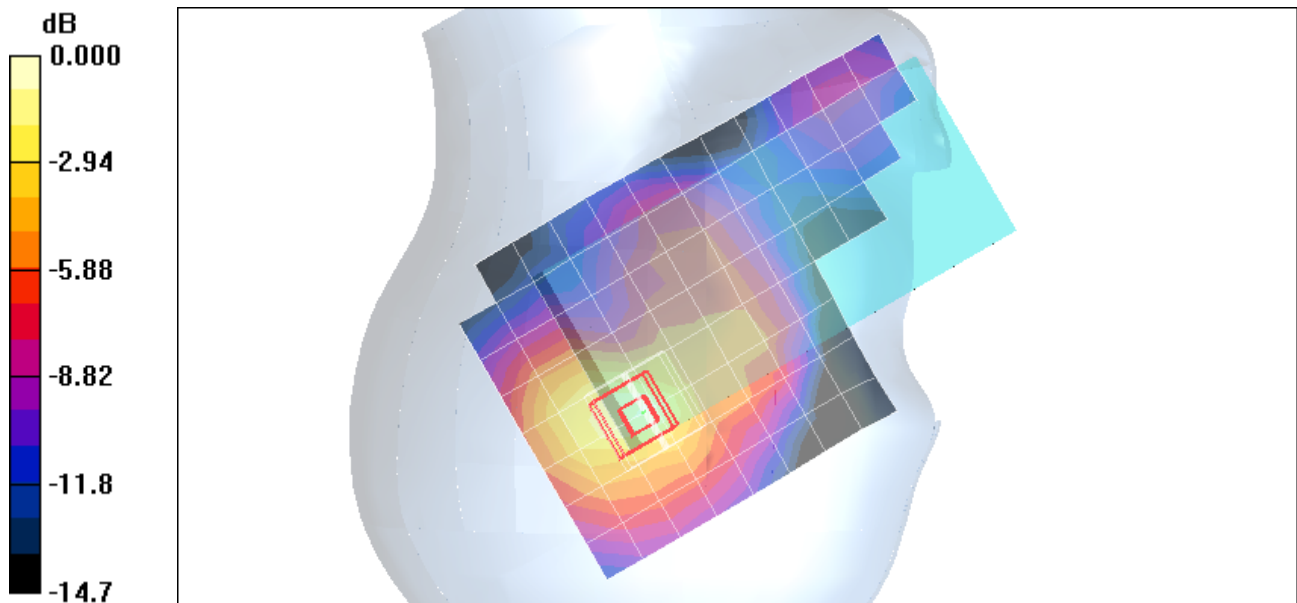

0 dB = 0.265mW/g

Test Laboratory: Compliance Certification Services

UMTS1900 Body

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: UMTS Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD Face down, 2.0 cm - UMTS R99 M-ch/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.445 mW/g

LCD Face down, 2.0 cm - UMTS R99 M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.85 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.234 mW/g

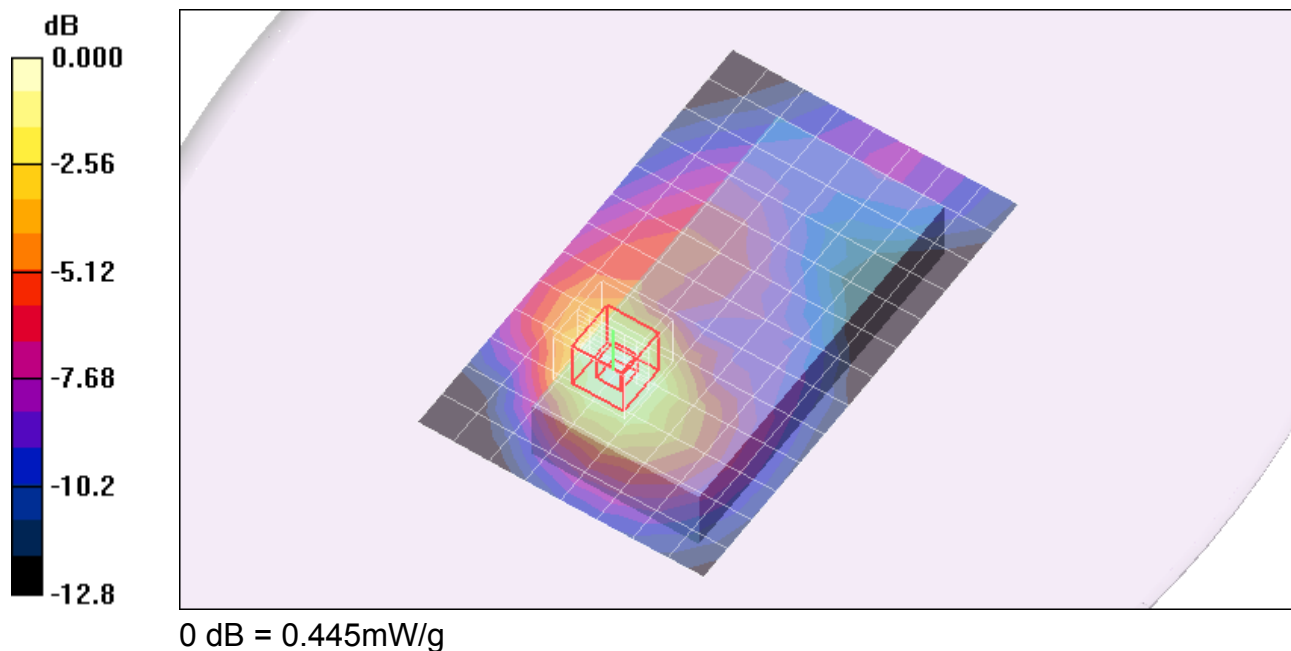


Test Laboratory: Compliance Certification Services

UMTS1900 Body

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: UMTS Band II; Frequency: 1880 MHz;Duty Cycle: 1:1

LCD Face down, 2.0 cm - UMTS R99 M-ch/Z Scan (1x1x34): Measurement grid: dx=20mm, dy=20mm, dz=3mm
Maximum value of SAR (measured) = 0.448 mW/g

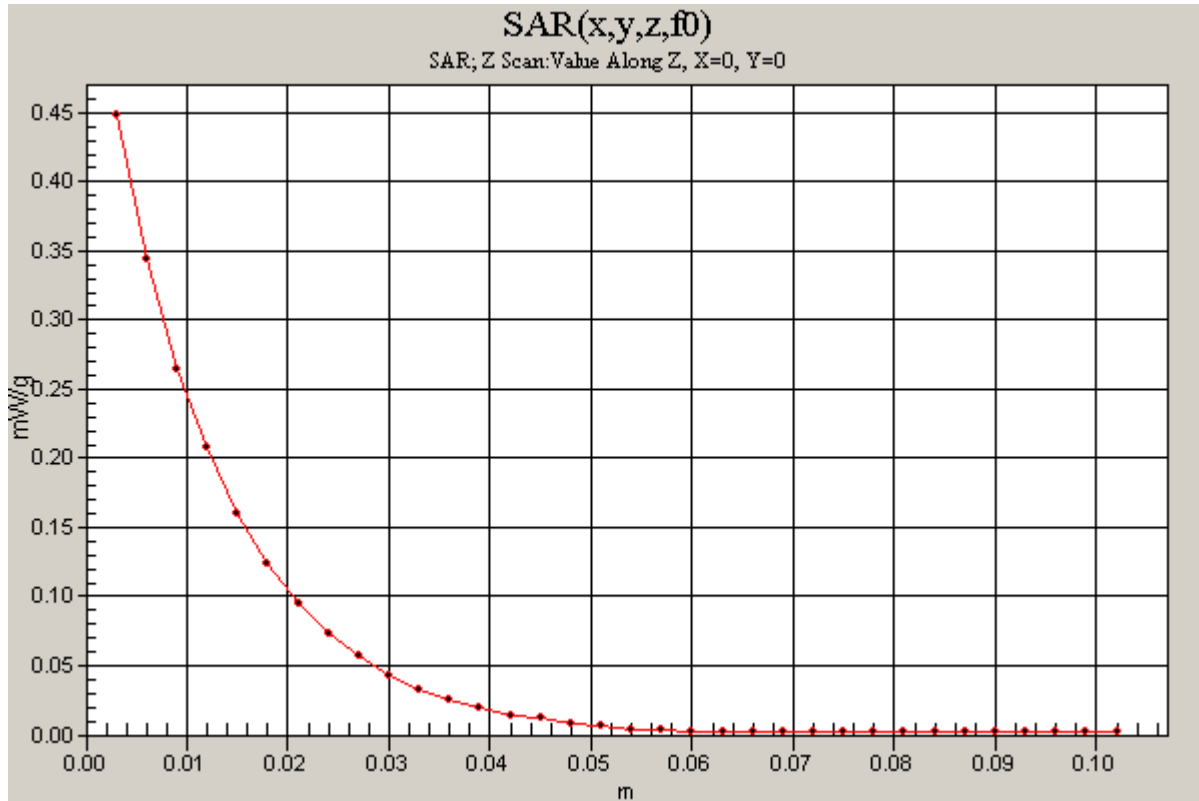

Test Laboratory: Compliance Certification Services

UMTS1900 Body

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: UMTS Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD Face up, 2.0 cm - UMTS R99 M-ch/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.063 mW/g

LCD Face up, 2.0 cm - UMTS R99 M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.01 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.064 mW/g


LCD Face up, 2.0 cm - UMTS R99 M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.01 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.058 mW/g

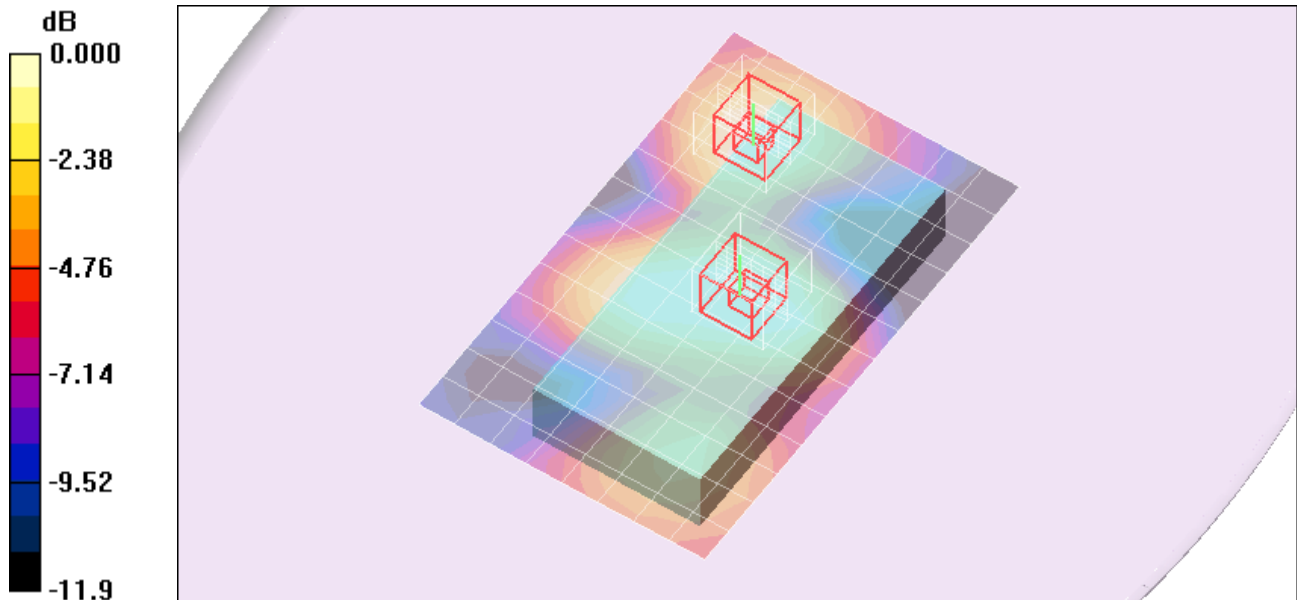

0 dB = 0.058mW/g

Test Laboratory: Compliance Certification Services

UMTS1900 Body

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: UMTS Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD Face down, 2.0 cm - HSPA Sub-test 5 M-ch/Area Scan (9x14x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.444 mW/g

LCD Face down, 2.0 cm - HSPA Sub-test 5 M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.83 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.446 mW/g

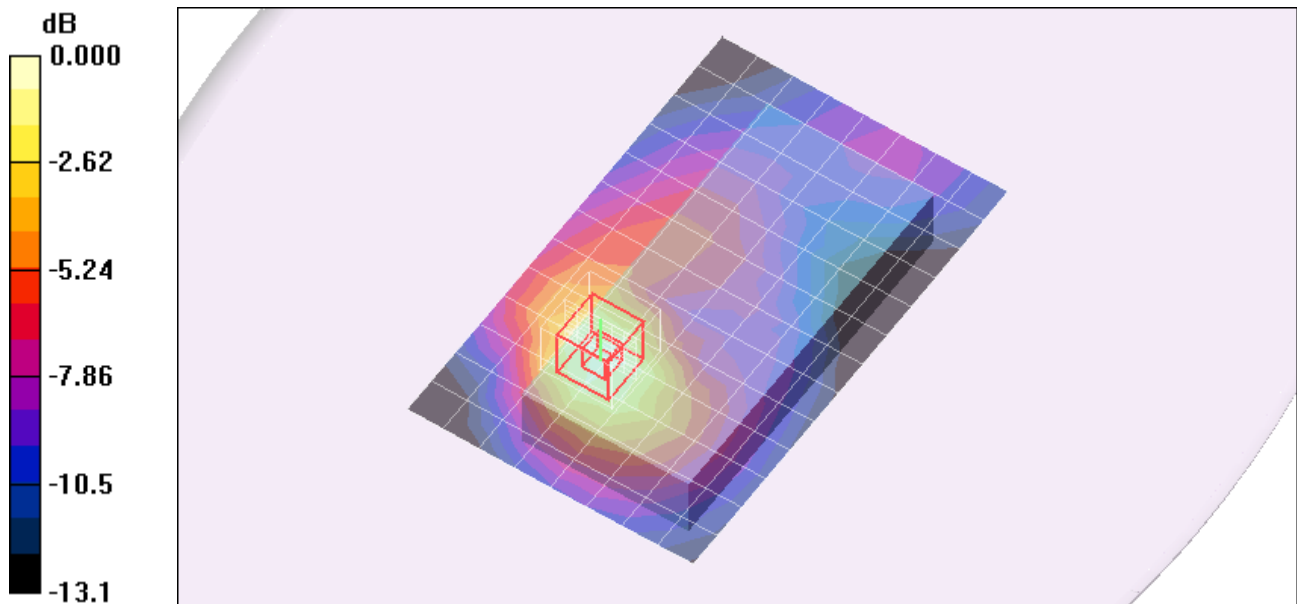

0 dB = 0.446mW/g

Test Laboratory: Compliance Certification Services

GSM1900 Left Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

L-Touch - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.196 mW/g


L-Touch - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.64 V/m; Power Drift = -0.078 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.207 mW/g

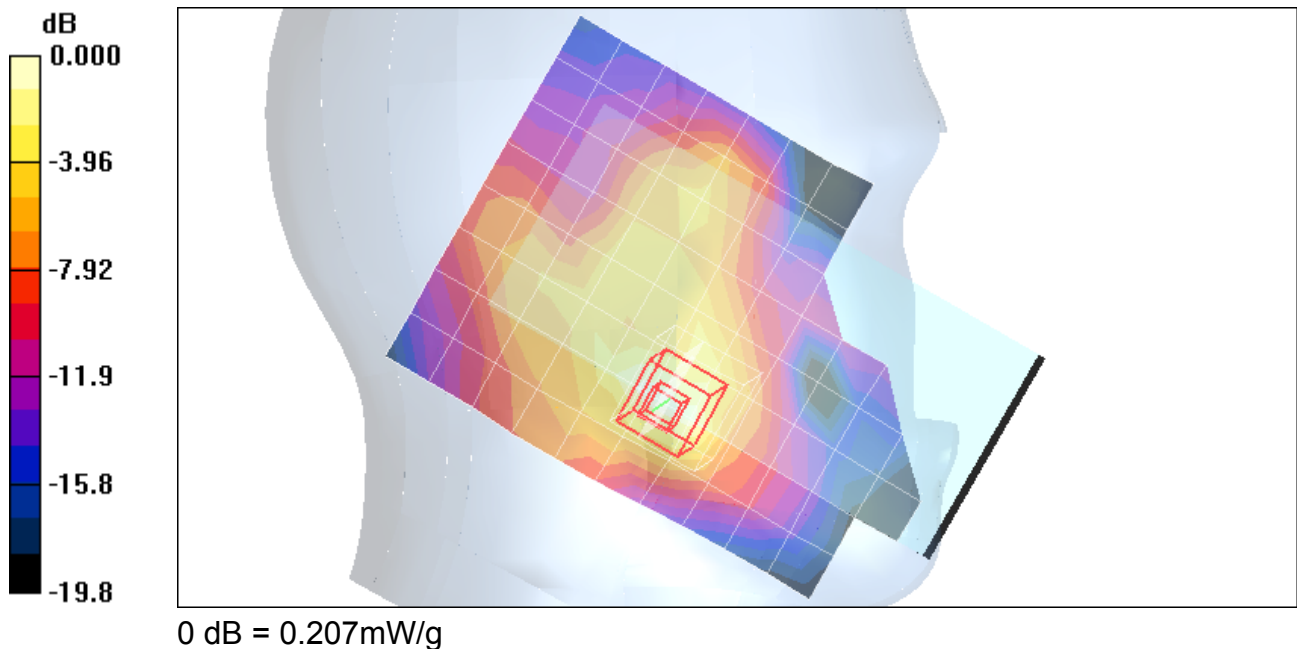

Test Laboratory: Compliance Certification Services

GSM1900 Left Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

L-Tilt - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.063 mW/g


L-Tilt - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.32 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

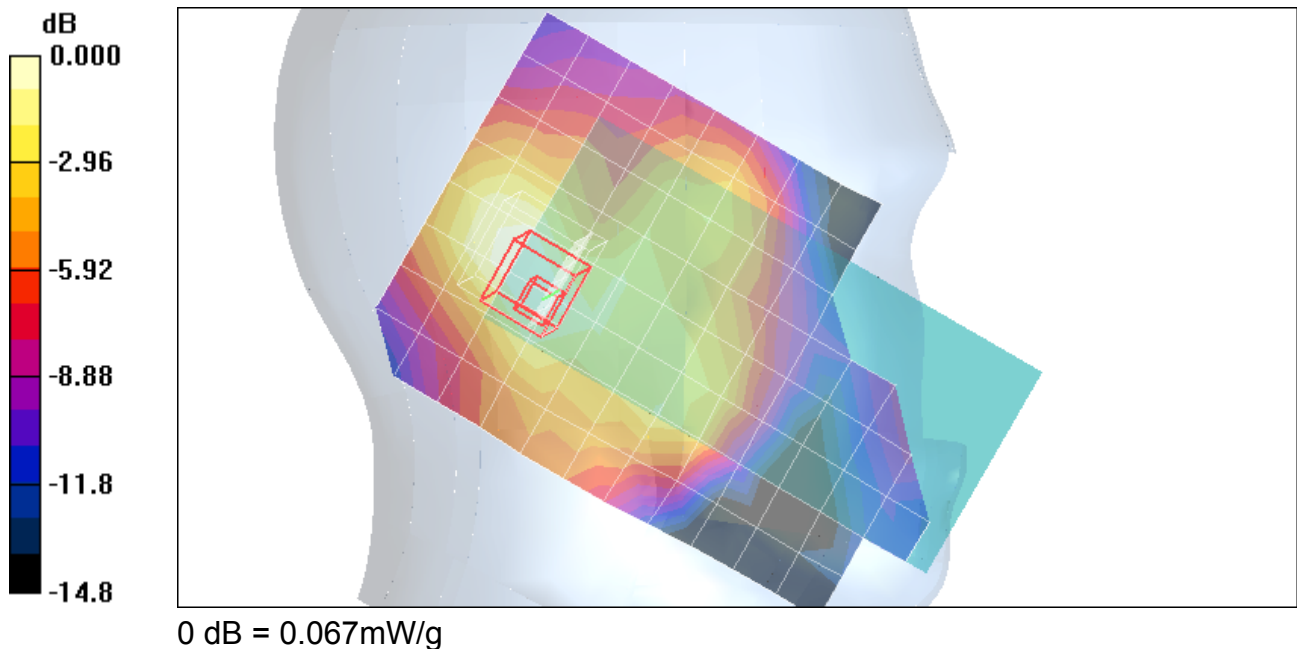

Test Laboratory: Compliance Certification Services

GSM1900 Right Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

L-Touch - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 mW/g


L-Touch - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.49 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

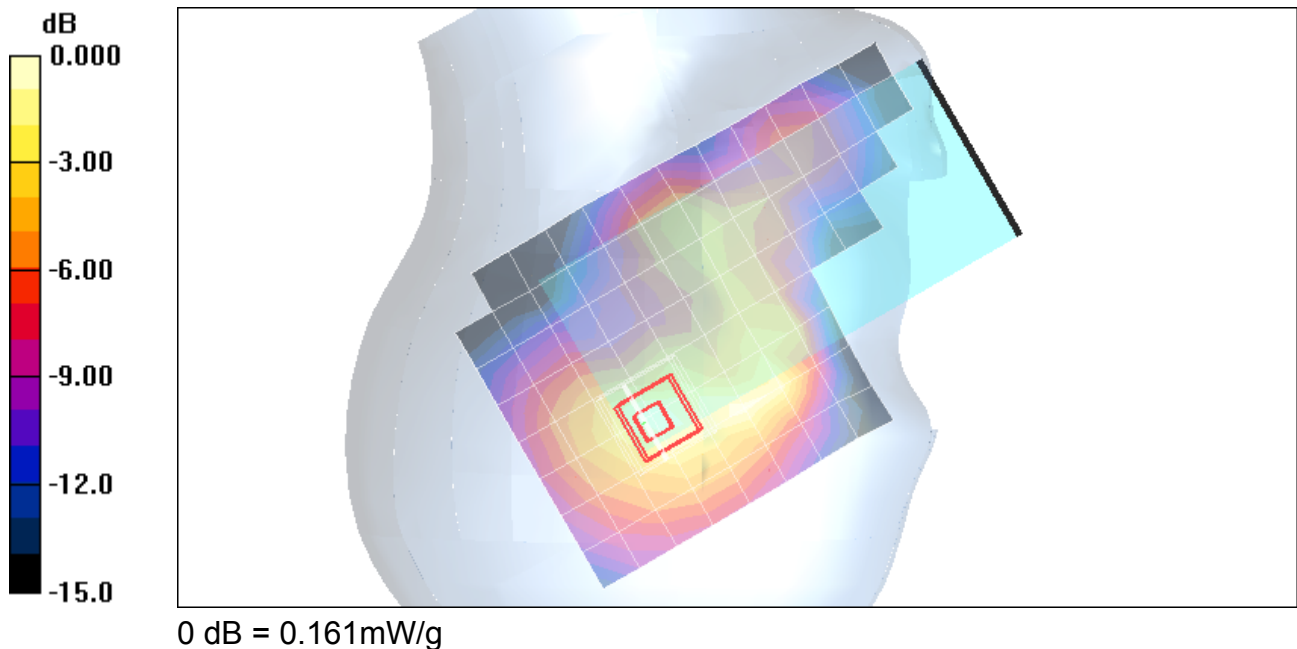

Test Laboratory: Compliance Certification Services

GSM1900 Right Hand Side

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(7.51, 7.51, 7.51); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

L-Tilt - M-ch/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 mW/g


L-Tilt - M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.65 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.172 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

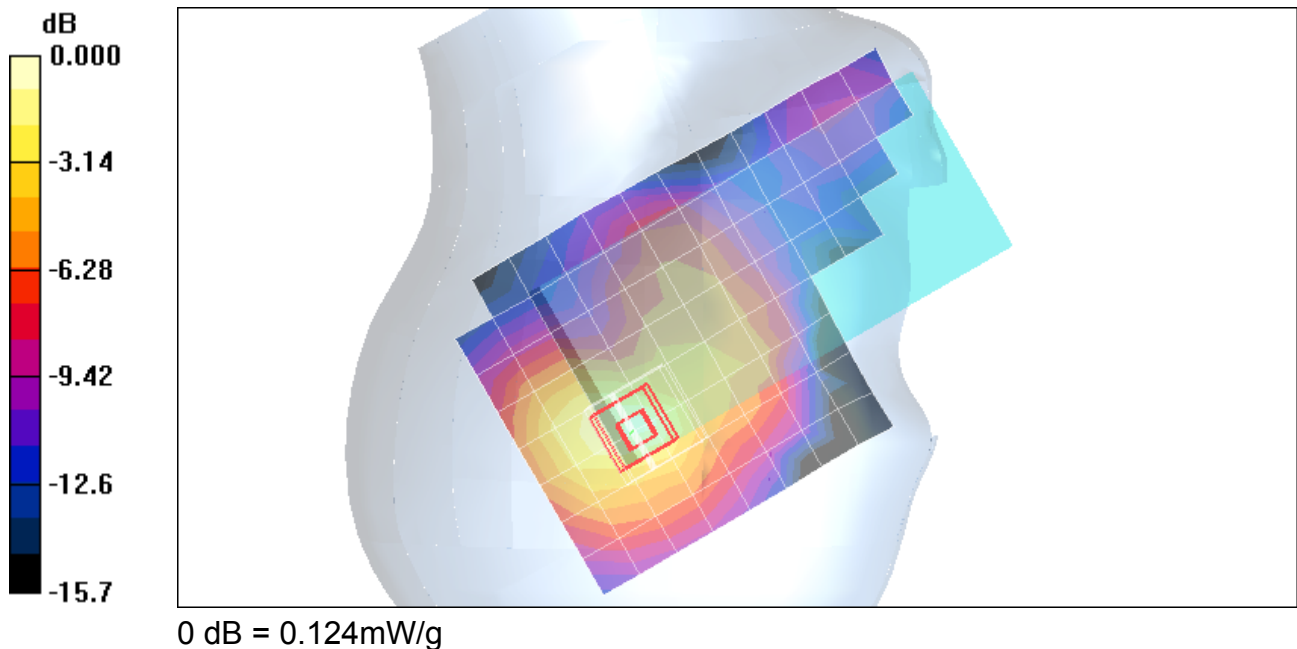

Test Laboratory: Compliance Certification Services

GSM1900 Body

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD Face down, 2.0 cm - GPRS 4 Slots M-ch/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.787 mW/g

LCD Face down, 2.0 cm - GPRS 4 Slots M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.1 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.408 mW/g

Maximum value of SAR (measured) = 0.772 mW/g

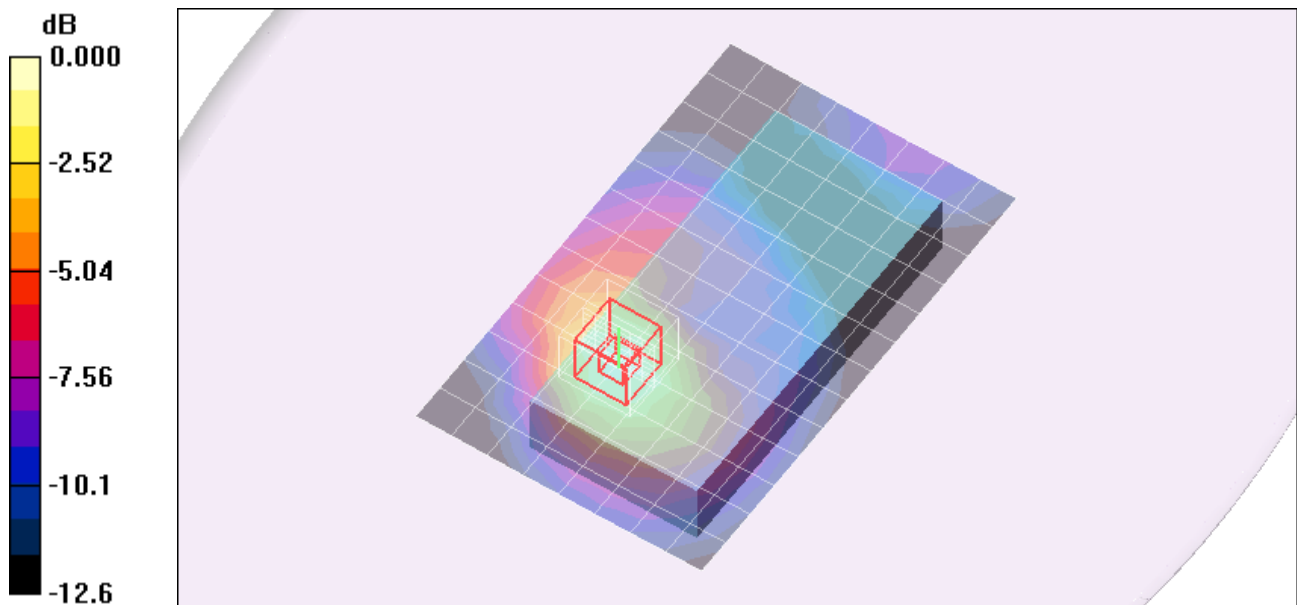

0 dB = 0.772mW/g

Test Laboratory: Compliance Certification Services

GSM1900 Body

DUT: Intermec; Type: CN50; Serial: 328V0800138

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.85, 6.85, 6.85); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

LCD Face up, 2.0 cm - GPRS 4 Slots M-ch/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.126 mW/g

LCD Face up, 2.0 cm - GPRS 4 Slots M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.42 V/m; Power Drift = -0.429 dB
Peak SAR (extrapolated) = 0.173 W/kg
SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.071 mW/g
Maximum value of SAR (measured) = 0.130 mW/g

LCD Face up, 2.0 cm - GPRS 4 Slots M-ch/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.42 V/m; Power Drift = -0.429 dB
Peak SAR (extrapolated) = 0.160 W/kg
SAR(1 g) = 0.108 mW/g; SAR(10 g) = 0.072 mW/g

