



Intermec Technologies Corporation


Name: CK70 RFID

Model 1001CP01F9

SAR Evaluation Report #: ITRM0333

Evaluated to the following SAR Specifications:

FCC 2.1093:2012

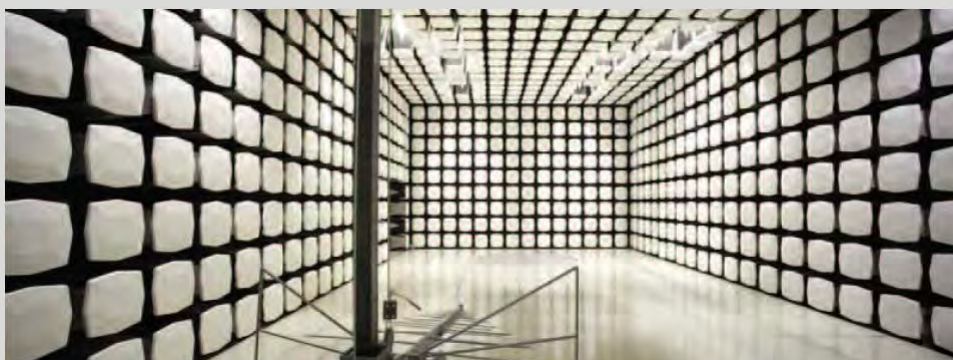

Report Prepared By Northwest EMC Inc.

NORTHWEST EMC – (888) 364-2378 – www.nwemc.com

California – Minnesota – Oregon – New York – Washington

CERTIFICATE OF EVALUATION

Last Date of Test: January 08, 2013
Intermec Technologies Corporation
Name: CK70 RFID
Model:1001CP01F9

Applicable Standard

Test Description	Specification	Test Method	Pass/Fail
SAR Evaluation	FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001	Pass
		IEEE Std 1528:2003	
		FCC KDB 447498 D01 v05	
		FCC KDB 248227 D01 v01r02	
		FCC KDB 648474 D04 V01	
		FCC KDB 865664 D01 and D02	

Highest SAR Values

Frequency Bands (GHz)	Head 1g (W/kg)	Body 1g (W/kg)	Limit 1g (W/kg)	Exposure Environment
900 MHz	0.545	0.395	1.6	General Population Uncontrolled
2.4	0.086	0.306		
5.2, 5.3, 5.6, 5.8	0.063	0.339		

Deviations From Test Standards

None

Approved By:



Don Facteau, IS Manager



NVLAP Lab Code: 200630-0

Test Facility

The measurement facility used to collect the data is located at:

Northwest EMC, Inc.
22975 NW Evergreen Parkway, Suite 400
Hillsboro, OR 97124

Phone: (503) 844-4066

Fax: 844-3826

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

Barometric Pressure

The recorded barometric pressure has been normalized to sea level.

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

KCC / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Hong Kong

OFTA – Recognized by OFTA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

Russia

GOST – Accredited by Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC to perform EMC and Hygienic testing for Information Technology products to GOST standards.



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>



Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	New York Labs WA01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796	Minnesota Labs MN01-08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281	Washington Labs NC01-05, SU02, SU07 19201 120 th Ave. NE Bothell, WA 98011 (425) 984-6600
VCCI				
A-0108	A-0029		A-0109	A-0110
Industry Canada				
2834D-1, 2834D-2	2834B-1, 2834B-2, 2834B-3		2834E-1	2834C-1

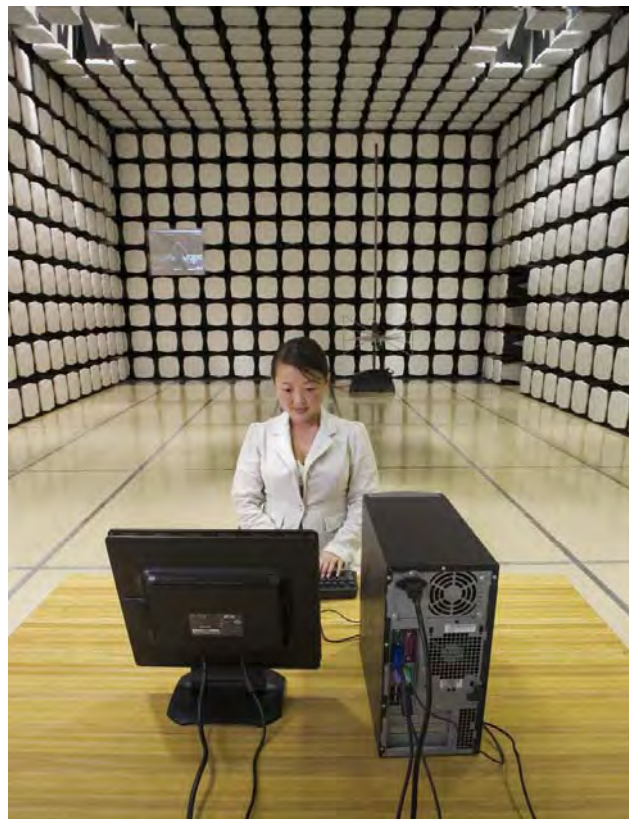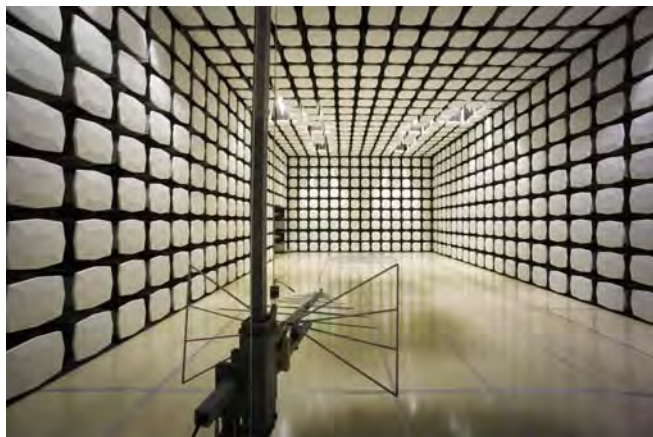

Client and Equipment Under Test (EUT) Information

Company Name:	Intermec Technologies Corporation
Address:	550 Second St. SE
City, State, Zip:	Cedar Rapids, IA 52401-2023
Test Requested By:	Dave Fry
Model:	1001CP01F9
First Date of Test:	December 07, 2012
Last Date of Test:	January 08, 2013
Receipt Date of Samples:	December 07, 2012
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT (Equipment Under Test):

The EUT is the Model 1001CP01F9 handheld computer containing two radio modules, the Intermec Models RC12 and IM11, each with their own integral antenna.

The Intermec Model RC12 radio module is an 802.11a/b/g/n – Bluetooth radio. It is not capable of 40 MHz channel operation. The 802.11a/b/g/n and Bluetooth radios share the same antenna, but cannot transmit simultaneously. The frequency range of the 802.11a/b/g/n radio:

- 2412 – 2462 MHz
- 5180 – 5320 MHz
- 5500 – 5700 MHz
- 5745 – 5825 MHz

The frequency range of the Bluetooth radio:

- 2402 – 2480 MHz

The Intermec IM11 radio module is a RFID reader supporting only EPC Gen 2 (PR-ASK) operation. Dave Fry, Sr. EMC Engineer at Intermec, attests that the maximum duty cycle is 50%:

[“The IM11 module firmware always establishes a maximum 50% on/off transmitter duty cycle.”](#)

The IM11 has two antenna ports, but only one is connected for use in the Model 1001CP01F9. Its frequency range:

- 902.75 – 927.25 MHz

The closest spacing between the RFID antenna and the 802.11a/b/g/n antenna is 3.7cm. The 802.11a/b/g/n antenna is on the right side of the handheld computer and the RFID antenna is on the left side.

In normal operation, the EUT can be held in the hand, or next to the head like a cellular handset, or worn on the body. The only Intermec approved accessory for body worn operation is a holster that contains metal. The EUT can only fit in the holster with the top end of the unit pointing down. The holster cup can be attached to the holster belt with either the keypad facing the user, or the side facing the user. In no case can the back of the EUT face the user.

An optional snap-on audio accessory is available. It connects to the bottom end of the unit and provides a standard audio jack for connection of a VR10 headset.

The EUT is powered by a lithium-ion battery, Model 1001AB01.

Testing Objective:

To demonstrate compliance with the SAR requirements of FCC 2.1093.

Scope

Regarding the 802.11a/b/g/n-Bluetooth radio, KDB 447498 D01 v05, Appendix A contains the SAR test exclusion thresholds for 100 MHz – 6 GHz. For the most conservative test separation of 5mm, the power threshold at 2450 MHz is 10mW. Since the output power of Bluetooth is 7mW, the Bluetooth radio does not require SAR evaluation.

However the output power of the 802.11a/b/g/n radio is greater than the SAR test exclusion thresholds for all bands, so it does require stand-alone SAR evaluation. This is true for the RFID radio as well.

The stand-alone SAR evaluation documented in this report is for the 802.11a/b/g/n and RFID portions of the EUT.

SAR Evaluation for simultaneous transmission was not required because the sum of the 1-g SAR was less than the SAR limit of 1.6 W/kg:

Model	Phantom	Highest of		Sum 1 g (W/kg)
		RFID 1 g (W/kg)	Wi-Fi 1 g (W/kg)	
1001CP01F9	Head	0.545	0.086	0.631
	Body	0.395	0.339	0.734

Per KDB 447498, Section 4.3.2:

“When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration”

Configuration ITRM0333- 5

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
CK70 RFID Computer	Intermec Technologies Corporation	1001CP01F9	8721244017
Battery	Intermec Technologies Corporation	1001AB01	07461104803

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Holster	Intermec Technologies Corporation	None	None
Headset	Intermec Technologies Corporation	VR10	None
Standard Audio Snap-On	Intermec Technologies Corporation	1000AA02	22011146662

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Headset	No	1.2m	No	Handheld Computer	Headset
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Configuration ITRM0333- 6

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
CK70 RFID Computer	Intermec Technologies Corporation	1001CP01F9	8721244017
Battery	Intermec Technologies Corporation	1001AB01	07461104803

Configuration ITRM0333- 11

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
CK70 RFID Computer	Intermec Technologies Corporation	1001CP01F9	8721244013
Battery	Intermec Technologies Corporation	1001AB01	07461104803

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Holster	Intermec Technologies Corporation	None	None
Headset	Intermec Technologies Corporation	VR10	None
Standard Audio Snap-On	Intermec Technologies Corporation	1000AA02	22011146662

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Headset	No	1.2m	No	Handheld Computer	Headset
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					



CONFIGURATIONS

Configuration ITRM0333- 12

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
CK70 RFID Computer	Intermec Technologies Corporation	1001CP01F9	8721244013
Battery	Intermec Technologies Corporation	1001AB01	07461104803

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	12/7/2012	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	12/18/2012	SAR Evaluation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	1/8/2013	SAR Evaluation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.

2.4 AND 5 GHz Bands

Per FCC KDB 248227, the conducted output power was measured at the “default test channels” and at the “required test channels” in each band. Measurements were made while the EUT transmitted at the lowest, middle and the highest data rates for each channel. Test software insured that the EUT transmitted at 100% duty cycle.

Per FCC KDB 248227, among the channels required for normal testing, SAR must be measured on the highest output channel (highlighted). When the SAR measured on the highest output channel is >0.8 W/kg, SAR evaluation for the other required test channels is necessary.

Output power measurements are on the following pages.

NORTHWEST		XMIT 2011.01.18	
EMC		Output Power	
EUT:	1001CP01F9	Work Order:	ITRM0333
Serial Number:	08721244013	Date:	12/07/12
Customer:	Intermec Technologies Corporation	Temperature:	21°C
Attendees:	None	Humidity:	40%
Project:		Barometric Pres.:	1021 mbar
Tested by:	Brandon Hobbs, Rod Peloquin	EUT Power	Battery
		Job Site:	EV08
TEST SPECIFICATIONS		Test Method	
FCC 2.1093:2012		FCC OET 65C:2001	
COMMENTS			
Conducted output power			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	12	Signature 	

Channel	Frequency (MHz)	Data Rate (Mbps)	Modulation	Conducted Power (Average)	
				dBm	W
1	2412	1	BPSK	16.4	0.044
		11	CCK	16.2	0.042
		6	OFDM	13.0	0.020
		36	OFDM	12.8	0.019
		54	OFDM	12.7	0.019
		7.2 (MCS0)	OFDM	13.0	0.020
		72.2 (MCS7)	OFDM	12.3	0.017
6	2437	1	BPSK	16.7	0.046
		11	CCK	16.6	0.045
		6	OFDM	13.1	0.021
		36	OFDM	13.0	0.020
		54	OFDM	12.9	0.020
		7.2 (MCS0)	OFDM	13.2	0.021
		72.2 (MCS7)	OFDM	12.5	0.018
11	2462	1	BPSK	16.9	0.049
		11	CCK	16.7	0.047
		6	OFDM	13.4	0.022
		36	OFDM	13.2	0.021
		54	OFDM	13.2	0.021
		7.2 (MCS0)	OFDM	13.4	0.022
		72.2 (MCS7)	OFDM	12.8	0.019

NORTHWEST		Output Power		XMIT 2011.01.18	
EMC					
EUT: 1001CP01F9		Work Order: ITRM0333			
Serial Number: 08721244013		Date: 12/07/12			
Customer: Intermec Technologies Corporation		Temperature: 21°C			
Attendees: None		Humidity: 40%			
Project:		Barometric Pres.: 1021 mbar			
Tested by: Brandon Hobbs, Rod Peloquin		EUT Power: Battery		Job Site: EV08	
TEST SPECIFICATIONS		Test Method			
FCC 2.1093:2012		FCC OET 65C:2001			
COMMENTS					
Conducted output power					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	12	 Signature			

Channel	Frequency (MHz)	Data Rate (Mbps)	Modulation	Conducted Power (Average)	
				dBm	W
36	5180	6	OFDM	12.3	0.017
		54	OFDM	11.6	0.014
		7.2 (MCS0)	OFDM	12.3	0.017
		72.2 (MCS7)	OFDM	10.1	0.010
40	5200	6	OFDM	12.3	0.017
		54	OFDM	11.5	0.014
		7.2 (MCS0)	OFDM	12.3	0.017
		72.2 (MCS7)	OFDM	10.0	0.010
44	5220	6	OFDM	12.2	0.017
		54	OFDM	11.5	0.014
		7.2 (MCS0)	OFDM	12.2	0.017
		72.2 (MCS7)	OFDM	10.0	0.010
48	5240	6	OFDM	12.2	0.017
		54	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	12.2	0.017
		72.2 (MCS7)	OFDM	10.0	0.010
52	5260	6	OFDM	12.2	0.017
		54	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	12.1	0.016
		72.2 (MCS7)	OFDM	9.9	0.010
56	5280	6	OFDM	12.1	0.016
		54	OFDM	11.2	0.013
		7.2 (MCS0)	OFDM	12.1	0.016
		72.2 (MCS7)	OFDM	9.9	0.010
60	5300	6	OFDM	11.9	0.015
		54	OFDM	11.2	0.013
		7.2 (MCS0)	OFDM	11.9	0.015
		72.2 (MCS7)	OFDM	9.8	0.010
64	5320	6	OFDM	11.9	0.015
		54	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	11.9	0.015
		72.2 (MCS7)	OFDM	9.7	0.009
100	5500	6	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	11.1	0.013
104	5520	6	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	11.1	0.013
108	5540	6	OFDM	11.0	0.013
		7.2 (MCS0)	OFDM	11.1	0.013
112	5560	6	OFDM	11.2	0.013
		7.2 (MCS0)	OFDM	11.0	0.013
116	5580	6	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	10.9	0.012
120	5600	6	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	11.2	0.013
124	5620	6	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	11.3	0.013
128	5640	6	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	11.2	0.013
132	5660	6	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	11.3	0.013
136	5680	6	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	11.3	0.013
140	5700	6	OFDM	11.3	0.013
		7.2 (MCS0)	OFDM	11.3	0.013
149	5745	6	OFDM	11.2	0.013
		7.2 (MCS0)	OFDM	11.2	0.013
153	5765	6	OFDM	11.2	0.013
		7.2 (MCS0)	OFDM	11.2	0.013
157	5785	6	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	11.1	0.013
161	5805	6	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	11.1	0.013
165	5825	6	OFDM	11.1	0.013
		7.2 (MCS0)	OFDM	11.1	0.013

EMC

Output Power

EUT: 1001CP01F9		Work Order: ITRM0333	
Serial Number: 08721244017		Date: 12/07/12	
Customer: Intermec Technologies Corporation		Temperature: 21°C	
Attendees: None		Humidity: 40%	
Project:		Barometric Pres.: 1021 mbar	
Tested by: Brandon Hobbs, Rod Peloquin		Job Site: EV08	
EUT Power: Battery			
TEST SPECIFICATIONS			
FCC 2.1093:2012		FCC OET 65C:2001	
COMMENTS			
Conducted output power			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	6	Signature 	

Channel	Frequency (MHz)	Data Rate (Kbps)	Modulation	Conducted Power (Average)			
				Port 1 dBm	W	Port 2 dBm	W
5	902.75	340	PRASK	27.3	0.532	N/A	N/A
30	915.25	340	PRASK	27.2	0.524	N/A	N/A
54	927.25	340	PRASK	27.3	0.540	N/A	N/A

Characterization of tissue-equivalent liquid dielectric properties

Per IEEE 1528: 2003, Section 5.2.2, the permittivity and conductivity of the tissue material should be measured at least within 24 hours of any full-compliance test. The measured values must be within +/- 5% of the target values. The temperature variation in the liquid during SAR measurements must be within +/- 2 degrees C of that recorded when the dielectric properties were measured.

The dielectric parameters of the tissue-equivalent liquids were measured within 24 hours of the start of testing using the HP85070E dielectric probe kit. The dielectric measurements were made across the frequency range of the liquid. The attached data sheets show that the dielectric parameters of the liquid were within the required 5% tolerances.

Target values of dielectric parameters

Per FCC OET 65C, Appendix C:

“The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528.”

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Composition of Ingredients for Liquid Tissue Phantoms

Northwest EMC uses tissue-equivalent liquids prepared by SPEAG and confirmed by them to be within +/- 5% from the target values. Their recipes are based upon the following formulations as found in FCC OET 65C, Appendix C:

“The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.”

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99⁺% Pure Sodium Chloride

Sugar: 98⁺% Pure Sucrose

Water: De-ionized, 16 MΩ⁺ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99⁺% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

TISSUE – EQUIVALENT LIQUID

Tissue:	Body	Work Order:	ITRM0333
Serial Number:	SAT	Date:	12-20-2012
Customer:	Intermec Technologies Corporation	Temperature:	22.9°C
Customer Project:	None	Liquid Temperature:	22.5°C
Tested By:	Ethan Schoonover	Relative Humidity:	34.4
Job Site:	EV08	Bar. Pressure:	1007

TEST SPECIFICATIONS

RESULTS

	Actual Values		Target Values		Deviation (%)	
Frequency (MHz)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
900	52.8	1.065	55	1.05	4	-1.43

Frequency (MHz)	Relative Permittivity	Conductivity
700	54.9	0.866
715	54.7	0.881
735	54.5	0.9
750	54.3	0.914
770	54.1	0.933
790	53.8	0.953
810	53.6	0.974
825	53.5	0.99
845	53.3	1.01
865	53.1	1.03
880	52.9	1.046
900	52.8	1.065
915	52.6	1.08
935	52.4	1.1
955	52.2	1.12
970	52	1.136
990	51.8	1.157
1010	51.7	1.177
1025	51.5	1.193
1045	51.3	1.214
1065	51.2	1.234
1085	51	1.256
1100	50.9	1.272
1120	50.7	1.293
1140	50.5	1.314
1155	50.3	1.33
1175	50.2	1.352
1195	50	1.372
1200	50	1.377

TISSUE – EQUIVALENT LIQUID

Tissue:	Head	Work Order:	ITRM0333
Serial Number:	SAS	Date:	12-17-2012
Customer:	Intermec Technologies Corporation	Temperature:	21.9°C
Customer Project:	None	Liquid Temperature:	22.5°C
Tested By:	Ethan Schoonover	Relative Humidity:	37.0
Job Site:	EV08	Bar. Pressure:	1010

TEST SPECIFICATIONS

RESULTS

	Actual Values		Target Values		Deviation (%)	
Frequency (MHz)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
900	39.6	0.929	41.5	0.97	4.58	4.23

Frequency (MHz)	Relative Permittivity	Conductivity
700	42.1	0.747
715	41.9	0.76
735	41.7	0.778
750	41.5	0.792
770	41.2	0.81
790	40.9	0.828
810	40.6	0.847
825	40.5	0.861
845	40.2	0.879
865	40	0.898
880	39.8	0.911
900	39.6	0.929
915	39.4	0.943
935	39.2	0.96
955	39	0.978
970	38.8	0.992
990	38.6	1.01
1010	38.4	1.028
1025	38.2	1.042
1045	38	1.059
1065	37.8	1.077
1085	37.6	1.096
1100	37.5	1.109
1120	37.3	1.127
1140	37.1	1.144
1155	36.9	1.157
1175	36.7	1.175
1195	36.6	1.192
1200	36.5	1.197

TISSUE – EQUIVALENT LIQUID

Tissue:	Body	Work Order:	ITRM0333
Serial Number:	SAM	Date:	12-21-2012
Customer:	Intermec Technologies Corporation	Temperature:	23.4°C
Customer Project:	None	Liquid Temperature:	22.2°C
Tested By:	Ethan Schoonover	Relative Humidity:	34.4
Job Site:	EV08	Bar. Pressure:	1011

TEST SPECIFICATIONS

RESULTS

	Actual Values		Target Values		Deviation (%)	
Frequency (MHz)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
2450	51.3	2.005	52.7	1.95	2.66	-2.82

Frequency (MHz)	Relative Permittivity	Conductivity
1900	53.1	5.129
1925	56.8	1.075
1950	56.9	0.971
1975	56.8	0.972
2000	56.6	1.011
2025	56.3	1.072
2050	56.2	1.125
2100	55.7	1.234
2125	55.3	1.3
2150	55	1.362
2175	54.8	1.422
2200	54.5	1.476
2225	54.1	1.537
2250	53.8	1.589
2300	53.2	1.701
2325	52.9	1.75
2350	52.5	1.797
2375	52.1	1.846
2400	51.9	1.898
2425	51.6	1.954
2450	51.3	2.005
2500	50.6	2.1
2525	50.2	2.143
2550	49.9	2.186
2575	49.6	2.23
2600	49.3	2.272
2625	49	2.314
2675	48.3	2.387
2700	48	2.421

Tissue:	Head	Work Order:	ITRM0333
Serial Number:	SAL	Date:	12-26-2012
Customer:	Intermec Technologies Corporation	Temperature:	22.5°C
Customer Project:	None	Liquid Temperature:	21.1°C
Tested By:	Ethan Schoonover	Relative Humidity:	37.0
Job Site:	EV08	Bar. Pressure:	1011

TEST SPECIFICATIONS

RESULTS

	Actual Values		Target Values		Deviation (%)	
Frequency (MHz)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
2450	38.9	1.881	39.2	1.8	0.77	-4.5

Frequency (MHz)	Relative Permittivity	Conductivity
1900	43.6	3.055
1925	46.4	0.819
1950	46.3	0.806
1975	46.1	0.851
2000	45.9	0.912
2025	45.6	0.979
2050	45.2	1.048
2100	44.5	1.185
2125	44.1	1.253
2150	43.7	1.313
2175	43.3	1.373
2200	42.9	1.429
2225	42.4	1.488
2250	42	1.537
2300	41.2	1.637
2325	40.7	1.682
2350	40.3	1.72
2375	39.9	1.758
2400	39.6	1.795
2425	39.3	1.838
2450	38.9	1.881
2500	38.2	1.954
2525	37.8	1.986
2550	37.5	2.019
2575	37.1	2.054
2600	36.8	2.089
2625	36.4	2.119
2675	35.8	2.172
2700	35.4	2.196

TISSUE – EQUIVALENT LIQUID

Tissue:	Body	Work Order:	ITRM0333
Serial Number:	SAV	Date:	12-27-2012
Customer:	Intermec Technologies Corporation	Temperature:	23.1°C
Customer Project:	None	Liquid Temperature:	22.6°C
Tested By:	Ethan Schoonover	Relative Humidity:	34.3
Job Site:	EV08	Bar. Pressure:	1019

TEST SPECIFICATIONS

RESULTS

	Actual Values		Target Values		Deviation (%)	
Frequency (MHz)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
5800	46.2	6.166	48.2	6	4.15	-2.77

Frequency (MHz)	Relative Permittivity	Conductivity
3400	50.1	3.246
3500	50	3.35
3600	49.9	3.456
3700	49.8	3.569
3900	49.5	3.779
4000	49.4	3.889
4100	49.1	3.997
4300	48.8	4.241
4400	48.8	4.365
4500	48.6	4.49
4600	48.4	4.622
4800	48.1	4.883
4850	48	4.938
4900	47.9	5
5000	47.7	5.128
5050	47.6	5.194
5100	47.4	5.257
5200	47.3	5.383
5250	47.2	5.439
5300	47.1	5.502
5350	47	5.572
5450	46.8	5.705
5500	46.8	5.771
5550	46.7	5.836
5650	46.5	5.963
5700	46.4	6.026
5750	46.3	6.083
5800	46.2	6.166
5850	46.1	6.243
5900	46.1	6.321

Tissue:	Head	Work Order:	ITRM0333
Serial Number:	SAU	Date:	1-2-2012
Customer:	Intermec Technologies Corporation	Temperature:	23.8°C
Customer Project:	None	Liquid Temperature:	21.0°C
Tested By:	Ethan Schoonover	Relative Humidity:	23.0
Job Site:	EV08	Bar. Pressure:	1027

TEST SPECIFICATIONS

RESULTS

	Actual Values		Target Values		Deviation (%)	
Frequency (MHz)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
5800	35.3	5.261	35.3	5.27	0	0.17

Frequency (MHz)	Relative Permittivity	Conductivity
3400	38.6	2.831
3450	38.6	2.874
3550	38.5	2.956
3650	38.3	3.038
3750	38.2	3.122
3850	38.2	3.207
3900	38.1	3.25
4000	38	3.342
4100	37.9	3.438
4200	37.8	3.539
4300	37.7	3.639
4350	37.6	3.691
4450	37.5	3.796
4550	37.3	3.9
4650	37.2	4.004
4750	37	4.111
4850	36.9	4.224
4900	36.8	4.277
5000	36.6	4.389
5100	36.5	4.499
5200	36.3	4.604
5300	36.1	4.711
5350	36.1	4.763
5450	35.9	4.872
5550	35.7	4.984
5650	35.6	5.097
5750	35.4	5.207
5800	35.3	5.261
5850	35.2	5.32
5900	35.2	5.376

REQUIREMENT

Per IEEE 1528, Section 8.2.1, "System checks are performed prior to compliance tests and the results must always be within $\pm 10\%$ of the target value corresponding to the test frequency, liquid, and the source used. The target values are 1 g or 10 g averaged SAR values measured on systems having current system validation and calibration status, and using the system check setup as shown in Figure 14. These target values should be determined using a standard source."

TEST DESCRIPTION


Within 24 hours of a measurement, then every 72 hours thereafter, Northwest EMC used the system validation kit (calibrated reference dipole) to test whether the system was operating within its specifications. The validation was performed in the indicated bands by making SAR measurements of the reference dipole with the phantom filled with the tissue-equivalent liquid. First, a signal generator and power amplifier were used to produce a 100mW level as measured with a power meter at the antenna terminals of the dipole. Then, the reference dipole was positioned below the bottom of the phantom and centered with its axis parallel to the longest side of the phantom. A low loss and low relative permittivity spacer was used to establish the correct distance between the center axis of the reference dipole and the liquid.

For the reference dipoles, the spacing distance s is given by:

$s = 15\text{mm}$, $\pm 0.2\text{mm}$ for $300\text{MHz} \leq f \leq 1000\text{MHz}$:

$s = 10\text{mm}$, $\pm 0.2\text{mm}$ for $1000\text{MHz} \leq f \leq 6000\text{MHz}$

The measured 1 g and 10 g spatial average SAR values were normalized to a 1W dipole input power for comparison to the calibration data. The results are summarized in the attached table. The deviation is less than 10% in all cases, indicating that the system performance check was within tolerance.

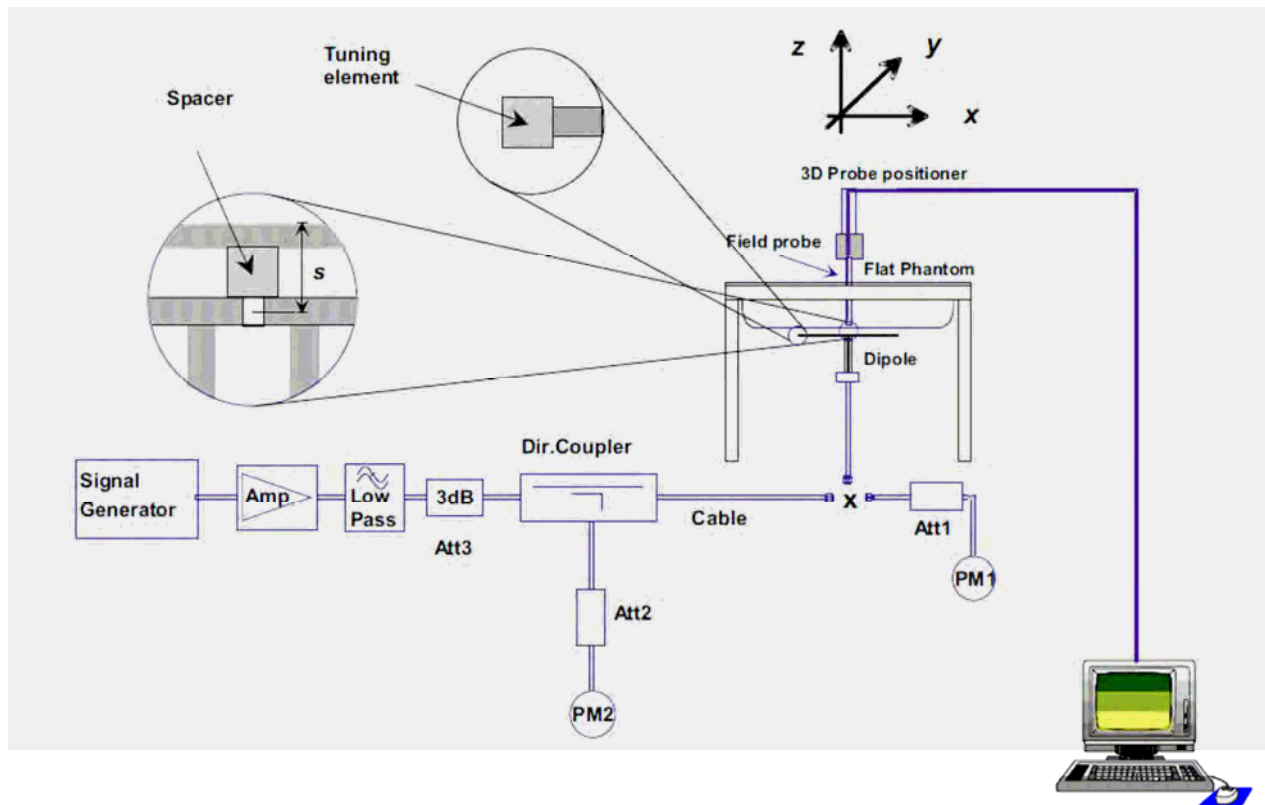

[illegible]

Tested By:	Ethan Schoonover	Room Temperature (°C):	20.8°C
Date:	12/18/2012	Liquid Temperature (°C):	20.6°C
Serial Number:	ADP	Humidity (%RH):	38%
Configuration:	N/A	Bar. Pressure (mb):	1017 mb
Comments:	None		

HSL900 System Check_900MHz 12-18-12

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:ADP

Communication System: CW; Communication System Band: D900 (900.0 MHz); Frequency: 900

MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.929 \text{ mho/m}$; $\epsilon_r = 39.591$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.453 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.698 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

System Check/System Check/Area Scan (71x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


System Check/System Check/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 37.88 V/m

Maximum value of SAR (measured) = 1.33 W/kg

 
Approved By

HSL900 System Check_900MHz 12-18-12

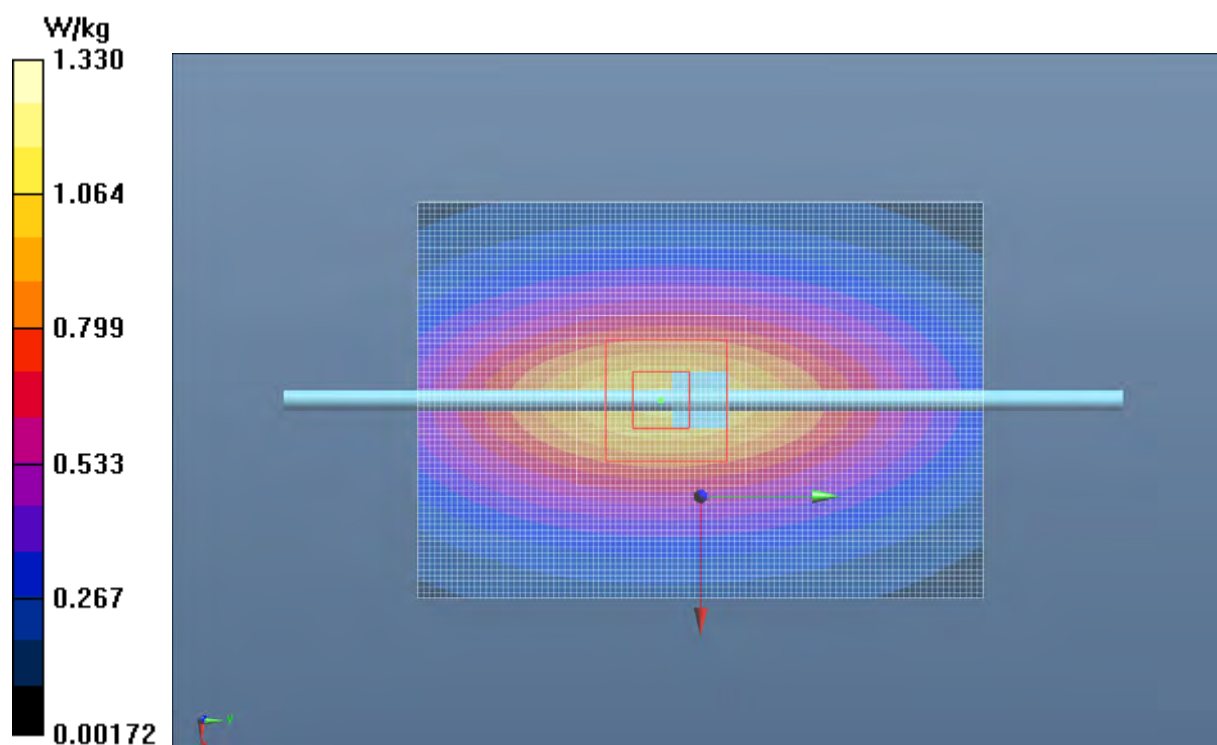

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.8°C
Date:	12/21/2012	Liquid Temperature (°C):	21.3°C
Serial Number:	ADP	Humidity (%RH):	38%
Configuration:	N/A	Bar. Pressure (mb):	1007 mb
Comments:	None		

MSL900 System Check_900MHz 12-21-12

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:ADP

Communication System: CW; Communication System Band: D900 (900.0 MHz); Frequency: 900

MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 900$ MHz; $\sigma = 1.065$ mho/m; $\epsilon_r = 52.757$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 33.41 V/m

System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.674 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.718 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

System Check/System Check/Area Scan (71x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm


Maximum value of SAR (interpolated) = 1.12 W/kg

Maximum value of SAR (measured) = 1.19 W/kg




Approved By

MSL900 System Check_900MHz 12-21-12

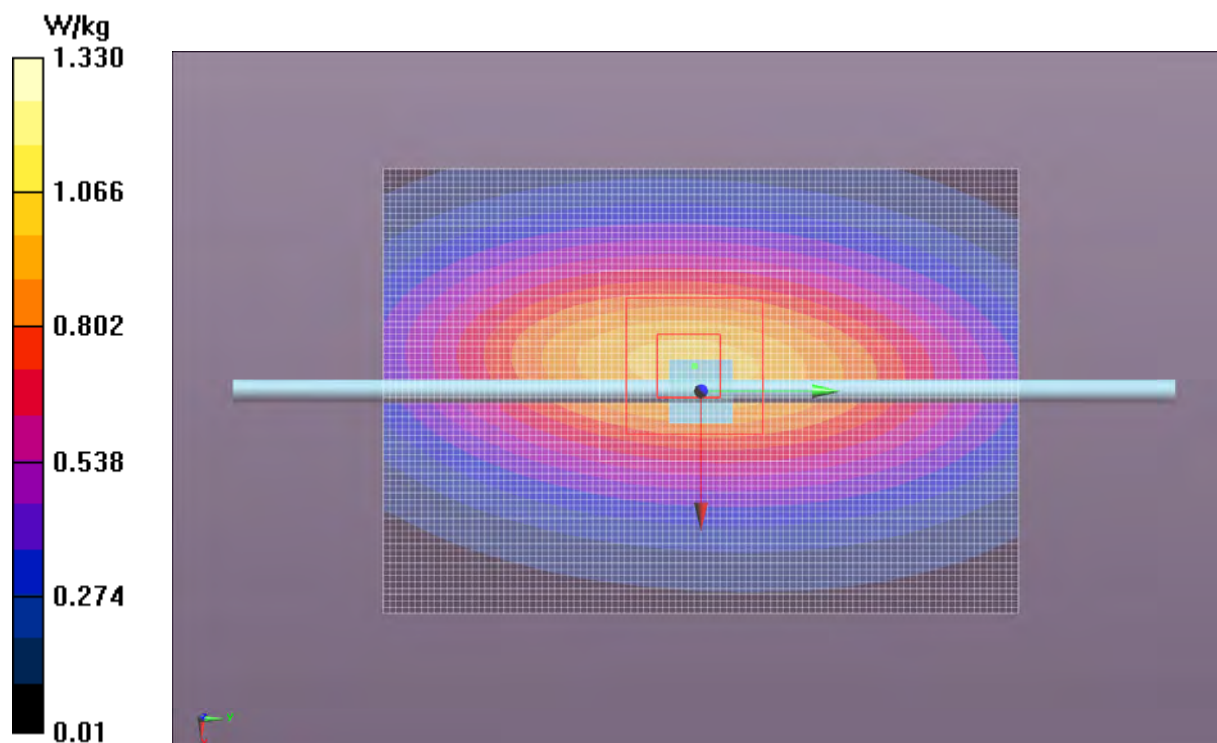

Tested By:	Ethan Schoonover	Room Temperature (°C):	23°C
Date:	12/21/2012	Liquid Temperature (°C):	21.8°C
Serial Number:	ADL	Humidity (%RH):	35%
Configuration:	N/A	Bar. Pressure (mb):	1007 mb
Comments:	None		

MSL2450 2450 12-21-12

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:ADL

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.957$ mho/m; $\epsilon_r = 50.358$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.08 W/kg

System Check/System Check/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 58.39 V/m

System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.898 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 9.63 W/kg


SAR(1 g) = 4.71 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 4.72 W/kg

Maximum value of SAR (measured) = 6.67 W/kg

 
Approved By

MSL2450 2450 12-21-12

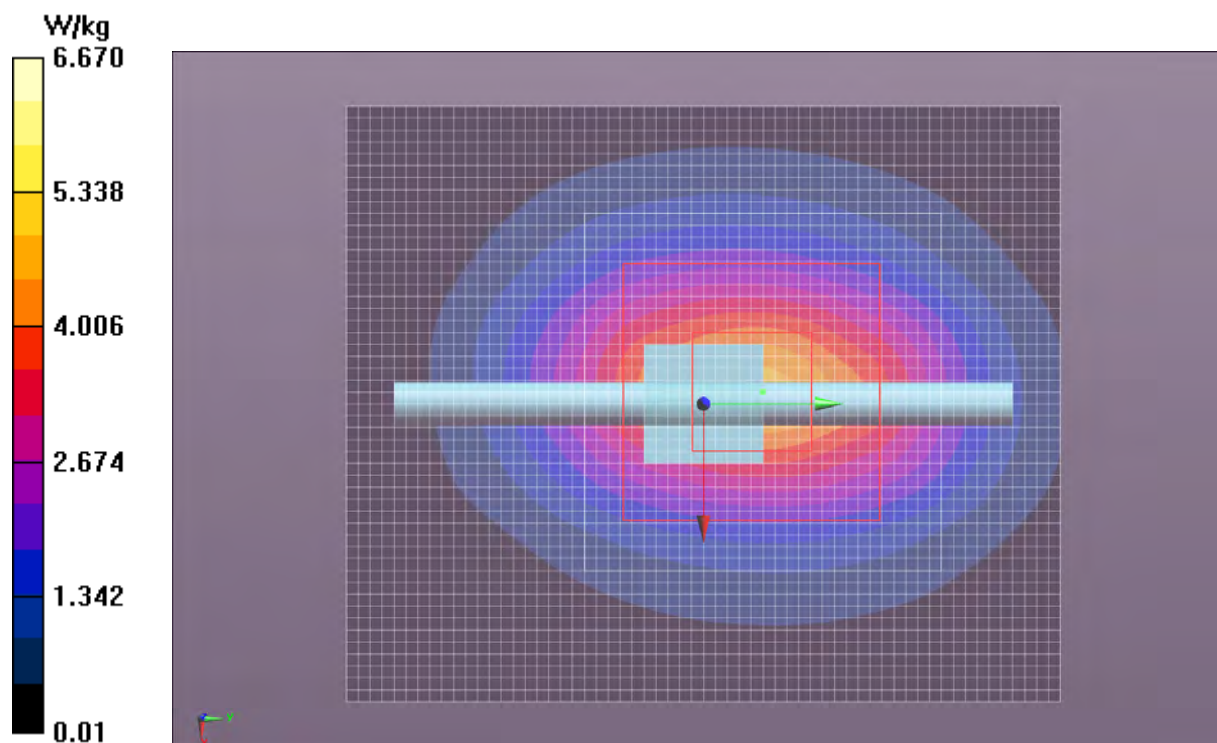

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.2°C
Date:	12/26/2012	Liquid Temperature (°C):	22.5°C
Serial Number:	ADL	Humidity (%RH):	41.4%
Configuration:	N/A	Bar. Pressure (mb):	1011 mb
Comments:	None		

HSL2450 2450 12-26-12

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: SN:ADL

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.884$ mho/m; $\epsilon_r = 38.543$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.29 W/kg

System Check/System Check/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 73.78 V/m

System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.845 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.31 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 5.16 W/kg

 
Approved By

HSL2450 2450 12-26-12

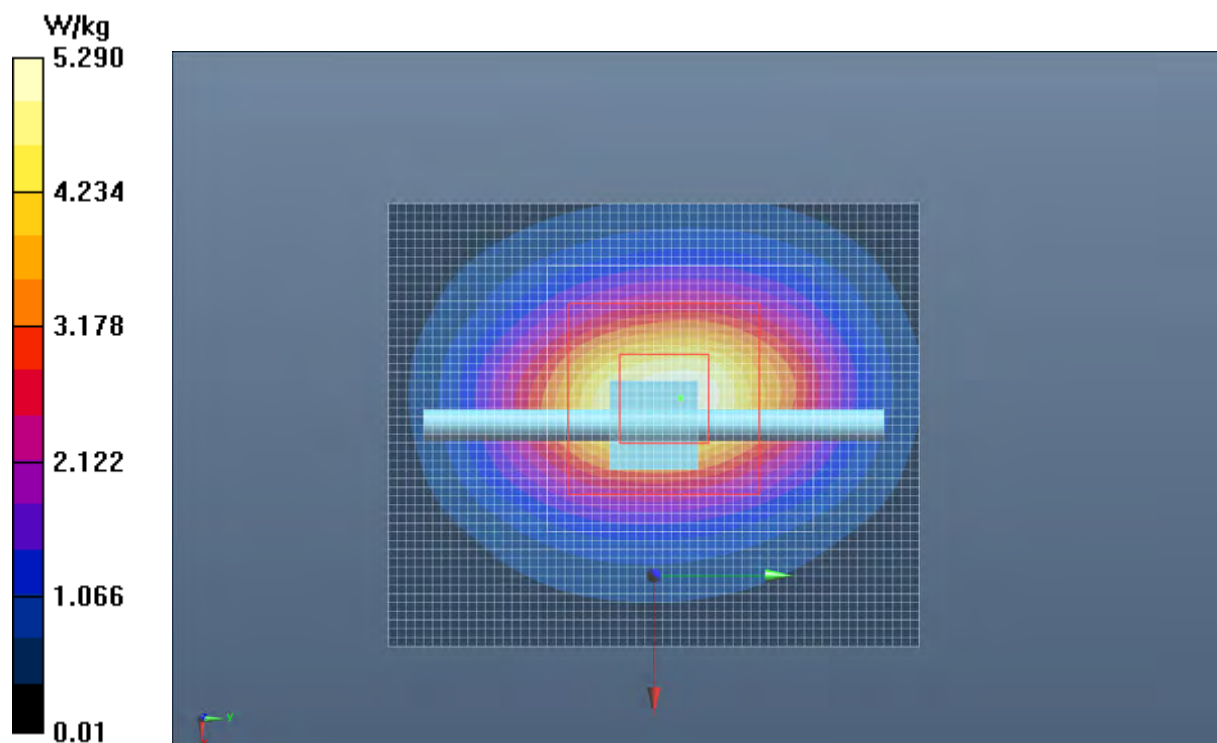

Tested By:	Ethan Schoonover	Room Temperature (°C):	23°C
Date:	12/26/2012	Liquid Temperature (°C):	22.1°C
Serial Number:	ADL	Humidity (%RH):	39.6%
Configuration:	N/A	Bar. Pressure (mb):	1011 mb
Comments:	None		

MSL2450 2450 12-26-12

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:ADL

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.957$ mho/m; $\epsilon_r = 50.358$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

System Check/System Check/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 34.00 V/m

System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.775 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.542 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

 
Approved By

MSL2450 2450 12-26-12

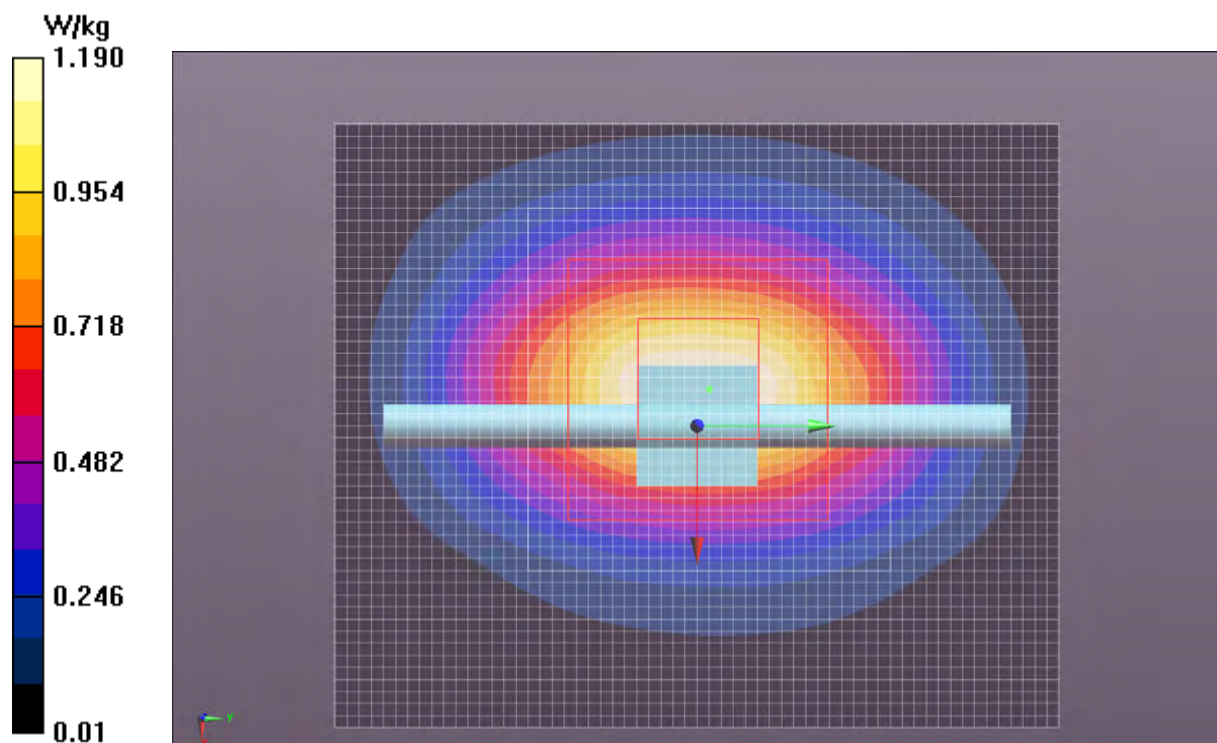

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.2°C
Date:	12/28/2012	Liquid Temperature (°C):	22.7°C
Serial Number:	ADM	Humidity (%RH):	32%
Configuration:	N/A	Bar. Pressure (mb):	1021 mb
Comments:	None		

MSL501 5200 12-28-12

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:ADM

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.383$ mho/m; $\epsilon_r = 47.336$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - Low Channel/Zoom Scan (7x9x7) (7x7x9)/Cube 0: Measurement grid:

$dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 55.546 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

System Check/System Check - Low Channel/Area Scan (51x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 16.5 W/kg

System Check/System Check - Low Channel/Z Scan (1x1x21): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm


Maximum value of Total (measured) = 24.97 V/m

Maximum value of SAR (measured) = 3.36 W/kg




Approved By

MSL501 5200 12-28-12

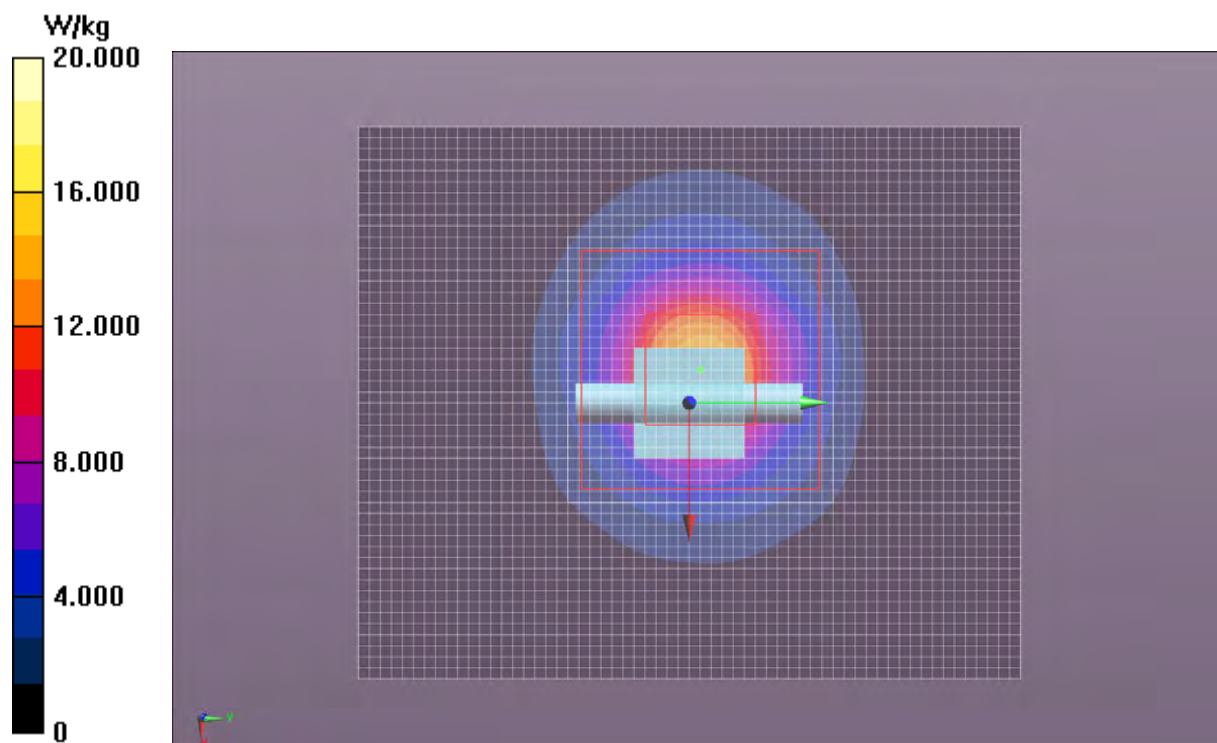

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.2°C
Date:	12/28/2012	Liquid Temperature (°C):	22.7°C
Serial Number:	ADM	Humidity (%RH):	32%
Configuration:	N/A	Bar. Pressure (mb):	1021 mb
Comments:	None		

MSL501 5500 12-28-12

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:ADM

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5500 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.771$ mho/m; $\epsilon_r = 46.799$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - Mid Channel/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.2 W/kg

System Check/System Check - Mid Channel/Zoom Scan (7x9x7) (7x7x9)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 56.912 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 8.37 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

System Check/System Check - Mid Channel/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm


Maximum value of Total (measured) = 24.26 V/m

Maximum value of SAR (measured) = 3.40 W/kg




Approved By

MSL501 5500 12-28-12

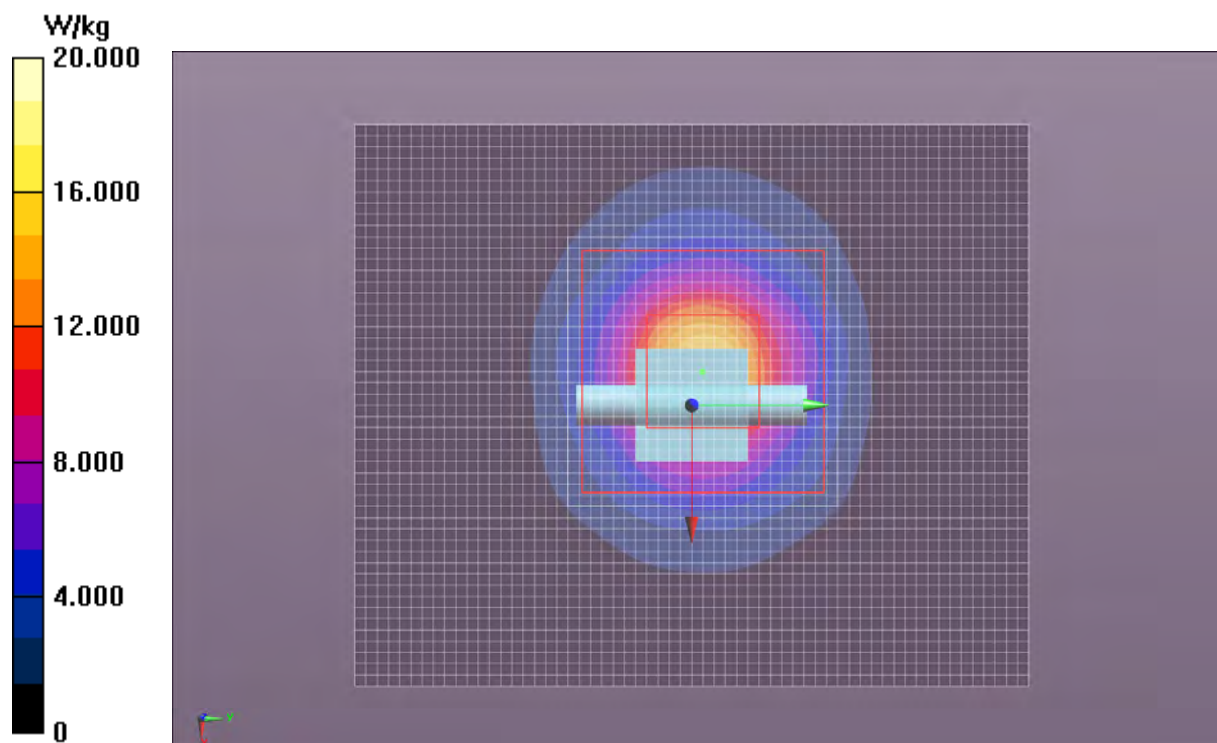

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.2°C
Date:	12/28/2012	Liquid Temperature (°C):	22.7°C
Serial Number:	ADM	Humidity (%RH):	32%
Configuration:	N/A	Bar. Pressure (mb):	1021 mb
Comments:	None		

MSL501 5800 12-28-12

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:ADM

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.166$ mho/m; $\epsilon_r = 46.183$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - High Channel/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.4 W/kg

System Check/System Check - High Channel/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 41.81 V/m

System Check/System Check - High Channel/Zoom Scan (7x9x7) (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 41.369 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 7.11 W/kg; SAR(10 g) = 2 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

Maximum value of SAR (measured) = 10.8 W/kg




Approved By

MSL501 5800 12-28-12



Tested By:	Ethan Schoonover	Room Temperature (°C):	23.8°C
Date:	1/2/2013	Liquid Temperature (°C):	21°C
Serial Number:	ADM	Humidity (%RH):	23%
Configuration:	N/A	Bar. Pressure (mb):	1027 mb
Comments:	None		

HSL501 5200 1-2-13

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:ADM

Communication System: CW; Communication System Band: ITD5500 (5000.0 - 5900.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5200$ MHz; $\sigma = 4.603$ mho/m; $\epsilon_r = 36.308$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - Low Channel/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 63.98 V/m

System Check/System Check - Low Channel/Zoom Scan (8x8x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 60.083 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.24 W/kg


Maximum value of SAR (measured) = 16.0 W/kg

System Check/System Check - Low Channel/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.6 W/kg

 
Approved By

HSL501 5200 1-2-13

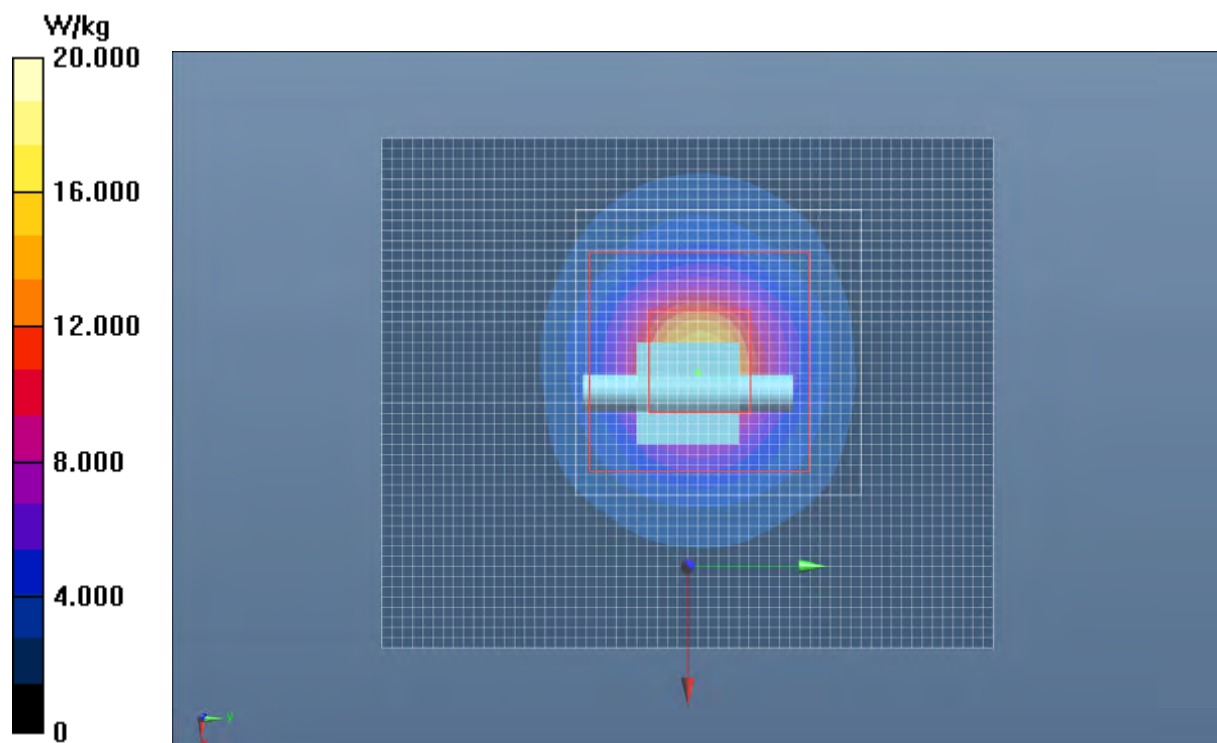

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.8°C
Date:	1/8/2013	Liquid Temperature (°C):	21.2°C
Serial Number:	ADM	Humidity (%RH):	41%
Configuration:	N/A	Bar. Pressure (mb):	1017 mb
Comments:	None		

HSL501 5200 1-8-13

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx

Communication System: CW; Communication System Band: ITD5500 (5000.0 - 5900.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5200$ MHz; $\sigma = 4.603$ mho/m; $\epsilon_r = 36.308$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - Low Channel/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 64.38 V/m

System Check/System Check - Low Channel/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 63.316 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 16.3 W/kg

System Check/System Check - Low Channel/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm


Maximum value of SAR (interpolated) = 16.8 W/kg

Maximum value of SAR (measured) = 19.1 W/kg




Approved By

HSL501 5200 1-8-13

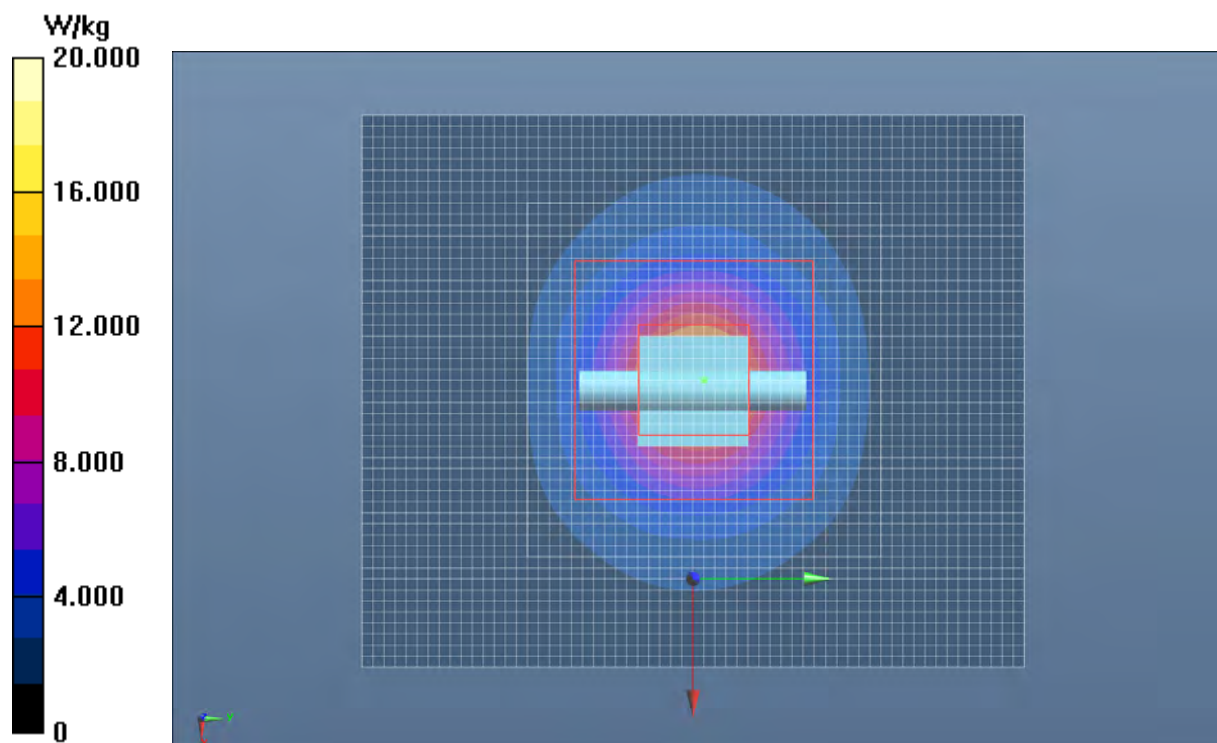

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.8°C
Date:	1/8/2013	Liquid Temperature (°C):	21.2°C
Serial Number:	ADM	Humidity (%RH):	41%
Configuration:	N/A	Bar. Pressure (mb):	1017 mb
Comments:	None		

HSL501 5500 1-8-13

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx

Communication System: CW; Communication System Band: ITD5500 (5000.0 - 5900.0 MHz); Frequency: 5500 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.929$ mho/m; $\epsilon_r = 35.817$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - Mid Channel/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.5 W/kg

System Check/System Check - Mid Channel/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 62.30 V/m

System Check/System Check - Mid Channel/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 65.562 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 37.4 W/kg

SAR(1 g) = 8.7 W/kg; SAR(10 g) = 2.5 W/kg

Maximum value of SAR (measured) = 18.4 W/kg

 
Approved By

HSL501 5500 1-8-13

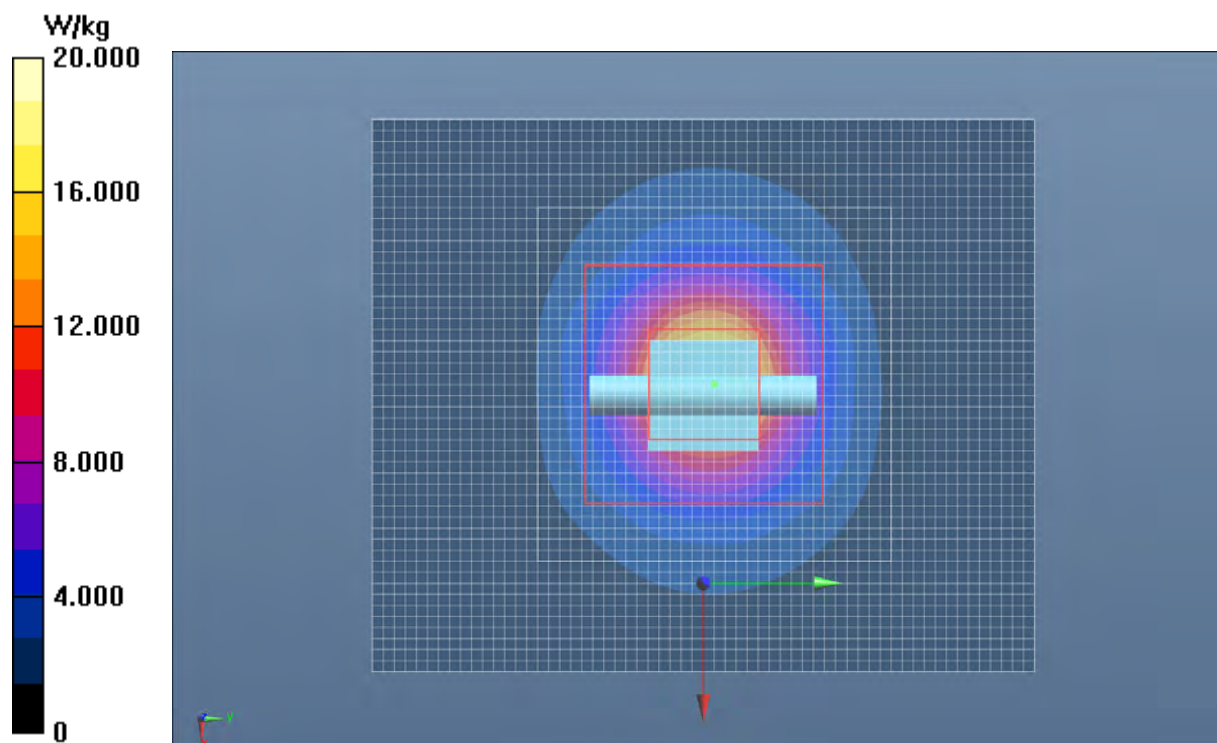

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.8°C
Date:	1/8/2013	Liquid Temperature (°C):	20.7°C
Serial Number:	ADM	Humidity (%RH):	44%
Configuration:	N/A	Bar. Pressure (mb):	1017 mb
Comments:	None		

HSL501 5800 1-8-13, 2

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:xxx

Communication System: CW; Communication System Band: ITD5500 (5000.0 - 5900.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5800$ MHz; $\sigma = 5.261$ mho/m; $\epsilon_r = 35.318$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check - High Channel/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 67.47 V/m

System Check/System Check - High Channel/Area Scan (51x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.7 W/kg

System Check/System Check - High Channel/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 61.621 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 38.5 W/kg

SAR(1 g) = 8.61 W/kg; SAR(10 g) = 2.47 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

 
Approved By

HSL501 5800 1-8-13, 2

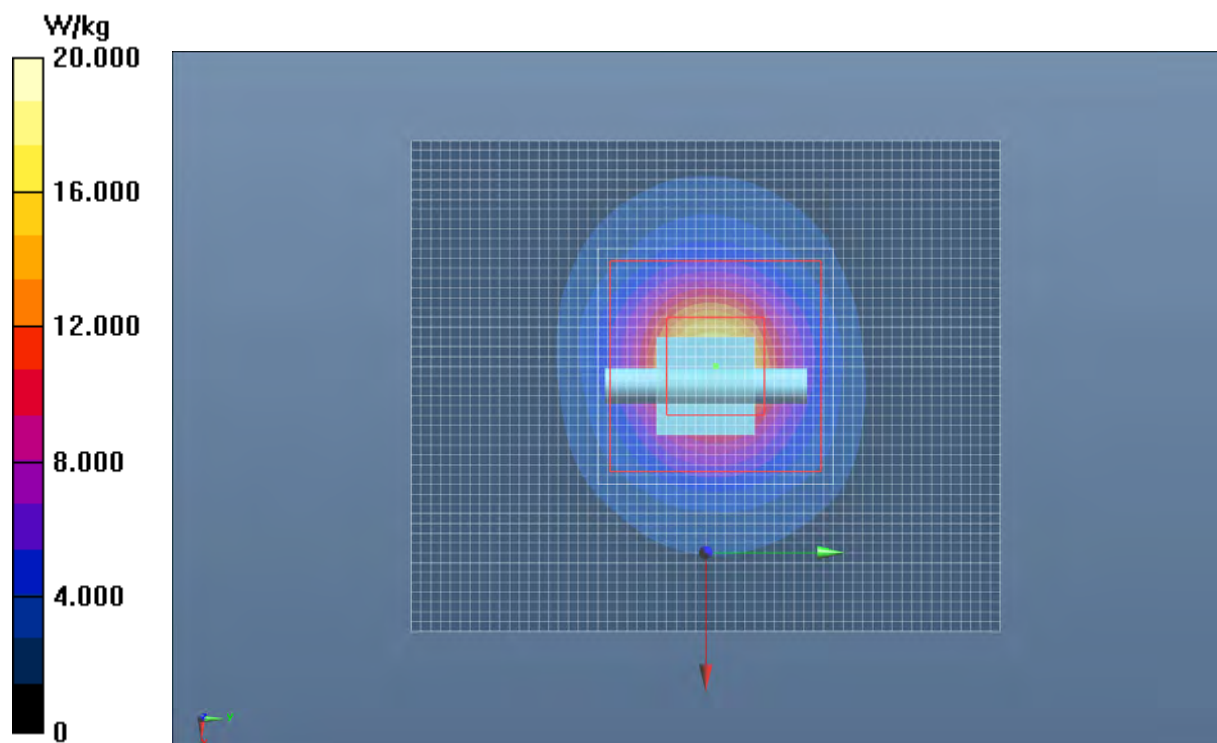

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.1°C
Date:	1/8/2013	Liquid Temperature (°C):	21.5°C
Serial Number:	ADM	Humidity (%RH):	44%
Configuration:	N/A	Bar. Pressure (mb):	1017 mb
Comments:	None		

HSL900 System Check_900MHz 1-8-13

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:xxx

Communication System: CW; Communication System Band: D900 (900.0 MHz); Frequency: 900

MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.929 \text{ mho/m}$; $\epsilon_r = 39.591$; $\rho = 1000 \text{ kg/m}^3$, Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

System Check/System Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.813 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.681 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

System Check/System Check/Area Scan (71x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm


Maximum value of SAR (interpolated) = 1.05 W/kg

System Check/System Check/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 37.40 V/m

 
Approved By

HSL900 System Check_900MHz 1-8-13

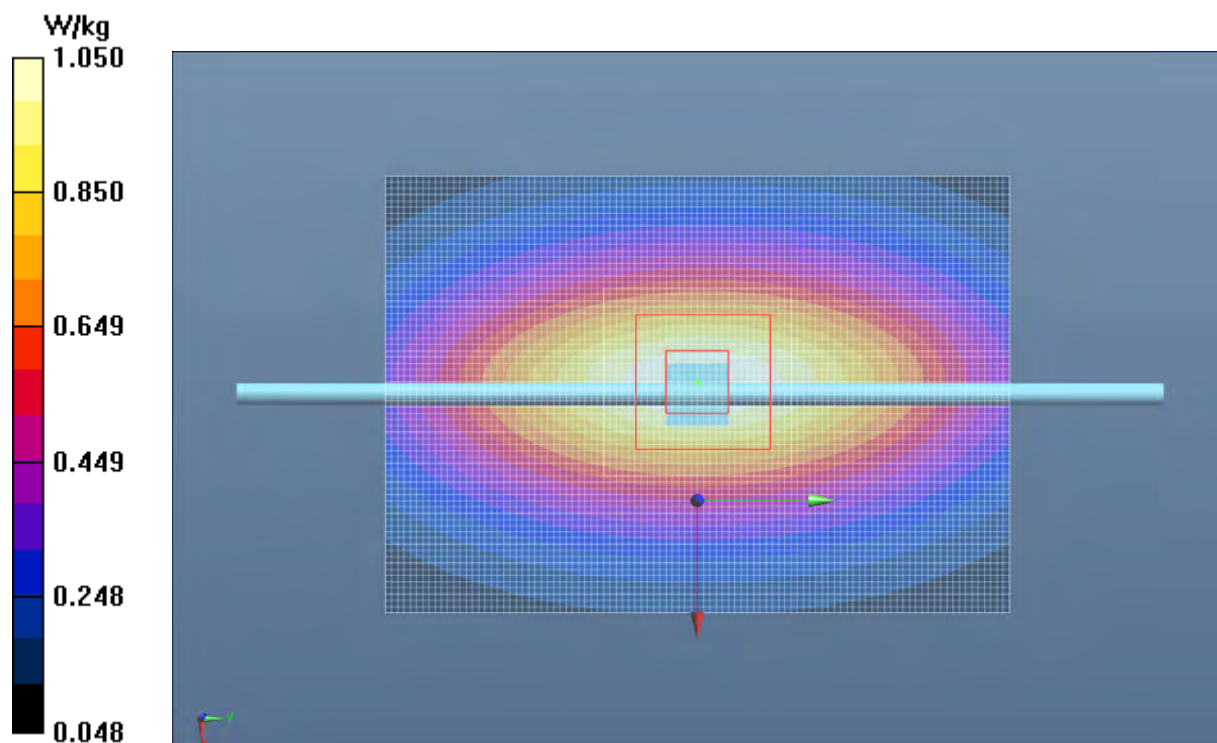

Test Configurations

In normal operation, the EUT can be held in the hand, or next to the head like a cellular handset, or worn on the body. The only Intermec approved accessory for body worn operation is a holster that contains metal. The EUT can only fit in the holster with the top end of the unit pointing down. The holster cup can be attached to the holster belt with either the keypad facing the user, or the side facing the user. In no case can the back of the EUT face the user.

The 802.11a/b/g/n antenna is on the right side of the handheld computer and the RFID antenna is on the left side. The holster provides a minimum spacing of 1.2 cm from any side of the EUT to the flat phantom

An optional snap-on audio accessory is available. It connects to the bottom end of the unit and provides a standard audio jack for connection of a VR10 headset. Measurements were made with the headset.

The EUT is powered by a lithium-ion battery, Model 1001AB01. It was fully charged before each SAR evaluation.

Per KDB 248227, among the channels required for normal testing, SAR must be measured on the highest conducted output channel in each band (see highlighted values in the Output Power section of this report). Where the measured SAR on the highest output channel is $> 0.8 \text{ W/kg}$, SAR evaluation for the other channels was performed (reference also KDB 447498 Section 4.3.3).

Duty Factor

All testing was performed with the EUT configured in a worst – case configuration and operating mode to produce the highest SAR levels. The EUT used Intermec test software that permitted the selection of transmit channel, modulation type, and data rate. Both radio modules operated continuously at nearly 100% duty cycle at the maximum rated power.

In normal operation, the Intermec IM11 radio module is a RFID reader supporting only EPC Gen 2 (PR-ASK) operation. Dave Fry, Sr. EMC Engineer at Intermec, attests that the maximum duty cycle is 50%:

“The IM11 module firmware always establishes a maximum 50% on/off transmitter duty cycle.”

Per KDB 447498, Section 6.3, duty factor scaling was applied to the RFID data only. SAR was measured at 100% duty factor, then a scaling factor of 0.5 was applied to the measured SAR values.

Summary

The following tables summarize the measured SAR values.

EUT:	1001CP01F9	Work Order:	ITRM0333
Customer:	Intermec Technologies Corporation	Job Site:	EV08
Attendees:	None	Customer Project:	None

TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v05 FCC KDB 248227 D01 V01r02 FCC KDB 648474 D04 V01 FCC 865664 D01 and D02

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

None

RESULTS

Test Configuration	Side of Head	EUT Position	Headset	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	Data Rate (Mbps)	Modulation	Power Drift During Test (dB)	Measured 1g SAR Level (mW/g)	Test #
Head	Left	Touch	No	2.4	2462	11	1	BPSK	0	0.084	15
Head	Left	Tilt	No	2.4	2462	11	1	BPSK	0.07	0.086	16
Head	Right	Touch	No	2.4	2462	11	1	BPSK	0.21	0.048	17
Head	Right	Tilt	No	2.4	2462	11	1	BPSK	0	0.062	18

Tested By:	Carl Engholm	Room Temperature (°C):	24.3
Date:	12/26/2012	Liquid Temperature (°C):	20.6
Serial Number:	8721244013	Humidity (%RH):	34
Configuration:	12	Bar. Pressure (mb):	1015
Comments:	None		

Test 15

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2462

MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.908$ mho/m; $\epsilon_r = 37.862$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 5.161 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.123 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.111 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.025 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.043 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.107 W/kg

Maximum value of SAR (measured) = 0.0508 W/kg

Approved By

Test 15

W/kg

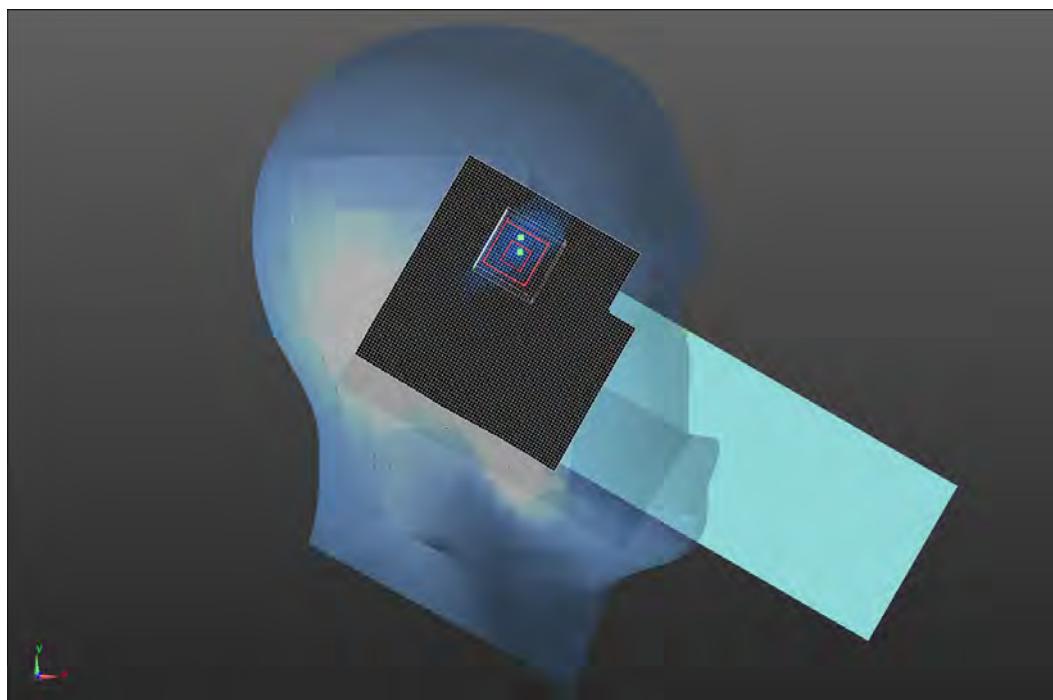

Tested By:	Carl Engholm	Room Temperature (°C):	24.5
Date:	12/26/2012	Liquid Temperature (°C):	20.7
Serial Number:	8721244013	Humidity (%RH):	32
Configuration:	12	Bar. Pressure (mb):	1015
Comments:	None		

Test 16

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.908$ mho/m; $\epsilon_r = 37.862$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS2 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0890 W/kg

Head/Tilt - Mid/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.954 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.045 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.109 W/kg

Head/Tilt - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 5.156 V/m

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.108 W/kg



Maximum value of SAR (measured) = 0.0507 W/kg




Approved By

Test 16

W/kg

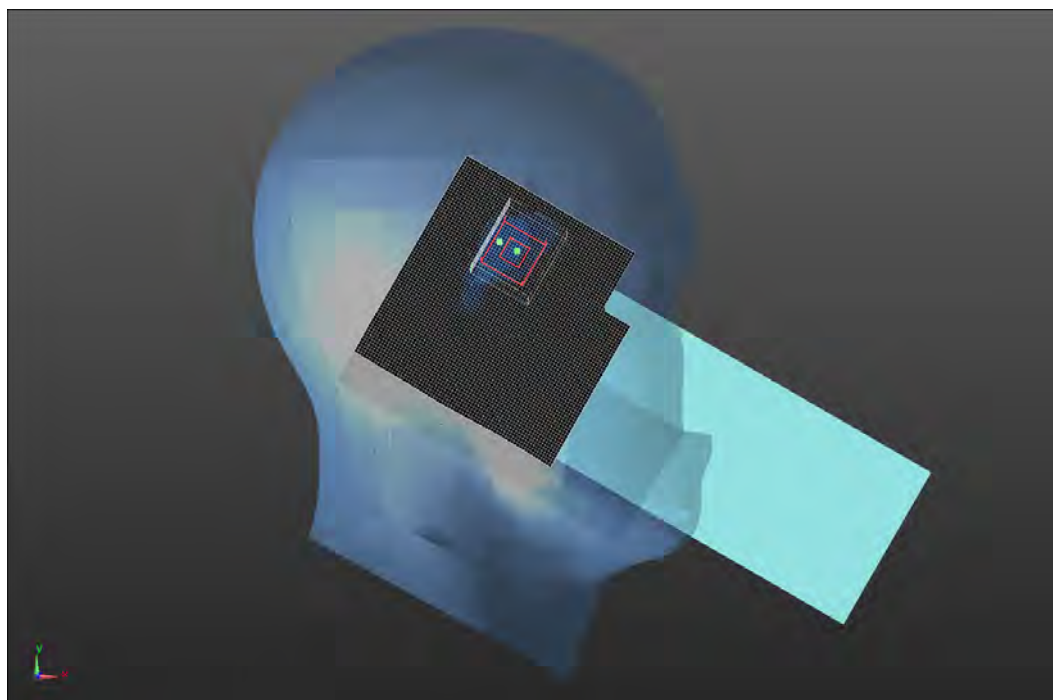

Tested By:	Carl Engholm	Room Temperature (°C):	24.3
Date:	12/26/2012	Liquid Temperature (°C):	20.7
Serial Number:	8721244013	Humidity (%RH):	33
Configuration:	12	Bar. Pressure (mb):	1015
Comments:	None		

Test 17

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.908$ mho/m; $\epsilon_r = 37.862$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 3.959 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0667 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0680 W/kg

Head/Cheek - Mid/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.687 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.027 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0588 W/kg

Maximum value of SAR (measured) = 0.0299 W/kg

 
Approved By

Test 17

W/kg

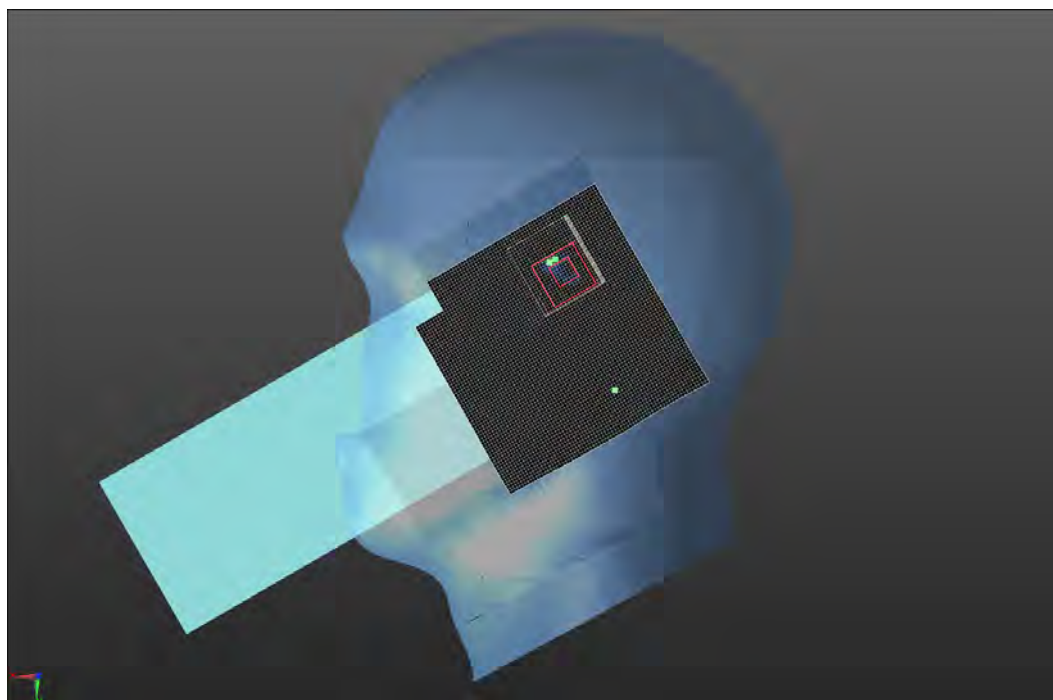

Tested By:	Ethan Schoonover	Room Temperature (°C):	23
Date:	12/27/2012	Liquid Temperature (°C):	22.2
Serial Number:	8721244013	Humidity (%RH):	32
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 18

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.908$ mho/m; $\epsilon_r = 37.862$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x101x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0679 W/kg

Head/Tilt - Mid/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.969 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.033 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0752 W/kg

Head/Tilt - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 4.705 V/m

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0905 W/kg



Maximum value of SAR (measured) = 0.0422 W/kg





Approved By

Test 18

W/kg

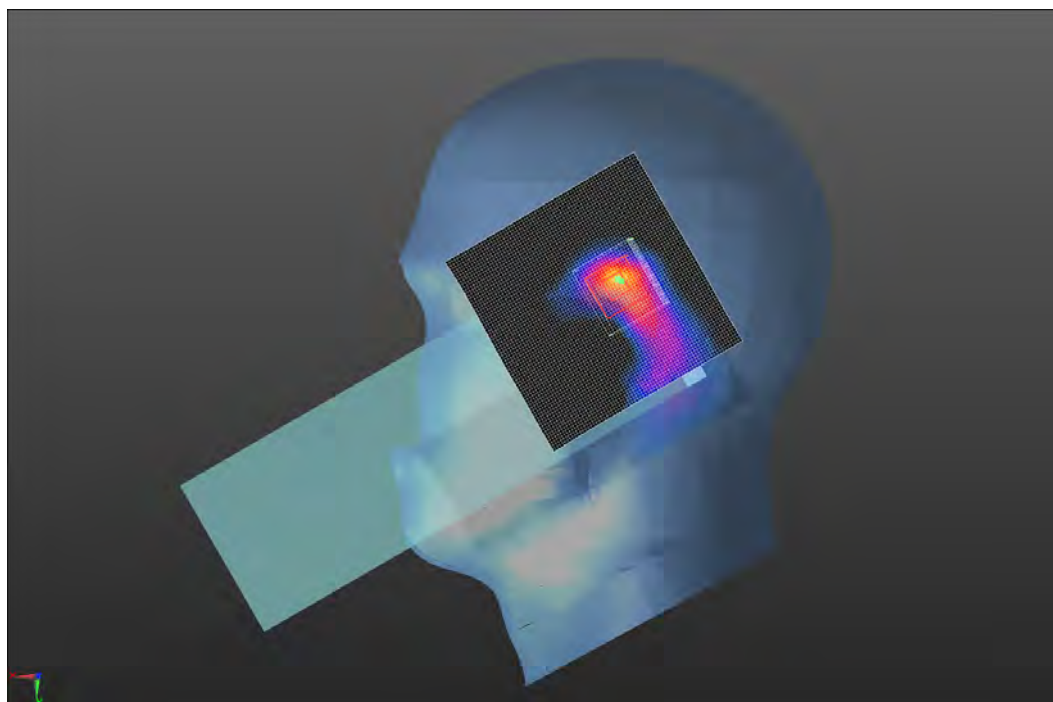

Test 16

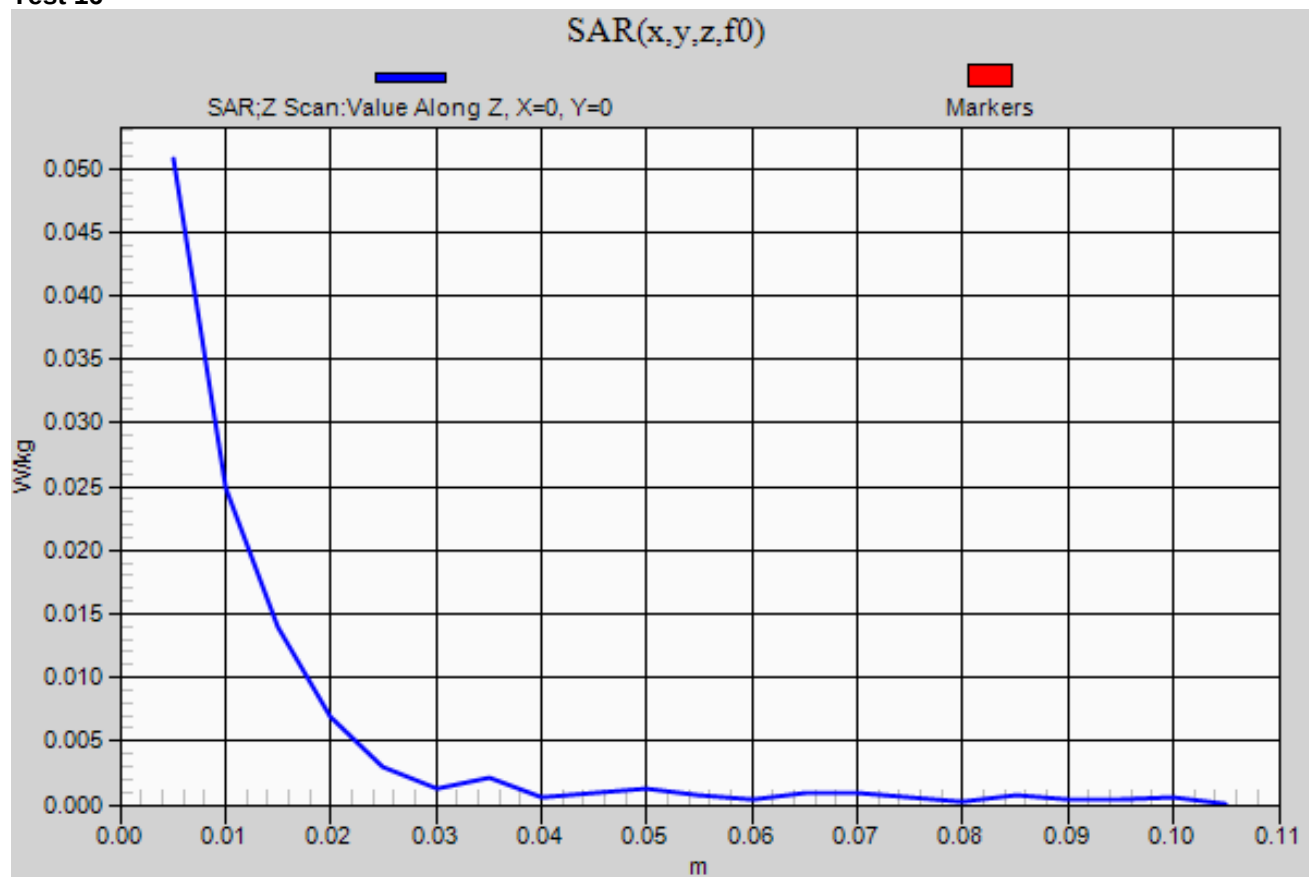

SAR TEST DATA

EUT:	1001CP01F9	Work Order:	ITRM0333
Customer:	Intermec Technologies Corporation	Job Site:	EV08
Attendees:	None	Customer Project:	None

TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v05 FCC KDB 248227 D01 V01r02 FCC KDB 648474 D04 V01 FCC 865664 D01 and D02

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

None

RESULTS

Test Configuration	EUT Position	Body Worn Accessory	Headset	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	Data Rate (Mbps)	Modulation	Power Drift During Test (dB)	Measured 1g SAR Level (mW/g)	Test #
Body	Right	Holster	Yes	2.4	2462	11	1	BPSK	0.05	0.306	5
Body	Front	Holster	Yes	2.4	2462	11	1	BPSK	0.4	0.014	6

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.1
Date:	12/26/2012	Liquid Temperature (°C):	21.9
Serial Number:	8721244013	Humidity (%RH):	36.4
Configuration:	11	Bar. Pressure (mb):	1011
Comments:	None		

Test 5

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.002$ mho/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (51x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.264 W/kg

Body/Body/Area scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.355 W/kg

Body/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.290 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.156 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.383 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 10.36 V/m



Maximum value of SAR (measured) = 0.215 W/kg




Approved By

Test 5

W/kg

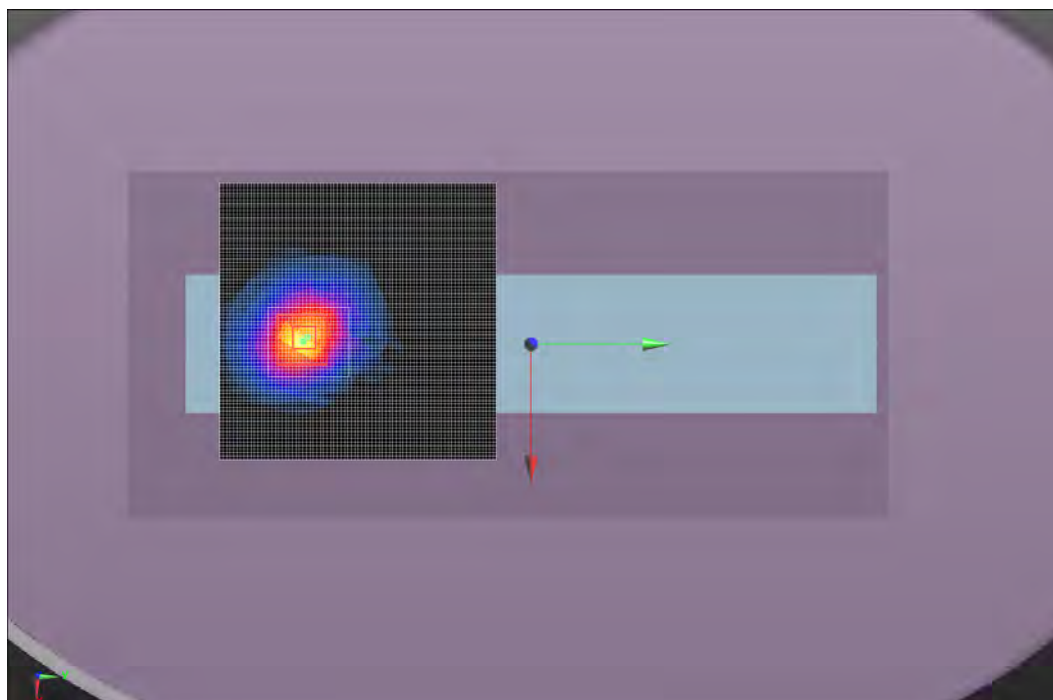

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.4
Date:	12/26/2012	Liquid Temperature (°C):	22.1
Serial Number:	8721244013	Humidity (%RH):	39.6
Configuration:	11	Bar. Pressure (mb):	1011
Comments:	None		

Test 6

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 2.002$ mho/m; $\epsilon_r = 51.642$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (51x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0312 W/kg

Body/Body/Area scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0332 W/kg

Body/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.138 V/m; Power Drift = 0.40 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00949 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0167 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of Total (measured) = 2.564 V/m

Maximum value of SAR (measured) = 0.0132 W/kg





Approved By

Test 6

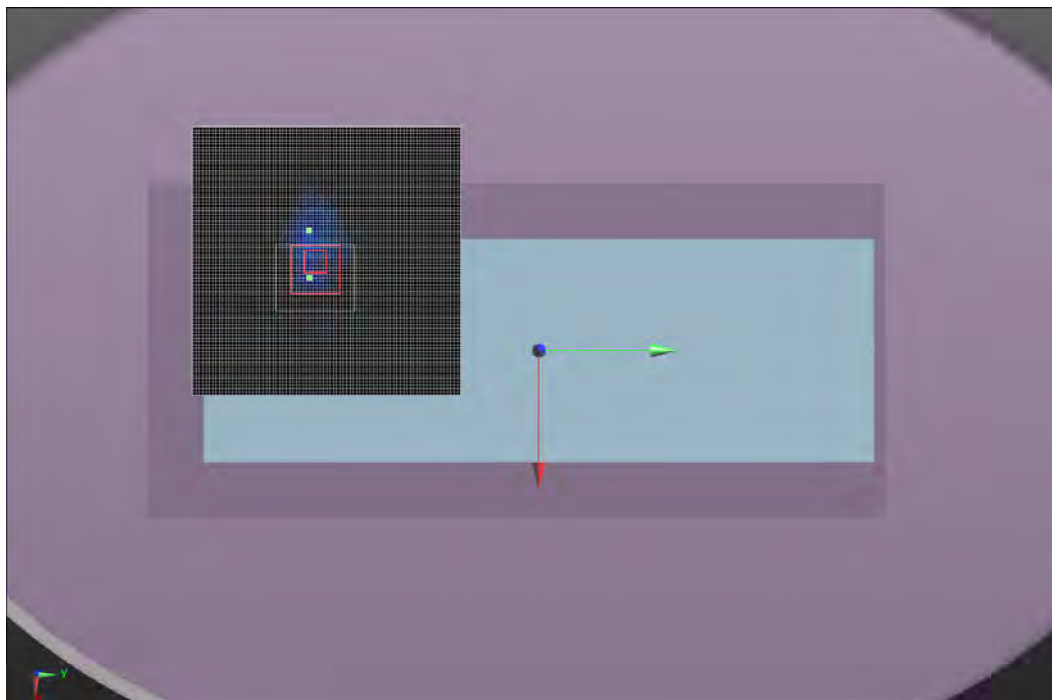

Test 5

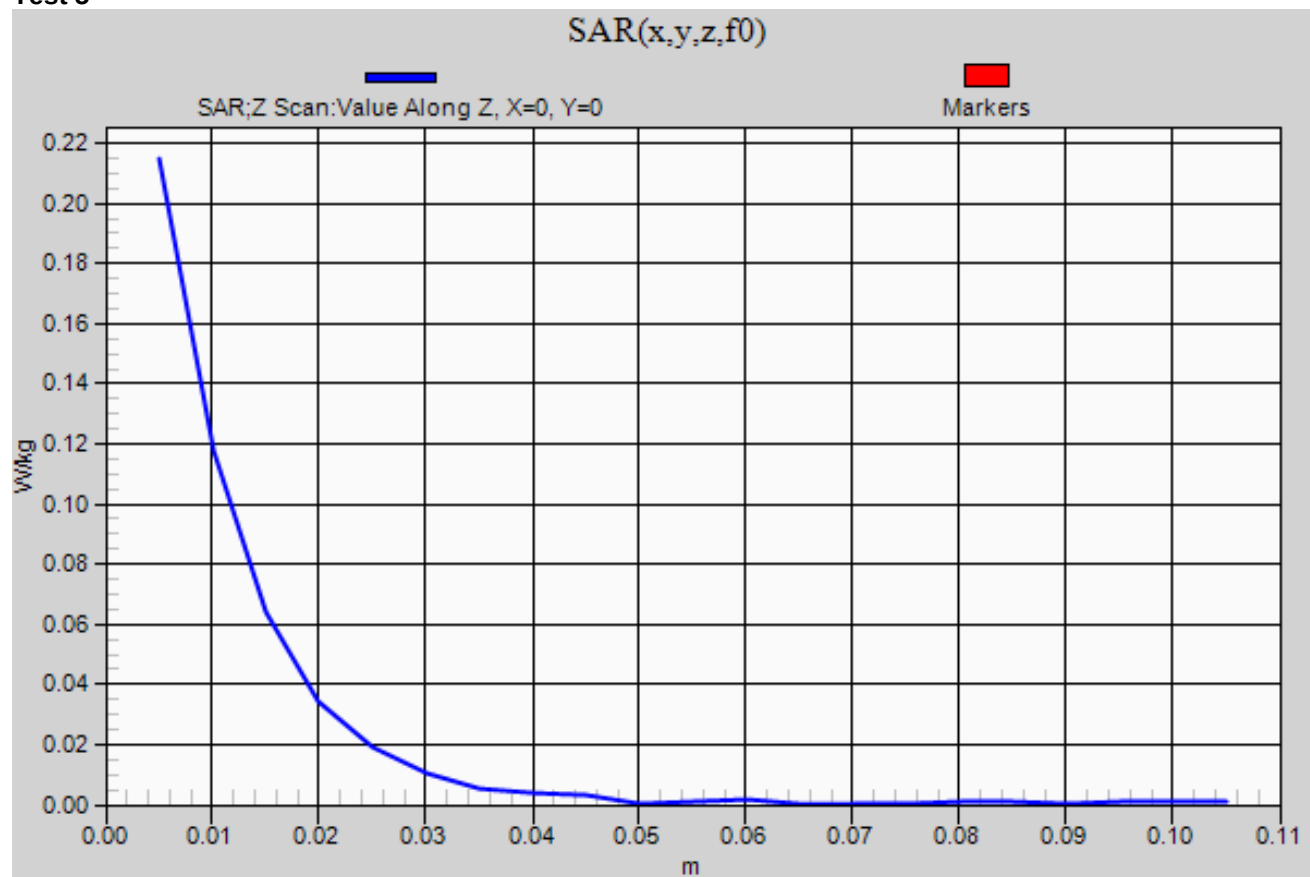

SAR TEST DATA

EUT:	1001CP01F9	Work Order:	ITRM0333
Customer:	Intermec Technologies Corporation	Job Site:	EV08
Attendees:	None	Customer Project:	None

TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v05 FCC KDB 248227 D01 V01r02 FCC KDB 648474 D04 V01 FCC 865664 D01 and D02

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

None

RESULTS

Test Configuration	Side of Head	EUT Position	Headset	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	Data Rate (Mbps)	Modulation	Power Drift During Test (dB)	Measured 1g SAR Level (mW/g)	Test #
Head	Left	Touch	No	5.2	5200	40	6	OFDM	0.5	0.043	75
Head	Left	Tilt	No	5.2	5200	40	6	OFDM	Note 2	Note 1	76
Head	Right	Touch	No	5.2	5200	40	6	OFDM	0.32	0.011	77
Head	Right	Tilt	No	5.2	5200	40	6	OFDM	Note 2	Note 1	78
Head	Left	Touch	No	5.3	5260	52	6	OFDM	-0.2	0.07	79
Head	Left	Tilt	No	5.3	5260	52	6	OFDM	Note 2	Note 1	80
Head	Right	Touch	No	5.3	5260	52	6	OFDM	-1.05	0.021	81
Head	Right	Tilt	No	5.3	5260	52	6	OFDM	Note 2	Note 1	82
Head	Left	Touch	No	5.6	5680	136	6	OFDM	0.11	0.063	83
Head	Left	Tilt	No	5.6	5680	136	6	OFDM	Note 2	Note 1	84
Head	Right	Touch	No	5.6	5680	136	6	OFDM	0.6	0.027	85
Head	Right	Tilt	No	5.6	5680	136	6	OFDM	Note 2	Note 1	86
Head	Left	Touch	No	5.8	5745	149	6	OFDM	0.12	0.036	87
Head	Left	Tilt	No	5.8	5745	149	6	OFDM	Note 2	Note 1	88
Head	Right	Touch	No	5.8	5745	149	6	OFDM	0.24	0.0098	89
Head	Right	Tilt	No	5.8	5745	149	6	OFDM	Note 2	Note 1	90

Note 1: Zoom scan measurement was not performed because the area scan results were less than 0.1 mW/g

Note 2: Power drift measurement was not performed because the area scan results were less than 0.1 mW/g

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.8
Date:	1/8/2013	Liquid Temperature (°C):	22.8
Serial Number:	8721244013	Humidity (%RH):	34.6
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 75

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5200$ MHz; $\sigma = 4.603$ mho/m; $\epsilon_r = 36.308$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 1.662 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

Maximum value of SAR (interpolated) = 0.0336 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.103 W/kg

Head/Cheek - Mid/Zoom Scan (9x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.598 V/m; Power Drift = 0.50 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0569 W/kg



Maximum value of SAR (measured) = 0.0127 W/kg

Approved By

Test 75

W/kg

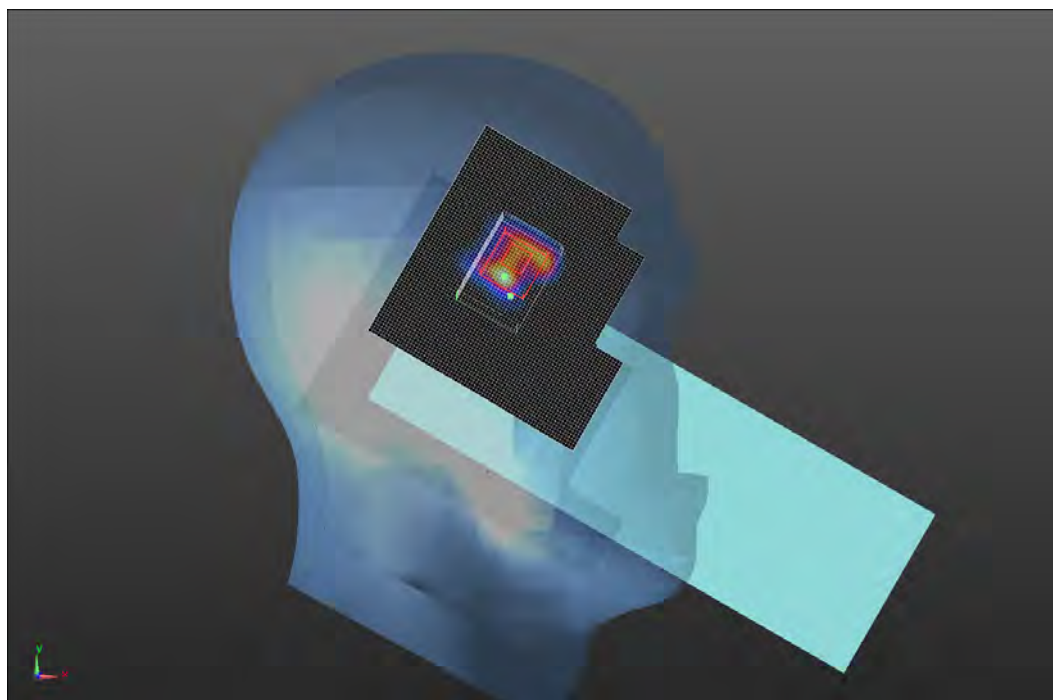

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.8
Date:	1/8/2013	Liquid Temperature (°C):	22.8
Serial Number:	8721244013	Humidity (%RH):	34.6
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 76

DUT: CK70; Type: 1001CP01F9, Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.603$ mho/m; $\epsilon_r = 36.308$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x81x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

Maximum value of SAR (interpolated) = 0.0323 W/kg



Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0385 W/kg

 
Approved By

Test 76

W/kg

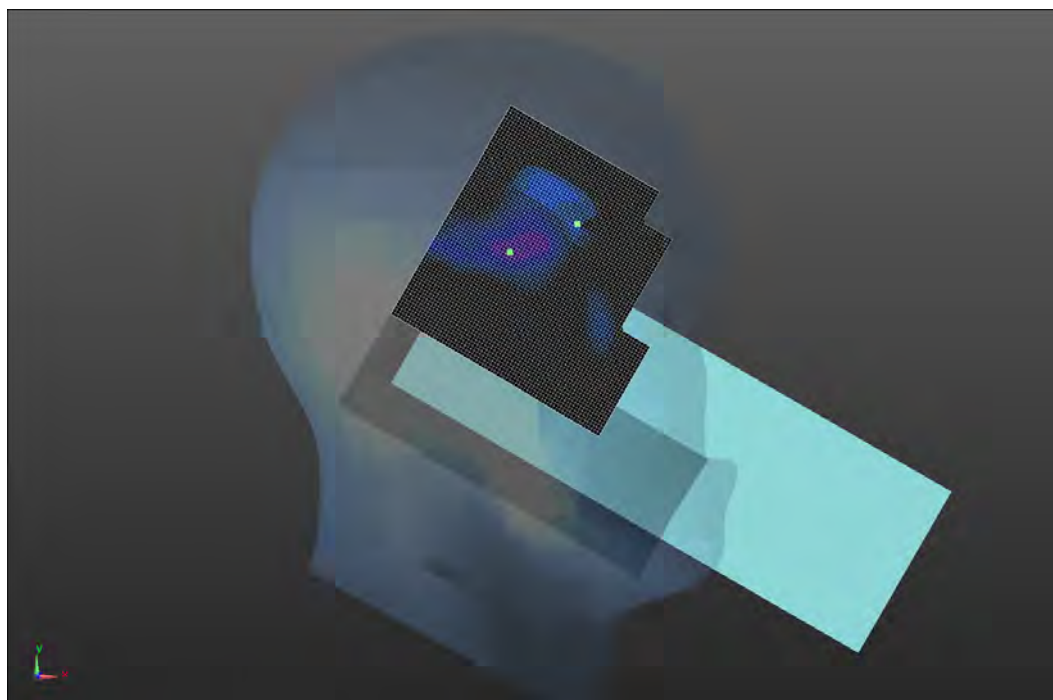

Tested By:	Carl Engholm	Room Temperature (°C):	23.8
Date:	1/7/2013	Liquid Temperature (°C):	21.3
Serial Number:	8721244013	Humidity (%RH):	39
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 77

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5200$ MHz; $\sigma = 4.603$ mho/m; $\epsilon_r = 36.308$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 1.518 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

Maximum value of SAR (interpolated) = 0.0352 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0409 W/kg

Head/Cheek - Mid/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.756 V/m; Power Drift = 0.32 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00404 W/kg



Maximum value of SAR (measured) = 0.0231 W/kg




Approved By

Test 77

W/kg

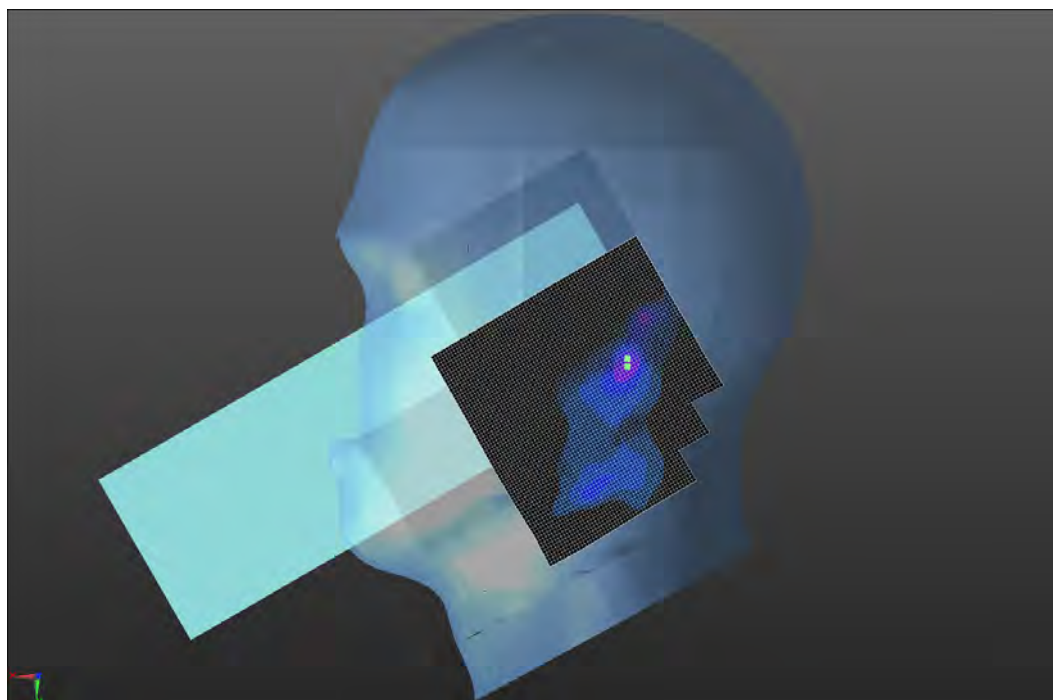

Tested By:	Carl Engholm	Room Temperature (°C):	23.7
Date:	1/7/2013	Liquid Temperature (°C):	21.3
Serial Number:	8721244013	Humidity (%RH):	39
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 78

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.603$ mho/m; $\epsilon_r = 36.308$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

Maximum value of SAR (interpolated) = 0.00390 W/kg

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0474 W/kg

Head/Tilt - Mid/Area scan (8x8x1): Measurement grid: dx=15mm, dy=15mm



Maximum value of SAR (measured) = 0.0450 W/kg



Approved By

Test 78

W/kg

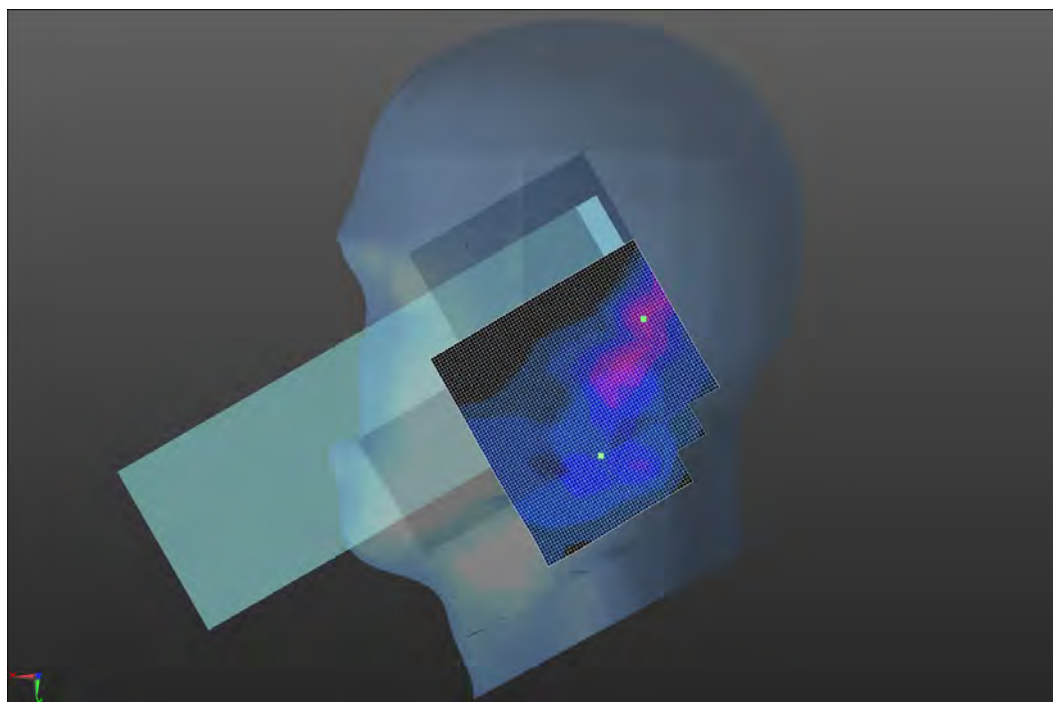

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.8
Date:	1/8/2013	Liquid Temperature (°C):	22.5
Serial Number:	8721244013	Humidity (%RH):	36.4
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 79

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.668$ mho/m; $\epsilon_r = 36.215$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 2.011 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0422 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0768 W/kg

Head/Cheek - Mid/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.036 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.045 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0870 W/kg

Maximum value of SAR (measured) = 0.0189 W/kg

 
Approved By

Test 79

W/kg

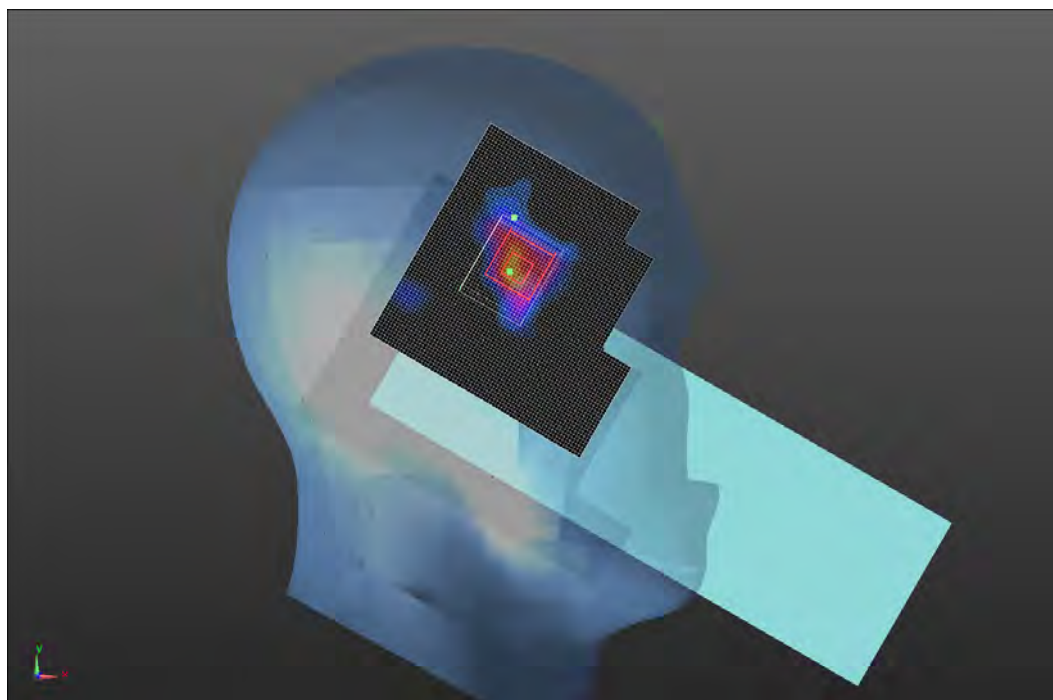

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.8
Date:	1/8/2013	Liquid Temperature (°C):	22.5
Serial Number:	8721244013	Humidity (%RH):	36.4
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 80

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.668$ mho/m; $\epsilon_r = 36.215$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x81x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0335 W/kg



Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0545 W/kg

 
Approved By

Test 80
W/kg

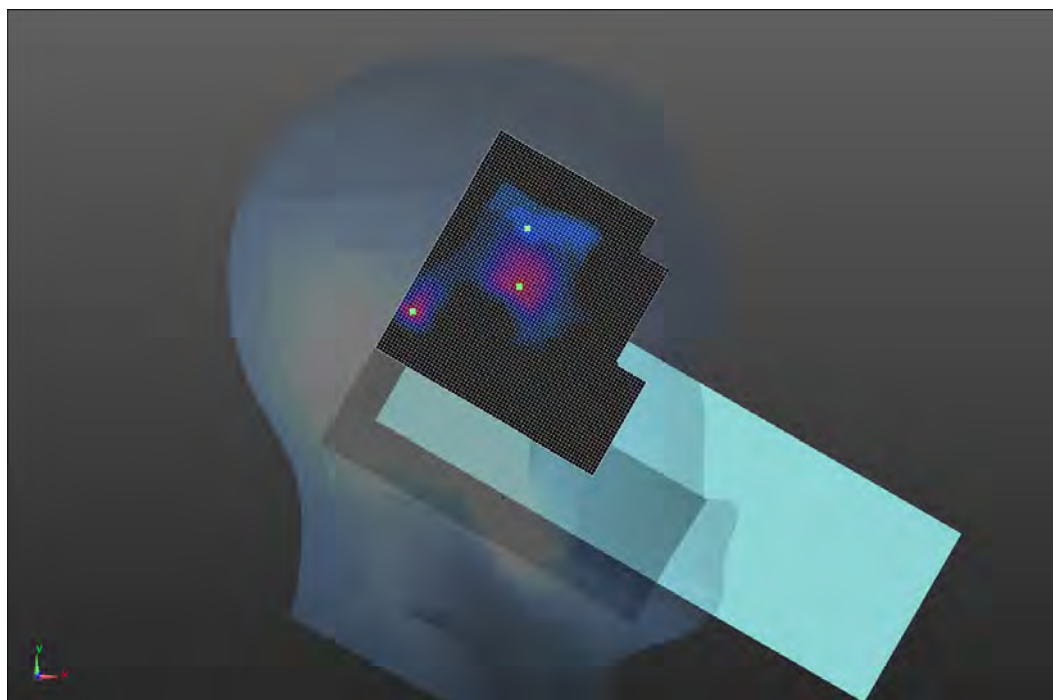

Tested By:	Carl Engholm	Room Temperature (°C):	23.6
Date:	1/7/2013	Liquid Temperature (°C):	21.3
Serial Number:	8721244013	Humidity (%RH):	39
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 81

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.668$ mho/m; $\epsilon_r = 36.215$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 1.269 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0676 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0482 W/kg

Head/Cheek - Mid/Zoom Scan (13x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.958 V/m; Power Drift = -1.05 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00829 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0331 W/kg

Head/Cheek - Mid/Zoom Scan (13x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 2.958 V/m; Power Drift = -1.05 dB

[Info: Interpolated medium parameters used for SAR evaluation.](#)

 
Approved By

Test 81

W/kg

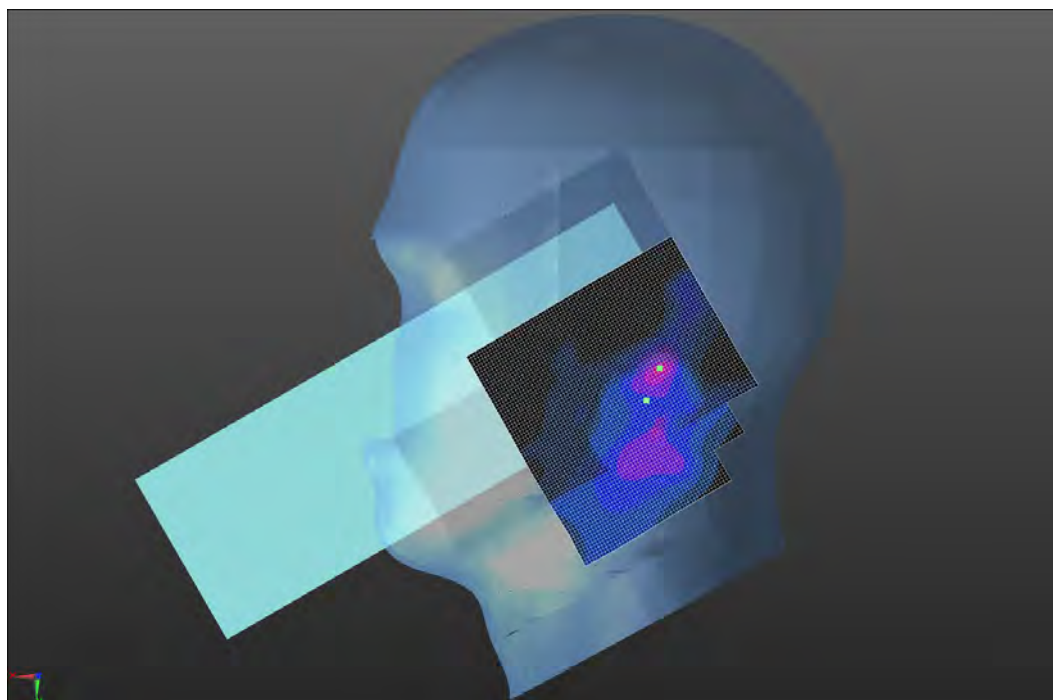

Tested By:	Carl Engholm	Room Temperature (°C):	23.7
Date:	1/7/2013	Liquid Temperature (°C):	21.3
Serial Number:	8721244013	Humidity (%RH):	39
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 82

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.668$ mho/m; $\epsilon_r = 36.215$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0379 W/kg

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0488 W/kg

Head/Tilt - Mid/Area scan (8x8x1): Measurement grid: dx=15mm, dy=15mm



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0460 W/kg

 
Approved By

Test 82

W/kg

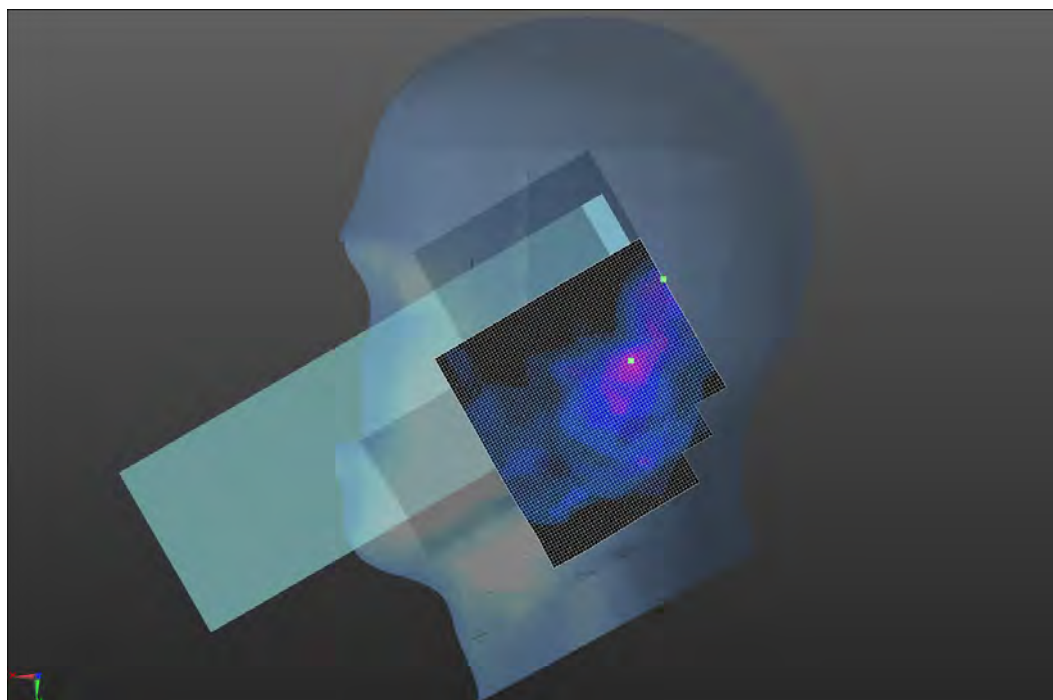

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.3
Date:	1/8/2013	Liquid Temperature (°C):	22.2
Serial Number:	8721244013	Humidity (%RH):	37.1
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 83

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 5.13$ mho/m; $\epsilon_r = 35.522$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 1.840 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0866 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.116 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.017 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.031 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0789 W/kg

Maximum value of SAR (measured) = 0.0174 W/kg

 
Approved By

Test 83

W/kg

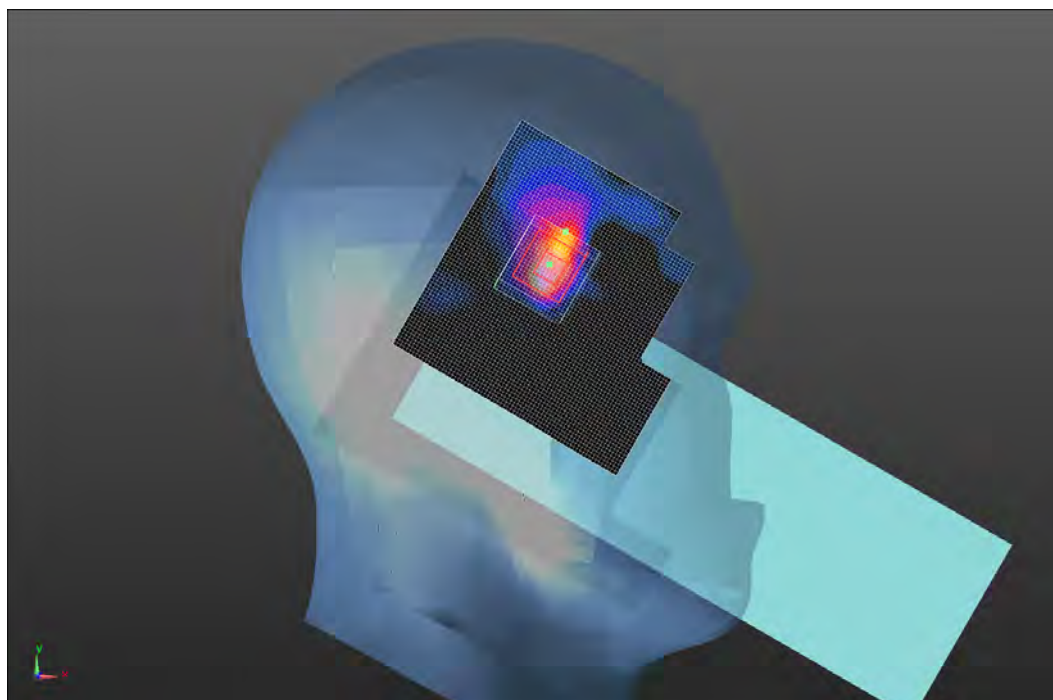

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.3
Date:	1/8/2013	Liquid Temperature (°C):	22.2
Serial Number:	8721244013	Humidity (%RH):	37.1
Configuration:	12	Bar. Pressure (mb):	1019
Comments:	None		

Test 84

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 5.13$ mho/m; $\epsilon_r = 35.522$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x81x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0 W/kg

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (interpolated) = 0.0634 W/kg

Approved By

Test 84

W/kg

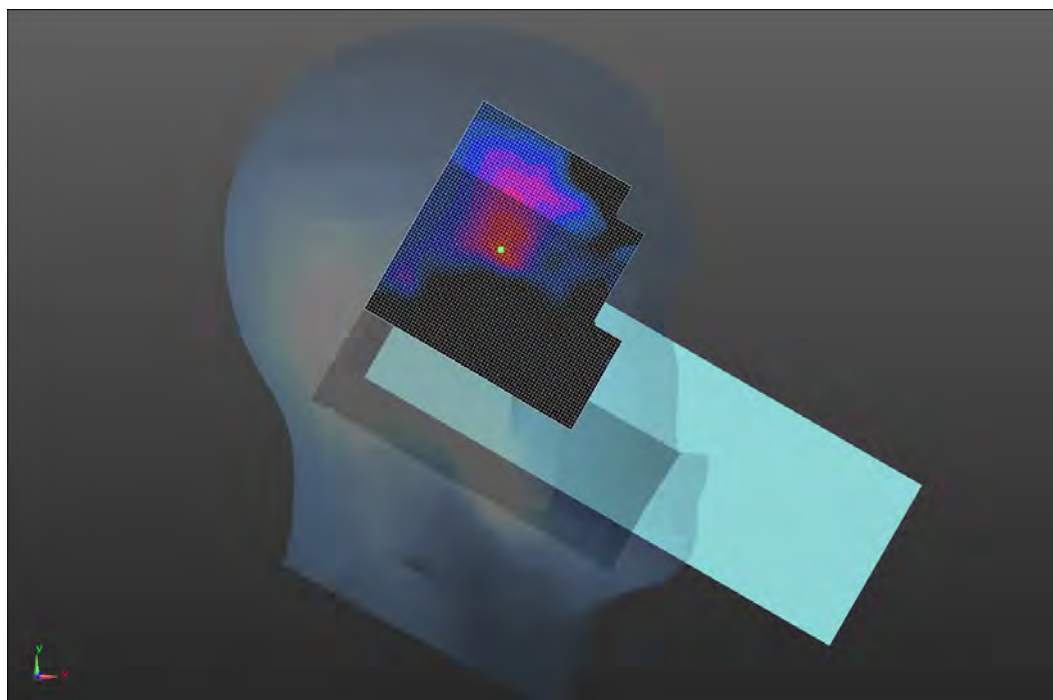

Tested By:	Carl Engholm	Room Temperature (°C):	23.3
Date:	1/7/2013	Liquid Temperature (°C):	21.2
Serial Number:	8721244013	Humidity (%RH):	39
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 85

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 5.13$ mho/m; $\epsilon_r = 35.522$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 1.372 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0336 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0422 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.773 V/m; Power Drift = 0.60 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.017 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0437 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 2.773 V/m; Power Drift = 0.60 dB

[Info: Interpolated medium parameters used for SAR evaluation.](#)

 
Approved By

Test 85

W/kg

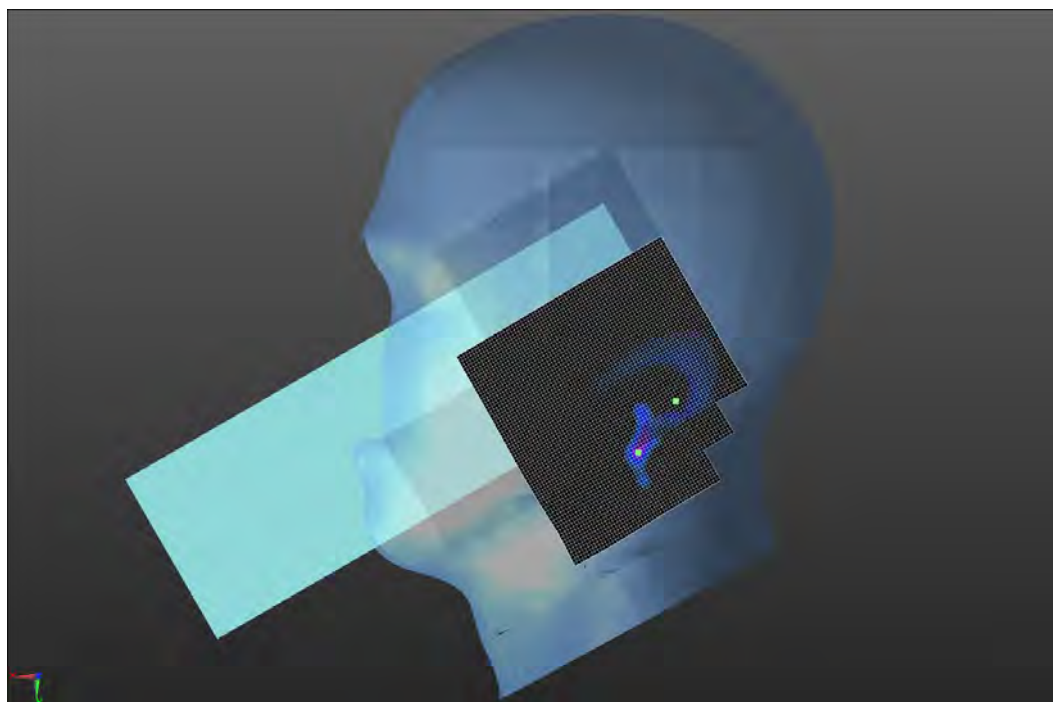

Tested By:	Carl Engholm	Room Temperature (°C):	23.3
Date:	1/7/2013	Liquid Temperature (°C):	21.2
Serial Number:	8721244013	Humidity (%RH):	38
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 86

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 5.13$ mho/m; $\epsilon_r = 35.522$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASYS 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0287 W/kg

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0412 W/kg

Head/Tilt - Mid/Area scan (8x8x1): Measurement grid: dx=15mm, dy=15mm



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0358 W/kg

 
Approved By

Test 86

W/kg

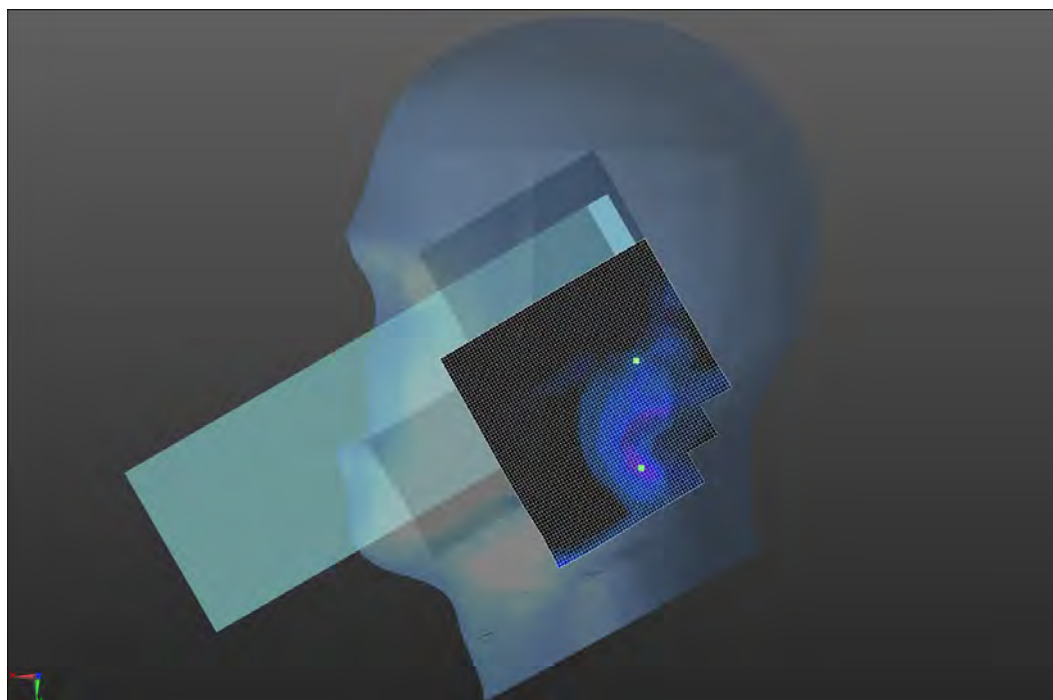

Tested By:	Carl Engholm	Room Temperature (°C):	25.2
Date:	1/7/2013	Liquid Temperature (°C):	21.4
Serial Number:	8721244013	Humidity (%RH):	34
Configuration:	12	Bar. Pressure (mb):	1023
Comments:	None		

Test 87

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.201$ mho/m; $\epsilon_r = 35.422$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 1.673 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0737 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0831 W/kg

Head/Cheek - Mid/Zoom Scan (8x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.616 V/m; Power Drift = 0.48 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.013 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0486 W/kg

Head/Cheek - Mid/Zoom Scan 2 (9x11x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.616 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.014 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0464 W/kg

Maximum value of SAR (measured) = 0.0146 W/kg

 
Approved By

Test 87

W/kg

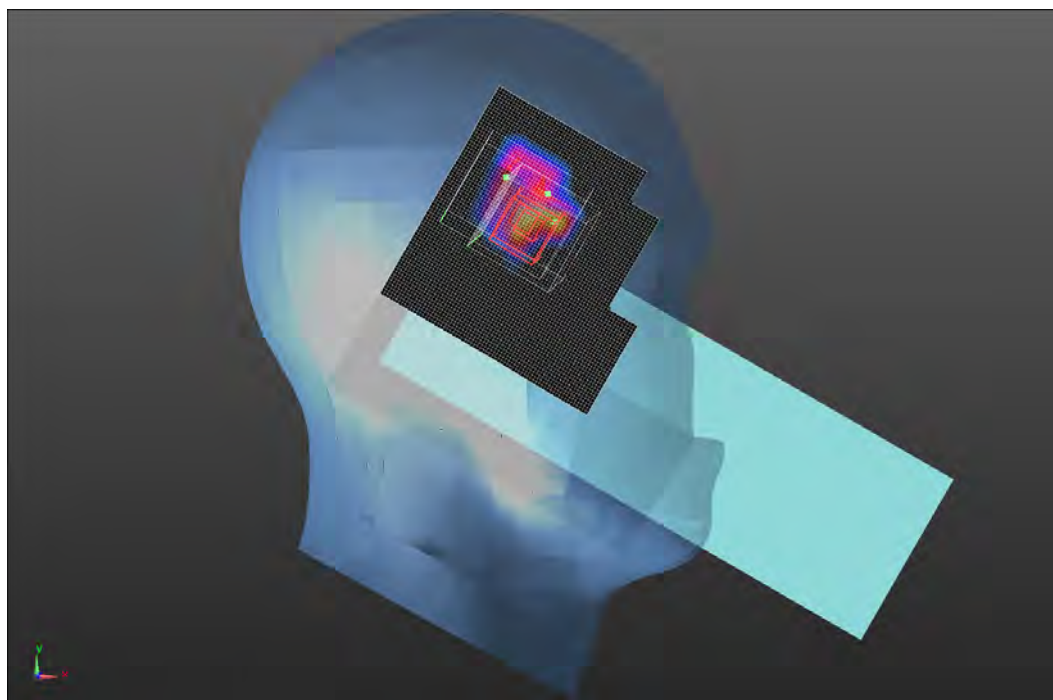

Tested By:	Carl Engholm	Room Temperature (°C):	25.2
Date:	1/7/2013	Liquid Temperature (°C):	21.4
Serial Number:	8721244013	Humidity (%RH):	34
Configuration:	12	Bar. Pressure (mb):	1023
Comments:	None		

Test 88

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.201$ mho/m; $\epsilon_r = 35.422$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0450 W/kg

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0974 W/kg

Head/Tilt - Mid/Area scan (8x8x1): Measurement grid: dx=15mm, dy=15mm



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0353 W/kg

 
Approved By

Test 88

W/kg

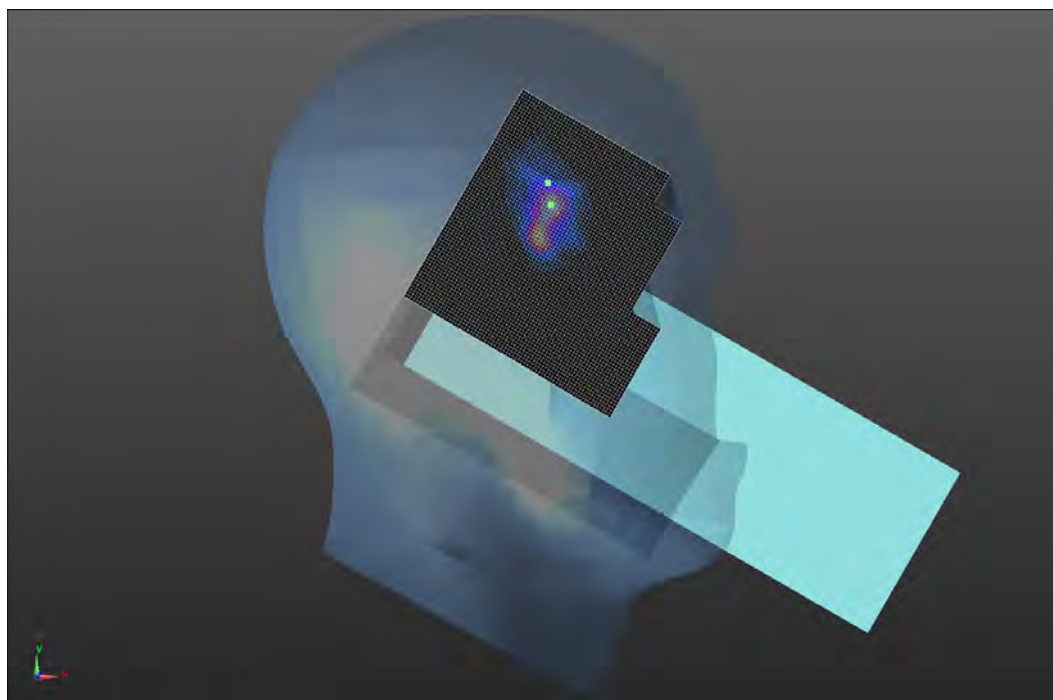

Tested By:	Carl Engholm	Room Temperature (°C):	24.5
Date:	1/7/2013	Liquid Temperature (°C):	21.2
Serial Number:	8721244013	Humidity (%RH):	36
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 89

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.201$ mho/m; $\epsilon_r = 35.422$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 1.176 V/m

Head/Cheek - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0410 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0584 W/kg

Head/Cheek - Mid/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.233 V/m; Power Drift = 0.24 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.0098 W/kg; SAR(10 g) = 0.00244 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0303 W/kg

Head/Cheek - Mid/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Reference Value = 2.233 V/m; Power Drift = 0.24 dB

[Info: Interpolated medium parameters used for SAR evaluation.](#)

 
Approved By

Test 89

W/kg

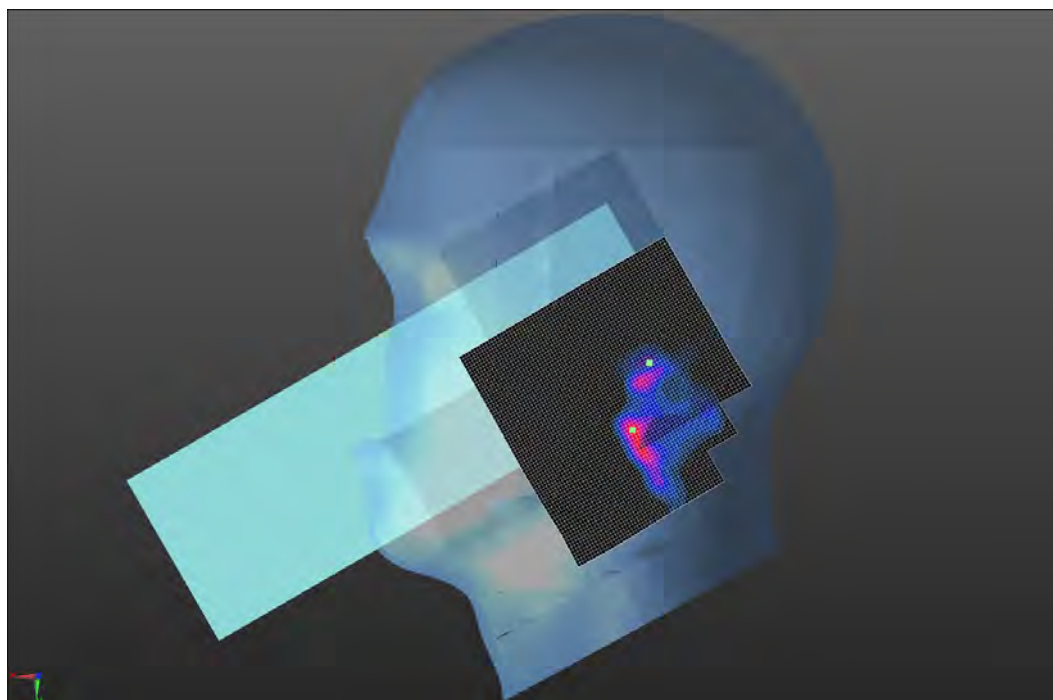

Tested By:	Carl Engholm	Room Temperature (°C):	23.3
Date:	1/7/2013	Liquid Temperature (°C):	21.2
Serial Number:	8721244013	Humidity (%RH):	38
Configuration:	12	Bar. Pressure (mb):	1021
Comments:	None		

Test 90

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.201$ mho/m; $\epsilon_r = 35.422$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x71x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0502 W/kg

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0286 W/kg

Head/Tilt - Mid/Area scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0219 W/kg





Approved By

Test 90

W/kg

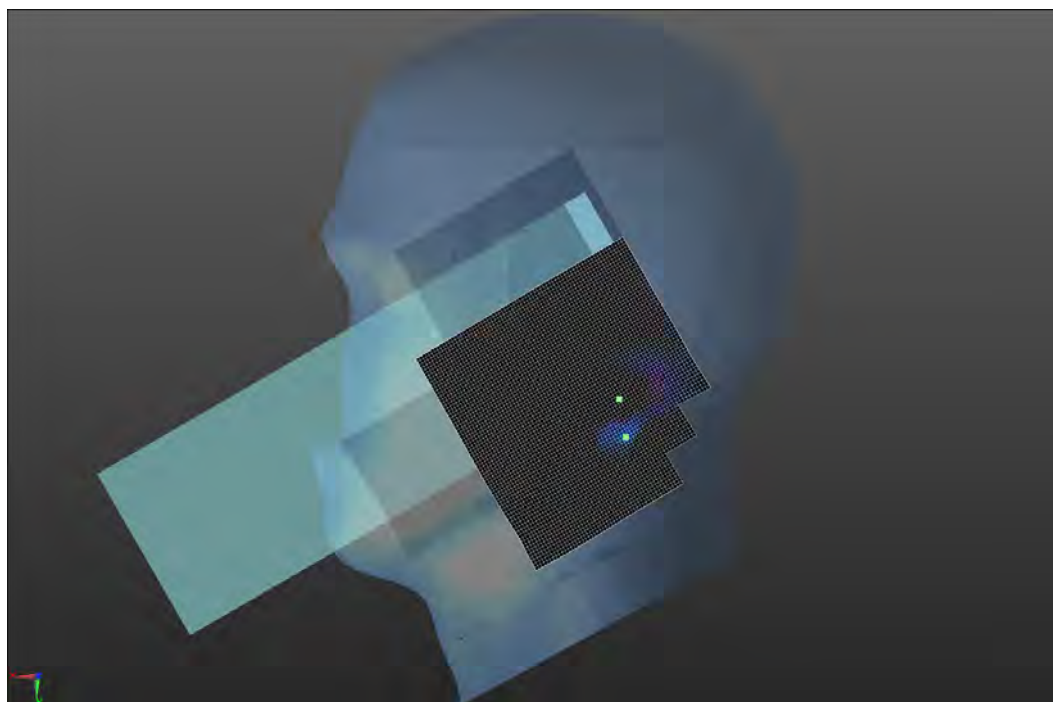

Test 83

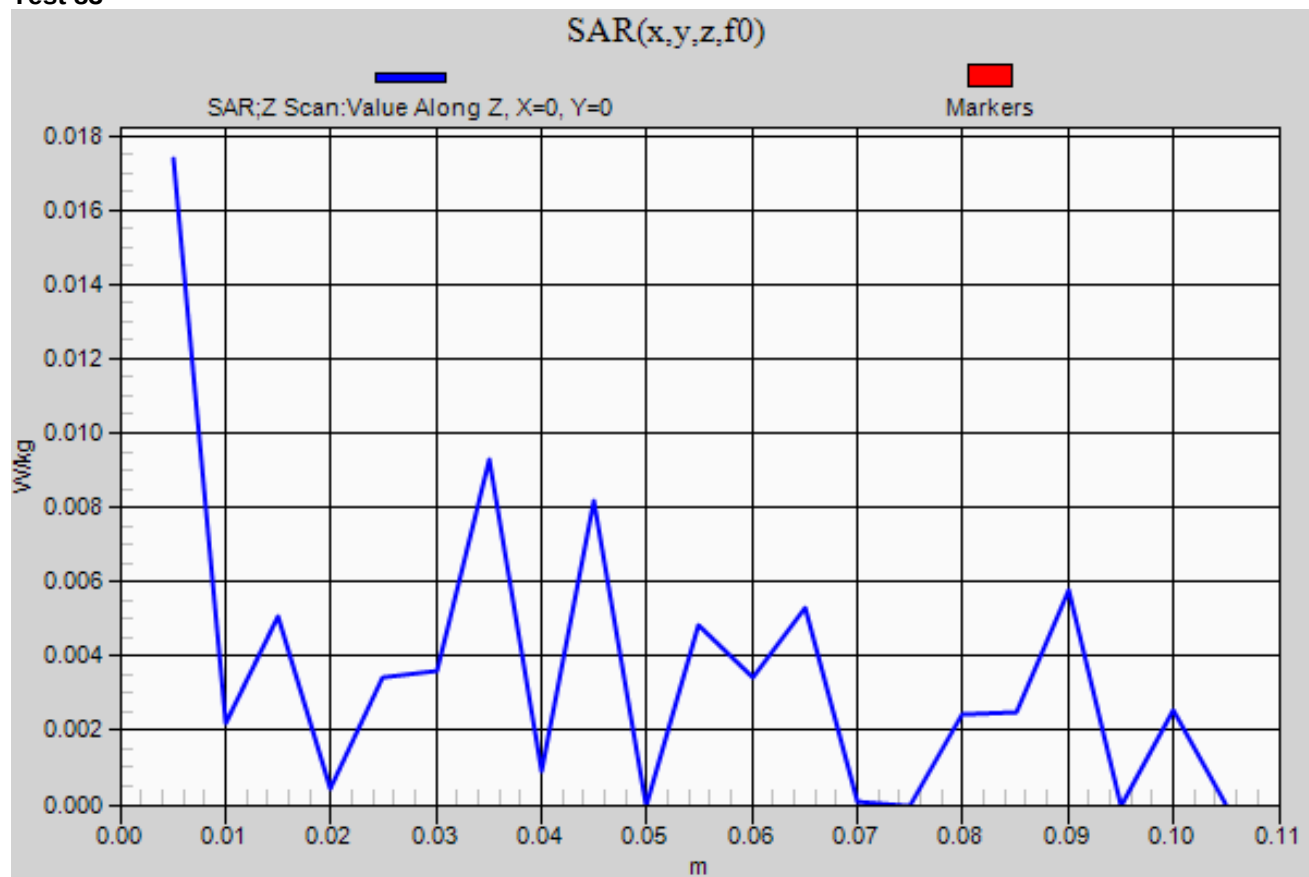

EUT:	1001CP01F9	Work Order:	ITRM0333
Customer:	Intermec Technologies Corporation	Job Site:	EV08
Attendees:	None	Customer Project:	None

TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v05 FCC KDB 248227 D01 V01r02 FCC KDB 648474 D04 V01 FCC 865664 D01 and D02

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

None

RESULTS

Test Configuration	EUT Position	Body Worn Accessory	Headset	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	Data Rate (Mbps)	Modulation	Power Drift During Test (dB)	Measured 1g SAR Level (mW/g)	Test #
Body	Right	Holster	Yes	5.2	5200	40	6	OFDM	-0.24	0.232	35
Body	Front	Holster	Yes	5.2	5200	40	6	OFDM	Note 2	Note 1	36
Body	Right	Holster	Yes	5.3	5260	52	6	OFDM	-0.02	0.291	37
Body	Front	Holster	Yes	5.3	5260	52	6	OFDM	Note 2	Note 1	38
Body	Right	Holster	Yes	5.6	5680	136	6	OFDM	-0.07	0.339	39
Body	Front	Holster	Yes	5.6	5680	136	6	OFDM	Note 2	Note 1	40
Body	Right	Holster	Yes	5.8	5745	149	6	OFDM	0.1	0.242	41
Body	Front	Holster	Yes	5.8	5745	149	6	OFDM	Note 2	Note 1	42

Note 1: Zoom scan measurement was not performed because the area scan results were less than 0.1 mW/g

Note 2: Power drift measurement was not performed because the area scan results were less than 0.1 mW/g

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.8
Date:	12/27/2012	Liquid Temperature (°C):	22.4
Serial Number:	8721244013	Humidity (%RH):	39.5
Configuration:	11	Bar. Pressure (mb):	1019
Comments:	None		

Test 35

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.383$ mho/m; $\epsilon_r = 47.336$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 9.114 V/m; Power Drift = -0.24 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of Total (measured) = 4.303 V/m

Body/Body/Reference scan (51x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

Maximum value of SAR (interpolated) = 0.657 W/kg

Body/Body/Area scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.424 W/kg



Maximum value of SAR (measured) = 0.0997 W/kg




Approved By

Test 35

W/kg

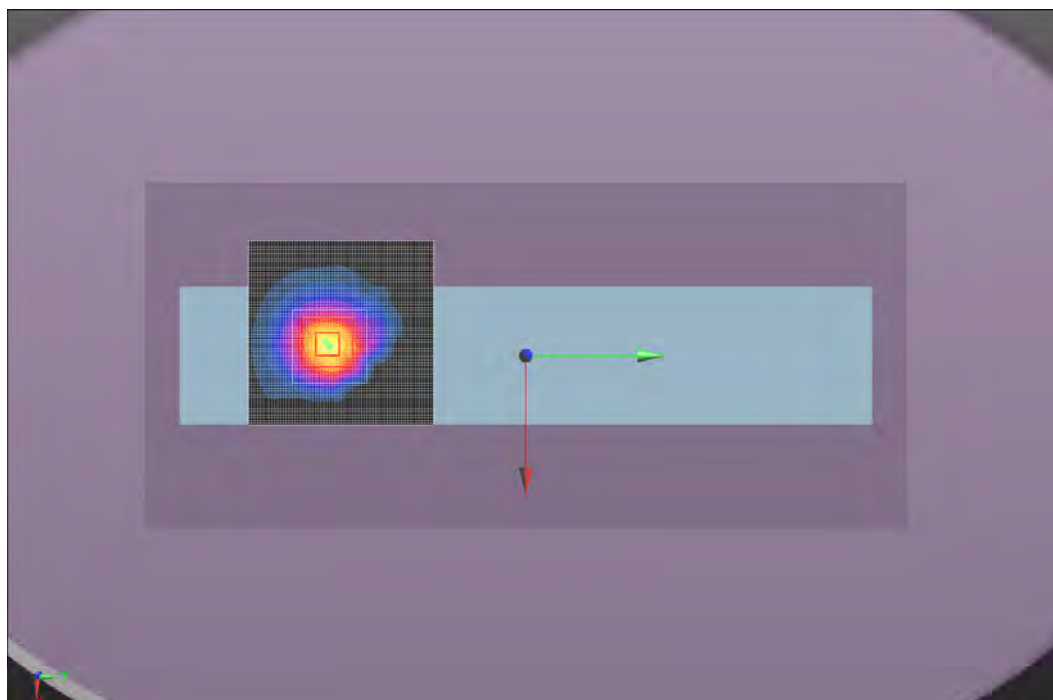

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.8
Date:	12/27/2012	Liquid Temperature (°C):	22.4
Serial Number:	8721244013	Humidity (%RH):	39.5
Configuration:	11	Bar. Pressure (mb):	1019
Comments:	None		

Test 36

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.383$ mho/m; $\epsilon_r = 47.336$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (51x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

Maximum value of SAR (interpolated) = 0.0375 W/kg

Body/Body/Area scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0449 W/kg

Body/Body/Area scan (9x9x1): Measurement grid: dx=10mm, dy=10mm



Maximum value of SAR (measured) = 0.0252 W/kg




Approved By

Test 36

W/kg

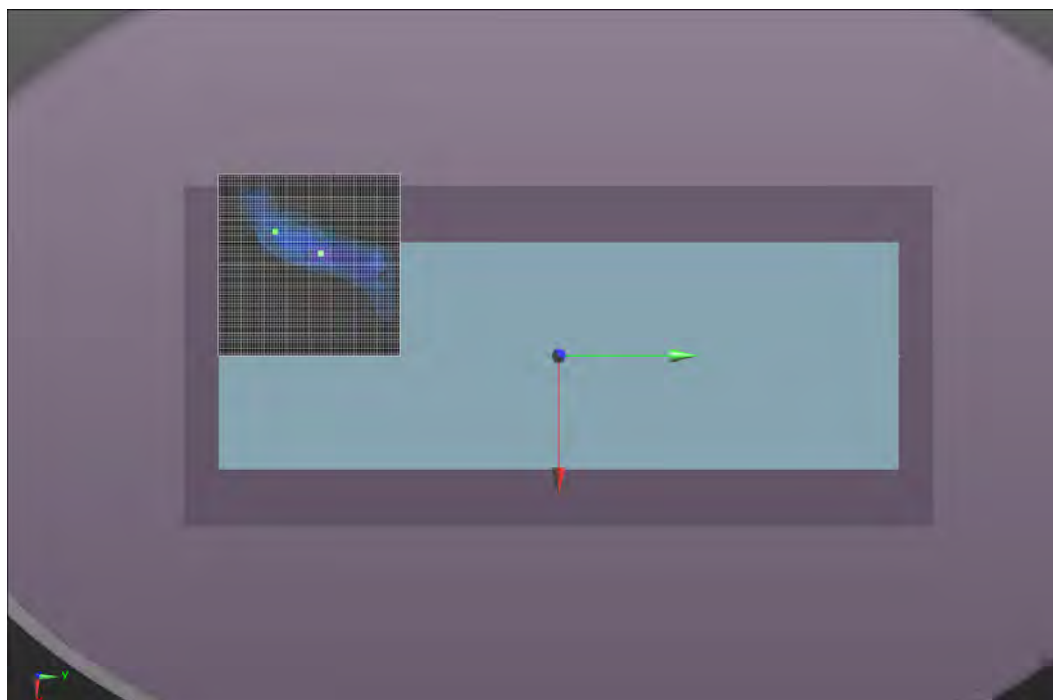

Tested By:	Carl Engholm	Room Temperature (°C):	23.2
Date:	12/27/2012	Liquid Temperature (°C):	22.6
Serial Number:	8721244013	Humidity (%RH):	36
Configuration:	11	Bar. Pressure (mb):	1022
Comments:	None		

Test 37

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.451$ mho/m; $\epsilon_r = 47.209$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 10.984 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.113 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.521 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 5.099 V/m

Body/Body/Reference scan (41x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.707 W/kg

Body/Body/Area scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (interpolated) = 0.542 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

 
Approved By

Test 37

W/kg

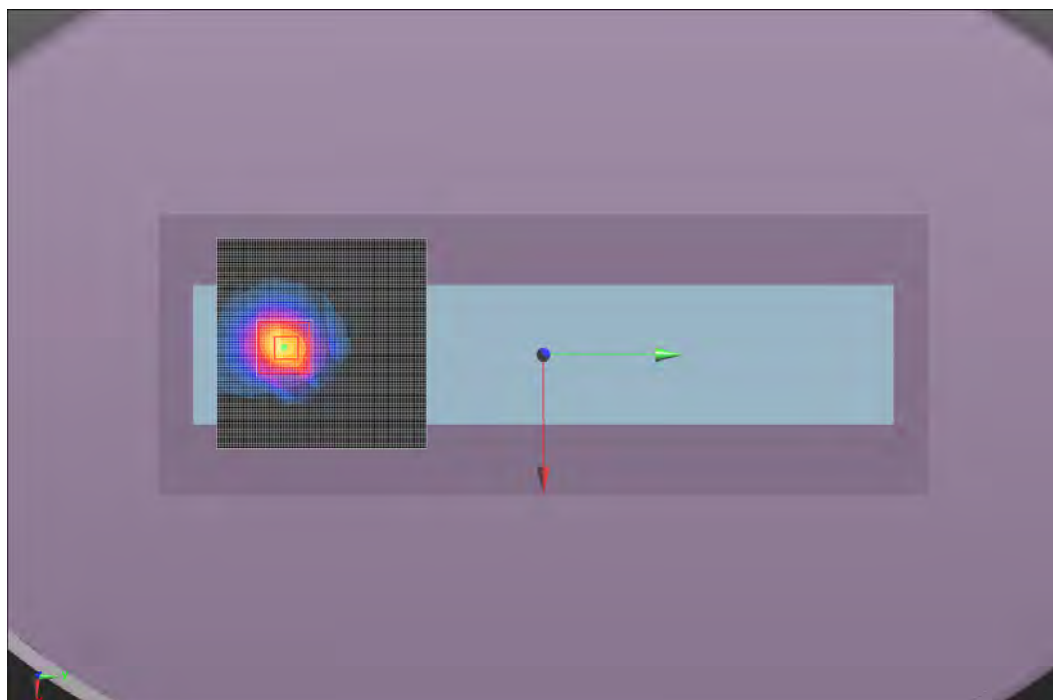

Tested By:	Carl Engholm	Room Temperature (°C):	24.9
Date:	12/27/2012	Liquid Temperature (°C):	22.8
Serial Number:	8721244013	Humidity (%RH):	30
Configuration:	11	Bar. Pressure (mb):	1022
Comments:	None		

Test 38

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 5.451$ mho/m; $\epsilon_r = 47.209$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (41x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0 W/kg

Body/Body/Area scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0119 W/kg

Body/Body/Area scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0119 W/kg




Approved By

Test 38

W/kg

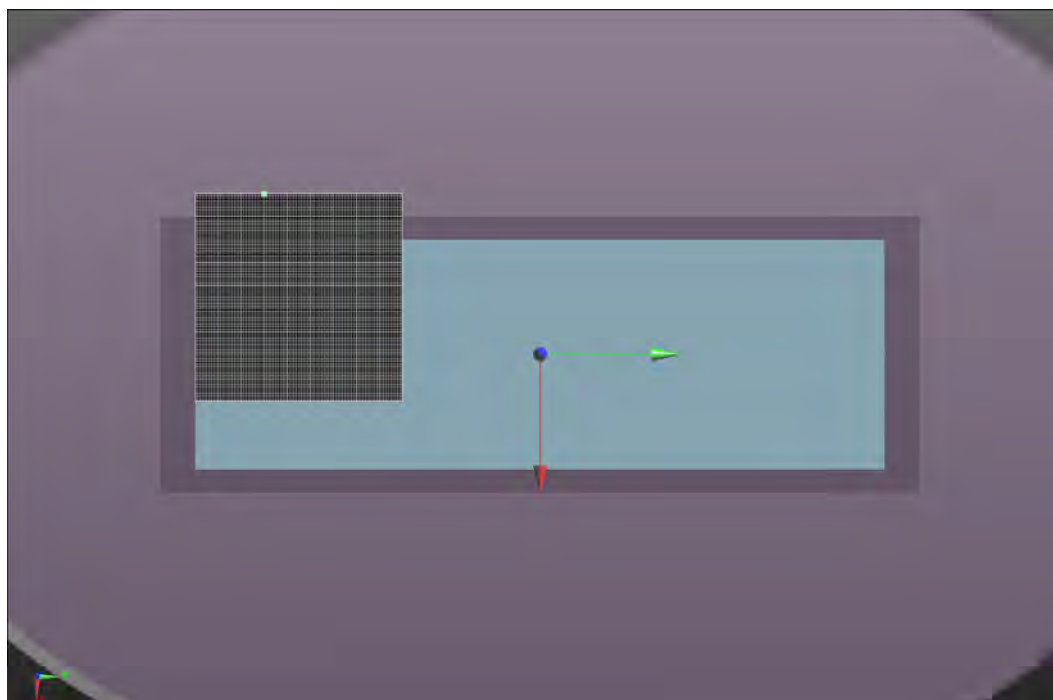

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.3
Date:	12/28/2012	Liquid Temperature (°C):	22.7
Serial Number:	8721244013	Humidity (%RH):	34.3
Configuration:	11	Bar. Pressure (mb):	1020
Comments:	None		

Test 39

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 6.001$ mho/m; $\epsilon_r = 46.454$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 11.193 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.143 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.616 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 4.642 V/m

Body/Body/Reference scan (41x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.965 W/kg

Body/Body/Area scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (interpolated) = 0.633 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

 
Approved By

Test 39

W/kg

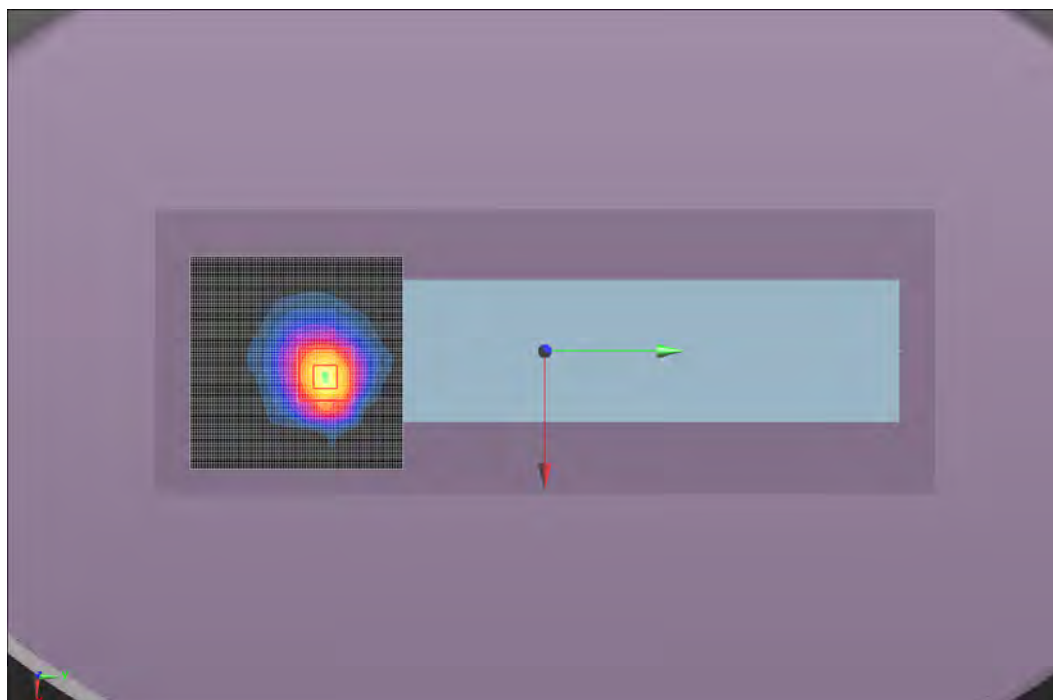

Tested By:	Ethan Schoonover	Room Temperature (°C):	22.3
Date:	12/28/2012	Liquid Temperature (°C):	22.7
Serial Number:	8721244013	Humidity (%RH):	34.3
Configuration:	11	Bar. Pressure (mb):	1020
Comments:	None		

Test 40

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5680 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 6.001$ mho/m; $\epsilon_r = 46.454$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (41x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0249 W/kg

Body/Body/Area scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0172 W/kg

Body/Body/Area scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.0197 W/kg




Approved By

Test 40

W/kg

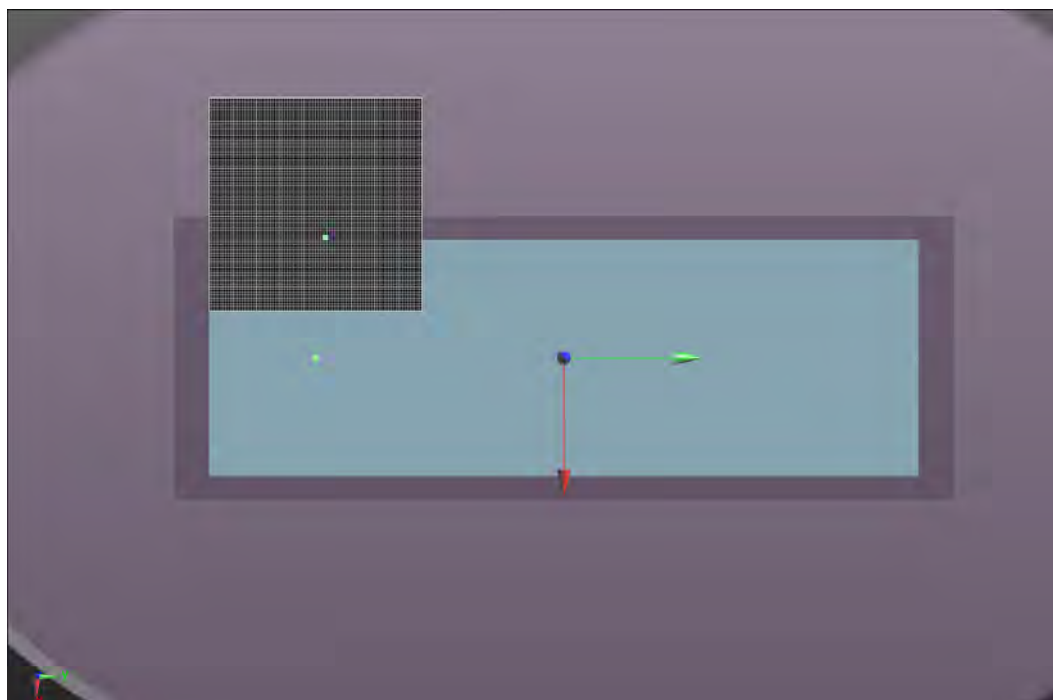

Tested By:	Carl Engholm	Room Temperature (°C):	22.8
Date:	12/28/2012	Liquid Temperature (°C):	22.6
Serial Number:	8721244013	Humidity (%RH):	34
Configuration:	11	Bar. Pressure (mb):	1021
Comments:	None		

Test 41

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.077$ mho/m; $\epsilon_r = 46.324$; $\rho = 1000$ kg/m³, Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 9.591 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.096 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.463 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 4.002 V/m

Body/Body/Reference scan (41x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.419 W/kg

Body/Body/Area scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.486 W/kg



Maximum value of SAR (measured) = 0.0973 W/kg




Approved By

Test 41

W/kg

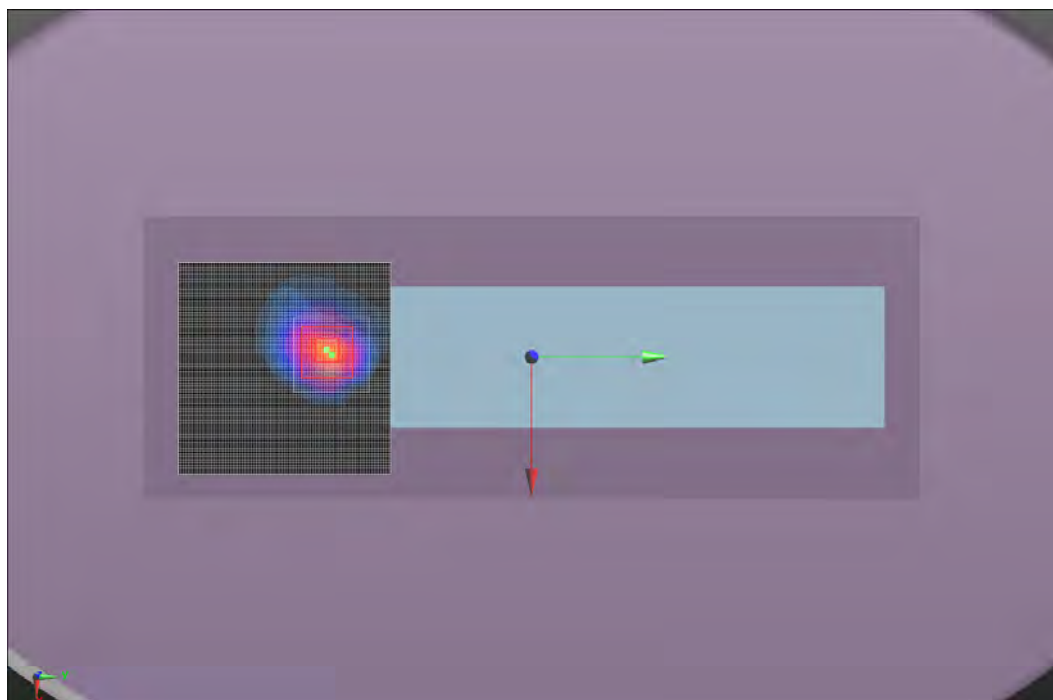

Tested By:	Carl Engholm	Room Temperature (°C):	22.7
Date:	12/28/2012	Liquid Temperature (°C):	22.6
Serial Number:	8721244013	Humidity (%RH):	34
Configuration:	11	Bar. Pressure (mb):	1021
Comments:	None		

Test 42

DUT: CK70; Type: 1001CP01F9; Serial: 8721244013

Communication System: CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.077$ mho/m; $\epsilon_r = 46.324$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (41x111x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0 W/kg

Body/Body/Area scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (interpolated) = 0.0138 W/kg


Approved By

Test 42

W/kg

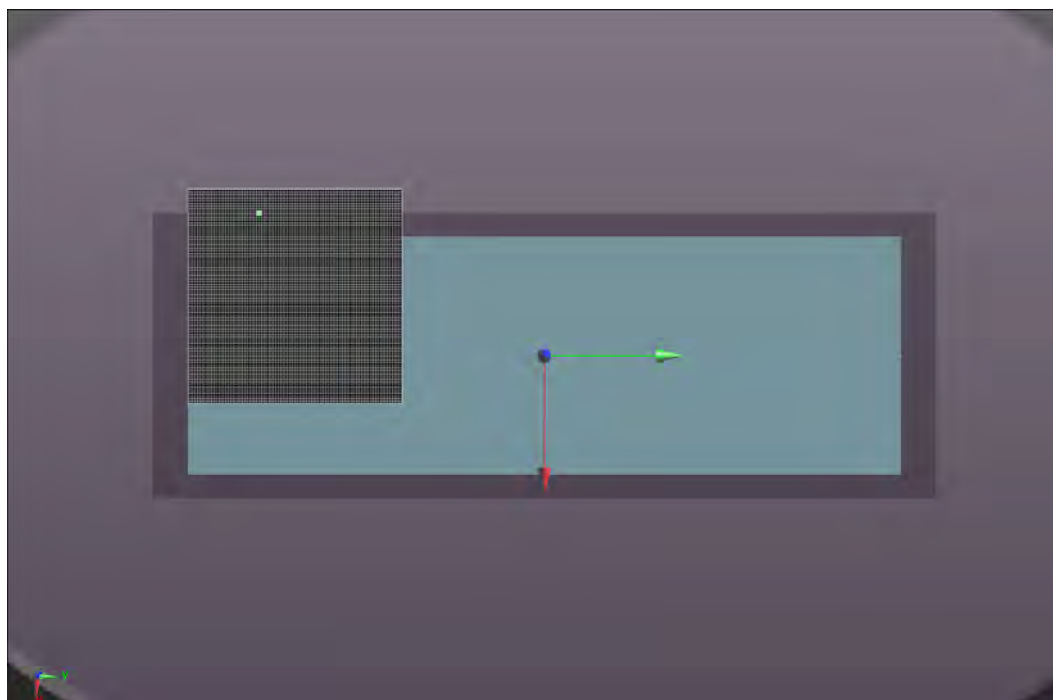

Test 39

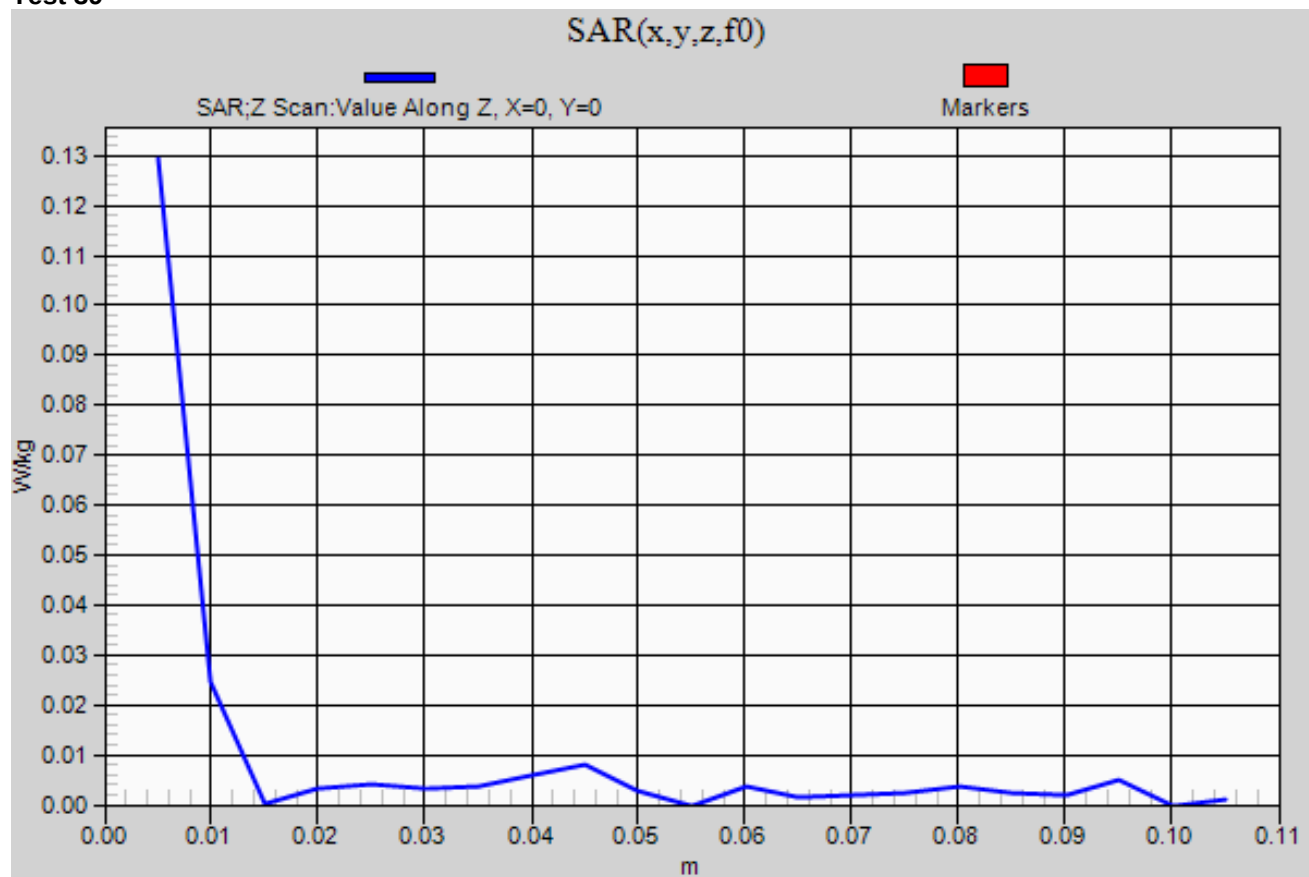

EUT:	1001CP01F9	Work Order:	ITRM0333
Customer:	Intermec Technologies Corporation	Job Site:	EV08
Attendees:	None	Customer Project:	None

TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v05 FCC KDB 248227 D01 V01r02 FCC KDB 648474 D04 V01 FCC 865664 D01 and D02

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

None

RESULTS

Test Configuration	Side of Head	EUT Position	Headset	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	Data Rate (Mbps)	Modulation	Power Drift During Test (dB)	Measured 1g SAR Level (mW/g)	Scaled to 50% Duty Cycle ¹ (mW/g)	Test #
Head	Left	Touch	No	915	927.25	54	340	PRASK	0.03	0.807	0.404	105c
Head	Left	Touch	No	915	902.75	5	340	PRASK	0.02	1.06	0.530	105d
Head	Left	Touch	No	915	915.25	30	340	PRASK	0.06	0.899	0.450	105e
Head	Left	Tilt	No	915	927.25	54	340	PRASK	-0.23	0.563	0.282	106a
Head	Right	Touch	No	915	927.25	54	340	PRASK	-0.1	0.887	0.444	107
Head	Right	Touch	No	915	902.75	54	340	PRASK	0.04	1.09	0.545	107a
Head	Right	Touch	No	915	915.25	54	340	PRASK	0.05	0.941	0.471	107b
Head	Right	Tilt	No	915	927.25	54	340	PRASK	-0.02	0.649	0.325	108

Note 1: Measured SAR after it has been scaled for a 50% duty cycle

Tested By:	Ethan Schoonover	Room Temperature (°C):	20
Date:	12/19/2012	Liquid Temperature (°C):	22.4
Serial Number:	8721244017	Humidity (%RH):	36.5
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 105c

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 927.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 927.25$ MHz; $\sigma = 0.953$ mho/m; $\epsilon_r = 39.273$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 26.10 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.01 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.932 W/kg

Head/Cheek - Mid/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.343 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.580 W/kg (SAR corrected for target medium)



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.904 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

 
Approved By

Test 105c
W/kg

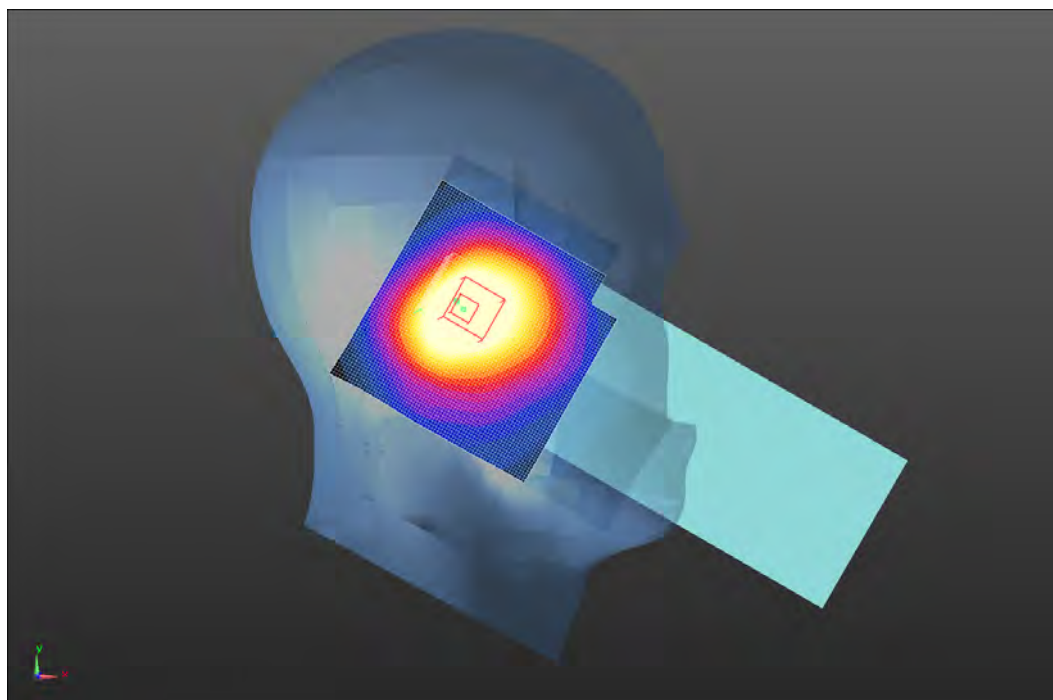

Tested By:	Ethan Schoonover	Room Temperature (°C):	19.8
Date:	12/19/2012	Liquid Temperature (°C):	22
Serial Number:	8721244017	Humidity (%RH):	37.6
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 105d

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 902.75 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 902.75$ MHz; $\sigma = 0.931$ mho/m; $\epsilon_r = 39.557$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 30.59 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.29 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.20 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.161 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.772 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 1.15 W/kg

Maximum value of SAR (measured) = 0.871 W/kg

 
Approved By

Test 105d

W/kg

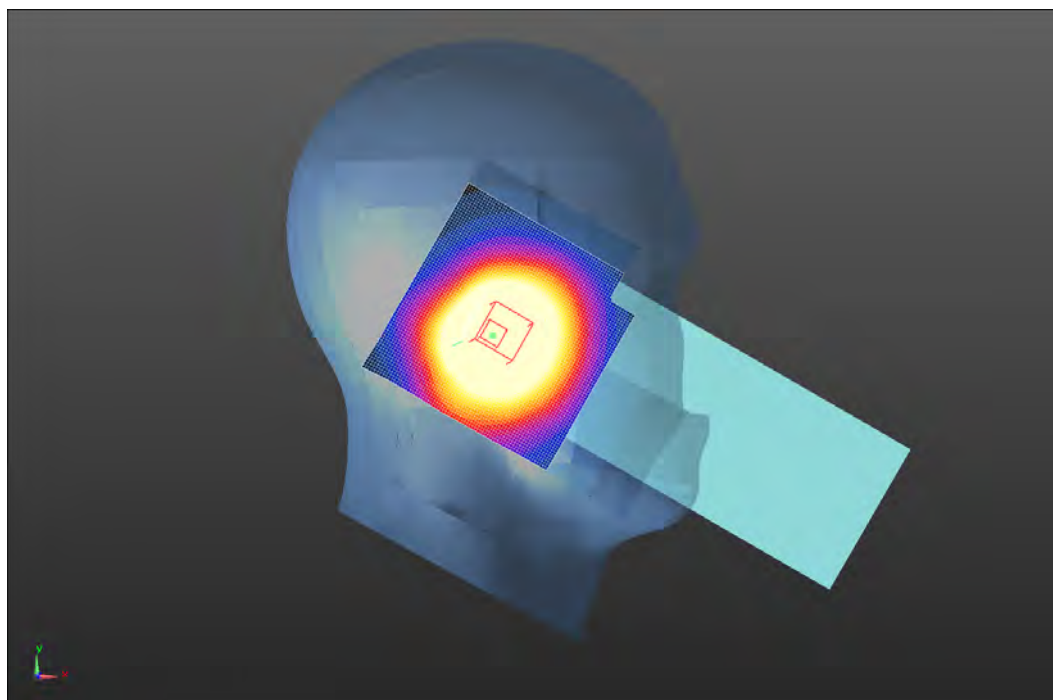

Tested By:	Ethan Schoonover	Room Temperature (°C):	21.8
Date:	12/19/2012	Liquid Temperature (°C):	21.7
Serial Number:	8721244017	Humidity (%RH):	35
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 105e

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 915.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 915.25$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 39.407$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 28.16 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.08 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.979 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.671 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.661 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 0.976 W/kg

Maximum value of SAR (measured) = 0.748 W/kg




Approved By

Test 105e
W/kg

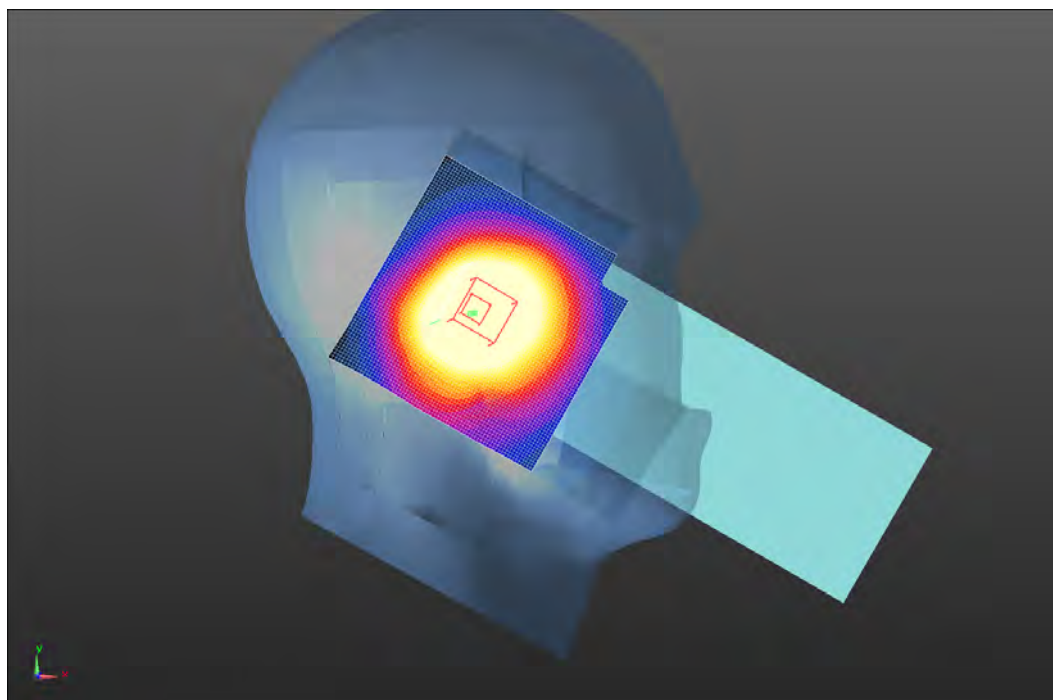

Tested By:	Ethan Schoonover	Room Temperature (°C):	24.3
Date:	12/19/2012	Liquid Temperature (°C):	23.1
Serial Number:	8721244017	Humidity (%RH):	34.7
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 106a

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 915.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 915.25$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 39.407$; $\rho = 1000$ kg/m³,
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x81x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.622 W/kg

Head/Tilt - Mid/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.034 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.389 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.631 W/kg

Head/Tilt - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 22.15 V/m

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.463 W/kg

 
Approved By

Test 106a

W/kg

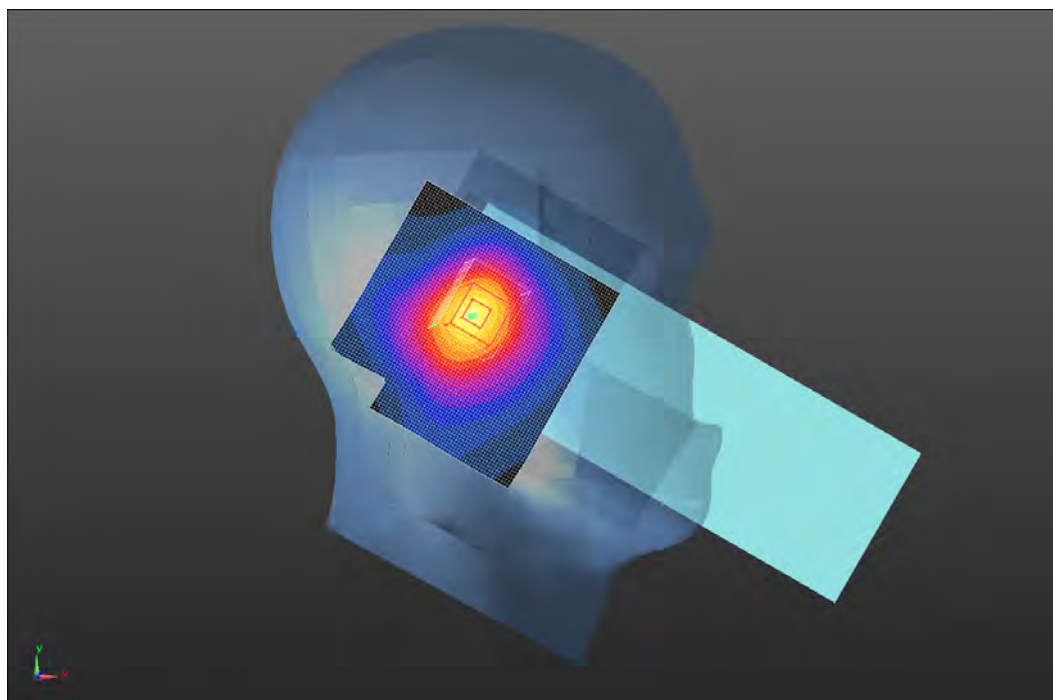

Tested By:	Carl Engholm	Room Temperature (°C):	22.4
Date:	12/18/2012	Liquid Temperature (°C):	20.1
Serial Number:	8721244017	Humidity (%RH):	34
Configuration:	6	Bar. Pressure (mb):	1017
Comments:	None		

Test 107

DUT: CK70; Type: 1000CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 927.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 927.25$ MHz; $\sigma = 0.953$ mho/m; $\epsilon_r = 39.273$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 27.16 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.09 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.02 W/kg

Head/Cheek - Mid/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.429 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.621 W/kg (SAR corrected for target medium)



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.993 W/kg

Maximum value of SAR (measured) = 0.703 W/kg

 
Approved By

Test 107
W/kg

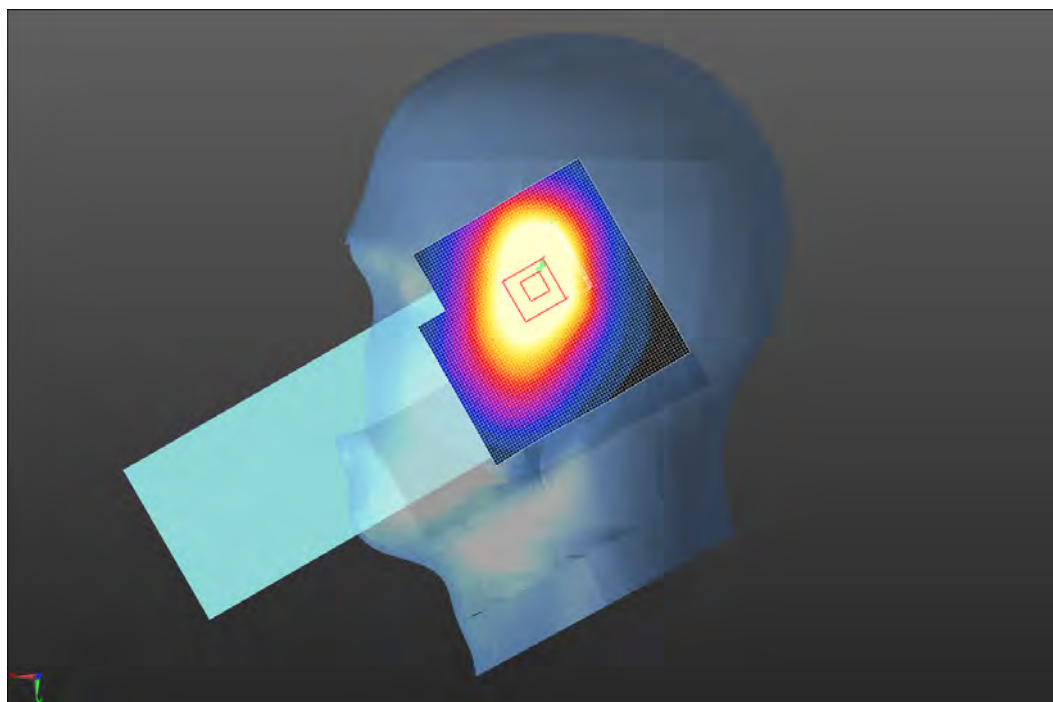

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.9
Date:	12/19/2012	Liquid Temperature (°C):	24
Serial Number:	8721244017	Humidity (%RH):	27.8
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 107a

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 902.75 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 902.75$ MHz; $\sigma = 0.931$ mho/m; $\epsilon_r = 39.557$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 31.56 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.42 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.25 W/kg

Head/Cheek - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.603 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.779 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (measured) = 1.20 W/kg

Maximum value of SAR (measured) = 0.927 W/kg

 
Approved By

Test 107a

W/kg

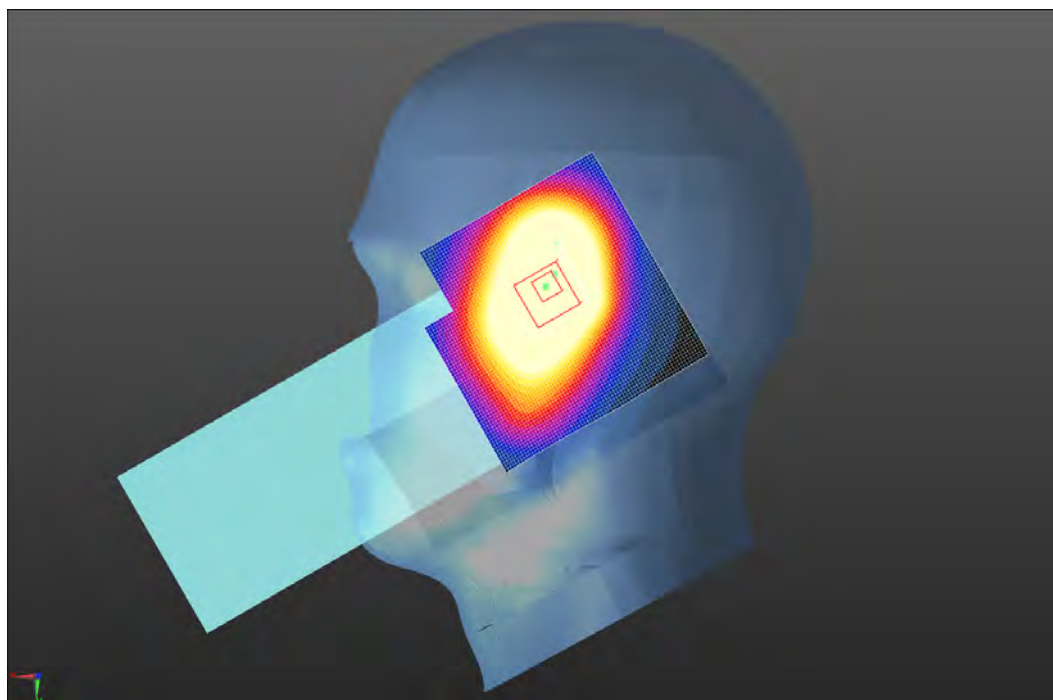

Tested By:	Ethan Schoonover	Room Temperature (°C):	23.9
Date:	12/19/2012	Liquid Temperature (°C):	24
Serial Number:	8721244017	Humidity (%RH):	27.8
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 107b

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 915.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³, Medium parameters used (interpolated): $f = 915.25$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 39.407$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Cheek - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 28.23 V/m

Head/Cheek - Mid/Reference scan (41x91x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.21 W/kg

Head/Cheek - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.06 W/kg

Head/Cheek - Mid/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.556 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.663 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.05 W/kg



Maximum value of SAR (measured) = 0.752 W/kg




Approved By

Test 107b

W/kg

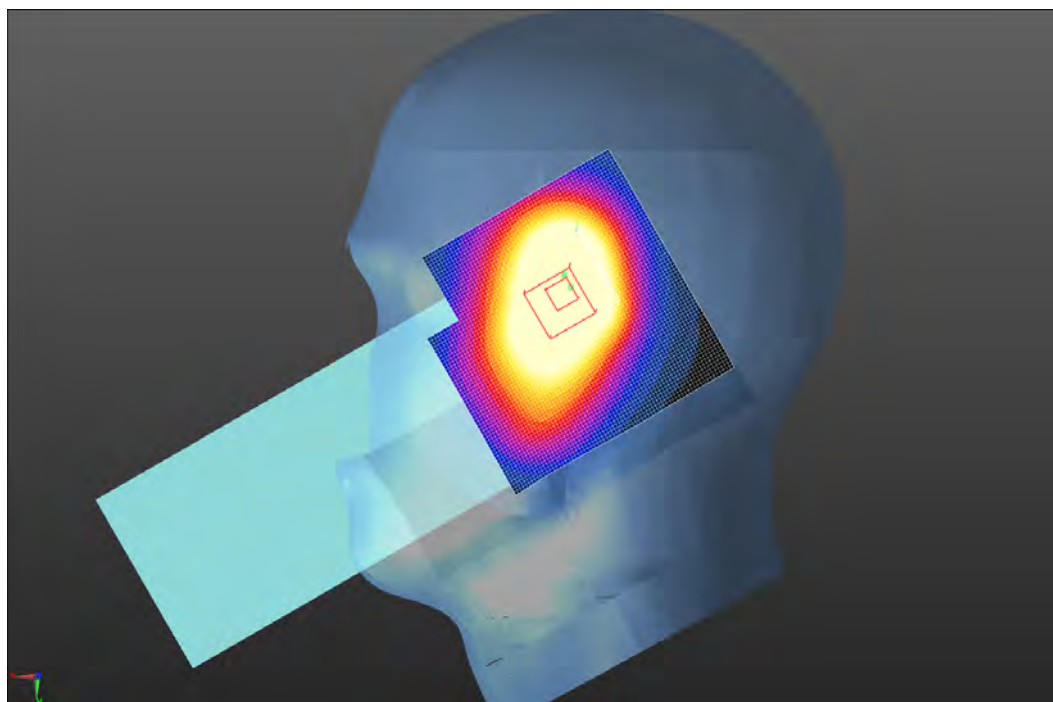

Tested By:	Ethan Schoonover	Room Temperature (°C):	22
Date:	12/19/2012	Liquid Temperature (°C):	23.8
Serial Number:	8721244017	Humidity (%RH):	32.4
Configuration:	6	Bar. Pressure (mb):	1015
Comments:	None		

Test 108

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 915.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 915.25$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 39.407$; $\rho = 1000$ kg/m³,
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Head/Tilt - Mid/Reference scan (41x81x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.823 W/kg

Head/Tilt - Mid/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.276 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.447 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.721 W/kg

Head/Tilt - Mid/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 23.62 V/m

Head/Tilt - Mid/Area scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of SAR (interpolated) = 0.740 W/kg

Maximum value of SAR (measured) = 0.526 W/kg


 

Approved By

Test 108
W/kg

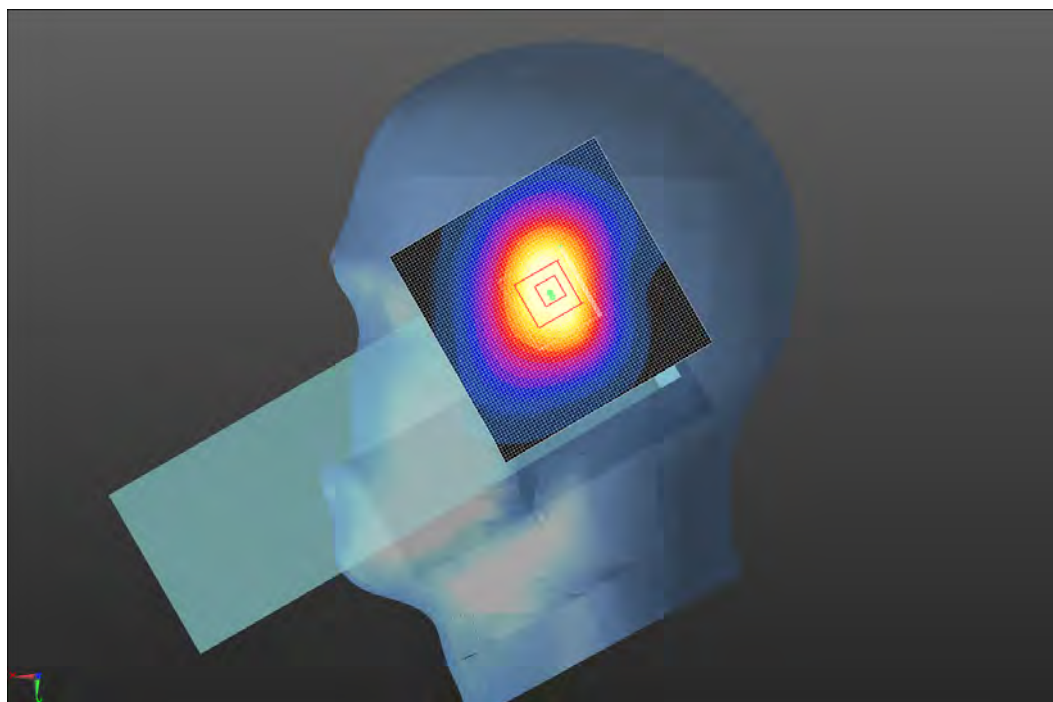

Test 107a

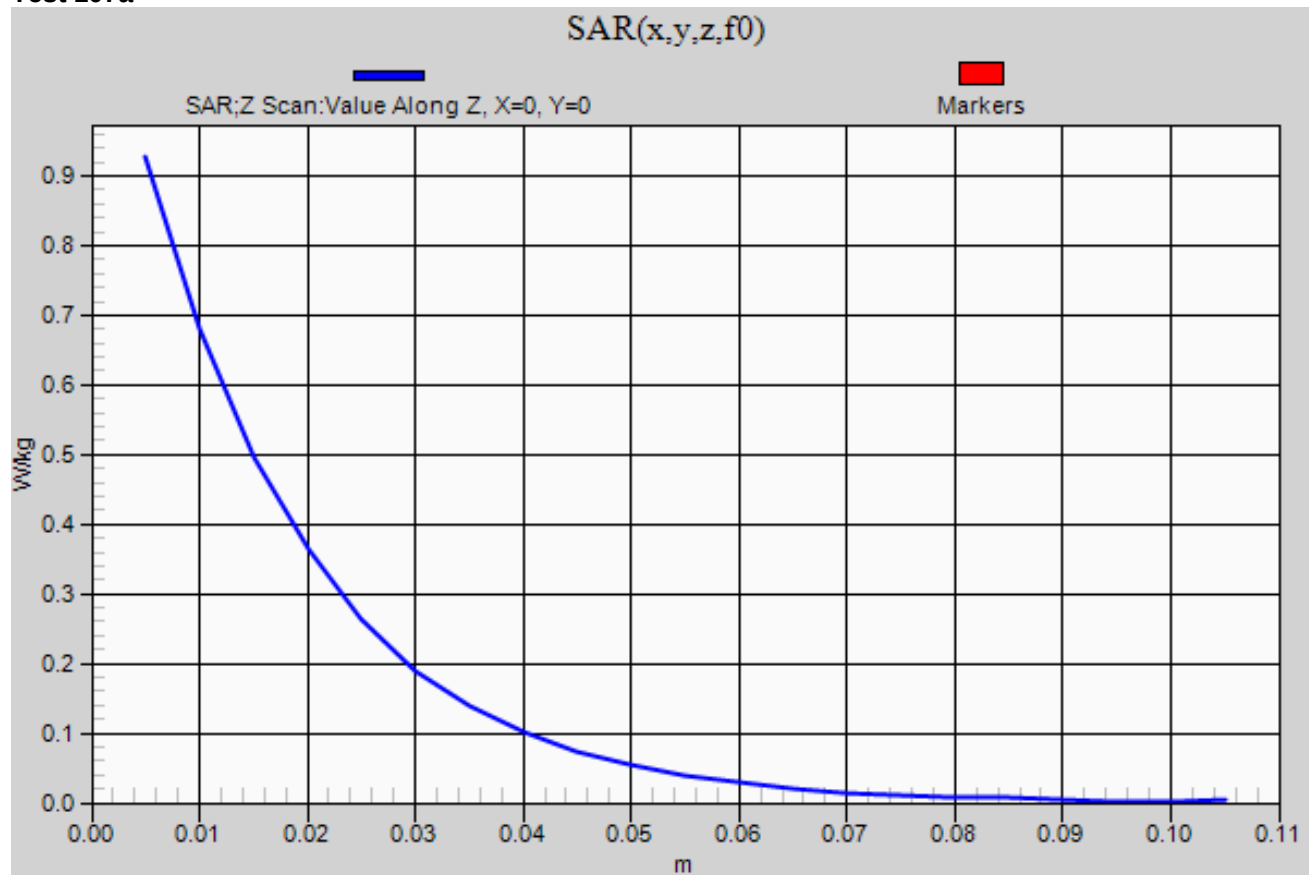

EUT:	1001CP01F9	Work Order:	ITRM0333
Customer:	Intermec Technologies Corporation	Job Site:	EV08
Attendees:	None	Customer Project:	None

TEST SPECIFICATIONS

Specification:	Method:
FCC 2.1093:2013 FCC 15.247:2013 FCC 15.407:2013	FCC OET 65C:2001 IEEE Std 1528:2003 FCC KDB 447498 D01 v05 FCC KDB 248227 D01 V01r02 FCC KDB 648474 D04 V01 FCC 865664 D01 and D02

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

None

RESULTS

Test Configuration	EUT Position	Body Worn Accessory	Headset	Frequency Band	Transmit Frequency (MHz)	Transmit Channel	Data Rate (kbps)	Modulation	Power Drift During Test (dB)	Measured 1g SAR Level (mW/g)	Scaled to 50% Duty Cycle ¹ (mW/g)	Test #
Body	Left	Holster	Yes	915	927.25	54	340	PRASK	-0.04	0.789	0.395	95b
Body	Front	Holster	Yes	915	927.25	54	340	PRASK	0	0.275	0.138	96

Note 1: Measured SAR after it has been scaled for a 50% duty cycle

Tested By:	Carl Engholm	Room Temperature (°C):	23.2
Date:	12/20/2012	Liquid Temperature (°C):	21.5
Serial Number:	8721244017	Humidity (%RH):	39
Configuration:	5	Bar. Pressure (mb):	1008
Comments:	None		

Test 95b

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 927.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 927.25$ MHz; $\sigma = 1.092$ mho/m; $\epsilon_r = 52.478$; $\rho = 1000$ kg/m³,
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Zoom Scan 2 (9x11x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.351 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.508 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.903 W/kg

Body/Body/Reference scan (41x121x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.15 W/kg

Body/Body/Area scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.935 W/kg

Body/Body/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.351 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.516 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.924 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm



[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of Total (measured) = 23.49 V/m

Maximum value of SAR (measured) = 0.603 W/kg

 
Approved By

Test 95b
W/kg

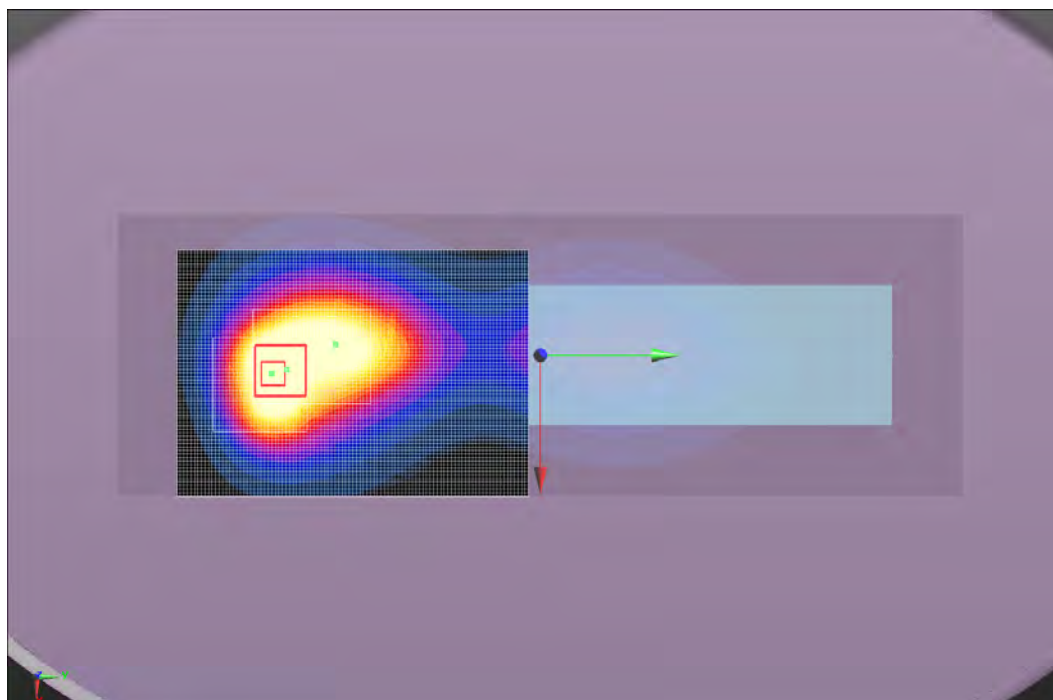

Tested By:	Carl Engholm	Room Temperature (°C):	23.7
Date:	12/20/2012	Liquid Temperature (°C):	21.4
Serial Number:	8721244017	Humidity (%RH):	33
Configuration:	5	Bar. Pressure (mb):	1008
Comments:	None		

Test 96

DUT: CK70; Type: 1001CP01F9; Serial: 8721244017

Communication System: CW; Communication System Band: D915 (915.0 MHz); Frequency: 927.25 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 927.25$ MHz; $\sigma = 1.092$ mho/m; $\epsilon_r = 52.478$; $\rho = 1000$ kg/m³,
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- DASY52 52.8.3(988); SEMCAD X 14.6.7(6848)

Body/Body/Reference scan (51x121x1): Interpolated grid: dx=3.000 mm, dy=3.000 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.344 W/kg

Body/Body/Area scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.303 W/kg

Body/Body/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.345 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.194 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.312 W/kg

Body/Body/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)



Maximum value of Total (measured) = 13.92 V/m

Maximum value of SAR (measured) = 0.212 W/kg

 
Approved By

Test 96

W/kg

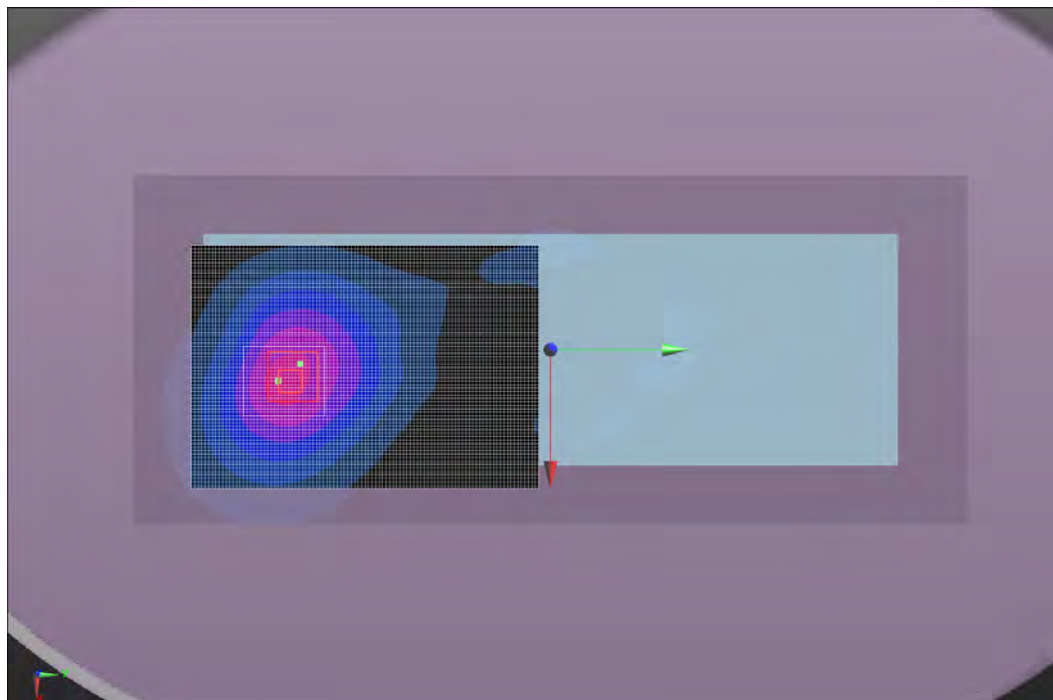

Test 95b

