

FCC TEST REPORT

REPORT NO.: RF980225L09

MODEL NO.: PB22 (refer to item 3.1 for more details)

RECEIVED: Mar. 02, 2009

TESTED: Mar. 02 ~ Mar. 04, 2009

ISSUED: Mar. 24, 2009

APPLICANT: Intermec Technologies Corporation

ADDRESS: 550 Second street SE, Cedar Rapids, IA 52401,
USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 89 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4	DESCRIPTION OF SUPPORT UNITS	9
4.	TEST TYPES AND RESULTS	10
4.1	RADIATED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	CONDUCTED EMISSION MEASUREMENT	40
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	40
4.2.2	TEST INSTRUMENTS	40
4.2.3	TEST PROCEDURES	41
4.2.4	DEVIATION FROM TEST STANDARD	41
4.2.5	TEST SETUP	42
4.2.6	EUT OPERATING CONDITIONS	42
4.2.7	TEST RESULTS	43
4.3	NUMBER OF HOPPING FREQUENCY USED	47
4.3.1	LIMIT OF HOPPING FREQUENCY USED	47
4.3.2	TEST INSTRUMENTS	47
4.3.3	TEST PROCEDURES	47
4.3.4	DEVIATION FROM TEST STANDARD	48
4.3.5	TEST SETUP	48
4.3.6	TEST RESULTS	48
4.4	DWELL TIME ON EACH CHANNEL	51
4.4.1	LIMIT OF DWELL TIME USED	51
4.4.2	TEST INSTRUMENTS	51
4.4.3	TEST PROCEDURES	51
4.4.4	DEVIATION FROM TEST STANDARD	51




A D T

4.4.5	TEST SETUP	51
4.4.6	TEST RESULTS	52
4.5	CHANNEL BANDWIDTH.....	60
4.5.1	LIMITS OF CHANNEL BANDWIDTH	60
4.5.2	TEST INSTRUMENTS	60
4.5.3	TEST PROCEDURE	60
4.5.4	DEVIATION FROM TEST STANDARD	60
4.5.5	TEST SETUP	61
4.5.6	EUT OPERATING CONDITION	61
4.5.7	TEST RESULTS	61
4.6	HOPPING CHANNEL SEPARATION	66
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION	66
4.6.2	TEST INSTRUMENTS	66
4.6.3	TEST PROCEDURES	66
4.6.4	DEVIATION FROM TEST STANDARD	66
4.6.5	TEST SETUP	66
4.6.6	TEST RESULTS	67
4.7	MAXIMUM PEAK OUTPUT POWER	71
4.7.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	71
4.7.2	TEST INSTRUMENTS	71
4.7.3	TEST PROCEDURES	71
4.7.4	DEVIATION FROM TEST STANDARD	71
4.7.5	TEST SETUP	72
4.7.6	EUT OPERATING CONDITION	72
4.7.7	TEST RESULTS	72
4.8	BAND EDGES MEASUREMENT	77
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	77
4.8.2	TEST INSTRUMENTS	77
4.8.3	TEST PROCEDURE	77
4.8.4	DEVIATION FROM TEST STANDARD	77
4.8.5	EUT OPERATING CONDITION	77
4.8.6	TEST RESULTS	78
4.9	ANTENNA REQUIREMENT	86
4.9.1	STANDARD APPLICABLE	86
4.9.2	ANTENNA CONNECTED CONSTRUCTION.....	86
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	87
6.	INFORMATION ON THE TESTING LABORATORIES.....	88
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	89


1. CERTIFICATION

PRODUCT: wireless portable printer
MODEL NO.: PB22 (refer to item 3.1 for more details)
BRAND: Intermec
APPLICANT: Intermec Technologies Corporation
TESTED: Mar. 02 ~ Mar. 04, 2009
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: PB22, PB32) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Mar. 24, 2009
Joanna Wang / Senior Specialist

TECHNICAL
ACCEPTANCE :  , **DATE** : Mar. 24, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY :  , **DATE** : Mar. 24, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -20.24dB at 0.298MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or $\frac{2}{3}$ *20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 21dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.01dB at 815.3900MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	2.93dB
	200MHz ~1000MHz	2.95dB
	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	wireless portable printer
MODEL NO.	PB22 (refer to NOTE 2 for more details)
FCC ID	EHA-RN41B
POWER SUPPLY	12.0Vdc from adapter 7.2Vdc from battery
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK for FHSS
MODULATION TECHNOLOGY	FHSS
TRANSFER RATE	1/2/3Mbps
FREQUENCY RANGE	2400MHz ~ 2483.5MHz
NUMBER OF CHANNEL	79
MAXIMUM OUTPUT POWER	8.790mW
ANTENNA TYPE	Chip antenna with -2.83dBi gain
I/O PORTS	Refer to user's manual
DATA CABLE	1.8m shielded RS232 cable without core
ACCESSORY DEVICES	Adapter, battery

NOTE:

1. Bluetooth technology is used in this EUT.
2. The models as below are identical to each other except for their model designation and size of outer appearance due to marketing requirement.

MODEL	DESCRIPTION
PB22	There are different size of outer appearance
PB32	

3. The EUT was powered by the following adapter and battery.

ADAPTER	
BRAND:	Intermec Technologies Corporation
MODEL:	AE19
INPUT:	100-240Vac, 47-63Hz, 1A
OUTPUT:	12Vdc, 4.15A, 50W
POWER LINE:	1.9m non-shielded cable with one core

BATTERY	
BRAND:	Intermec Technologies Corporation
MODEL:	AB27
RATING:	7.2Vdc, 2.25AH


4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

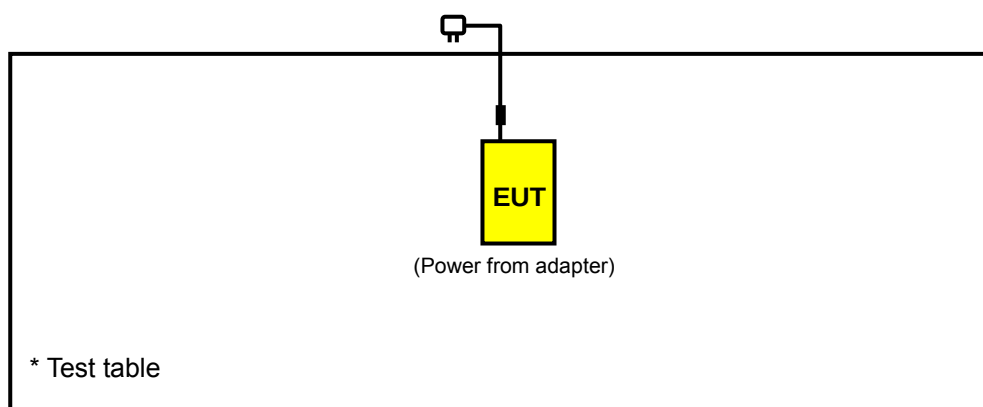

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	PB22
B	√	√	√	-	PB32

Where **RE≥1G**: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: "-" means no effect

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A, B	0 to 78	0, 39, 78	FHSS	GFSK	DH5	X
	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	0	FHSS	GFSK	DH5	X
B	0 to 78	39	FHSS	GFSK	DH5	

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0	FHSS	GFSK	DH5
B	0 to 78	39	FHSS	GFSK	DH5

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A, B	0 to 78	0, 78	FHSS	GFSK	DH5
	0 to 78	0, 78	FHSS	8DPSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	8DPSK	DH5

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 06, 2008	Aug. 05, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

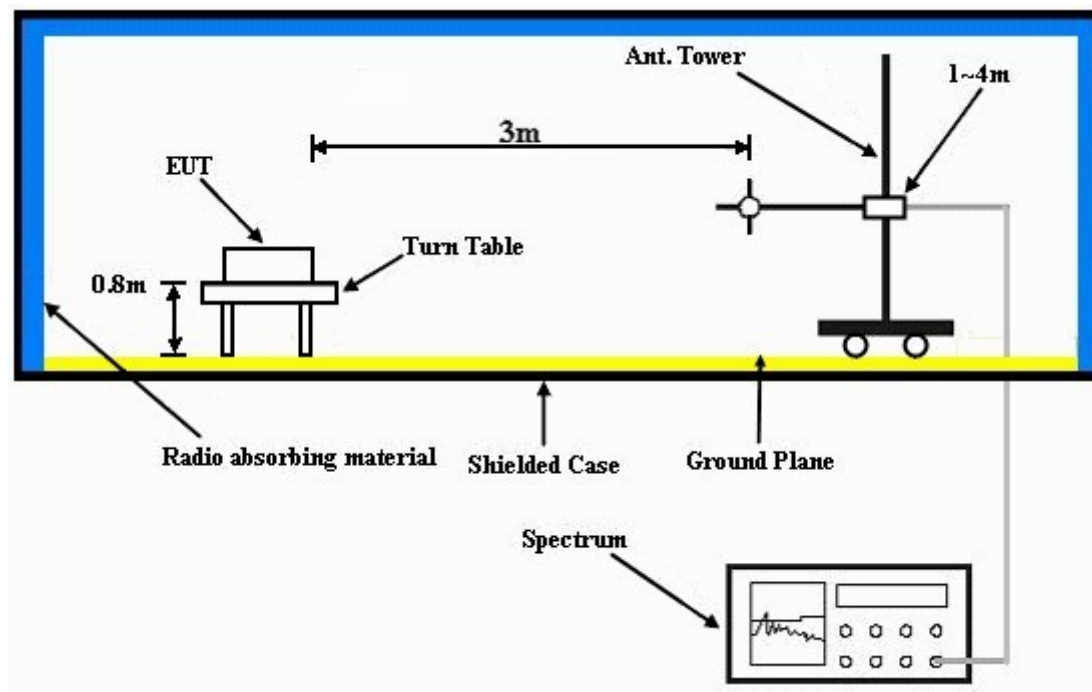

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

Placed the EUT on the testing table and set it under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

RADIATED WORST CASE DATA: ABOVE 1GHz:

GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	49.98 PK	74.00	-24.02	1.13 H	260	16.92	33.06
2	2386.00	43.55 AV	54.00	-10.45	1.13 H	260	10.49	33.06
3	2400.00	68.47 PK	74.00	-5.53	1.13 H	260	35.34	33.13
4	2400.00	38.37 AV	54.00	-15.63	1.13 H	260	5.24	33.13
5	*2402.00	104.55 PK			1.13 H	260	71.41	33.14
6	*2402.00	74.45 AV			1.13 H	260	41.31	33.14
7	3204.00	60.04 PK	74.00	-13.96	1.21 H	207	24.47	35.57
8	3204.00	50.59 AV	54.00	-3.41	1.21 H	207	15.02	35.57
9	4804.00	64.99 PK	74.00	-9.01	1.17 H	120	25.84	39.15
10	4804.00	34.89 AV	54.00	-19.11	1.17 H	120	-4.26	39.15
11	7206.00	59.25 PK	74.00	-14.75	1.09 H	107	14.04	45.21
12	7206.00	29.15 AV	54.00	-24.85	1.09 H	107	-16.06	45.21
13	9608.00	62.56 PK	74.00	-11.44	1.03 H	183	13.36	49.20
14	9608.00	32.46 AV	54.00	-21.54	1.03 H	183	-16.74	49.20
15	12010.00	65.62 PK	74.00	-8.38	1.27 H	179	14.29	51.33
16	12010.00	35.52 AV	54.00	-18.48	1.27 H	179	-15.81	51.33

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	48.89 PK	74.00	-25.11	1.02 V	298	15.83	33.06
2	2386.00	42.56 AV	54.00	-11.44	1.02 V	298	9.50	33.06
3	2400.00	67.67 PK	74.00	-6.33	1.01 V	298	34.54	33.13
4	2400.00	37.57 AV	54.00	-16.43	1.01 V	298	4.44	33.13
5	*2402.00	103.75 PK			1.01 V	298	70.61	33.14
6	*2402.00	73.65 AV			1.01 V	298	40.51	33.14
7	3204.00	59.81 PK	74.00	-14.19	1.07 V	120	24.24	35.57
8	3204.00	51.78 AV	54.00	-2.22	1.07 V	120	16.21	35.57
9	4804.00	66.25 PK	74.00	-7.75	1.10 V	168	27.10	39.15
10	4804.00	36.15 AV	54.00	-17.85	1.10 V	168	-3.00	39.15
11	7206.00	64.96 PK	74.00	-9.04	1.16 V	184	19.75	45.21
12	7206.00	34.86 AV	54.00	-19.14	1.16 V	184	-10.35	45.21
13	9608.00	68.83 PK	74.00	-5.17	1.14 V	195	19.63	49.20
14	9608.00	38.73 AV	54.00	-15.27	1.14 V	195	-10.47	49.20
15	12010.00	66.23 PK	74.00	-7.77	1.08 V	210	14.90	51.33
16	12010.00	36.13 AV	54.00	-17.87	1.08 V	210	-15.20	51.33

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	104.74 PK			1.11 H	265	71.45	33.29
2	*2441.00	74.64 AV			1.11 H	265	41.35	33.29
3	3256.00	55.89 PK	74.00	-18.11	1.15 H	269	20.36	35.53
4	3256.00	47.76 AV	54.00	-6.24	1.15 H	269	12.23	35.53
5	4882.00	61.75 PK	74.00	-12.25	1.04 H	120	22.61	39.14
6	4882.00	31.65 AV	54.00	-22.35	1.04 H	120	-7.49	39.14
7	7323.00	60.47 PK	74.00	-13.53	1.06 H	104	14.90	45.57
8	7323.00	30.37 AV	54.00	-23.63	1.06 H	104	-15.20	45.57
9	9764.00	65.29 PK	74.00	-8.71	1.21 H	178	15.81	49.48
10	9764.00	35.19 AV	54.00	-18.81	1.21 H	178	-14.29	49.48
11	12205.00	65.97 PK	74.00	-8.03	1.00 H	176	14.58	51.39
12	12205.00	35.87 AV	54.00	-18.13	1.00 H	176	-15.52	51.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.85 PK			1.00 V	298	70.56	33.29
2	*2441.00	73.75 AV			1.00 V	298	40.46	33.29
3	3256.00	57.26 PK	74.00	-16.74	1.11 V	168	21.73	35.53
4	3256.00	49.07 AV	54.00	-4.93	1.11 V	168	13.54	35.53
5	4882.00	62.99 PK	74.00	-11.01	1.11 V	172	23.85	39.14
6	4882.00	32.89 AV	54.00	-21.11	1.11 V	172	-6.25	39.14
7	7323.00	65.39 PK	74.00	-8.61	1.06 V	155	19.82	45.57
8	7323.00	35.29 AV	54.00	-18.71	1.06 V	155	-10.28	45.57
9	9764.00	68.14 PK	74.00	-5.86	1.18 V	164	18.66	49.48
10	9764.00	38.04 AV	54.00	-15.96	1.18 V	164	-11.44	49.48
11	12205.00	66.85 PK	74.00	-7.15	1.19 V	172	15.45	51.39
12	12205.00	36.75 AV	54.00	-17.25	1.19 V	172	-14.65	51.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.58 PK			1.09 H	263	71.13	33.45
2	*2480.00	74.48 AV			1.09 H	263	41.03	33.45
3	2483.50	57.69 PK	74.00	-16.31	1.09 H	263	24.23	33.46
4	2483.50	27.59 AV	54.00	-26.41	1.09 H	263	-5.87	33.46
5	3308.00	56.07 PK	74.00	-17.93	1.16 H	273	20.55	35.52
6	3308.00	48.62 AV	54.00	-5.38	1.16 H	273	13.10	35.52
7	4960.00	60.50 PK	74.00	-13.50	1.21 H	112	20.83	39.67
8	4960.00	30.40 AV	54.00	-23.60	1.21 H	112	-9.27	39.67
9	7440.00	60.28 PK	74.00	-13.72	1.06 H	108	14.34	45.94
10	7440.00	30.18 AV	54.00	-23.82	1.06 H	108	-15.76	45.94
11	9920.00	63.66 PK	74.00	-10.34	1.02 H	130	13.85	49.80
12	9920.00	33.56 AV	54.00	-20.44	1.02 H	130	-16.25	49.80
13	12400.00	63.74 PK	74.00	-10.26	1.04 H	81	12.44	51.30
14	12400.00	33.64 AV	54.00	-20.36	1.04 H	81	-17.66	51.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.50 PK			1.03 V	206	70.05	33.45
2	*2480.00	73.40 AV			1.03 V	206	39.95	33.45
3	2483.50	56.61 PK	74.00	-17.39	1.03 V	206	23.15	33.46
4	2483.50	26.51 AV	54.00	-27.49	1.03 V	206	-6.95	33.46
5	3308.00	58.99 PK	74.00	-15.01	1.10 V	198	23.47	35.52
6	3308.00	51.26 AV	54.00	-2.74	1.10 V	198	15.74	35.52
7	4960.00	63.72 PK	74.00	-10.28	1.21 V	169	24.05	39.67
8	4960.00	33.62 AV	54.00	-20.38	1.21 V	169	-6.05	39.67
9	7440.00	67.47 PK	74.00	-6.53	1.06 V	184	21.53	45.94
10	7440.00	37.37 AV	54.00	-16.63	1.06 V	184	-8.57	45.94
11	9920.00	65.40 PK	74.00	-8.60	1.07 V	47	15.60	49.80
12	9920.00	35.30 AV	54.00	-18.70	1.07 V	47	-14.50	49.80
13	12400.00	64.72 PK	74.00	-9.28	1.17 V	214	13.42	51.30
14	12400.00	34.62 AV	54.00	-19.38	1.17 V	214	-16.68	51.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	51.07 PK	74.00	-22.93	1.13 H	12	20.95	30.12
2	1601.00	43.06 AV	54.00	-10.94	1.13 H	12	12.94	30.12
3	2370.00	55.84 PK	74.00	-18.16	1.27 H	80	22.87	32.97
4	2370.00	46.31 AV	54.00	-7.69	1.27 H	80	13.34	32.97
5	2400.00	71.90 PK	74.00	-2.10	1.04 H	41	38.77	33.13
6	2400.00	41.80 AV	54.00	-12.20	1.04 H	41	8.67	33.13
7	*2402.00	106.10 PK			1.04 H	41	72.96	33.14
8	*2402.00	76.00 AV			1.04 H	41	42.86	33.14
9	3204.00	55.74 PK	74.00	-18.26	1.33 H	54	20.17	35.57
10	3204.00	47.81 AV	54.00	-6.19	1.33 H	54	12.24	35.57
11	4804.00	62.02 PK	74.00	-11.98	1.14 H	297	22.87	39.15
12	4804.00	31.92 AV	54.00	-22.08	1.14 H	297	-7.23	39.15
13	7206.00	63.03 PK	74.00	-10.97	1.22 H	75	17.82	45.21
14	7206.00	32.93 AV	54.00	-21.07	1.22 H	75	-12.28	45.21
15	9608.00	63.58 PK	74.00	-10.42	1.20 H	116	14.38	49.20
16	9608.00	33.48 AV	54.00	-20.52	1.20 H	116	-15.72	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	52.35 PK	74.00	-21.65	1.88 V	0	22.23	30.12
2	1601.00	44.38 AV	54.00	-9.62	1.88 V	0	14.26	30.12
3	2370.00	54.70 PK	74.00	-19.30	1.17 V	318	21.73	32.97
4	2370.00	45.30 AV	54.00	-8.70	1.17 V	318	12.33	32.97
5	2400.00	69.62 PK	74.00	-4.38	1.13 V	335	36.49	33.13
6	2400.00	39.52 AV	54.00	-14.48	1.13 V	335	6.39	33.13
7	*2402.00	103.82 PK			1.13 V	335	70.68	33.14
8	*2402.00	73.72 AV			1.13 V	335	40.58	33.14
9	3204.00	59.39 PK	74.00	-14.61	1.81 V	303	23.82	35.57
10	3204.00	51.52 AV	54.00	-2.48	1.81 V	303	15.95	35.57
11	4804.00	59.36 PK	74.00	-14.64	1.27 V	225	20.21	39.15
12	4804.00	29.26 AV	54.00	-24.74	1.27 V	225	-9.89	39.15
13	7206.00	61.53 PK	74.00	-12.47	1.16 V	31	16.32	45.21
14	7206.00	31.43 AV	54.00	-22.57	1.16 V	31	-13.78	45.21
15	9608.00	62.08 PK	74.00	-11.92	1.16 V	335	12.88	49.20
16	9608.00	32.98 AV	54.00	-21.02	1.16 V	335	-16.22	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	52.94 PK	74.00	-21.06	1.16 H	343	22.72	30.22
2	1628.00	44.92 AV	54.00	-9.08	1.16 H	343	14.70	30.22
3	*2441.00	106.39 PK			1.00 H	46	73.10	33.29
4	*2441.00	76.29 AV			1.00 H	46	43.00	33.29
5	3256.00	55.64 PK	74.00	-18.36	1.07 H	357	20.11	35.53
6	3256.00	47.98 AV	54.00	-6.02	1.07 H	357	12.45	35.53
7	4882.00	60.61 PK	74.00	-13.39	1.37 H	252	21.47	39.14
8	4882.00	30.51 AV	54.00	-23.49	1.37 H	252	-8.63	39.14
9	7323.00	64.50 PK	74.00	-9.50	1.25 H	100	18.93	45.57
10	7323.00	34.40 AV	54.00	-19.60	1.25 H	100	-11.17	45.57
11	9764.00	64.09 PK	74.00	-9.91	1.20 H	91	14.61	49.48
12	9764.00	33.99 AV	54.00	-20.01	1.20 H	91	-15.49	49.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1627.00	54.17 PK	74.00	-19.83	1.36 V	345	23.95	30.22
2	1627.00	46.21 AV	54.00	-7.79	1.36 V	345	15.99	30.22
3	*2441.00	104.28 PK			1.11 V	300	70.99	33.29
4	*2441.00	74.18 AV			1.11 V	300	40.89	33.29
5	3256.00	57.96 PK	74.00	-16.04	1.32 V	301	22.43	35.53
6	3256.00	50.32 AV	54.00	-3.68	1.32 V	301	14.79	35.53
7	4882.00	59.79 PK	74.00	-14.21	1.03 V	20	20.65	39.14
8	4882.00	29.69 AV	54.00	-24.31	1.03 V	20	-9.45	39.14
9	7323.00	63.51 PK	74.00	-10.49	1.39 V	60	17.94	45.57
10	7323.00	33.41 AV	54.00	-20.59	1.39 V	60	-12.16	45.57
11	9764.00	63.83 PK	74.00	-10.17	1.32 V	328	14.35	49.48
12	9764.00	33.73 AV	54.00	-20.27	1.32 V	328	-15.75	49.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1653.00	57.63 PK	74.00	-16.37	1.11 H	253	27.31	30.32
2	1653.00	49.12 AV	54.00	-4.88	1.11 H	253	18.80	30.32
3	*2480.00	105.87 PK			1.20 H	75	72.42	33.45
4	*2480.00	75.77 AV			1.20 H	75	42.32	33.45
5	2483.50	59.31 PK	74.00	-14.69	1.20 H	75	25.85	33.46
6	2483.50	29.21 AV	54.00	-24.79	1.20 H	75	-4.25	33.46
7	3306.00	58.47 PK	74.00	-15.53	1.10 H	37	22.96	35.51
8	3306.00	50.55 AV	54.00	-3.45	1.10 H	37	15.04	35.51
9	4960.00	60.90 PK	74.00	-13.10	1.38 H	246	21.23	39.67
10	4960.00	31.80 AV	54.00	-22.20	1.38 H	246	-7.87	39.67
11	7440.00	65.52 PK	74.00	-8.48	1.37 H	95	19.58	45.94
12	7440.00	34.42 AV	54.00	-19.58	1.37 H	95	-11.52	45.94
13	9920.00	62.94 PK	74.00	-11.06	1.20 H	78	13.14	49.80
14	9920.00	32.84 AV	54.00	-21.16	1.20 H	78	-16.96	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1653.00	58.99 PK	74.00	-15.01	1.33 V	334	28.67	30.32
2	1653.00	50.47 AV	54.00	-3.53	1.33 V	334	20.15	30.32
3	*2480.00	103.59 PK			1.11 V	353	70.14	33.45
4	*2480.00	73.49 AV			1.11 V	353	40.04	33.45
5	2483.50	57.03 PK	74.00	-16.97	1.11 V	353	23.57	33.46
6	2483.50	26.93 AV	54.00	-27.07	1.11 V	353	-6.53	33.46
7	3306.00	59.64 PK	74.00	-14.36	1.00 V	163	24.13	35.51
8	3306.00	51.96 AV	54.00	-2.04	1.00 V	163	16.45	35.51
9	4960.00	59.21 PK	74.00	-14.79	1.03 V	100	19.54	39.67
10	4960.00	29.11 AV	54.00	-24.89	1.03 V	100	-10.56	39.67
11	7440.00	64.06 PK	74.00	-9.94	1.28 V	8	18.12	45.94
12	7440.00	33.96 AV	54.00	-20.04	1.28 V	8	-11.98	45.94
13	9920.00	61.84 PK	74.00	-12.16	1.24 V	337	12.03	49.80
14	9920.00	31.74 AV	54.00	-22.26	1.24 V	337	-18.07	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

8DPSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	51.83 PK	74.00	-22.17	1.06 H	206	18.78	33.06
2	2386.00	45.04 AV	54.00	-8.96	1.06 H	206	11.99	33.06
3	2400.00	59.95 PK	74.00	-14.05	1.06 H	206	26.82	33.13
4	2400.00	29.85 AV	54.00	-24.15	1.06 H	206	-3.28	33.13
5	*2402.00	102.40 PK			1.06 H	206	69.26	33.14
6	*2402.00	72.30 AV			1.06 H	206	39.16	33.14
7	3204.00	54.43 PK	74.00	-19.57	1.00 H	353	18.86	35.57
8	3204.00	44.33 AV	54.00	-9.67	1.00 H	353	8.76	35.57
9	4804.00	59.52 PK	74.00	-14.48	1.02 H	45	20.37	39.15
10	4804.00	29.42 AV	54.00	-24.58	1.02 H	45	-9.73	39.15
11	7206.00	57.17 PK	74.00	-16.83	1.16 H	97	11.96	45.21
12	7206.00	27.07 AV	54.00	-26.93	1.16 H	97	-18.14	45.21
13	9608.00	60.23 PK	74.00	-13.77	1.08 H	103	11.03	49.20
14	9608.00	30.13 AV	54.00	-23.87	1.08 H	103	-19.07	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.06 PK	74.00	-23.94	1.00 V	156	16.98	33.08
2	2390.00	43.34 AV	54.00	-10.66	1.00 V	156	10.26	33.08
3	2400.00	57.81 PK	74.00	-16.19	1.00 V	155	24.68	33.13
4	2400.00	27.71 AV	54.00	-26.29	1.00 V	155	-5.42	33.13
5	*2402.00	100.26 PK			1.00 V	155	67.12	33.14
6	*2402.00	70.16 AV			1.00 V	155	37.02	33.14
7	3204.00	55.39 PK	74.00	-18.61	1.10 V	33	19.82	35.57
8	3204.00	46.18 AV	54.00	-7.82	1.10 V	33	10.61	35.57
9	4804.00	60.16 PK	74.00	-13.84	1.06 V	61	21.01	39.15
10	4804.00	30.06 AV	54.00	-23.94	1.06 V	61	-9.09	39.15
11	7206.00	58.31 PK	74.00	-15.69	1.68 V	67	13.10	45.21
12	7206.00	28.21 AV	54.00	-25.79	1.68 V	67	-17.00	45.21
13	9608.00	62.05 PK	74.00	-11.95	1.25 V	47	12.85	49.20
14	9608.00	31.95 AV	54.00	-22.05	1.25 V	47	-17.25	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.94 PK			1.11 H	266	69.65	33.29
2	*2441.00	72.84 AV			1.11 H	266	39.55	33.29
3	3256.00	53.79 PK	74.00	-20.21	1.08 H	201	18.26	35.53
4	3256.00	46.03 AV	54.00	-7.97	1.08 H	201	10.50	35.53
5	4882.00	59.34 PK	74.00	-14.66	1.11 H	216	20.20	39.14
6	4882.00	29.24 AV	54.00	-24.76	1.11 H	216	-9.90	39.14
7	7323.00	58.79 PK	74.00	-15.21	1.05 H	234	13.22	45.57
8	7323.00	28.69 AV	54.00	-25.31	1.05 H	234	-16.88	45.57
9	9764.00	61.58 PK	74.00	-12.42	1.12 H	215	12.10	49.48
10	9764.00	31.48 AV	54.00	-22.52	1.12 H	215	-18.00	49.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.78 PK			1.00 V	297	67.49	33.29
2	*2441.00	70.68 AV			1.00 V	297	37.39	33.29
3	3256.00	55.21 PK	74.00	-18.79	1.00 V	172	19.68	35.53
4	3256.00	47.51 AV	54.00	-6.49	1.00 V	172	11.98	35.53
5	4882.00	60.97 PK	74.00	-13.03	1.06 V	163	21.83	39.14
6	4882.00	30.87 AV	54.00	-23.13	1.06 V	163	-8.27	39.14
7	7323.00	61.14 PK	74.00	-12.86	1.00 V	164	15.57	45.57
8	7323.00	31.04 AV	54.00	-22.96	1.00 V	164	-14.53	45.57
9	9764.00	62.93 PK	74.00	-11.07	1.02 V	158	13.45	49.48
10	9764.00	32.83 AV	54.00	-21.17	1.02 V	158	-16.65	49.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	102.26 PK			1.14 H	348	68.81	33.45
2	*2480.00	72.16 AV			1.14 H	348	38.71	33.45
3	2483.50	58.40 PK	74.00	-15.60	1.14 H	348	24.94	33.46
4	2483.50	28.30 AV	54.00	-25.70	1.14 H	348	-5.16	33.46
5	3308.00	55.04 PK	74.00	-18.96	1.12 H	193	19.52	35.52
6	3308.00	47.49 AV	54.00	-6.51	1.12 H	193	11.97	35.52
7	4960.00	57.89 PK	74.00	-16.11	1.05 H	201	18.22	39.67
8	4960.00	27.79 AV	54.00	-26.21	1.05 H	201	-11.88	39.67
9	7440.00	61.19 PK	74.00	-12.81	1.00 H	188	15.25	45.94
10	7440.00	31.09 AV	54.00	-22.91	1.00 H	188	-14.85	45.94
11	9920.00	61.35 PK	74.00	-12.65	1.00 H	196	11.55	49.80
12	9920.00	31.25 AV	54.00	-22.75	1.00 H	196	-18.55	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Lori Chiu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.03 PK			1.00 V	158	66.58	33.45
2	*2480.00	69.93 AV			1.00 V	158	36.48	33.45
3	2483.50	56.17 PK	74.00	-17.83	1.00 V	158	22.71	33.46
4	2483.50	26.07 AV	54.00	-27.93	1.00 V	158	-7.39	33.46
5	3308.00	56.37 PK	74.00	-17.63	1.11 V	164	20.85	35.52
6	3308.00	48.86 AV	54.00	-5.14	1.11 V	164	13.34	35.52
7	4960.00	59.44 PK	74.00	-14.56	1.13 V	173	19.77	39.67
8	4960.00	29.34 AV	54.00	-24.66	1.13 V	173	-10.33	39.67
9	7440.00	62.83 PK	74.00	-11.17	1.00 V	168	16.89	45.94
10	7440.00	32.73 AV	54.00	-21.27	1.00 V	168	-13.21	45.94
11	9920.00	62.64 PK	74.00	-11.36	1.00 V	171	12.83	49.80
12	9920.00	32.54 AV	54.00	-21.46	1.00 V	171	-17.27	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	50.70 PK	74.00	-23.30	1.53 H	10	20.58	30.12
2	1601.00	44.58 AV	54.00	-9.42	1.53 H	10	14.46	30.12
3	2370.00	52.86 PK	74.00	-21.14	1.29 H	57	19.89	32.97
4	2370.00	46.73 AV	54.00	-7.27	1.29 H	57	13.76	32.97
5	2400.00	59.57 PK	74.00	-14.43	1.02 H	352	26.44	33.13
6	2400.00	29.47 AV	54.00	-24.53	1.02 H	352	-3.66	33.13
7	*2402.00	104.55 PK			1.02 H	352	71.41	33.14
8	*2402.00	74.45 AV			1.02 H	352	41.31	33.14
9	3204.00	54.36 PK	74.00	-19.64	1.40 H	15	18.79	35.57
10	3204.00	46.70 AV	54.00	-7.30	1.40 H	15	11.13	35.57
11	4804.00	60.30 PK	74.00	-13.70	1.13 H	263	21.15	39.15
12	4804.00	30.20 AV	54.00	-23.80	1.13 H	263	-8.95	39.15
13	7206.00	61.58 PK	74.00	-12.42	1.18 H	142	16.37	45.21
14	7206.00	31.48 AV	54.00	-22.52	1.18 H	142	-13.73	45.21
15	9608.00	61.13 PK	74.00	-12.87	1.26 H	176	11.93	49.20
16	9608.00	31.03 AV	54.00	-22.97	1.26 H	176	-18.17	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	52.06 PK	74.00	-21.94	1.00 V	356	21.94	30.12
2	1601.00	45.54 AV	54.00	-8.46	1.00 V	356	15.42	30.12
3	2370.00	51.35 PK	74.00	-22.65	1.14 V	348	18.38	32.97
4	2370.00	45.21 AV	54.00	-8.79	1.14 V	348	12.24	32.97
5	2400.00	56.72 PK	74.00	-17.28	1.14 V	348	23.59	33.13
6	2400.00	26.62 AV	54.00	-27.38	1.14 V	348	-6.51	33.13
7	*2402.00	101.70 PK			1.14 V	348	68.56	33.14
8	*2402.00	71.60 AV			1.14 V	348	38.46	33.14
9	3204.00	58.64 PK	74.00	-15.36	1.00 V	308	23.07	35.57
10	3204.00	49.41 AV	54.00	-4.59	1.00 V	308	13.84	35.57
11	4804.00	57.33 PK	74.00	-16.67	1.05 V	32	18.18	39.15
12	4804.00	27.23 AV	54.00	-26.77	1.05 V	32	-11.92	39.15
13	7206.00	59.85 PK	74.00	-14.15	1.43 V	54	14.64	45.21
14	7206.00	29.75 AV	54.00	-24.25	1.43 V	54	-15.46	45.21
15	9608.00	58.16 PK	74.00	-15.84	1.00 V	120	8.96	49.20
16	9608.00	28.06 AV	54.00	-25.94	1.00 V	120	-21.14	49.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	53.79 PK	74.00	-20.21	1.23 H	354	23.57	30.22
2	1628.00	43.04 AV	54.00	-10.96	1.23 H	354	12.82	30.22
3	*2441.00	105.12 PK			1.00 H	42	71.83	33.29
4	*2441.00	75.02 AV			1.00 H	42	41.73	33.29
5	3256.00	55.69 PK	74.00	-18.31	1.31 H	48	20.16	35.53
6	3256.00	46.23 AV	54.00	-7.77	1.31 H	48	10.70	35.53
7	4882.00	57.86 PK	74.00	-16.14	1.14 H	253	18.72	39.14
8	4882.00	27.76 AV	54.00	-26.24	1.14 H	253	-11.38	39.14
9	7323.00	59.65 PK	74.00	-14.35	1.25 H	98	14.08	45.57
10	7323.00	29.55 AV	54.00	-24.45	1.25 H	98	-16.02	45.57
11	9764.00	60.91 PK	74.00	-13.09	1.27 H	75	11.43	49.48
12	9764.00	30.81 AV	54.00	-23.19	1.27 H	75	-18.67	49.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1628.00	55.38 PK	74.00	-18.62	1.00 V	295	25.16	30.22
2	1628.00	44.76 AV	54.00	-9.24	1.00 V	295	14.54	30.22
3	*2441.00	102.04 PK			1.28 V	278	68.75	33.29
4	*2441.00	71.94 AV			1.28 V	278	38.65	33.29
5	3256.00	58.21 PK	74.00	-15.79	1.05 V	175	22.68	35.53
6	3256.00	48.79 AV	54.00	-5.21	1.05 V	175	13.26	35.53
7	4882.00	56.23 PK	74.00	-17.77	1.05 V	31	17.09	39.14
8	4882.00	26.13 AV	54.00	-27.87	1.05 V	31	-13.01	39.14
9	7323.00	58.14 PK	74.00	-15.86	1.18 V	46	12.57	45.57
10	7323.00	28.04 AV	54.00	-25.96	1.18 V	46	-17.53	45.57
11	9764.00	59.32 PK	74.00	-14.68	1.00 V	154	9.84	49.48
12	9764.00	29.22 AV	54.00	-24.78	1.00 V	154	-20.26	49.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1653.00	55.13 PK	74.00	-18.87	1.12 H	253	24.81	30.32
2	1653.00	42.70 AV	54.00	-11.30	1.12 H	253	12.38	30.32
3	*2480.00	104.49 PK			1.00 H	43	71.04	33.45
4	*2480.00	74.39 AV			1.00 H	43	40.94	33.45
5	2483.50	59.29 PK	74.00	-14.71	1.00 H	44	25.83	33.46
6	2483.50	29.19 AV	54.00	-24.81	1.00 H	44	-4.27	33.46
7	3308.00	56.20 PK	74.00	-17.80	1.09 H	31	20.68	35.52
8	3308.00	46.37 AV	54.00	-7.63	1.09 H	31	10.85	35.52
9	4960.00	56.38 PK	74.00	-17.62	1.13 H	244	16.71	39.67
10	4960.00	26.28 AV	54.00	-27.72	1.13 H	244	-13.39	39.67
11	7440.00	60.24 PK	74.00	-13.76	1.00 H	93	14.30	45.94
12	7440.00	30.14 AV	54.00	-23.86	1.00 H	93	-15.80	45.94
13	9920.00	60.32 PK	74.00	-13.68	1.18 H	12	10.51	49.80
14	9920.00	30.22 AV	54.00	-23.78	1.18 H	12	-19.59	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1 \text{ dB}$.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1018hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1653.00	56.96 PK	74.00	-17.04	1.00 V	328	26.64	30.32
2	1653.00	44.51 AV	54.00	-9.49	1.00 V	328	14.19	30.32
3	*2480.00	101.56 PK			1.32 V	295	68.11	33.45
4	*2480.00	71.46 AV			1.32 V	295	38.01	33.45
5	2483.50	56.36 PK	74.00	-17.64	1.32 V	295	22.90	33.46
6	2483.50	26.26 AV	54.00	-27.74	1.32 V	295	-7.20	33.46
7	3308.00	58.42 PK	74.00	-15.58	1.03 V	161	22.90	35.52
8	3308.00	48.79 AV	54.00	-5.21	1.03 V	161	13.27	35.52
9	4960.00	54.24 PK	74.00	-19.76	1.03 V	28	14.57	39.67
10	4960.00	24.14 AV	54.00	-29.86	1.03 V	28	-15.53	39.67
11	7440.00	58.65 PK	74.00	-15.35	1.35 V	61	12.71	45.94
12	7440.00	28.55 AV	54.00	-25.45	1.35 V	61	-17.39	45.94
13	9920.00	58.49 PK	74.00	-15.51	1.00 V	132	8.69	49.80
14	9920.00	28.39 AV	54.00	-25.61	1.00 V	132	-21.41	49.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
 7. Average value = peak reading + $20\log(\text{duty cycle})$.

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018hPa	TESTED BY	Mark Liao
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	257.38	35.32 QP	46.00	-10.68	1.50 H	349	22.35	12.97
2	360.43	34.78 QP	46.00	-11.22	1.00 H	10	19.68	15.10
3	424.59	39.16 QP	46.00	-6.84	2.00 H	190	22.28	16.88
4	619.02	39.54 QP	46.00	-6.46	1.25 H	283	17.48	22.06
5	815.39	37.36 QP	46.00	-8.64	1.00 H	193	11.94	25.42
6	982.60	38.34 QP	54.00	-15.66	1.50 H	10	11.70	26.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	162.11	30.21 QP	43.50	-13.29	1.00 V	73	16.66	13.55
2	257.38	31.73 QP	46.00	-14.27	1.50 V	10	18.76	12.97
3	527.64	35.62 QP	46.00	-10.38	1.00 V	283	15.53	20.08
4	619.02	39.58 QP	46.00	-6.42	1.00 V	22	17.51	22.06
5	815.39	43.99 QP	46.00	-2.01	1.25 V	70	18.57	25.42
6	877.61	41.98 QP	46.00	-4.02	1.25 V	34	16.08	25.90

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1018hPa	TESTED BY	Mark Liao
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	230.16	34.87 QP	46.00	-11.13	1.25 H	112	22.92	11.94
2	257.38	39.55 QP	46.00	-6.45	1.00 H	70	26.58	12.97
3	412.92	34.58 QP	46.00	-11.42	2.00 H	145	18.09	16.49
4	671.52	40.58 QP	46.00	-5.42	1.25 H	163	18.08	22.49
5	815.39	39.94 QP	46.00	-6.06	1.25 H	31	14.52	25.42
6	877.61	36.92 QP	46.00	-9.08	1.00 H	340	11.02	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	257.38	34.38 QP	46.00	-11.62	1.25 V	16	21.41	12.97
2	412.92	32.58 QP	46.00	-13.42	1.00 V	355	16.09	16.49
3	619.02	36.89 QP	46.00	-9.11	1.00 V	76	14.82	22.06
4	724.01	34.53 QP	46.00	-11.47	1.50 V	55	11.22	23.31
5	877.61	37.52 QP	46.00	-8.48	1.25 V	85	11.63	25.90
6	947.60	35.54 QP	46.00	-10.46	1.75 V	328	9.06	26.47

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 22, 2008	Sep. 21, 2009
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 29, 2008	Dec. 28, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 30, 2008	Jul. 29, 2009
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

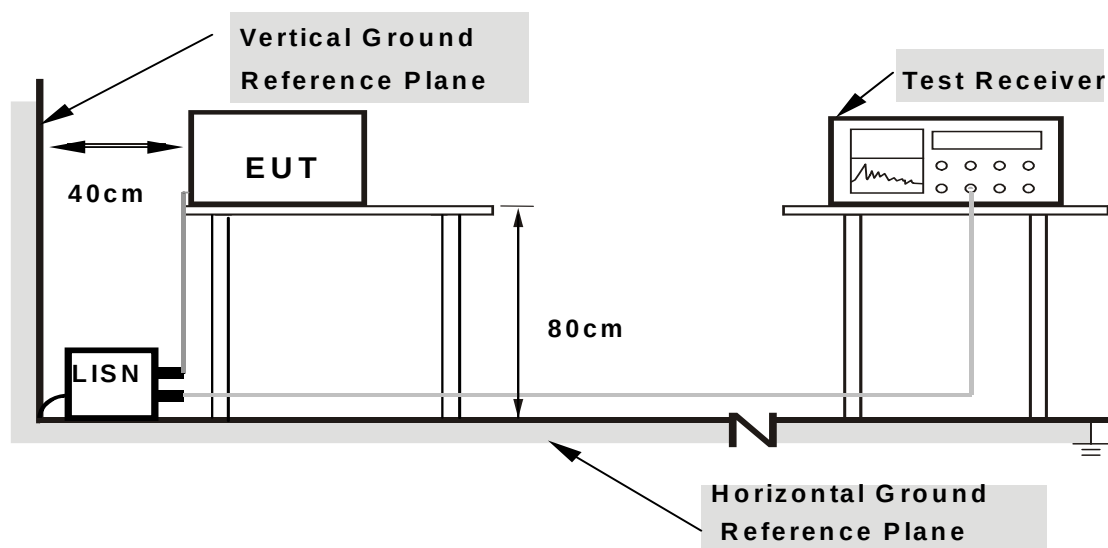

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST CASE DATA: GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	PHASE	Line 1
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH, 1018hPa	INPUT POWER	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Sun Lin

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	41.58	-	41.71	-	66.00	56.00	-24.29	-
2	0.224	0.13	36.46	-	36.59	-	62.66	52.66	-26.07	-
3	0.373	0.14	37.75	-	37.89	-	58.44	48.44	-20.55	-
4	0.443	0.14	27.76	-	27.90	-	57.01	47.01	-29.10	-
5	0.595	0.15	29.31	-	29.46	-	56.00	46.00	-26.54	-
6	5.868	0.33	29.20	-	29.53	-	60.00	50.00	-30.47	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

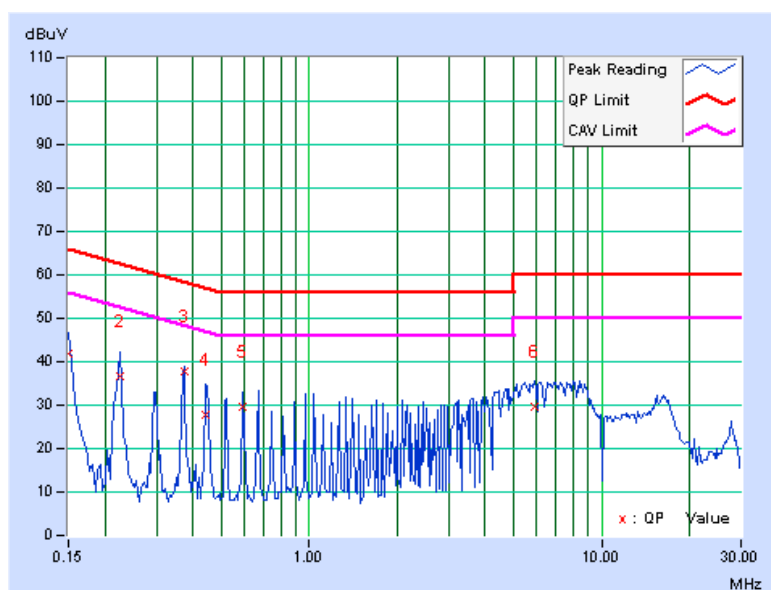

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	PHASE	Line 2
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH, 1018hPa	INPUT POWER	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Sun Lin

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	39.93	-	40.06	-	66.00	56.00	-25.94	-
2	0.298	0.14	39.91	-	40.05	-	60.29	50.29	-20.24	-
3	0.373	0.15	32.36	-	32.51	-	58.44	48.44	-25.93	-
4	0.443	0.15	31.90	-	32.05	-	57.01	47.01	-24.95	-
5	0.670	0.16	27.82	-	27.98	-	56.00	46.00	-28.02	-
6	1.113	0.17	25.04	-	25.21	-	56.00	46.00	-30.79	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

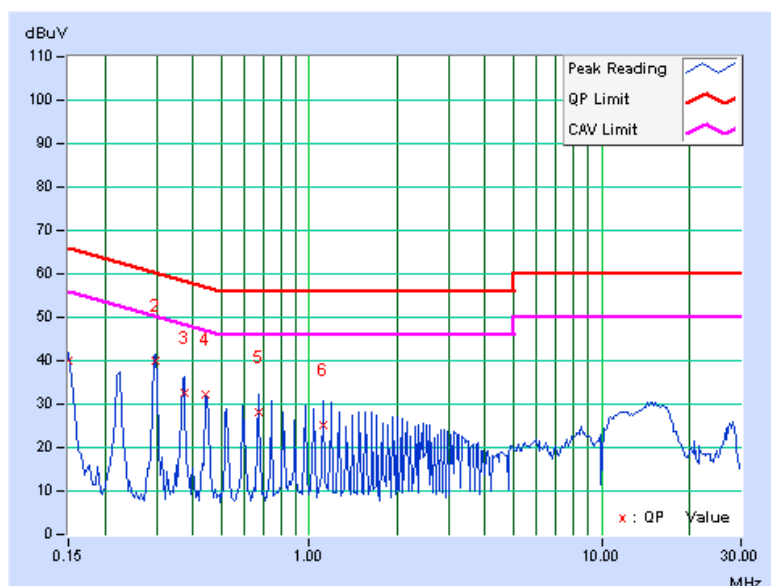

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	PHASE	Line 1
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH, 1018hPa	INPUT POWER	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Sun Lin

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	35.90	-	36.03	-	66.00	56.00	-29.97	-
2	0.298	0.13	37.01	-	37.14	-	60.29	50.29	-23.14	-
3	0.373	0.14	35.67	-	35.81	-	58.44	48.44	-22.63	-
4	0.447	0.14	34.83	-	34.97	-	56.93	46.93	-21.96	-
5	0.892	0.16	32.14	-	32.30	-	56.00	46.00	-23.70	-
6	1.410	0.18	30.67	-	30.85	-	56.00	46.00	-25.15	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

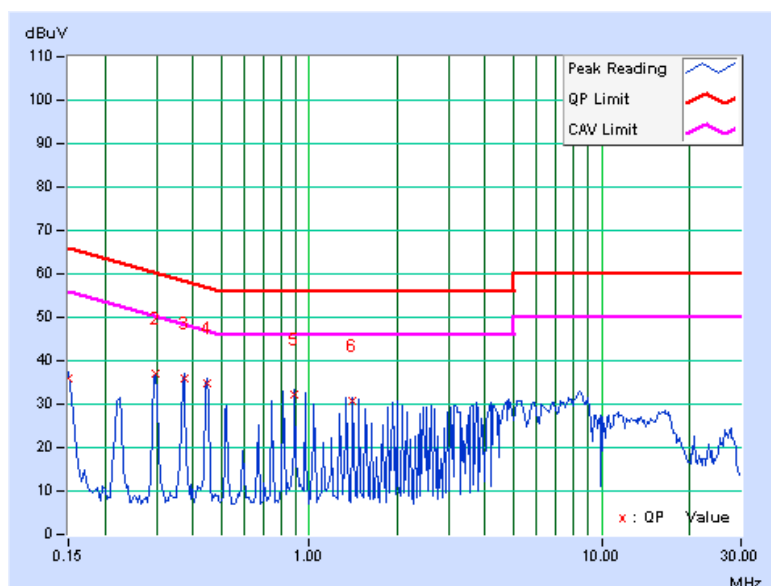

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 39	PHASE	Line 2
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	23deg. C, 69%RH, 1018hPa	INPUT POWER	120Vac, 60 Hz
TEST MODE	B	TESTED BY	Sun Lin

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	36.45	-	36.58	-	66.00	56.00	-29.42	-
2	0.298	0.14	37.27	-	37.41	-	60.29	50.29	-22.88	-
3	0.373	0.15	35.46	-	35.61	-	58.44	48.44	-22.83	-
4	0.447	0.15	35.06	-	35.21	-	56.93	46.93	-21.72	-
5	0.818	0.16	32.26	-	32.42	-	56.00	46.00	-23.58	-
6	1.410	0.18	29.26	-	29.44	-	56.00	46.00	-26.56	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

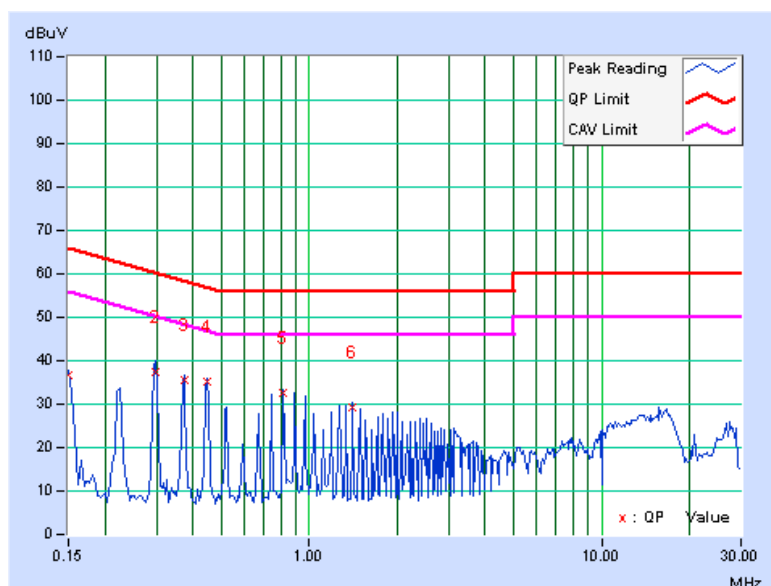

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP





4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

GFSK MODULATION

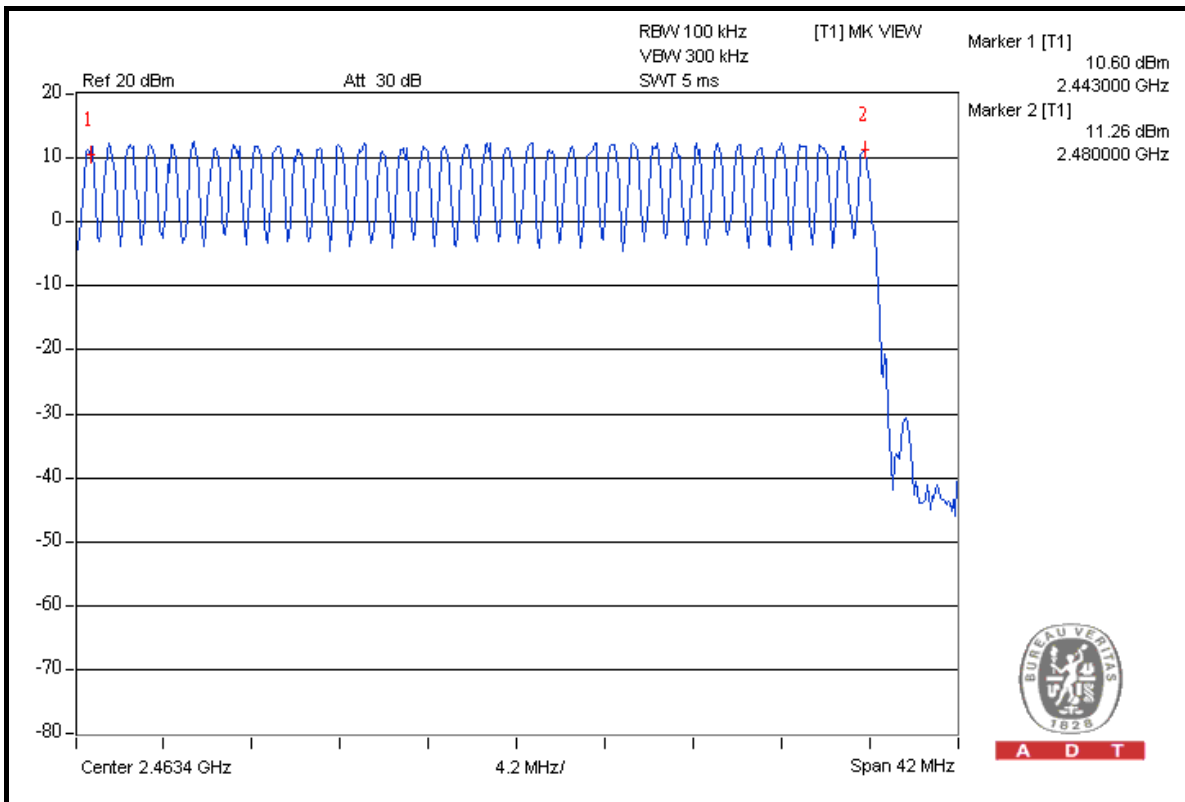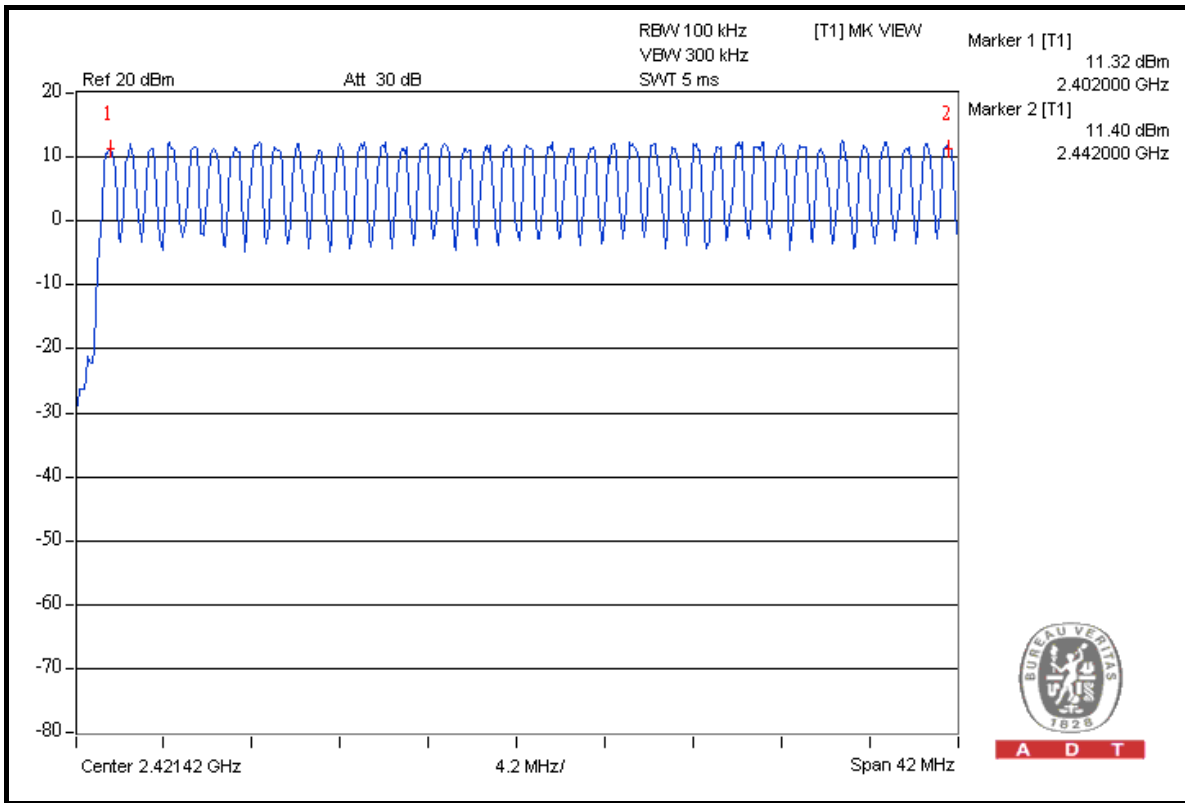

8DPSK MODULATION

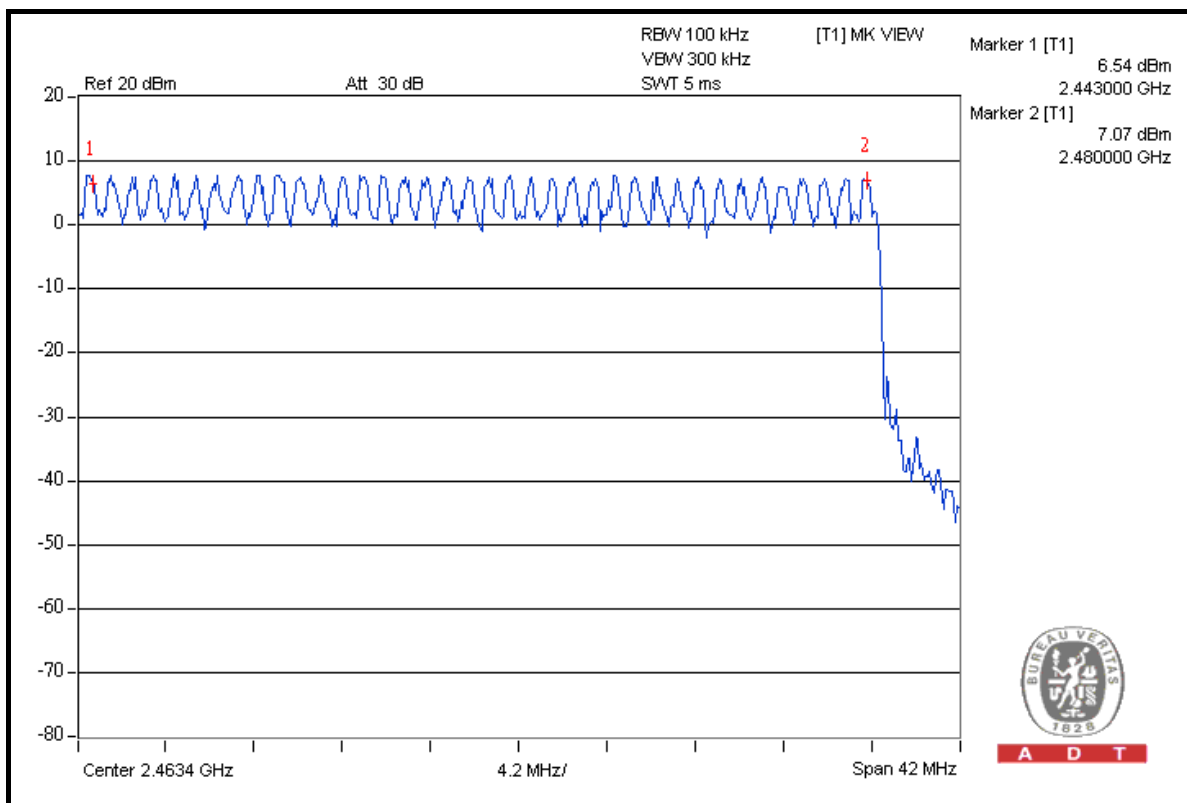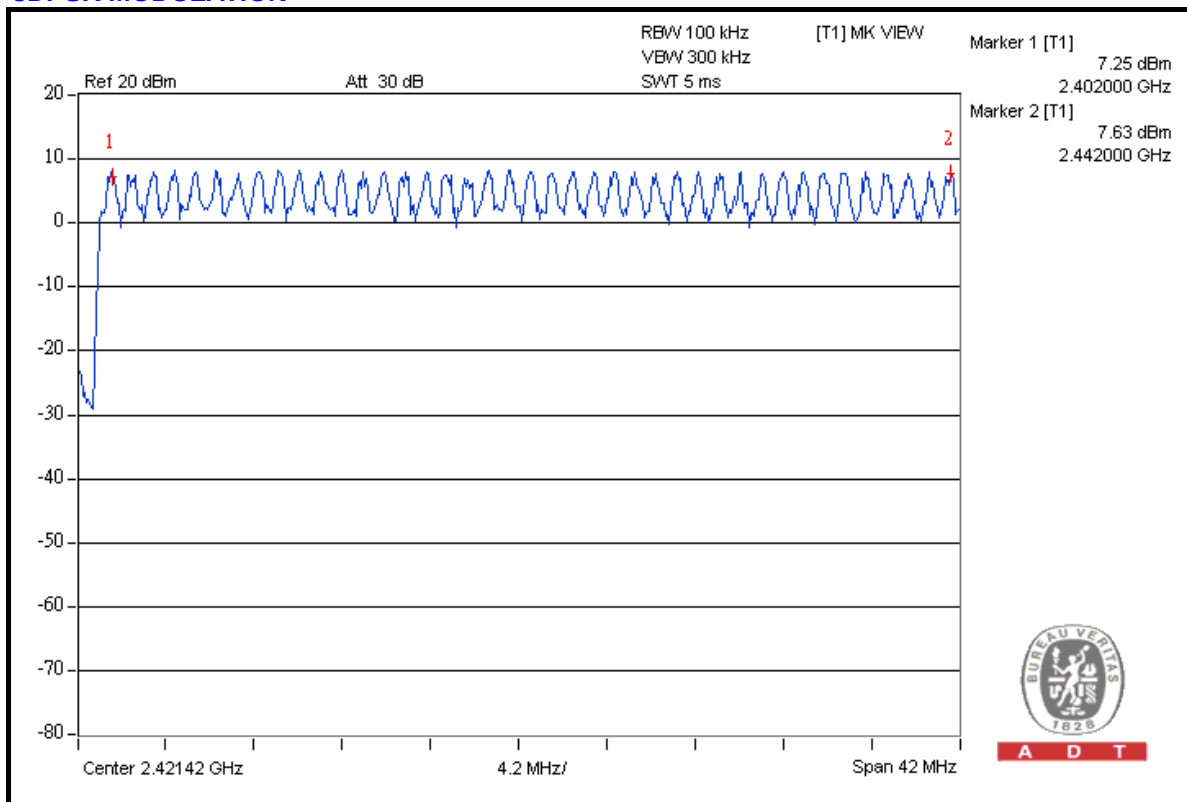

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

Same as 4.3.5.

4.4.6 TEST RESULTS

GFSK MODULATION



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.492	158.581	400
DH3	25 (times / 5 sec) * 6.32 = 158.00 times	1.734	273.972	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	2.970	319.097	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

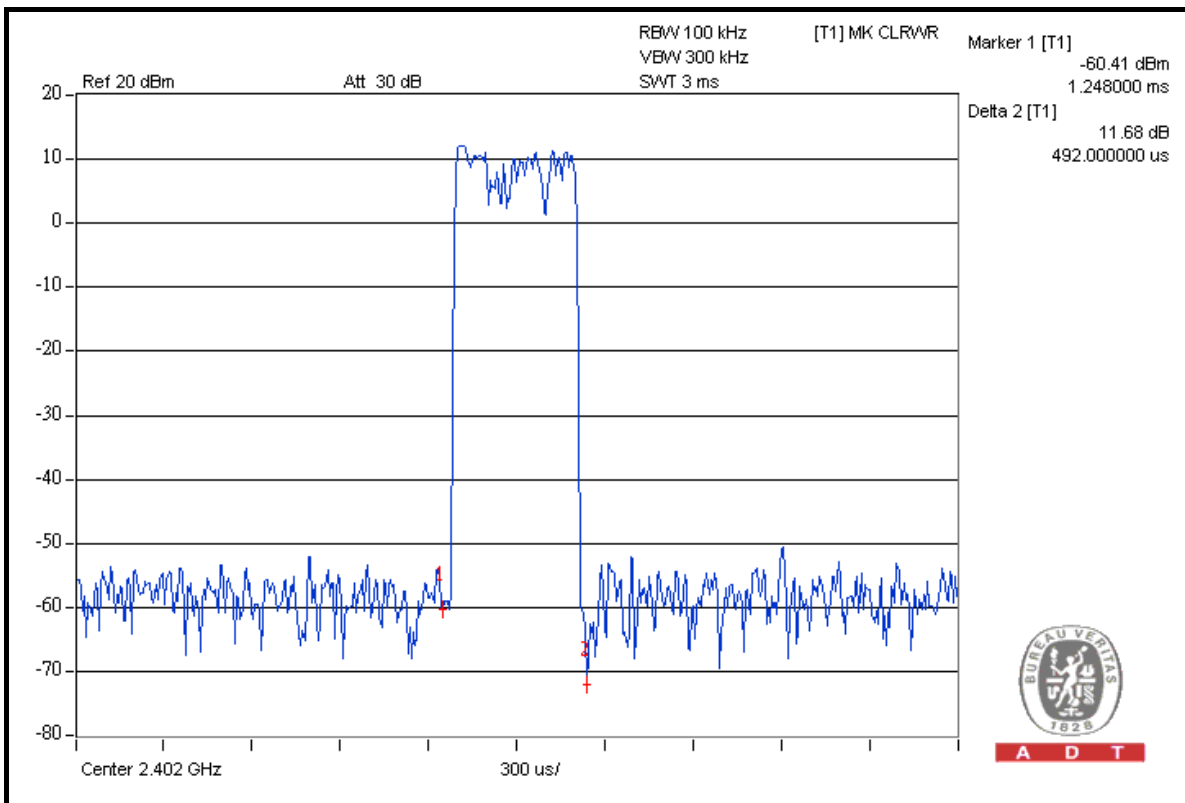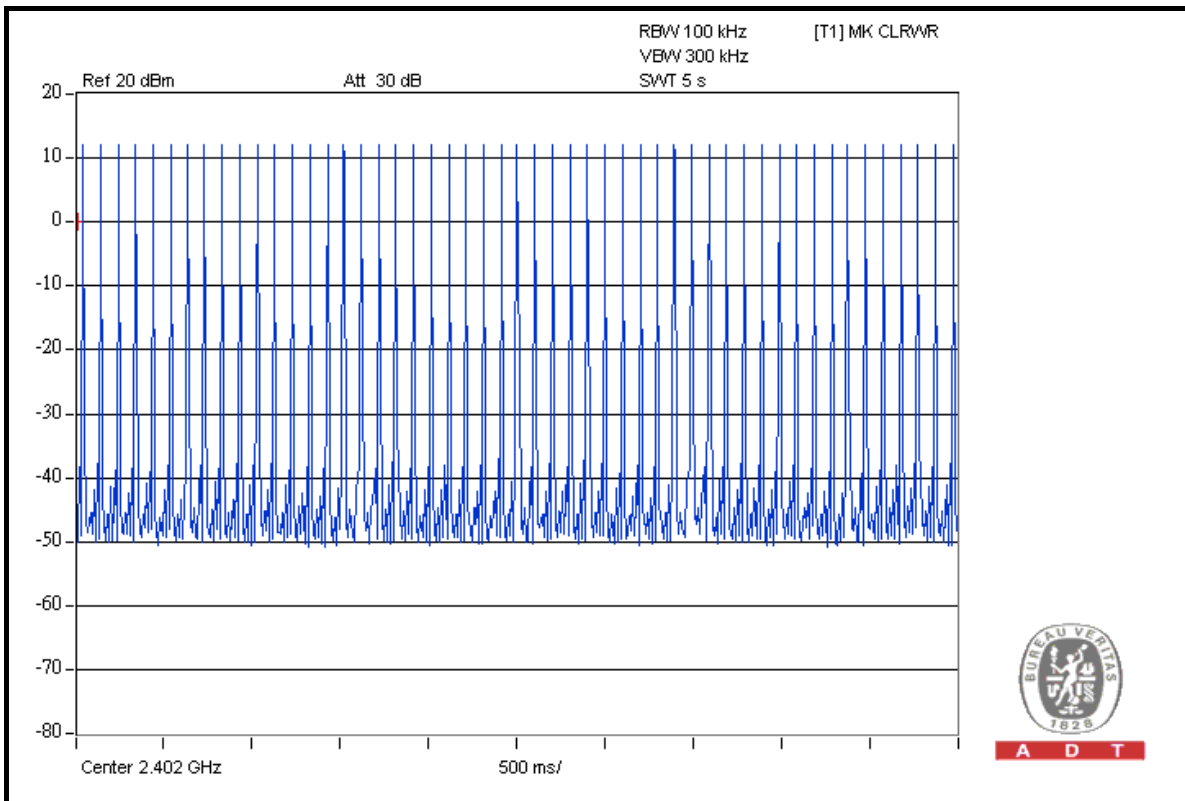



A D T



DH3

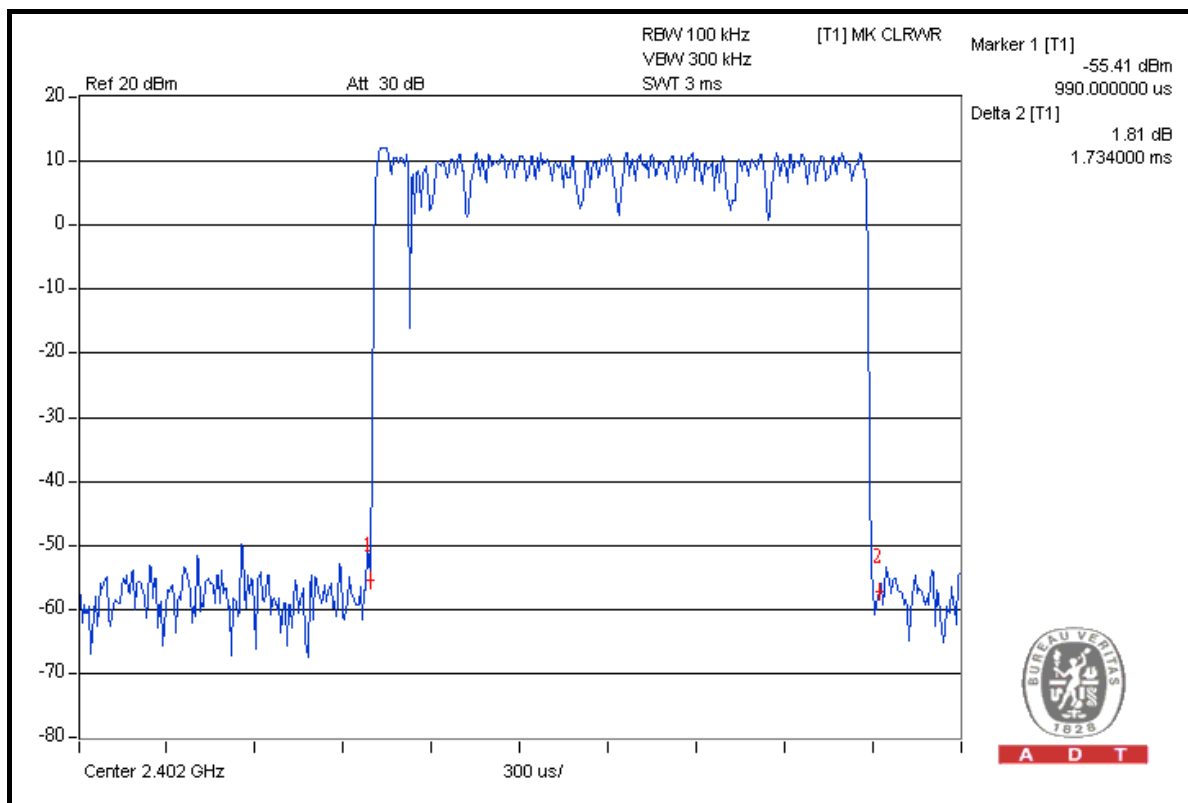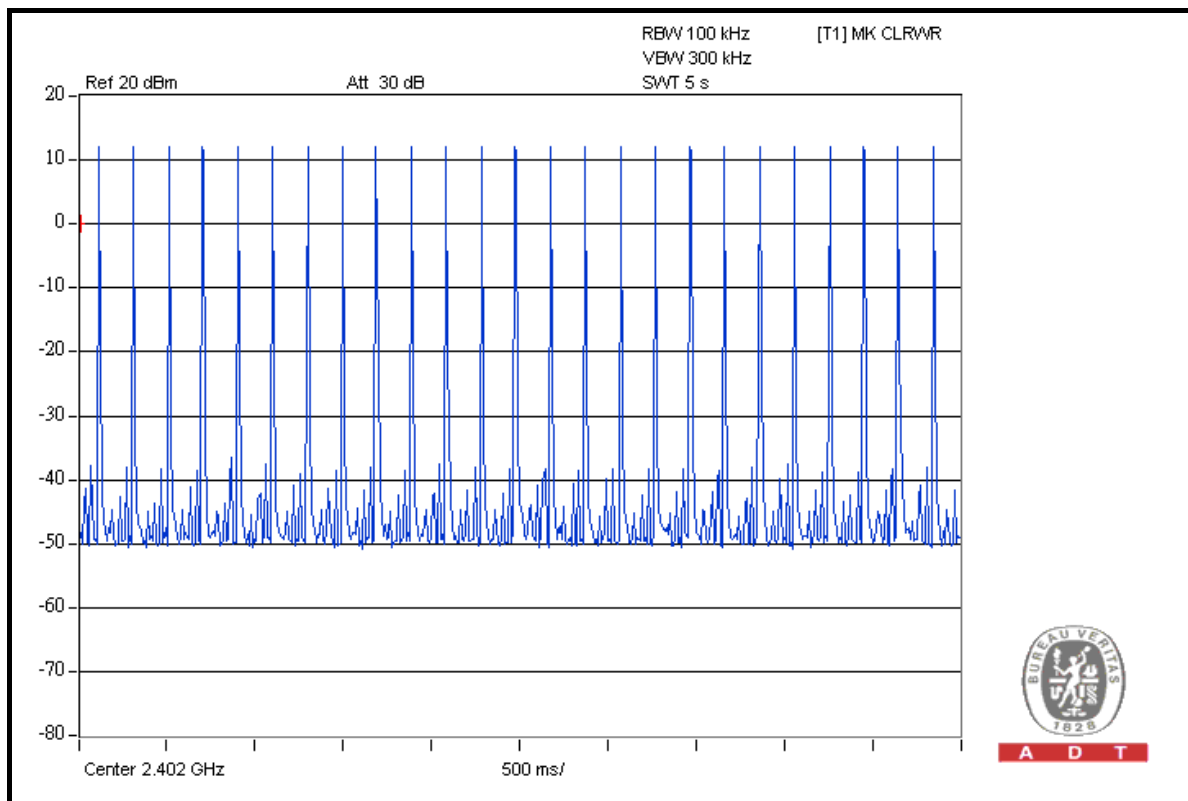



A D T

DH5

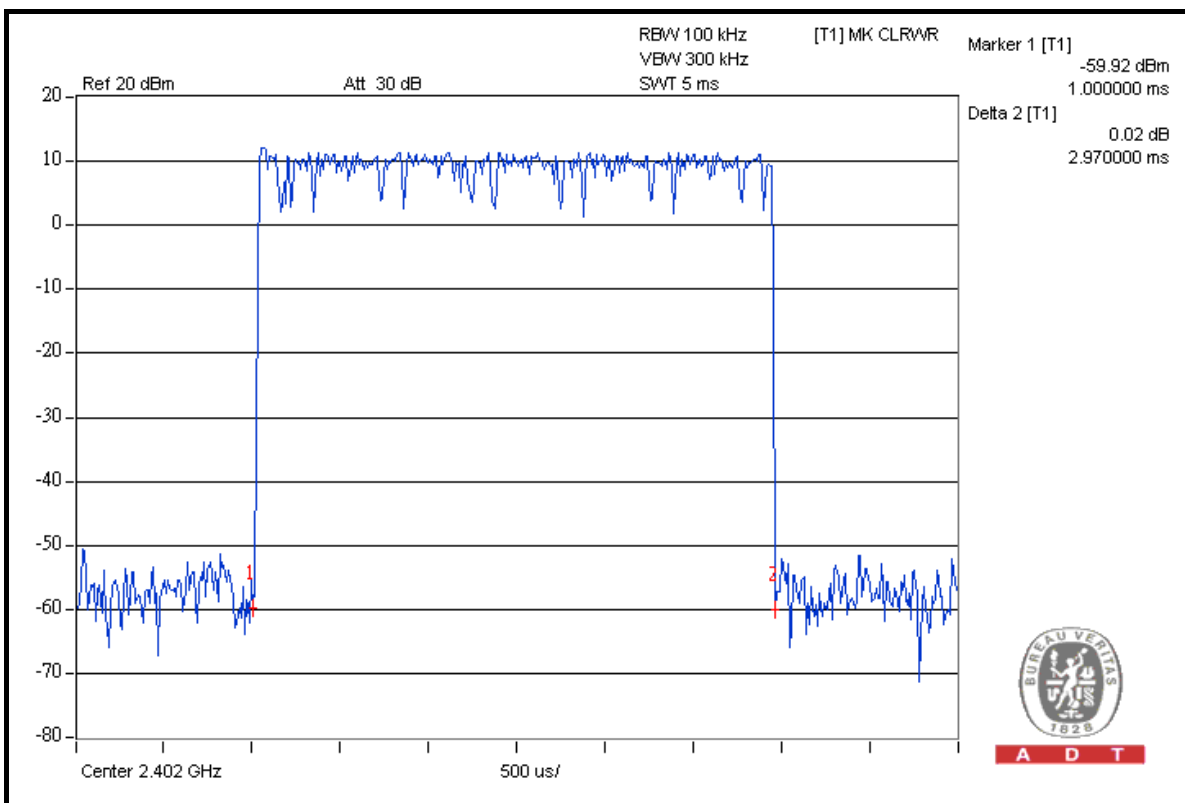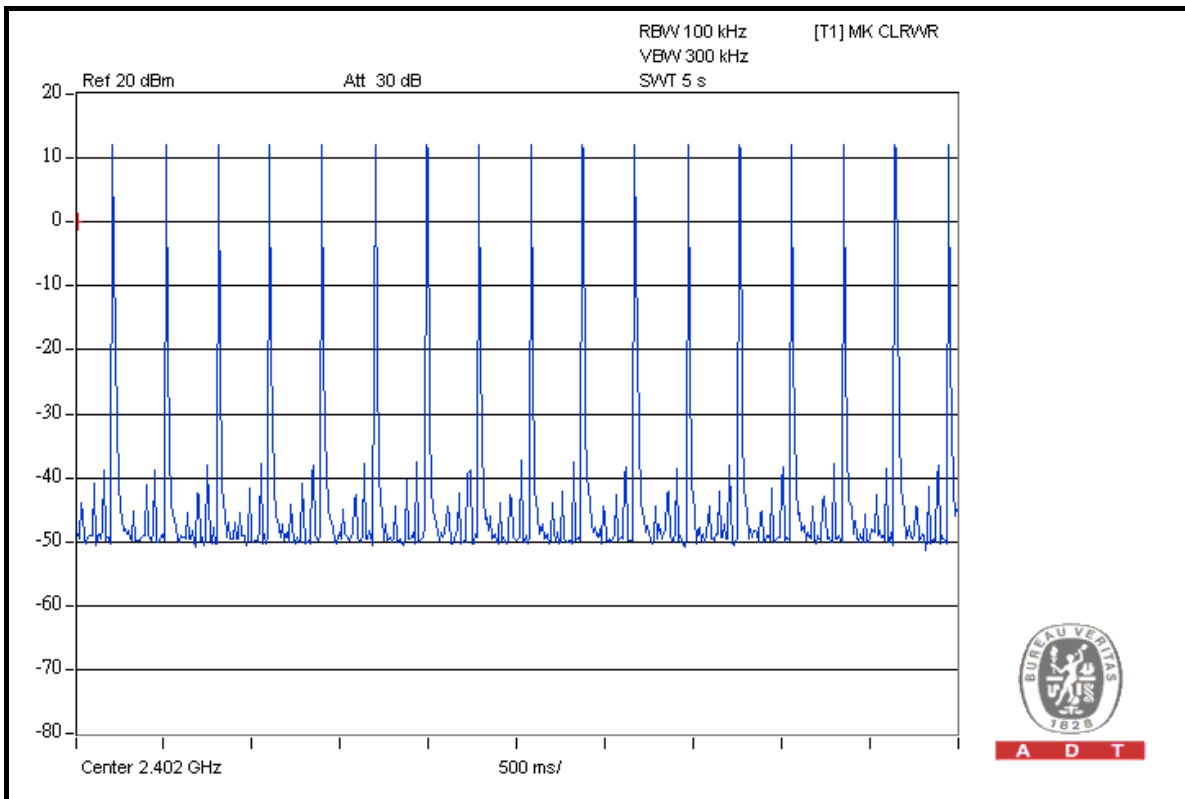

8DPSK MODULATION



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	$50 \text{ (times / 5 sec)} * 6.32 = 316.00 \text{ times}$	0.516	163.056	400
DH3	$25 \text{ (times / 5 sec)} * 6.32 = 158.00 \text{ times}$	1.746	275.868	400
DH5	$16 \text{ (times / 5 sec)} * 6.32 = 101.12 \text{ times}$	3.060	309.427	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

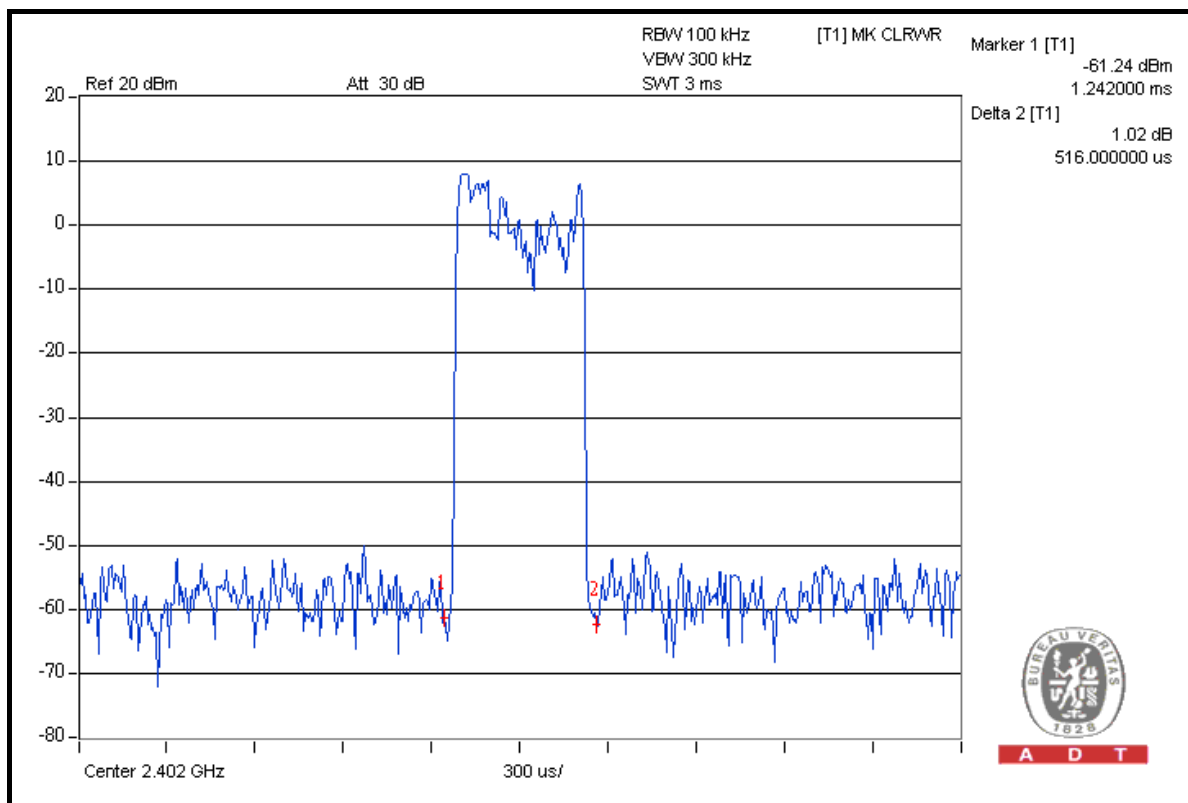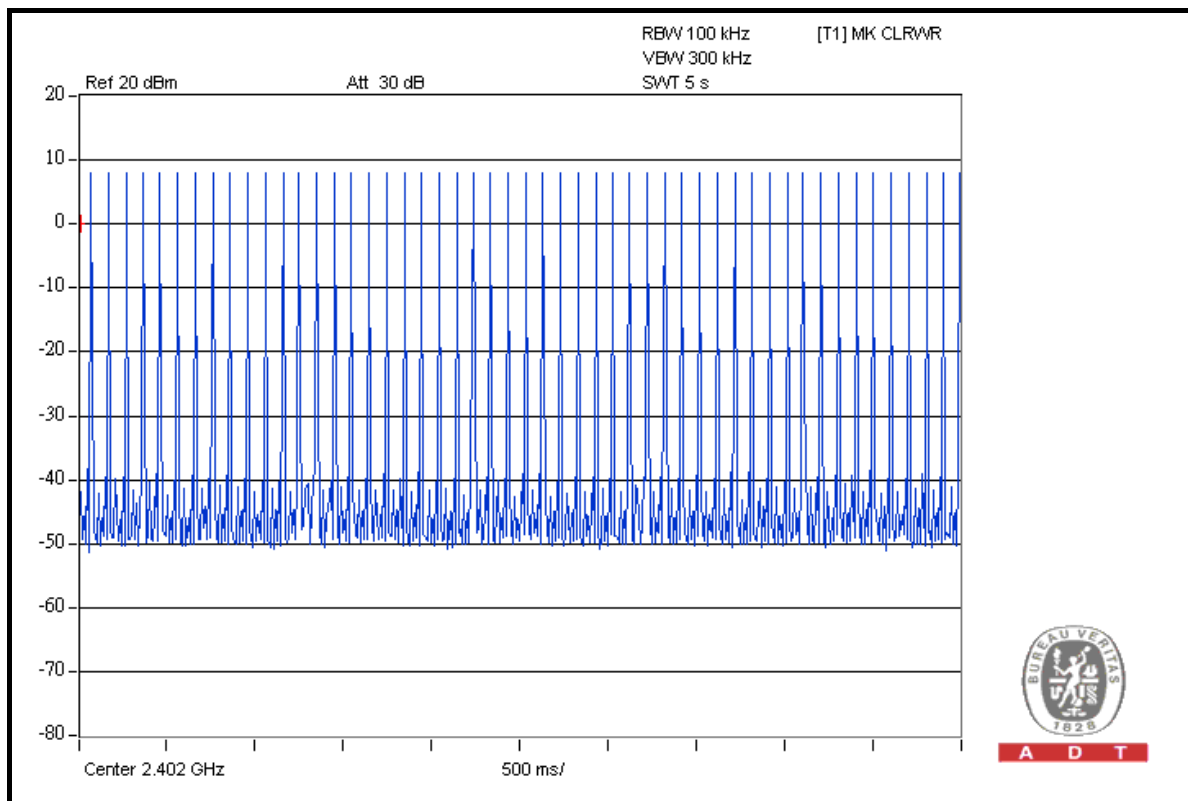





A D T

DH3

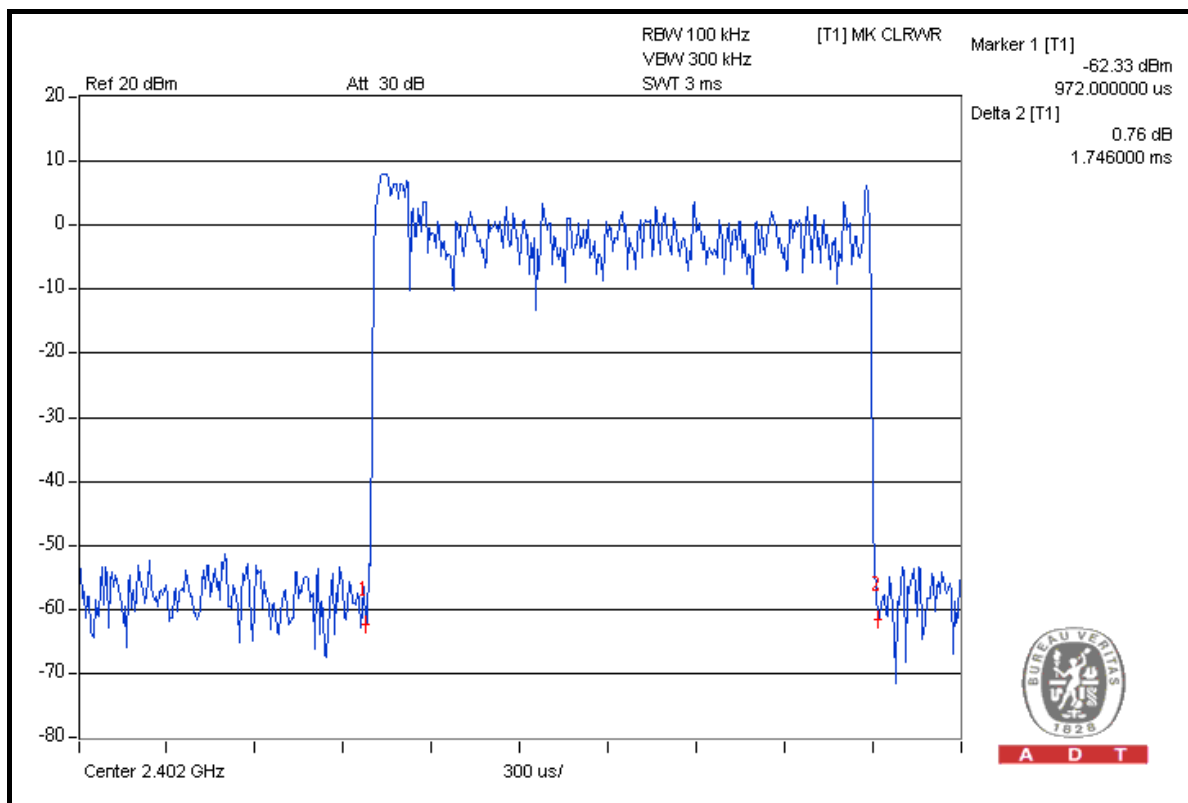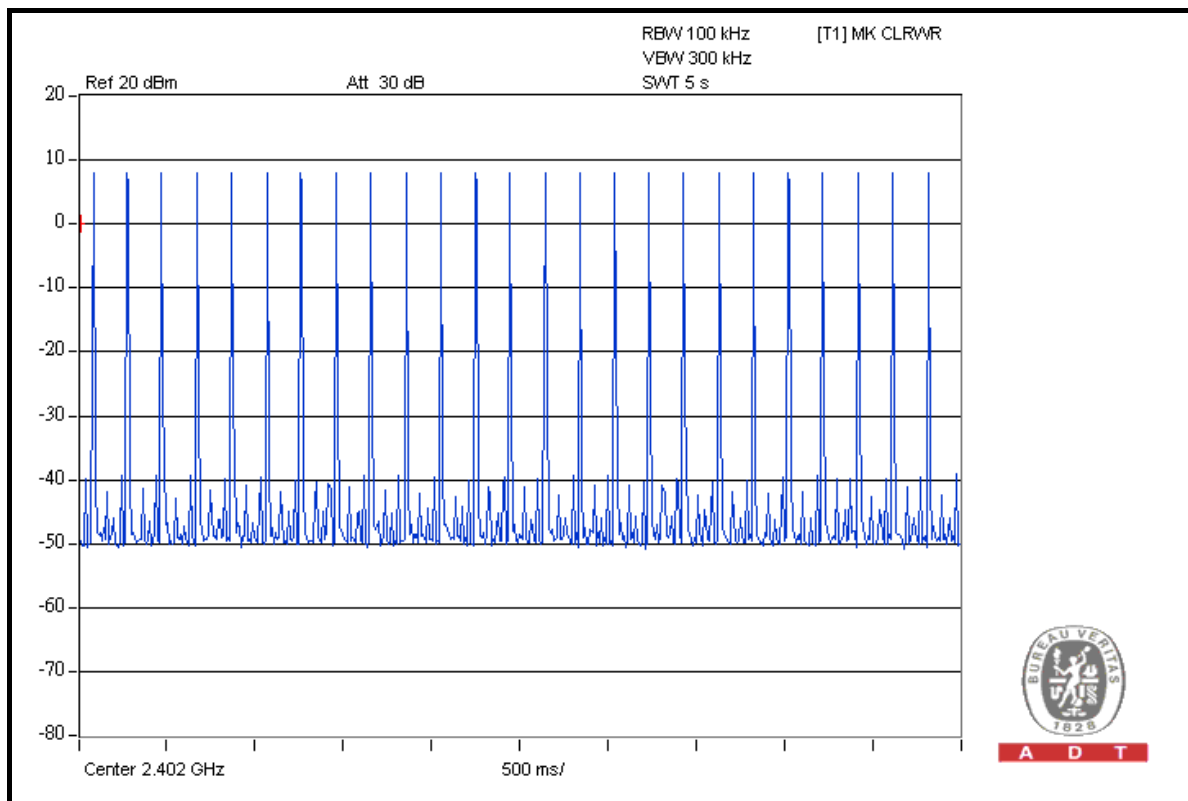

DH5

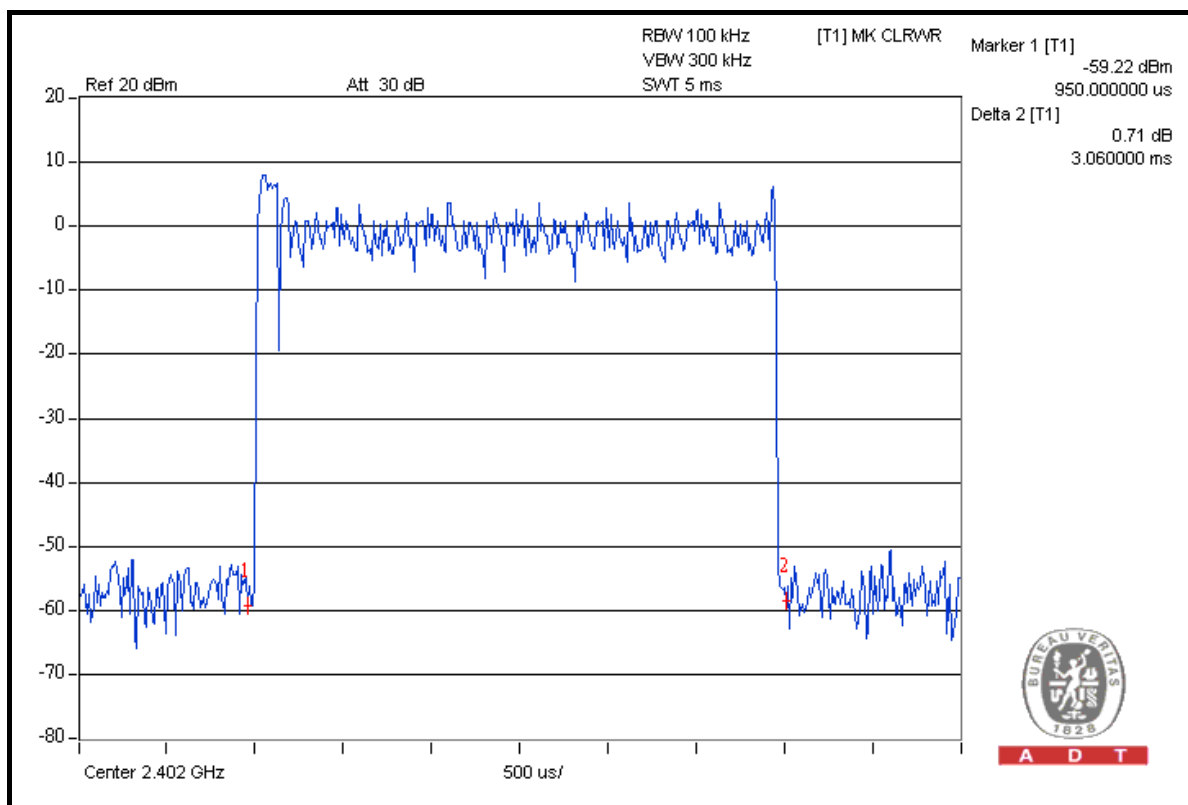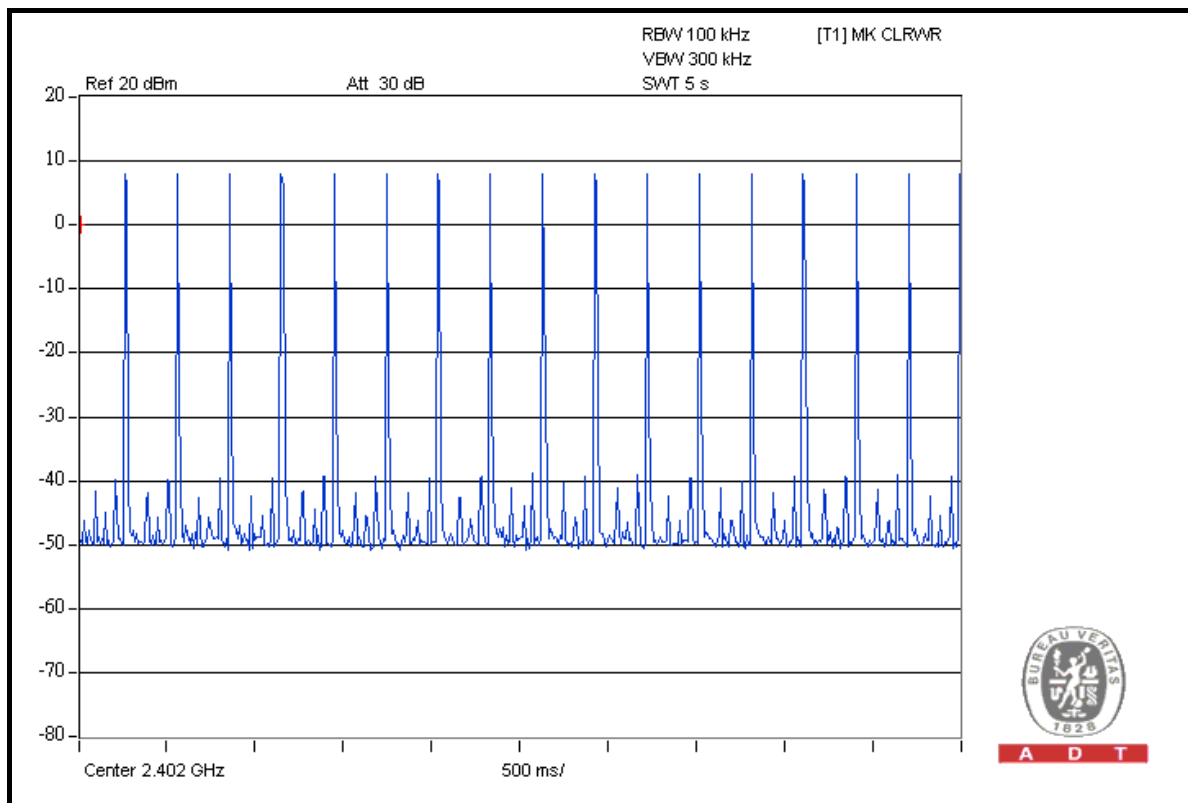

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

Same as 4.3.5.

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

GFSK MODULATION


MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 1018hPa
INPUT POWER	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.934
39	2441	0.940
78	2480	0.934




A D T

CH 0

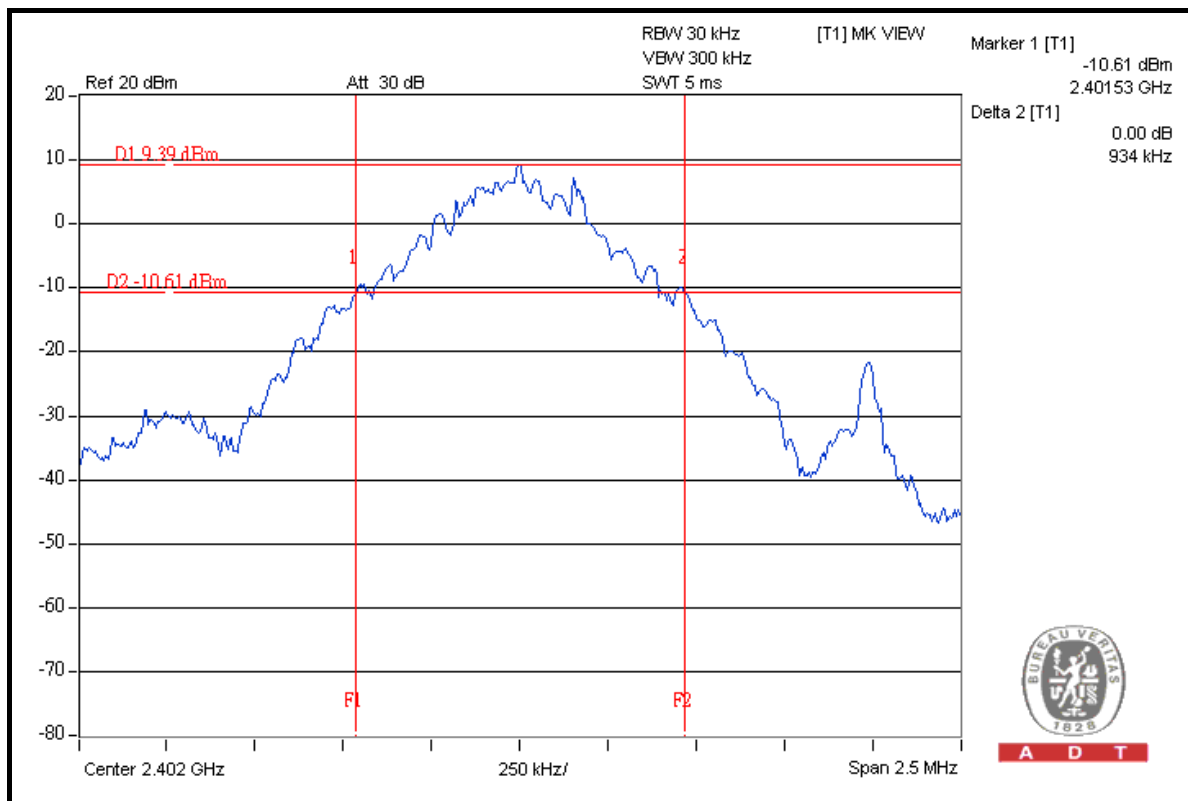


CH 39

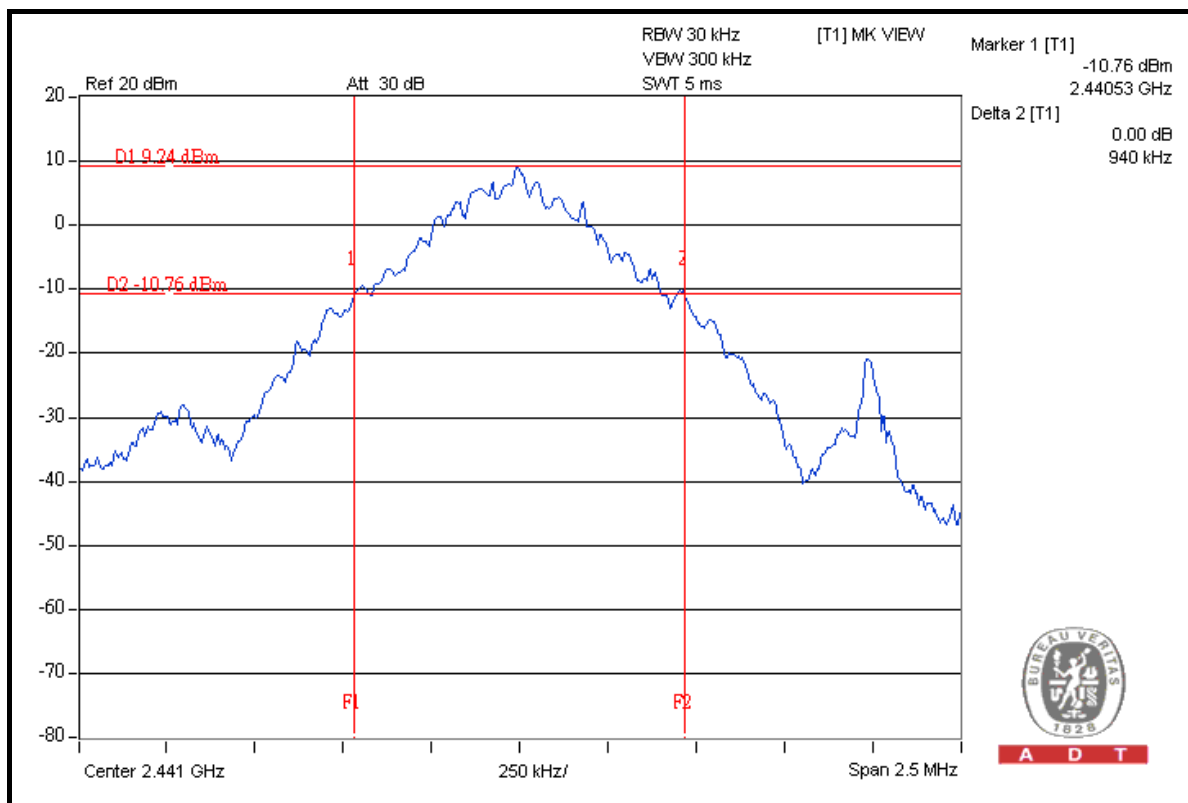



A D T

CH 78

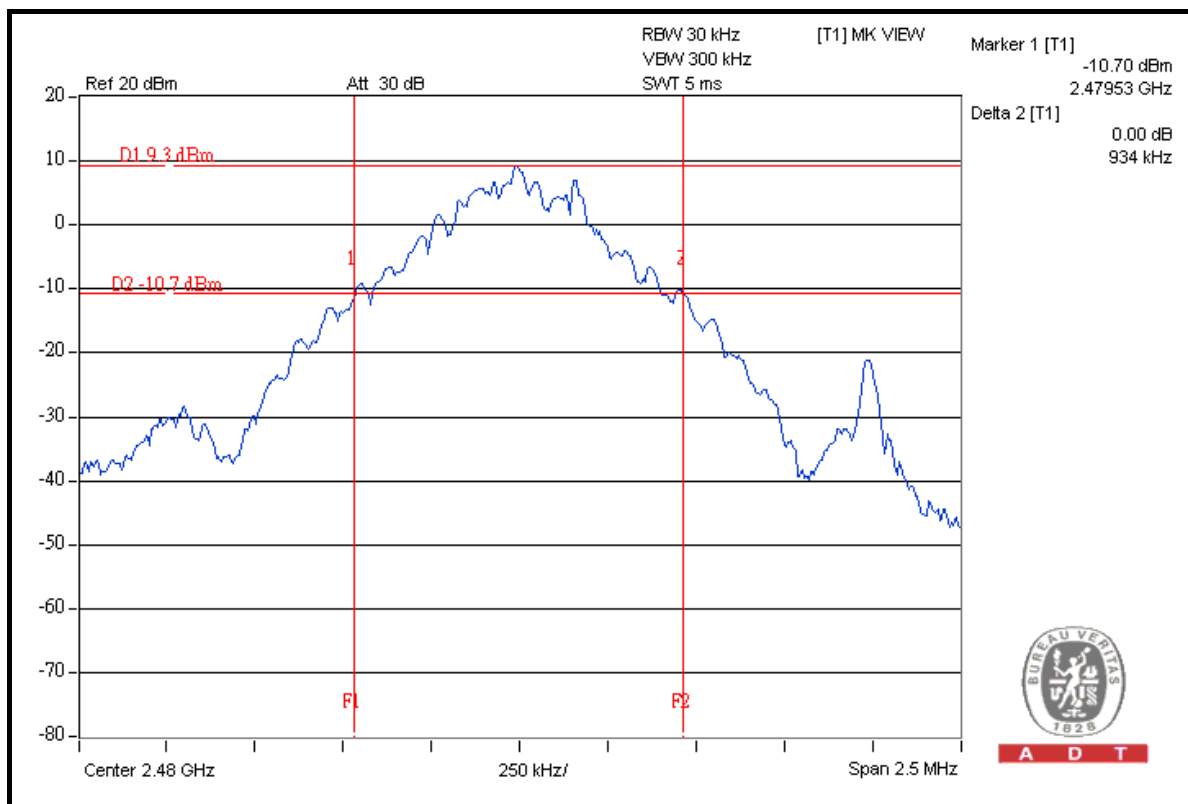




A D T

8DPSK MODULATION

MODULATION TYPE	8DPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 1018hPa
INPUT POWER	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.210
39	2441	1.210
78	2480	1.210


CH 0

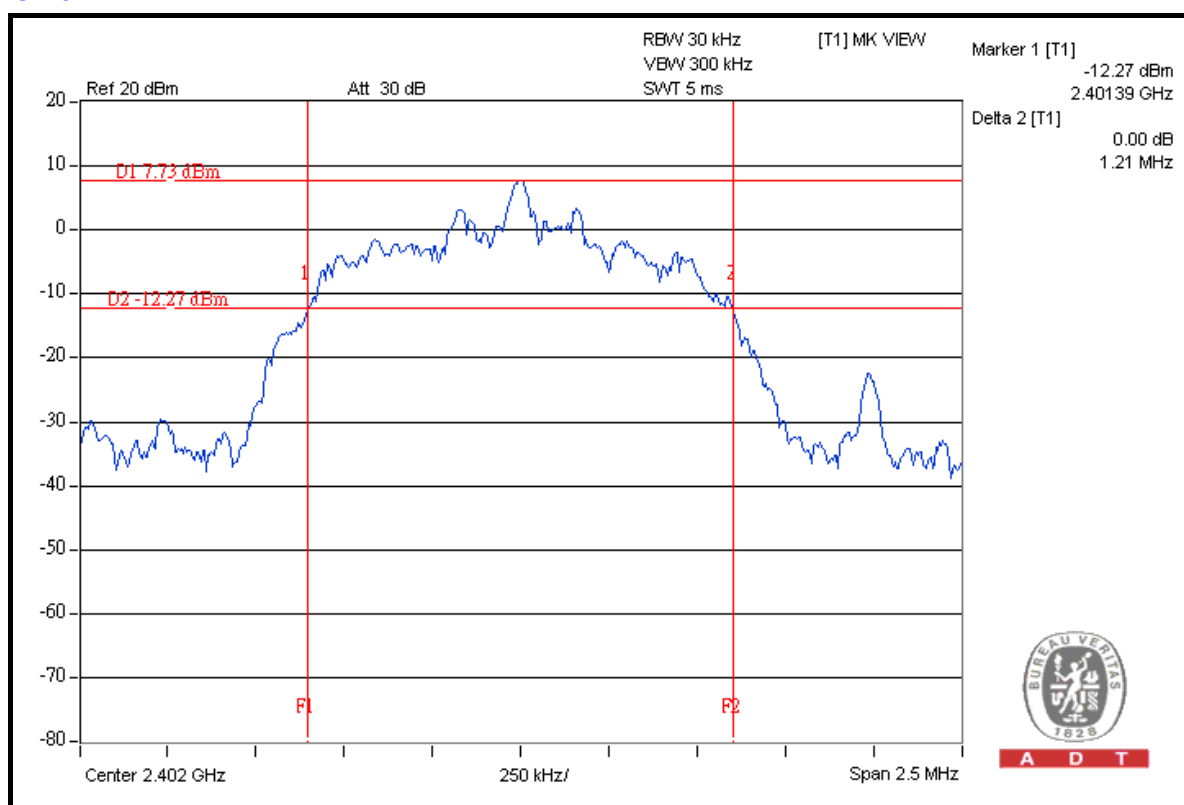




A D T

CH 39

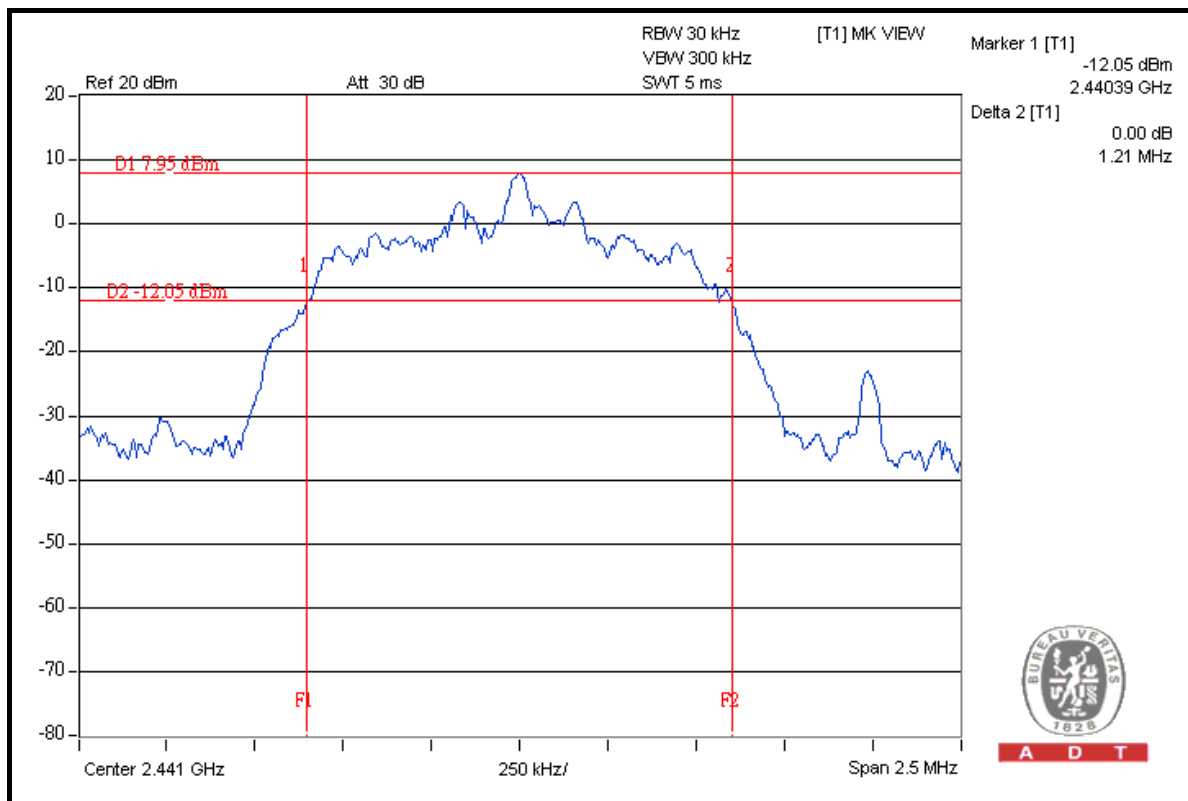

CH 78

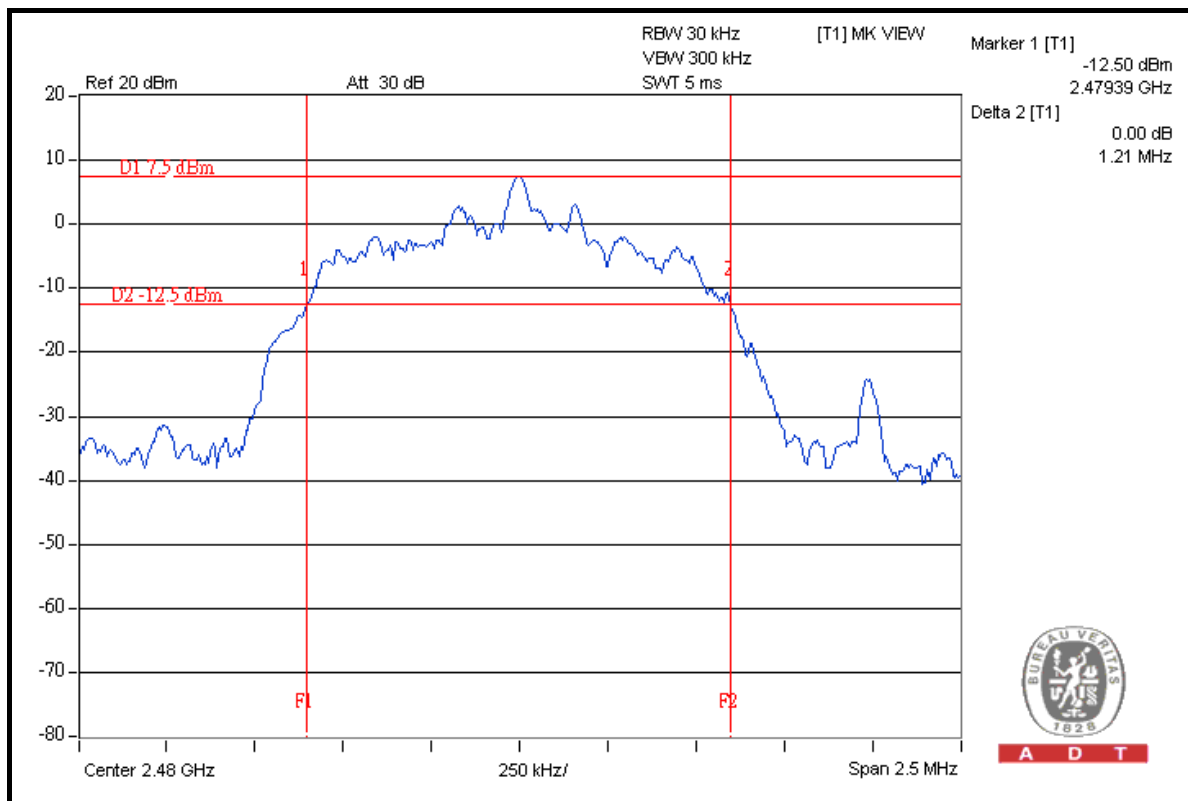

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP

Same as 4.3.5.

4.6.6 TEST RESULTS


GFSK MODULATION

MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 1018hPa
INPUT POWER	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.010	0.934	0.623	PASS
39	2441	1.000	0.940	0.627	PASS
78	2480	1.000	0.934	0.623	PASS

NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to next two pages.


CH 0

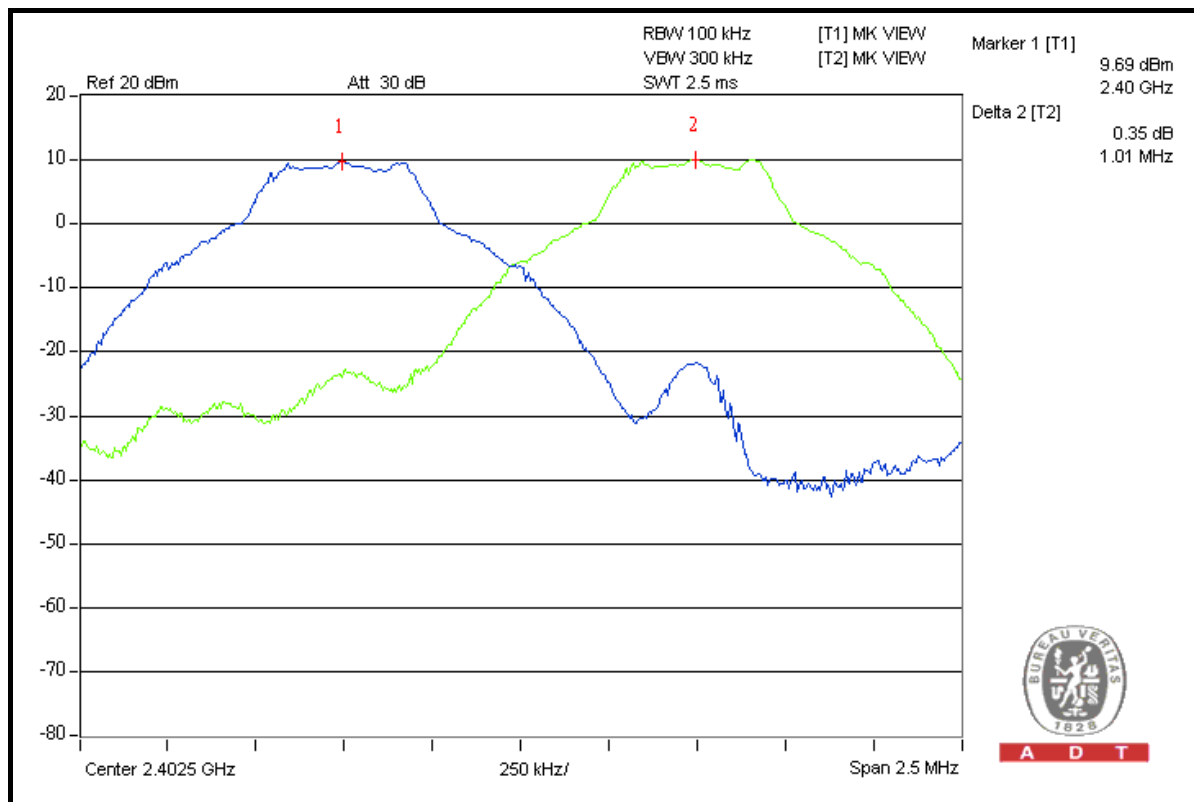




A D T

CH 39

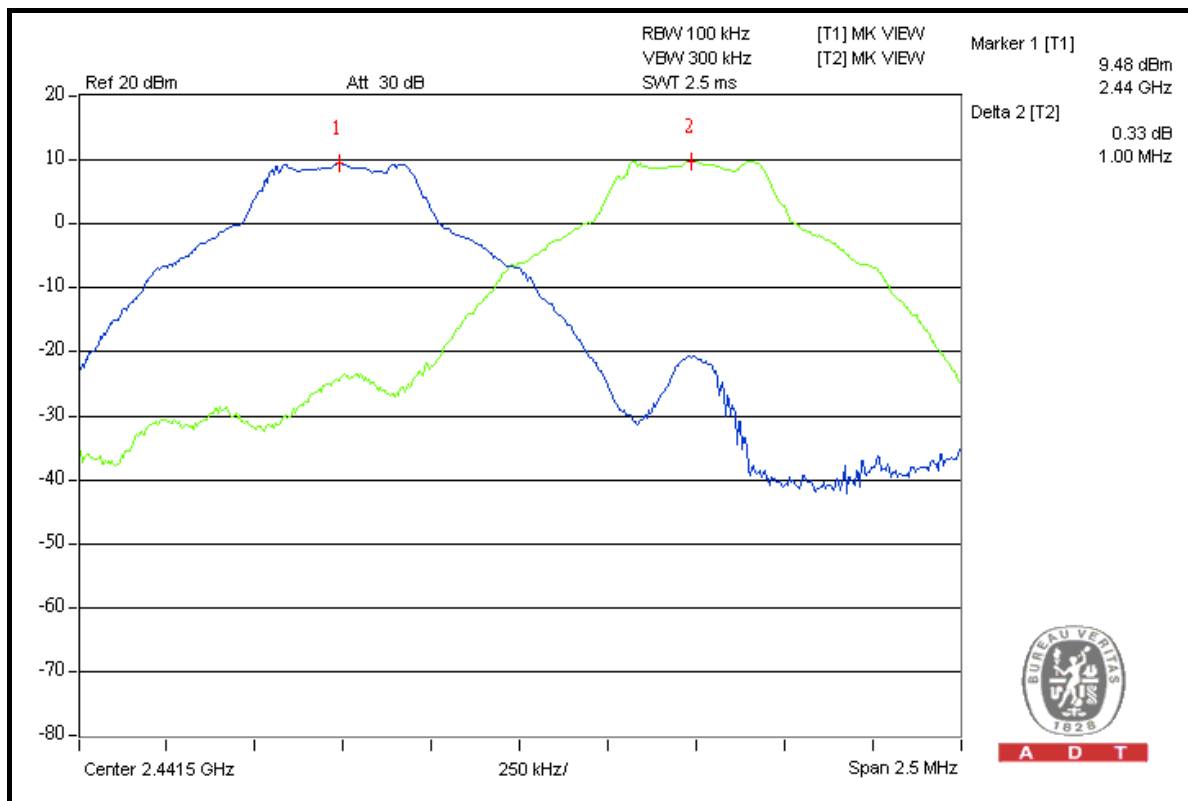

CH 78

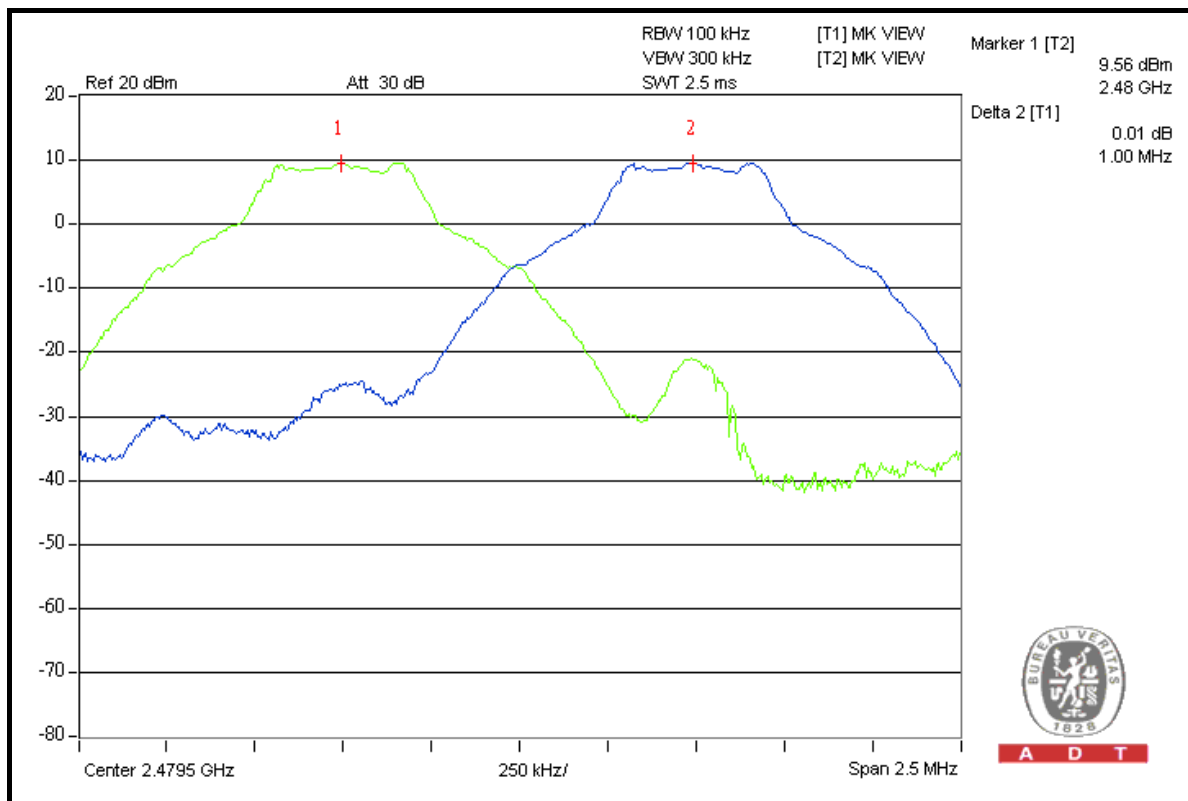



A D T


8DPSK MODULATION

MODULATION TYPE	8DPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 1018hPa
INPUT POWER	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.000	1.210	0.807	PASS
39	2441	1.000	1.210	0.807	PASS
78	2480	1.010	1.210	0.807	PASS

NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to next two pages.

CH 0

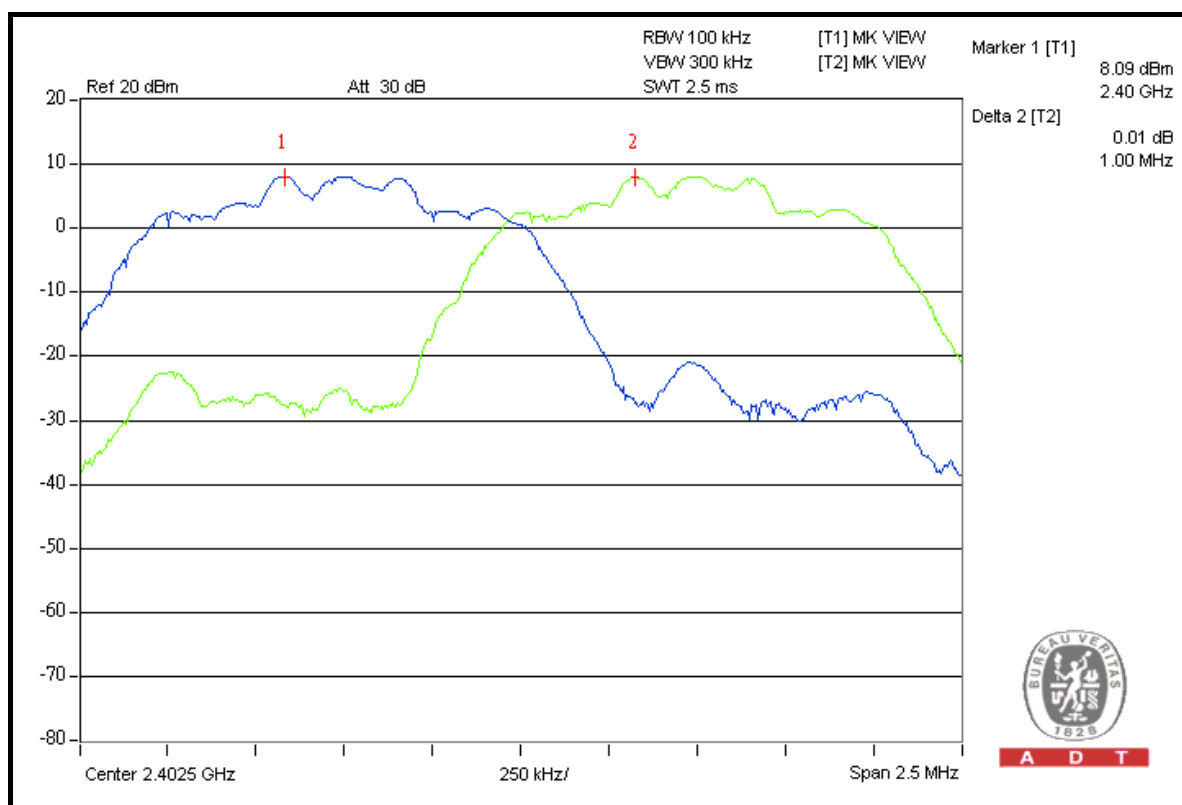


A D T




A D T

CH 39

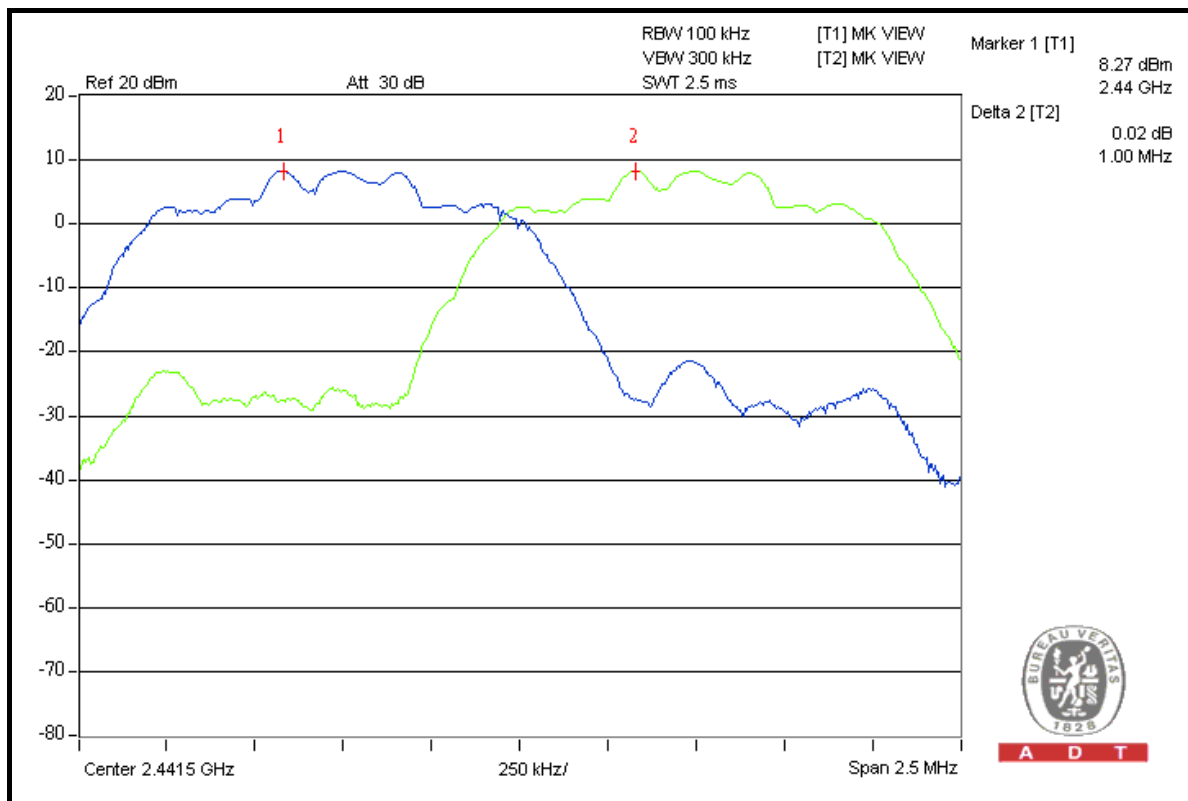

CH 78

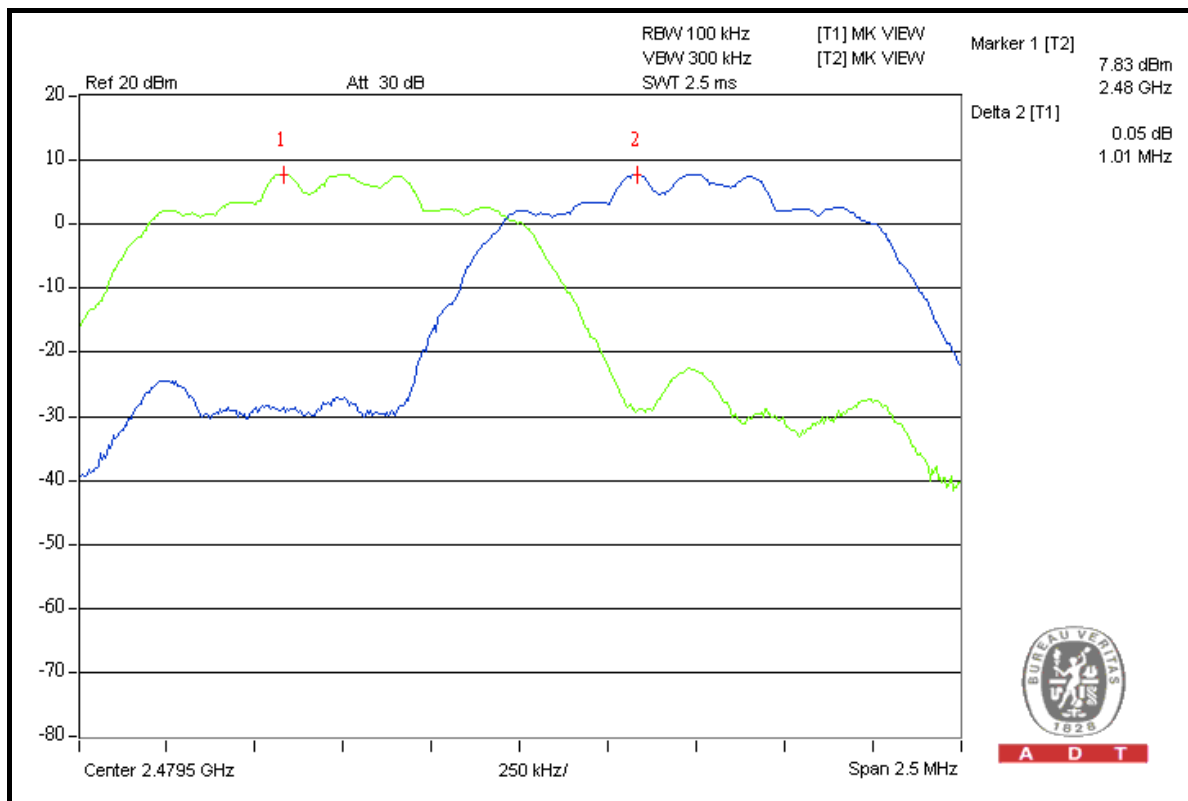

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

4.7.5 TEST SETUP

Same as 4.3.5.

4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

GFSK MODULATION


MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 1018hPa
INPUT POWER	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	8.790	9.44	125	PASS
39	2441	8.433	9.26	125	PASS
78	2480	8.551	9.32	125	PASS




A D T

CH 0

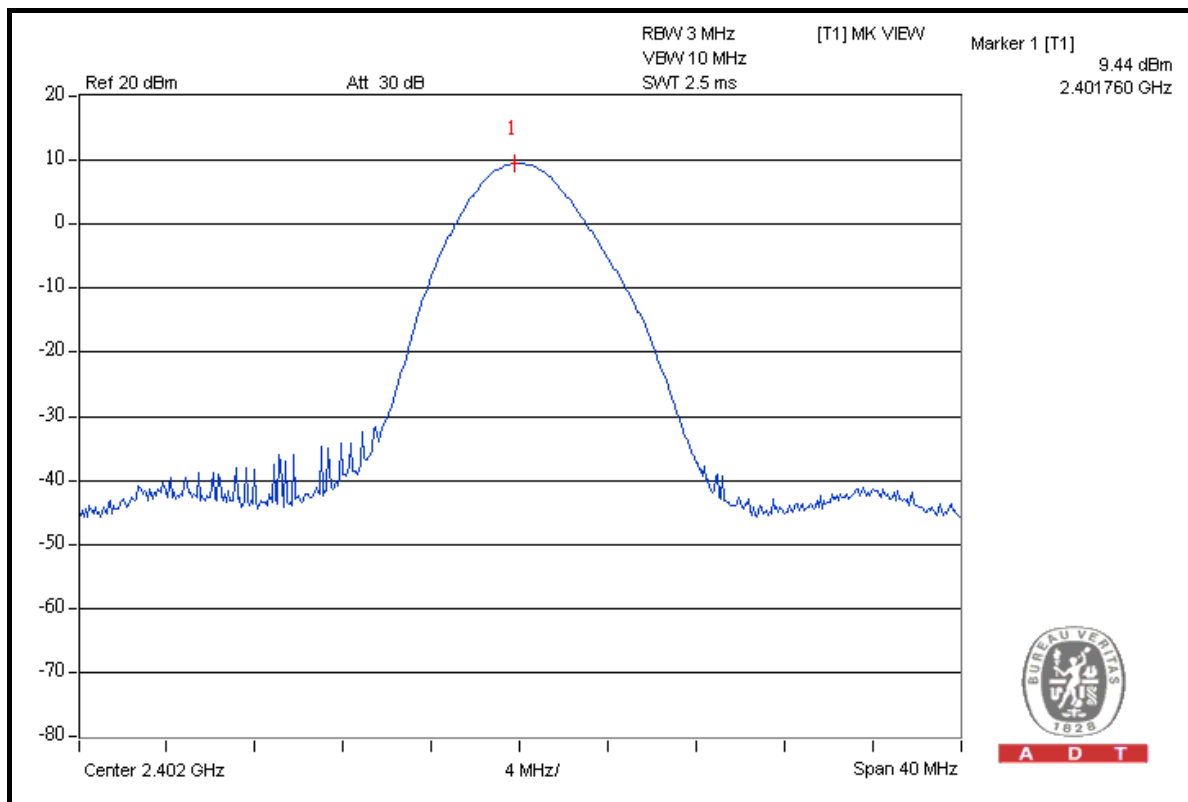


CH 39

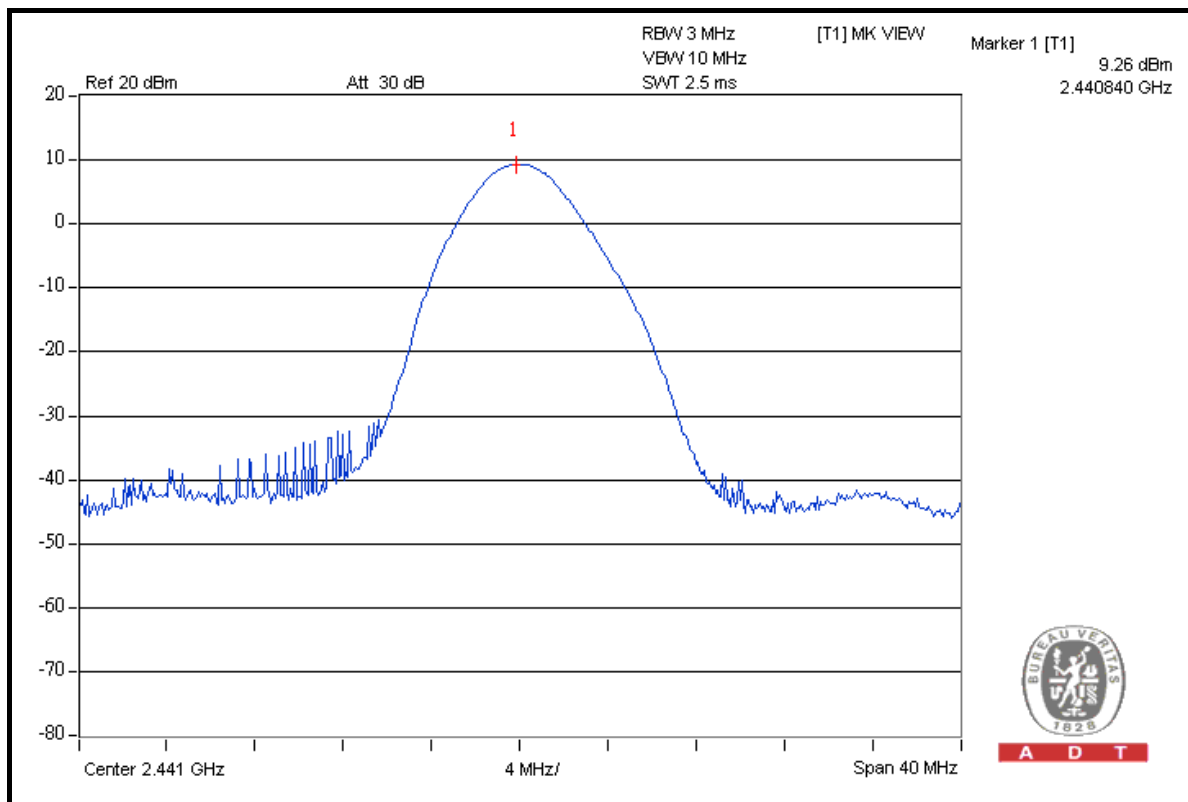



A D T

CH 78

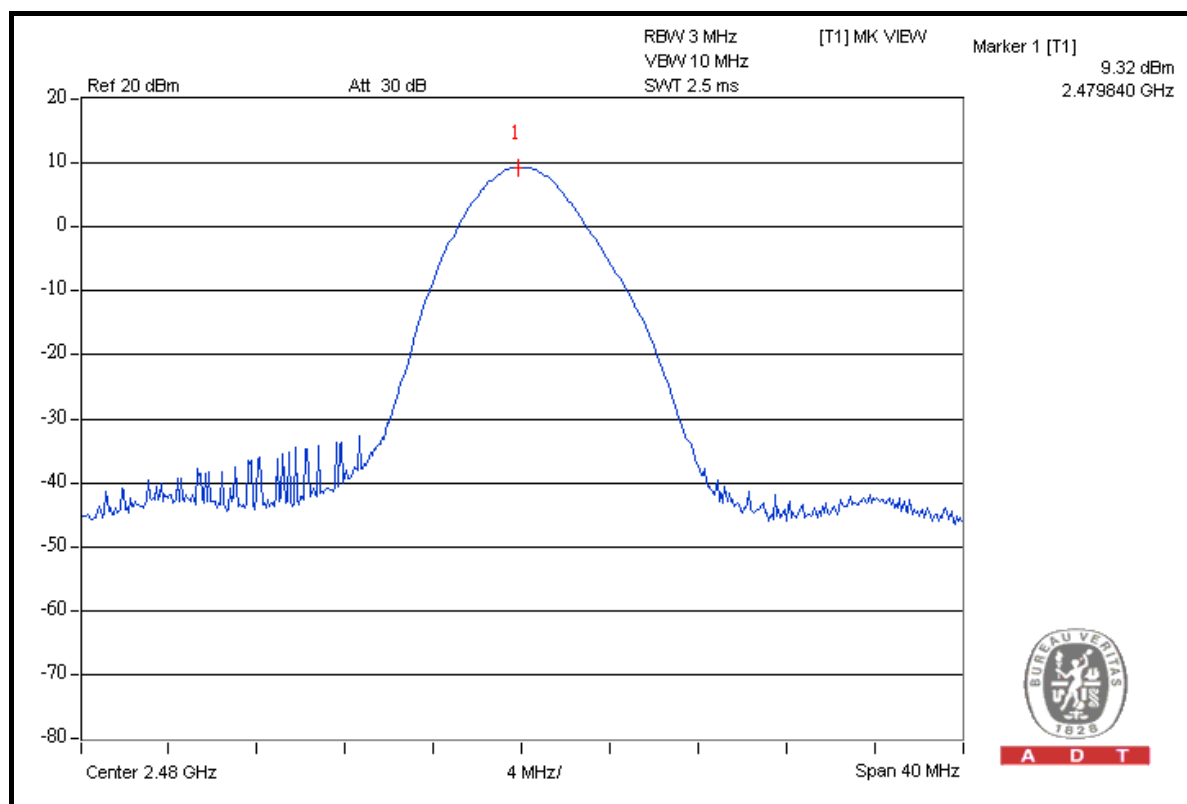


8DPSK MODULATION

MODULATION TYPE	8DPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 1018hPa
INPUT POWER	120Vac, 60 Hz	TESTED BY	Brad Wu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	6.823	8.34	125	PASS
39	2441	7.161	8.55	125	PASS
78	2480	6.592	8.19	125	PASS


CH 0

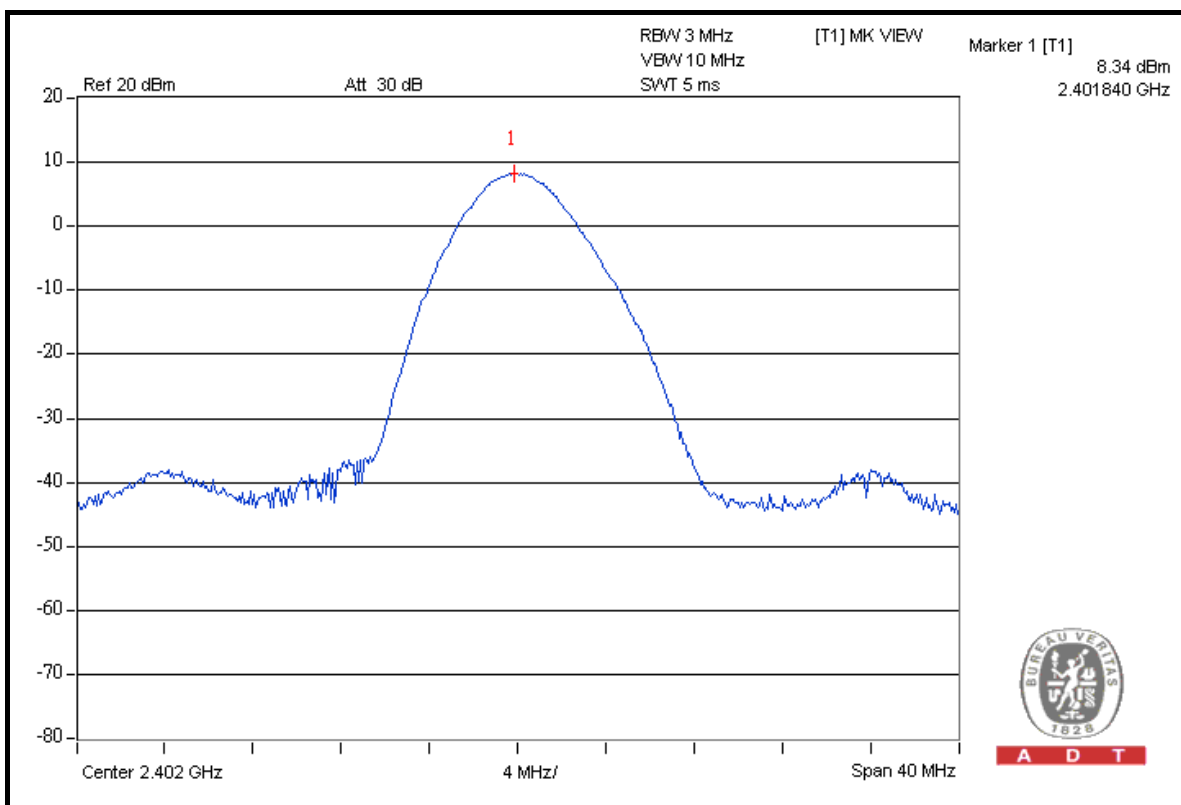




A D T

CH 39

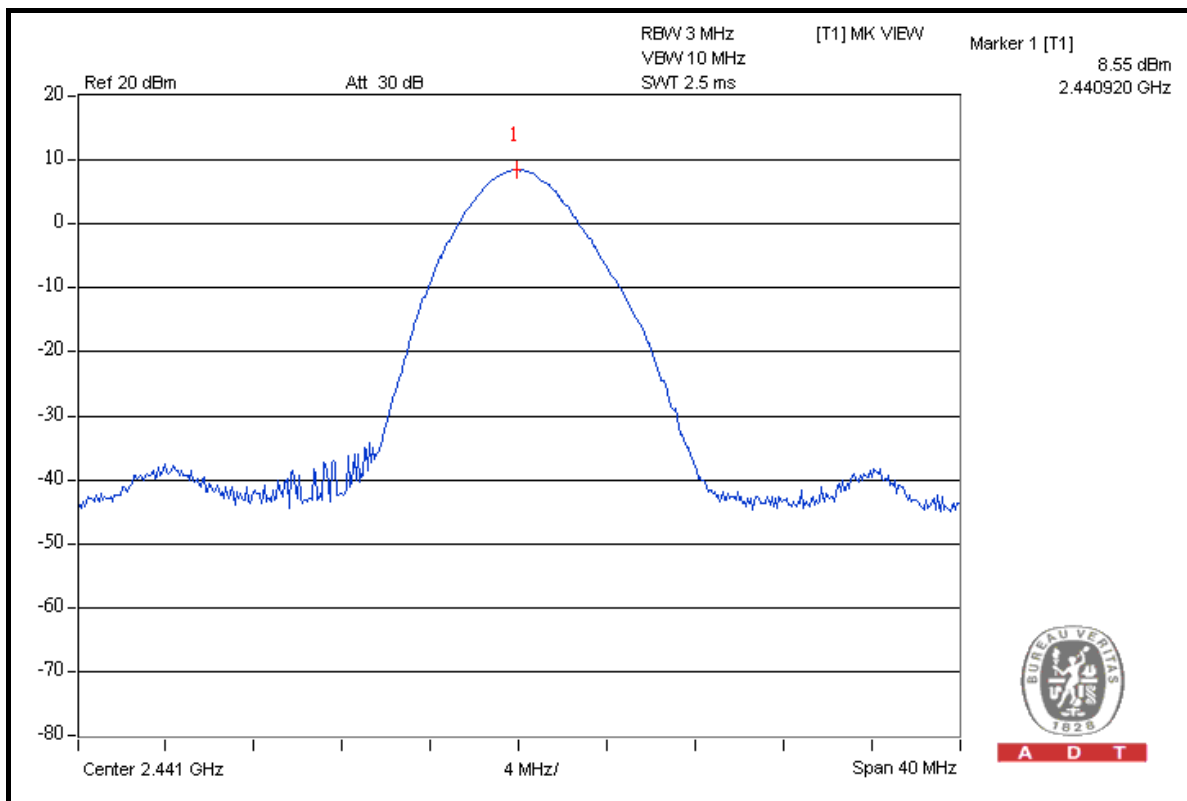

CH 78

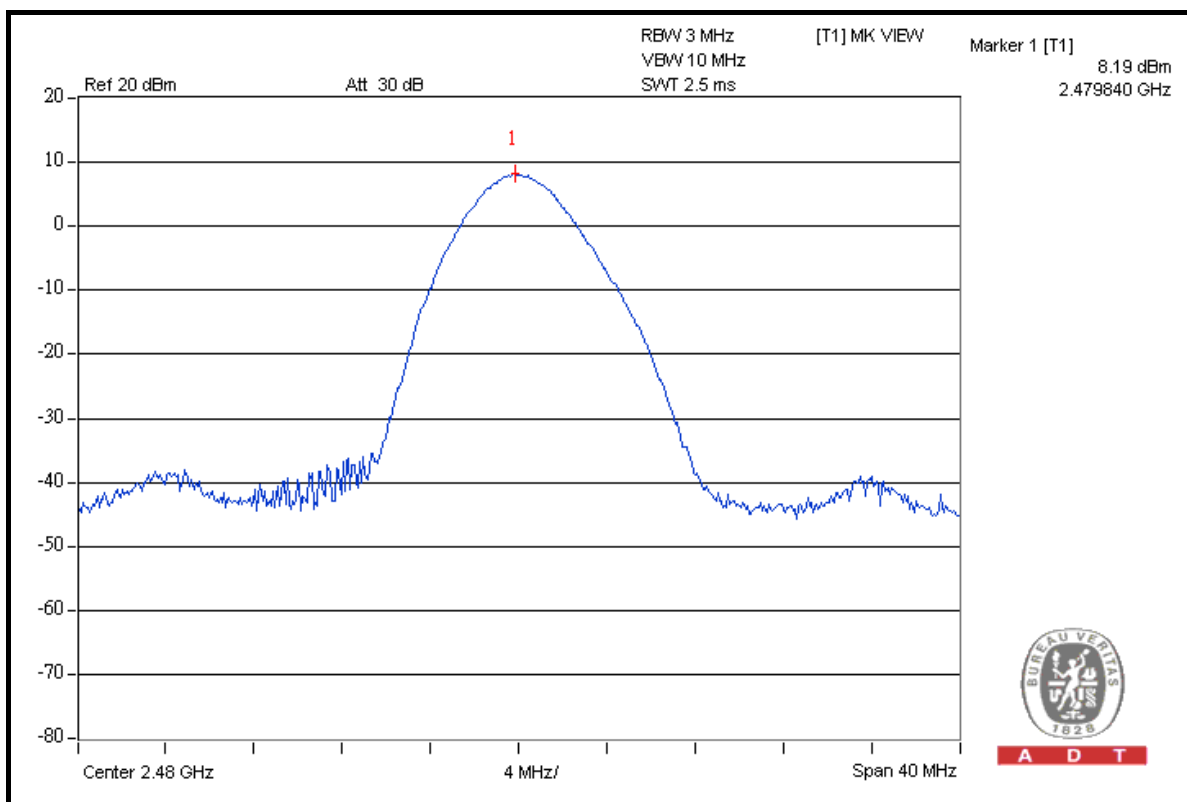

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 8 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

GFSK MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next page shows 48.74dBc between carrier maximum power and local maximum emission in restrict band (2.37020GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 104.55dBuV/m (Peak), so the maximum field strength in restrict band is $104.55 - 48.74 = 55.81$ dBuV/m, which is under 74dBuV/m limit.

Average value = $55.81 - 30.10 = 25.71$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1

NOTE 2: The band edge emission plot on the next second page shows 49.93dBc between carrier maximum power and local maximum emission in restrict band (2.48440GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 104.58 dBuV/m (Peak), so the maximum field strength in restrict band is $104.58 - 49.93 = 54.65$ dBuV/m, which is under 74 dBuV/m limit.

Average value = $54.65 - 30.10 = 24.55$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1

TEST MODE B

NOTE 1: The band edge emission plot on the next page shows 48.74dBc between carrier maximum power and local maximum emission in restrict band (2.37020GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 106.10dBuV/m (Peak), so the maximum field strength in restrict band is $106.10 - 48.74 = 57.36$ dBuV/m, which is under 74dBuV/m limit.

Average value = $57.36 - 30.10 = 27.26$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1

NOTE 2: The band edge emission plot on the next second page shows 49.93dBc between carrier maximum power and local maximum emission in restrict band (2.48440GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 105.87 dBuV/m (Peak), so the maximum field strength in restrict band is $105.87 - 49.93 = 55.94$ dBuV/m, which is under 74 dBuV/m limit.



Average value = $55.94 - 30.10 = 25.84$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1




A D T

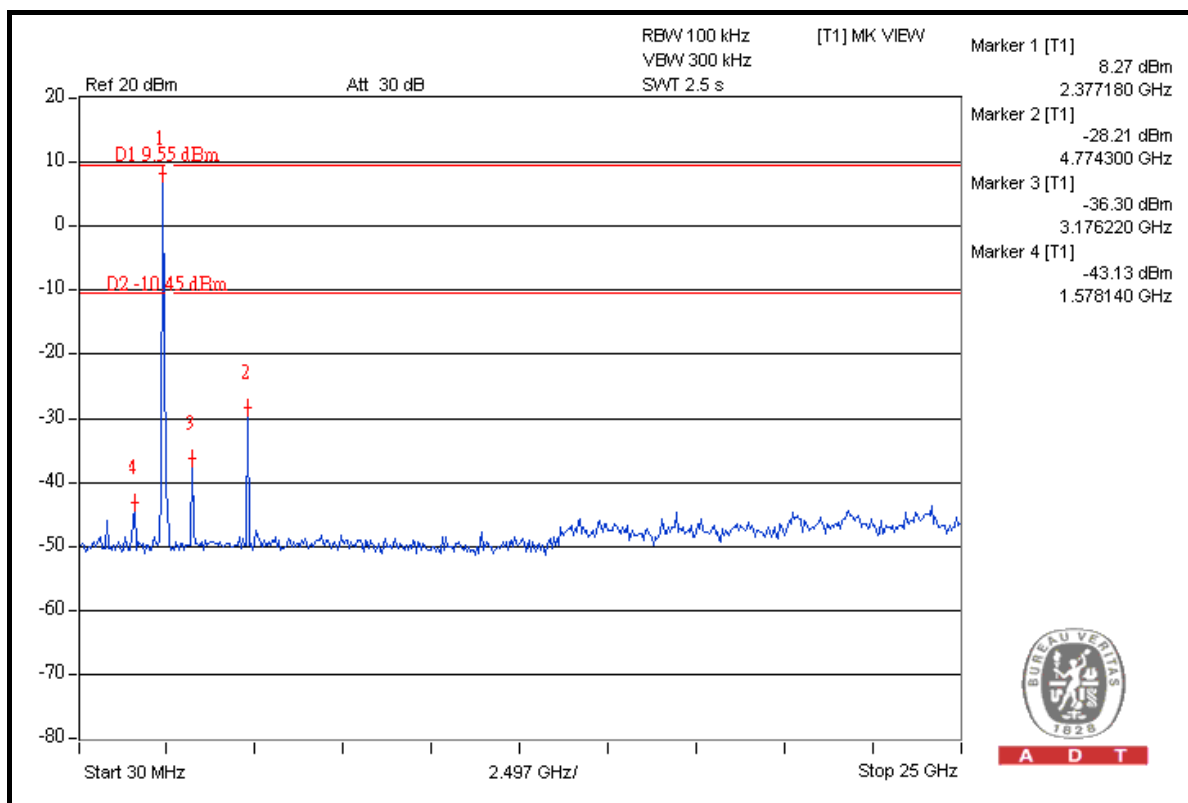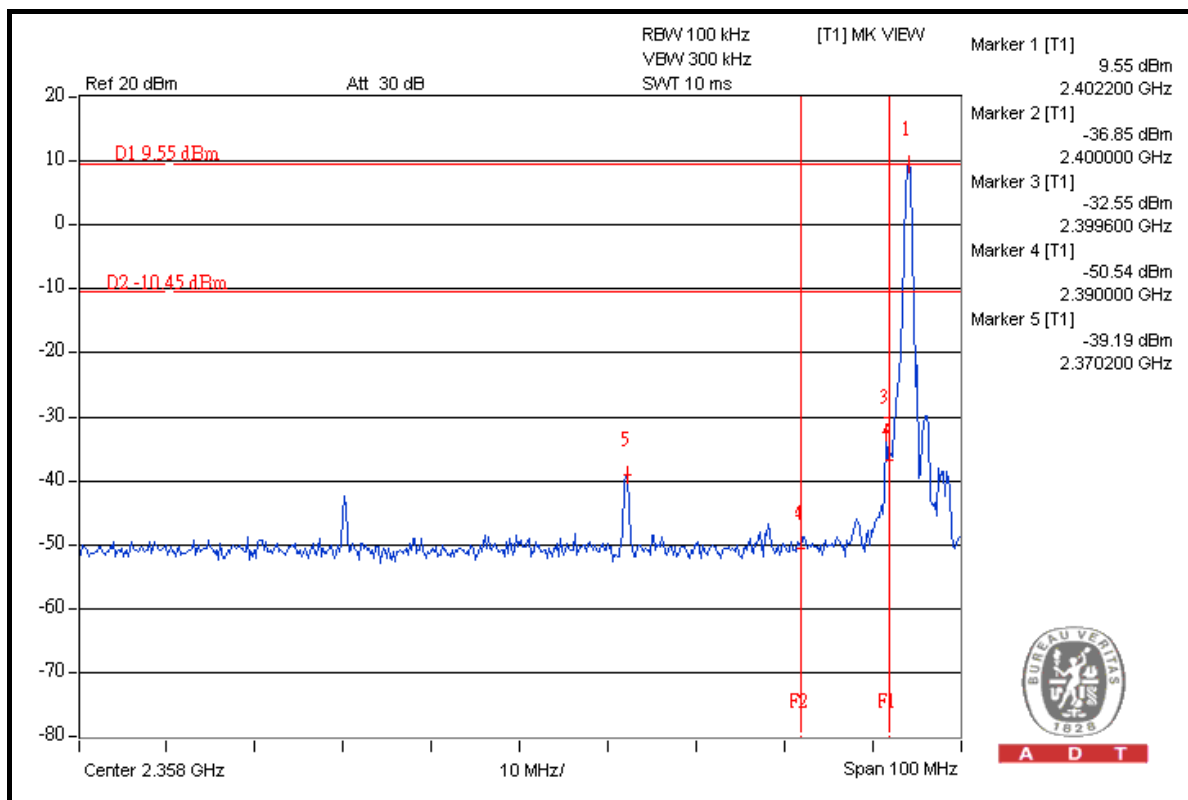




A D T

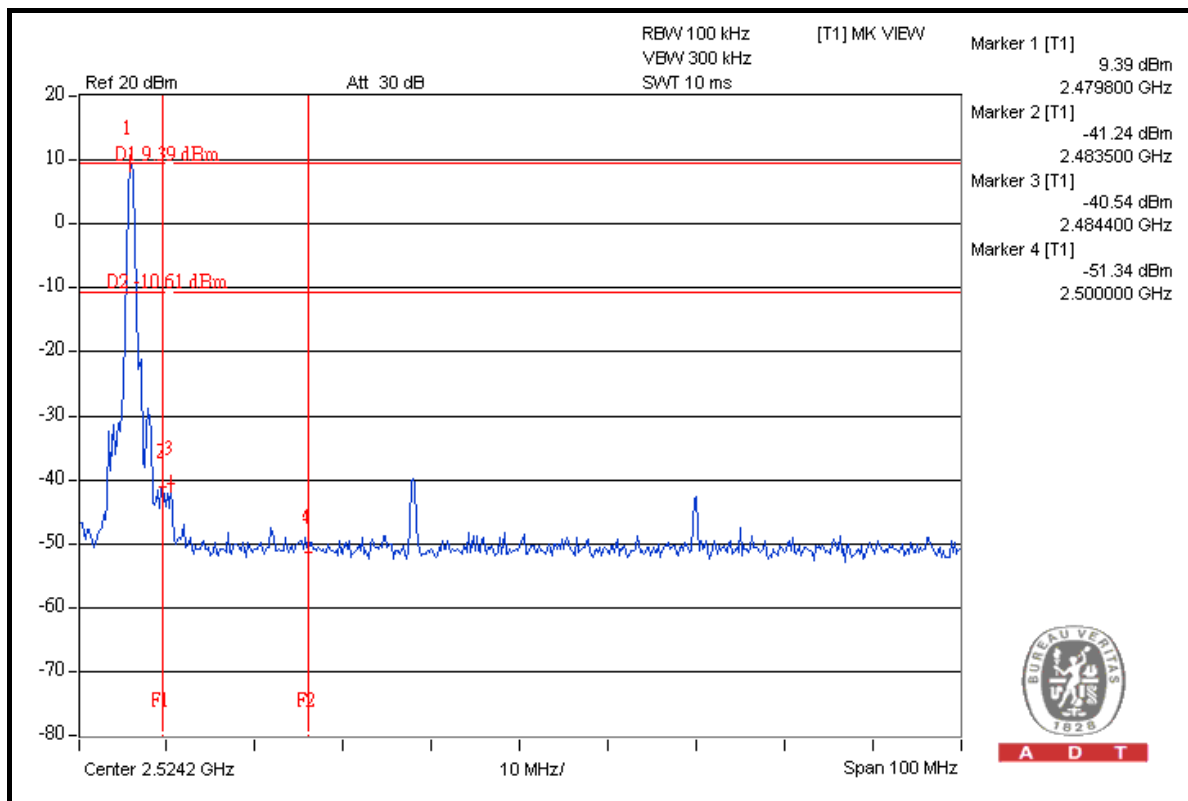

A D T

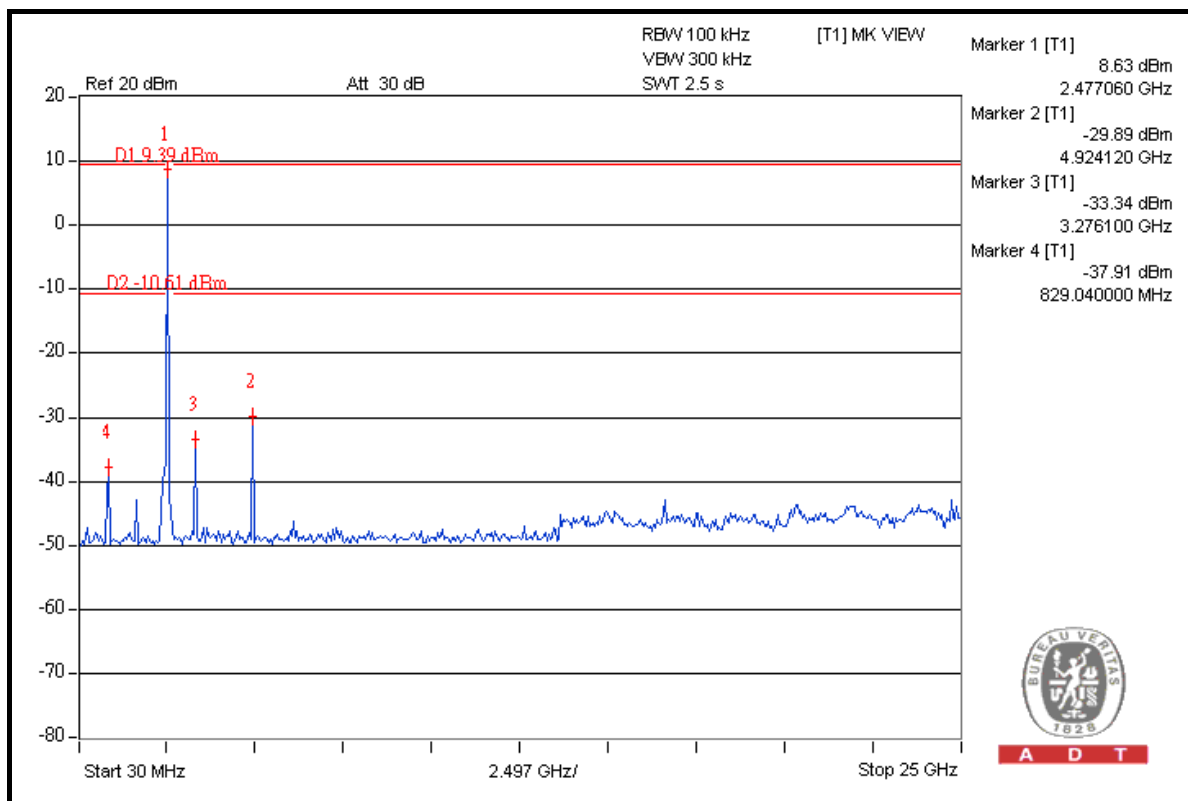

A D T

8DPSK MODULATION

TEST MODE A

NOTE 1: The band edge emission plot on the next page shows 49.88dBc between carrier maximum power and local maximum emission in restrict band (2.38600GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 102.40dBuV/m (Peak), so the maximum field strength in restrict band is $102.40 - 49.88 = 52.52\text{dBuV/m}$, which is under 74 dBuV/m limit.

Average value = $52.52 - 30.10 = 22.42\text{dBuV/m}$, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1\text{ dB}$.

Average value = peak reading – 30.1

NOTE 2: The band edge emission plot on the next second page shows 47.42dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 102.26dBuV/m (Peak), so the maximum field strength in restrict band is $102.26 - 47.42 = 54.84\text{dBuV/m}$, which is under 74 dBuV/m limit.

Average value = $54.84 - 30.10 = 24.74\text{dBuV/m}$, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1\text{ dB}$.

Average value = peak reading – 30.1

TEST MODE B

NOTE 1: The band edge emission plot on the next page shows 49.88dBc between carrier maximum power and local maximum emission in restrict band (2.38600GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 104.55dBuV/m (Peak), so the maximum field strength in restrict band is $104.55 - 49.88 = 54.67$ dBuV/m, which is under 74 dBuV/m limit.

Average value = $54.67 - 30.10 = 24.57$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1

NOTE 2: The band edge emission plot on the next second page shows 47.42dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 104.49dBuV/m (Peak), so the maximum field strength in restrict band is $104.49 - 47.42 = 57.07$ dBuV/m, which is under 74 dBuV/m limit.



Average value = $57.07 - 30.10 = 26.97$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1





A D T

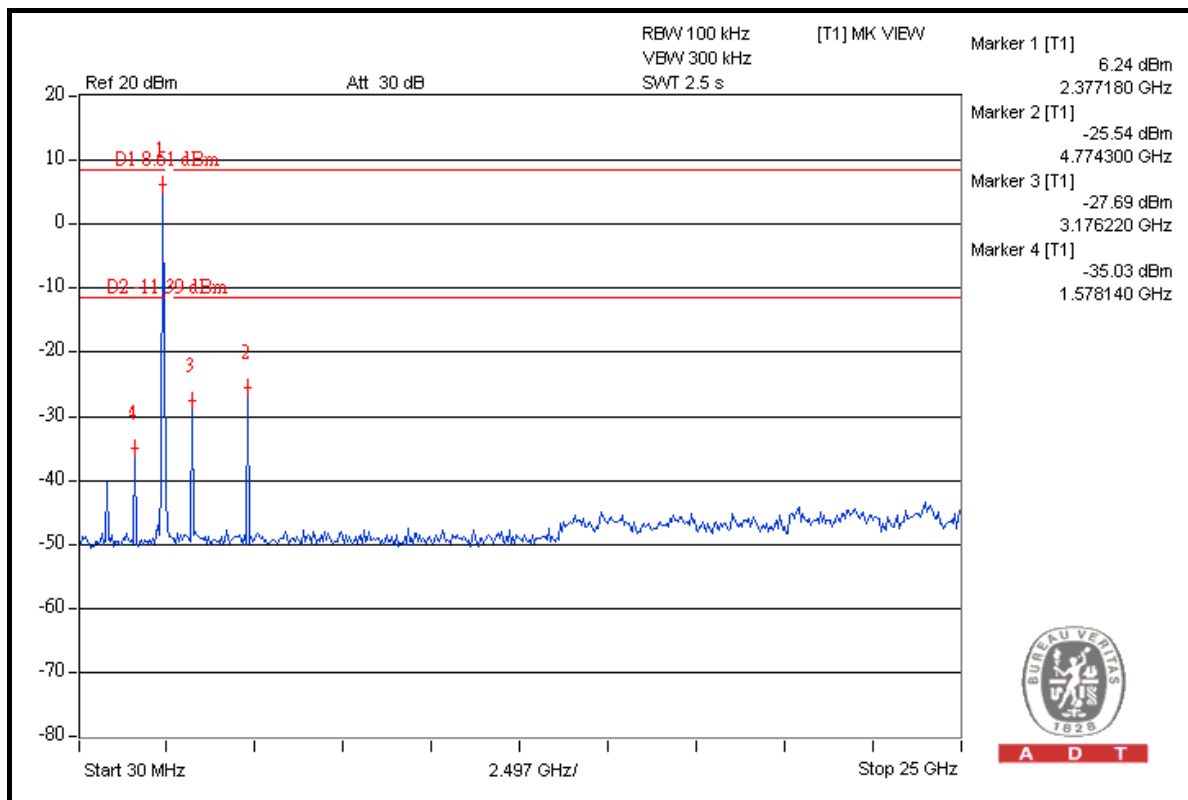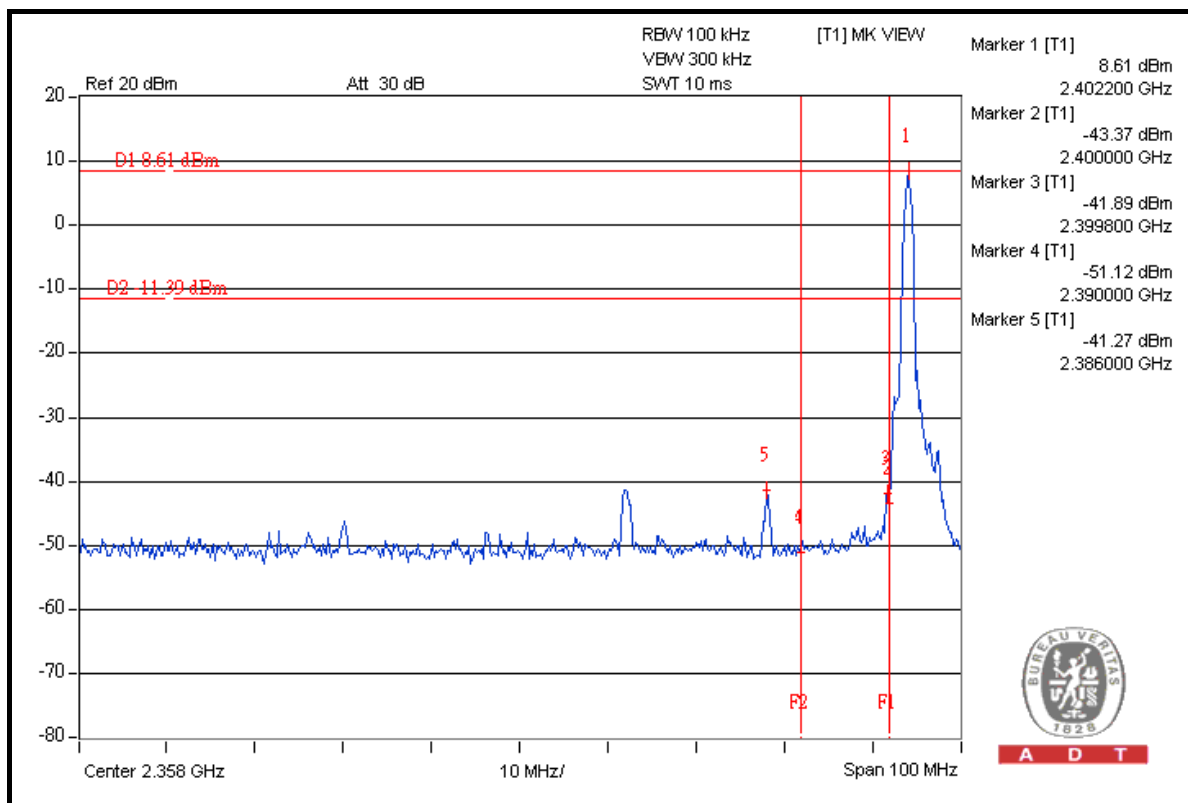



A D T

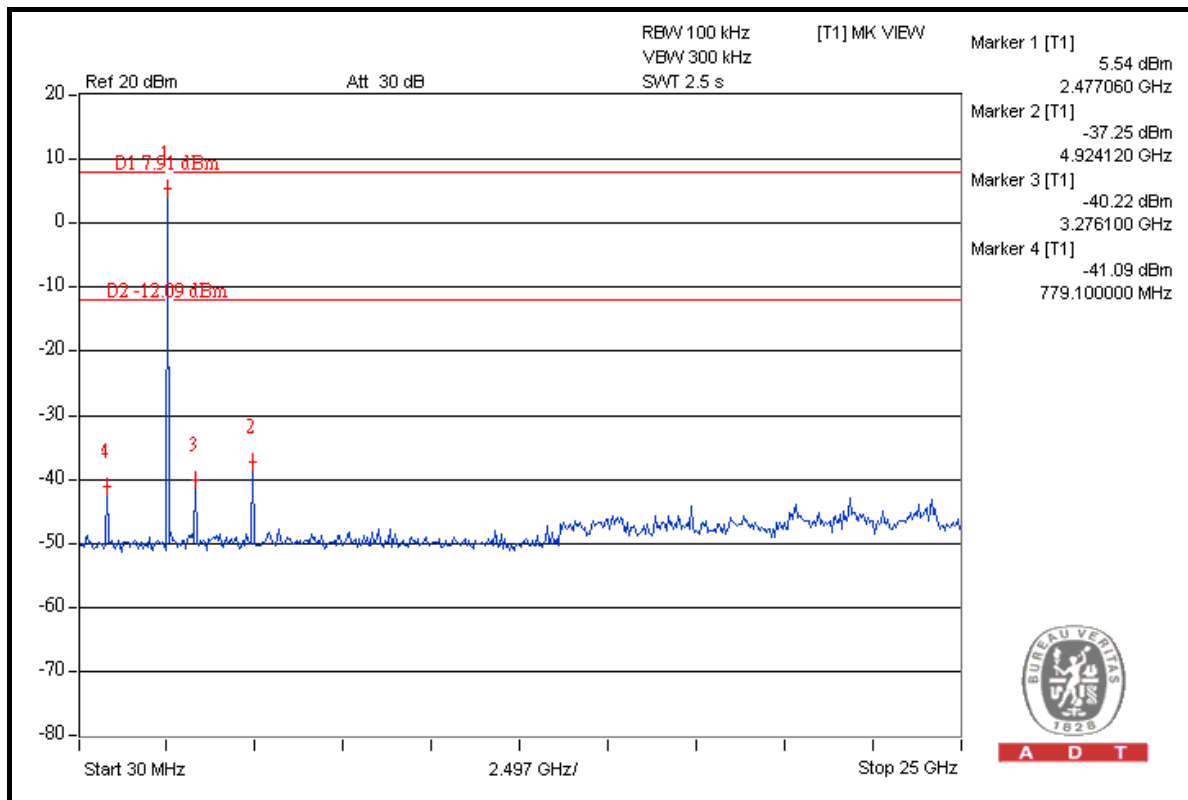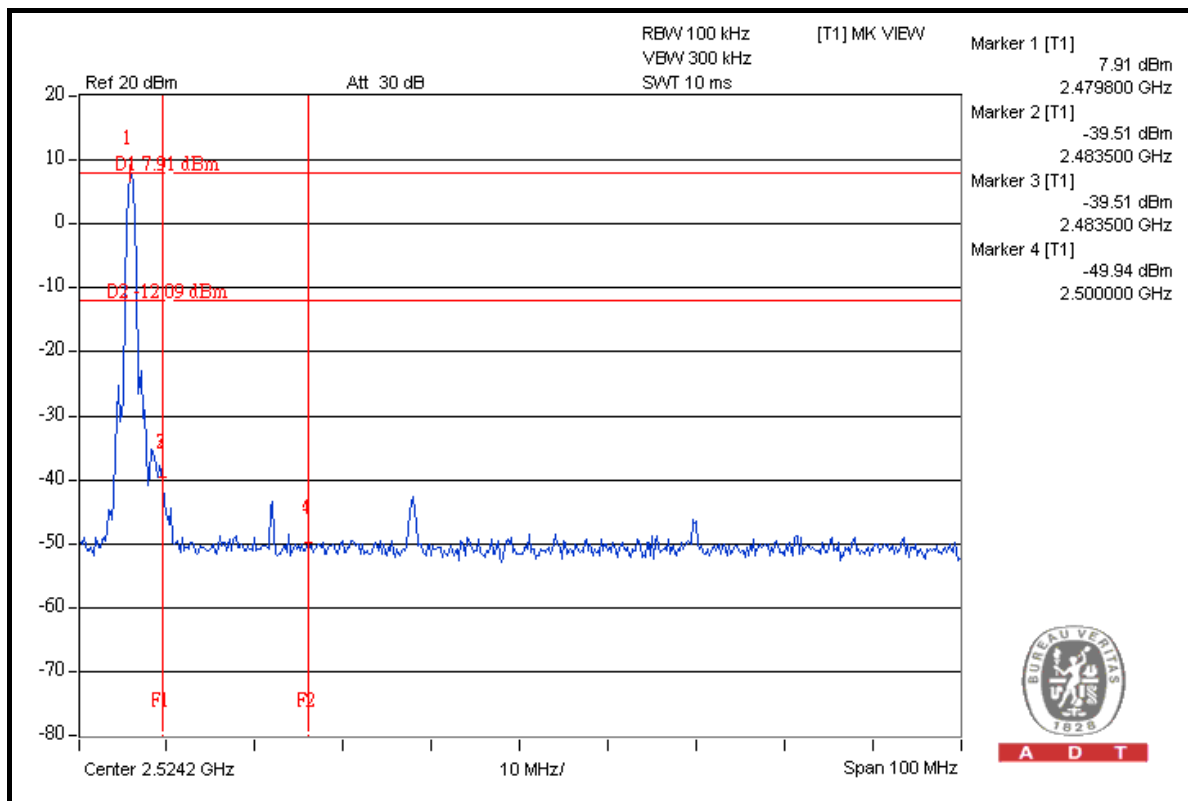

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is chip antenna that without antenna connector. The maximum gain of this antenna is -2.83dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---