

Intermec Technologies Corporation

PW40 Bluetooth Enabled Printer

December 10, 2004

Report No. ITRM0051

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2004 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Test
Issue Date: December 10, 2004
Intermec Technologies Corporation
Model: PW40 Bluetooth Enabled Printer

Specification	Emissions		
	Test Method	Pass	Fail
FCC 15.207 AC Powerline Conducted Emissions:2004	ANSI C63.4:2003	☒	☐
FCC 15.107 Class B, AC Conducted Emissions:2004	ANSI C63.4:2003	☒	☐
FCC 15.109(g) (CISPR 22:1997) Class B: 2004	ANSI C63.4:2003	☒	☐
FCC 15.247(d) Spurious Radiated Emissions:2004	ANSI C63.4:2003	☒	☐
FCC 15.247(d) Spurious Radiated Emissions:2004 (Simultaneous Transmit)	ANSI C63.4:2003	☒	☐

Modifications made to the product

See the Modifications section of this report

Test Facility

- The measurement facility used to collect the data is located at:
Northwest EMC, Inc.; 22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124
Phone: (503) 844-4066 Fax: 844-3826
This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

Approved By:

Don Facteau, IS Manager

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		

FCC: Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



NVLAP: Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0, 200630-0, and 200676-0.



Industry Canada: Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



CAB: Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



TÜV Product Service: Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



TÜV Rheinland: Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



NEMKO: Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



Technology International: Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



Australia/New Zealand: The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



VCCI: Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



BSMI: Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



GOST: Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

What is measurement uncertainty?

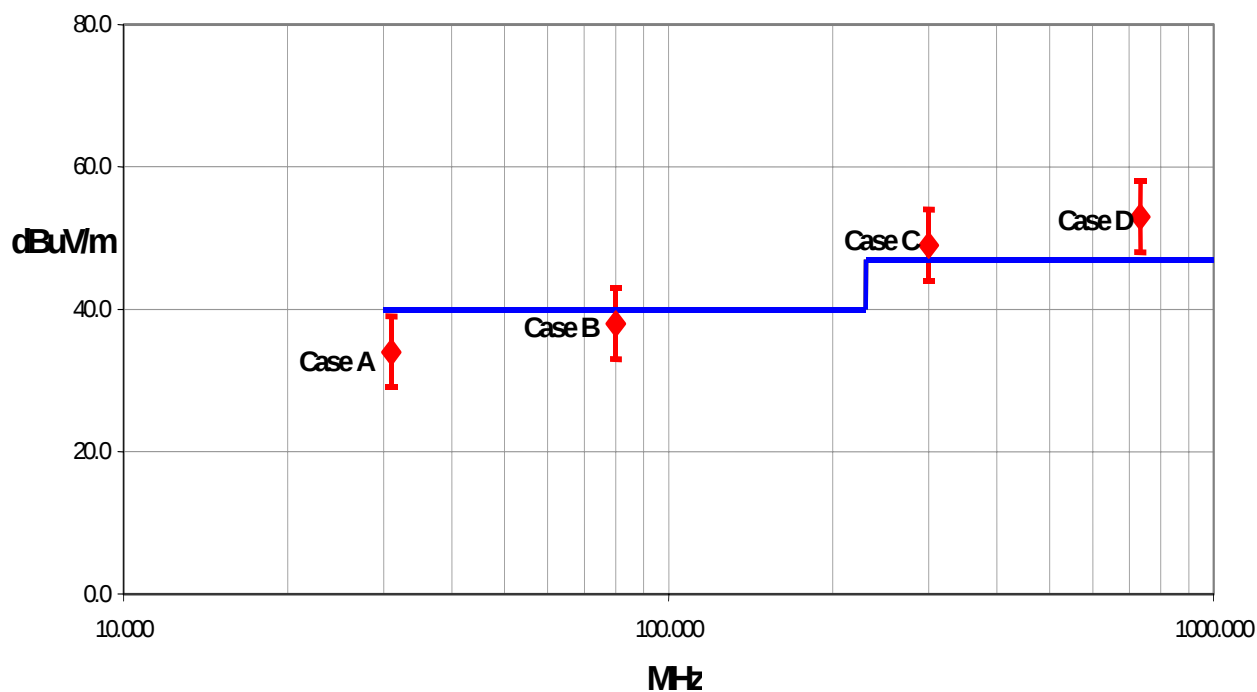
When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- "ISO Guide to the Expression of Uncertainty in Measurements", October 1993
- "NIS81: The Treatment of Uncertainty in EMC Measurements", May 1994
- "IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques", December 2000

How might measurement uncertainty be applied to test results?

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.



Test Result Scenarios:

Case A: Product complies.

Case B: Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

Case C: Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

Case D: Product does not comply.

Radiated Emissions ≤ 1 GHz

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

Radiated Emissions > 1 GHz

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.38 - 1.35
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k=2)	+ 2.57 - 2.51	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.76 - 2.70

Conducted Emissions

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.48	1.48
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.97	2.97

Radiated Immunity

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.11	2.11

Conducted Immunity

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty U (level of confidence $\approx 95\%$)	normal (k = 2)	2.10	2.10

Legend

$u_c(y)$ = square root of the sum of squares of the individual standard uncertainties

U = combined standard uncertainty multiplied by the coverage factor: k . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then $k=3$ (CL of 99.7%) can be used. Please note that with a coverage factor of one, $u_c(y)$ yields a confidence level of only 68%.

**California****Orange County Facility**

41 Tesla Ave.
Irvine, CA 92618
(888) 364-2378
FAX (503) 844-3826

**Oregon****Evergreen Facility**

22975 NW Evergreen Pkwy.,
Suite 400
Hillsboro, OR 97124
(503) 844-4066
FAX (503) 844-3826

**Oregon****Trails End Facility**

30475 NE Trails End Lane
Newberg, OR 97132
(503) 844-4066
FAX (503) 537-0735

**Washington****Sultan Facility**

14128 339th Ave. SE
Sultan, WA 98294
(888) 364-2378
FAX (360) 793-2536

Party Requesting the Test

Company Name:	Intermec Technologies Corporation
Address:	550 Second St. SE
City, State, Zip:	Cedar Rapids, IA 52401-2023
Test Requested By:	Scott Holub
Model:	PW40 Bluetooth Enabled Printer
First Date of Test:	11-06-2004
Last Date of Test:	11-29-2004
Receipt Date of Samples:	11-06-2004
Equipment Design Stage:	Production
Equipment Condition:	No visual damage.

Information Provided by the Party Requesting the Test

Clocks/Oscillators:	Not provided.
I/O Ports:	Serial

Functional Description of the EUT (Equipment Under Test):

Bluetooth Enabled Printer with a cradle for the Intermec 700C handheld computer.

Client Justification for EUT Selection:

Not Provided

Client Justification for Test Selection:

These tests satisfy the requirements for a Class II Permissive Change to allow the Bluetooth module from the Intermec 6820 printer to be used in a new host printer – the Intermec PW40. Radiated spurious emissions testing was performed in both a stand-alone and collocated configurations.

EUT Photo

Equipment modifications					
Item	Test	Date	Modification	Note	Disposition of EUT
1	AC Powerline Conducted Emissions	11/05/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.. Tested in standalone mode.	EUT remained at Northwest EMC.
2	Spurious Radiated Emissions	11/06/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. Tested in standalone mode.	EUT remained at Northwest EMC.
3	Radiated Emissions	11/09/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. Tested in standalone mode.	EUT remained at Northwest EMC.
4	Spurious Radiated Emissions (Bluetooth, 802.11b, CDMA)	11/13/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. Tested in standalone mode.	EUT remained at Northwest EMC.
5	Spurious Radiated Emissions (Bluetooth and 802.11b)	11/19/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. Tested in standalone mode.	EUT remained at Northwest EMC.
6	Spurious Radiated Emissions (Bluetooth, 802.11b, CDMA)	11/20/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. Tested in standalone mode.	EUT remained at Northwest EMC.
7	Spurious Radiated Emissions (Bluetooth, 802.11b, GSM)	11/29/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test. Tested in standalone mode.	EUT remained at Northwest EMC.

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Operating Modes Investigated:

Transmitting data

Worst Case Operating Mode used for Final Test:

Transmitting data (designated by client or system limitations)
--

Power Input Settings Investigated:

120 VAC, 60 Hz

Worst Case Input Power Setting used for Final Test:

120 VAC, 60 Hz (designated by client or system limitations)

Frequency Range Investigated

Start Frequency	30 MHz	Stop Frequency	1 GHz
------------------------	--------	-----------------------	-------

Software\Firmware Applied During Test

Operating system	Windows 98	Version	4.10.2222A
Exercise software	BlueTest	Version	Unknown

Description

The system was tested using special software on the remote laptop to test all functions of the device during the test.
--

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
Power Adapter	Ault Inc.	PW160	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Dell	TS30G1	Unknown
AC Adapter	Dell	TSA 8	00099500-12961-75P-1959

Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary.

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
DC Leads	No	1.2	No	Laptop	AC Adapter
AC Power	No	1.6	No	AC Adapter	AC Mains
Serial (only connected during setup)	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo

Test Description

The final radiated emissions test was performed using the parameters described above as worst case. That final test was conducted at a facility that meets the ANSI C63.4 NSA requirements. The frequency range noted in the data sheets was scanned/tested at that facility. Emissions were maximized as specified, by maximizing table azimuth, antenna height, and cable manipulation.

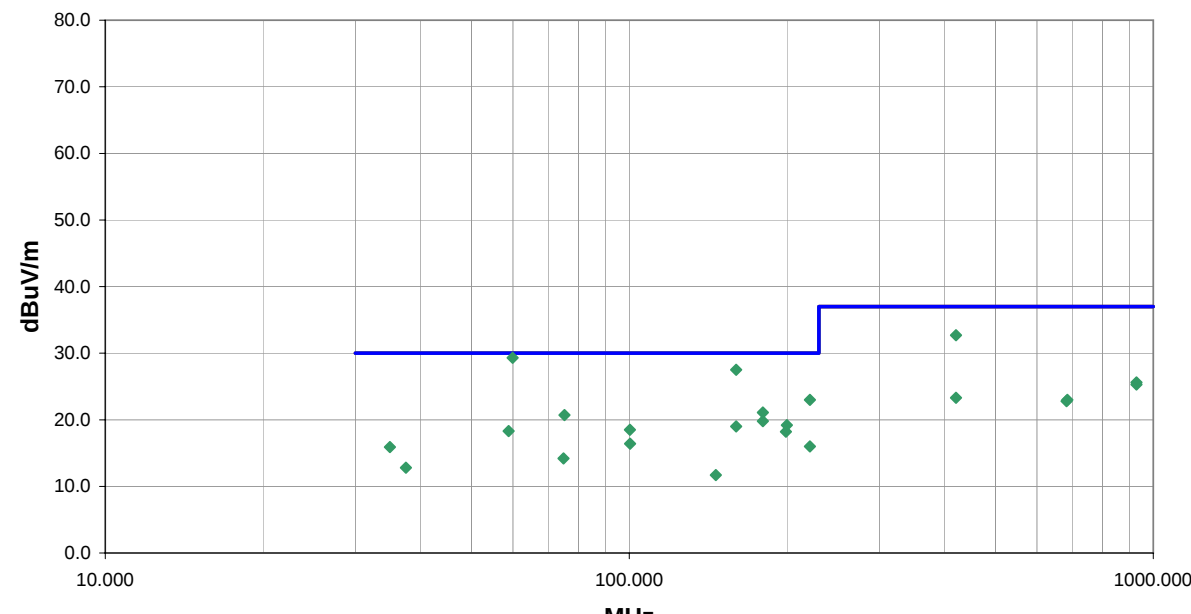
Using the mode of operation and configuration noted within this report, a final radiated emissions test was performed. The frequency range investigated (scanned), is also noted in this report. Radiated emissions measurements were made at the EUT azimuth and antenna height such that the maximum radiated emissions level will be detected. This requires the use of a turntable and an antenna positioner. The preferred method of a continuous azimuth search is utilized for frequency scans of the EUT field strength with both polarities of the measuring antenna. A calibrated, linearly polarized antenna was positioned at the specified distance from the periphery of the EUT.

Note: The specified distance is the horizontal separation between the closest periphery of the EUT and the center of the axis of the elements of the receiving antenna. However, if the receiving antenna is a log-periodic array, the specified distance shall be the distance between the closest periphery of the EUT and the front-to-back center of the array of elements.

Tests were made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement was varied in height above the conducting ground plane to obtain the maximum signal strength. Though specified in the report, the measurement distance shall be 1 meter, 3 meters, 5 meters, 10 meters, or 30 meters. At any measurement distance, the antenna height was varied from 1 meter to 4 meters. These height scans apply for both horizontal and vertical polarization, except that for vertical polarization the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25 cm.

Measurement Bandwidths			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Completed by:

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898184										Date: 11/09/04					
Customer: Intermec Technologies Corporation										Temperature: 64					
Attendees: none										Humidity: 35%					
Cust. Ref. No.:										Barometric Pressure: 30.19					
Tested by: Holly Ashkannejhad						Power: 120VAC/60Hz		Job Site: EV01							
TEST SPECIFICATIONS															
Specification: FCC 15.109(g) (CISPR 22:1997) Class B										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
Transmitting															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												3			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
59.915	44.7	-15.4	224.0	2.2	5.0	0.0	V-Bilog	QP	0.0	29.3	30.0	-0.7			
159.935	40.7	-13.2	357.0	1.0	5.0	0.0	V-Bilog	QP	0.0	27.5	30.0	-2.5			
420.282	37.6	-4.9	160.0	1.1	5.0	0.0	H-Bilog	QP	0.0	32.7	37.0	-4.3			
221.213	34.1	-11.1	227.0	2.2	5.0	0.0	H-Bilog	QP	0.0	23.0	30.0	-7.0			
179.905	33.3	-12.2	122.0	2.6	5.0	0.0	H-Bilog	QP	0.0	21.1	30.0	-8.9			
75.209	37.0	-16.3	210.0	1.0	5.0	0.0	V-Bilog	QP	0.0	20.7	30.0	-9.3			
179.882	32.0	-12.2	14.0	1.0	5.0	0.0	V-Bilog	QP	0.0	19.8	30.0	-10.2			
199.908	31.3	-12.1	74.0	3.8	5.0	0.0	V-Bilog	QP	0.0	19.2	30.0	-10.8			
159.935	32.2	-13.2	271.0	3.1	5.0	0.0	H-Bilog	QP	0.0	19.0	30.0	-11.0			
929.000	23.6	2.0	128.0	2.6	5.0	0.0	H-Bilog	QP	0.0	25.6	37.0	-11.4			
100.316	33.2	-14.7	327.0	1.0	5.0	0.0	V-Bilog	QP	0.0	18.5	30.0	-11.5			
58.853	33.6	-15.3	144.0	3.1	5.0	0.0	H-Bilog	QP	0.0	18.3	30.0	-11.7			
928.997	23.3	2.0	299.0	3.1	5.0	0.0	V-Bilog	QP	0.0	25.3	37.0	-11.7			
199.093	30.3	-12.1	39.0	2.2	5.0	0.0	H-Bilog	QP	0.0	18.2	30.0	-11.8			
100.340	31.1	-14.7	257.0	1.2	5.0	0.0	H-Bilog	QP	0.0	16.4	30.0	-13.6			
420.278	28.2	-4.9	121.0	2.2	5.0	0.0	V-Bilog	QP	0.0	23.3	37.0	-13.7			
221.213	27.1	-11.1	90.0	1.0	5.0	0.0	V-Bilog	QP	0.0	16.0	30.0	-14.0			
685.698	23.3	-0.3	312.0	1.2	5.0	0.0	V-Bilog	QP	0.0	23.0	37.0	-14.0			
34.919	24.4	-8.5	16.0	1.0	5.0	0.0	V-Bilog	QP	0.0	15.9	30.0	-14.1			
683.241	23.2	-0.4	274.0	2.1	5.0	0.0	H-Bilog	QP	0.0	22.8	37.0	-14.2			
74.900	30.6	-16.4	79.0	4.0	5.0	0.0	H-Bilog	QP	0.0	14.2	30.0	-15.8			

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
37.462	22.4	-9.6	100.0	2.6	5.0	0.0	H-Bilog	QP	0.0	12.8	30.0	-17.2
146.248	26.6	-14.9	24.0	1.0	5.0	0.0	V-Bilog	QP	0.0	11.7	30.0	-18.3



Justification

The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 700C and Intermec's Bluetooth enabled printer, Model PW40. The 700C contains a CDMA radio (FCC ID: HN2SB555-2), a 802.11b radio (FCC ID: HN22011B-2), and a Bluetooth radio (FCC ID: HN2ABTM3-3). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 700C can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below:

Channels in Specified Band Investigated:

802.11(b):	1, 11
CDMA (Cellular):	54, 55, 395, 467
CDMA (PCS):	1, 35, 1153
Bluetooth:	5, 11, 62, 68, 79

Operating Modes Investigated:**Bluetooth Radio in PW40 with 700C in cradle:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 68, 802.11(b) Channel 11, & CDMA PCS Channel 35
Simultaneous transmission of Bluetooth Channel 62, 802.11(b) Channel 11, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA Cellular Channel 467
Simultaneous transmission of Bluetooth Channel 5, 802.11(b) Channel 1, & CDMA Cellular Channel 395
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 55
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 54

Data Rates Investigated:

Maximum

Antennas Investigated:

802.11(b):	2011B integral antenna (internal to 700C)
CDMA (Cellular):	805-606-102 Dual Band CDMA 900/1900MHz Antenna (SB555) (external to 700C)
CDMA (PCS):	805-666-204 Single Band CDMA 1900MHz Antenna (SB555) (external to 700C)
Bluetooth:	Integral PCB trace, ABTM3 (internal to 700C)
Bluetooth:	Integral PCB trace, (internal to PW40)

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	26 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Blue Test FCC_Smart 802.11 Agency Test	Version	Unknown
--------------------------	--	----------------	---------

Description

The system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Bluetooth Radio in Printer	Intermec Technologies Corporation	8520-00080	Unknown
EUT – Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
AC Adapter	Ault Inc.	PW160	Unknown
Handheld Computer	Intermec Technologies Corporation	700C	05400400873
Bluetooth Radio in 700C	Intermec Technologies Corporation	ABTM3	N/A
802.11(b) Radio in 700C	Intermec Technologies Corporation	2011B	N/A
CDMA Radio in 700C	Intermec Technologies Corporation	SB555	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Remote laptop	Dell	TS30G1	Unknown

Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	12 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

Test Description

Requirement: Per 15.247(d), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 15.205, is measured. The peak level must comply with the limits specified in 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 700C and Intermec's Bluetooth enabled printer, Model PW40. The 700C contains a CDMA radio (FCC ID: HN2SB555-2), a 802.11b radio (FCC ID: HN22011B-2), and a Bluetooth radio (FCC ID: HN2ABTM3-3). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 700C can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission:

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:

Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.

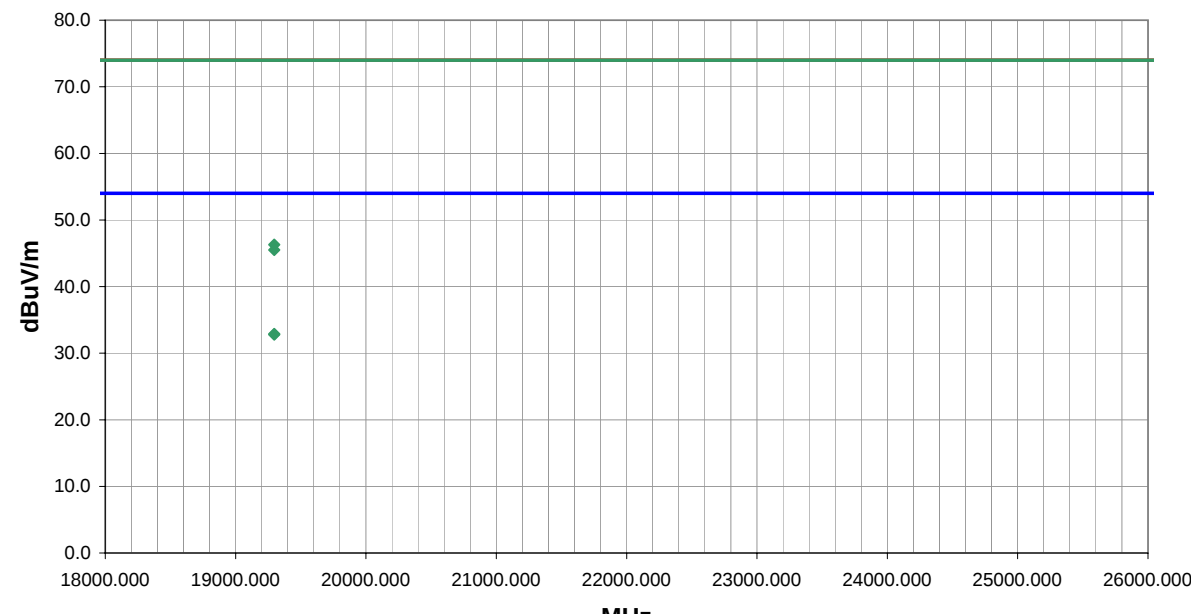
All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 26 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.

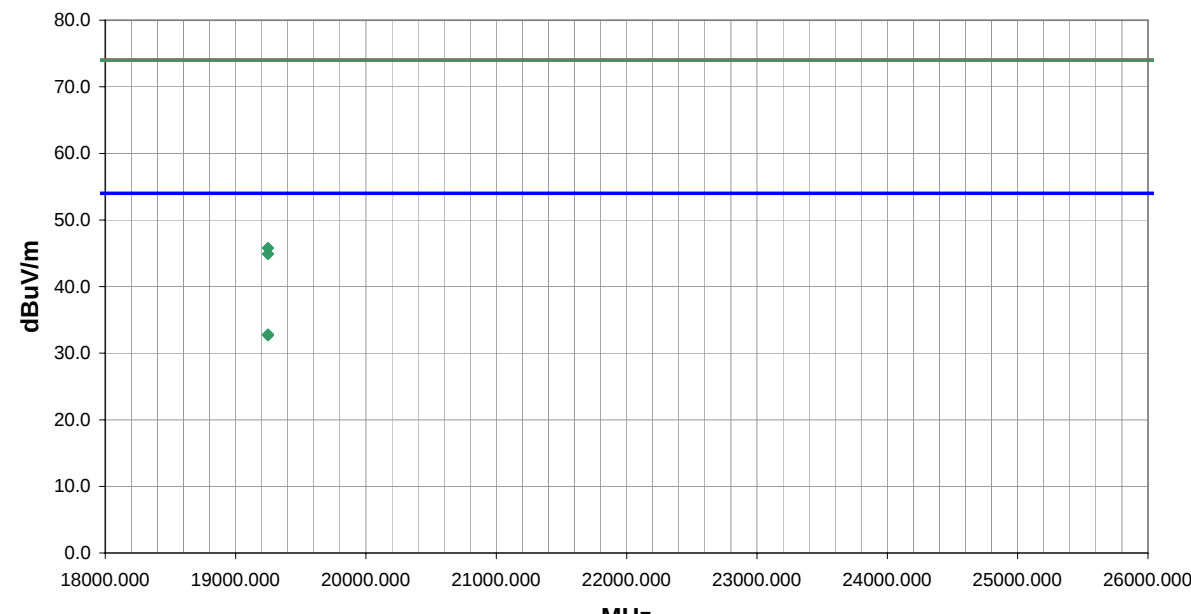
All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

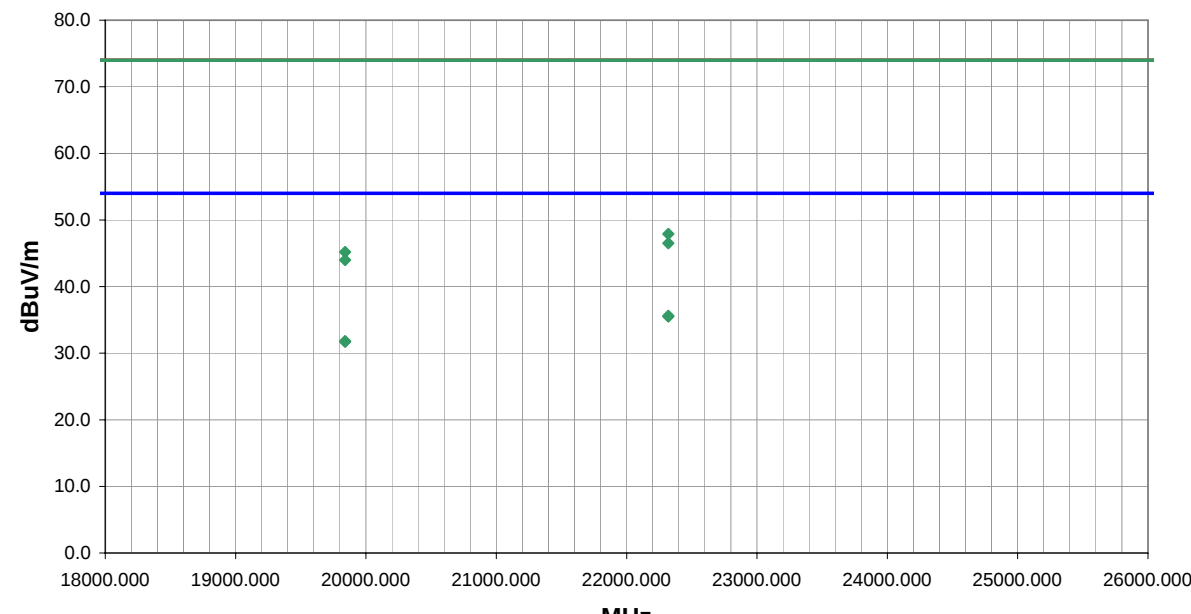
Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

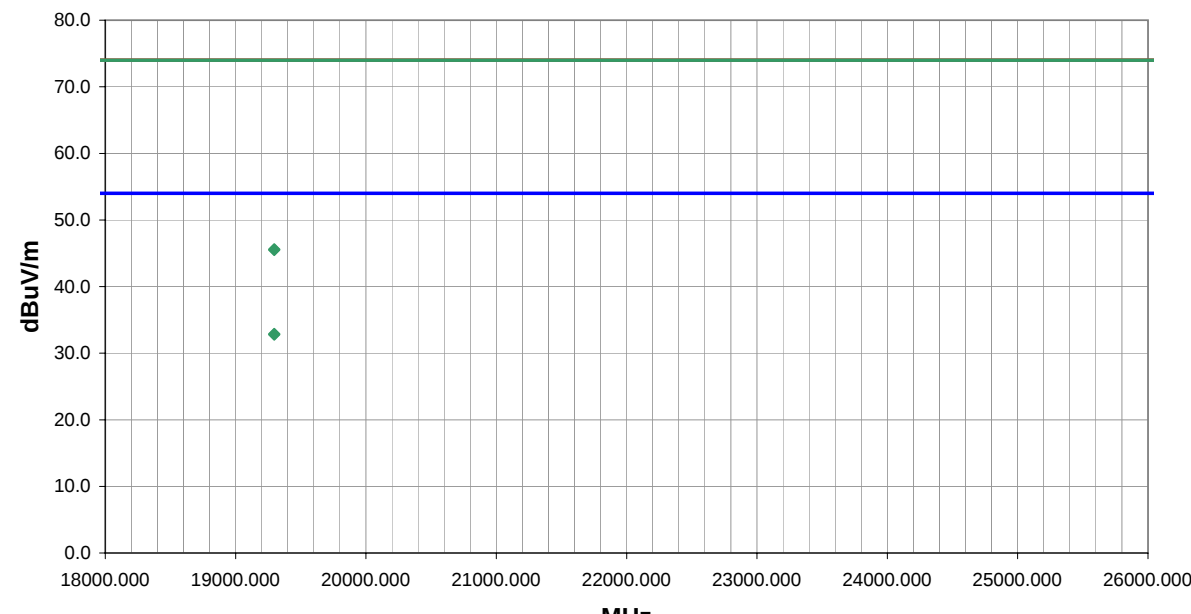
Completed by:

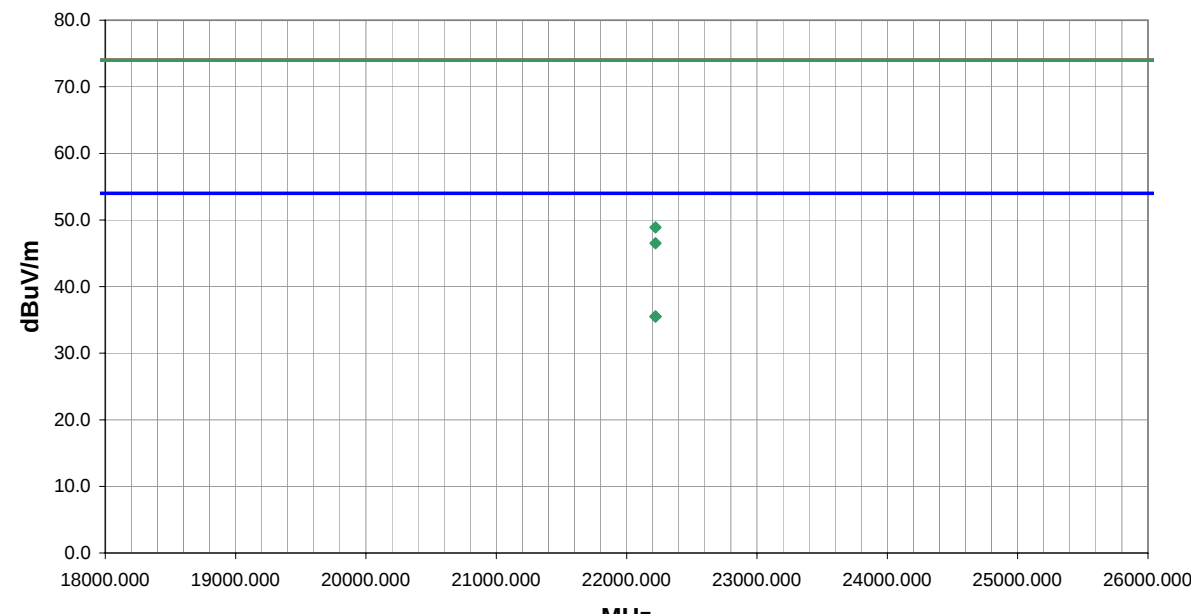


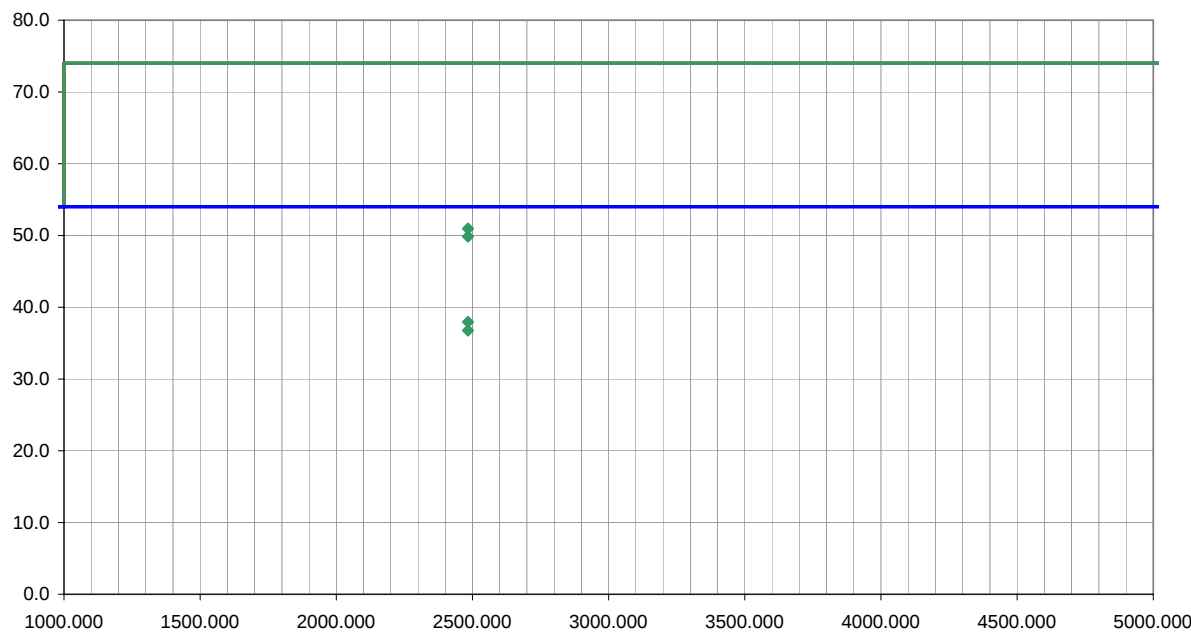
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/13/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmission															
EUT OPERATING MODES															
Bluetooth 11 on PW40. Bluetooth 11, 802.11(b) 1 and CDMA (cellular) 467 on 700C															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										8					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19296.000	24.9	8.0	-4.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.9	54.0	-21.1			
19296.000	24.8	8.0	363.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.8	54.0	-21.2			
19296.000	38.3	8.0	-4.0	1.0	3.0	0.0	I-High Horr	PK	0.0	46.3	74.0	-27.7			
19296.000	37.5	8.0	363.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.5	74.0	-28.5			

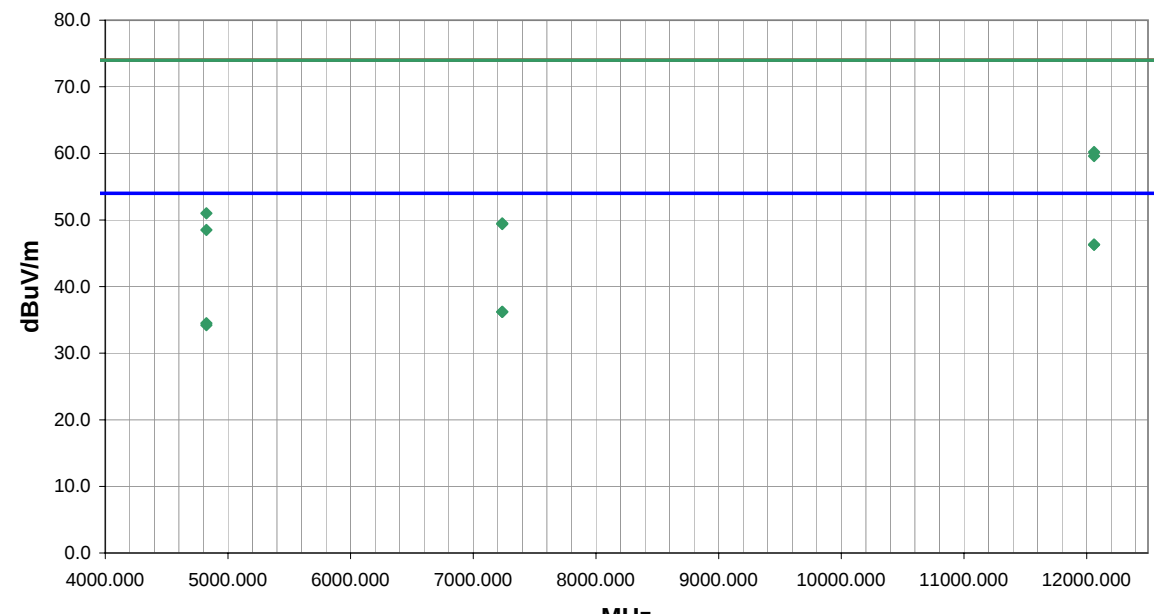
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/13/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmission															
EUT OPERATING MODES															
Bluetooth 5 on PW40. Bluetooth 5, 802.11(b) 1 and CDMA (cellular) 395 on 700C															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										9					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19248.000	25.0	7.8	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.8	54.0	-21.2			
19248.000	24.9	7.8	363.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.7	54.0	-21.3			
19248.000	38.0	7.8	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.8	74.0	-28.2			
19248.000	37.1	7.8	363.0	1.0	3.0	0.0	V-High Horr	PK	0.0	44.9	74.0	-29.1			

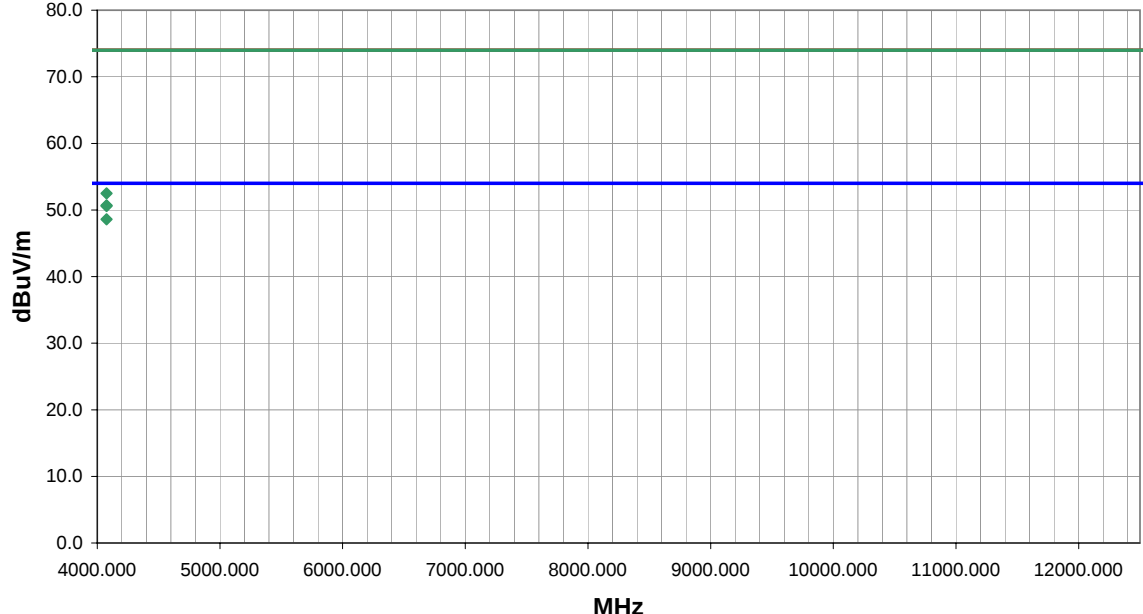
NORTHWEST EMC										REV df4.4 10/22/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051							
Serial Number: 4898184						Date: 11/13/04							
Customer: Intermec Technologies Corporation						Temperature: 64							
Attendees: none						Humidity: 35%							
Cust. Ref. No.:						Barometric Pressure: 30.19							
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004							
Method: ANSI C63.4						Year: 2003							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous Transmission													
EUT OPERATING MODES													
Bluetooth 79 on PW40. Bluetooth 79, 802.11(b) 1 and CDMA (cellular) 55 on 700C													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										10			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
22320.000	26.4	9.2	362.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.6	54.0	-18.4	
22320.000	26.3	9.2	-2.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.5	54.0	-18.5	
19840.000	22.9	8.9	0.0	1.0	3.0	0.0	I-High Horr	AV	0.0	31.8	54.0	-22.2	
19840.000	22.8	8.9	362.0	1.0	3.0	0.0	V-High Horr	AV	0.0	31.7	54.0	-22.3	
22320.000	38.7	9.2	362.0	1.0	3.0	0.0	V-High Horr	PK	0.0	47.9	74.0	-26.1	
22320.000	37.3	9.2	-2.0	1.0	3.0	0.0	I-High Horr	PK	0.0	46.5	74.0	-27.5	
19840.000	36.3	8.9	0.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.2	74.0	-28.8	
19840.000	35.1	8.9	362.0	1.0	3.0	0.0	V-High Horr	PK	0.0	44.0	74.0	-30.0	

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/13/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmission															
EUT OPERATING MODES															
Bluetooth 11 on PW40. Bluetooth 11, 802.11(b) 1 and CDMA (PCS) 1153 on 700C															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										11					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19296.000	24.9	8.0	362.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.9	54.0	-21.1			
19296.000	24.8	8.0	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.8	54.0	-21.2			
19296.000	37.6	8.0	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.6	74.0	-28.4			
19296.000	37.5	8.0	362.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.5	74.0	-28.5			

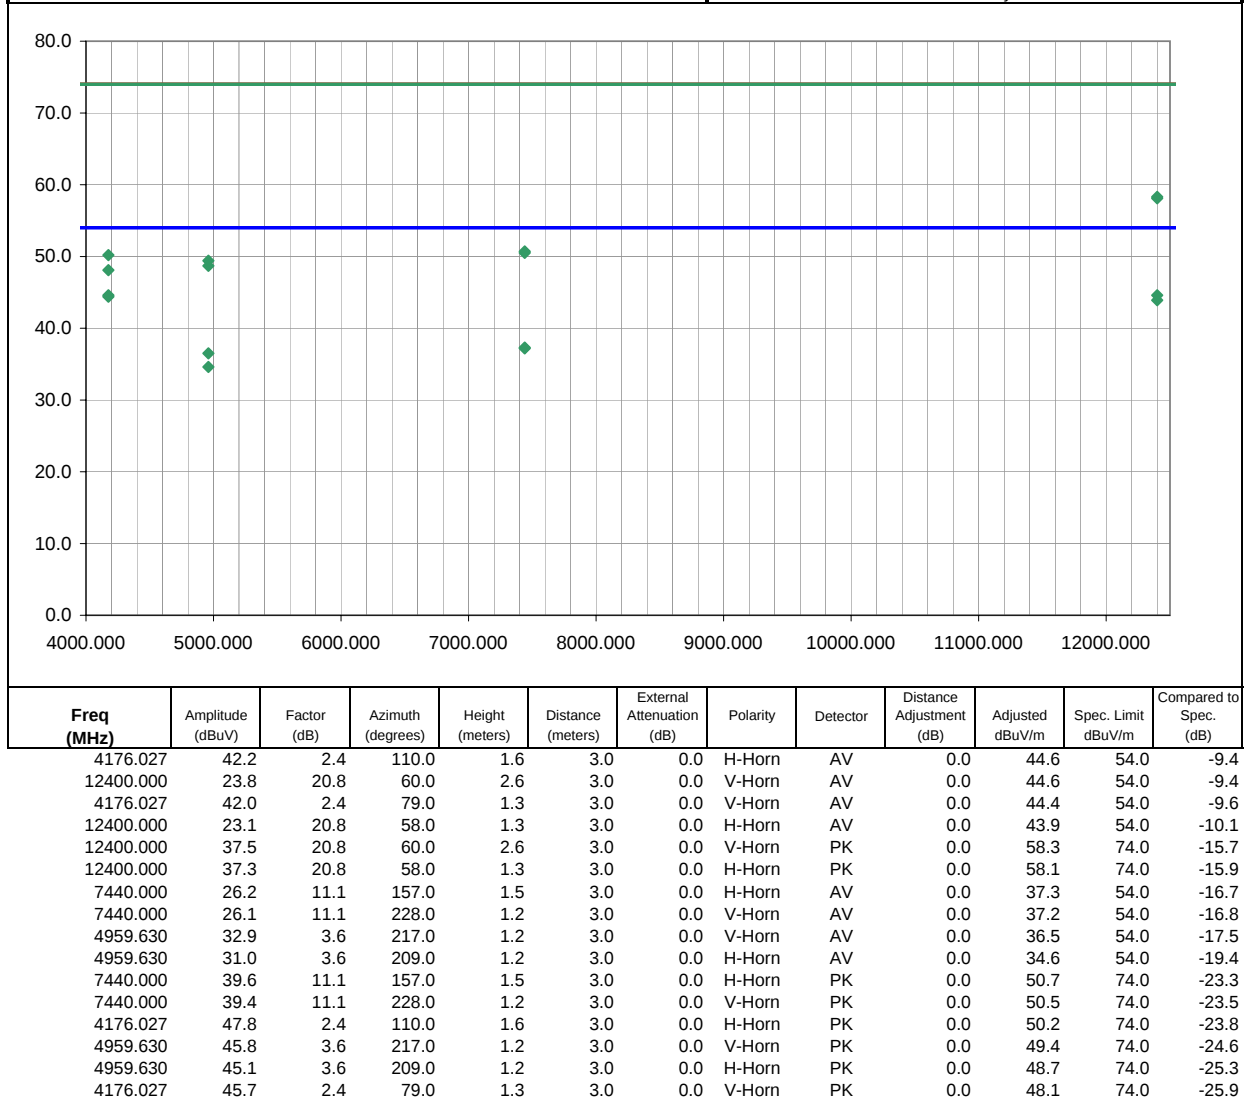
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/13/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmission															
EUT OPERATING MODES															
Bluetooth 69 on PW40. Bluetooth 69 802.11(b) 11 and CDMA (PCS) 35 on 700C															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										12					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
22221.000	26.5	9.0	0.0	1.0	3.0	0.0	-High Horr	AV	0.0	35.5	54.0	-18.5			
22221.000	26.5	9.0	362.0	1.0	3.0	0.0	-High Horr	AV	0.0	35.5	54.0	-18.5			
22221.000	39.9	9.0	0.0	1.0	3.0	0.0	-High Horr	PK	0.0	48.9	74.0	-25.1			
22221.000	37.5	9.0	362.0	1.0	3.0	0.0	-High Horr	PK	0.0	46.5	74.0	-27.5			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/13/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmission															
EUT OPERATING MODES															
Bluetooth 62 on PW40. Bluetooth 62, 802.11(b) 11 and CDMA (PCS) 1153 on 700C															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										13					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2483.500	15.5	32.0	257.0	1.1	1.0	0.0	H-Horn	AV	-9.5	38.0	54.0	-16.0			
2483.500	14.3	32.0	129.0	1.0	1.0	0.0	V-Horn	AV	-9.5	36.8	54.0	-17.2			
2483.500	28.5	32.0	129.0	1.0	1.0	0.0	V-Horn	PK	-9.5	51.0	74.0	-23.0			
2483.500	27.4	32.0	257.0	1.1	1.0	0.0	H-Horn	PK	-9.5	49.9	74.0	-24.1			

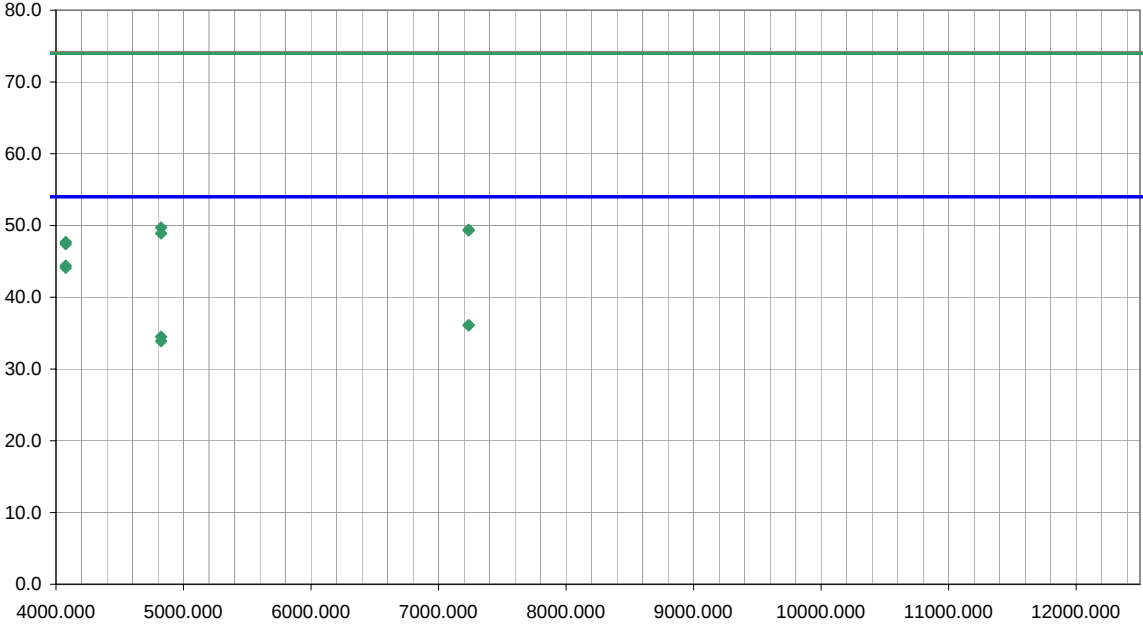
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898184										Date: 11/13/04					
Customer: Intermec Technologies Corporation										Temperature: 66					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.33					
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, and CDMA (cellular) 467 in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												14			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12060.000	26.1	20.2	292.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.3	54.0	-7.7			
12060.000	26.1	20.2	53.0	1.7	3.0	0.0	H-Horn	AV	0.0	46.3	54.0	-7.7			
12060.000	40.0	20.2	292.0	1.2	3.0	0.0	V-Horn	PK	0.0	60.2	74.0	-13.8			
12060.000	39.4	20.2	53.0	1.7	3.0	0.0	H-Horn	PK	0.0	59.6	74.0	-14.4			
7236.000	26.1	10.1	336.0	1.3	3.0	0.0	H-Horn	AV	0.0	36.2	54.0	-17.8			
7236.000	26.1	10.1	18.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.2	54.0	-17.8			
4824.000	31.2	3.3	242.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.5	54.0	-19.5			
4824.000	30.9	3.3	206.0	1.3	3.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8			
4824.000	47.7	3.3	242.0	1.2	3.0	0.0	V-Horn	PK	0.0	51.0	74.0	-23.0			
7236.000	39.4	10.1	18.0	1.2	3.0	0.0	V-Horn	PK	0.0	49.5	74.0	-24.5			
7236.000	39.3	10.1	336.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.4	74.0	-24.6			
4824.000	45.2	3.3	206.0	1.3	3.0	0.0	H-Horn	PK	0.0	48.5	74.0	-25.5			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/14/04									
Customer: Intermec Technologies Corporation						Temperature: 66									
Attendees: none						Humidity: 45%									
Cust. Ref. No.:						Barometric Pressure: 30.33									
Tested by: Dean Ghizzone				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 5 in PW40. Bluetooth 5, 802.11b 1, and CDMA (cellular) 395 in 700C.															
DEVIATIONS FROM TEST STANDARD															
None															
RESULTS										Run #					
Pass										15					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
4075.974	48.2	2.4	157.0	1.5	3.0	0.0	V-Horn	AV	0.0	50.6	54.0	-3.4			
4075.974	46.2	2.4	351.0	1.3	3.0	0.0	H-Horn	AV	0.0	48.6	54.0	-5.4			
4075.974	50.1	2.4	157.0	1.5	3.0	0.0	V-Horn	PK	0.0	52.5	74.0	-21.5			
4075.974	48.3	2.4	351.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.7	74.0	-23.3			

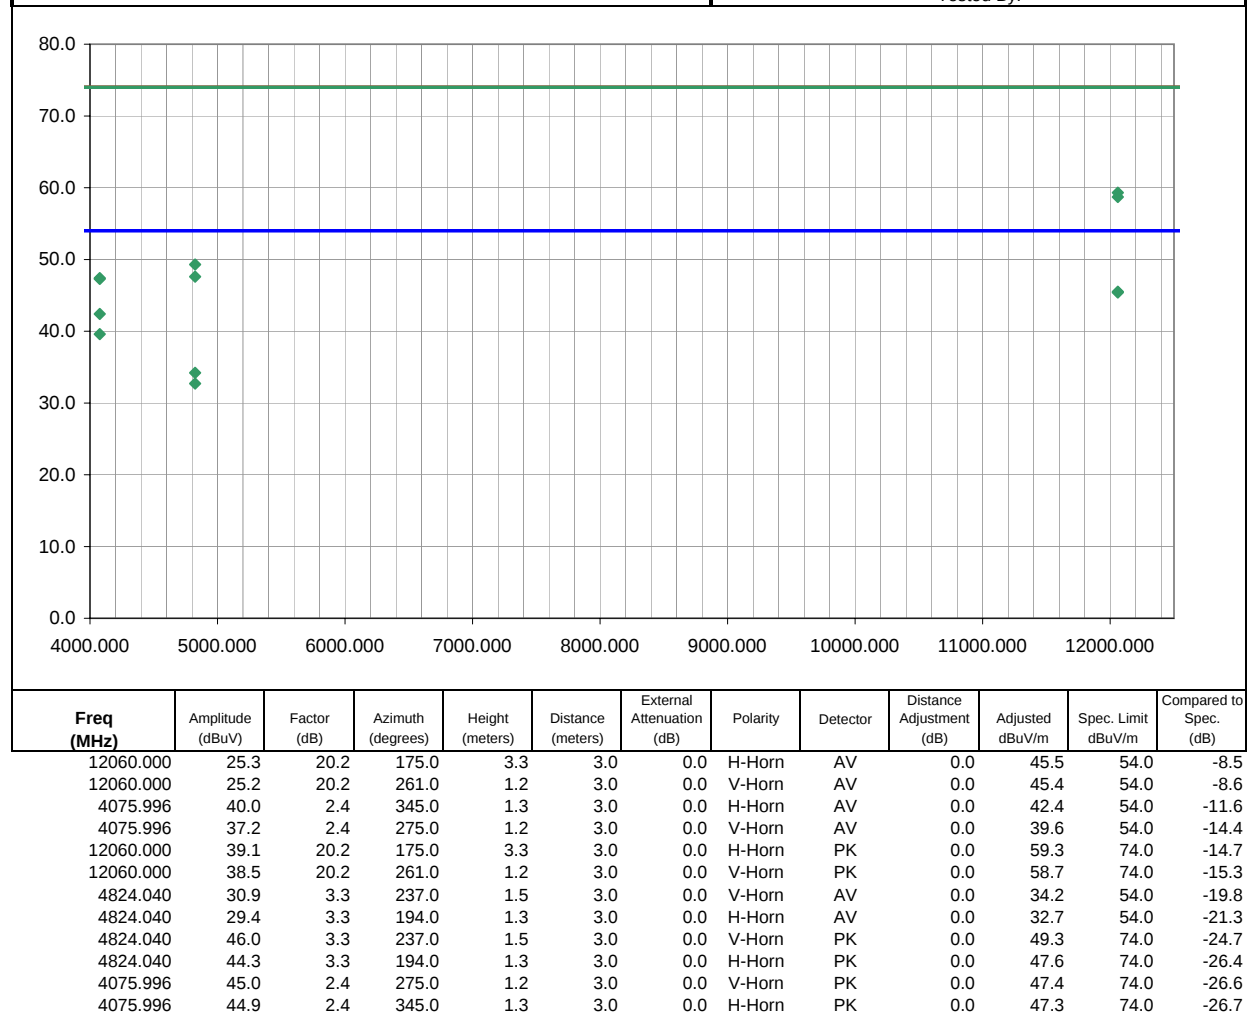
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.4 10/22/2004
EUT: PW40 Bluetooth Enabled Printer		Work Order: JTRM0051		
Serial Number: 4898184		Date: 11/14/04		
Customer: Intermec Technologies Corporation		Temperature: 66		
Attendees: none		Humidity: 45%		
Cust. Ref. No.:		Barometric Pressure: 30.33		
Tested by: Dean Ghizzone		Power: 120VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS				
Specification: FCC 15.247(d) Spurious Radiated Emissions		Year: 2004		
Method: ANSI C63.4		Year: 2003		
SAMPLE CALCULATIONS				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator				
COMMENTS				
Simultaneous transmission				
EUT OPERATING MODES				
Bluetooth 79 in PW40. Bluetooth 79, 802.11b 11, and CDMA (cellular) 55 in 700C.				
DEVIATIONS FROM TEST STANDARD				
None				
RESULTS				Run #
Pass				16
Other				
 Tested By:				

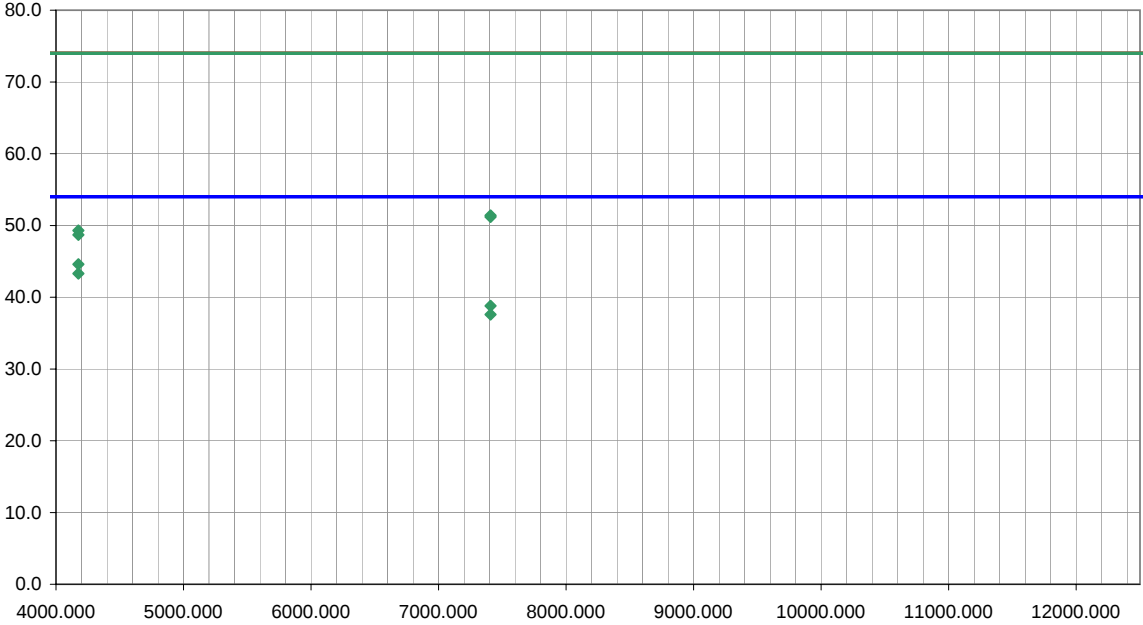


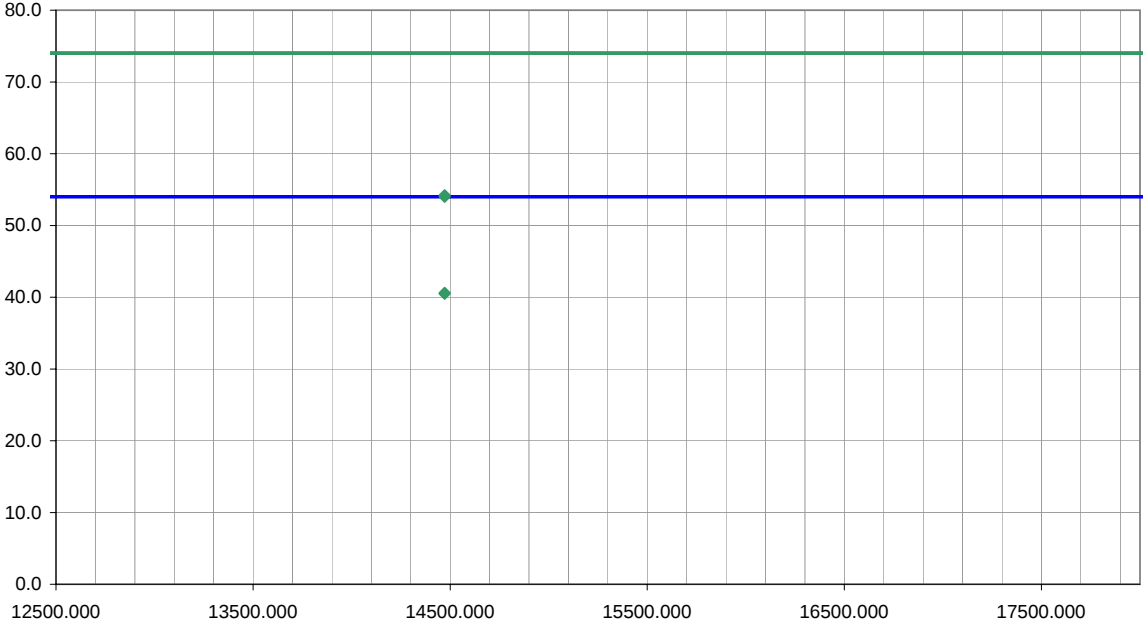
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: JTRM0051					
Serial Number: 4898184										Date: 11/14/04					
Customer: Intermec Technologies Corporation										Temperature: 66					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.33					
Tested by: Dean Ghizzone					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 79 in PW40. Bluetooth 79, 802.11b 11, and CDMA (cellular) 54 in 700C.															
DEVIATIONS FROM TEST STANDARD															
None															
RESULTS															
Pass														Run #	
														17	
Other															
										 Tested By:					
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2483.500	54.9	-2.2	31.0	1.4	3.0	20.0	H-Horn	PK	0.0	72.7	74.0	-1.3			
2087.997	35.6	-3.3	216.0	1.3	3.0	20.0	H-Horn	AV	0.0	52.3	54.0	-1.7			
2483.500	34.3	-2.2	32.0	1.4	3.0	20.0	H-Horn	AV	0.0	52.1	54.0	-1.9			
2087.997	34.4	-3.3	210.0	1.2	3.0	20.0	V-Horn	AV	0.0	51.1	54.0	-2.9			
2483.500	27.5	-2.2	211.0	2.0	3.0	20.0	V-Horn	AV	0.0	45.3	54.0	-8.7			
2087.997	43.3	-3.3	216.0	1.3	3.0	20.0	H-Horn	PK	0.0	60.0	74.0	-14.0			
2087.997	43.2	-3.3	210.0	1.2	3.0	20.0	V-Horn	PK	0.0	59.9	74.0	-14.1			
2483.500	40.6	-2.2	211.0	2.0	3.0	20.0	V-Horn	PK	0.0	58.4	74.0	-15.6			

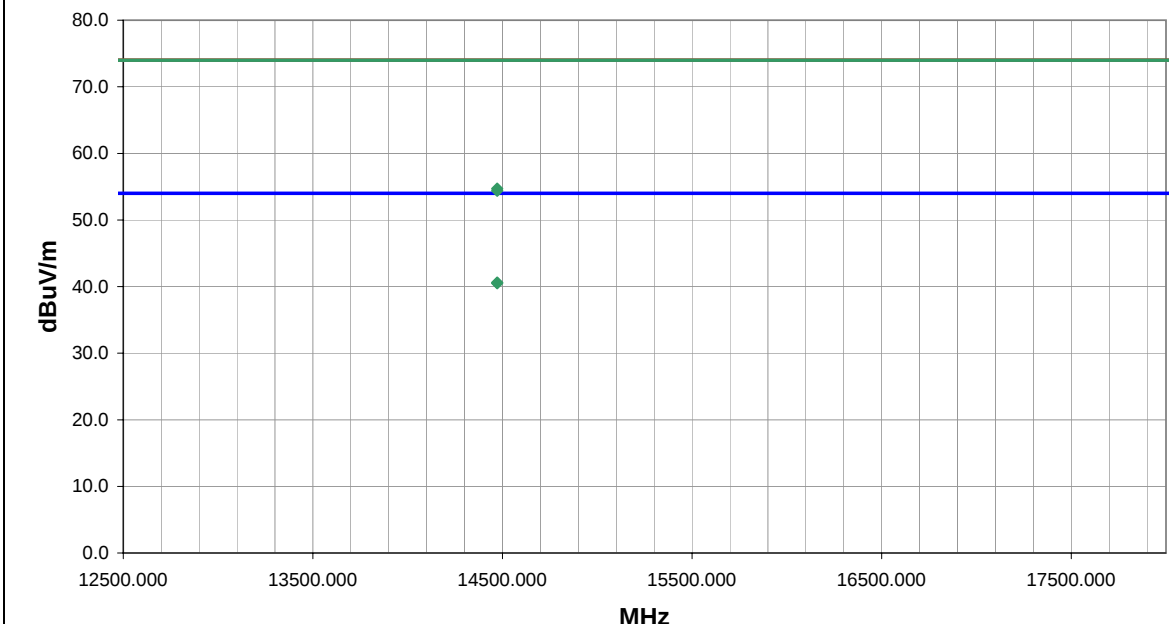
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898184										Date: 11/14/04					
Customer: Intermec Technologies Corporation										Temperature: 66					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.33					
Tested by: Dean Ghizzone					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, and CDMA (PCS) 1 in 700C.															
DEVIATIONS FROM TEST STANDARD															
None															
RESULTS												Run #			
Pass												18			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
4076.030	42.0	2.4	276.0	1.3	3.0	0.0	V-Horn	AV	0.0	44.4	54.0	-9.6			
4076.030	41.7	2.4	344.0	1.3	3.0	0.0	H-Horn	AV	0.0	44.1	54.0	-9.9			
7236.000	26.0	10.1	151.0	1.4	3.0	0.0	H-Horn	AV	0.0	36.1	54.0	-17.9			
7236.000	26.0	10.1	276.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.1	54.0	-17.9			
4823.825	31.2	3.3	235.0	1.5	3.0	0.0	V-Horn	AV	0.0	34.5	54.0	-19.5			
4823.825	30.6	3.3	12.0	1.2	3.0	0.0	H-Horn	AV	0.0	33.9	54.0	-20.1			
4823.825	46.4	3.3	235.0	1.5	3.0	0.0	V-Horn	PK	0.0	49.7	74.0	-24.3			
7236.000	39.3	10.1	151.0	1.4	3.0	0.0	H-Horn	PK	0.0	49.4	74.0	-24.6			
7236.000	39.2	10.1	276.0	1.2	3.0	0.0	V-Horn	PK	0.0	49.3	74.0	-24.7			
4823.825	45.6	3.3	12.0	1.2	3.0	0.0	H-Horn	PK	0.0	48.9	74.0	-25.1			
4076.030	45.3	2.4	276.0	1.3	3.0	0.0	V-Horn	PK	0.0	47.7	74.0	-26.3			
4076.030	45.0	2.4	344.0	1.3	3.0	0.0	H-Horn	PK	0.0	47.4	74.0	-26.6			

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.4 10/22/2004
EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051		
Serial Number: 4898184		Date: 11/14/04		
Customer: Intermec Technologies Corporation		Temperature: 66		
Attendees: none		Humidity: 45%		
Cust. Ref. No.:		Barometric Pressure: 30.33		
Tested by: Dean Ghizzone		Power: 120VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS				
Specification: FCC 15.247(d) Spurious Radiated Emissions		Year: 2004		
Method: ANSI C63.4		Year: 2003		
SAMPLE CALCULATIONS				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator				
COMMENTS				
Simultaneous transmission				
EUT OPERATING MODES				
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, and CDMA (PCS) 1153 in 700C.				
DEVIATIONS FROM TEST STANDARD				
None				
RESULTS				Run #
Pass				19
Other		 Tested By:		



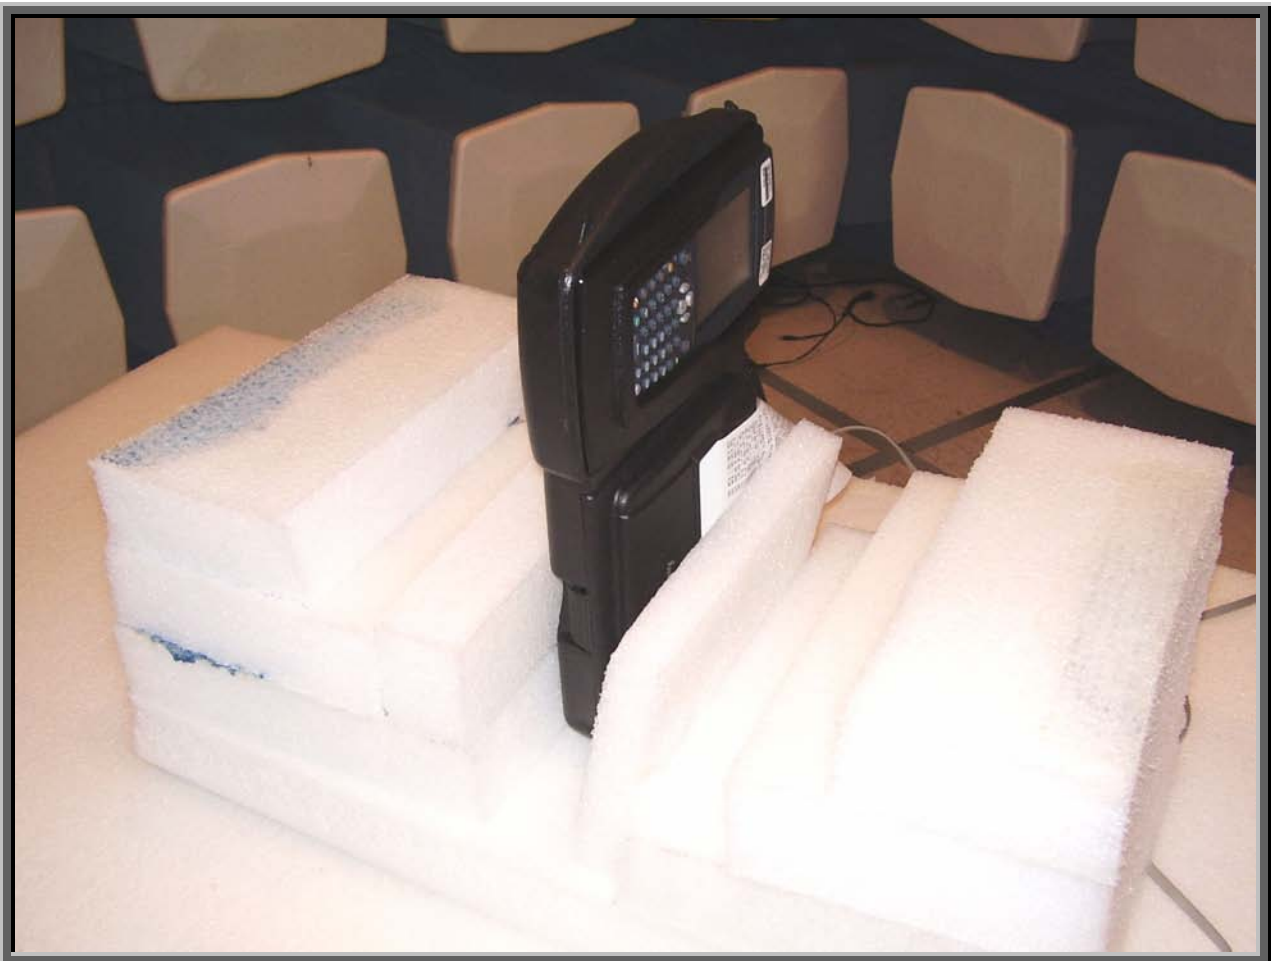
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/14/04									
Customer: Intermec Technologies Corporation						Temperature: 66									
Attendees: none						Humidity: 45%									
Cust. Ref. No.:						Barometric Pressure: 30.33									
Tested by: Dean Ghizzone				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 68 in PW40. Bluetooth 68, 802.11b 11, and CDMA (PCS) 35 in 700C.															
DEVIATIONS FROM TEST STANDARD															
None															
RESULTS										Run #					
Pass										20					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
4175.989	42.2	2.4	174.0	1.1	3.0	0.0	V-Horn	AV	0.0	44.6	54.0	-9.4			
4175.989	40.9	2.4	99.0	1.6	3.0	0.0	H-Horn	AV	0.0	43.3	54.0	-10.7			
7407.000	27.7	11.1	195.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.8	54.0	-15.2			
7407.000	26.5	11.1	85.0	1.6	3.0	0.0	V-Horn	AV	0.0	37.6	54.0	-16.4			
7407.000	40.3	11.1	195.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.4	74.0	-22.6			
7407.000	40.1	11.1	85.0	1.6	3.0	0.0	V-Horn	PK	0.0	51.2	74.0	-22.8			
4175.989	46.9	2.4	99.0	1.6	3.0	0.0	H-Horn	PK	0.0	49.3	74.0	-24.7			
4175.989	46.3	2.4	174.0	1.1	3.0	0.0	V-Horn	PK	0.0	48.7	74.0	-25.3			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: JTRM0051					
Serial Number: 4898184										Date: 11/14/04					
Customer: Intermec Technologies Corporation										Temperature: 66					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.33					
Tested by: Dean Ghizzone					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, and CDMA (PCS) 1 in 700C.															
DEVIATIONS FROM TEST STANDARD															
None															
RESULTS												Run #			
Pass												21			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
14472.000	26.8	13.8	129.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.6	54.0	-13.4			
14472.000	26.7	13.8	264.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.5	54.0	-13.5			
14472.000	40.4	13.8	129.0	1.2	3.0	0.0	V-Horn	PK	0.0	54.2	74.0	-19.8			
14472.000	40.2	13.8	264.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.0	74.0	-20.0			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898184										Date: 11/14/04					
Customer: Intermec Technologies Corporation										Temperature: 66					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.33					
Tested by: Dean Ghizzone					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, and CDMA (cellular) 467 in 700C.															
DEVIATIONS FROM TEST STANDARD															
None															
RESULTS												Run #			
Pass												22			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
14472.000	26.8	13.8	128.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.6	54.0	-13.4			
14472.000	26.7	13.8	234.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.5	54.0	-13.5			
14472.000	40.9	13.8	128.0	1.2	3.0	0.0	V-Horn	PK	0.0	54.7	74.0	-19.3			
14472.000	40.6	13.8	234.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.4	74.0	-19.6			







Justification

The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 700C and Intermec's Bluetooth enabled printer, Model PW40. The 700C contains a CDMA radio (FCC ID: EHAEM3420), a 802.11b radio (FCC ID: HN22011B-2), and a Bluetooth radio (FCC ID: EHABTS080). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 700C can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below:

Channels in Specified Band Investigated:

802.11(b):	1, 11
CDMA (Cellular):	54, 55, 395, 467
CDMA (PCS):	1, 35, 1153
Bluetooth:	5, 11, 62, 68, 79

Operating Modes Investigated:**Bluetooth Radio in PW40 with 700C in cradle:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 68, 802.11(b) Channel 11, & CDMA PCS Channel 35
Simultaneous transmission of Bluetooth Channel 62, 802.11(b) Channel 11, & CDMA PCS Channel 1153
Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & CDMA Cellular Channel 467
Simultaneous transmission of Bluetooth Channel 5, 802.11(b) Channel 1, & CDMA Cellular Channel 395
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 55
Simultaneous transmission of Bluetooth Channel 79, 802.11(b) Channel 11, & CDMA Cellular Channel 54

Data Rates Investigated:

Maximum

Antennas Investigated:

802.11(b):	2011B integral antenna (internal to 700C)
CDMA (Cellular):	805-606-102 Dual Band CDMA 900/1900MHz Antenna (EM3420) (external to 700C)
CDMA (PCS):	805-666-204 Single Band CDMA 1900MHz Antenna (EM3420) (external to 700C)
Bluetooth:	Integral PCB trace, BTS080 (internal to 700C)
Bluetooth:	Integral PCB trace, (internal to PW40)

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	26 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Blue Test FCC_Smart 802.11 Agency Test	Version	Unknown
--------------------------	--	----------------	---------

Description

The system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Bluetooth Radio in Printer	Intermec Technologies Corporation	8520-00080	Unknown
EUT – Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
AC Adapter	Ault Inc.	PW160	Unknown
Handheld Computer	Intermec Technologies Corporation	700C	14490400172
Bluetooth Radio in 700C	Intermec Technologies Corporation	BTS080	N/A
802.11(b) Radio in 700C	Intermec Technologies Corporation	2011B	N/A
CDMA Radio in 700C	Intermec Technologies Corporation	EM3420	Unknown

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Remote laptop	Dell	TS30G1	Unknown

Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

Test Description

Requirement: Per 15.247(d), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 15.205, is measured. The peak level must comply with the limits specified in 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 700C and Intermec's Bluetooth enabled printer, Model PW40. The 700C contains a CDMA radio (FCC ID: EHAEM3420), a 802.11b radio (FCC ID: HN22011B-2), and a Bluetooth radio (FCC ID: EHABTS080). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 700C can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission:

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:

Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.

All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 26 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.

All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Completed by:



EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051	
Serial Number: 4898183		Date: 11/20/04	
Customer: Intermec Technologies Corporation		Temperature: 70	
Attendees: None		Humidity: 36%	
Cust. Ref. No.:		Barometric Pressure: 30.18	
Tested by: Holly Ashkannejhad		Power: 120VAC, 60Hz	Job Site: EV01

TEST SPECIFICATIONS	
Specification: FCC 15.247(d) Spurious Radiated Emissions	Year: 2004
Method: ANSI C63.4	Year: 2003

SAMPLE CALCULATIONS
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

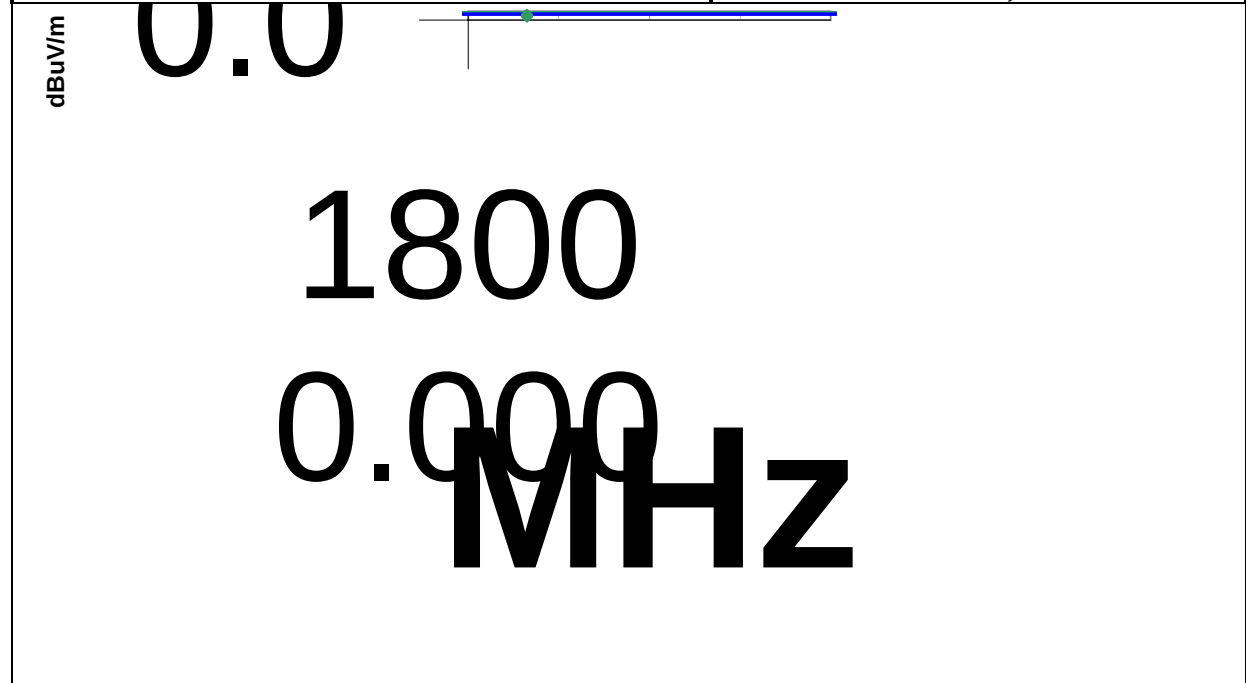
COMMENTS
Simultaneous Transmissions

EUT OPERATING MODES
Bluetooth 11 on PW40. Bluetooth 11, 802.11b 1, CDMA 1153 (PCS) on 700C

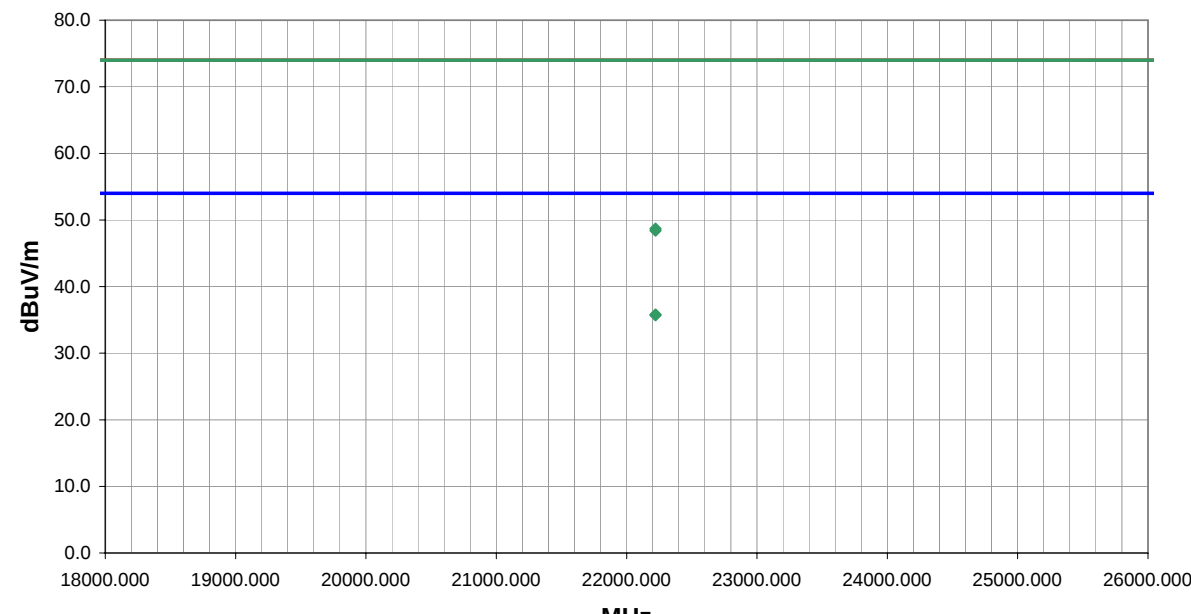
DEVIATIONS FROM TEST STANDARD

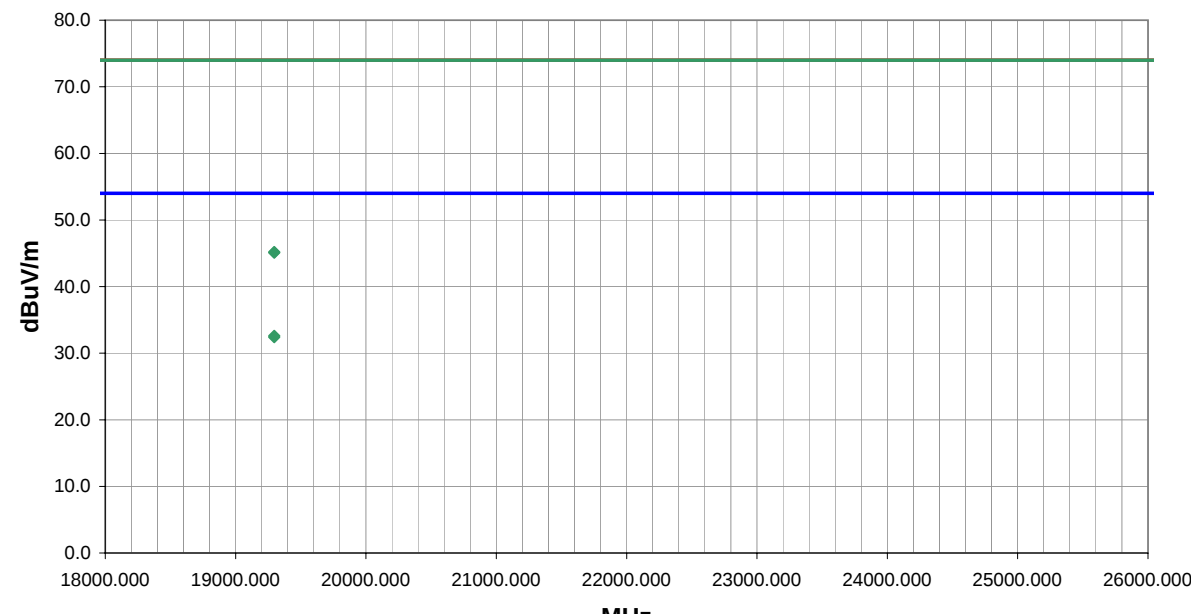
RESULTS	Run #
Pass	27

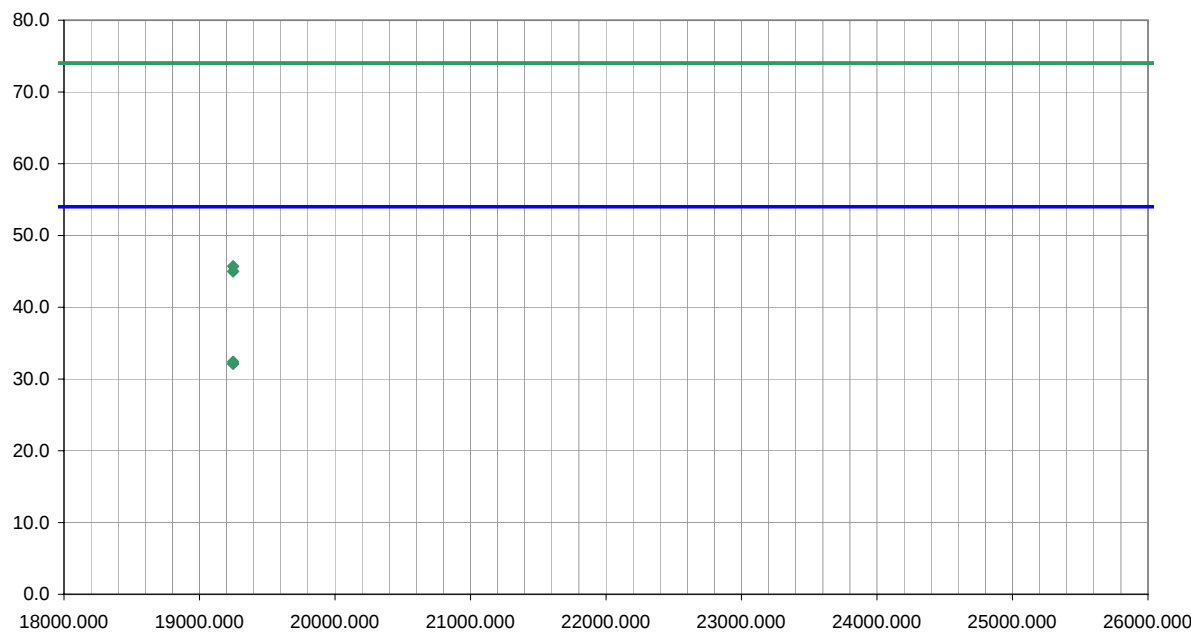
Other	
Tested By:	

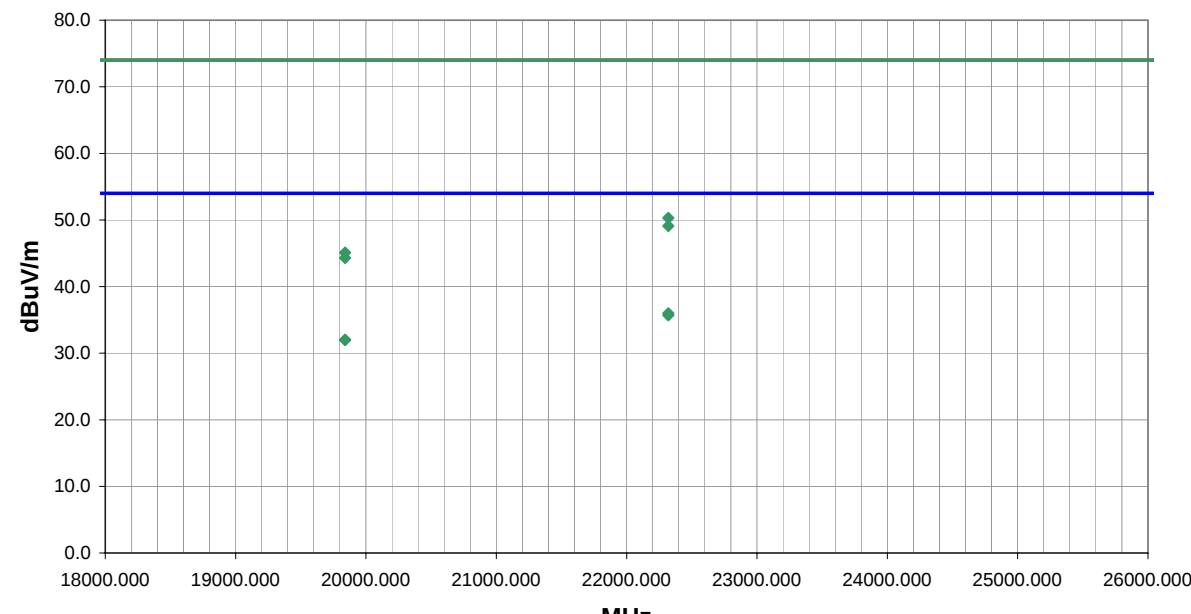


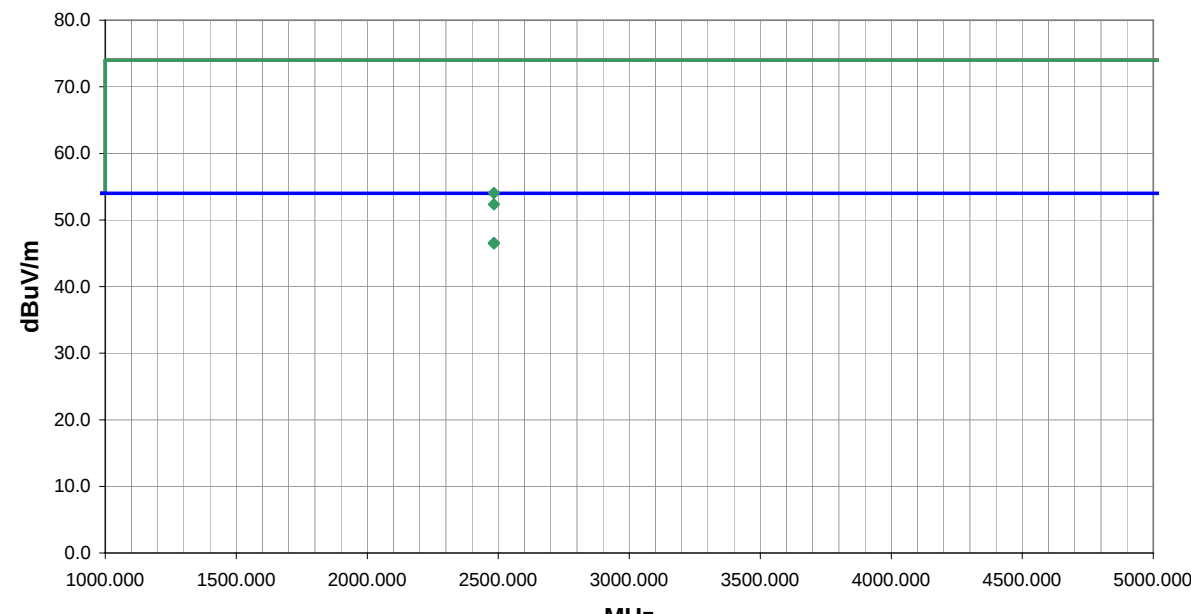
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
19296.000	24.9	8.0	342.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.9	54.0	-21.1
19296.000	24.8	8.0	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.8	54.0	-21.2
19296.000	38.3	8.0	342.0	1.0	3.0	0.0	I-High Horr	PK	0.0	46.3	74.0	-27.7
19296.000	38.2	8.0	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	46.2	74.0	-27.8

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898183						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: None						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmissions															
EUT OPERATING MODES															
Bluetooth 68 on PW40. Bluetooth 68, 802.11b 11, CDMA 35 (PCS) on 700C															
DEVIATIONS FROM TEST STANDARD															
RESULTS															
Pass										Run #					
										28					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
22221.000	26.8	9.0	-3.0	1.1	3.0	0.0	I-High Horr	AV	0.0	35.8	54.0	-18.2			
22221.000	26.7	9.0	173.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.7	54.0	-18.3			
22221.000	39.7	9.0	173.0	1.0	3.0	0.0	V-High Horr	PK	0.0	48.7	74.0	-25.3			
22221.000	39.4	9.0	-3.0	1.1	3.0	0.0	I-High Horr	PK	0.0	48.4	74.0	-25.6			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898183						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: None						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmissions															
EUT OPERATING MODES															
Bluetooth 11 on PW40. Bluetooth 11, 802.11b 1, CDMA 467 (cellular) on 700C															
DEVIATIONS FROM TEST STANDARD															
RESULTS															
Pass										Run #					
										29					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19296.000	24.6	8.0	362.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.6	54.0	-21.4			
19296.000	24.4	8.0	-1.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.4	54.0	-21.6			
19296.000	37.2	8.0	362.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.2	74.0	-28.8			
19296.000	37.1	8.0	-1.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.1	74.0	-28.9			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898183										Date: 11/20/04					
Customer: Intermec Technologies Corporation										Temperature: 70					
Attendees: None										Humidity: 36%					
Cust. Ref. No.:										Barometric Pressure: 30.18					
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01							
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmissions															
EUT OPERATING MODES															
Bluetooth 5 on PW40. Bluetooth 5, 802.11b 1, CDMA 395 (cellular) on 700C															
DEVIATIONS FROM TEST STANDARD															
RESULTS															
Pass												Run #		30	
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19248.000	24.6	7.8	2.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.4	54.0	-21.6			
19248.000	24.3	7.8	362.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.1	54.0	-21.9			
19248.000	37.9	7.8	362.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.7	74.0	-28.3			
19248.000	37.2	7.8	2.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.0	74.0	-29.0			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898183						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: None						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous Transmissions															
EUT OPERATING MODES															
Bluetooth 79 on PW40. Bluetooth 79, 802.11b 11, CDMA 55 (cellular) on 700C															
DEVIATIONS FROM TEST STANDARD															
RESULTS															
Pass										Run #					
										31					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
22320.000	26.8	9.2	-3.0	1.0	3.0	0.0	v-High Horr	AV	0.0	36.0	54.0	-18.0			
22320.000	26.5	9.2	362.0	1.0	3.0	0.0	l-High Horr	AV	0.0	35.7	54.0	-18.3			
19840.000	23.1	8.9	0.0	1.0	3.0	0.0	l-High Horr	AV	0.0	32.0	54.0	-22.0			
19840.000	23.1	8.9	362.0	1.1	3.0	0.0	v-High Horr	AV	0.0	32.0	54.0	-22.0			
22320.000	41.1	9.2	362.0	1.0	3.0	0.0	l-High Horr	PK	0.0	50.3	74.0	-23.7			
22320.000	39.9	9.2	-3.0	1.0	3.0	0.0	v-High Horr	PK	0.0	49.1	74.0	-24.9			
19840.000	36.2	8.9	362.0	1.1	3.0	0.0	v-High Horr	PK	0.0	45.1	74.0	-28.9			
19840.000	35.4	8.9	0.0	1.0	3.0	0.0	l-High Horr	PK	0.0	44.3	74.0	-29.7			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 62 on PW40. Bluetooth 62, 802.11b 11, CDMA 1153 (PCS) on 700C.															
DEVIATIONS FROM TEST STANDARD															
RESULTS															
Pass										Run #					
										32					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2483.500	26.7	29.4	212.0	1.1	1.0	0.0	V-Horn	AV	-9.5	46.6	54.0	-7.4			
2483.500	26.6	29.4	138.0	1.0	1.0	0.0	H-Horn	AV	-9.5	46.5	54.0	-7.5			
2483.500	34.2	29.4	212.0	1.1	1.0	0.0	V-Horn	PK	-9.5	54.1	74.0	-19.9			
2483.500	32.5	29.4	138.0	1.0	1.0	0.0	H-Horn	PK	-9.5	52.4	74.0	-21.6			

EUT:	PW40 Bluetooth Enabled Printer	Work Order:	ITRM0051
Serial Number:	4898184	Date:	11/20/04
Customer:	Intermec Technologies Corporation	Temperature:	70
Attendees:	none	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure	30.18
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS			
Specification:	FCC 15.247(d) Spurious Radiated Emissions	Year:	2004
Method:	ANSI C63.4	Year:	2003

SAMPLE CALCULATIONS			
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation			
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator			

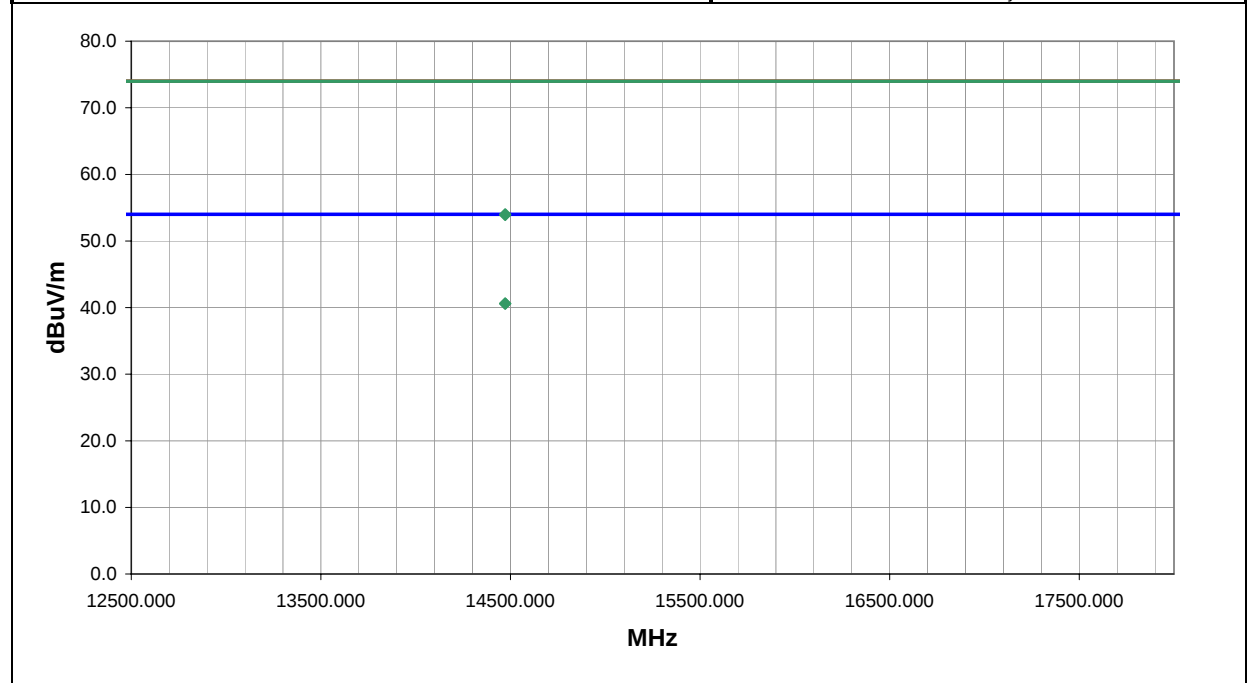
COMMENTS			
Simultaneous transmission			

EUT OPERATING MODES			
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, CDMA 467 (cellular) in 700C..			

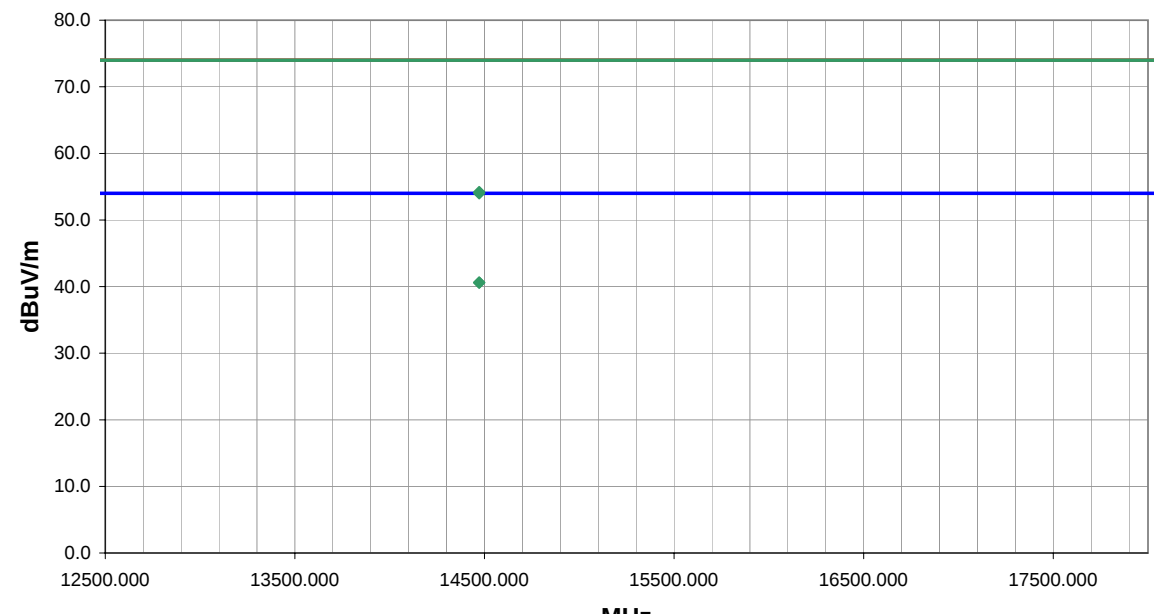
DEVIATIONS FROM TEST STANDARD			
No deviations.			

RESULTS			Run #
Pass			33

Other	 Tested By: _____
-------	--



Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
14472.000	26.8	13.8	210.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.6	54.0	-13.4
14472.000	26.8	13.8	192.0	1.2	3.0	0.0	V-Horn	AV	0.0	40.6	54.0	-13.4
14472.000	40.2	13.8	210.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.0	74.0	-20.0
14472.000	40.1	13.8	192.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.9	74.0	-20.1

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: none						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, CDMA 1 (PCS) in 700C..															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										34					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
14472.000	26.8	13.8	69.0	1.6	3.0	0.0	V-Horn	AV	0.0	40.6	54.0	-13.4			
14472.000	26.8	13.8	340.0	1.3	3.0	0.0	H-Horn	AV	0.0	40.6	54.0	-13.4			
14472.000	40.4	13.8	69.0	1.6	3.0	0.0	V-Horn	PK	0.0	54.2	74.0	-19.8			
14472.000	40.2	13.8	340.0	1.3	3.0	0.0	H-Horn	PK	0.0	54.0	74.0	-20.0			

EUT:	PW40 Bluetooth Enabled Printer	Work Order:	ITRM0051
Serial Number:	4898184	Date:	11/20/04
Customer:	Intermec Technologies Corporation	Temperature:	70
Attendees:	none	Humidity:	36%
Cust. Ref. No.:		Barometric Pressure	30.18
Tested by:	Holly Ashkannejhad	Power:	120VAC/60Hz
		Job Site:	EV01

TEST SPECIFICATIONS			
Specification:	FCC 15.247(d) Spurious Radiated Emissions	Year:	2004
Method:	ANSI C63.4	Year:	2003

SAMPLE CALCULATIONS			
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation			
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator			

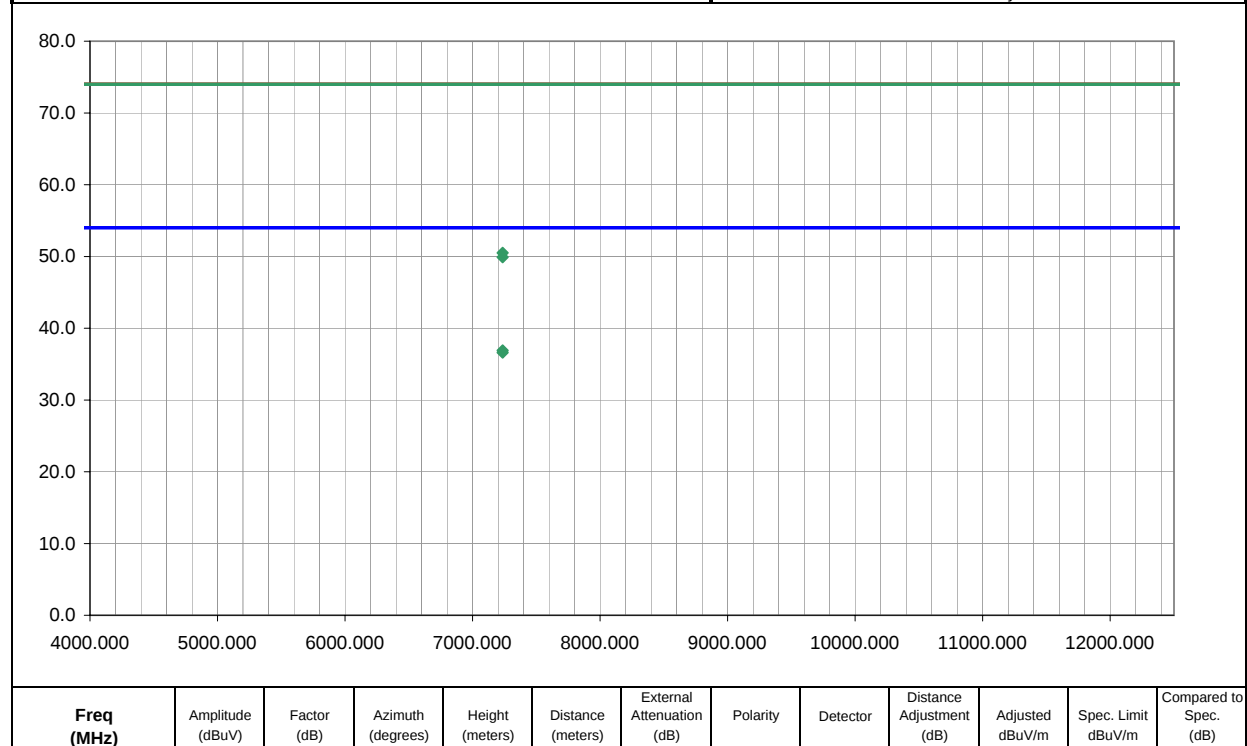
COMMENTS			
Simultaneous transmission			

EUT OPERATING MODES			
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, CDMA 1 (PCS) in 700C..			

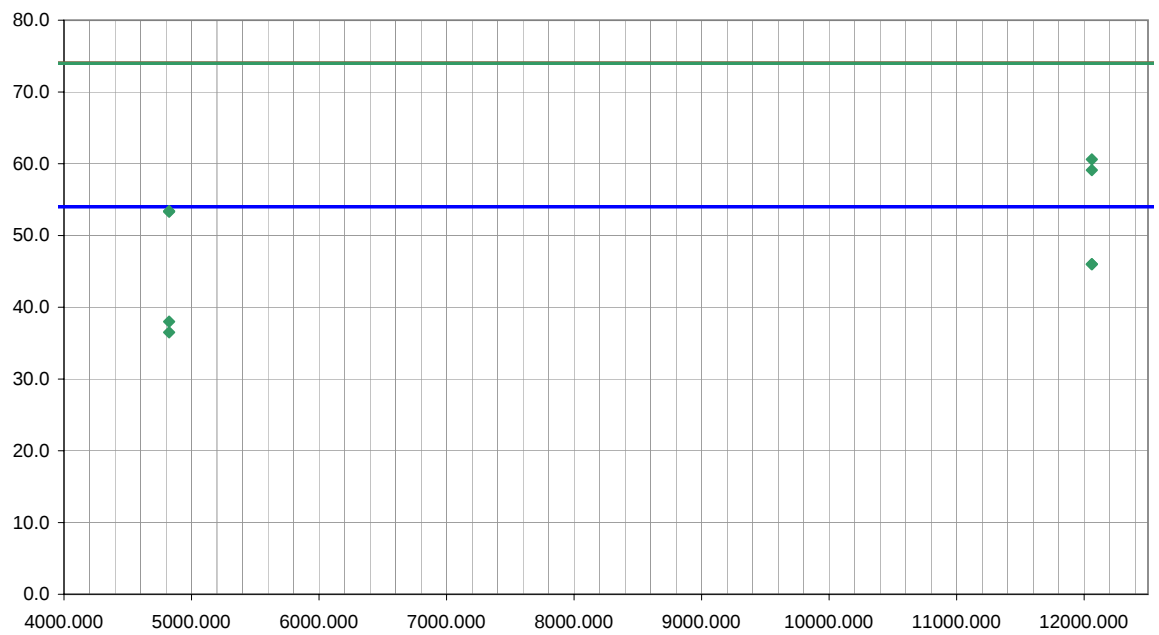
DEVIATIONS FROM TEST STANDARD			
No deviations.			

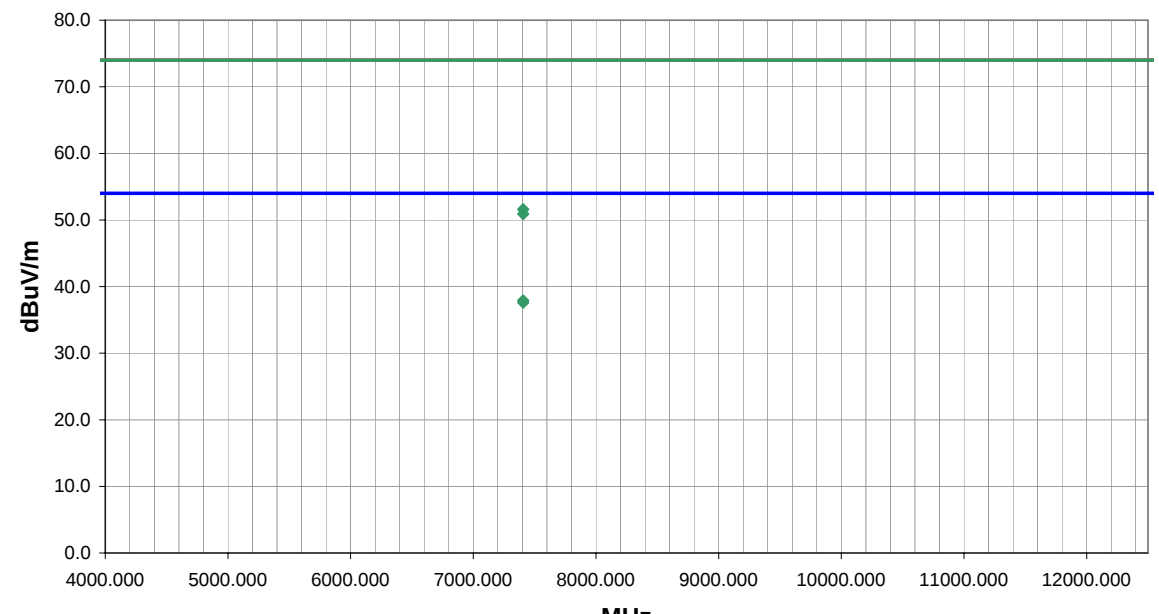
RESULTS		Run #
Pass		35

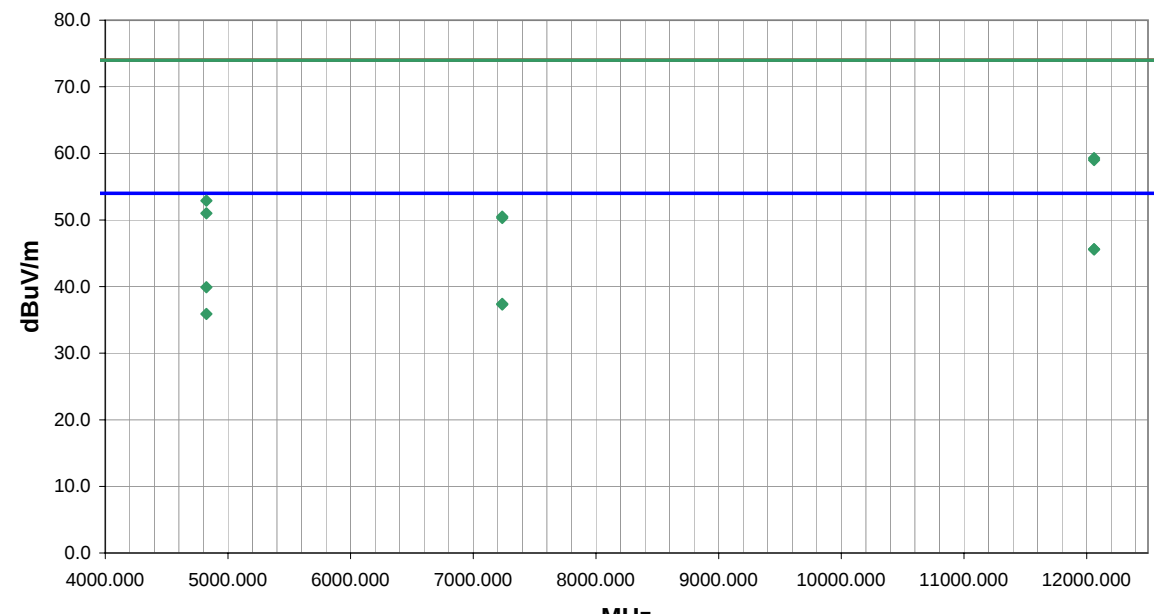
Other	 Tested By:
-------	---

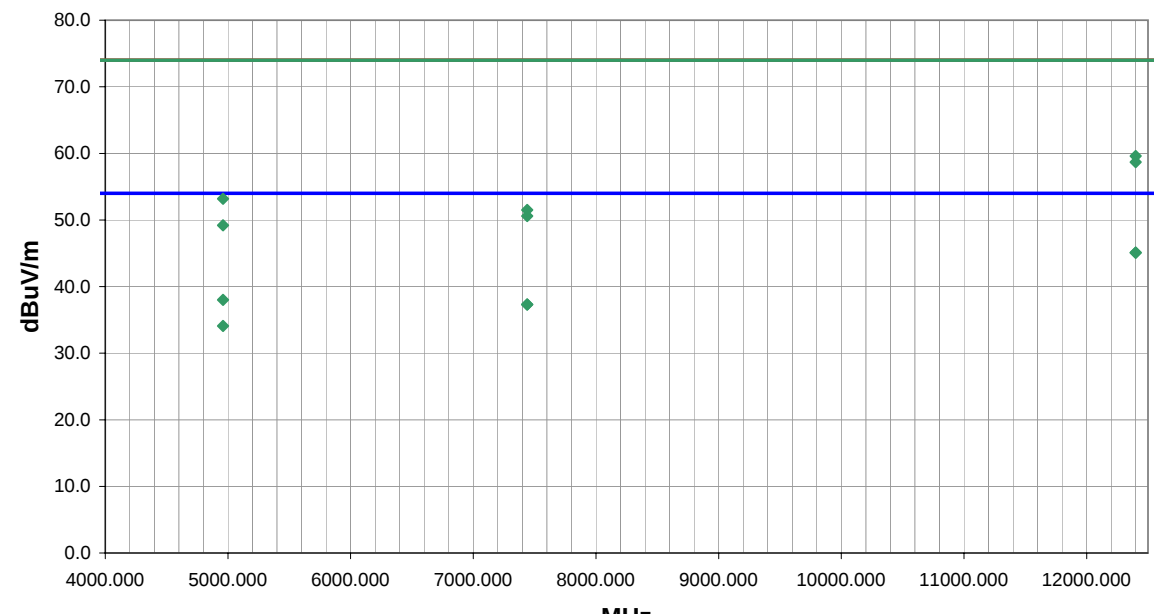


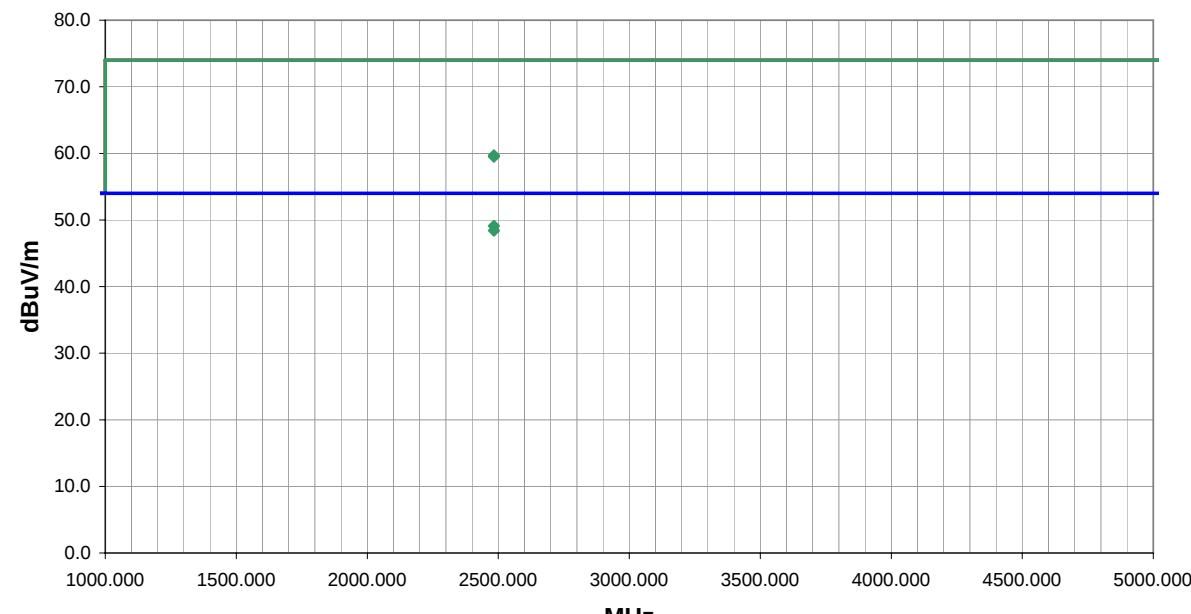
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
7236.000	26.8	10.1	208.0	1.7	3.0	0.0	V-Horn	AV	0.0	36.9	54.0	-17.1
7236.000	26.5	10.1	173.0	1.3	3.0	0.0	H-Horn	AV	0.0	36.6	54.0	-17.4
7236.000	40.4	10.1	208.0	1.7	3.0	0.0	V-Horn	PK	0.0	50.5	74.0	-23.5
7236.000	39.8	10.1	173.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.9	74.0	-24.1

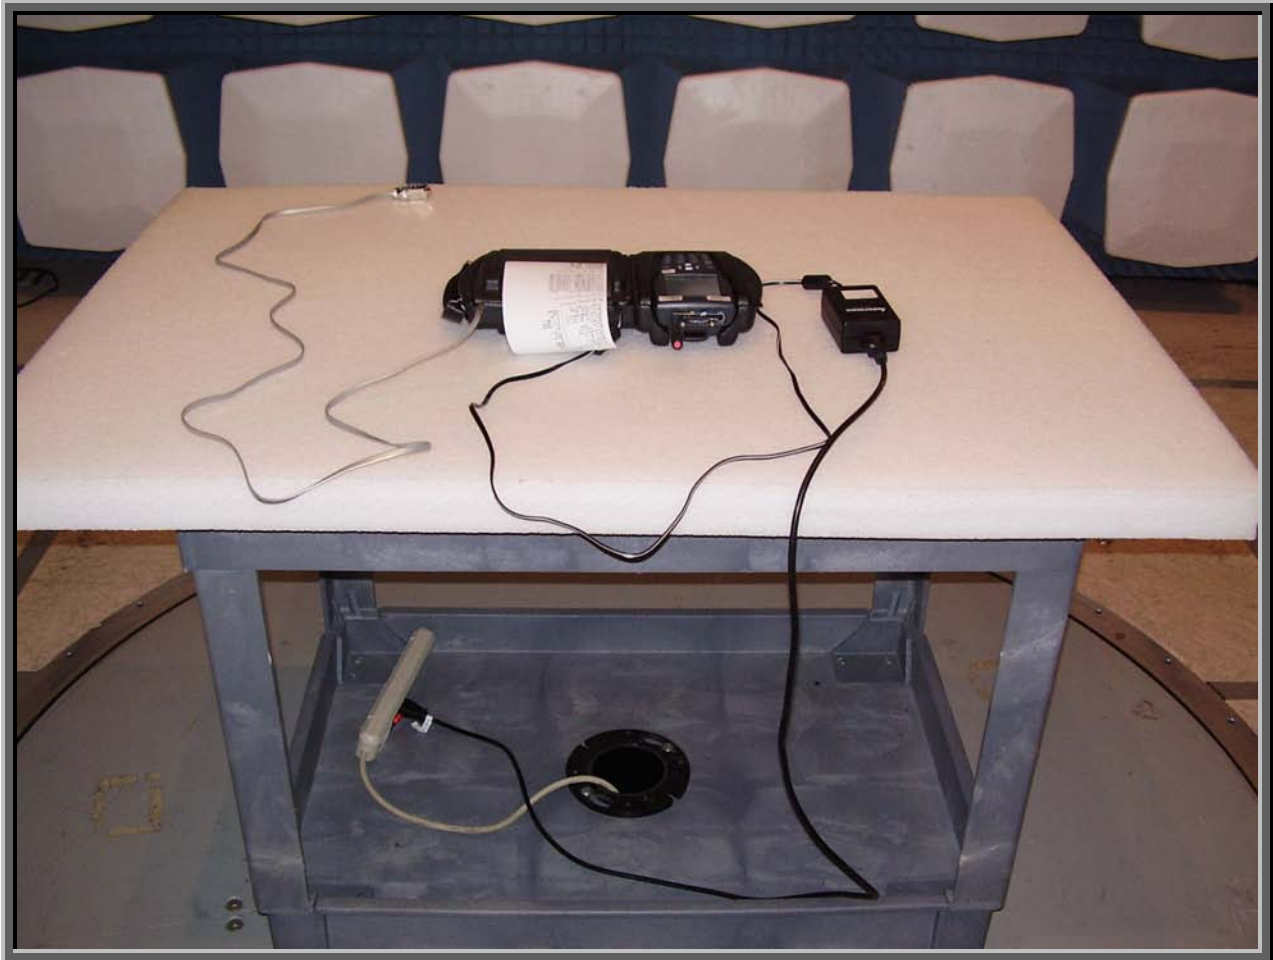
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: none						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, CDMA 1153 (PCS) in 700C..															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										36					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12060.000	25.8	20.2	67.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.0	54.0	-8.0			
12060.000	25.8	20.2	239.0	4.0	3.0	0.0	H-Horn	AV	0.0	46.0	54.0	-8.0			
12060.000	40.4	20.2	239.0	4.0	3.0	0.0	H-Horn	PK	0.0	60.6	74.0	-13.4			
12060.000	38.9	20.2	67.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.1	74.0	-14.9			
4824.000	34.7	3.3	181.0	1.3	3.0	0.0	H-Horn	AV	0.0	38.0	54.0	-16.0			
4824.000	33.2	3.3	236.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.5	54.0	-17.5			
4824.000	50.1	3.3	236.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.4	74.0	-20.6			
4824.000	50.0	3.3	181.0	1.3	3.0	0.0	H-Horn	PK	0.0	53.3	74.0	-20.7			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: none						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 68 in PW40. Bluetooth 68, 802.11b 11, CDMA 35 (PCS) in 700C..															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										37					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
7407.000	26.8	11.1	152.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.9	54.0	-16.1			
7407.000	26.5	11.1	80.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.6	54.0	-16.4			
7407.000	40.5	11.1	152.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.6	74.0	-22.4			
7407.000	39.8	11.1	80.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.9	74.0	-23.1			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898184										Date: 11/20/04					
Customer: Intermec Technologies Corporation										Temperature: 70					
Attendees: none										Humidity: 36%					
Cust. Ref. No.:										Barometric Pressure: 30.18					
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, CDMA 467 (cellular) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS														Run #	
Pass														38	
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12060.000	25.4	20.2	37.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.6	54.0	-8.4			
12060.000	25.4	20.2	164.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.6	54.0	-8.4			
4824.000	36.6	3.3	237.0	1.2	3.0	0.0	V-Horn	AV	0.0	39.9	54.0	-14.1			
12060.000	39.1	20.2	164.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.3	74.0	-14.7			
12060.000	38.8	20.2	37.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.0	74.0	-15.0			
7236.000	27.3	10.1	43.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.4	54.0	-16.6			
7236.000	27.2	10.1	160.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.3	54.0	-16.7			
4824.000	32.6	3.3	147.0	1.2	3.0	0.0	H-Horn	AV	0.0	35.9	54.0	-18.1			
4824.000	49.6	3.3	237.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.9	74.0	-21.1			
4824.000	47.7	3.3	147.0	1.2	3.0	0.0	H-Horn	PK	0.0	51.0	74.0	-23.0			
7236.000	40.4	10.1	160.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.5	74.0	-23.5			
7236.000	40.2	10.1	43.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.3	74.0	-23.7			

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV df4.4 10/22/2004								
EUT: PW40 Bluetooth Enabled Printer			Work Order: ITRM0051									
Serial Number: 4898184			Date: 11/20/04									
Customer: Intermec Technologies Corporation			Temperature: 70									
Attendees: none			Humidity: 36%									
Cust. Ref. No.:			Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions			Year: 2004									
Method: ANSI C63.4			Year: 2003									
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Simultaneous transmission												
EUT OPERATING MODES												
Bluetooth 79 in PW40. Bluetooth 79, 802.11b 11, CDMA 55 (cellular) in 700C.												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS					Run #							
Pass					39							
Other												
					 Tested By:							
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12400.000	24.3	20.8	193.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.1	54.0	-8.9
12400.000	24.3	20.8	17.0	2.6	3.0	0.0	H-Horn	AV	0.0	45.1	54.0	-8.9
12400.000	38.8	20.8	193.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.6	74.0	-14.4
12400.000	37.9	20.8	17.0	2.6	3.0	0.0	H-Horn	PK	0.0	58.7	74.0	-15.3
4960.000	34.4	3.6	230.0	1.2	3.0	0.0	V-Horn	AV	0.0	38.0	54.0	-16.0
7440.000	26.2	11.1	250.0	2.3	3.0	0.0	V-Horn	AV	0.0	37.3	54.0	-16.7
7440.000	26.2	11.1	145.0	2.7	3.0	0.0	H-Horn	AV	0.0	37.3	54.0	-16.7
4960.000	30.5	3.6	96.0	2.3	3.0	0.0	H-Horn	AV	0.0	34.1	54.0	-19.9
4960.000	49.6	3.6	230.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.2	74.0	-20.8
7440.000	40.4	11.1	250.0	2.3	3.0	0.0	V-Horn	PK	0.0	51.5	74.0	-22.5
7440.000	39.5	11.1	145.0	2.7	3.0	0.0	H-Horn	PK	0.0	50.6	74.0	-23.4
4960.000	45.6	3.6	96.0	2.3	3.0	0.0	H-Horn	PK	0.0	49.2	74.0	-24.8

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/20/04									
Customer: Intermec Technologies Corporation						Temperature: 70									
Attendees: none						Humidity: 36%									
Cust. Ref. No.:						Barometric Pressure: 30.18									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 79 in PW40. Bluetooth 79, 802.11b 11, CDMA 54 (cellular) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										40					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2483.500	31.3	-2.2	361.0	1.2	3.0	20.0	H-Horn	AV	0.0	49.1	54.0	-4.9			
2483.500	30.6	-2.2	33.0	1.2	3.0	20.0	V-Horn	AV	0.0	48.4	54.0	-5.6			
2483.500	41.9	-2.2	361.0	1.2	3.0	20.0	H-Horn	PK	0.0	59.7	74.0	-14.3			
2483.500	41.7	-2.2	33.0	1.2	3.0	20.0	V-Horn	PK	0.0	59.5	74.0	-14.5			







Justification

The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 730 and Intermec's Bluetooth enabled printer, Model PW40. The 730 contains an 802.11b radio (FCC ID: EHA-802CF13), and a Bluetooth radio (FCC ID: EHABTM210). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 730 can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the 802.11(b) and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below:

Channels in Specified Band Investigated:

802.11(b):	11
Bluetooth:	80

Operating Modes Investigated:**Bluetooth Radio in PW40 with 730 in cradle:**

Simultaneous transmission of Bluetooth Channel 80 and 802.11(b) Channel 11

Data Rates Investigated:

Maximum

Antennas Investigated:

802.11(b):	802CFI3 integral antenna (internal to 730)
Bluetooth:	ABTM210 (internal to 730)
Bluetooth:	Integral PCB trace, (internal to PW40)

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	26 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Blue Test PrismTestCE	Version	Unknown 2.0
Description			
The system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Bluetooth Radio in Printer	Intermec Technologies Corporation	8520-00080	Unknown
EUT – Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
AC Adapter	Ault Inc.	PW160	Unknown
Handheld Computer with Bluetooth and 802.11(b)	Intermec Technologies Corporation	730	29810400060
Bluetooth Radio in 730	Intermec Technologies Corporation	ABTM210	N/A
802.11(b) Radio in 730	Intermec Technologies Corporation	802CFI3	N/A

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Remote laptop	Dell	TS30G1	Unknown
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	12 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

Test Description

Requirement: Per 15.247(d), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 15.205, is measured. The peak level must comply with the limits specified in 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 730 and Intermec's Bluetooth enabled printer, Model PW40. The 730 contains an 802.11b radio (FCC ID: EHA-802CF13), and a Bluetooth radio (FCC ID: EHABTM210). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 730 can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission:

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:


Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.

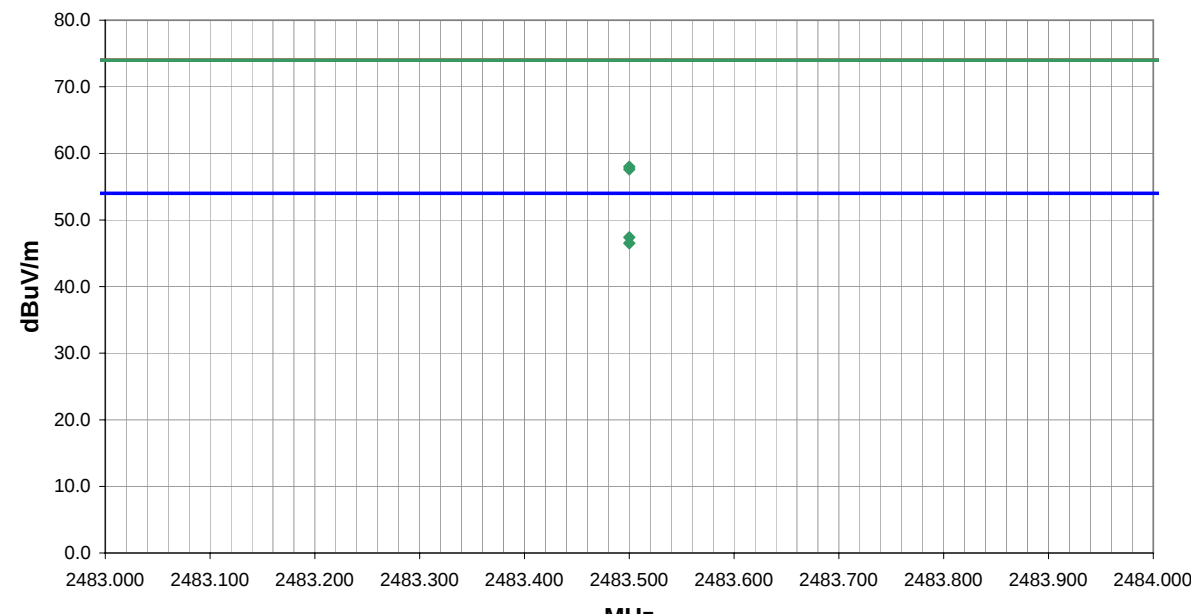
All possible combinations of harmonic emissions from the 802.11(b) and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 26 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.

All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Completed by:



NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: ITRM0051					
Serial Number: 4898184										Date: 11/19/04					
Customer: Intermec Technologies Corporation										Temperature: 70					
Attendees: none										Humidity: 36%					
Cust. Ref. No.:										Barometric Pressure: 30.18					
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 80 in PW40. Bluetooth 80 and 802.11b 11 in 730.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS														Run #	
Pass														25	
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2483.500	29.6	-2.2	99.0	1.1	3.0	20.0	H-Horn	AV	0.0	47.4	54.0	-6.6			
2483.500	28.7	-2.2	322.0	1.1	3.0	20.0	V-Horn	AV	0.0	46.5	54.0	-7.5			
2483.500	40.2	-2.2	322.0	1.1	3.0	20.0	V-Horn	PK	0.0	58.0	74.0	-16.0			
2483.500	39.8	-2.2	99.0	1.1	3.0	20.0	H-Horn	PK	0.0	57.6	74.0	-16.4			

NORTHWEST		REV										
EMC		df4.4										
10/22/2004												
EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051										
Serial Number: 4898184		Date: 11/19/04										
Customer: Intermec Technologies Corporation		Temperature: 70										
Attendees: none		Humidity: 36%										
Cust. Ref. No.:		Barometric Pressure: 30.18										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz										
		Job Site: EV01										
TEST SPECIFICATIONS												
Specification: FCC 15.247(d) Spurious Radiated Emissions		Year: 2004										
Method: ANSI C63.4		Year: 2003										
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Simultaneous transmission												
EUT OPERATING MODES												
Bluetooth 80 in PW40. Bluetooth 80 and 802.11b 11 in 730.												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS		Run #										
Pass		26										
Other												
		Holly Ashkannejhad Tested By:										
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
12310.000	24.8	20.6	124.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.4	54.0	-8.6
12310.000	24.8	20.6	258.0	3.6	3.0	0.0	V-Horn	AV	0.0	45.4	54.0	-8.6
12400.000	24.5	20.8	272.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.3	54.0	-8.7
12400.000	24.4	20.8	67.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.2	54.0	-8.8
12310.000	38.5	20.6	258.0	3.6	3.0	0.0	V-Horn	PK	0.0	59.1	74.0	-14.9
12310.000	38.2	20.6	124.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.8	74.0	-15.2
12400.000	37.7	20.8	272.0	1.2	3.0	0.0	V-Horn	PK	0.0	58.5	74.0	-15.5
12400.000	37.7	20.8	67.0	1.3	3.0	0.0	H-Horn	PK	0.0	58.5	74.0	-15.5
7386.000	26.7	10.8	46.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.5	54.0	-16.5
7440.000	26.4	11.1	50.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.5	54.0	-16.5
7440.000	26.4	11.1	28.0	2.0	3.0	0.0	H-Horn	AV	0.0	37.5	54.0	-16.5
7386.000	26.6	10.8	77.0	1.9	3.0	0.0	V-Horn	AV	0.0	37.4	54.0	-16.6
4959.982	32.3	3.6	227.0	1.4	3.0	0.0	V-Horn	AV	0.0	35.9	54.0	-18.1
4924.000	30.9	3.5	205.0	1.2	3.0	0.0	V-Horn	AV	0.0	34.4	54.0	-19.6
4959.982	30.6	3.6	95.0	2.2	3.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8
4959.982	49.6	3.6	227.0	1.4	3.0	0.0	V-Horn	PK	0.0	53.2	74.0	-20.8
7440.000	40.1	11.1	28.0	2.0	3.0	0.0	H-Horn	PK	0.0	51.2	74.0	-22.8
7386.000	40.2	10.8	46.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.0	74.0	-23.0
7386.000	40.1	10.8	77.0	1.9	3.0	0.0	V-Horn	PK	0.0	50.9	74.0	-23.1
7440.000	39.7	11.1	50.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.8	74.0	-23.2
4959.982	47.0	3.6	95.0	2.2	3.0	0.0	H-Horn	PK	0.0	50.6	74.0	-23.4

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
4924.000	24.6	3.5	323.0	1.3	3.0	0.0	H-Horn	AV	0.0	28.1	54.0	-25.9
4924.000	39.0	3.5	205.0	1.2	3.0	0.0	V-Horn	PK	0.0	42.5	74.0	-31.5
4924.000	38.4	3.5	323.0	1.3	3.0	0.0	H-Horn	PK	0.0	41.9	74.0	-32.1





Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

High
Mid
Low

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	30 MHz	Stop Frequency	26 GHz
------------------------	--------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	BlueTest	Version	Unknown
Description			
The system was tested using special software developed to test all functions of the device during the test including changing the channel.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
Power Adapter	Ault Inc.	PW160	Unknown
Laptop	Dell	TS30G1	Unknown
AC Adapter	Dell	TSA 8	00099500-12961-75P-1959

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop
DC Leads	No	1.2	No	Laptop	AC Adapter
AC Power	No	1.6	No	AC Adapter	AC Mains
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo


Test Description

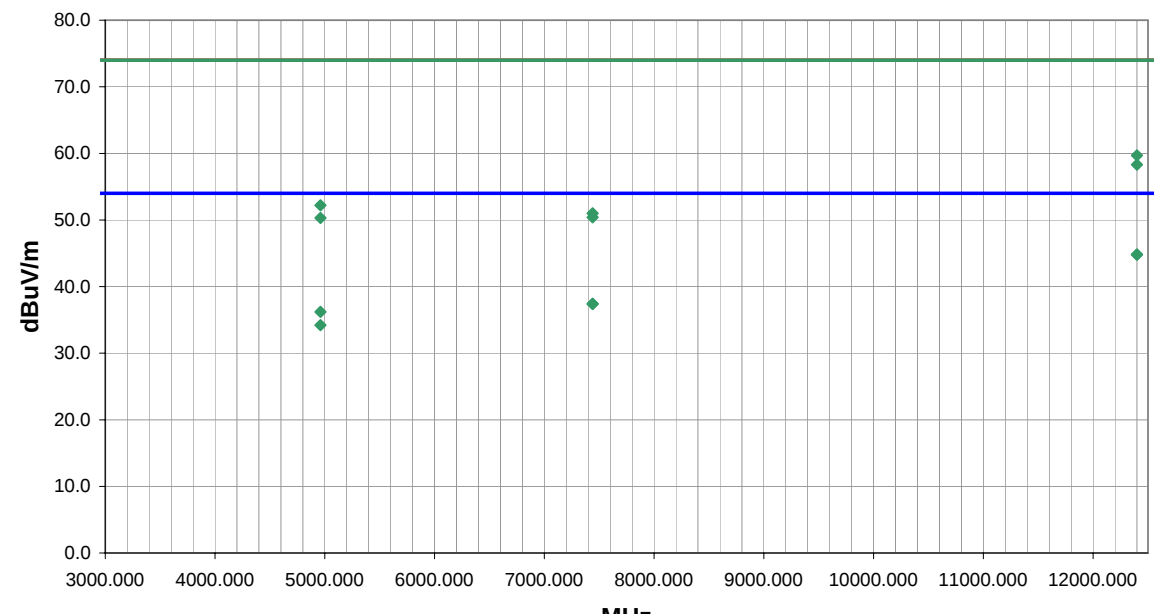
Requirement: The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

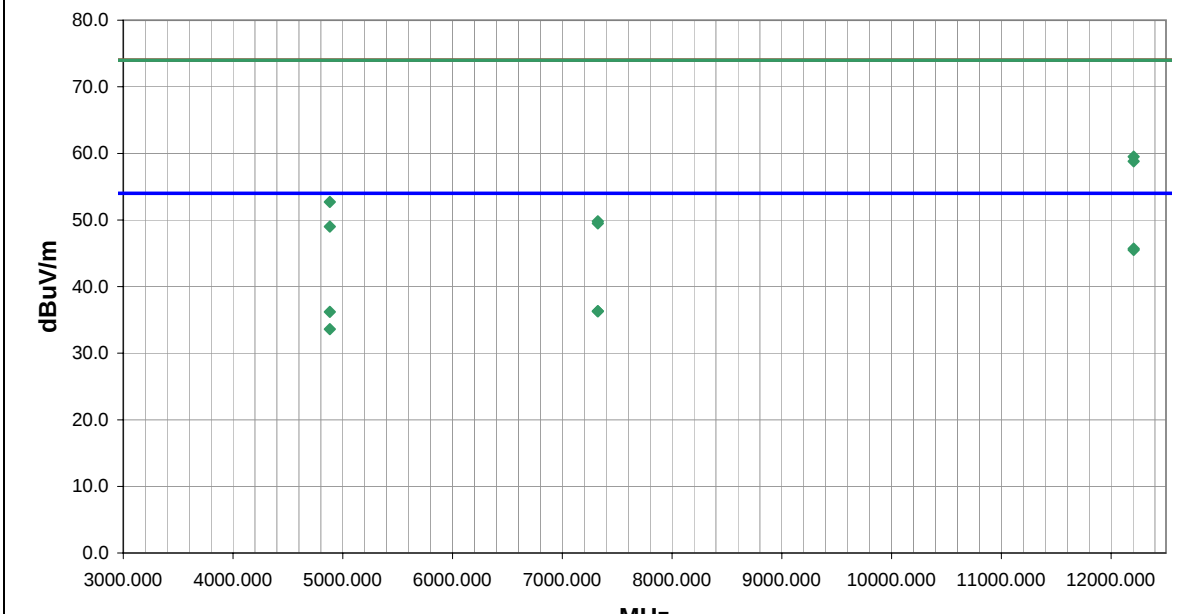
Configuration: The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

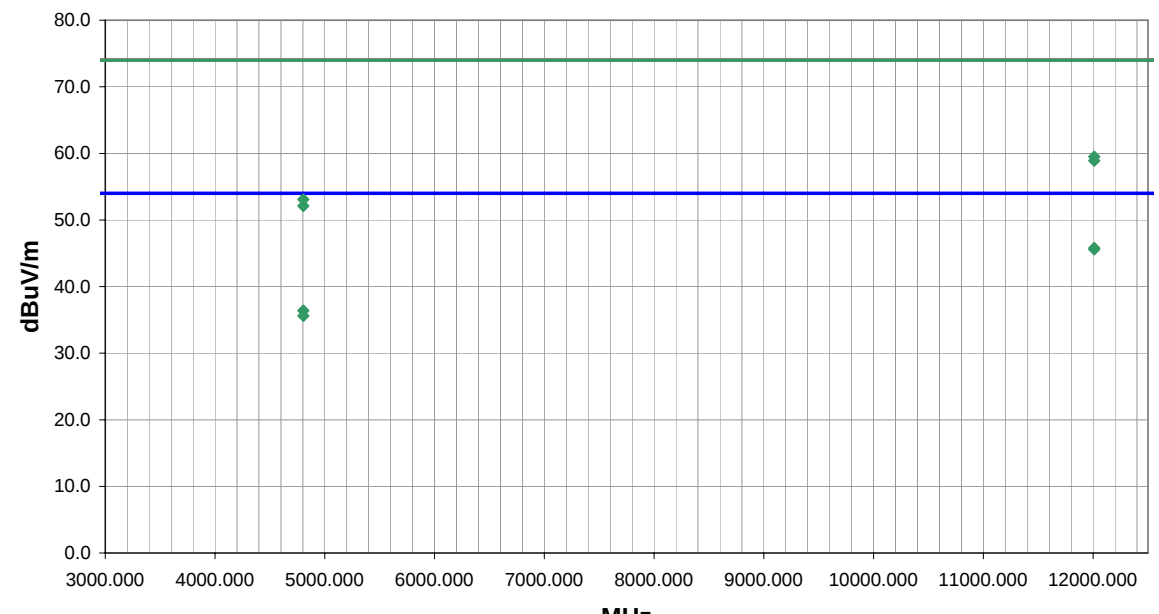
Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

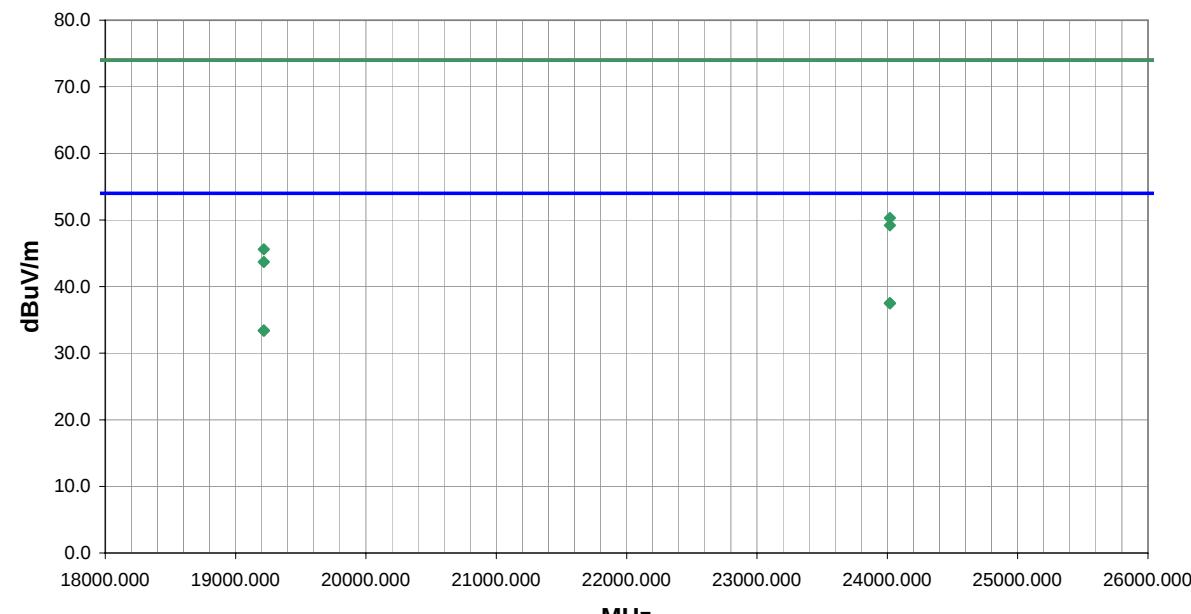
Completed by:

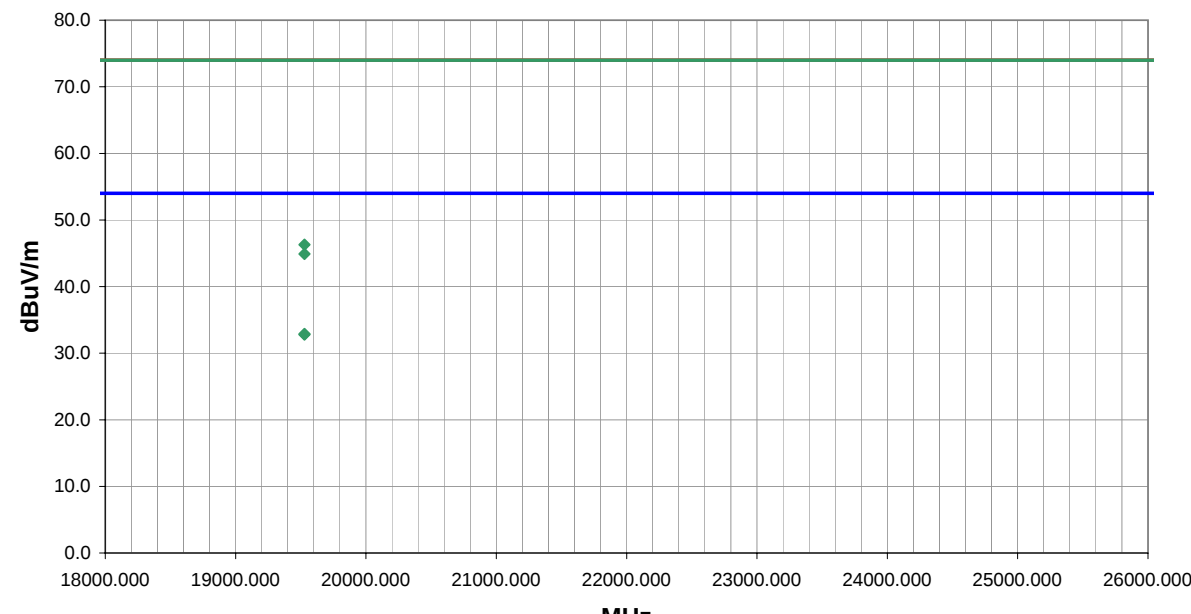


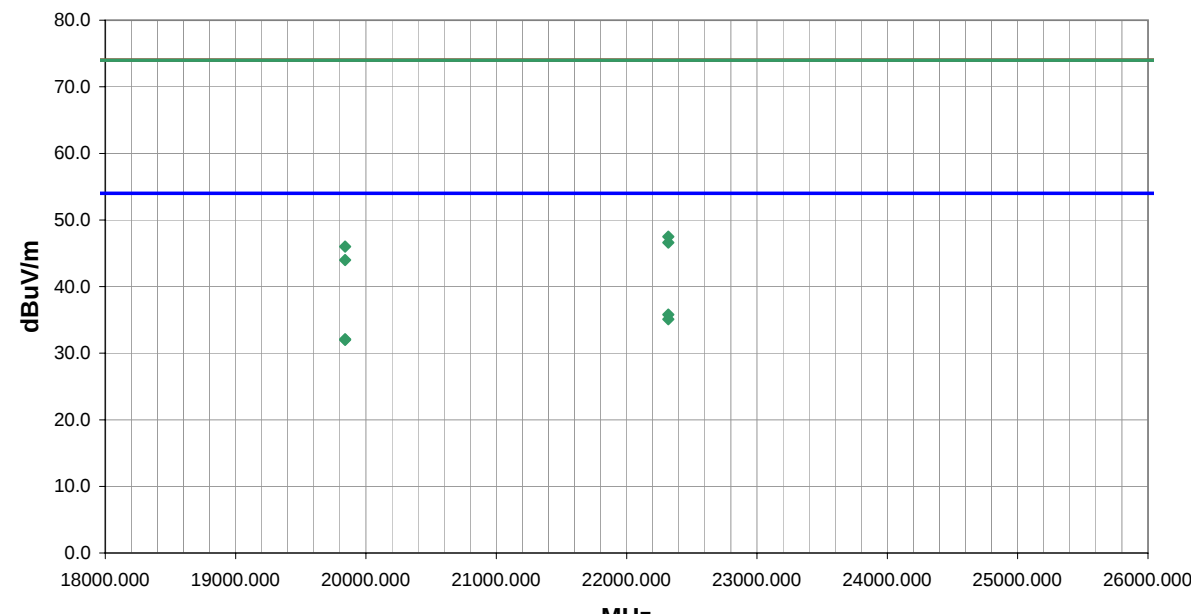
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: JTRM0051					
Serial Number: 4898184										Date: 11/06/04					
Customer: Intermec Technologies Corporation										Temperature: 64					
Attendees: none										Humidity: 35%					
Cust. Ref. No.:										Barometric Pressure: 30.19					
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, high channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												1			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12400.000	24.0	20.8	292.0	1.9	3.0	0.0	V-Horn	AV	0.0	44.8	54.0	-9.2			
12400.000	24.0	20.8	126.0	3.2	3.0	0.0	H-Horn	AV	0.0	44.8	54.0	-9.2			
12400.000	38.9	20.8	292.0	1.9	3.0	0.0	V-Horn	PK	0.0	59.7	74.0	-14.3			
12400.000	37.5	20.8	126.0	3.2	3.0	0.0	H-Horn	PK	0.0	58.3	74.0	-15.7			
7440.000	26.3	11.1	277.0	1.2	3.0	0.0	V-Horn	AV	0.0	37.4	54.0	-16.6			
7440.000	26.3	11.1	252.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.4	54.0	-16.6			
4959.972	32.6	3.6	235.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.2	54.0	-17.8			
4959.972	30.6	3.6	220.0	1.7	3.0	0.0	H-Horn	AV	0.0	34.2	54.0	-19.8			
4959.972	48.6	3.6	235.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.2	74.0	-21.8			
7440.000	39.9	11.1	277.0	1.2	3.0	0.0	V-Horn	PK	0.0	51.0	74.0	-23.0			
7440.000	39.3	11.1	252.0	1.3	3.0	0.0	H-Horn	PK	0.0	50.4	74.0	-23.6			
4959.972	46.7	3.6	220.0	1.7	3.0	0.0	H-Horn	PK	0.0	50.3	74.0	-23.7			

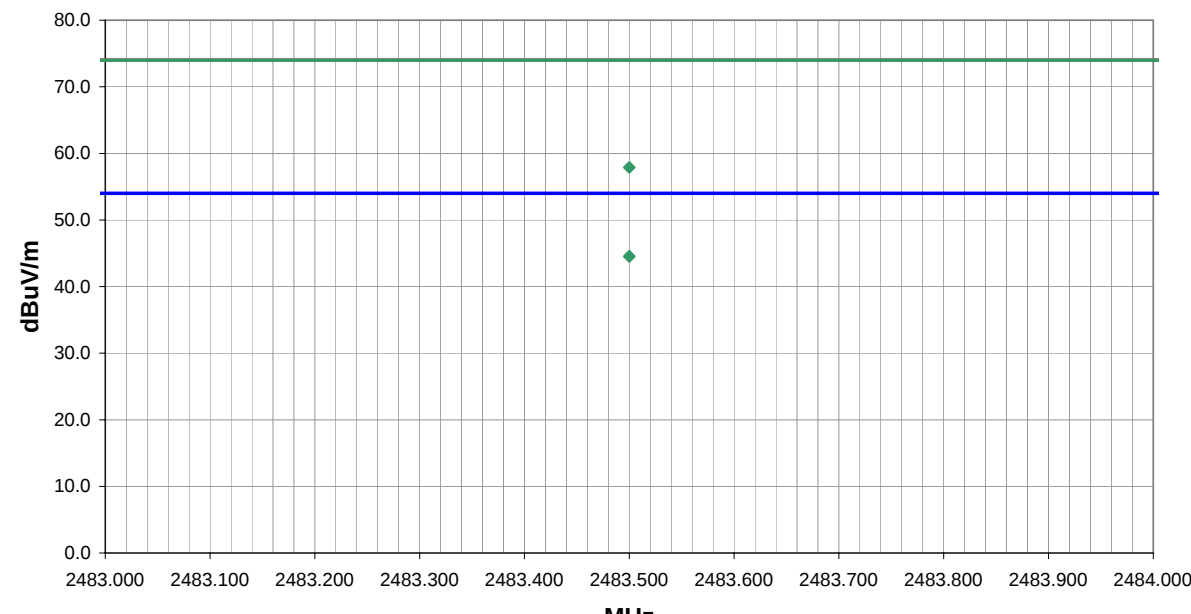
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/06/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, mid channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										2					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12205.000	25.3	20.4	271.0	1.2	3.0	0.0	V-Horn	AV	0.0	45.7	54.0	-8.3			
12205.000	25.1	20.4	211.0	2.8	3.0	0.0	H-Horn	AV	0.0	45.5	54.0	-8.5			
12205.000	39.1	20.4	271.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.5	74.0	-14.5			
12205.000	38.4	20.4	211.0	2.8	3.0	0.0	H-Horn	PK	0.0	58.8	74.0	-15.2			
7323.000	25.8	10.5	58.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.3	54.0	-17.7			
7323.000	25.8	10.5	44.0	1.3	3.0	0.0	H-Horn	AV	0.0	36.3	54.0	-17.7			
4882.000	32.6	3.6	219.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.2	54.0	-17.8			
4882.000	30.0	3.6	217.0	1.2	3.0	0.0	H-Horn	AV	0.0	33.6	54.0	-20.4			
4882.000	49.1	3.6	219.0	1.2	3.0	0.0	V-Horn	PK	0.0	52.7	74.0	-21.3			
7323.000	39.3	10.5	44.0	1.3	3.0	0.0	H-Horn	PK	0.0	49.8	74.0	-24.2			
7323.000	39.0	10.5	58.0	1.2	3.0	0.0	V-Horn	PK	0.0	49.5	74.0	-24.5			
4882.000	45.4	3.6	217.0	1.2	3.0	0.0	H-Horn	PK	0.0	49.0	74.0	-25.0			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/06/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, low channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										3					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12010.000	25.7	20.1	135.0	1.7	3.0	0.0	V-Horn	AV	0.0	45.8	54.0	-8.2			
12010.000	25.5	20.1	238.0	3.5	3.0	0.0	H-Horn	AV	0.0	45.6	54.0	-8.4			
12010.000	39.4	20.1	238.0	3.5	3.0	0.0	H-Horn	PK	0.0	59.5	74.0	-14.5			
12010.000	38.8	20.1	135.0	1.7	3.0	0.0	V-Horn	PK	0.0	58.9	74.0	-15.1			
4804.018	33.1	3.3	223.0	1.1	3.0	0.0	V-Horn	AV	0.0	36.4	54.0	-17.6			
4804.018	32.3	3.3	128.0	1.3	3.0	0.0	H-Horn	AV	0.0	35.6	54.0	-18.4			
4804.018	49.8	3.3	223.0	1.1	3.0	0.0	V-Horn	PK	0.0	53.1	74.0	-20.9			
4804.018	48.8	3.3	128.0	1.3	3.0	0.0	H-Horn	PK	0.0	52.1	74.0	-21.9			

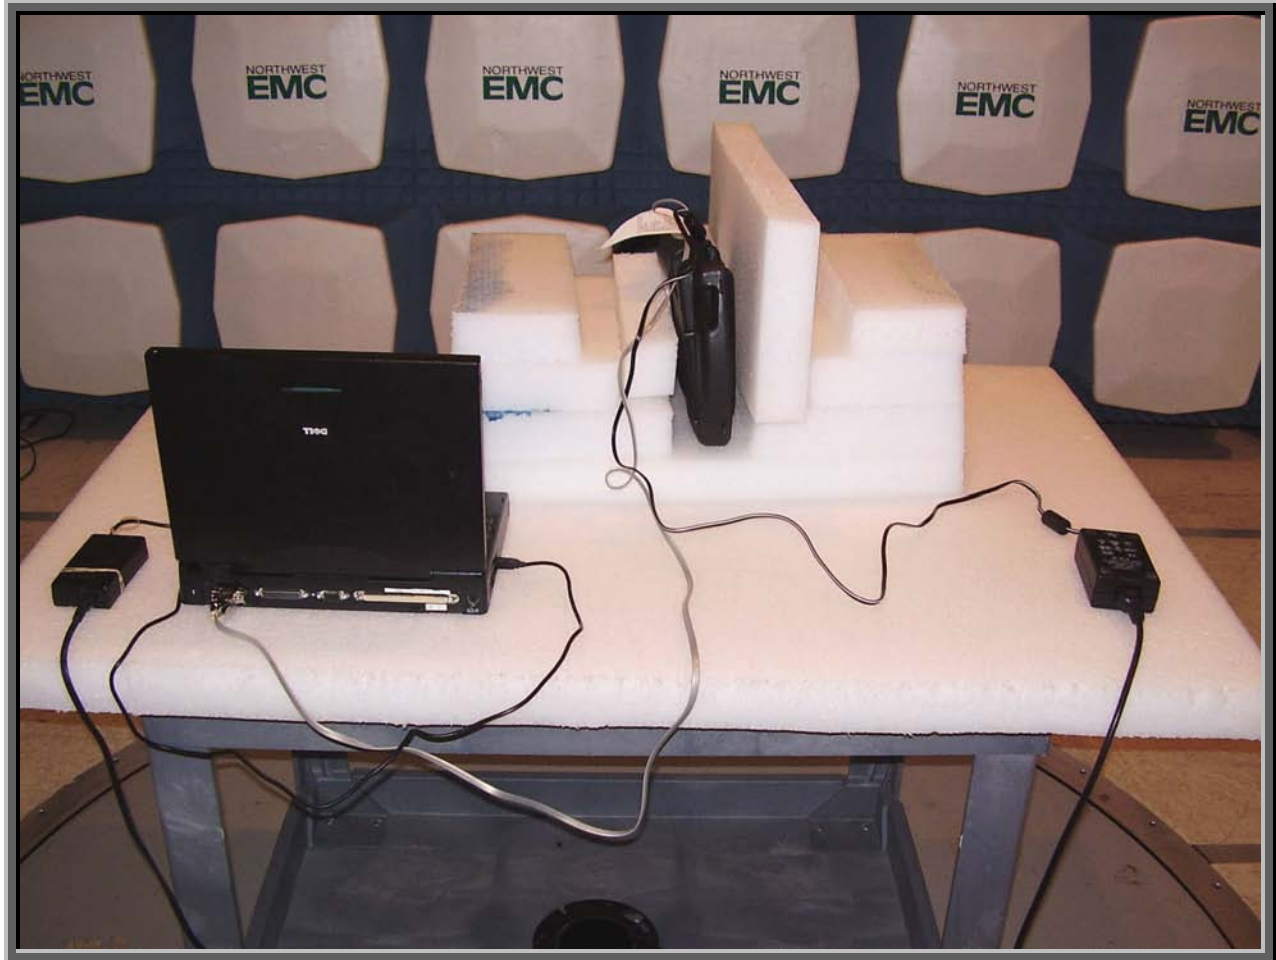
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/06/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, low channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										4					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
24020.000	27.3	10.2	289.0	1.0	3.0	0.0	V-High Horr	AV	0.0	37.5	54.0	-16.5			
24020.000	27.3	10.2	48.0	1.1	3.0	0.0	I-High Horr	AV	0.0	37.5	54.0	-16.5			
19216.000	25.6	7.8	313.0	1.0	3.0	0.0	V-High Horr	AV	0.0	33.4	54.0	-20.6			
19216.000	25.6	7.8	35.0	1.0	3.0	0.0	I-High Horr	AV	0.0	33.4	54.0	-20.6			
24020.000	40.1	10.2	289.0	1.0	3.0	0.0	V-High Horr	PK	0.0	50.3	74.0	-23.7			
24020.000	39.0	10.2	48.0	1.1	3.0	0.0	I-High Horr	PK	0.0	49.2	74.0	-24.8			
19216.000	37.8	7.8	313.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.6	74.0	-28.4			
19216.000	35.9	7.8	35.0	1.0	3.0	0.0	I-High Horr	PK	0.0	43.7	74.0	-30.3			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/06/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, mid channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										5					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19528.000	24.5	8.4	326.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.9	54.0	-21.1			
19528.000	24.4	8.4	49.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.8	54.0	-21.2			
19528.000	37.9	8.4	326.0	1.0	3.0	0.0	V-High Horr	PK	0.0	46.3	74.0	-27.7			
19528.000	36.5	8.4	49.0	1.0	3.0	0.0	I-High Horr	PK	0.0	44.9	74.0	-29.1			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/06/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, high channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										6					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
22320.000	26.6	9.2	313.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.8	54.0	-18.2			
22320.000	25.9	9.2	60.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.1	54.0	-18.9			
19840.000	23.2	8.9	45.0	1.1	3.0	0.0	I-High Horr	AV	0.0	32.1	54.0	-21.9			
19840.000	23.1	8.9	327.0	1.1	3.0	0.0	V-High Horr	AV	0.0	32.0	54.0	-22.0			
22320.000	38.3	9.2	313.0	1.0	3.0	0.0	V-High Horr	PK	0.0	47.5	74.0	-26.5			
22320.000	37.4	9.2	60.0	1.0	3.0	0.0	I-High Horr	PK	0.0	46.6	74.0	-27.4			
19840.000	37.1	8.9	45.0	1.1	3.0	0.0	I-High Horr	PK	0.0	46.0	74.0	-28.0			
19840.000	35.1	8.9	327.0	1.1	3.0	0.0	V-High Horr	PK	0.0	44.0	74.0	-30.0			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: JTRM0051									
Serial Number: 4898184						Date: 11/06/04									
Customer: Intermec Technologies Corporation						Temperature: 64									
Attendees: none						Humidity: 35%									
Cust. Ref. No.:						Barometric Pressure: 30.19									
Tested by: Holly Ashkannejhad				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Stand-alone mode															
EUT OPERATING MODES															
No hop, high channel															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										7					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2483.500	12.6	32.0	235.0	1.2	3.0	0.0	H-Horn	AV	0.0	44.6	54.0	-9.4			
2483.500	12.5	32.0	175.0	1.1	3.0	0.0	V-Horn	AV	0.0	44.5	54.0	-9.5			
2483.500	25.9	32.0	235.0	1.2	3.0	0.0	H-Horn	PK	0.0	57.9	74.0	-16.1			
2483.500	25.9	32.0	175.0	1.1	3.0	0.0	V-Horn	PK	0.0	57.9	74.0	-16.1			





Justification

The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 700C and Intermec's Bluetooth enabled printer, Model PW40. The 700C contains a GSM radio (FCC ID: EHA700C-SMC45-1), a 802.11b radio (FCC ID: HN22011B-2), and a Bluetooth radio (FCC ID: HN2ABTM3-3). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 700C can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the GSM, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below:

Channels in Specified Band Investigated:

802.11(b):	1, 11
Bluetooth:	2, 11, 67, 80
GSM:	516, 606

Operating Modes Investigated:**Bluetooth Radio in PW40 with 700C in cradle:**

Simultaneous transmission of Bluetooth Channel 11, 802.11(b) Channel 1, & GSM Channel 516
Simultaneous transmission of Bluetooth Channel 67, 802.11(b) Channel 11, & GSM Channel 516
Simultaneous transmission of Bluetooth Channel 2, 802.11(b) Channel 1, & GSM Channel 606
Simultaneous transmission of Bluetooth Channel 80, 802.11(b) Channel 11, & GSM Channel 606

Data Rates Investigated:

Maximum

Antennas Investigated:

802.11(b):	2011B integral antenna (internal to 700C)
GSM:	SMC45
Bluetooth:	Integral PCB trace, ABTM3 (internal to 700C)
Bluetooth:	Integral PCB trace, (internal to PW40)

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Frequency Range Investigated

Start Frequency	1 GHz	Stop Frequency	26 GHz
------------------------	-------	-----------------------	--------

Software\Firmware Applied During Test

Exercise software	Blue Test 802.11 Agency Test PhoneUtility	Version	Unknown
Description			
The system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation during simultaneous transmission.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
Bluetooth Radio in Printer	Intermec Technologies Corporation	8520-00080	Unknown
EUT – Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
AC Adapter	Ault Inc.	PW160	Unknown
Handheld Computer	Intermec Technologies Corporation	700C	05400400868
Bluetooth Radio in 700C	Intermec Technologies Corporation	ABTM3	N/A
802.11(b) Radio in 700C	Intermec Technologies Corporation	2011B	N/A
GSM/GPRS Radio in 700C	Intermec Technologies Corporation	SMC45	N/A

Remote Equipment Outside of Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
Remote laptop	Dell	TS30G	Unknown
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	12 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo
GSM/DCS/PCS MS Test Set	Hewlett-Packard	8922M	N/A	NCR	NA
GSM/DCS/PCS RF Interface	Hewlett-Packard	83220E	N/A	NCR	NA
Antenna, Horn	EMCO	3115	AHF	03/18/2004	24 mo
Signal Generator	Hewlett Packard	8341B	TGN	01/23/2004	13 mo
Antenna, Dipole (ADAA included)	Roberts	Roberts	ADA	12/27/2002	24 mo

Test Description

Requirement: Per 15.247(d), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 15.205, is measured. The peak level must comply with the limits specified in 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

Configuration: The EUTs are previously certified, co-located radio modules installed inside Intermec's Handheld Computer, Model 700C and Intermec's Bluetooth enabled printer, Model PW40. The 700C contains a GSM radio (FCC ID: EHA700C-SMC45-1), a 802.11b radio (FCC ID: HN22011B-2), and a Bluetooth radio (FCC ID: HN2ABTM3-3). The PW40 contains a Bluetooth radio (FCCID: EHABTS080-1). The 700C can be installed in the PW40's cradle. This test demonstrates compliance with FCC 15.247(d) emissions limits while the co-located radios are transmitting simultaneously. Each radio transmits through its own antenna.

Simultaneous Transmission:

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:


Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.


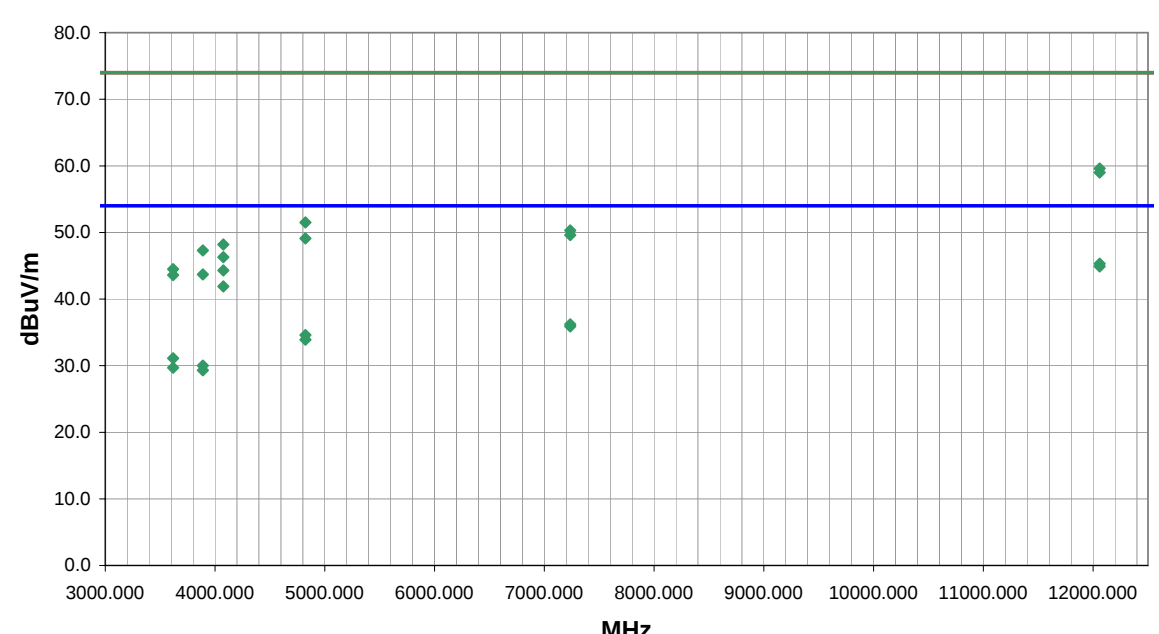
All possible combinations of harmonic emissions from the GSM, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 26 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.


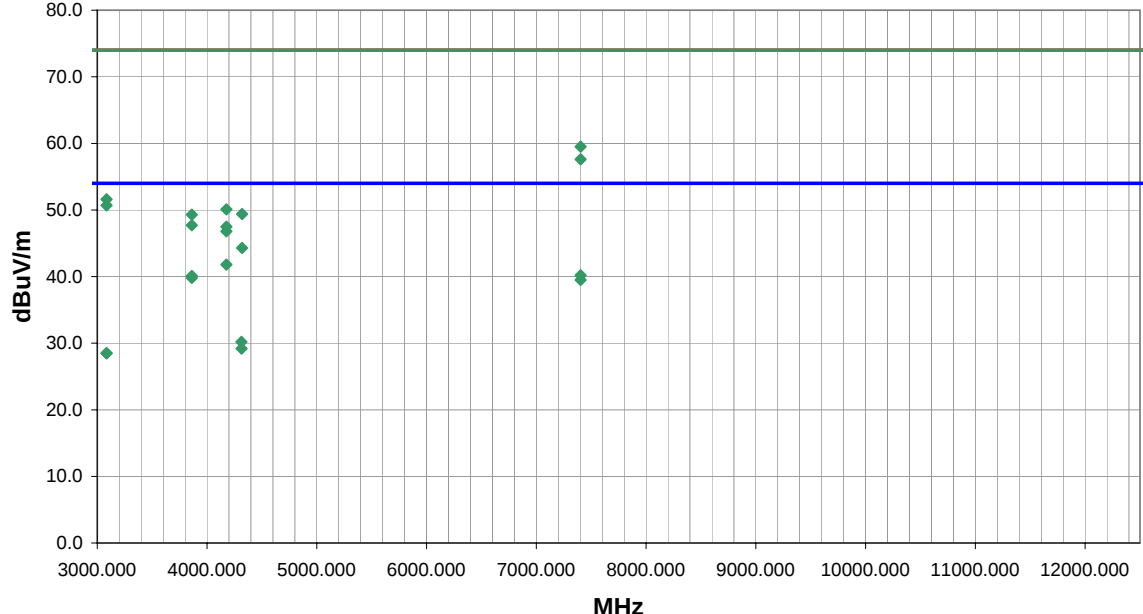
All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:2003). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

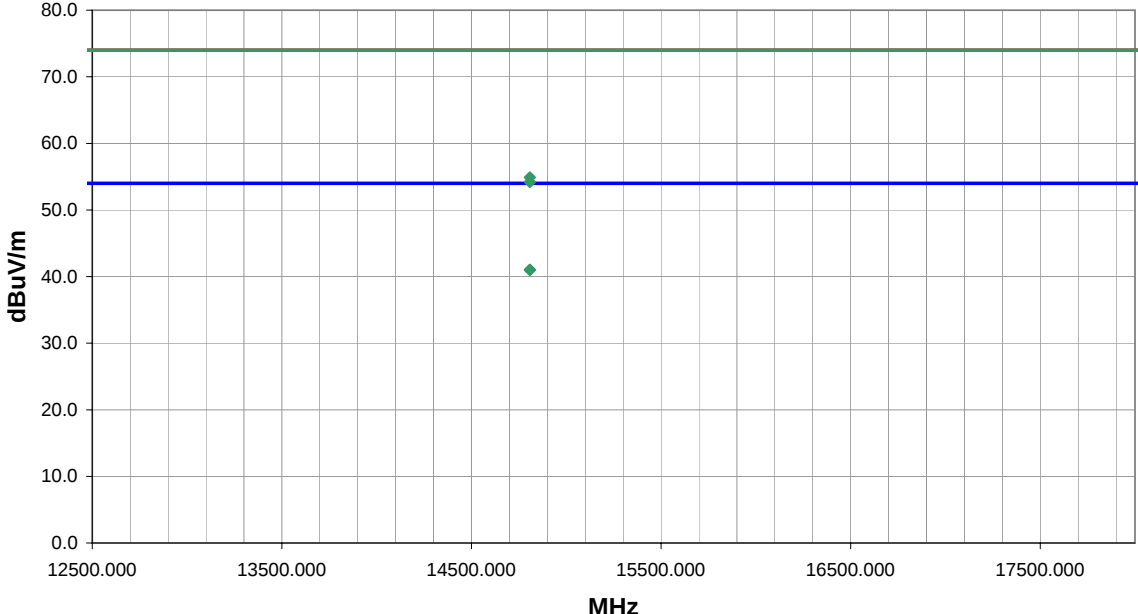
Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

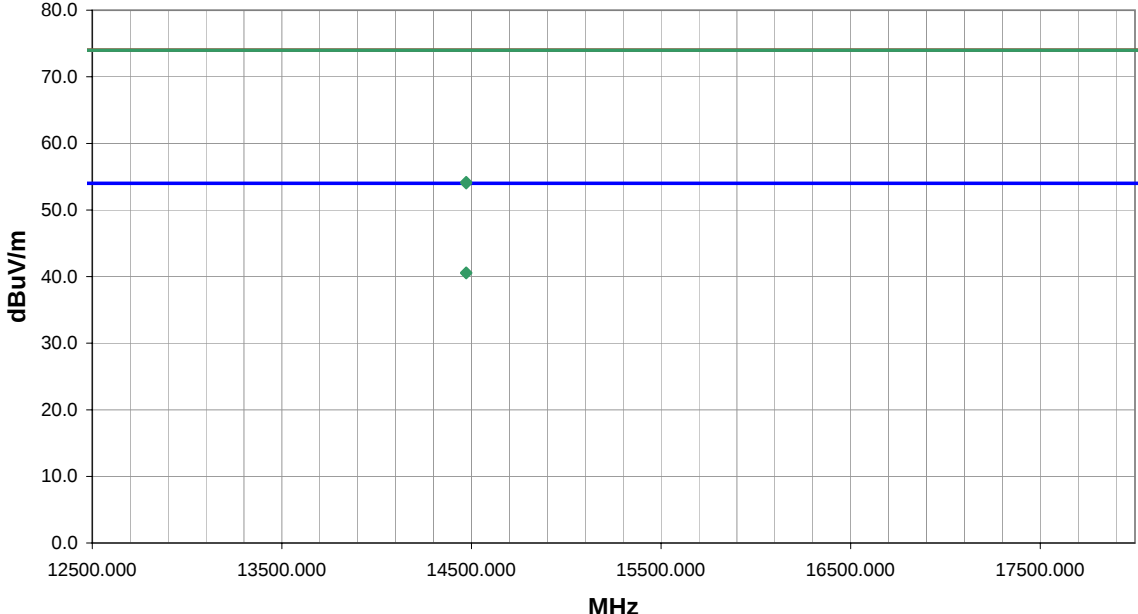
Completed by:

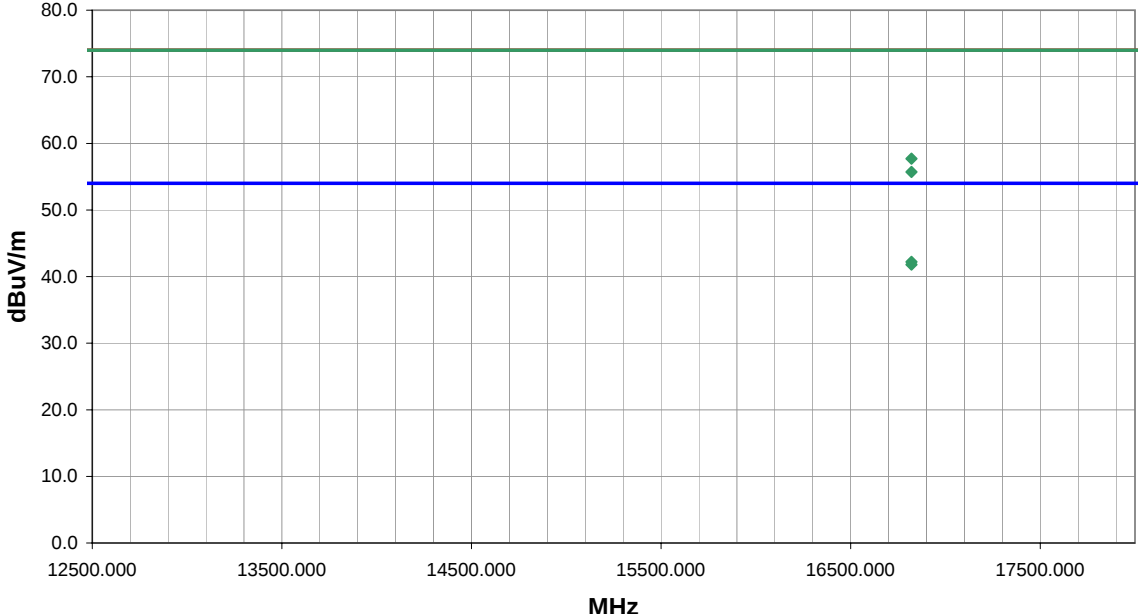


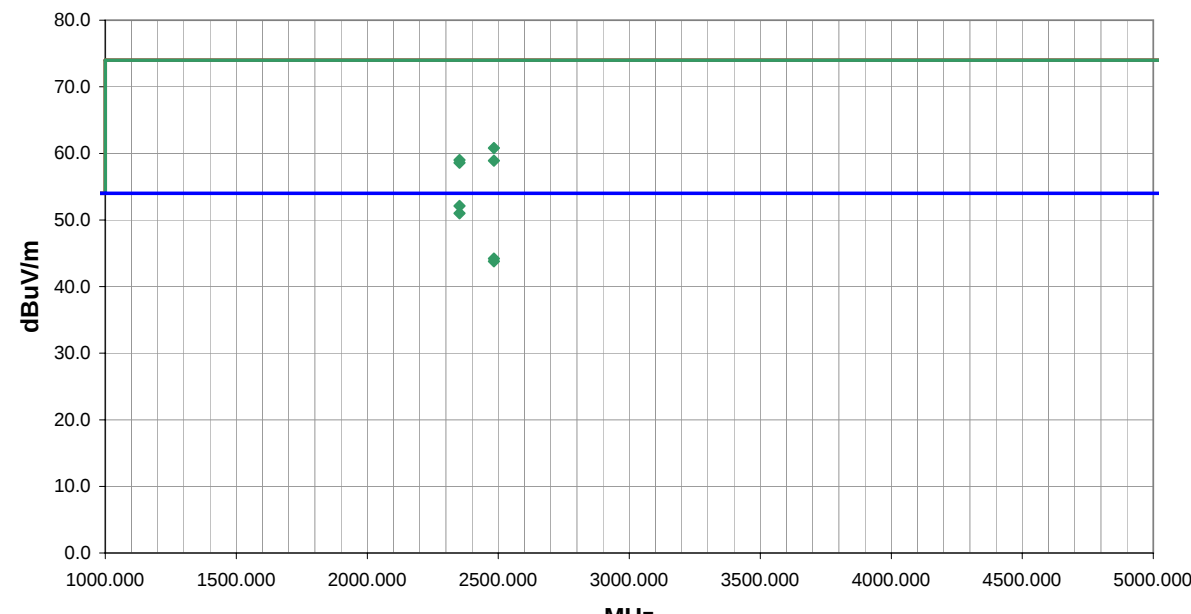
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV d4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: JTRM0051					
Serial Number: 4898184										Date: 11/21/04					
Customer: Intermec Technologies Corporation										Temperature: 19					
Attendees: none										Humidity: 34%					
Cust. Ref. No.:										Barometric Pressure: 30.32					
Tested by: Greg Kiemel					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, GSM 516 (PCS) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												41			
Other															
 Tested By: _____															
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
12060.030	25.1	20.2	127.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.3	54.0	-8.7			
12060.030	24.7	20.2	115.0	1.2	3.0	0.0	V-Horn	AV	0.0	44.9	54.0	-9.1			
4075.955	41.9	2.4	22.0	1.3	3.0	0.0	H-Horn	AV	0.0	44.3	54.0	-9.7			
4075.955	39.5	2.4	208.0	1.2	3.0	0.0	V-Horn	AV	0.0	41.9	54.0	-12.1			
7236.039	26.1	10.1	243.0	1.4	3.0	0.0	V-Horn	AV	0.0	36.2	54.0	-17.8			
7236.039	25.8	10.1	243.0	1.8	3.0	0.0	H-Horn	AV	0.0	35.9	54.0	-18.1			
4824.030	31.3	3.3	258.0	1.5	3.0	0.0	V-Horn	AV	0.0	34.6	54.0	-19.4			
4824.030	30.6	3.3	120.0	2.2	3.0	0.0	H-Horn	AV	0.0	33.9	54.0	-20.1			
3618.020	30.3	0.8	14.0	1.3	3.0	0.0	H-Horn	AV	0.0	31.1	54.0	-22.9			
3888.960	28.1	1.9	20.0	1.3	3.0	0.0	H-Horn	AV	0.0	30.0	54.0	-24.0			
3618.020	28.9	0.8	322.0	1.2	3.0	0.0	V-Horn	AV	0.0	29.7	54.0	-24.3			
3888.960	27.4	1.9	179.0	1.2	3.0	0.0	V-Horn	AV	0.0	29.3	54.0	-24.7			
12060.030	39.4	20.2	115.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.6	74.0	-14.4			
12060.030	38.8	20.2	127.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.0	74.0	-15.0			
4824.030	48.2	3.3	258.0	1.5	3.0	0.0	V-Horn	PK	0.0	51.5	74.0	-22.5			
7236.039	40.2	10.1	243.0	1.8	3.0	0.0	H-Horn	PK	0.0	50.3	74.0	-23.7			
7236.039	39.5	10.1	243.0	1.4	3.0	0.0	V-Horn	PK	0.0	49.6	74.0	-24.4			
4824.030	45.8	3.3	120.0	2.2	3.0	0.0	H-Horn	PK	0.0	49.1	74.0	-24.9			
4075.955	45.8	2.4	22.0	1.3	3.0	0.0	H-Horn	PK	0.0	48.2	74.0	-25.8			
3888.960	45.4	1.9	20.0	1.3	3.0	0.0	H-Horn	PK	0.0	47.3	74.0	-26.7			
4075.955	43.9	2.4	208.0	1.2	3.0	0.0	V-Horn	PK	0.0	46.3	74.0	-27.7			
3618.020	43.7	0.8	14.0	1.3	3.0	0.0	H-Horn	PK	0.0	44.5	74.0	-29.5			
3888.960	41.8	1.9	179.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.7	74.0	-30.3			
3618.020	42.8	0.8	322.0	1.2	3.0	0.0	V-Horn	PK	0.0	43.6	74.0	-30.4			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer										Work Order: JTRM0051					
Serial Number: 4898184										Date: 11/21/04					
Customer: Intermec Technologies Corporation										Temperature: 19					
Attendees: none										Humidity: 34%					
Cust. Ref. No.:										Barometric Pressure: 30.32					
Tested by: Greg Kiemel					Power: 120VAC/60Hz					Job Site: EV01					
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions										Year: 2004					
Method: ANSI C63.4										Year: 2003					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 67 in PW40. Bluetooth 67, 802.11b 11, GSM 516 (PCS) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS												Run #			
Pass												42			
Other															
 Tested By:															
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
4175.955	45.1	2.4	244.0	1.2	3.0	0.0	V-Horn	AV	0.0	47.5	54.0	-6.5			
4175.955	39.4	2.4	192.0	1.2	3.0	0.0	H-Horn	AV	0.0	41.8	54.0	-12.2			
7404.273	29.1	11.1	113.0	1.6	3.0	0.0	V-Horn	AV	0.0	40.2	54.0	-13.8			
3862.027	38.4	1.7	27.0	1.4	3.0	0.0	V-Horn	AV	0.0	40.1	54.0	-13.9			
3862.027	38.1	1.7	57.0	1.3	3.0	0.0	H-Horn	AV	0.0	39.8	54.0	-14.2			
7404.273	28.4	11.1	340.0	1.1	3.0	0.0	H-Horn	AV	0.0	39.5	54.0	-14.5			
4313.652	27.7	2.5	267.0	1.2	3.0	0.0	V-Horn	AV	0.0	30.2	54.0	-23.8			
4314.192	26.7	2.5	30.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.2	54.0	-24.8			
3085.091	28.1	0.4	201.0	1.4	3.0	0.0	H-Horn	AV	0.0	28.5	54.0	-25.5			
3085.091	28.1	0.4	360.0	1.6	3.0	0.0	V-Horn	AV	0.0	28.5	54.0	-25.5			
7404.273	48.4	11.1	113.0	1.6	3.0	0.0	V-Horn	PK	0.0	59.5	74.0	-14.5			
7404.273	46.5	11.1	340.0	1.1	3.0	0.0	H-Horn	PK	0.0	57.6	74.0	-16.4			
3085.091	51.2	0.4	201.0	1.4	3.0	0.0	H-Horn	PK	0.0	51.6	74.0	-22.4			
3085.091	50.3	0.4	360.0	1.6	3.0	0.0	V-Horn	PK	0.0	50.7	74.0	-23.3			
4175.955	47.7	2.4	244.0	1.2	3.0	0.0	V-Horn	PK	0.0	50.1	74.0	-23.9			
4318.632	46.9	2.5	267.0	1.2	3.0	0.0	V-Horn	PK	0.0	49.4	74.0	-24.6			
3862.027	47.6	1.7	27.0	1.4	3.0	0.0	V-Horn	PK	0.0	49.3	74.0	-24.7			
3862.027	46.0	1.7	57.0	1.3	3.0	0.0	H-Horn	PK	0.0	47.7	74.0	-26.3			
4175.955	44.4	2.4	192.0	1.2	3.0	0.0	H-Horn	PK	0.0	46.8	74.0	-27.2			
4318.632	41.8	2.5	30.0	1.3	3.0	0.0	H-Horn	PK	0.0	44.3	74.0	-29.7			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer							Work Order: ITRM0051								
Serial Number: 4898184							Date: 11/21/04								
Customer: Intermec Technologies Corporation							Temperature: 19								
Attendees: none							Humidity: 34%								
Cust. Ref. No.:							Barometric Pressure: 30.32								
Tested by: Greg Kiemel				Power: 120VAC/60Hz			Job Site: EV01								
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions							Year: 2004								
Method: ANSI C63.4							Year: 2003								
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 67 in PW40. Bluetooth 67, 802.11b 11, GSM 516 (PCS) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										43					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
14807.840	27.0	14.0	187.0	2.2	3.0	0.0	H-Horn	AV	0.0	41.0	54.0	-13.0			
14807.840	27.0	14.0	35.0	1.2	3.0	0.0	V-Horn	AV	0.0	41.0	54.0	-13.0			
14807.840	40.9	14.0	35.0	1.2	3.0	0.0	V-Horn	PK	0.0	54.9	74.0	-19.1			
14807.840	40.2	14.0	187.0	2.2	3.0	0.0	H-Horn	PK	0.0	54.2	74.0	-19.8			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/21/04									
Customer: Intermec Technologies Corporation						Temperature: 19									
Attendees: none						Humidity: 34%									
Cust. Ref. No.:						Barometric Pressure: 30.32									
Tested by: Greg Kiemel				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 11 in PW40. Bluetooth 11, 802.11b 1, GSM 516 (PCS) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										44					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
14472.000	26.8	13.8	204.0	3.0	3.0	0.0	H-Horn	AV	0.0	40.6	54.0	-13.4			
14472.000	26.7	13.8	308.0	2.3	3.0	0.0	V-Horn	AV	0.0	40.5	54.0	-13.5			
14472.000	40.4	13.8	204.0	3.0	3.0	0.0	H-Horn	PK	0.0	54.2	74.0	-19.8			
14472.000	40.2	13.8	308.0	2.3	3.0	0.0	V-Horn	PK	0.0	54.0	74.0	-20.0			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/21/04									
Customer: Intermec Technologies Corporation						Temperature: 19									
Attendees: none						Humidity: 34%									
Cust. Ref. No.:						Barometric Pressure: 30.32									
Tested by: Greg Kiemel				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 2 in PW40. Bluetooth 2, 802.11b 1, GSM 606 (PCS) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										45					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
16821.000	27.3	14.9	178.0	1.2	3.0	0.0	V-Horn	AV	0.0	42.2	54.0	-11.8			
16821.000	26.9	14.9	190.0	1.2	3.0	0.0	H-Horn	AV	0.0	41.8	54.0	-12.2			
16821.000	42.8	14.9	178.0	1.2	3.0	0.0	V-Horn	PK	0.0	57.7	74.0	-16.3			
16821.000	40.8	14.9	190.0	1.2	3.0	0.0	H-Horn	PK	0.0	55.7	74.0	-18.3			

NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV df4.4 10/22/2004	
EUT: PW40 Bluetooth Enabled Printer						Work Order: ITRM0051									
Serial Number: 4898184						Date: 11/29/04									
Customer: Intermec Technologies Corporation						Temperature: 19									
Attendees: none						Humidity: 34%									
Cust. Ref. No.:						Barometric Pressure: 30.32									
Tested by: Rod Peloquin				Power: 120VAC/60Hz		Job Site: EV01									
TEST SPECIFICATIONS															
Specification: FCC 15.247(d) Spurious Radiated Emissions						Year: 2004									
Method: ANSI C63.4						Year: 2003									
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission															
EUT OPERATING MODES															
Bluetooth 80 in PW40. Bluetooth 80, 802.11b 11, GSM 606 (PCS) in 700C.															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS										Run #					
Pass										51					
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
2352.000	22.6	29.5	11.0	1.0	3.0	0.0	V-Horn	AV	0.0	52.1	54.0	-1.9			
2352.000	21.5	29.5	127.0	1.4	3.0	0.0	H-Horn	AV	0.0	51.0	54.0	-3.0			
2483.500	14.5	29.7	183.0	1.0	3.0	0.0	H-Horn	AV	0.0	44.2	54.0	-9.8			
2483.500	14.1	29.7	80.0	1.2	3.0	0.0	V-Horn	AV	0.0	43.8	54.0	-10.2			
2483.500	31.1	29.7	183.0	1.0	3.0	0.0	H-Horn	PK	0.0	60.8	74.0	-13.2			
2352.000	29.5	29.5	11.0	1.0	3.0	0.0	V-Horn	PK	0.0	59.0	74.0	-15.0			
2483.500	29.2	29.7	80.0	1.2	3.0	0.0	V-Horn	PK	0.0	58.9	74.0	-15.1			
2352.000	29.1	29.5	127.0	1.4	3.0	0.0	H-Horn	PK	0.0	58.6	74.0	-15.4			







Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, CPU speeds, video resolution settings, operational modes, and input voltages.

Operating Modes Investigated:

Transmitting data

Power Input Settings Investigated:

120 VAC, 60 Hz

Software\Firmware Applied During Test

Operating system	Windows 98	Version	4.10.2222A
Exercise software	BlueTest	Version	Unknown
Description			
The system was tested using special software developed to test all functions of the device during the test.			

EUT and Peripherals in Test Setup Boundary

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
Power Adapter	Ault Inc.	PW160	Unknown
Laptop	Dell	TS30G1	Unknown
AC Adapter	Dell	TSA 8	00099500-12961-75P-1959

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop
DC Leads	No	1.2	No	Laptop	AC Adapter
AC Power	No	1.6	No	AC Adapter	AC Mains
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment


Description	Manufacturer	Model	Identifier	Last Cal	Interval
High Pass Filter	TTE	H97-100k-50-720B	HFC	02/01/2004	13 mo
LISN	Solar	9252-50-R-24-BNC	LIN	12/16/2003	13 mo
LISN	Solar	9252-50-R-24-BNC	LIO	04/30/2004	12 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo

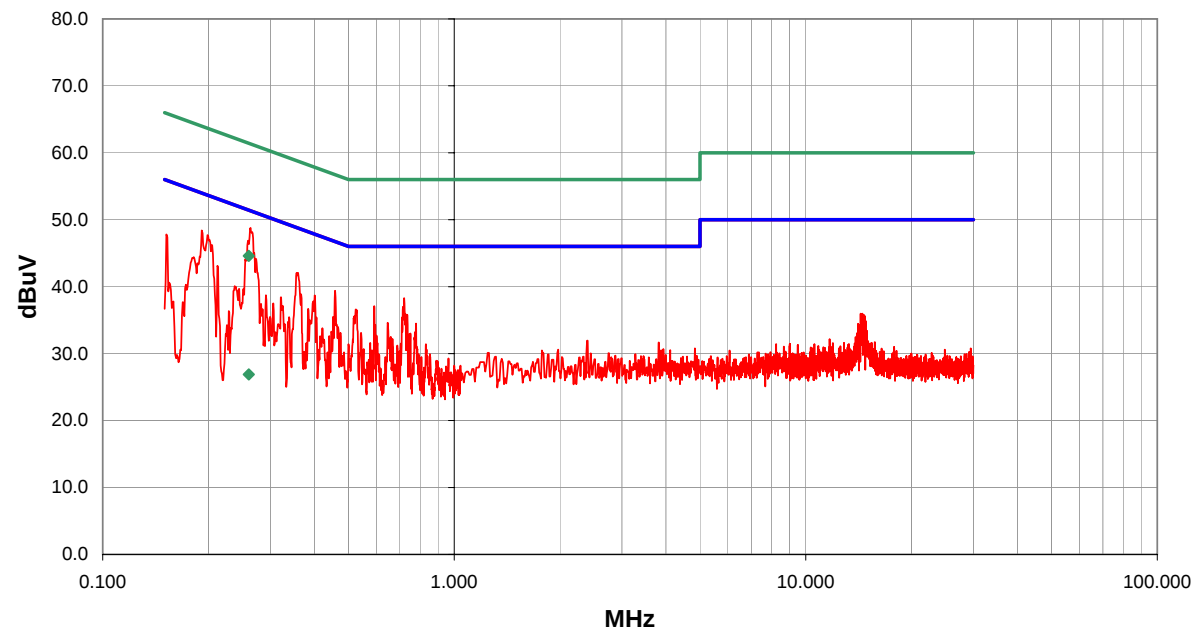
Test Description

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50 Ω .

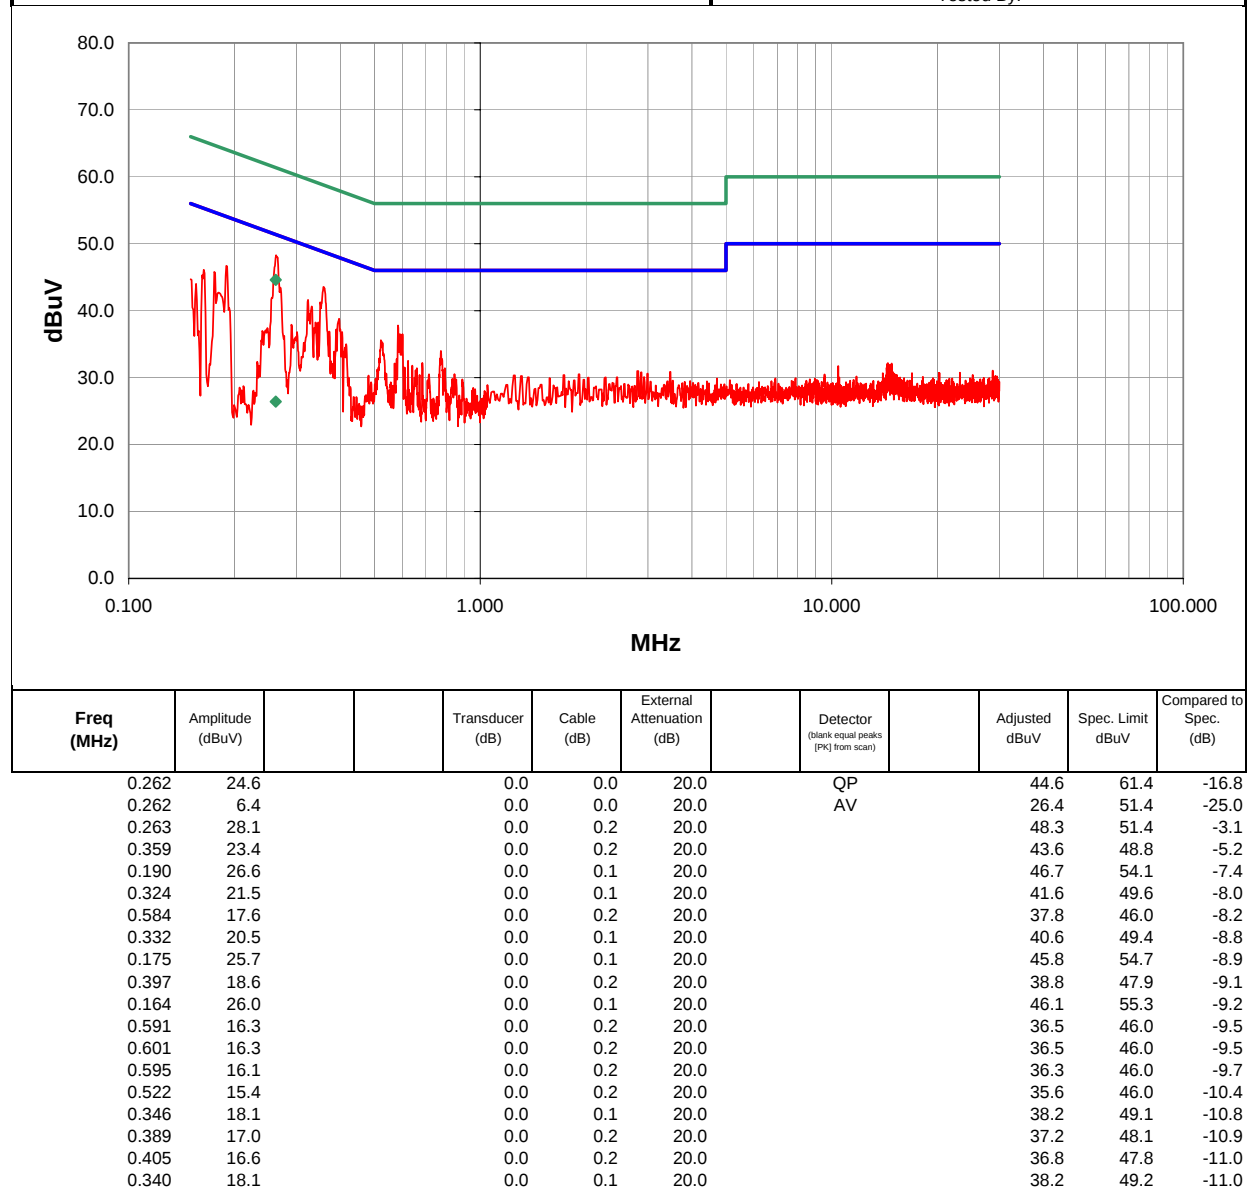
Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

Completed by:

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EUT: PW40 Bluetooth Enabled Printer				Work Order: ITRM0051								
Serial Number: 4898184				Date: 11/05/04								
Customer: Intermec Technologies Corporation				Temperature: 68								
Attendees: none				Humidity: 34%								
Cust. Ref. No.:				Barometric Pressure: 30.18								
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.107 Class B				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Stand-alone mode												
EUT OPERATING MODES												
Transmitting												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Line		Run #						
Pass				N		5						
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.260	24.6			0.0	0.0	20.0		QP		44.6	61.4	-16.8
0.260	6.9			0.0	0.0	20.0		AV		26.9	51.4	-24.5
0.263	28.6			0.0	0.2	20.0				48.8	51.3	-2.6
0.191	28.3			0.0	0.1	20.0				48.4	54.0	-5.6
0.199	27.6			0.0	0.1	20.0				47.7	53.7	-6.0
0.360	21.9			0.0	0.2	20.0				42.1	48.7	-6.7
0.458	19.2			0.0	0.2	20.0				39.4	46.7	-7.3
0.721	18.1			0.0	0.2	20.0				38.3	46.0	-7.7
0.152	27.7			0.0	0.1	20.0				47.8	55.9	-8.1
0.592	16.9			0.0	0.2	20.0				37.1	46.0	-8.9
0.401	18.5			0.0	0.2	20.0				38.7	47.8	-9.1
0.524	16.4			0.0	0.2	20.0				36.6	46.0	-9.4
0.212	23.0			0.0	0.1	20.0				43.1	53.1	-10.0
0.182	24.3			0.0	0.1	20.0				44.4	54.4	-10.0
0.735	15.6			0.0	0.2	20.0				35.8	46.0	-10.2
0.710	15.2			0.0	0.2	20.0				35.4	46.0	-10.6
0.322	18.3			0.0	0.1	20.0				38.4	49.7	-11.2
0.452	15.3			0.0	0.2	20.0				35.5	46.8	-11.3
0.647	14.4			0.0	0.2	20.0				34.6	46.0	-11.4

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET		REV df4.4 10/22/2004
EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051		
Serial Number: 4898184		Date: 11/06/04		
Customer: Intermec Technologies Corporation		Temperature: 68		
Attendees: none		Humidity: 34%		
Cust. Ref. No.:		Barometric Pressure: 30.18		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz	Job Site: EV01	
TEST SPECIFICATIONS				
Specification: FCC 15.107 Class B		Year: 2004		
Method: ANSI C63.4		Year: 2003		
SAMPLE CALCULATIONS				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator				
COMMENTS				
Stand-alone mode				
EUT OPERATING MODES				
Transmitting				
DEVIATIONS FROM TEST STANDARD				
No deviations.				
RESULTS		Line	Run #	
Pass		L1	6	
Other		 Tested By:		







Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

High
Mid
Low

Operating Modes Investigated:

No Hop

Data Rates Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Software\Firmware Applied During Test

Exercise software	BlueTest	Version	Unknown
Description			
The system was tested using special software developed to test all functions of the device during the test including changing the channel.			

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT- Bluetooth Enabled Printer	Intermec Technologies Corporation	PW40	4898184
Power Adapter	Ault Inc.	PW160	Unknown
Laptop	Dell	TS30G1	Unknown
AC Adapter	Dell	TSA 8	00099500-12961-75P-1959

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	PA	1.0	Yes	EUT- Bluetooth Enabled Printer	Power Adapter
AC Power	No	1.2	No	Power Adapter	AC Mains
Serial	PA	1.2	PA	EUT- Bluetooth Enabled Printer	Laptop
DC Leads	No	1.2	No	Laptop	AC Adapter
AC Power	No	1.6	No	AC Adapter	AC Mains
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
LISN	Solar	9252-50-R-24-BNC	LIO	04/30/2004	12 mo
LISN	Solar	9252-50-R-24-BNC	LIN	12/16/2003	13 mo
High Pass Filter	TTE	H97-100k-50-720B	HFC	02/01/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/23/2003	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/23/2003	13 mo

Test Description

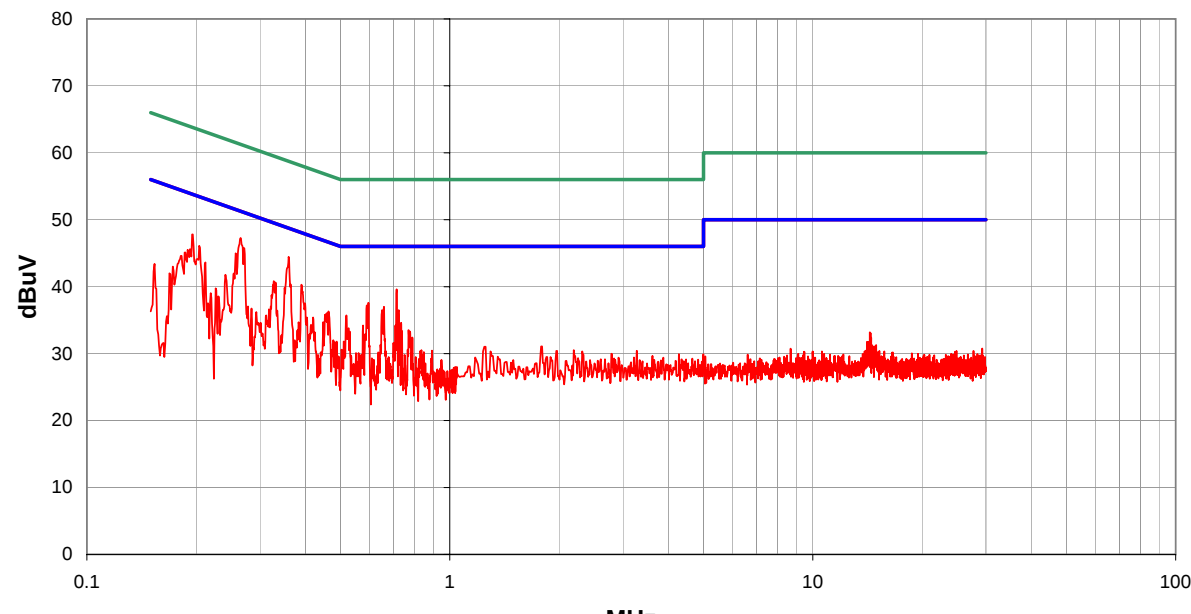
Requirement: Per 47 15.207(d), if the EUT is connected to the AC power line indirectly, obtaining its power from another device that is connected to the AC power line, then it should be tested to demonstrate compliance with the conducted limits of 15.207.

Configuration: The EUT will be powered from a device that could be connected to the AC power line. Therefore, the measurements were made on the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.4-2003.

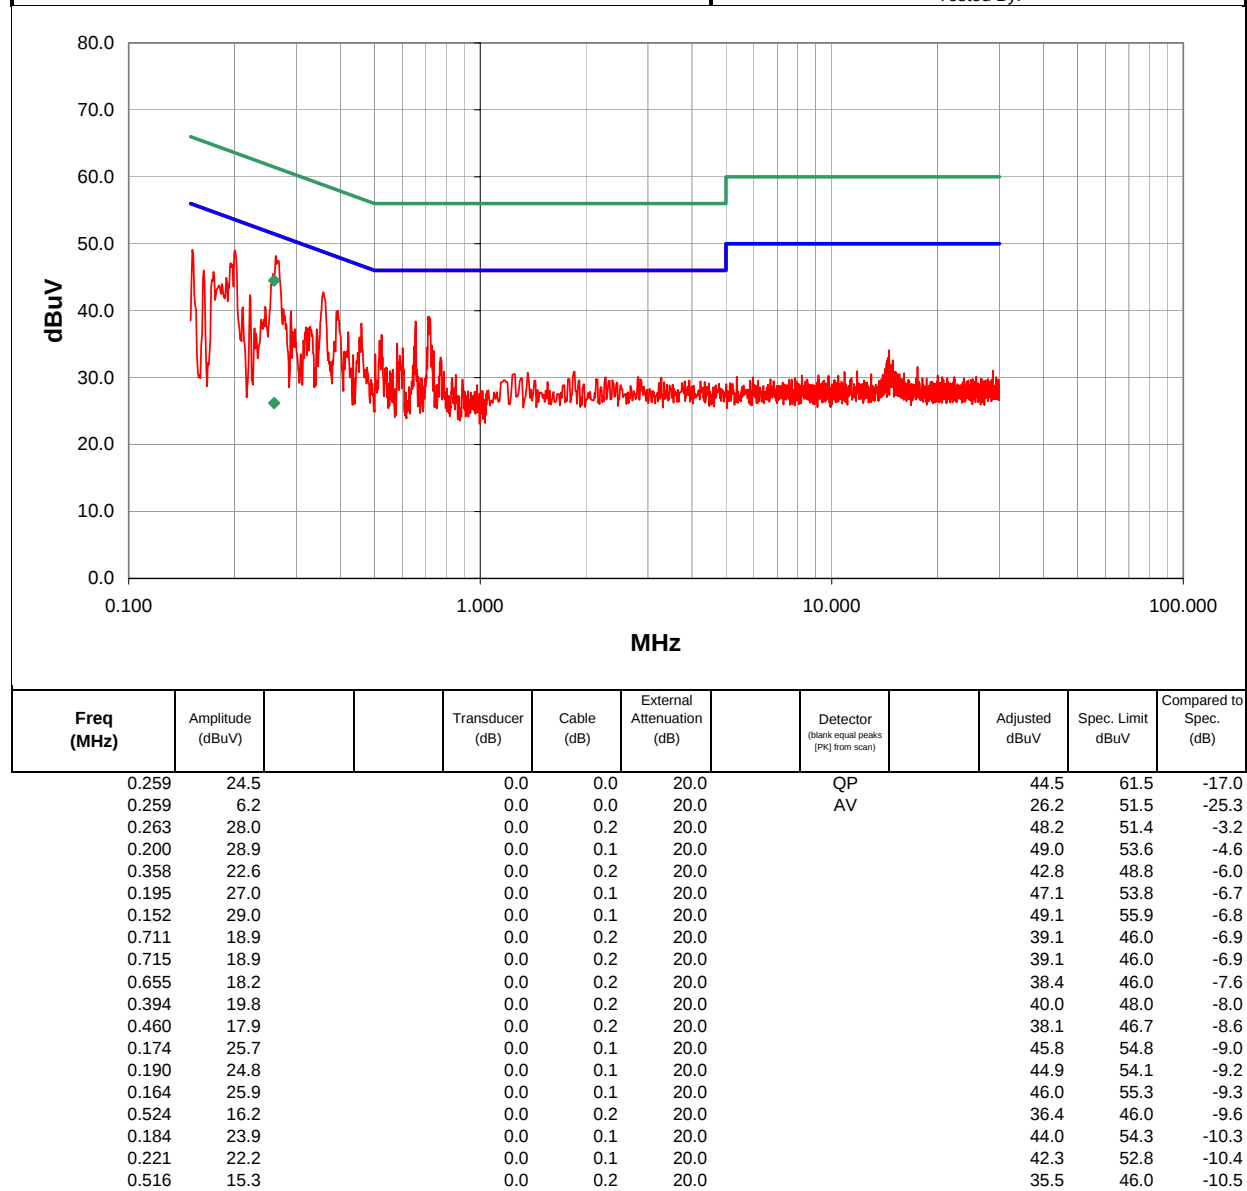
Completed by:

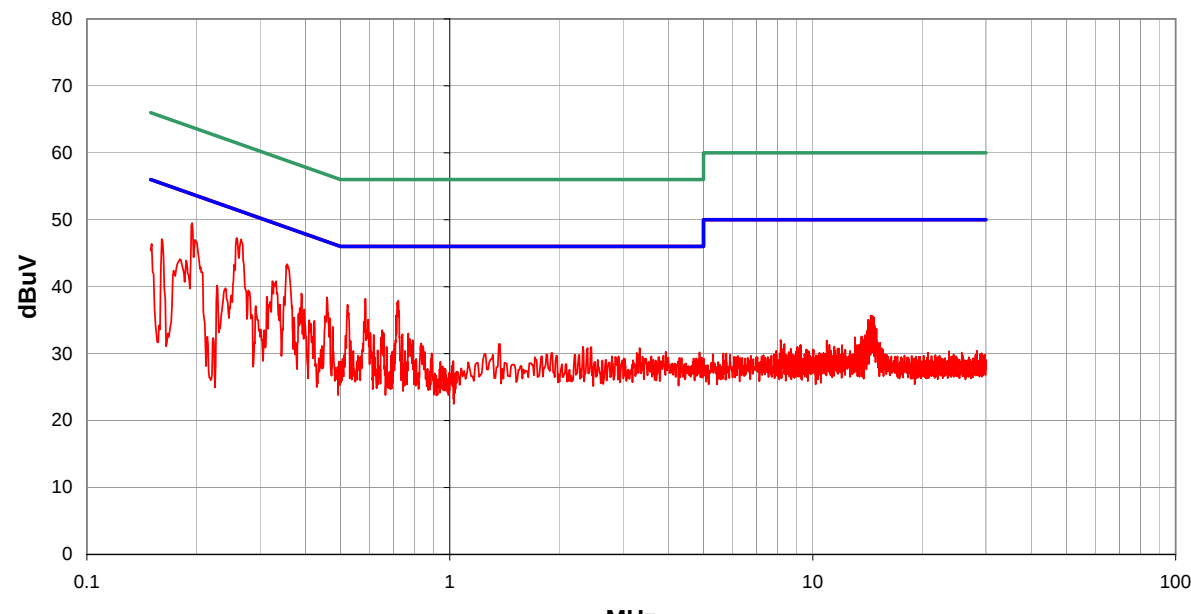
Holly Anderson

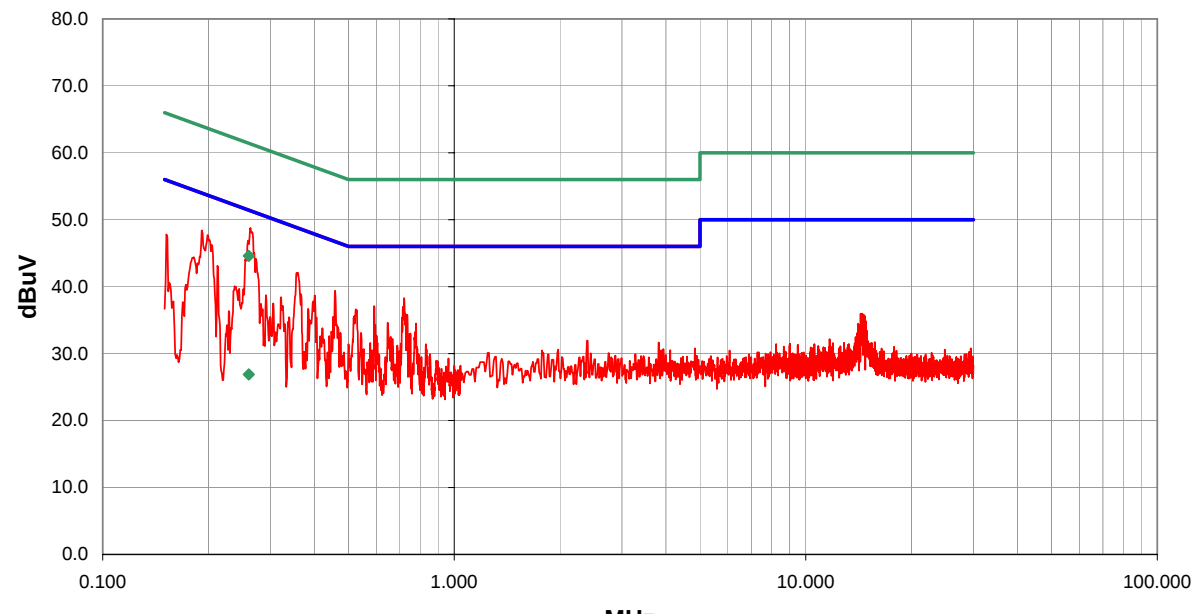
NORTHWEST		CONDUCTED EMISSIONS DATA SHEET					REV df4.4 10/22/2004					
EMC												
EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051										
Serial Number: 4898184		Date: 11/05/04										
Customer: Intermec Technologies Corporation		Temperature: 68										
Attendees: none		Humidity: 34%										
Cust. Ref. No.:		Barometric Pressure: 30.18										
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Stand-alone mode												
EUT OPERATING MODES												
No hop, low channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Line		Run #						
Pass				N		1						
Other												
				Holly Ashkannejhad Tested By:								
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.263	26.2			0.0	0.2	20.0				46.4	51.4	-5.0
0.393	21.4			0.0	0.2	20.0				41.6	48.0	-6.4
0.196	27.2			0.0	0.1	20.0				47.3	53.8	-6.5
0.717	19.2			0.0	0.2	20.0				39.4	46.0	-6.6
0.356	21.9			0.0	0.2	20.0				42.1	48.8	-6.8
0.210	26.0			0.0	0.1	20.0				46.1	53.2	-7.1
0.182	26.8			0.0	0.1	20.0				46.9	54.4	-7.5
0.274	23.1			0.0	0.2	20.0				43.3	51.0	-7.7
0.655	17.8			0.0	0.2	20.0				38.0	46.0	-8.0
0.156	26.9			0.0	0.1	20.0				47.0	55.7	-8.7
0.468	17.5			0.0	0.2	20.0				37.7	46.6	-8.9
0.648	16.5			0.0	0.2	20.0				36.7	46.0	-9.3
0.259	21.8			0.0	0.2	20.0				42.0	51.5	-9.5
0.241	22.2			0.0	0.2	20.0				42.4	52.1	-9.7
0.164	24.8			0.0	0.1	20.0				44.9	55.2	-10.3
0.221	22.1			0.0	0.1	20.0				42.2	52.8	-10.5
0.459	15.8			0.0	0.2	20.0				36.0	46.7	-10.7
0.729	15.0			0.0	0.2	20.0				35.2	46.0	-10.8
0.577	14.9			0.0	0.2	20.0				35.1	46.0	-10.9

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EUT: PW40 Bluetooth Enabled Printer				Work Order: JTRM0051								
Serial Number: 4898184				Date: 11/05/04								
Customer: Intermec Technologies Corporation				Temperature: 68								
Attendees: none				Humidity: 34%								
Cust. Ref. No.:				Barometric Pressure: 30.18								
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Stand-alone mode												
EUT OPERATING MODES												
No hop, low channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Line		Run #						
Pass				L1		2						
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.265	27.1			0.0	0.2	20.0				47.3	51.3	-4.0
0.360	24.3			0.0	0.2	20.0				44.5	48.7	-4.3
0.271	25.6			0.0	0.2	20.0				45.8	51.1	-5.3
0.195	27.7			0.0	0.1	20.0				47.8	53.8	-6.0
0.713	19.4			0.0	0.2	20.0				39.6	46.0	-6.4
0.257	24.8			0.0	0.2	20.0				45.0	51.5	-6.5
0.204	26.0			0.0	0.1	20.0				46.1	53.4	-7.3
0.390	20.1			0.0	0.2	20.0				40.3	48.1	-7.8
0.596	17.4			0.0	0.2	20.0				37.6	46.0	-8.4
0.327	20.7			0.0	0.1	20.0				40.8	49.5	-8.7
0.590	17.0			0.0	0.2	20.0				37.2	46.0	-8.8
0.658	16.8			0.0	0.2	20.0				37.0	46.0	-9.0
0.212	23.5			0.0	0.1	20.0				43.6	53.1	-9.5
0.650	16.3			0.0	0.2	20.0				36.5	46.0	-9.5
0.723	16.3			0.0	0.2	20.0				36.5	46.0	-9.5
0.182	24.5			0.0	0.1	20.0				44.6	54.4	-9.8
0.241	21.6			0.0	0.2	20.0				41.8	52.1	-10.3
0.519	15.5			0.0	0.2	20.0				35.7	46.0	-10.3
0.463	16.1			0.0	0.2	20.0				36.3	46.6	-10.3

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET		REV df4.4 10/22/2004
EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051		
Serial Number: 4898184		Date: 11/05/04		
Customer: Intermec Technologies Corporation		Temperature: 68		
Attendees: none		Humidity: 34%		
Cust. Ref. No.:		Barometric Pressure: 30.18		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01
TEST SPECIFICATIONS				
Specification: FCC 15.207 AC Powerline Conducted Emissions		Year: 2004		
Method: ANSI C63.4		Year: 2003		
SAMPLE CALCULATIONS				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator				
COMMENTS				
Stand-alone mode				
EUT OPERATING MODES				
No hop, mid channel				
DEVIATIONS FROM TEST STANDARD				
No deviations.				
RESULTS		Line		Run #
Pass		L1		3
Other		 Tested By:		



NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EUT: PW40 Bluetooth Enabled Printer				Work Order: JTRM0051								
Serial Number: 4898184				Date: 11/05/04								
Customer: Intermec Technologies Corporation				Temperature: 68								
Attendees: none				Humidity: 34%								
Cust. Ref. No.:				Barometric Pressure: 30.18								
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Stand-alone mode												
EUT OPERATING MODES												
No hop, mid channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Line		Run #						
Pass				N		4						
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.266	26.9			0.0	0.2	20.0				47.1	51.2	-4.2
0.259	27.1			0.0	0.2	20.0				47.3	51.5	-4.2
0.195	29.4			0.0	0.1	20.0				49.5	53.8	-4.3
0.356	23.2			0.0	0.2	20.0				43.4	48.8	-5.5
0.199	26.9			0.0	0.1	20.0				47.0	53.7	-6.7
0.585	18.0			0.0	0.2	20.0				38.2	46.0	-7.8
0.721	17.7			0.0	0.2	20.0				37.9	46.0	-8.1
0.459	18.2			0.0	0.2	20.0				38.4	46.7	-8.3
0.161	27.0			0.0	0.1	20.0				47.1	55.4	-8.3
0.332	20.7			0.0	0.1	20.0				40.8	49.4	-8.6
0.523	17.1			0.0	0.2	20.0				37.3	46.0	-8.7
0.390	18.8			0.0	0.2	20.0				39.0	48.1	-9.1
0.151	26.3			0.0	0.1	20.0				46.4	56.0	-9.6
0.188	23.8			0.0	0.1	20.0				43.9	54.1	-10.2
0.711	15.5			0.0	0.2	20.0				35.7	46.0	-10.3
0.181	24.0			0.0	0.1	20.0				44.1	54.5	-10.4
0.595	14.9			0.0	0.2	20.0				35.1	46.0	-10.9
0.467	15.1			0.0	0.2	20.0				35.3	46.6	-11.3
0.398	16.4			0.0	0.2	20.0				36.6	47.9	-11.3

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET				REV df4.4 10/22/2004						
EUT: PW40 Bluetooth Enabled Printer				Work Order: ITRM0051								
Serial Number: 4898184				Date: 11/05/04								
Customer: Intermec Technologies Corporation				Temperature: 68								
Attendees: none				Humidity: 34%								
Cust. Ref. No.:				Barometric Pressure: 30.18								
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.207 AC Powerline Conducted Emissions				Year: 2004								
Method: ANSI C63.4				Year: 2003								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Stand-alone mode												
EUT OPERATING MODES												
No hop, high channel												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Line		Run #						
Pass				N		5						
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)			Transducer (dB)	Cable (dB)	External Attenuation (dB)		Detector (blank equal peaks [PK] from scan)		Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
0.260	24.6			0.0	0.0	20.0		QP		44.6	61.4	-16.8
0.260	6.9			0.0	0.0	20.0		AV		26.9	51.4	-24.5
0.263	28.6			0.0	0.2	20.0				48.8	51.3	-2.6
0.191	28.3			0.0	0.1	20.0				48.4	54.0	-5.6
0.199	27.6			0.0	0.1	20.0				47.7	53.7	-6.0
0.360	21.9			0.0	0.2	20.0				42.1	48.7	-6.7
0.458	19.2			0.0	0.2	20.0				39.4	46.7	-7.3
0.721	18.1			0.0	0.2	20.0				38.3	46.0	-7.7
0.152	27.7			0.0	0.1	20.0				47.8	55.9	-8.1
0.592	16.9			0.0	0.2	20.0				37.1	46.0	-8.9
0.401	18.5			0.0	0.2	20.0				38.7	47.8	-9.1
0.524	16.4			0.0	0.2	20.0				36.6	46.0	-9.4
0.212	23.0			0.0	0.1	20.0				43.1	53.1	-10.0
0.182	24.3			0.0	0.1	20.0				44.4	54.4	-10.0
0.735	15.6			0.0	0.2	20.0				35.8	46.0	-10.2
0.710	15.2			0.0	0.2	20.0				35.4	46.0	-10.6
0.322	18.3			0.0	0.1	20.0				38.4	49.7	-11.2
0.452	15.3			0.0	0.2	20.0				35.5	46.8	-11.3
0.647	14.4			0.0	0.2	20.0				34.6	46.0	-11.4

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET		REV df4.4 10/22/2004
EUT: PW40 Bluetooth Enabled Printer		Work Order: ITRM0051		
Serial Number: 4898184		Date: 11/06/04		
Customer: Intermec Technologies Corporation		Temperature: 68		
Attendees: none		Humidity: 34%		
Cust. Ref. No.:		Barometric Pressure: 30.18		
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01
TEST SPECIFICATIONS				
Specification: FCC 15.207 AC Powerline Conducted Emissions		Year: 2004		
Method: ANSI C63.4		Year: 2003		
SAMPLE CALCULATIONS				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator				
COMMENTS				
Stand-alone mode				
EUT OPERATING MODES				
No hop, high channel				
DEVIATIONS FROM TEST STANDARD				
No deviations.				
RESULTS		Line	Run #	
Pass		L1	6	
Other		 Tested By:		

