





FCC / IC TEST REPORT



Report No. : FR6D2906-A

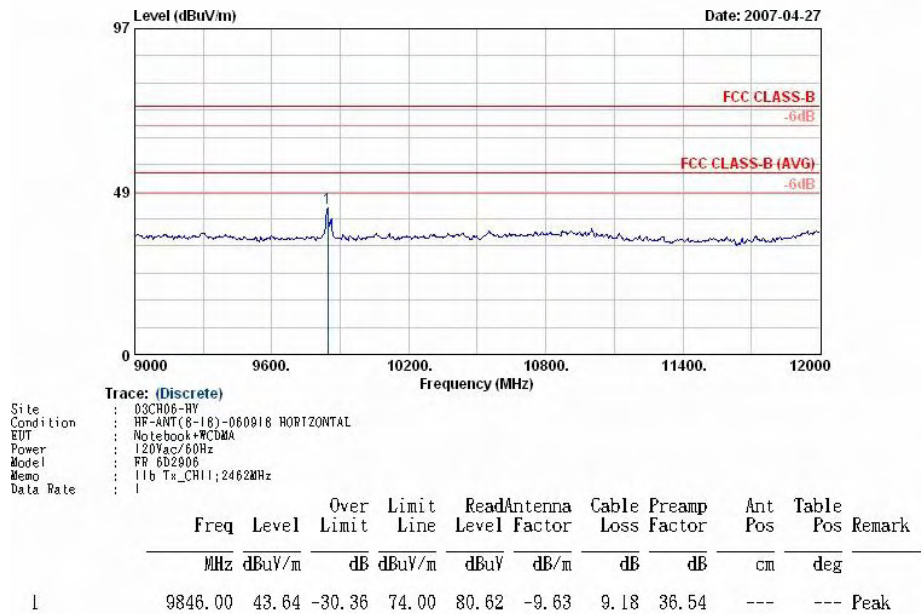

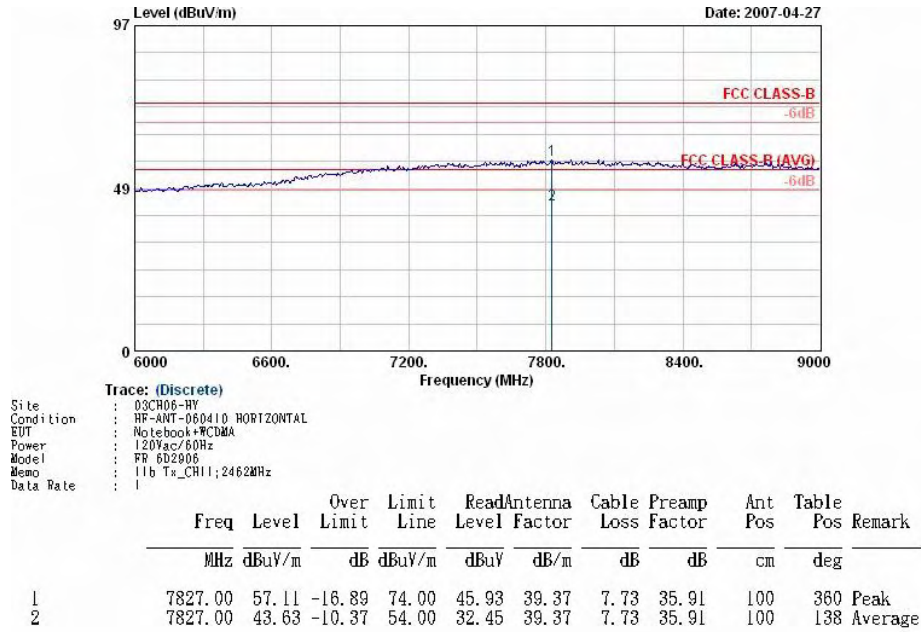

FCC / IC TEST REPORT


Report No. : FR6D2906-A

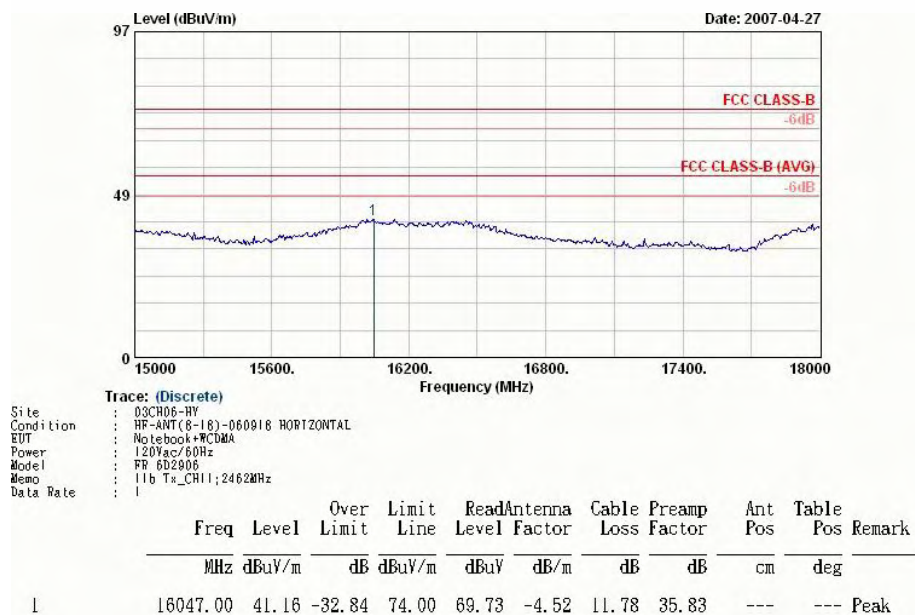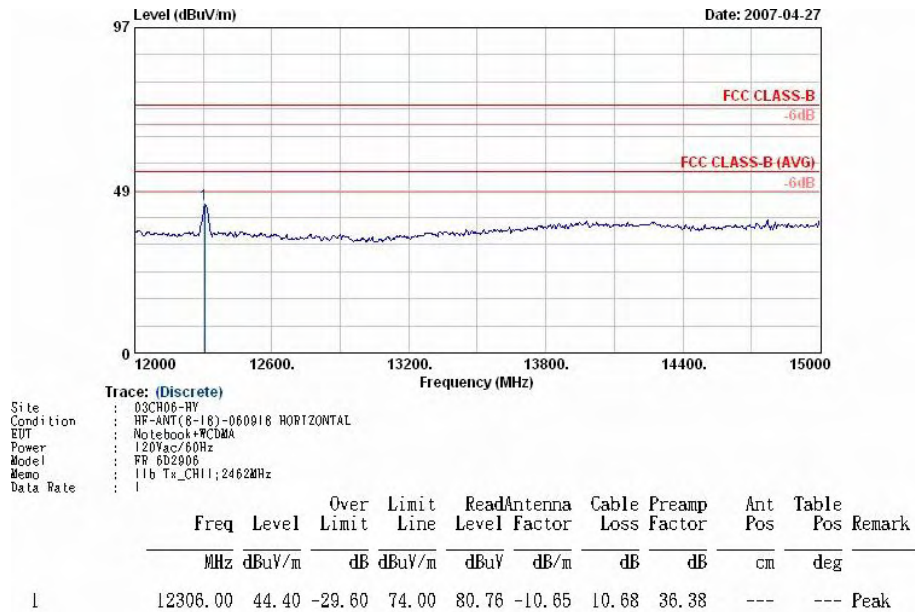



FCC / IC TEST REPORT

Report No. : FR6D2906-A

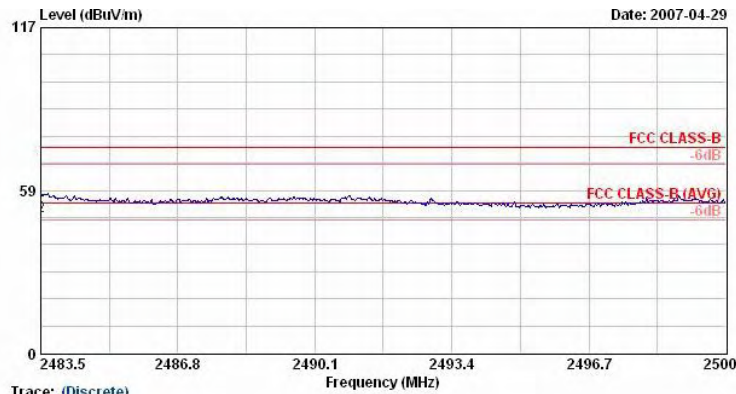


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11b Tx_CH11;2462MHz
Data Rate : 1


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2483.50	57.36	-16.64	74.00	58.72	30.29	3.86	35.51	100	360 Peak
2 !	2483.50	49.14	-4.86	54.00	50.50	30.29	3.86	35.51	100	268 Average




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

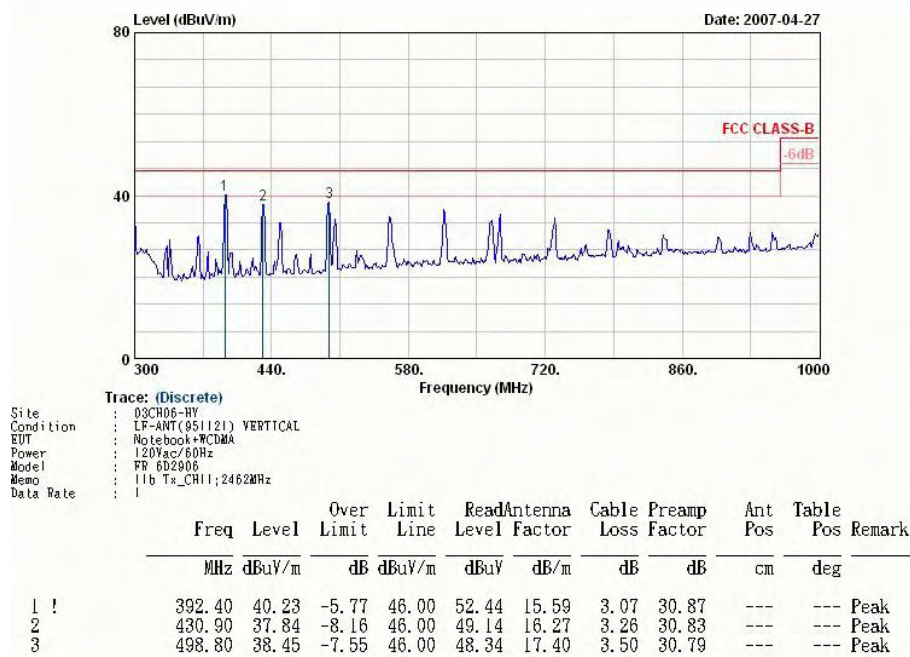

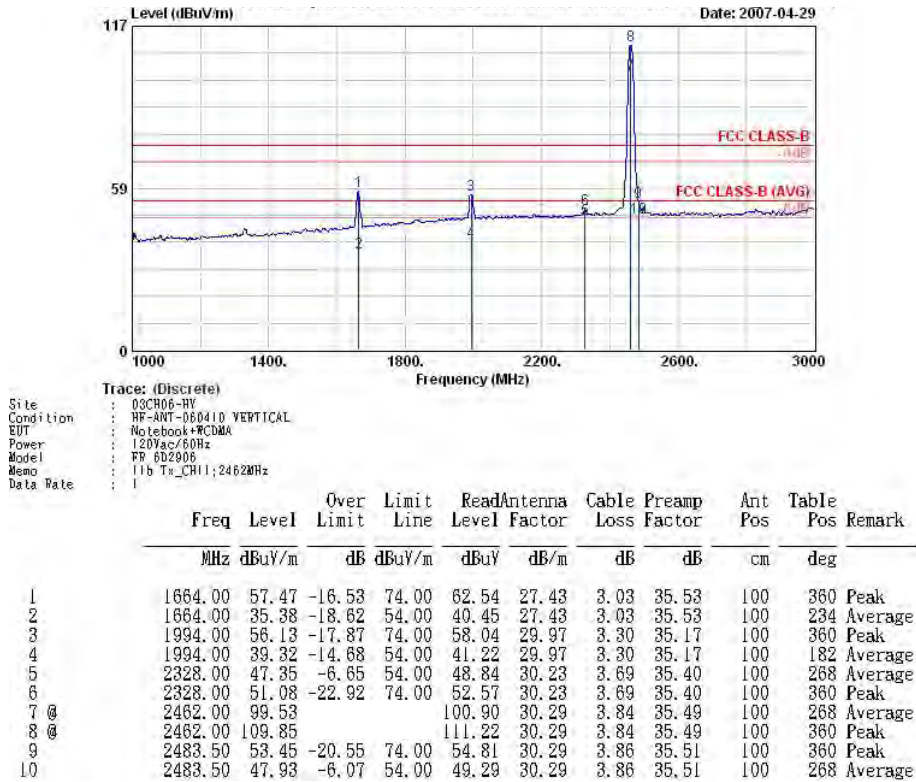


Remark: #7 and #8 Fundamental Signal

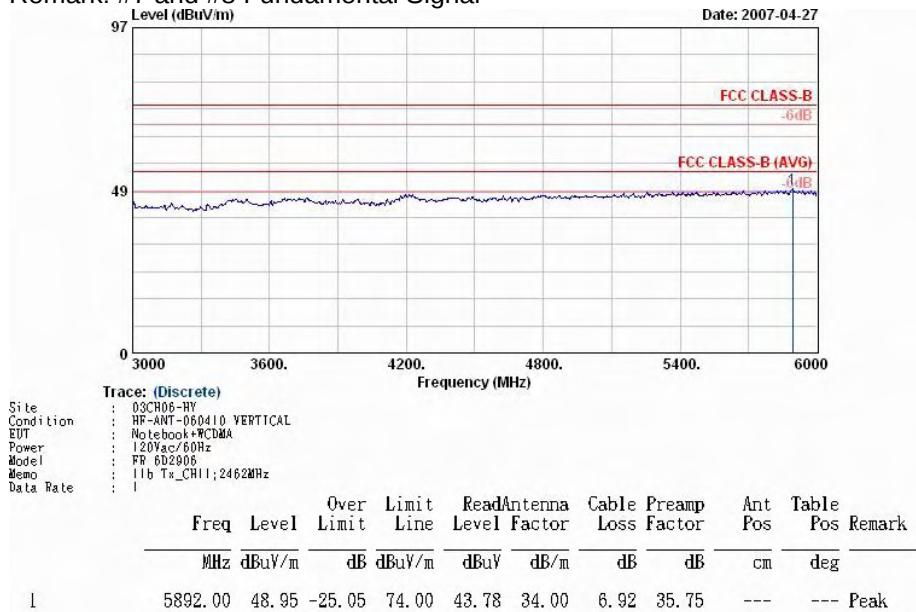




FCC / IC TEST REPORT

Report No. : FR6D2906-A

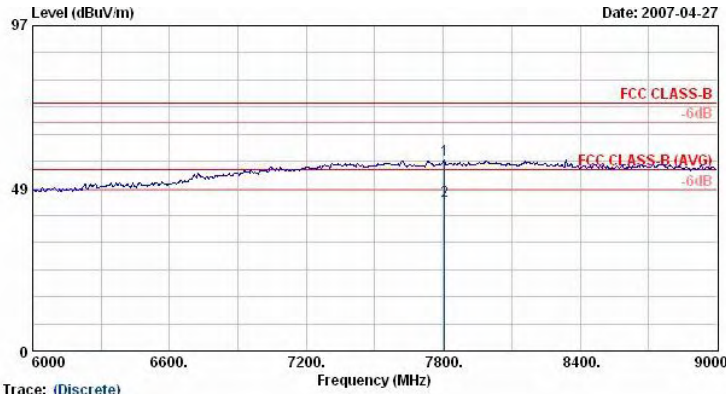

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7806.00	56.96	-17.04	74.00	45.85	39.32	7.72	35.92	100	360 Peak
2	7806.00	44.58	-9.42	54.00	33.46	39.32	7.72	35.92	100	146 Average


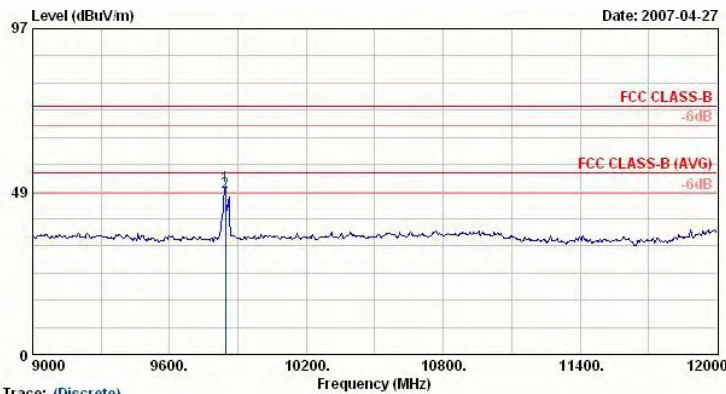


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	9846.00	49.95	-24.05	74.00	86.94	-9.63	9.18	36.54	100	360 Peak
2 !	9846.00	48.17	-5.83	54.00	85.16	-9.63	9.18	36.54	124	251 Average



FCC / IC TEST REPORT


Report No. : FR6D2906-A

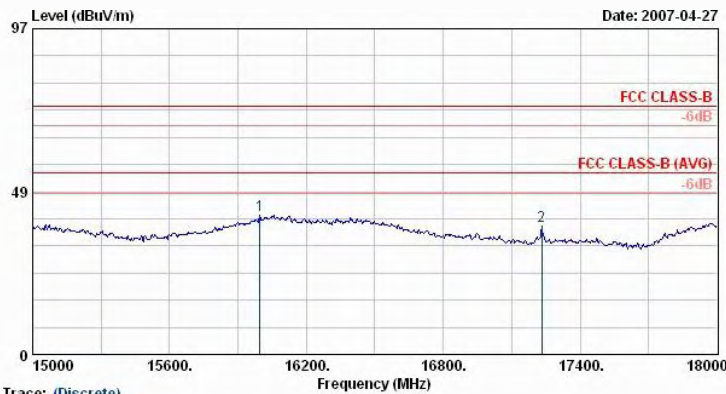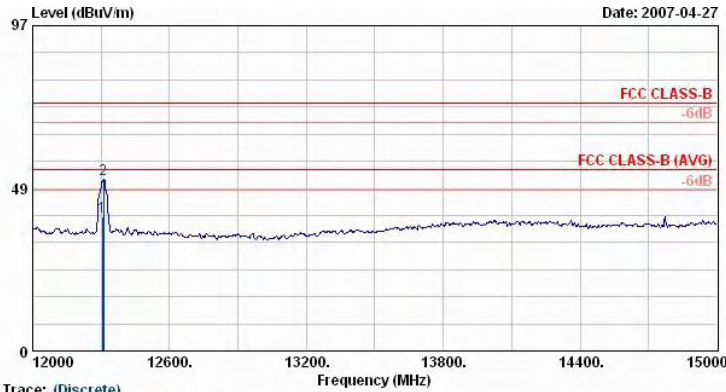



FCC / IC TEST REPORT

Report No. : FR6D2906-A


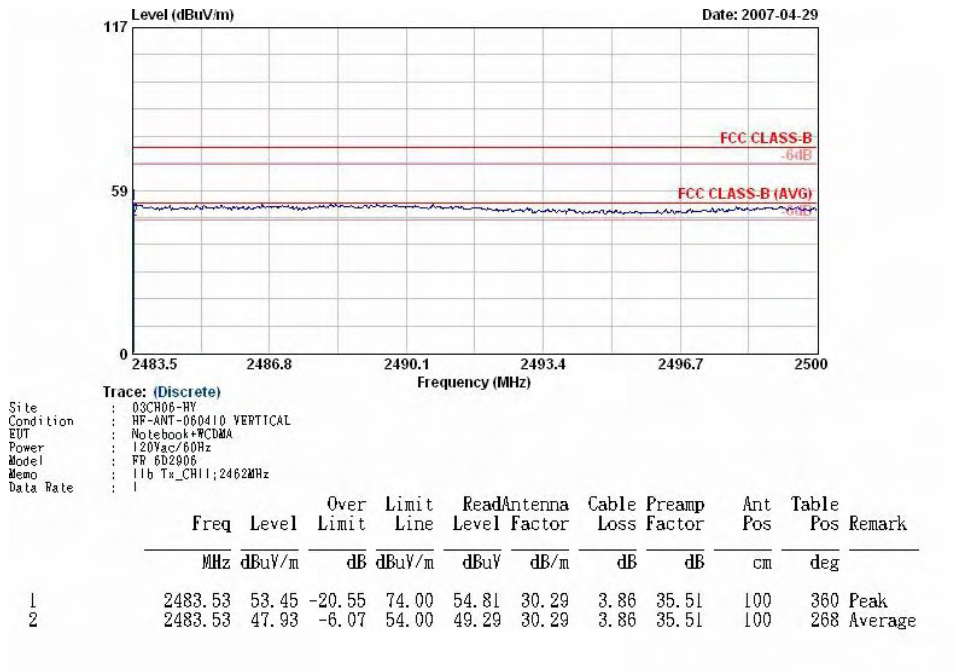



Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.



- Test Mode : Mode 4
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

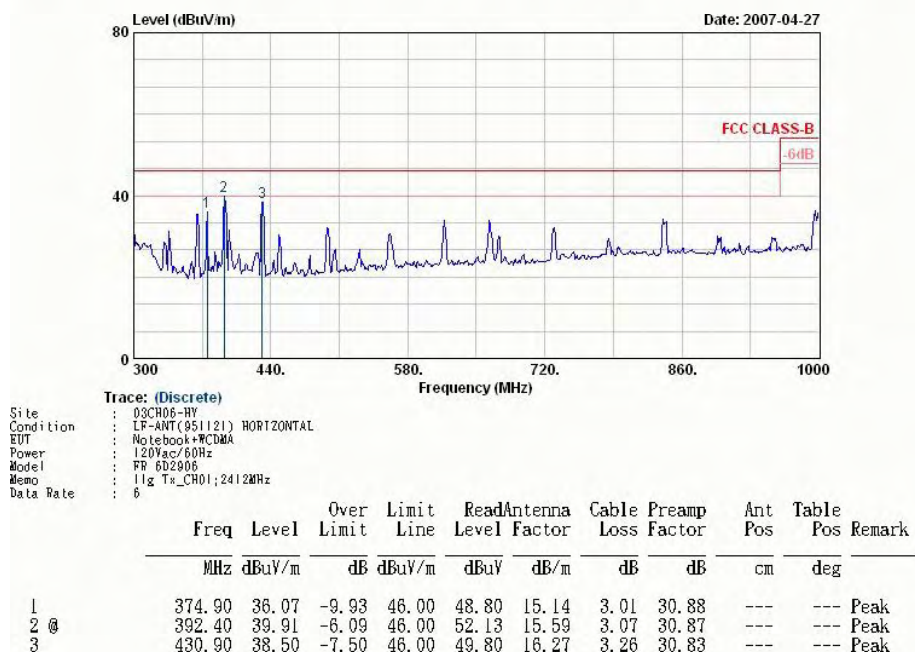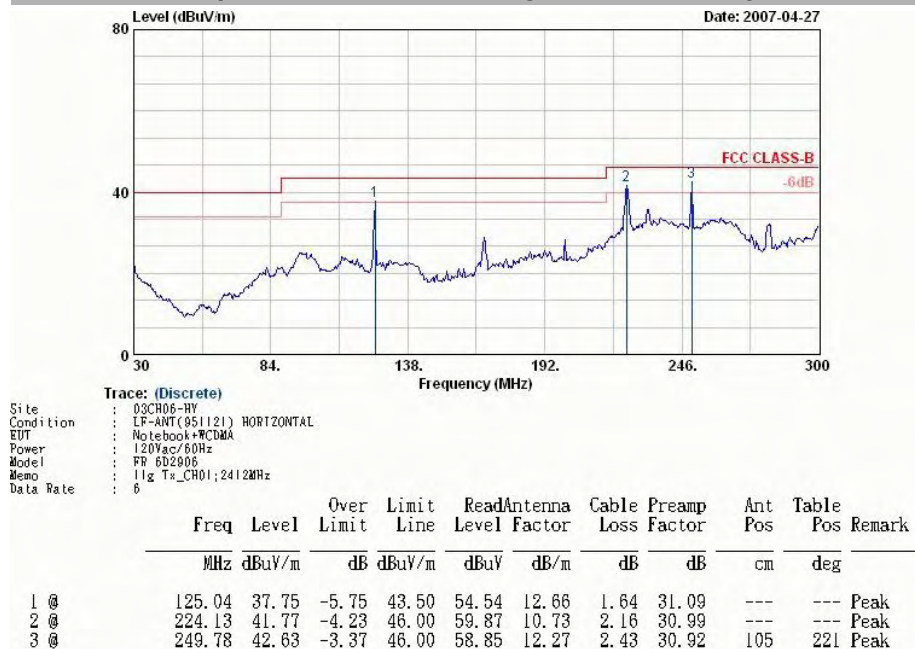


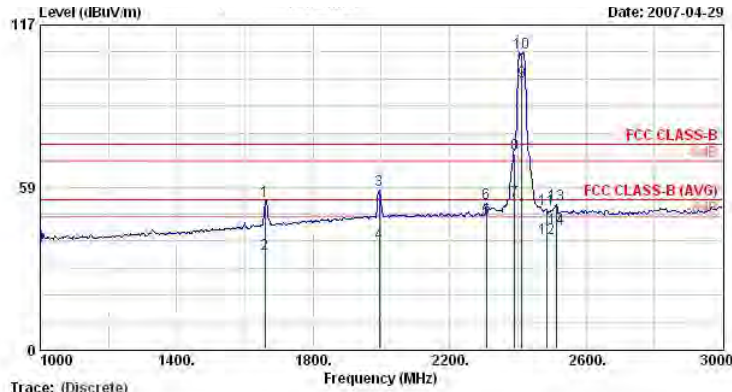

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+HCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6
16,5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1658.00	53.50	-20.50	74.00	58.58	27.43	3.03	35.53	100	360 Peak
2	1658.00	34.53	-19.47	54.00	39.60	27.43	3.03	35.53	100	96 Average
3	1994.00	57.28	-16.72	74.00	59.18	29.97	3.30	35.17	100	360 Peak
4	1994.00	38.29	-15.71	54.00	40.19	29.97	3.30	35.17	104	176 Average
5	2308.00	46.98	-7.02	54.00	48.48	30.22	3.66	35.39	100	248 Average
6	2308.00	52.52	-21.48	74.00	54.02	30.22	3.66	35.39	100	360 Peak
7 @	2389.92	53.60	-0.40	54.00	55.05	30.26	3.75	35.46	100	248 Average
8 @	2389.92	70.60	-3.40	74.00	72.05	30.26	3.75	35.46	100	360 Peak
9 @	2412.00	96.55			97.97	30.27	3.77	35.46	100	248 Average
10 @	2412.00	107.11			108.52	30.27	3.79	35.47	100	360 Peak
11	2484.00	50.48	-23.52	74.00	51.84	30.29	3.86	35.51	100	360 Peak
12	2484.00	40.17	-13.83	54.00	41.53	30.29	3.86	35.51	100	248 Average
13	2514.00	52.17	-21.83	74.00	53.52	30.28	3.90	35.53	100	360 Peak
14	2514.00	43.64	-10.36	54.00	44.99	30.28	3.90	35.53	100	248 Average

Remark: #9 and #10 Fundamental Signal

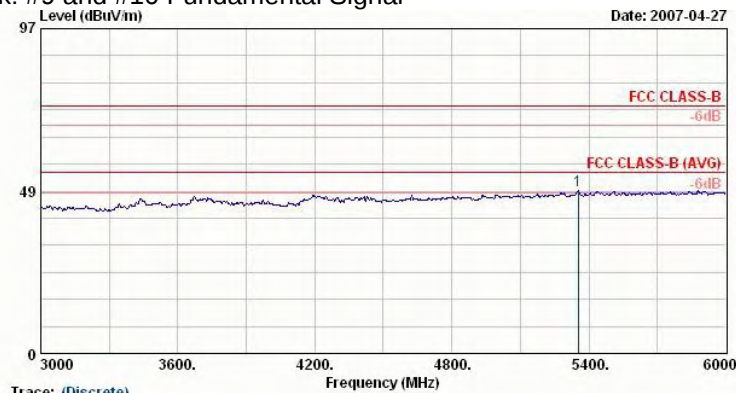



Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+HCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	5352.00	48.76	-25.24	74.00	44.64	33.60	6.59	36.08	---	---	Peak



FCC / IC TEST REPORT


Report No. : FR6D2906-A

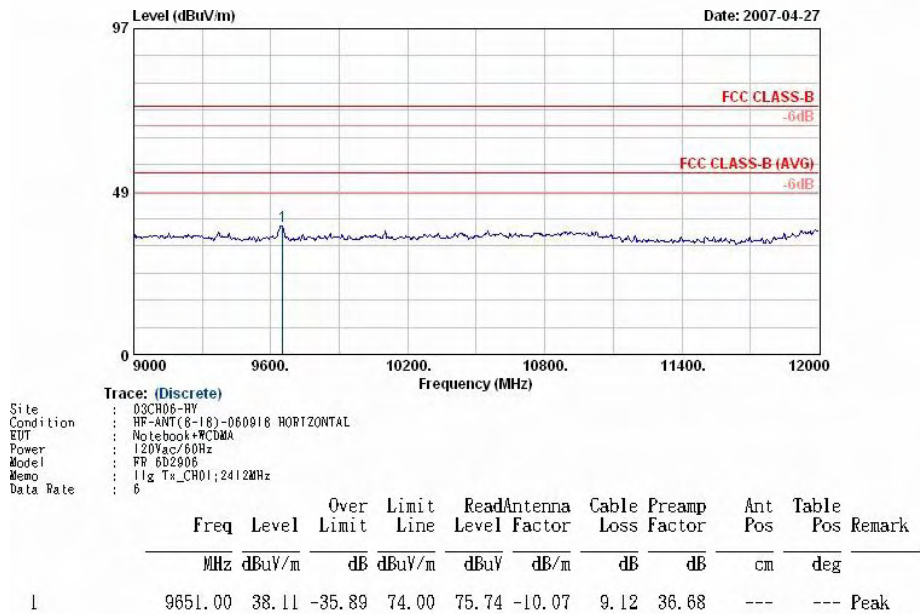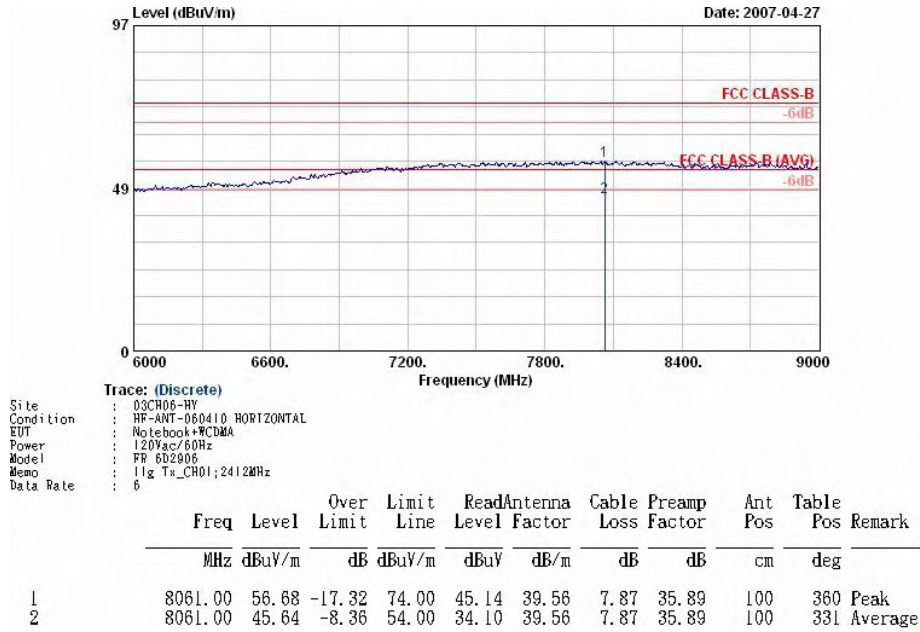




FCC / IC TEST REPORT

Report No. : FR6D2906-A

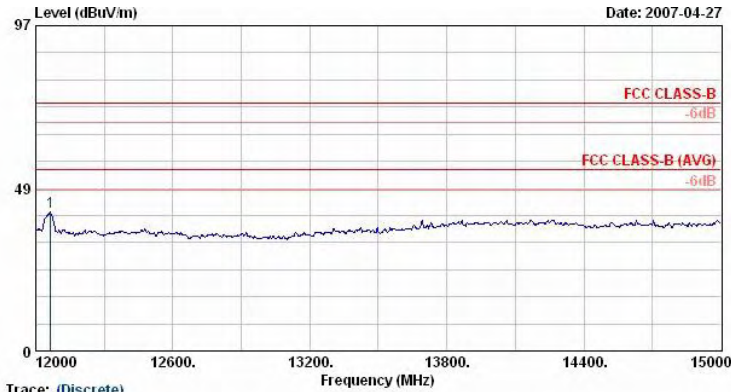

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	12066.00	41.38	-32.62	74.00	77.13	-9.84	10.65	36.56	---	---	Peak

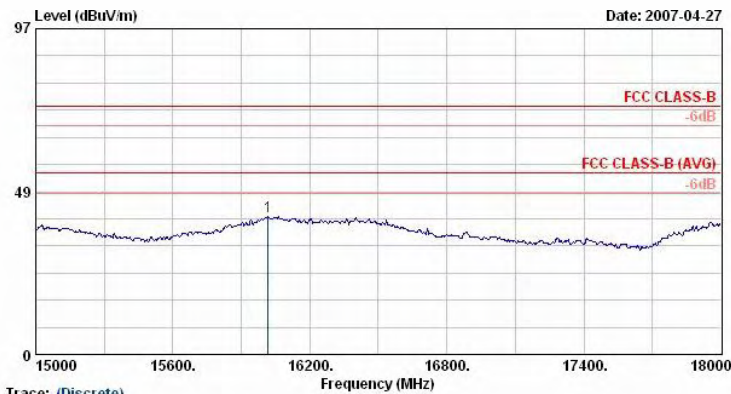


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	16017.00	41.16	-32.84	74.00	69.66	-4.15	11.77	36.13	---	---	Peak



FCC / IC TEST REPORT

Report No. : FR6D2906-A

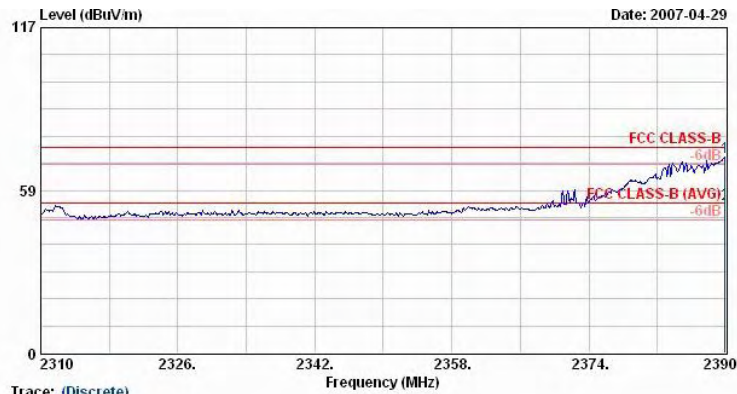

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01; 2412MHz
Data Rate : 6
: 16.5


16.5

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2389.92	70.65	-3.35	74.00	72.10	30.26	3.75	35.46	---	---
2 @	2389.92	53.60	-0.40	54.00	55.05	30.26	3.75	35.46	100	304
										Peak Average



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

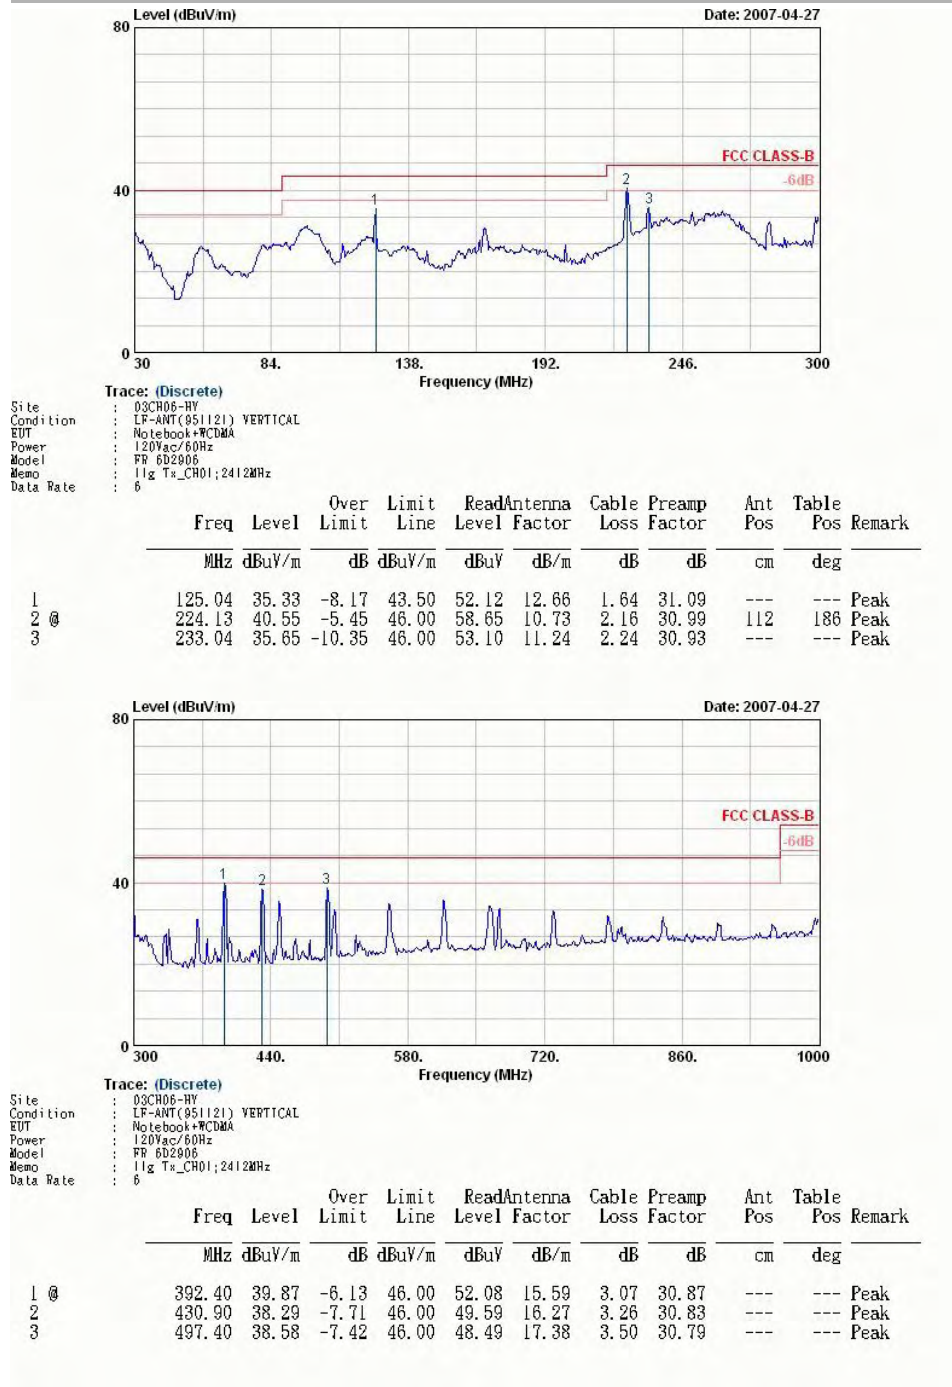



FCC / IC TEST REPORT


Report No. : FR6D2906-A

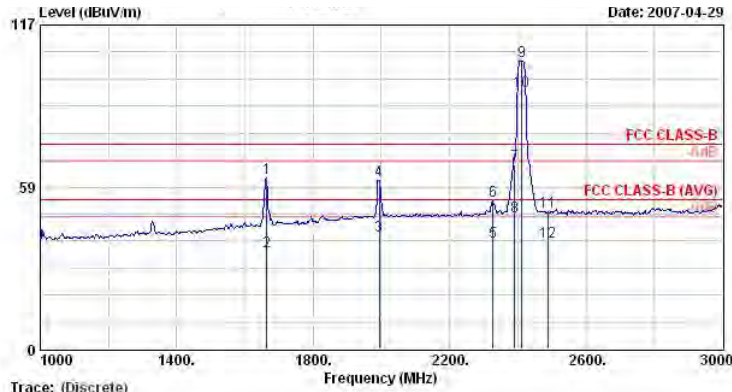

Trace: (Discrete)
Site : 03CH06-HV
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6
16.5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1664.00	61.65	-12.35	74.00	66.72	27.43	3.03	35.53	100	360 Peak
2	1664.00	35.33	-18.67	54.00	40.40	27.43	3.03	35.53	100	242 Average
3	1994.00	41.09	-12.91	54.00	42.99	29.97	3.30	35.17	100	310 Average
4	1994.00	60.99	-13.01	74.00	62.89	29.97	3.30	35.17	100	360 Peak
5	2328.00	38.55	-15.45	54.00	40.04	30.23	3.69	35.40	100	119 Average
6	2328.00	53.64	-20.36	74.00	55.13	30.23	3.69	35.40	100	360 Peak
7	2389.92	66.52	-7.48	74.00	67.97	30.26	3.75	35.46	100	360 Peak
8	2389.92	47.71	-6.29	54.00	49.16	30.26	3.75	35.46	100	269 Average
9 @	2412.00	104.16			105.58	30.27	3.77	35.46	100	360 Peak
10 @	2412.00	93.24			94.66	30.27	3.77	35.46	100	269 Average
11	2488.00	49.59	-24.41	74.00	50.95	30.30	3.86	35.51	100	360 Peak
12	2488.00	38.77	-15.23	54.00	40.12	30.30	3.86	35.51	100	269 Average

Remark: #9 and #10 Fundamental Signal

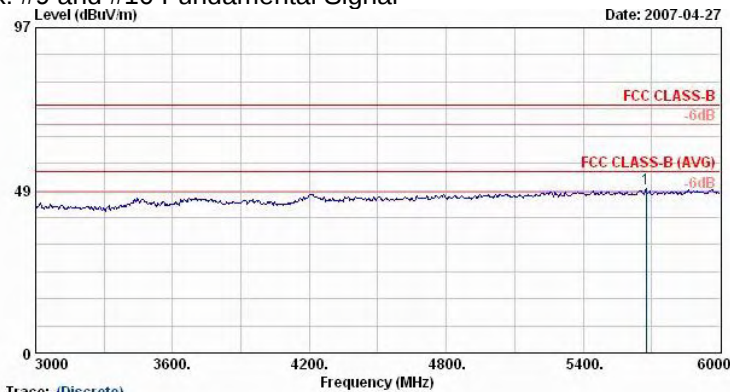


Trace: (Discrete)
Site : 03CH06-HV
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	5676.00	49.06	-24.94	74.00	44.29	33.77	6.89	35.90	---	--- Peak




FCC / IC TEST REPORT

Report No. : FR6D2906-A

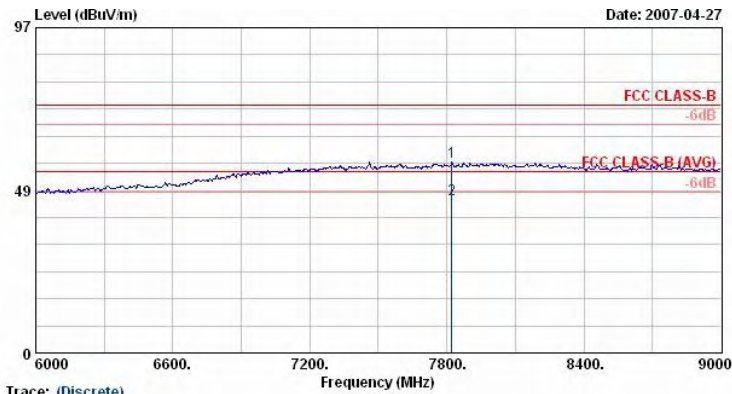

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	7821.00	56.83	-17.17	74.00	45.69	39.34	7.73	35.92	100	360 Peak
2	7821.00	45.65	-8.35	54.00	34.50	39.34	7.73	35.92	100	229 Average

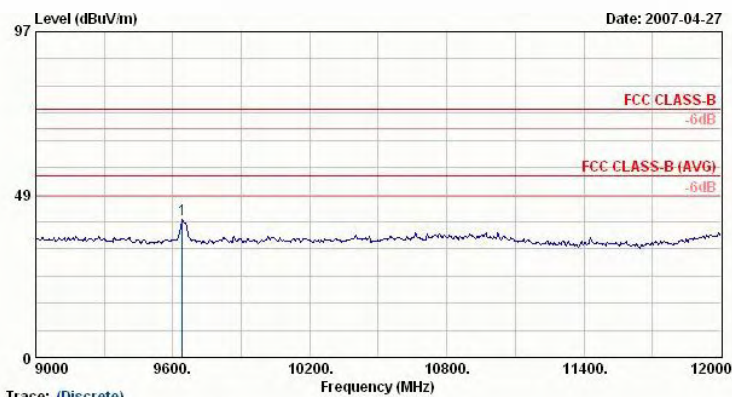


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 VERTICAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

Data Rate		: 6											
	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable Preamp	Ant Table	Ant Table	Pos	Pos	Remark		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg			
1	9642.00	41.08	-32.92	74.00	78.73	-10.09	9.12	36.68	---	---	Peak		




FCC / IC TEST REPORT

Report No. : FR6D2906-A

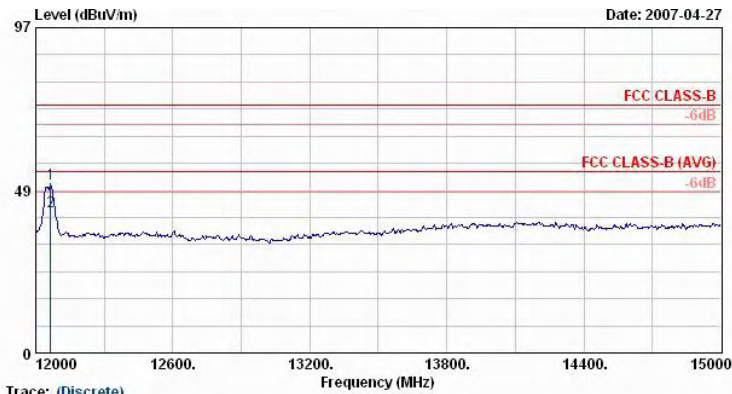

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 VERTICAL
EUT : Notebook+HCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	12066.00	50.46	-23.54	74.00	86.21	-9.84	10.65	36.56	100	0 Peak
2	12066.00	42.10	-11.90	54.00	77.85	-9.84	10.65	36.56	100	82 Average

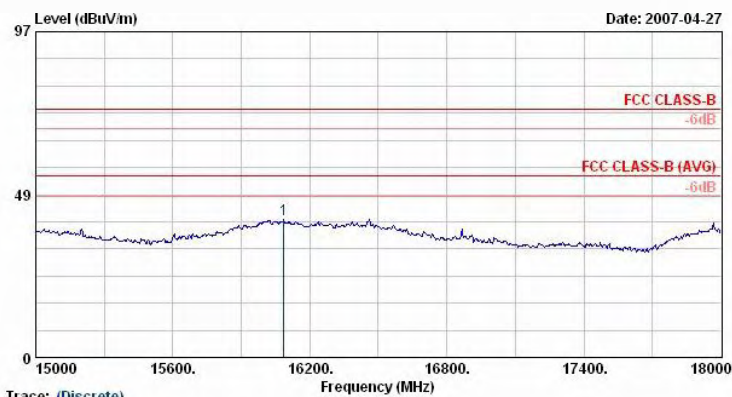


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 VERTICAL
EUT : Notebook+HCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH01;2412MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	16086.00	41.04	-32.96	74.00	69.50	-5.02	11.79	35.24	---	Peak



FCC / IC TEST REPORT

Report No. : FR6D2906-A


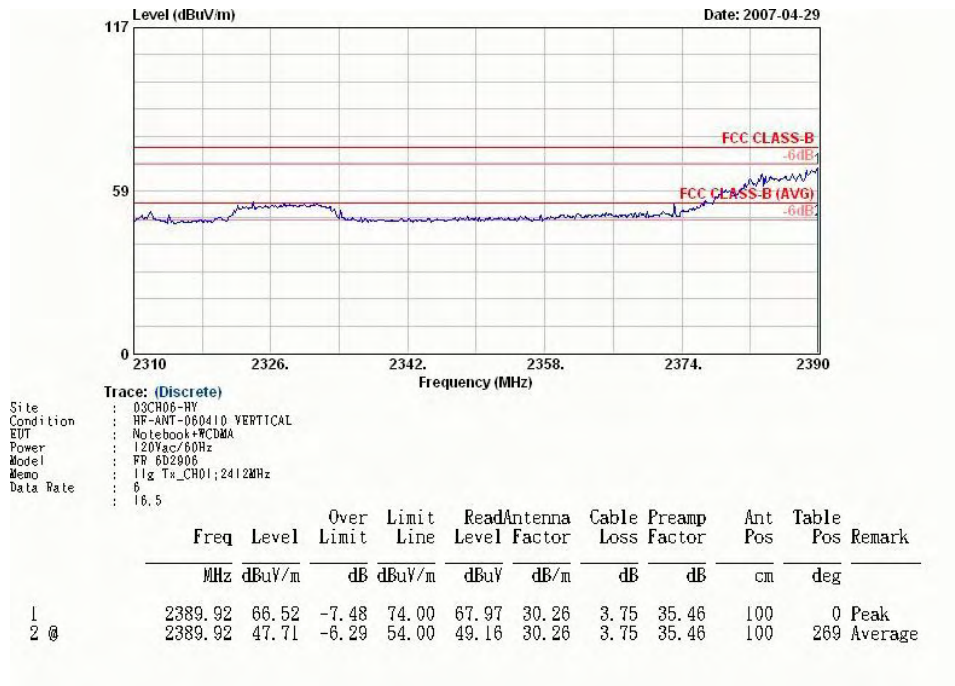


Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.



- Test Mode : Mode 5
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

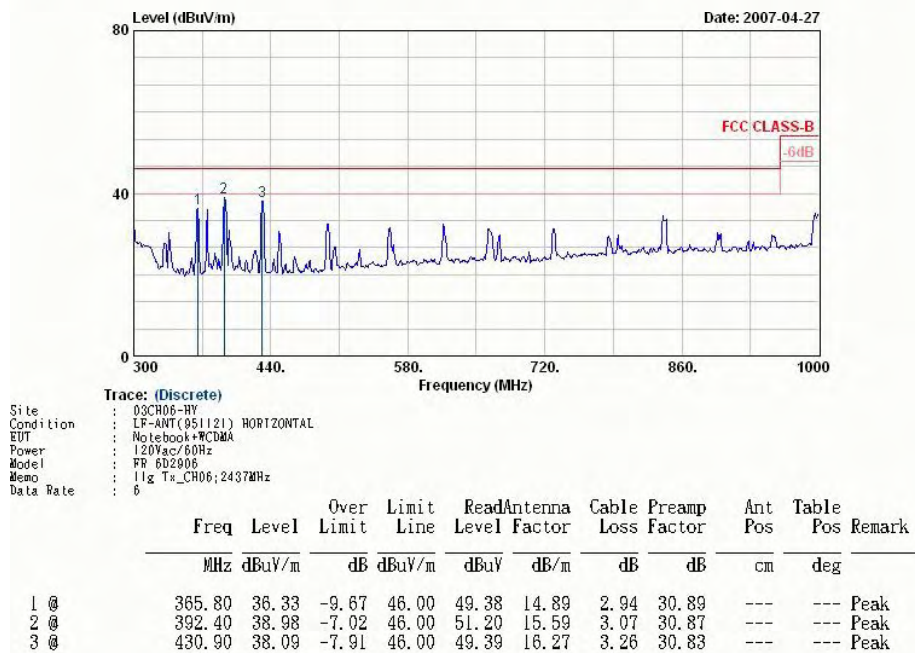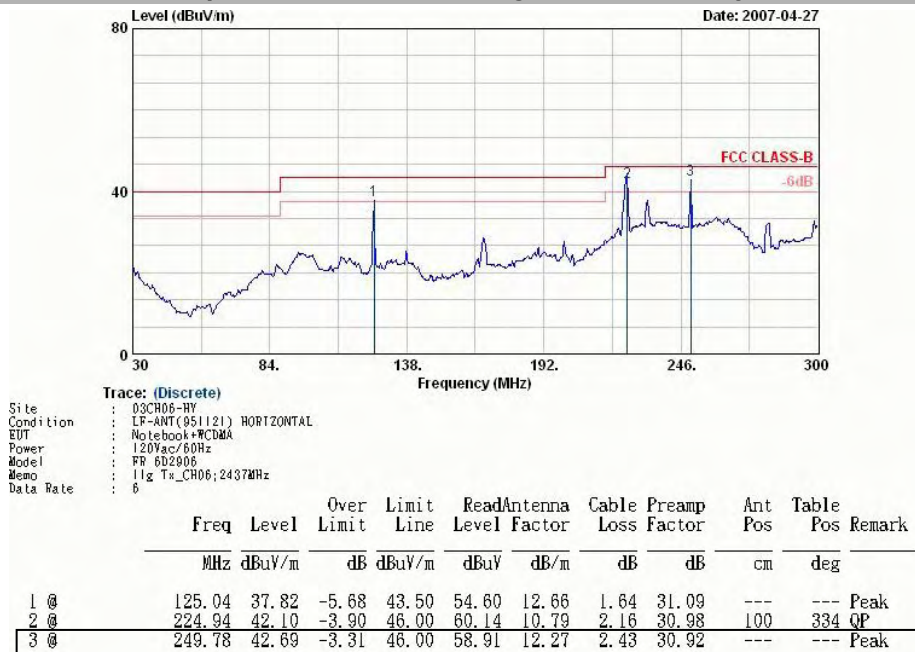



FCC / IC TEST REPORT


Report No. : FR6D2906-A

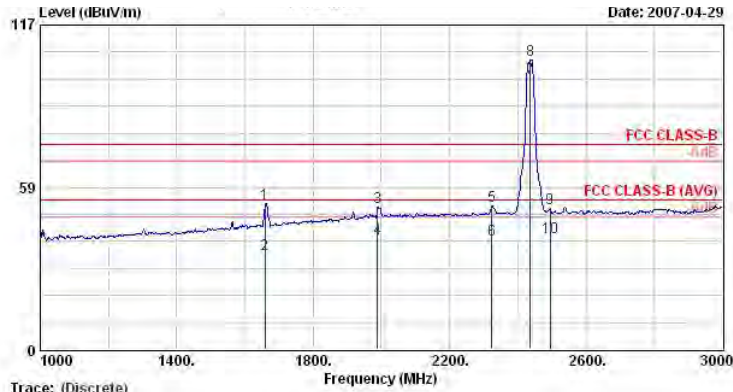

Trace: (Discrete)
Site : D3CH06-HV
Condition : HP-ANT-060410 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH06;2437MHz
Data Rate : 6
16.5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	1658.00	52.63	-21.37	74.00	57.70	27.43	3.03	35.53	100	360
2 @	1658.00	34.53	-19.47	54.00	39.60	27.43	3.03	35.53	100	96
3 @	1988.00	51.52	-22.48	74.00	53.43	29.97	3.30	35.17	100	360
4 @	1988.00	39.86	-14.14	54.00	41.76	29.97	3.30	35.17	100	177
5 @	2324.00	51.90	-22.10	74.00	53.38	30.23	3.69	35.40	100	360
6 @	2324.00	39.57	-14.43	54.00	41.06	30.23	3.69	35.40	100	248
7 @	2437.00	97.77			99.15	30.28	3.82	35.47	100	248
8 @	2437.00	104.59			105.97	30.28	3.82	35.47	100	360
9 @	2494.00	50.72	-23.28	74.00	52.07	30.30	3.88	35.53	100	360
10 @	2494.00	40.42	-13.58	54.00	41.77	30.30	3.88	35.53	100	248

Remark: #7 and #8 Fundamental Signal

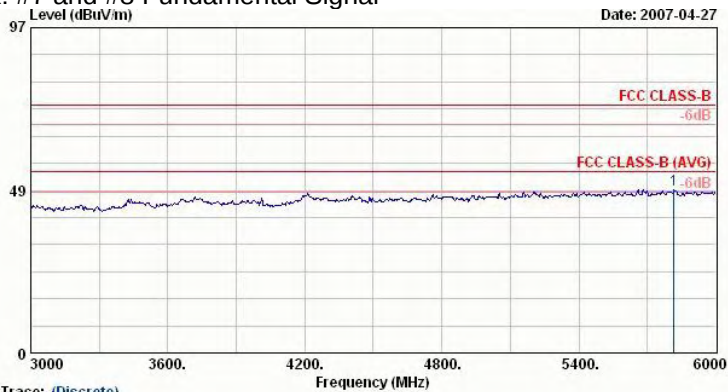


Trace: (Discrete)
Site : D3CH06-HV
Condition : HP-ANT-060410 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	5817.00	48.56	-25.44	74.00	43.53	33.91	6.92	35.80	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-A

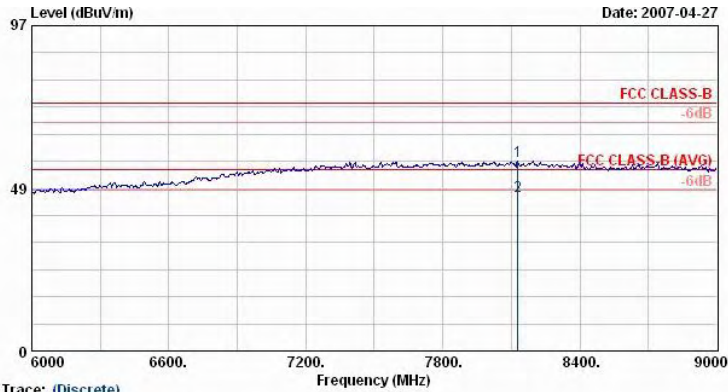

Trace: (Discrete)
Site : D3CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : I1g Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	8127.00	56.53	-17.47	74.00	45.01	39.50	7.94	35.91	100	360 Peak
2 @	8127.00	46.21	-7.79	54.00	34.69	39.50	7.94	35.91	100	198 Average

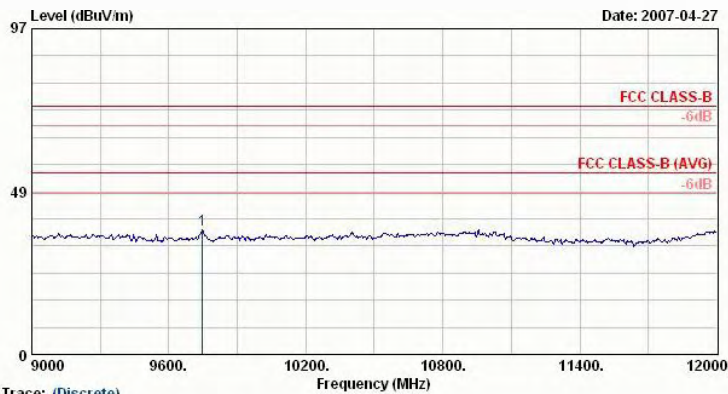


Trace: (Discrete)
Site : D3CH06-HY
Condition : HF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : I1g Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	9747.00	37.28	-36.72	74.00	74.59	-9.85	9.15	36.61	---	---



FCC / IC TEST REPORT


Report No. : FR6D2906-A

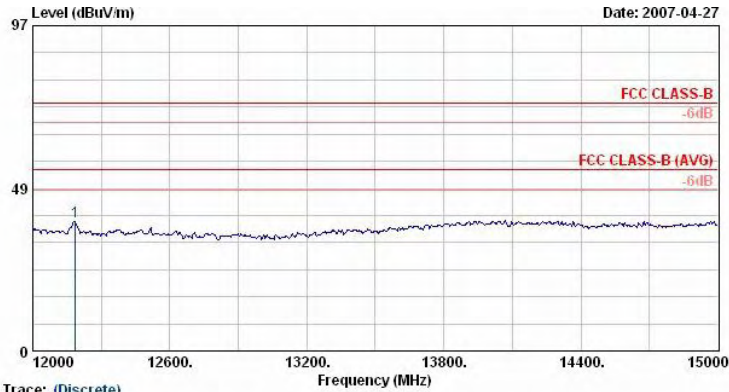

Trace: (Discrete)

Site : D3CH06-HY
Condition : HF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : I1g Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	12186.00	38.49	-35.51	74.00	74.53	-10.25	10.66	36.46	---	---	Peak

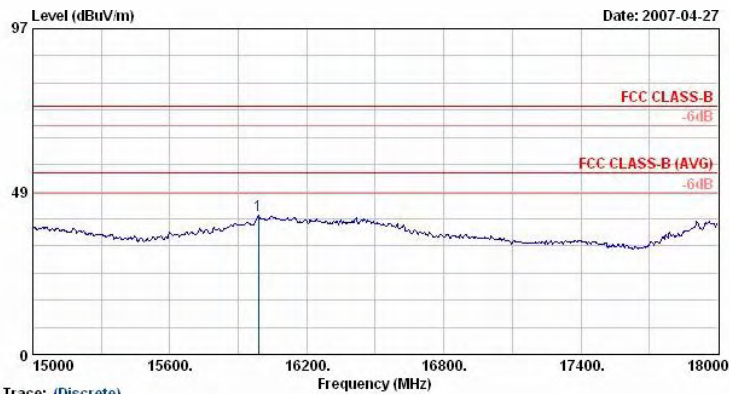

Trace: (Discrete)



Site : D3CH06-HY
Condition : HF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : I1g Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	15987.00	41.39	-32.61	74.00	70.01	-3.97	11.77	36.42	---	---	Peak



FCC / IC TEST REPORT


Report No. : FR6D2906-A

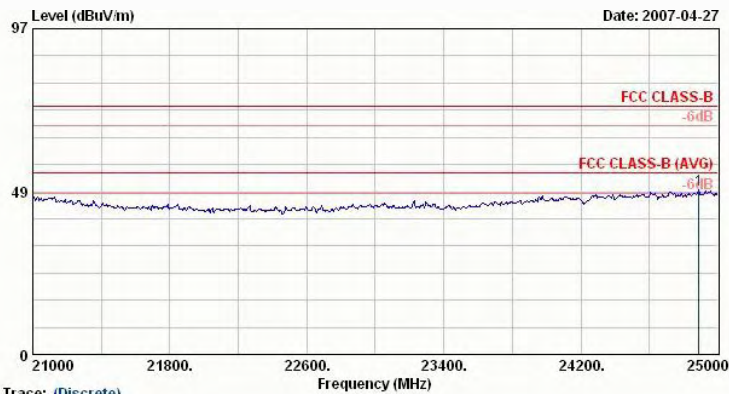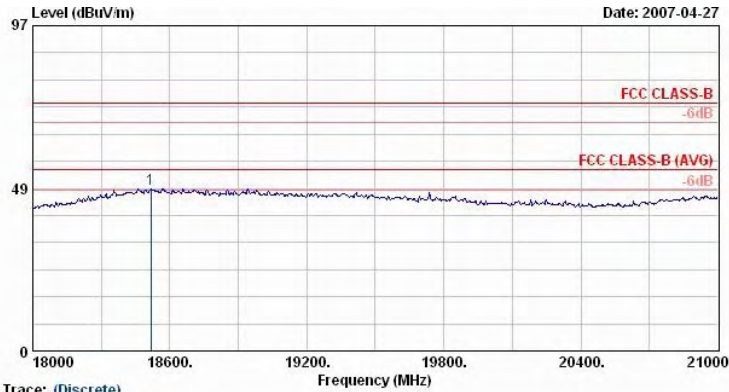




- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

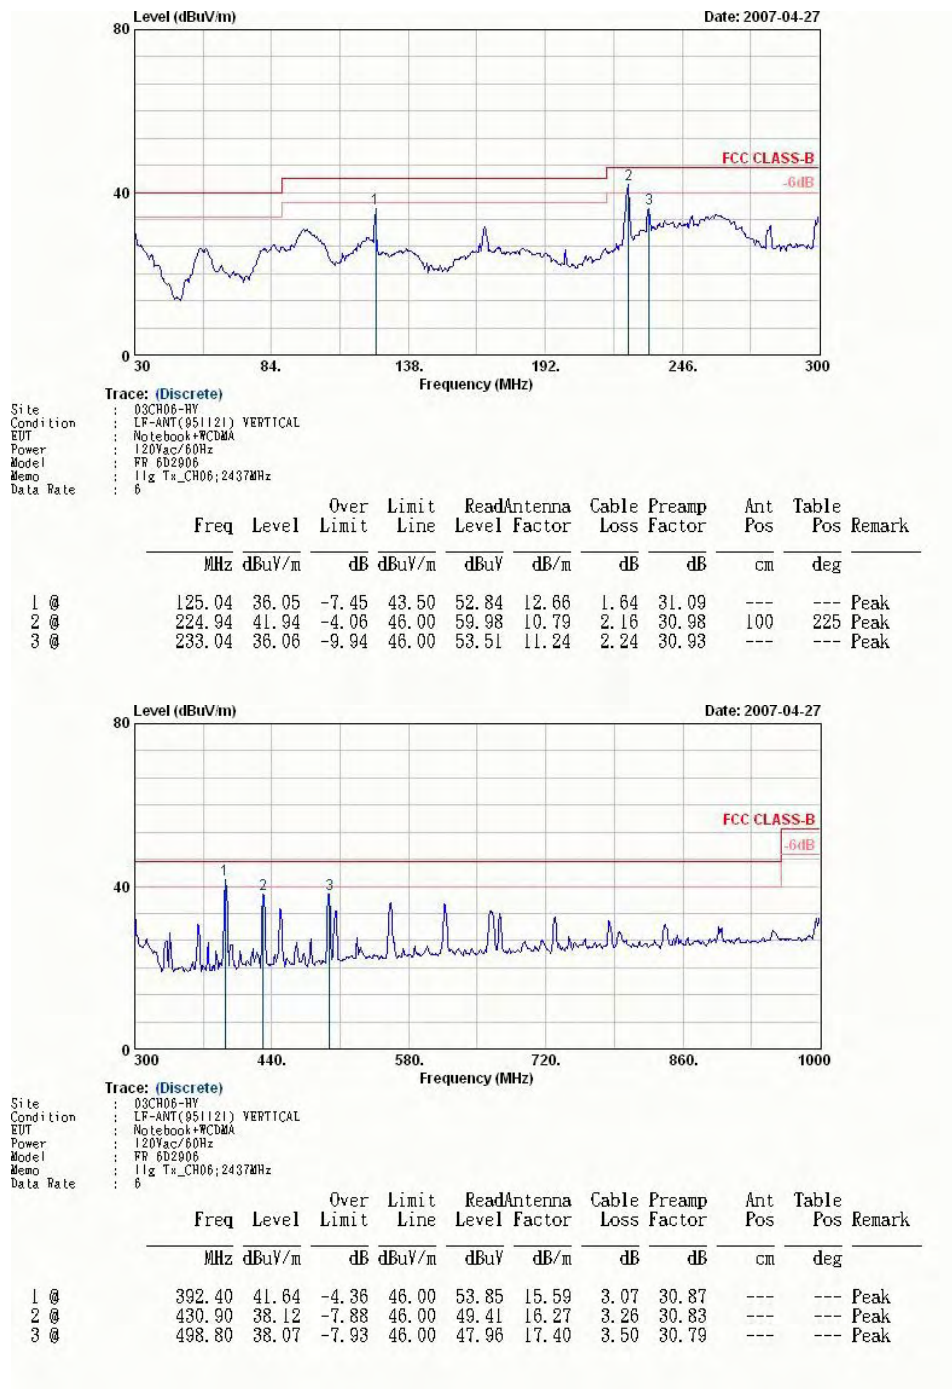


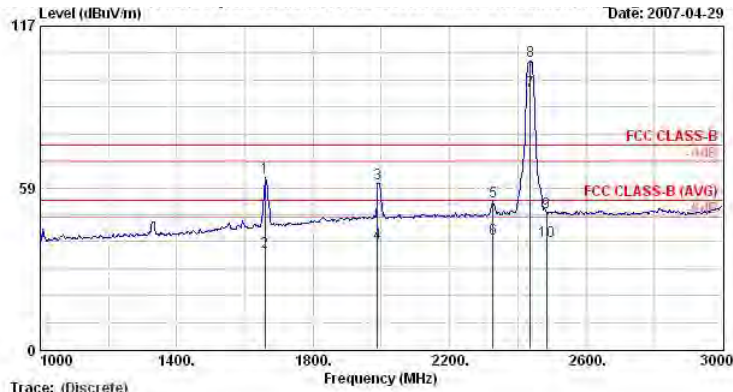

Traces: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : fig Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	
					dBuV	dB/m	dB	cm	deg	
1 @	1658.00	62.06	-11.94	74.00	67.14	27.43	3.03	35.53	100	360 Peak
2 @	1658.00	35.19	-18.81	54.00	40.26	27.43	3.03	35.53	100	242 Average
3 @	1988.00	60.11	-13.89	74.00	62.01	29.97	3.30	35.17	100	360 Peak
4 @	1988.00	38.31	-15.69	54.00	40.21	29.97	3.30	35.17	100	310 Average
5 @	2328.00	53.48	-20.52	74.00	54.97	30.23	3.69	35.40	100	360 Peak
6 @	2328.00	39.80	-14.20	54.00	41.29	30.23	3.69	35.40	100	119 Average
7 @	2437.00	93.45			94.83	30.28	3.82	35.47	100	269 Average
8 @	2437.00	104.30			105.68	30.28	3.82	35.47	100	360 Peak
9 @	2483.50	49.49	-24.51	74.00	50.85	30.29	3.86	35.51	100	360 Peak
10 @	2483.50	39.02	-14.98	54.00	40.38	30.29	3.86	35.51	100	269 Average

Remark: #7 and #8 Fundamental Signal

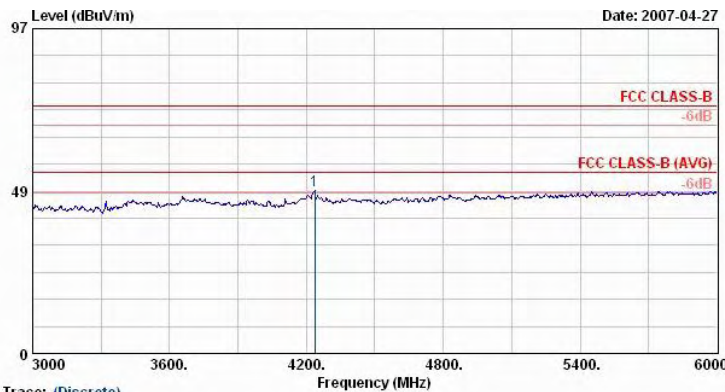



Traces: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : fig Tx_CH06;2437MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	
					dBuV	dB/m	dB	cm	deg	
1	4236.00	48.68	-25.32	74.00	47.74	31.33	5.35	35.74	---	Peak



FCC / IC TEST REPORT


Report No. : FR6D2906-A

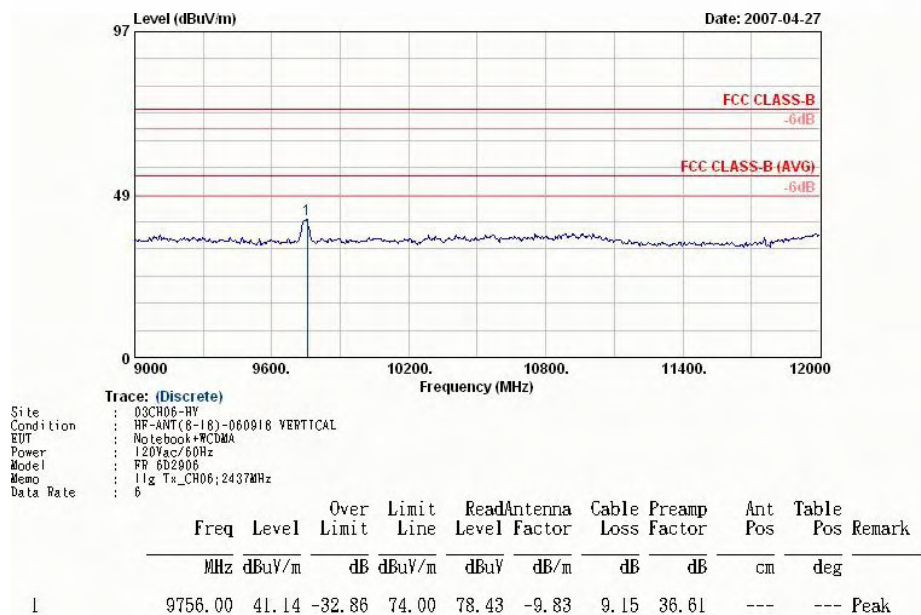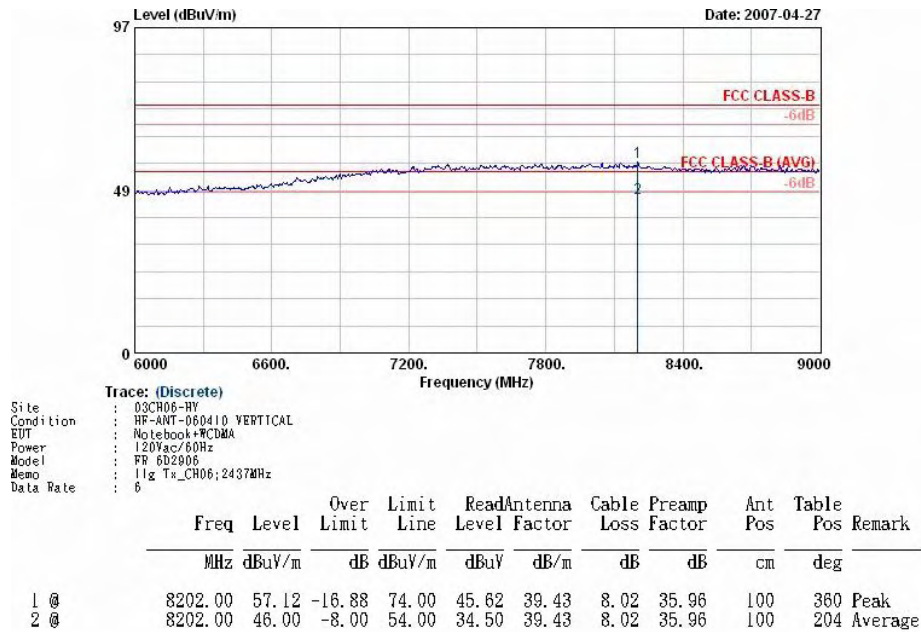



FCC / IC TEST REPORT


Report No. : FR6D2906-A

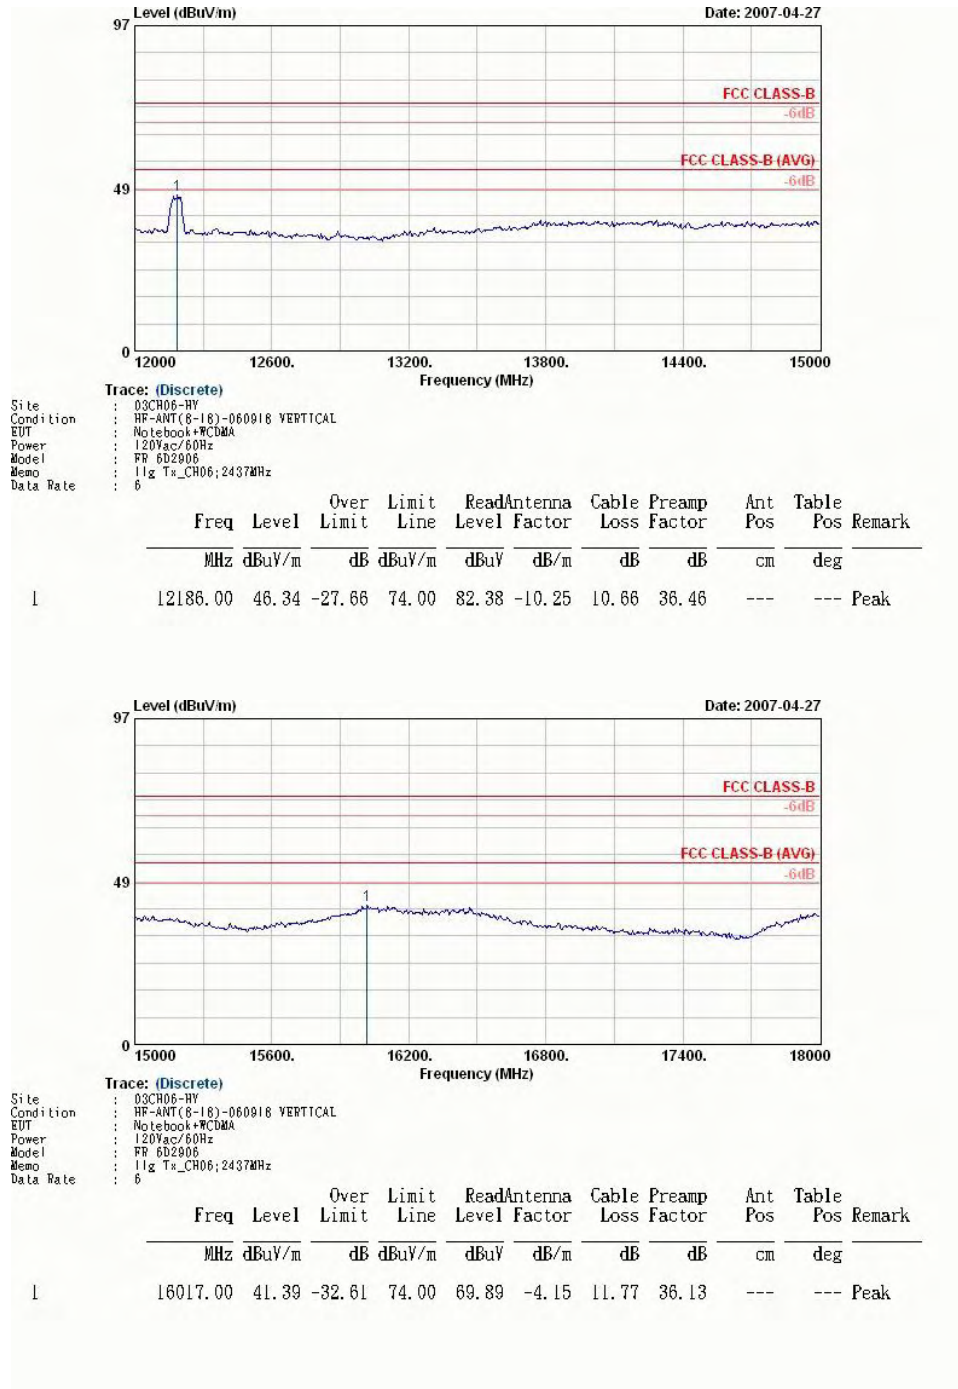



FCC / IC TEST REPORT



Report No. : FR6D2906-A

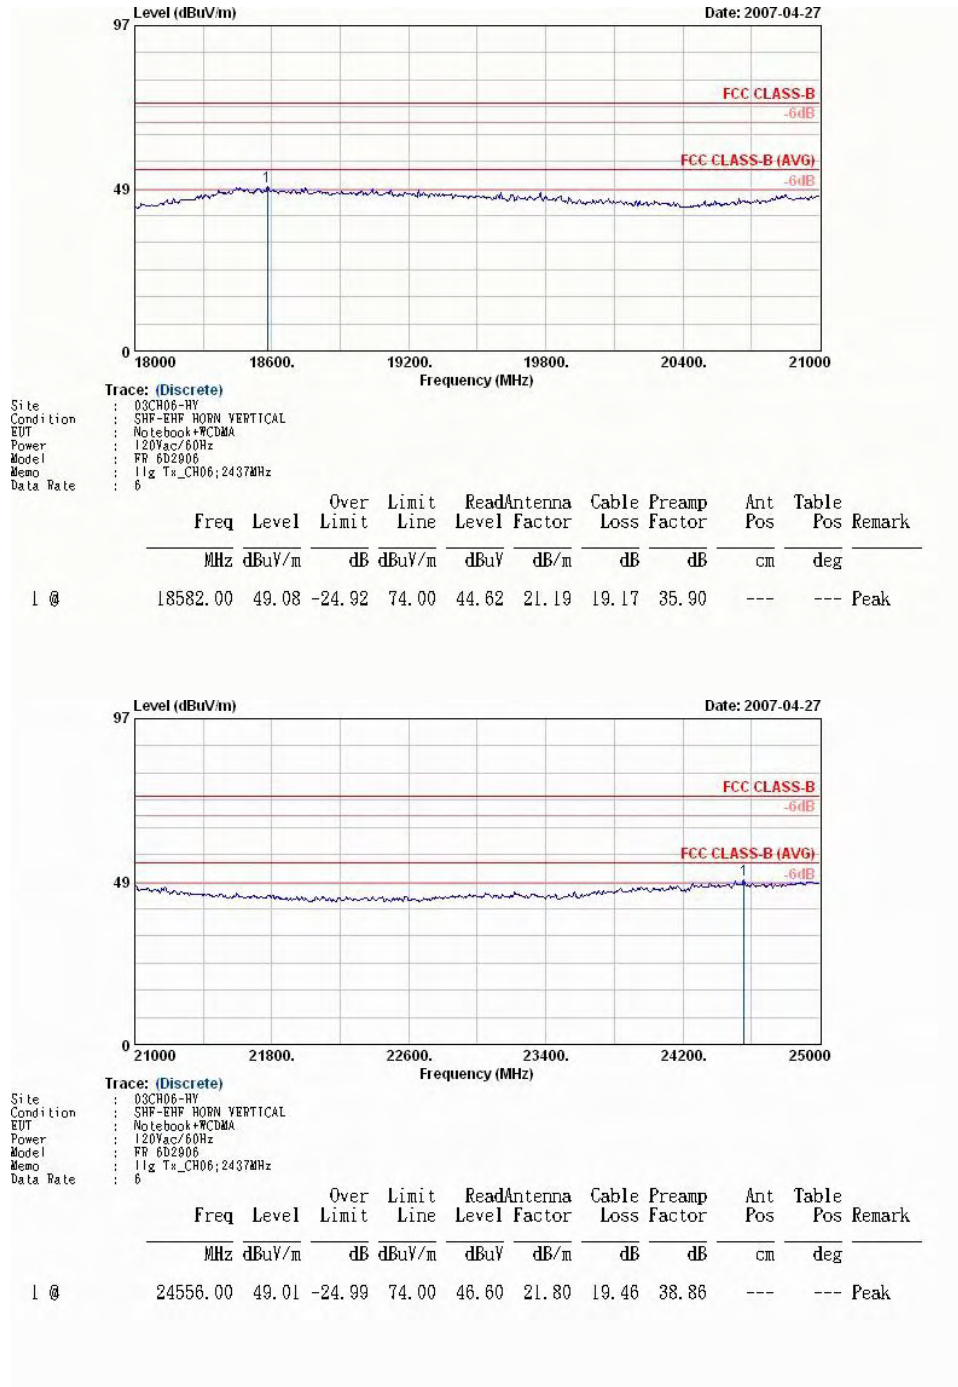



- Test Mode : Mode 6
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

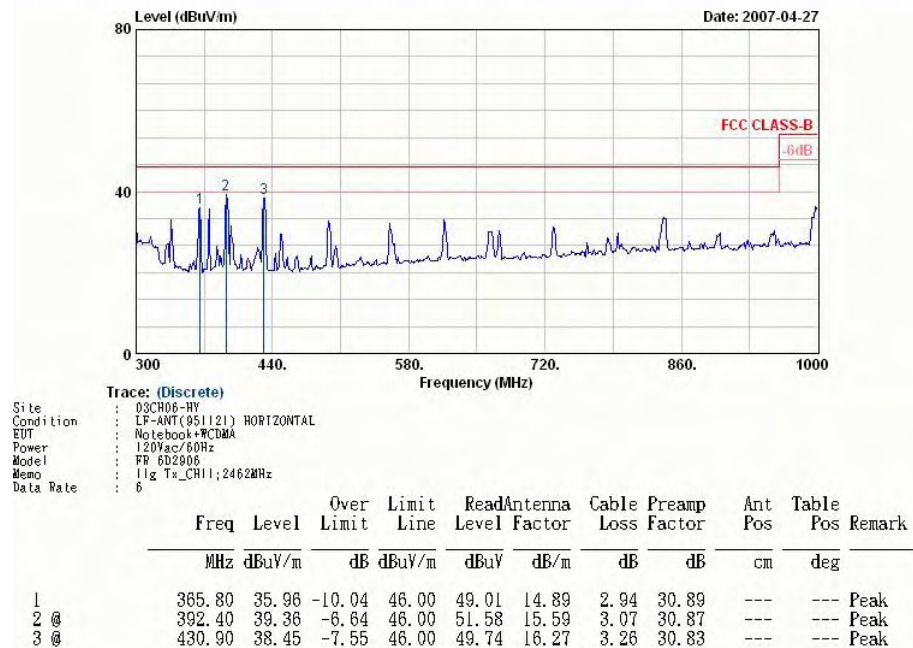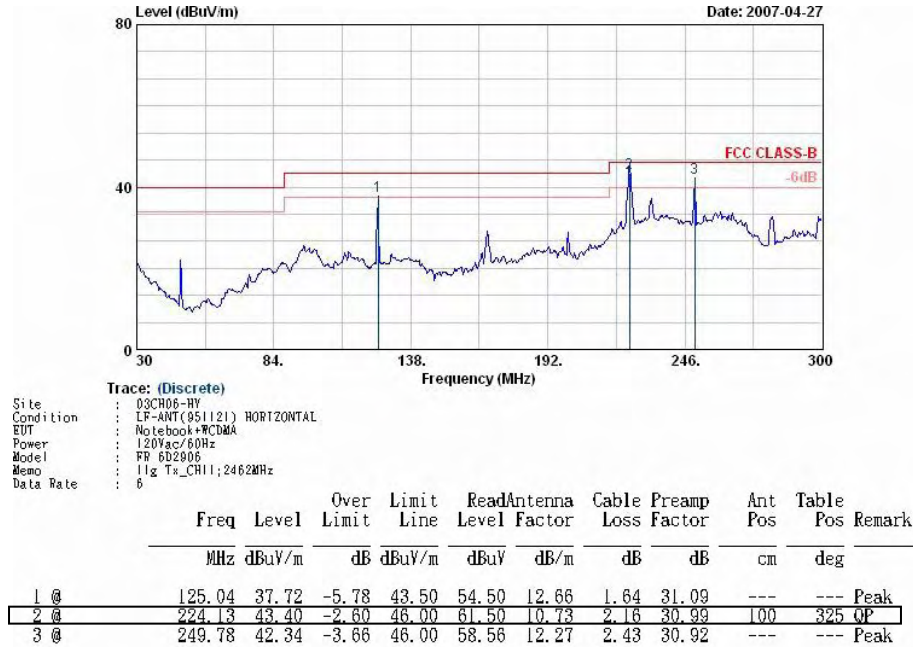




FCC / IC TEST REPORT

Report No. : FR6D2906-A

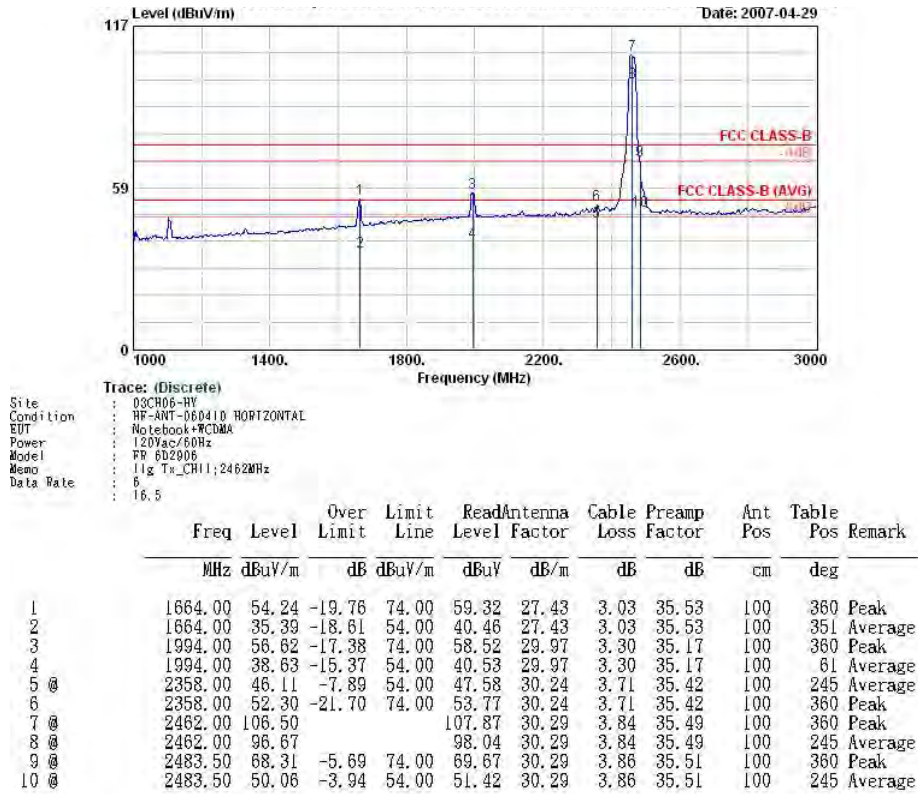


Remark: #7 and #8 Fundamental Signal

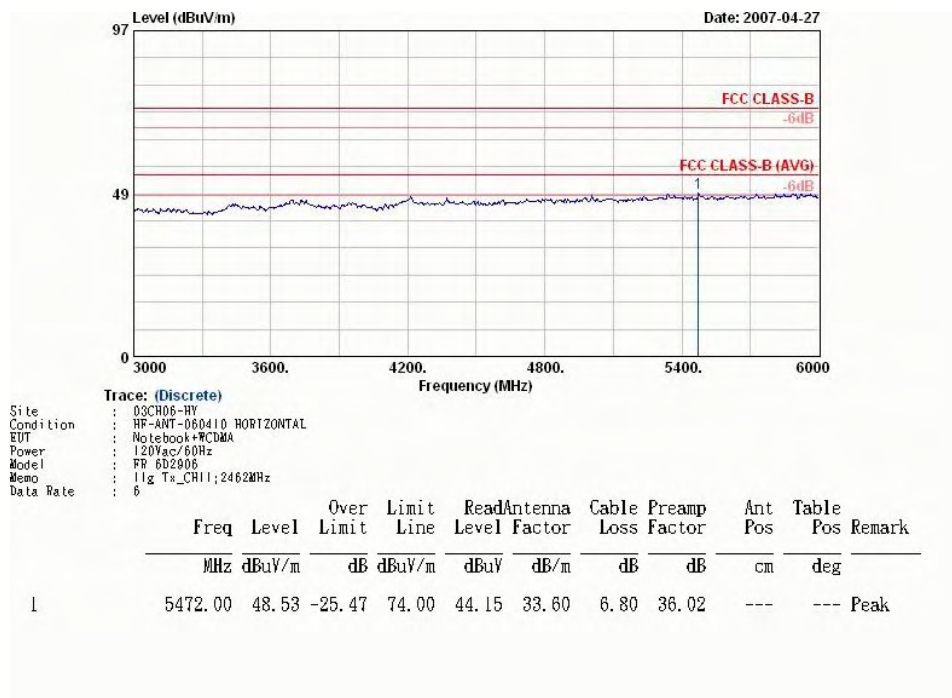




FCC / IC TEST REPORT

Report No. : FR6D2906-A

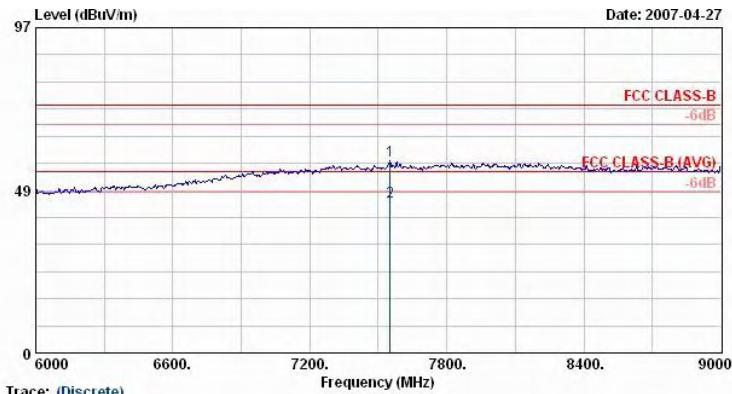

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7551.00	57.47	-16.53	74.00	46.91	38.97	7.63	36.04	100	360 Peak
2 @	7551.00	44.98	-9.02	54.00	34.41	38.97	7.63	36.04	100	208 Average

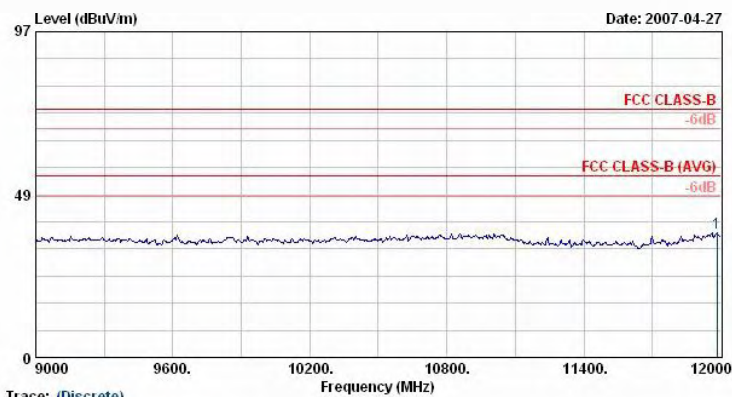


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	11982.00	37.03	-36.97	74.00	72.67	-9.69	10.63	36.58	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-A

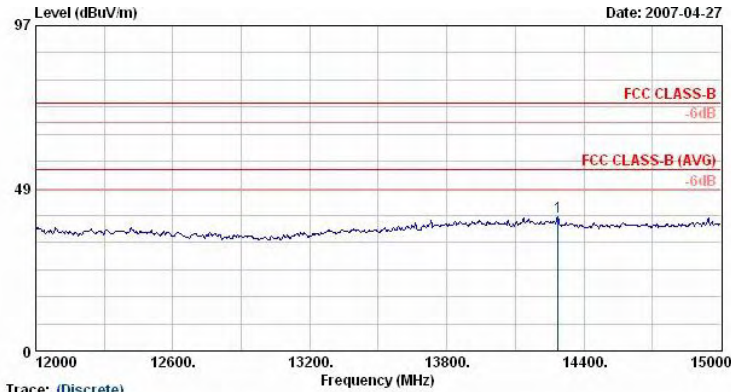

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	14286.00	40.11	-33.89	74.00	69.90	-6.39	11.69	35.09	---	---	Peak

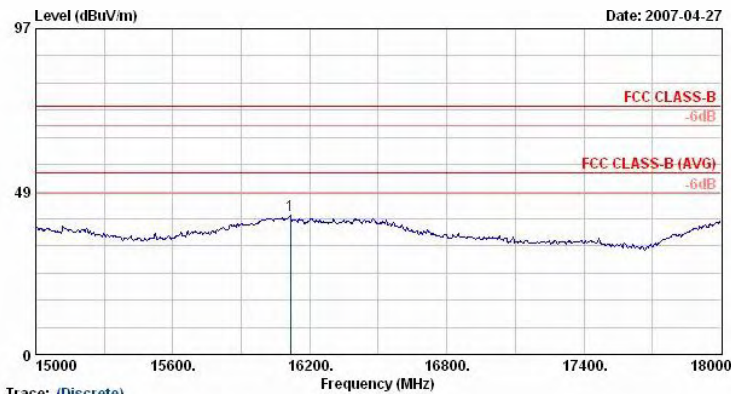


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 HORIZONTAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	16116.00	41.52	-32.48	74.00	70.05	-5.39	11.80	34.94	---	---	Peak



FCC / IC TEST REPORT

Report No. : FR6D2906-A

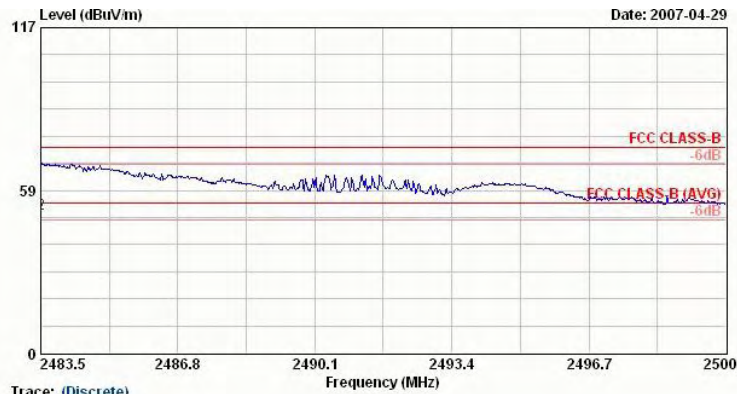


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11; 2462MHz
Data Rate : 6
: 16.5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2483.50	68.31	-5.69	74.00	69.67	30.29	3.86	35.51	100	360 Peak
2 @	2483.50	50.06	-3.94	54.00	51.42	30.29	3.86	35.51	100	245 Average



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

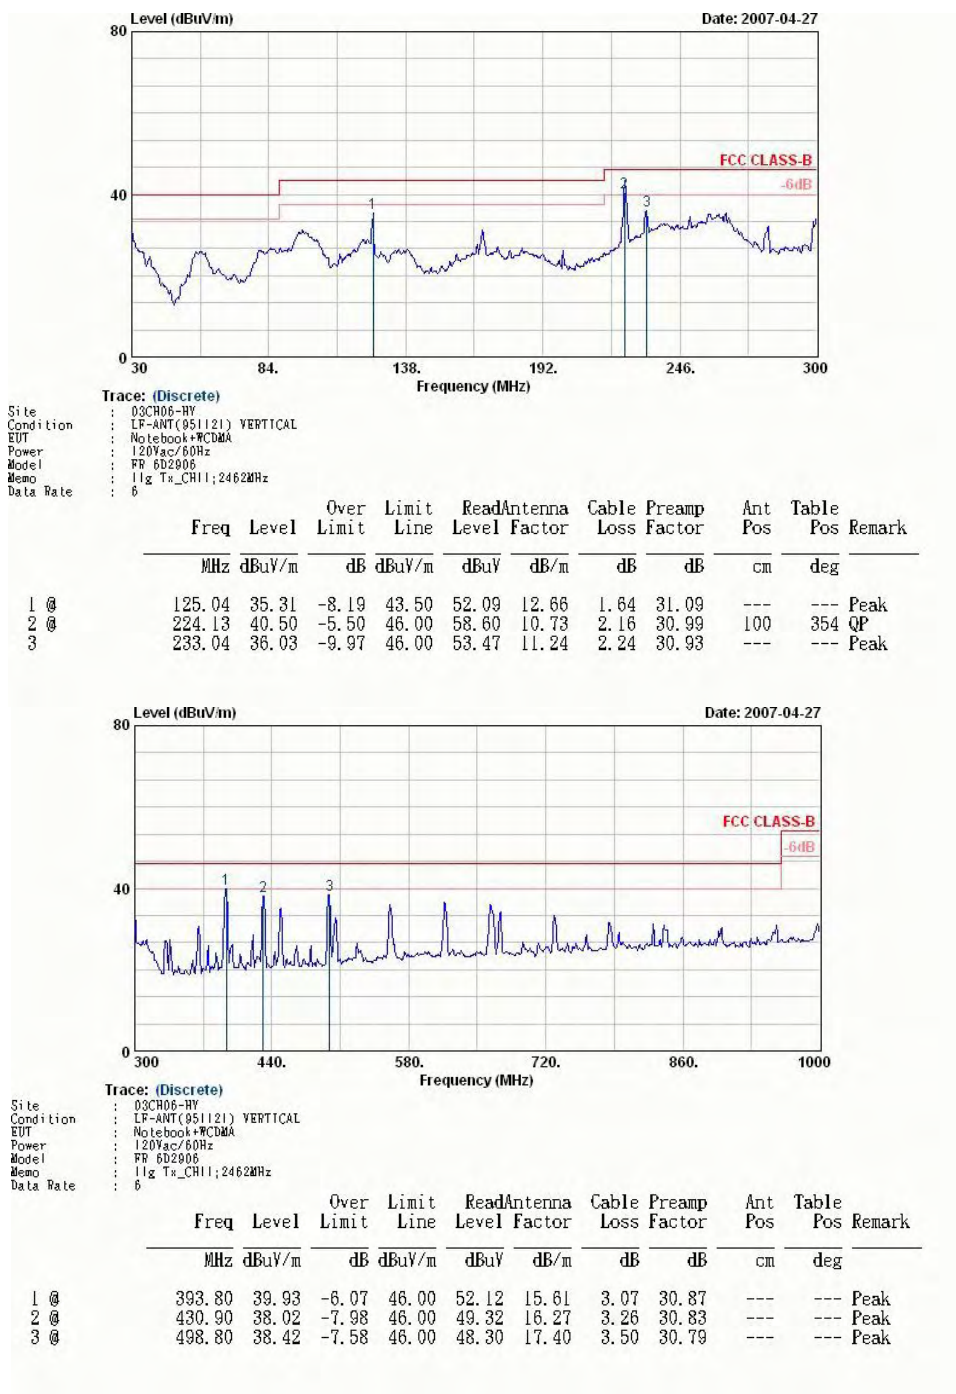



FCC / IC TEST REPORT


Report No. : FR6D2906-A

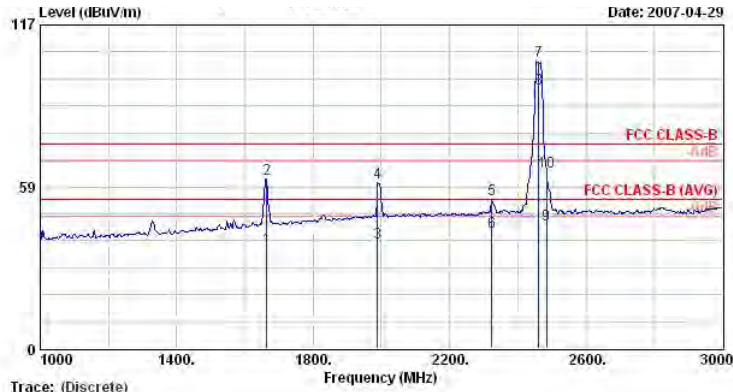

Site : 03CH06-HY
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Ts_CH11;2462MHz
Data Rate : 6
16.5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1664.00	36.54	-17.46	54.00	41.61	27.43	3.03	35.53	100	310 Average
2	1664.00	61.20	-12.80	74.00	66.27	27.43	3.03	35.53	100	360 Peak
3	1988.00	38.41	-15.59	54.00	40.31	29.97	3.30	35.17	100	301 Average
4	1988.00	59.83	-14.17	74.00	61.73	29.97	3.30	35.17	100	360 Peak
5	2324.00	53.76	-20.24	74.00	55.25	30.23	3.69	35.40	100	360 Peak
6	2324.00	42.00	-12.00	54.00	43.49	30.23	3.69	35.40	100	269 Average
7 @	2462.00	103.89			105.25	30.29	3.84	35.49	100	360 Peak
8 @	2462.00	94.15			95.52	30.29	3.84	35.49	100	269 Average
9	2483.50	44.67	-9.33	54.00	46.03	30.29	3.86	35.51	100	269 Average
10	2483.50	64.10	-9.90	74.00	65.46	30.29	3.86	35.51	100	360 Peak

Remark: #7 and #8 Fundamental Signal

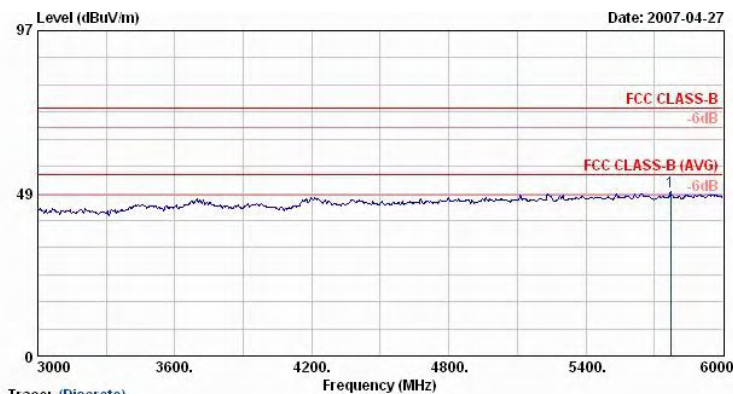


Site : 03CH06-HY
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Ts_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	5772.00	49.06	-24.94	74.00	44.11	33.88	6.91	35.83	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-A

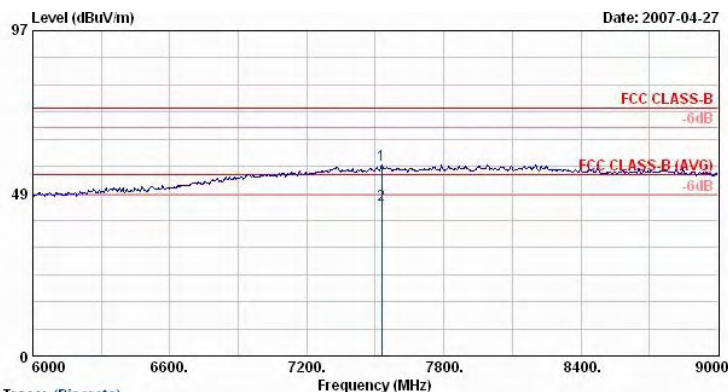

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	
					Factor			cm	deg	
1	7527.00	57.03	-16.97	74.00	46.51	38.95	7.62	36.05	100	360 Peak
2 @	7527.00	45.00	-9.00	54.00	34.48	38.95	7.62	36.05	100	301 Average

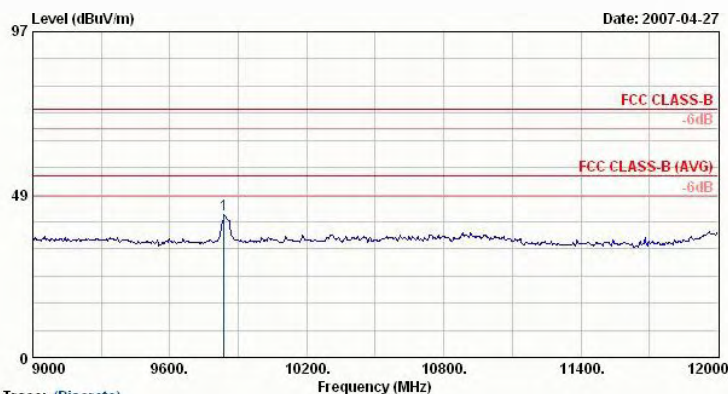


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

Data Rate : 0											
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	9837.00	42.69	-31.31	74.00	79.70	-9.65	9.17	36.54	---	---	Peak




FCC / IC TEST REPORT

Report No. : FR6D2906-A

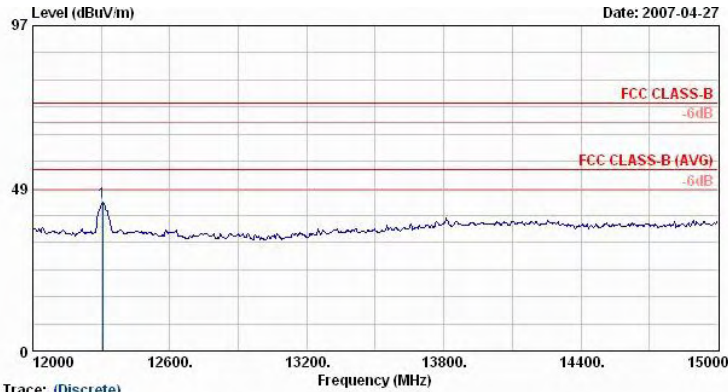


Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
1	12306.00	44.34	-29.66	74.00	80.69	-10.65	10.68	36.38	---	Peak

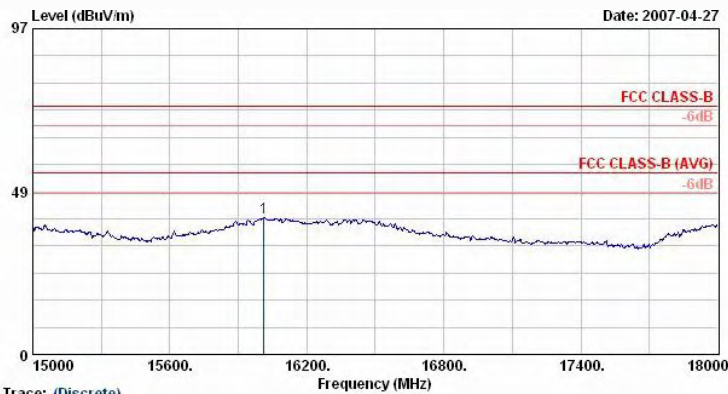

Trace: (Discrete)
Site : 03CH06-HY
Condition : RF-ANT(8-18)-060918 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
1	16011.00	40.79	-33.21	74.00	69.17	-4.02	11.77	36.13	---	Peak

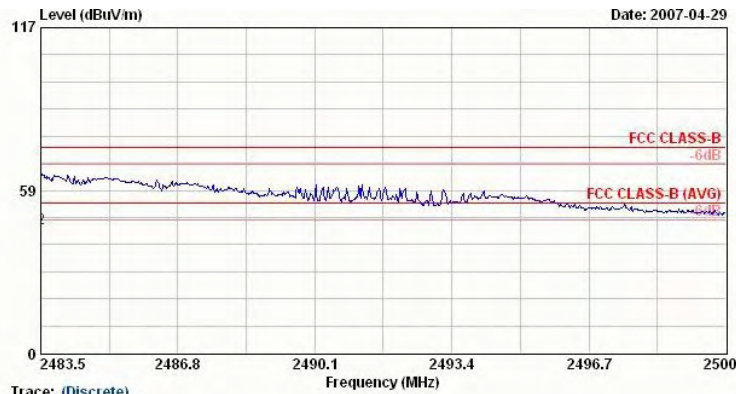

Trace: (Discrete)
Site : D3CH06-HV
Condition : RF-ANT-060410 VERTICAL
EUT : Notebook+WCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11g Tx_CH11;2462MHz
Data Rate : 6
: 16.5



	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2483.50	64.10	-9.90	74.00	65.46	30.29	3.86	35.51	100	360 Peak
2 @	2483.50	44.67	-9.33	54.00	46.03	30.29	3.86	35.51	100	269 Average

Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.



- Test Mode : Mode 7
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

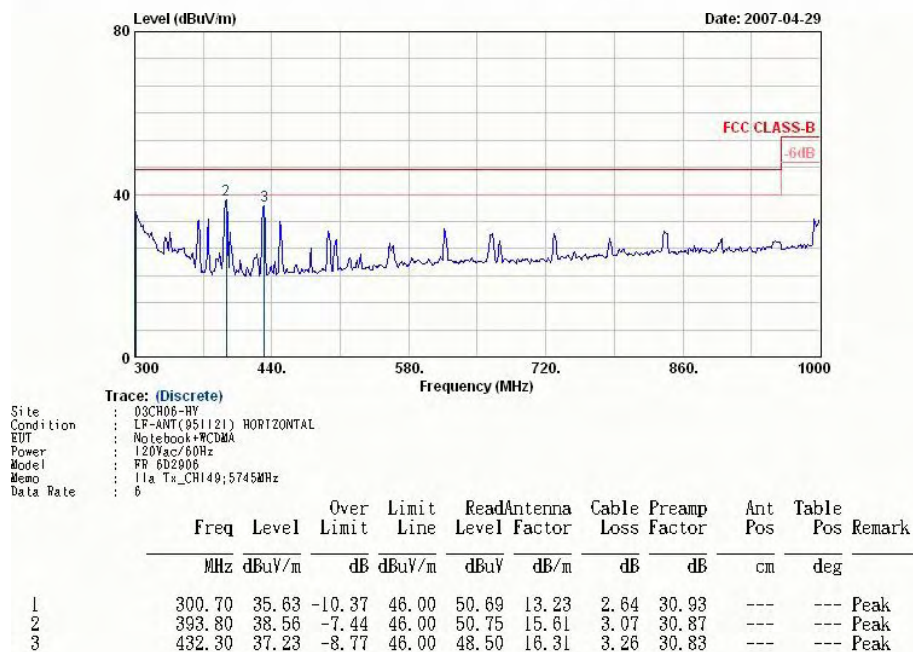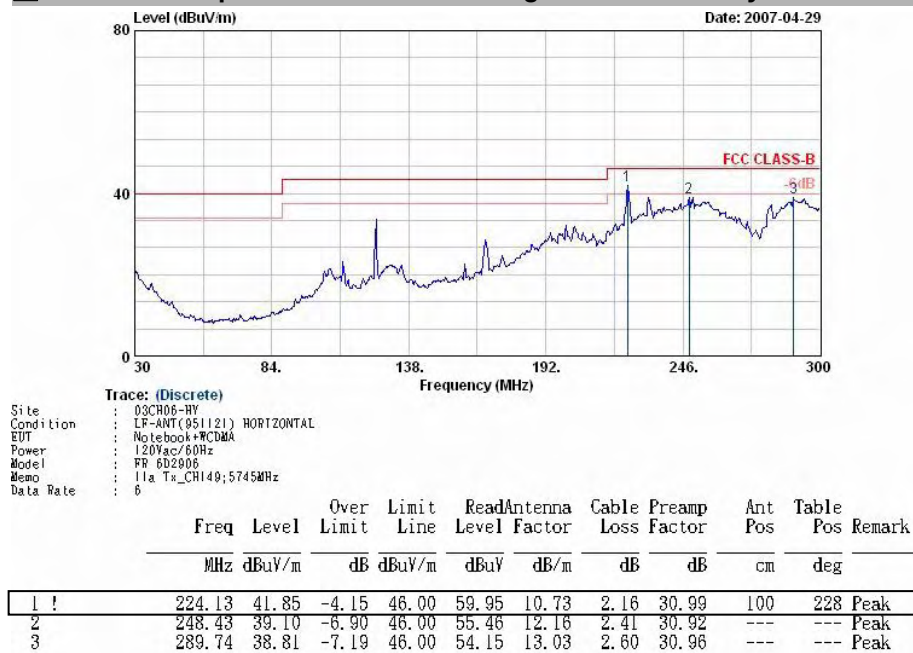




FCC / IC TEST REPORT

Report No. : FR6D2906-A

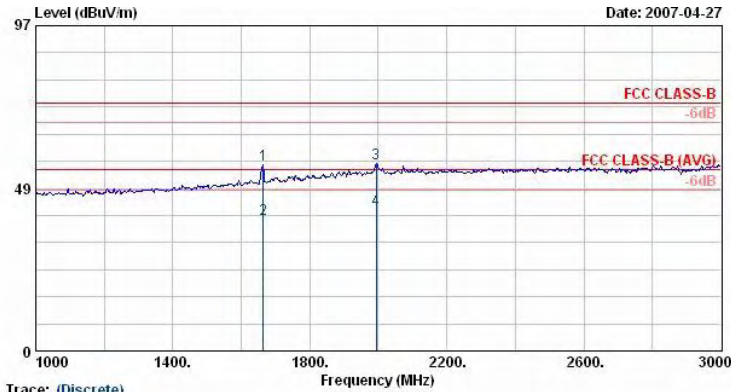

Trace: (Discrete)
Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH149;5745MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1664.00	55.42	-18.58	74.00	60.49	27.43	3.03	35.53	100	0 Peak
2	1664.00	39.26	-14.74	54.00	44.33	27.43	3.03	35.53	100	360 Average
3	1994.00	55.97	-18.03	74.00	57.87	29.97	3.30	35.17	100	0 Peak
4	1994.00	42.14	-11.86	54.00	44.04	29.97	3.30	35.17	100	66 Average

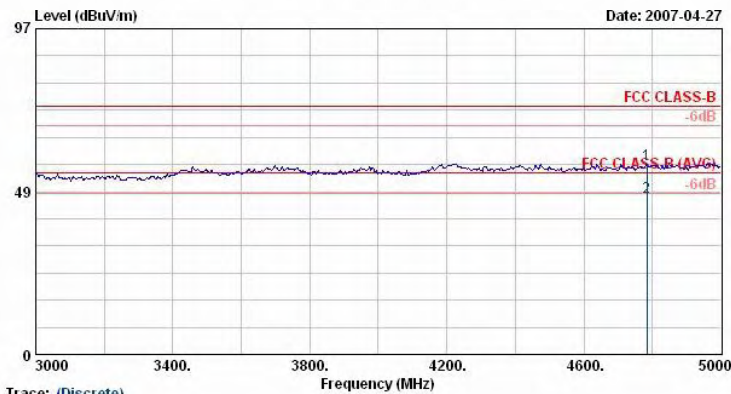

Trace: (Discrete)
Site : 03CH06-HY
Condition : HF-ANT-060410 HORIZONTAL
EUT : Notebook+PCDMA
Power : 120Vac/60Hz
Model : FR 6D2906
Memo : 11a Tx_CH149;5745MHz
Data Rate : 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4784.00	56.79	-17.21	74.00	54.24	32.81	5.81	36.07	100	360 Peak
2	4784.00	46.99	-7.01	54.00	44.44	32.81	5.81	36.07	100	288 Average