

Attachment 2

FCC PART 15B TEST REPORT

REPORT NUMBER: FG08-050EAL

Report No. : FG08-050EAL (1/13)

EMI Test report

CATEGORY : EN55022(2006) / CISPR 22(2005) ; Class B
AS/NZS CISPR22 (2002)
FCC Part-15 (2007)
VCCI (2008)
EN301 489-17 V1.2.1, EN301 489-01 V1.4.1

MANUFACTURER : FUJITSU LIMITED
4-1-1, Kamikodanaka, Nakahara-ku, Kawasaki 211-8588 JAPAN

PRODUCT TYPE : Personal computer E8420 E8460
AC Adapter ADP-80NBA SEC80P2-19.0 SED100P2-19.0
SED110P2-19.0
Port Replicator FPCPR63
Wireless LAN 533AN HMW AR5BHB92
Bluetooth module EYTF3CS FS
UWB module RTU7305 BG1 HMC V1-4

TEST SITE : FUJITSU GENERAL EMC LABORATORY
1116, Suenaga, Takatsu-ku, Kawasaki 213-8502 JAPAN

DATE TESTED : April 14, 2008 23°C 35%

TESTED BY : Hiroyuki Aikawa

Above EUT conforms mentioned all regulations.

APPROVED BY : For K. Shimano DATE : April 30, 2008
Hiroyuki Shimano, President

FUJITSU GENERAL EMC LABORATORY LIMITED
1116, Suenaga, Takatsu-ku, Kawasaki 213-8502 JAPAN
TEL: (044)861-7897 FAX: (044)861-9890

CLIENT : Global Business Division, FUJITSU LIMITED
4-1-1, Kamikodanaka, Nakahara-ku, Kawasaki 211-8588 JAPAN

※ The description of the EUT and the system configuration in this report are provided by the client.



Accredited by NVLAP.
Authorized by TÜV SÜD PS.
Appointed by TÜV Rheinland Japan.
Registered on VCCI.

This accredited test report does not constitute an endorsement of NVLAP or the US government. Fujitsu General EMC Laboratory as a TÜV SÜD PRODUCT SERVICE (TÜV SÜD PS) recognized laboratory is entitled to print the logo on its test reports. Reports approved by a TÜV SÜD PS technical expert additionally must bear the TÜV SÜD PS stamp and authorized signature. It is not allowed to copy this report even partly without the allowance of the test laboratory in any form or by any means. ©Fujitsu General EMC Laboratory

1. Description of EUT

The EUT: E8420 and E8460 personal computer using CPU; Core2 Duo T9600 2.8 GHz microprocessor has a 15 inch WSXGA+ LCD, a DVD-super multi drive and a system disk (80 GB×1). The EUT has the interface for IEEE1394③, RGB⑯, DVI, Mic-in②, Phone-out②, LAN⑦, Modem⑥, USB×6①⑤②③④⑤⑥, PC card slot, Express card slot Memory card slot, UWB, Bluetooth and wireless LAN.

The following EUT type codes are given according to the power rating of the AC adaptor attached to EUT.

Type	Power rating of the AC adaptor
E8420	80 W : SEC100P2-19.0, SED100P2-19.0, ADP-80NB A
E8460	100 W : SED110P2-19.0

The following wireless LAN module type codes are given according to the communication method.

Type	Communication method.
533AN_HMW	IEEE802.11a/ b/ g/ n
AR5BHB92	IEEE802.11a/ b/ g

Internal clock frequency : 4.000 MHz, 14.318 MHz, 24.576 MHz, 25.000 MHz, 27.000 MHz, 33.300 MHz, 48.000 MHz, 96.000 MHz, 100.000 MHz, 266.000 MHz

Input power : AC 100 V-240 V, 50 / 60 Hz, Single-phase 2 wires

The EUT is intended to use generally in the residential / domestic area or commercial and light industrial area; category class B.

1.1 Test system configuration

The measurement was performed using E8420 with internal wireless LAN module; 533AN_HMW or AR5BHB92, UWB module, Bluetooth module, external Port Replicator; FPCPR63 and all related equipments as the maximum personal computer systems shown in figure-1.

The EUT was selected from the pre-production line.

1.2 Operating condition

The following EUT and dependent devices were tested using “EMC.exe”, “UWBPhy test”, “CRTU” or “ART.exe” and “Blue test” program under continuous operating condition to obtain maximize emission.

① PC-1	LCD-1:	Displaying “H” character on screen (Maximum contrast / Luminescence Display resolution 1920×1200 / Refresh rate 60Hz)
	LAN:	Continuous transmission and receiving ping command (1000 M Max)
	Modem:	Downloading the data file, transmission and receiving ping command (56 k Max)
	HDD-1:	Reading / writing the test data
	Wireless LAN:	Continuous transmission of the RF signal
	Bluetooth:	Continuous transmission of the RF signal
	UWB:	Continuous transmission of the RF signal
	DVD:	Playing the test disk
② PC memory card:		Reading / writing the test data
③ Exp memory card:		Reading / writing the test data
④ SD memory card:		Reading / writing the test data
⑤ LCD-2:		Displaying “H” character on screen (Maximum contrast / Luminescence)
⑥ Headset:		Connecting only
⑦ USB mouse:		Connecting only
⑧ USB memory(USB2.0):		Reading / writing the test data (480 M Max)
⑨ HDD-2(IEEE1394):		Reading / writing the test data (480 M Max)
⑩ PRN-1:		Connecting only
⑪ PRN-2:		Connecting only
⑫ PC-2:		Continuous transmission and receiving ping command (1000 M Max)
⑬ PC-3:		Downloading the data file, transmission and receiving ping command (56 k Max)

2. EMI test results summary

Applied standard: EN55022 (2006)

Limit value: Class B

The test samples met the class B limit of EN55022(2006) / CISPR22(2005) and applicable below regulations as shown the following highest 6 points of each emission profiles.

EN301 489-01 V1.4.1

Australia, New Zealand: AS/NZS CISPR22(2002)

U.S.A.: FCC Part-15(2007), Canada: CAN/CSA-CEI/TEC CISPR22-02

Japan: VCCI(2008), Taiwan: CSN 13438(2006)

The test result is effective in only the EUT.

2.1 Radiated emission (30 MHz to 1,000 MHz) : Measured at 10 m distance

2.1.1 Wireless module; 533AN_HMW

< AC 230 V / 50 Hz single phase >

Freq. (MHz)	pol.	Noise level (QP; dB μ V/m)	Class B limit (QP; dB μ V/m)	Margin (dB)
30.28	Vert	27.5	30.0	2.5
56.35	Vert	28.5	30.0	1.5
67.50	Vert	26.0	30.0	4.0
120.08	Vert	26.1	30.0	3.9
701.00	Horiz	35.7	37.0	1.3
960.08	Vert	34.6	37.0	2.4

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	pol.	Noise level (QP; dB μ V/m)	Class B limit (QP; dB μ V/m)	Margin (dB)
30.28	Vert	26.8	30.0	3.2
56.35	Vert	28.5	30.0	1.5
67.50	Vert	26.0	30.0	4.0
120.08	Vert	26.1	30.0	3.9
701.00	Horiz	35.7	37.0	1.3
960.08	Vert	34.6	37.0	2.4

• Limit value ; CISPR22(2005)

• Measurement uncertainty : ± 3.3 dB (K=2, 95 %)

2.1.2 Wireless module; AR5BHB92

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	pol.	Noise level (QP; dB μ V/m)	Class B limit (QP; dB μ V/m)	Margin (dB)
30.28	Vert	26.2	30.0	3.8
51.55	Vert	27.8	30.0	2.2
120.40	Vert	25.5	30.0	4.5
125.35	Horiz	25.5	30.0	4.5
701.00	Horiz	35.7	37.0	1.3
960.08	Vert	34.6	37.0	2.4

• Limit value ; CISPR22(2005)

• Measurement uncertainty : ± 3.3 dB (K=2, 95 %)

2.2 Over 1 GHz RF Radiated emission (1 GHz to 14 GHz) : Measured at 3 m distance

<Wireless module; 533AN_HMW>

Freq. (GHz)	Pol	Noise level (dB μ V/m)	Class B limit (dB μ V/m)		Margin (dB to AV)
		Peak	Peak	A V	
1.4600	Vert	42.6	74.0	54.0	11.4
1.4763	Vert	36.9	74.0	54.0	17.1
1.5134	Vert	43.7	74.0	54.0	10.3
1.7100	Vert	36.0	74.0	54.0	18.0
3.0030	Vert	37.6	74.0	54.0	16.4
3.8370	Vert	35.6	74.0	54.0	18.4

• Limit value ; FCC Part15 (2007)

2.3 AC power line conducted emission (150 kHz to 30 MHz)**2.3.1 Wireless module; 533AN_HMW****2.3.1.1 AC Adapter: ADP-80NB A**

< AC 230 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)	Class B limit (dB μ V)		Margin (dB to AV)
		Q P	Q P	A V	
0.535	# 1	41.6	56.0	46.0	4.4
0.540	# 2	41.9	56.0	46.0	4.1
1.972	# 1	38.9	56.0	46.0	7.1
2.101	# 2	39.3	56.0	46.0	6.7
13.855	# 1	43.4	60.0	50.0	6.6
13.855	# 2	44.5	60.0	50.0	5.5

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)	Class B limit (dB μ V)		Margin (dB to AV)
		Q P	Q P	A V	
0.505	# 1	38.7	56.0	46.0	7.3
0.613	# 2	37.9	56.0	46.0	8.1
2.043	# 1	38.0	56.0	46.0	8.0
2.272	# 2	38.3	56.0	46.0	7.7
13.754	# 2	42.4	60.0	50.0	7.6
13.932	# 1	41.8	60.0	50.0	8.2

< AC 100 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)	Class B limit (dB μ V)		Margin (dB to AV)
		Q P	Q P	A V	
0.697	# 2	38.4	56.0	46.0	7.6
0.729	# 1	36.5	56.0	46.0	9.5
0.831	# 2	36.4	56.0	46.0	9.6
1.944	# 2	37.9	56.0	46.0	8.1
4.585	# 1	37.2	60.0	50.0	8.8
13.620	# 2	41.5	60.0	50.0	8.5

• Limit value; CISPR22(2005)

• Measurement uncertainty : ± 2.5 dB (K=2, 95 %)

2.3.1.2 AC Adapter: SEC100P2-19.0

< AC 230 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB)	
		Q P	A V	Q P	A V	Q P	A V
0.191	# 1	55.0	49.2	64.0	54.0	9.0	4.8
0.191	# 2	58.9	50.8	64.0	54.0	5.1	3.2
0.355	# 1	43.0	29.4	58.8	48.8	15.8	19.4
0.355	# 2	47.7	28.9	58.8	48.8	11.1	19.9
0.527	# 2	43.3	26.0	56.0	46.0	12.7	20.0
3.021	# 1	38.8	28.0	56.0	46.0	17.2	18.0

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB to AV)
		Q P	A V	Q P	A V	
0.153	# 1	50.3		65.8	55.8	5.5
0.153	# 2	51.2		65.8	55.8	4.6
0.284	# 2	44.8		60.7	50.7	5.9
0.380	# 1	39.5		58.3	46.0	8.8
2.874	# 2	33.1		56.0	46.0	12.9
20.049	# 2	31.8		60.0	50.0	18.2

< AC 100 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB to AV)
		Q P	A V	Q P	A V	
0.158	# 1	50.9		65.6	55.6	4.7
0.158	# 2	50.3		65.6	55.6	5.3
0.316	# 2	41.4		59.8	49.8	8.4
0.319	# 1	38.2		59.7	49.7	11.5
0.397	# 1	40.6		57.9	47.9	7.3
3.235	# 2	33.7		56.0	46.0	12.3

• Limit value ; CISPR22(2005)

• Measurement uncertainty : ± 2.5 dB (K=2, 95 %)**2.3.1.3 AC Adapter: SED100P2-19.0**

< AC 230 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB)	
		Q P	A V	Q P	A V	Q P	A V
0.194	# 1	47.1	30.1	63.9	53.9	16.8	23.8
0.210	# 2	45.2	31.4	63.2	53.2	18.0	21.8
0.258	# 2	43.6	28.7	61.5	51.5	18.3	22.8
0.322	# 2	41.6	26.3	59.6	49.6	18.0	23.3
0.978	# 2	42.6	27.2	56.0	46.0	13.4	18.8
1.100	# 2	45.9	30.7	56.0	46.0	10.1	15.3

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB to AV)
		Q P	A V	Q P	A V	
0.196	# 1	44.5		63.8	53.8	9.3
0.196	# 2	46.8		63.8	53.8	7.0
0.392	# 2	36.9		58.0	48.0	11.1
0.456	# 2	37.8		56.8	46.8	9.0
0.518	# 1	33.9		56.0	46.0	12.1
0.915	# 2	38.6		56.0	46.0	7.4

< AC 100 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB to AV)
		Q P	A V	Q P	A V	
0.196	# 2	45.0		63.8	53.8	8.8
0.205	# 1	45.5		63.4	53.4	7.9
0.978	# 2	38.4		56.0	46.0	7.6
0.984	# 1	31.3		56.0	46.0	14.7
20.050	# 2	31.6		60.0	50.0	18.4
22.023	# 2	31.5		60.0	50.0	18.5

• Limit value; CISPR22(2005)

• Measurement uncertainty : ± 2.5 dB (K=2, 95 %)

2.3.1.4 AC Adapter: SED110P2-19.0

< AC 230 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB)	
		Q P	A V	Q P	A V	Q P	A V
0.185	# 1	53.9	36.3	64.2	54.2	10.3	17.9
0.200	# 2	59.9	46.6	63.6	53.6	3.7	7.0
0.320	# 1	41.1	25.6	59.7	49.7	18.6	24.1
0.362	# 2	52.0	32.2	58.7	48.7	6.7	16.5
0.532	# 2	43.2	21.9	56.0	46.0	12.8	24.1
0.549	# 2	43.5	26.3	56.0	46.0	12.5	19.7

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)		Class B limit (dB μ V)		Margin (dB)	
		Q P	A V	Q P	A V	Q P	A V
0.164	# 2	50.6	34.5	65.3	55.3	14.7	20.8
0.207	# 2	49.3	39.6	63.3	53.3	14.0	13.7
0.210	# 1	47.2	41.9	63.2	53.2	16.0	11.3
0.329	# 1	40.7	32.8	59.5	49.5	18.8	16.7
0.400	# 2	47.1	30.8	57.9	47.9	10.8	17.1
0.496	# 2	40.2	24.1	56.1	46.1	15.9	22.0

< AC 100 V / 50 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)	Class B limit (dB μ V)		Margin (dB to AV)
		Q P	Q P	A V	
0.340	# 1	34.5	59.2	49.2	14.7
0.346	# 2	40.3	59.1	49.1	8.8
0.355	# 1	35.6	58.8	48.8	13.2
0.415	# 2	37.2	57.6	47.6	10.4
0.471	# 1	36.4	56.5	46.5	10.1
2.544	# 2	33.7	56.0	46.0	12.3

- Limit value; CISPR22(2005)
- Measurement uncertainty : ± 2.5 dB (K=2, 95 %)

2.3.2 Wireless module; AR5BHB92**2.3.2.1 AC Adapter: ADP-80NB A**

< AC 120 V / 60 Hz single phase >

Freq. (MHz)	Line #	Noise level (dB μ V)	Class B limit (dB μ V)		Margin (dB to AV)
		Q P	Q P	A V	
0.150	# 2	49.3	66.0	56.0	6.7
0.506	# 2	39.9	56.0	46.0	6.1
0.529	# 1	40.7	56.0	46.0	5.3
0.740	# 2	39.7	56.0	46.0	6.3
0.756	# 1	36.6	56.0	46.0	9.4
2.426	# 2	36.0	56.0	46.0	10.0

- Limit value; CISPR22(2005)
- Measurement uncertainty : ± 2.5 dB (K=2, 95 %)

2.4 Telecommunication line conducted emission

< Telecom port >

Freq. (MHz)	Noise level (dB μ V)	Class B limit (dB μ V)		Margin (dB to AV)
	Q P	Q P	A V	
0.797	58.0	74.0	64.0	6.0
1.328	60.4	74.0	64.0	3.6
1.593	56.4	74.0	64.0	7.6
1.860	59.4	74.0	64.0	4.6
1.910	57.1	74.0	64.0	6.9
2.331	55.5	74.0	64.0	8.5

< LAN port >

Freq. (MHz)	Noise level (dB μ A)	Class B limit (dB μ A)		Margin (dB to AV)
	Q P	Q P	A V	
0.167	14.1	39.1	29.1	15.0
2.122	3.5	30.0	20.0	16.5
7.924	5.4	30.0	20.0	14.6
13.480	4.7	30.0	20.0	15.3
14.211	5.2	30.0	20.0	14.8
16.228	9.0	30.0	20.0	11.0

- Limit value ; CISPR22(2005)

3. EUT modification under the test

The following countermeasures are added for the radiated emission measurement.
Three EMI filters; BLM15BB750SN1 are added to the Main board.

4. Measurement procedure and test equipment

The measurement was performed without deviation from CISPR22(2005).

4.1 Radiated emission

4.1.1 Radiated emission (30MHz~1,000MHz)

The EUT was set on the 80 cm height desk placed on the turntable in the 10 m RF semi-anechoic chamber. The PC-2 and HUB were placed at outside of the chamber to make usual install condition at the different place. The maximum noise level in the frequency range from 30 MHz to 1,000 MHz were measured by 10 m method with scanning the antenna height from 1 m to 4 m above the ground plane and rotating the EUT through 360 degrees for both horizontal and vertical polarization.

Preliminary measurement using spectrum analyzer peak detection was performed to arrange the minimum margin spectrum. The settings of the interface cables and the mouse were adjusted to obtain maximum level at the minimum margin spectrum. The final measurement was performed using the RFI receiver (CISPR Quasi-peak, 120 kHz band width) and calibrated broadband antennas or dipole antennas for the main spectrum that was obtained by the preliminary measurement.

Test equipment	Manufacturer	Type	S/N	Cal. Date	Due. Date
Bi Log antenna	Schwarzbeck	VULB9160	3118	2007.05.25	2008.05.25
Dipole antenna	Schwarzbeck	VHA9103	VHA91031573	2007.07.25	2009.07.25
Dipole antenna	Schwarzbeck	UHA9105	UHA91052119	2007.07.25	2009.07.25
Field strength meter	Rohde & Schwarz	ESCS30	849650/001	2007.06.04	2008.06.04
Spectrum analyzer	HP	85422E	3746A00242	2007.05.27	2008.05.27
RF switch	Anritsu	MP59B	M87079	2007.05.07	2008.05.07
RF cable		CF013		2007.05.07	2008.05.07
2nd semi-anechoic chamber		Riken eletech		2008.01.04	2010.01.04
EMI test program	FGE	Version 1.3			

4.1.2 Radiated emission (1 GHz~14 GHz)

The EUT was set on the 80 cm height non-reflective desk on the turntable. The radiated emission measurement from 1 GHz to 14 GHz; Operating rate 2.8 GHz was performed using the spectrum analyzer (Peak detection, 1MHz band width) and the horn antenna that was positioned at 3 m from the EUT for class B. The measurement was performed with both horizontal and vertical polarization, rotating the The measurement was performed with rotating the EUT through 360 degrees and fixing the antenna height to the 1 m for both horizontal and vertical polarization.

The measurement was performed using the RF signal "off" mode of the wireless LAN and Bluetooth.

Test equipment	Manufacturer	Type	S/N	Cal. Date	Due. Date
Horn antenna	Schwarzbeck	BBHA9120D	414	2007.02.23	2009.02.23
Spectrum analyzer	Advantest	R3371A	75060396	2007.05.27	2008.05.27
Pre amplifier	HP	8449B	3008A01110	2007.03.24	2009.03.24

4.2 AC power line conducted emission

The conducted emission measurement was performed in the shielded room. The EUT was set on the 80 cm height wooden desk using the 50Ω/50μH artificial mains network: AMN ,and operated by AC 230 V/ 50 Hz, AC 120 V/ 60 Hz and AC 100 V/ 50 Hz. Preliminary measurement using spectrum analyzer peak detection was performed in the frequency range from 150 kHz to 30 MHz to arrange the minimum margin spectrum. The setting of the cables was adjusted to obtain maximum level at the minimum margin spectrum. The final measurement was performed using the RFI receiver (CISPR Quasi-peak, 9 kHz band width) ,and recorded the maximum value in the monitored interval of the main spectrum that was obtained by the preliminary measurement.

Test equipment	Manufacturer	Type	S/N	Cal. Date	Due. Date
AMN	Kyoritsu	KNW-407	8-823-18	2007.09.07	2008.09.07
Field strength meter	Rohde & Schwarz	ESCS30	849650/001	2007.06.04	2008.06.04
Spectrum analyzer	HP	85422E	3746A00240	2007.05.27	2008.05.27
RF switch	Rohde & Schwarz	PSU	848290/005	2007.05.07	2008.05.07
Band pass filter	Advantest	TR14202	03560025	2007.05.07	2008.05.07
Transient limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2007.05.07	2008.05.07
RF cable	---	CF009	---	2007.05.07	2008.05.07
EMI test program	FGE	Version 1.3			

4.3 Telecommunication line conducted emission

The conducted emission measurement was performed in the shielded room. The EUT was set on the 40 cm height wooden desk using the impedance stabilization network: ISN(LCL; 80 dB) for telecom port, the current probe for LAN port and operated by AC 230 V/ 50 Hz. Preliminary measurement using spectrum analyzer peak detection was performed in the frequency range from 150 kHz to 30 MHz to arrange the minimum margin spectrum. The setting of the cables was adjusted to obtain maximum level at the minimum margin spectrum. The final measurement was performed using the RFI receiver (CISPR Quasi-peak, 9 kHz band width), and recorded the maximum value in the monitored interval of the main spectrum that was obtained by the preliminary measurement.

Test equipment	Manufacturer	Type	S/N	Cal. Date	Due. Date
ISN	Kyoritsu	KNW-2202	8S-2945-2	2007.09.03	2008.09.02
Current probe	Rohde & Schwarz	EZ-17	100007	2007.12.21	2008.12.21
Field strength meter	Rohde & Schwarz	ESCS30	849650/001	2007.04.25	2008.04.25
Spectrum analyzer	HP	85422E	3746A00240	2007.04.24	2008.04.24
RF switch	Rohde & Schwarz	PSU	848290/005	2007.05.07	2008.05.07
Band pass filter	Advantest	TR14202	03560025	2007.05.07	2008.05.07
Transient limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2007.05.07	2008.05.07
RF cable	---	CF009	---	2007.05.07	2008.05.07
EMI test program	FGE	Version 1.3			

5. Test site and traceability

The FUJITSU GENERAL EMC LABORATORY performs the test for VCCI / EN / CISPR regulation and Fujitsu / Fujitsu General internal regulations. The test procedures and test facilities are comply with international standard. The laboratory is filed on VCCI (Japan), accredited from NVLAP (U.S.A.), authorized from TÜV SÜD PS (Germany) and appointed from TÜV Rheinland (Germany).

VCCI : 1st semi-anechoic chamber(R-753/C-776), 1st shielded room(C-777)
 Large shielded room(C-778)
 2nd semi-anechoic chamber(R-1460/C-1547), 2nd shielded room(C-1548)
 3rd shielded room(C-1549)


NVLAP : 1998.12.01 Accredited: Lab code 200373-0

TÜV SÜD PS : 1999.01.29 Authorized

TÜV Rheinland Japan : 2005.08.25 Appointed

The measuring equipments were used in the laboratory and test data are traceable to the national or international standard. Each equipment is maintain by periodical calibration and by daily check as a total measurement system to keep those accuracy.

Figure-1 System configuration and cables

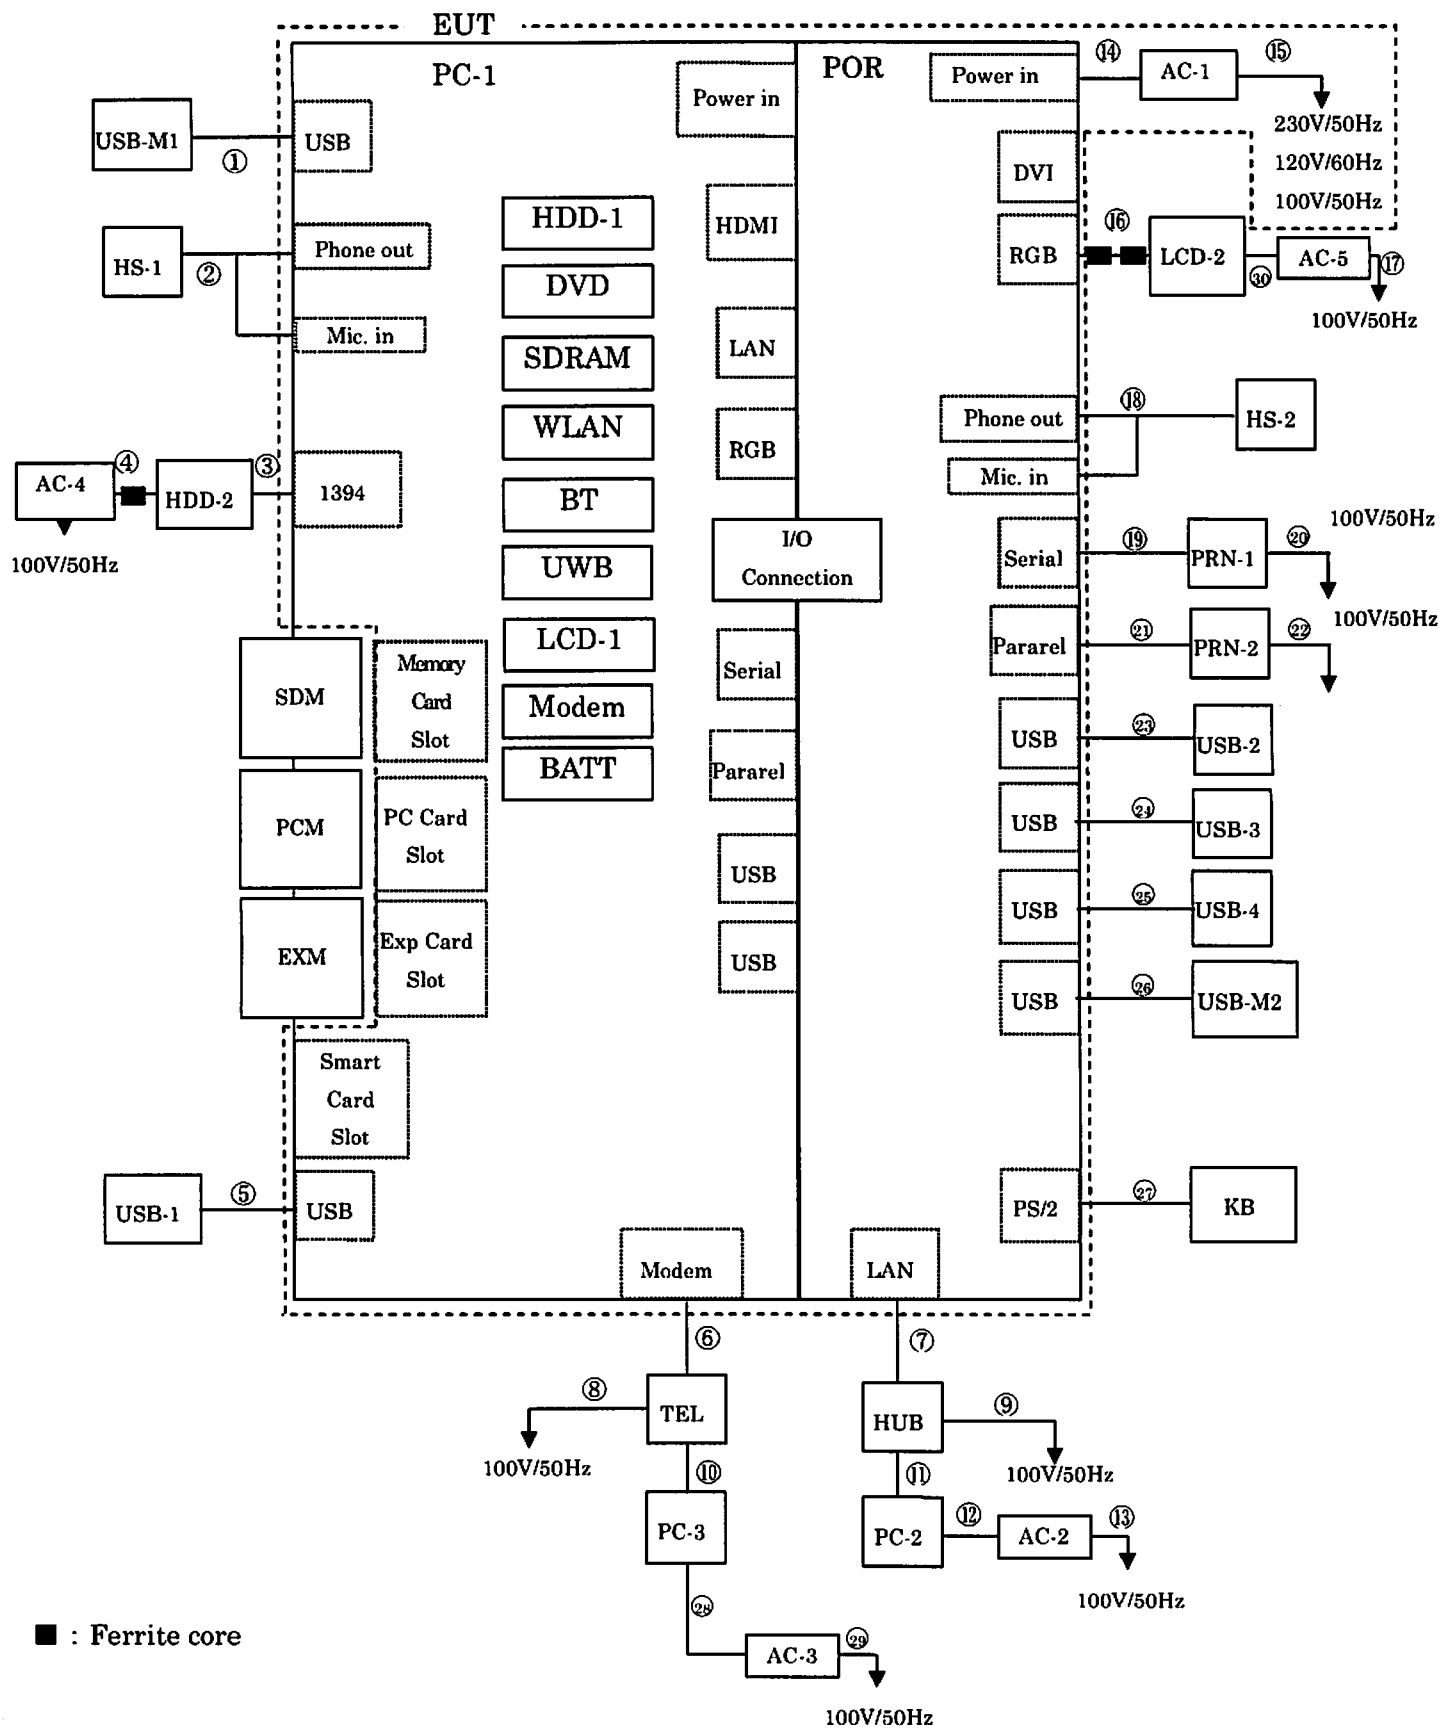

Main EUT

Code	Name	Type	S/N	Product
PC-1	Personal computer	E8420 / E8460	Pre-production sample	Fujitsu

Related EUT

POR	Port Replicator	FPCPR63	-----	Fujitsu
AC-1	AC adapter	ADP-80NB A	-----	Fujitsu
		SEC100P2-19.0	-----	Fujitsu
		SED100P2-19.0	-----	Fujitsu
		SED110P2-19.0	-----	Fujitsu

Included device; PC-1

Code	Name	Type	S/N	Product
HDD-1	80GB HDD	MHZ2080BH	-----	Fujitsu
DVD	DVD-Super Multi	UJ-870A	-----	Matsushita
SDRAM	4096 MB	EBJ21UE8BAU0-AE-E×2	-----	-----
WLAN	Wireless LAN	533AN_HMW	-----	Intel
		AR5BHB92	-----	Atheros
BT	Bluetooth	EYTF3CS FS	-----	TAOYO YUDEN
UWB	UWB module	RTU7305 BG1 HMC V1-4	-----	Realtek
LCD-1	15 inch WUXGA	LTN154P3-L02	-----	Samsung
Modem	Modem	MDC1.5 modem Model:D40	-----	Agere
BATT	Battery (8cell)	FPCBP176 14.4V 5200mA/h	-----	Fujitsu

Assisted equipment

Code	Name	Type	S/N	Product
LCD-2	LCD display	WBZA-H	YE1C019316	FSC
HDD-2	Head Disk	KC4020-N	0004384	FSC
HS-1	Head set	GN 501FSC	-----	FSC
HS-2	Head set	GN 501FSC	-----	FSC
PC-2	Personal computer	FMV	-----	Fujitsu
PC-3	Personal computer	FMV	-----	Fujitsu
HUB	Switching Hub	ETG-SH-8	VD7000010513N	I·O DATA
PRN-1	Printer	LX300+	CLCY862131	EPSON
PRN-2	Printer	LX300+	CLCY862208	EPSON
AC-2	AC adapter	FMV-AC322	-----	Fujitsu
AC-3	AC adapter	FMV-AC322	-----	Fujitsu
AC-4	AC adapter	ACTN-21	-----	Sunfone
AC-5	AC adapter	0218B1260	-----	Shin International
USB-1	USB Mouse	M-BT69e	HCA52701556	FSC
USB-2	USB Mouse	M-BJ69e	HCA52701562	FSC
USB-3	USB Mouse	M-BJ69e	HCA52701578	FSC
USB-4	USB Mouse	M-BJ69e	HCA52701600	FSC
USB-M1	USB memory	Easy Disk 512MB	-----	I·O DATA
USB-M2	USB memory	Easy Disk 256MB	-----	I·O DATA
PCM	PC memory card	20 MB	-----	SunDisk
EXM	Exp. memory Card	512 MB	-----	Lexar
SDM	SD memory card	128 MB	-----	Panasonic

Cables SLD: Shielded NSLD: Non-shielded CAX: Coaxial

Connector MC: Metal NMC: Non-metal PMC: Point contact metal

No.	I/O Port	Name	Type	Length	Cable type
①	USB	USB cable	----	1.0 m	SLD, MC
②	Phone-out / Mic-in	Headset cable	----	2.2 m	NSLD, MC
③	1394	IEEE1394 cable	----	1.0 m	SLD, MC
④	-----	AC adaptor cable	----	1.8 m	NSLD, NMC with core *1
⑤	USB	USB mouse cable	----	1.9 m	SLD, MC
⑥	modem	Modular cable	----	20.0 m	NSLD, NMC
⑦	LAN	LAN cable	----	20.0 m	SLD, MC
⑧	-----	AC power cable	----	2.0 m	2P-NSLD
⑨	-----	AC power cable	----	2.0 m	2P-NSLD
⑩	-----	Modular cable	----	2.0 m	NSLD, NMC
⑪	LAN	LAN cable	----	1.0 m	SLD, MC
⑫	-----	AC adaptor cable	----	1.8 m	2P-NSLD, NMC
⑬	-----	AC power cable	----	2.0 m	2P-NSLD
⑭	-----	AC adaptor cable	----	1.8 m	NSLD, NMC
⑮	-----	AC power cable	----	2.0 m	2P-NSLD
⑯	RGB	RGB cable	----	1.8 m	SLD, MC with fixed core
⑰	-----	AC power cable	----	2.0 m	3P-NSLD
⑱	Phone-out / Mic-in	Headset cable	----	2.2 m	NSLD, MC
⑲	SERIAL	SERIAL cable	----	2.0m	SLD, MC
⑳	-----	AC power cable	----	2.0 m	3P-NSLD
㉑	RS232C	RS232C cable	----	3.0m	SLD, MC
㉒	-----	AC power cable	----	2.0 m	3P-NSLD
㉓	USB	USB mouse cable	----	1.9 m	SLD, MC
㉔	USB	USB mouse cable	----	1.9 m	SLD, MC
㉕	USB	USB mouse cable	----	1.9 m	SLD, MC
㉖	USB	USB cable	----	1.0 m	SLD, MC
㉗	-----	AC adaptor cable	----	1.8 m	2P-NSLD, NMC
㉘	-----	AC power cable	----	2.0 m	2P-NSLD
㉙	-----	AC adaptor cable	----	2.0 m	2P-NSLD

* 1: KITAGAWA industry Co.,Ltd; TFT-72SK

Appendix data (#08-050E: Total 52 pages)

1. Photograph #08-050E (6 pages)

• Radiated emission measurement

30-1000 MHz(Front)	: Photo-1.1
30-1000 MHz (Back)	: Photo-1.2
1-14 GHz (Front)	: Photo-1.3

• Conducted emission measurement

AC Power port	: Photo-2.1
Telecom port	: Photo-2.2
LAN port	: Photo-2.3

• Label

Personal computer	E8420	: Photo-3.1
AC Adapter	ADP-80NB A	: Photo-3.2
	SEC100P2-19.0	: Photo-3.3
	SED100P2-19.0	: Photo-3.4
	SED110P2-19.0	: Photo-3.5

• Internal view : Photo-4

2. Test data (46 pages)

2.1 Radiated emission

2.1.1 Wireless LAN; 533AN_HMW

30-1000 MHz	AC 230 V/ 50 Hz	: #08-050E-RE1 (2 pages)
	AC 120 V/ 60 Hz	: #08-050E-RE2 (2 pages)
1-12 GHz		: #08-050E-GH (2 pages)

2.1.2 Wireless LAN; AR5BHB92

30-1000 MHz	AC 120 V/ 60 Hz	: #08-050E-RE3 (2 pages)
-------------	-----------------	--------------------------

2.2 Conducted emission

2.2.1 Wireless LAN; 533AN_HMW

ADP-80NB A	AC 230V/ 50Hz	: #08-050E-CE1 (2 pages)
	AC 120V/ 60Hz	: #08-050E-CE2 (2 pages)
	AC 100V/ 50Hz	: #08-050E-CE3 (2 pages)
SEC100P2-19.0	AC 230V/ 50Hz QP Mode	: #08-050E-CE4 (2 pages)
	AV Mode	: #08-050E-CE5 (2 pages)
	AC 120V/ 60Hz	: #08-050E-CE6 (2 pages)
	AC 100V/ 50Hz	: #08-050E-CE7 (2 pages)
SED100P2-19.0	AC 230V/ 50Hz QP Mode	: #08-050E-CE8 (2 pages)
	AV Mode	: #08-050E-CE9 (2 pages)
	AC 120V/ 60Hz	: #08-050E-CE10 (2 pages)
	AC 100V/ 50Hz	: #08-050E-CE11 (2 pages)
SED110P2-19.0	AC 230V/ 50Hz QP Mode	: #08-050E-CE12 (2 pages)
	AV Mode	: #08-050E-CE13 (2 pages)
	AC 120V/ 60Hz QP Mode	: #08-050E-CE14 (2 pages)
	AV Mode	: #08-050E-CE15 (2 pages)
	AC 100V/ 50Hz	: #08-050E-CE16 (2 pages)


2.2.2 Wireless LAN; AR5BHB92

ADP-80NB A	AC 120V/ 60Hz	: #08-050E-CE17 (2 pages)
------------	---------------	---------------------------

2.3 Telecommunication line emission

Telecom port	: #08-050E-TE1 (2 pages)
LAN port	: #08-050E-TE2 (2 pages)

Photo-1.1 Radiated emission measurement for 30-1000 MHz (Front)

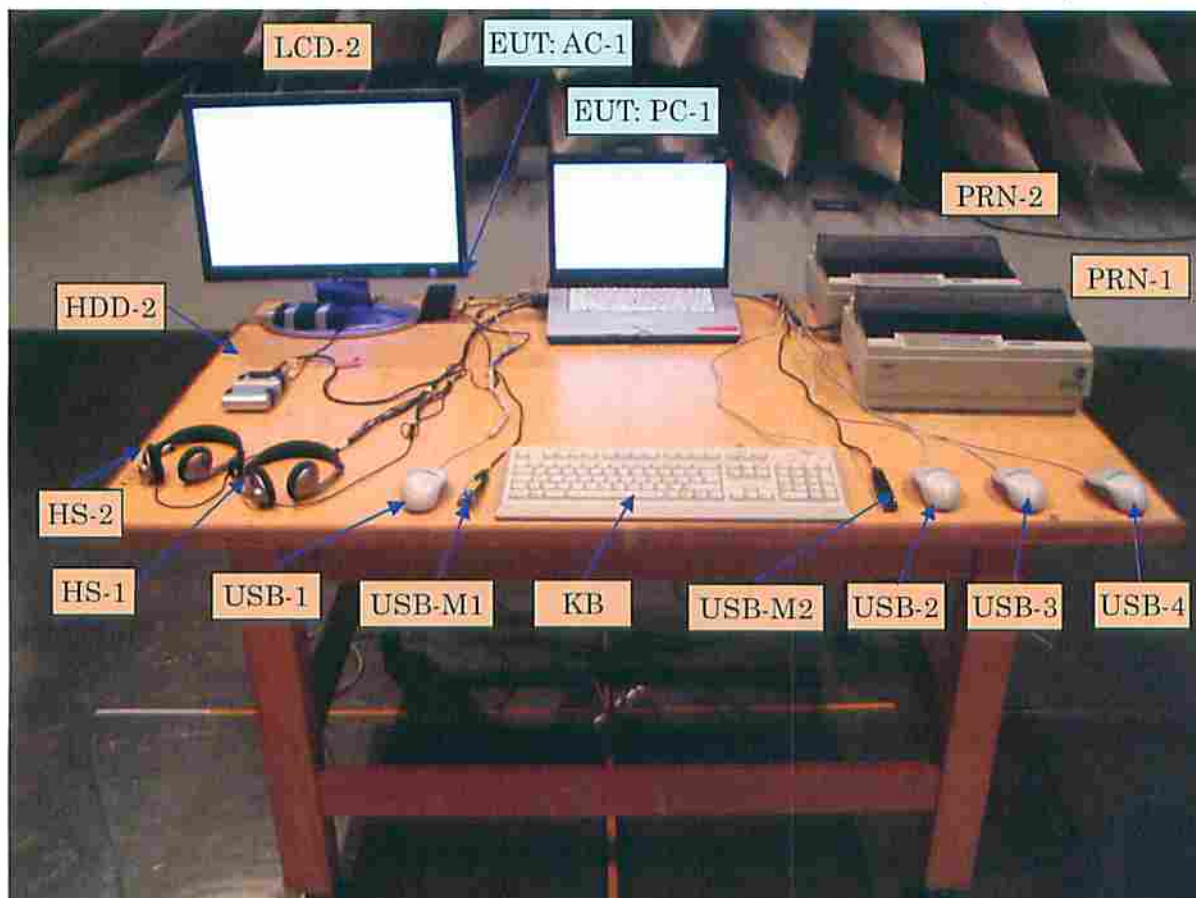

- HUB, TEL, PC-2 and PC-3 were set at outside of the chamber.

Photo-1.2 Radiated emission measurement for 30-1000 MHz (Back)

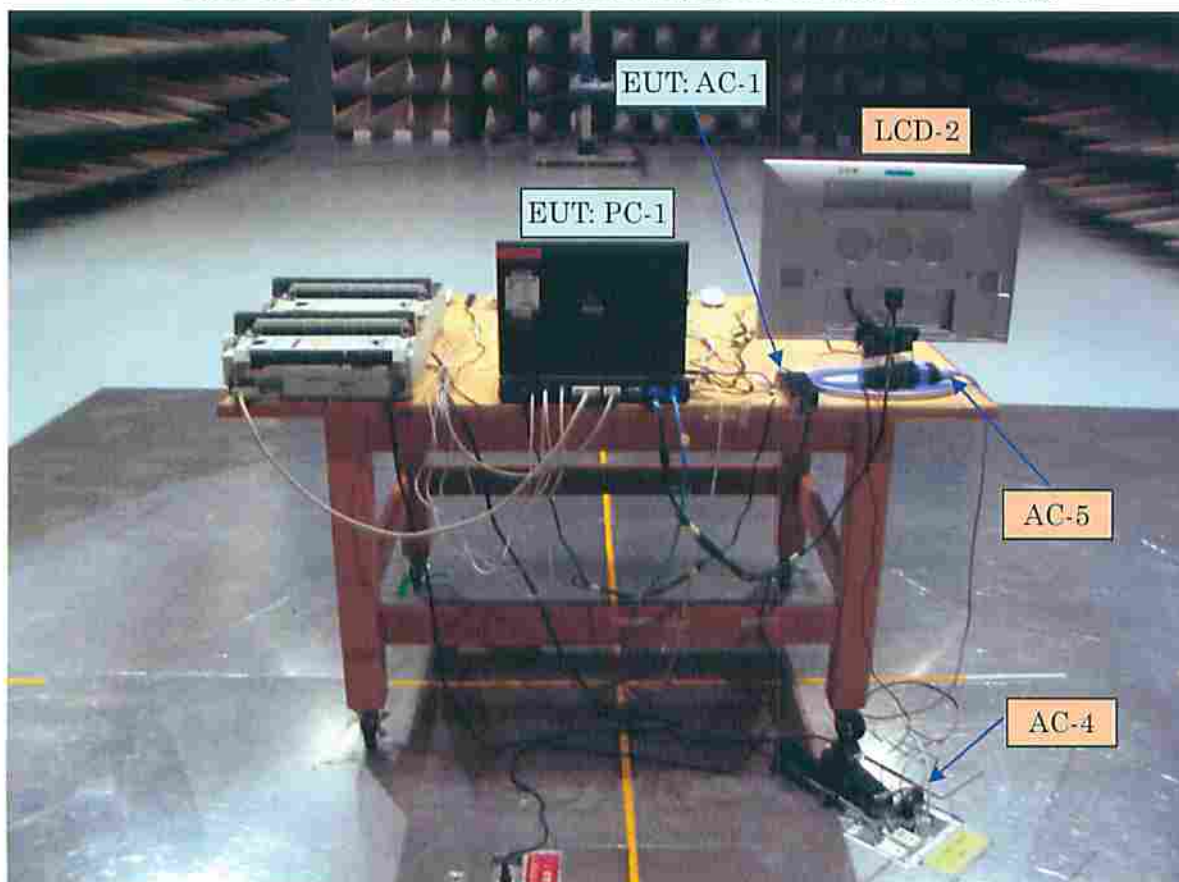


Photo-1.3 Radiated emission measurement for 1-14 GHz (Front)

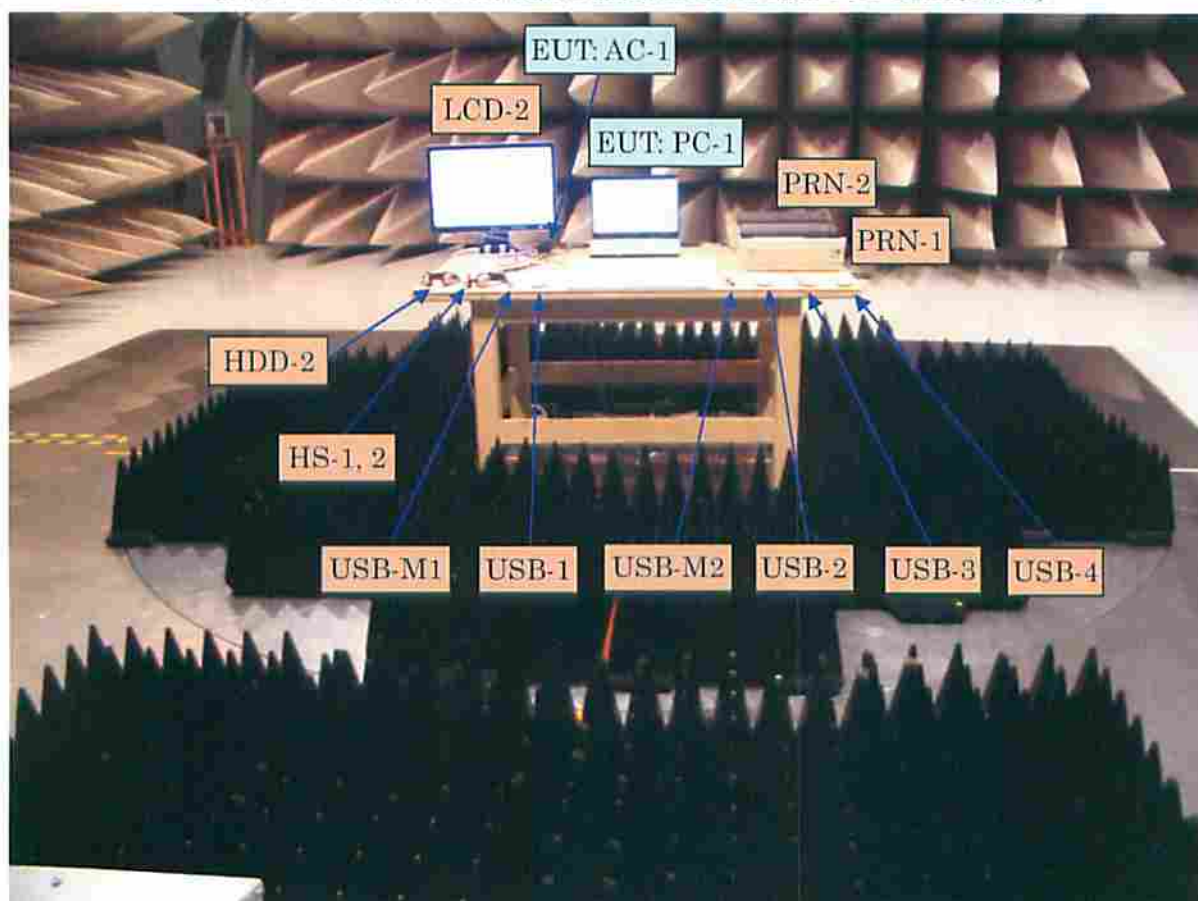


Photo-2.1 Conducted emission measurement

