

## APPENDIX A1 TEST SETUP PHOTOGRAPHS

Tablet Position



Accreditation No. 5292

---

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

## APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations. The spatial peak SAR values were assessed with the procedure described in this report.

**Table: 2450 MHz DSSS Band SAR Measurement Plot Numbers**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	1	A	1	-	01
	2	A	1	-	06
	3	A	1	-	11
Tablet	4	B	1	-	06
Z-Axis graphs for Plots 1 to 4					

**Table: 2450MHz Validation Plot**

Plot 5	Validation 2450 MHz 8 <sup>th</sup> September 2008
Z-Axis graph for Plot 5	



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 08 September 2008**

File Name: Tablet DSSS 2.4 GHz Antenna A 08-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: DSSS 2450 MHz; Frequency: 2412 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.86$  mho/m;  $\epsilon_r = 51$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: ET3DV6 - SN1380; ConvF(4.18, 4.18, 4.18)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 1 Test/Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.080 mW/g


**Channel 1 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.91 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 0.161 W/kg

**SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.039 mW/g**

Maximum value of SAR (measured) = 0.080 mW/g

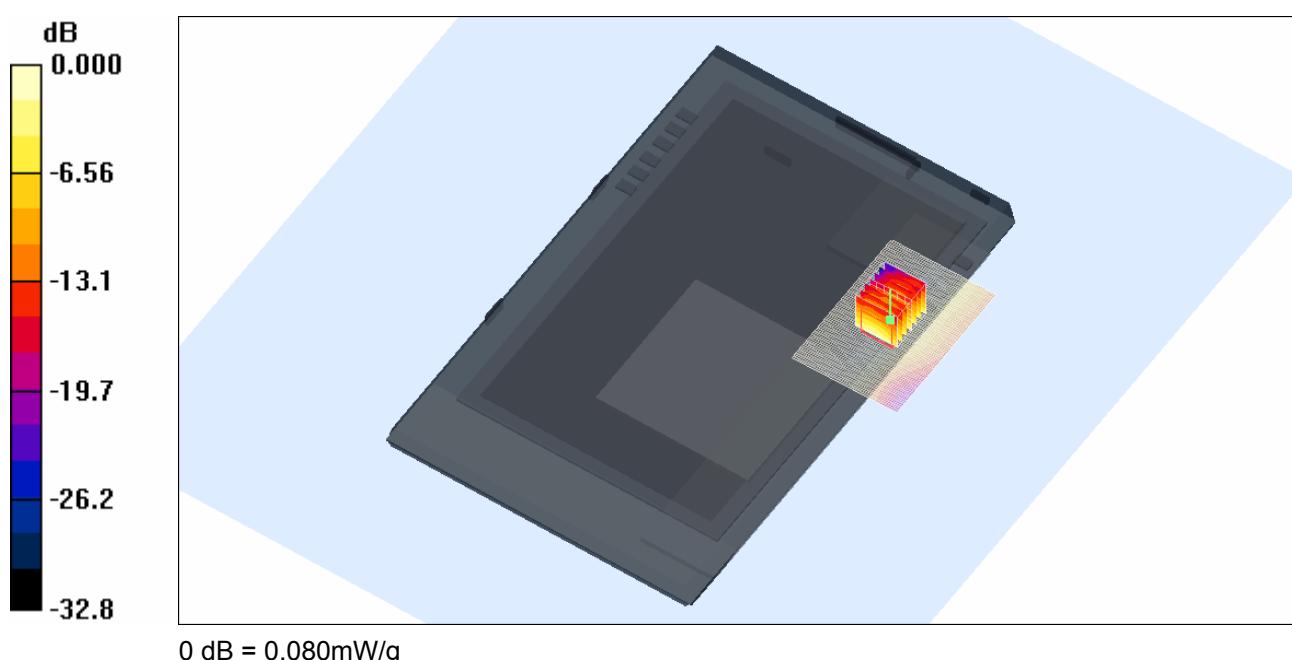

Ambient Temperature

Liquid Temperature

Humidity

20.7 Degrees Celsius

20.5 Degrees Celsius

47.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 08 September 2008**

File Name: Tablet DSSS 2.4 GHz Antenna A 08-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 2436$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: ET3DV6 - SN1380; ConvF(4.18, 4.18, 4.18)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.075 mW/g


**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.30 V/m; Power Drift = 0.238 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.037 mW/g**

Maximum value of SAR (measured) = 0.075 mW/g

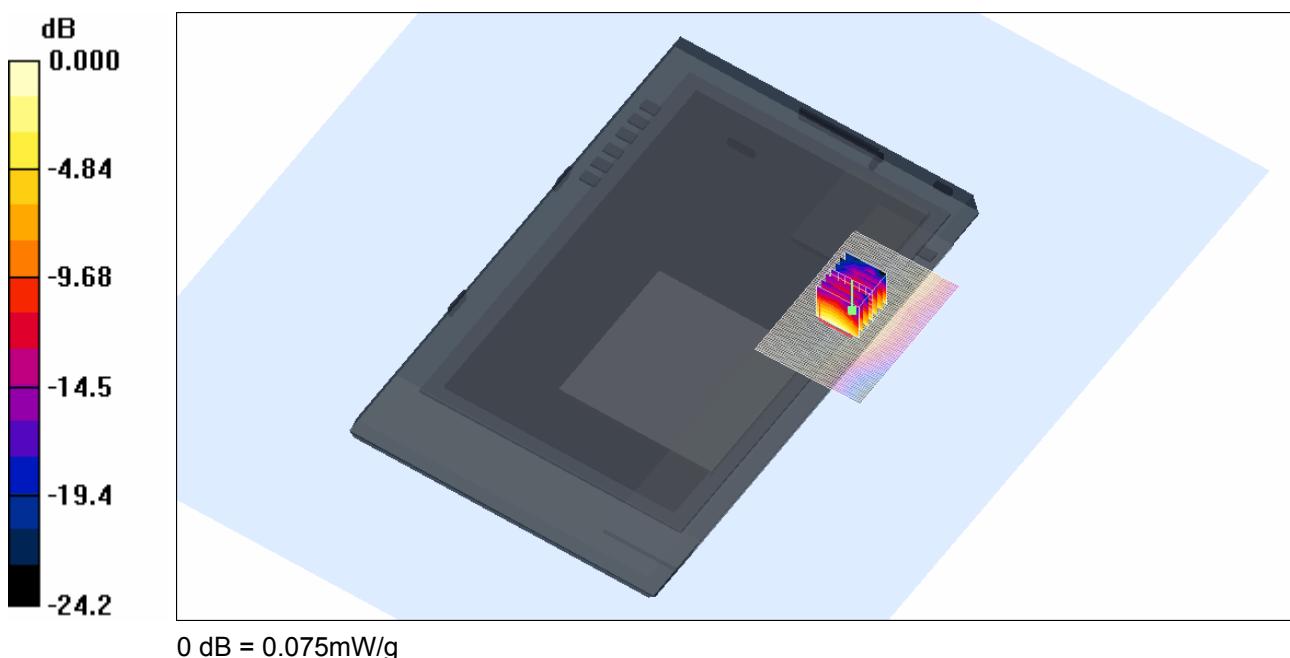

Ambient Temperature

Liquid Temperature

Humidity

20.7 Degrees Celsius

20.5 Degrees Celsius

47.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 08 September 2008**File Name: Tablet DSSS 2.4 GHz Antenna A 08-09-08.da4**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: DSSS 2450 MHz; Frequency: 2462 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.93$  mho/m;  $\epsilon_r = 50.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: ET3DV6 - SN1380; ConvF(4.18, 4.18, 4.18)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 11 Test/Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.075 mW/g


**Channel 11 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.037 mW/g**

Maximum value of SAR (measured) = 0.075 mW/g

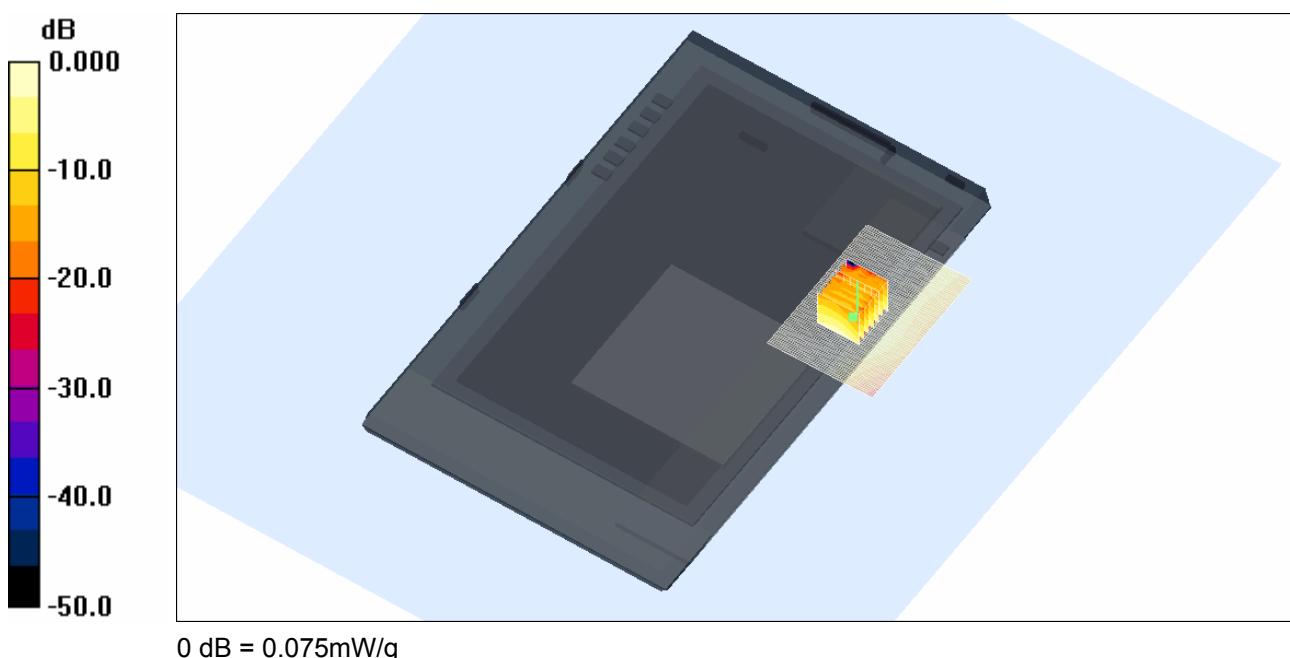

Ambient Temperature  
Liquid Temperature  
Humidity

20.7 Degrees Celsius  
20.5 Degrees Celsius  
47.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 08 September 2008**

File Name: Tablet DSSS 2.4 GHz Antenna B 08-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 2436$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: ET3DV6 - SN1380; ConvF(4.18, 4.18, 4.18)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.063 mW/g


**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.72 V/m; Power Drift = 0.225 dB

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.030 mW/g**

Maximum value of SAR (measured) = 0.062 mW/g

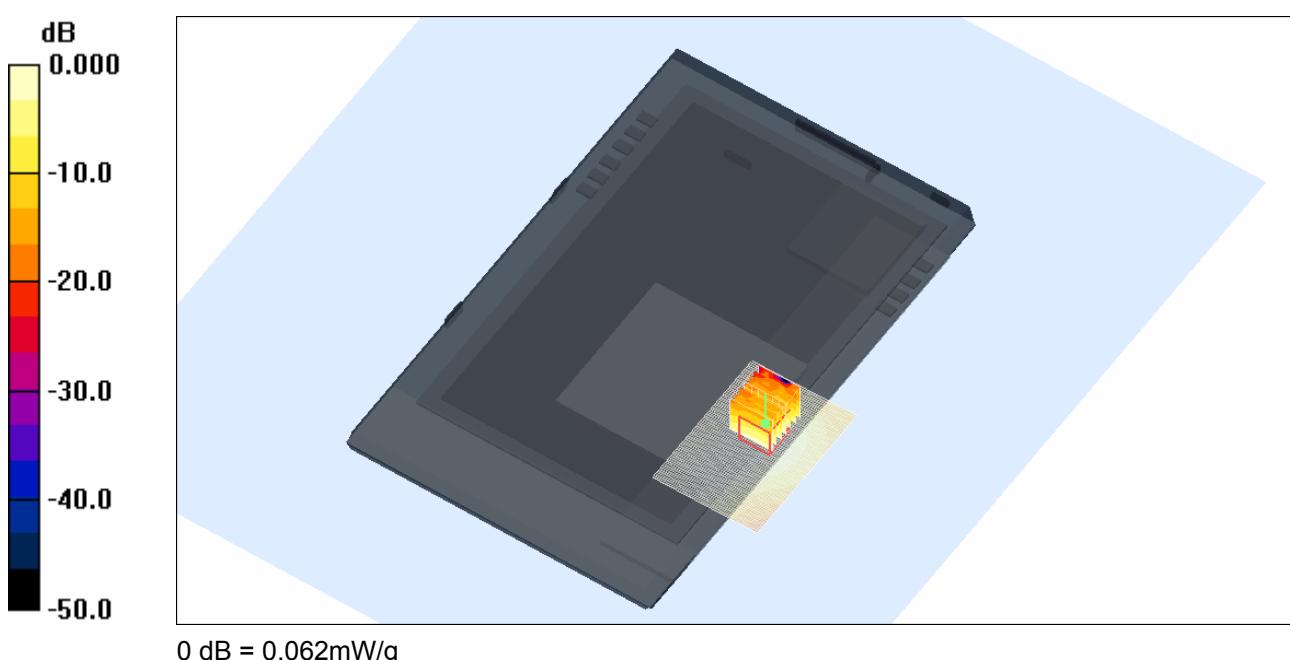

Ambient Temperature

Liquid Temperature

Humidity



20.7 Degrees Celsius

20.5 Degrees Celsius



47.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

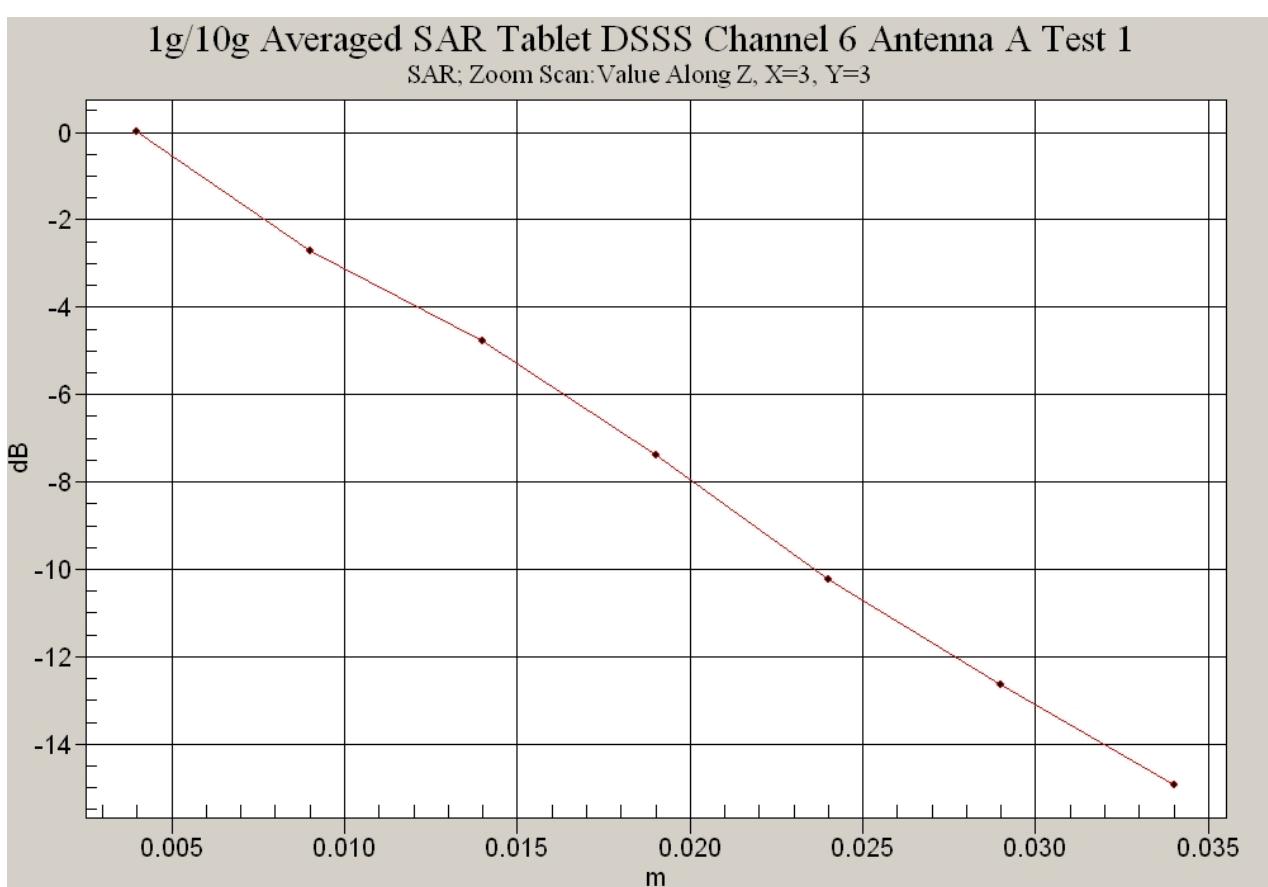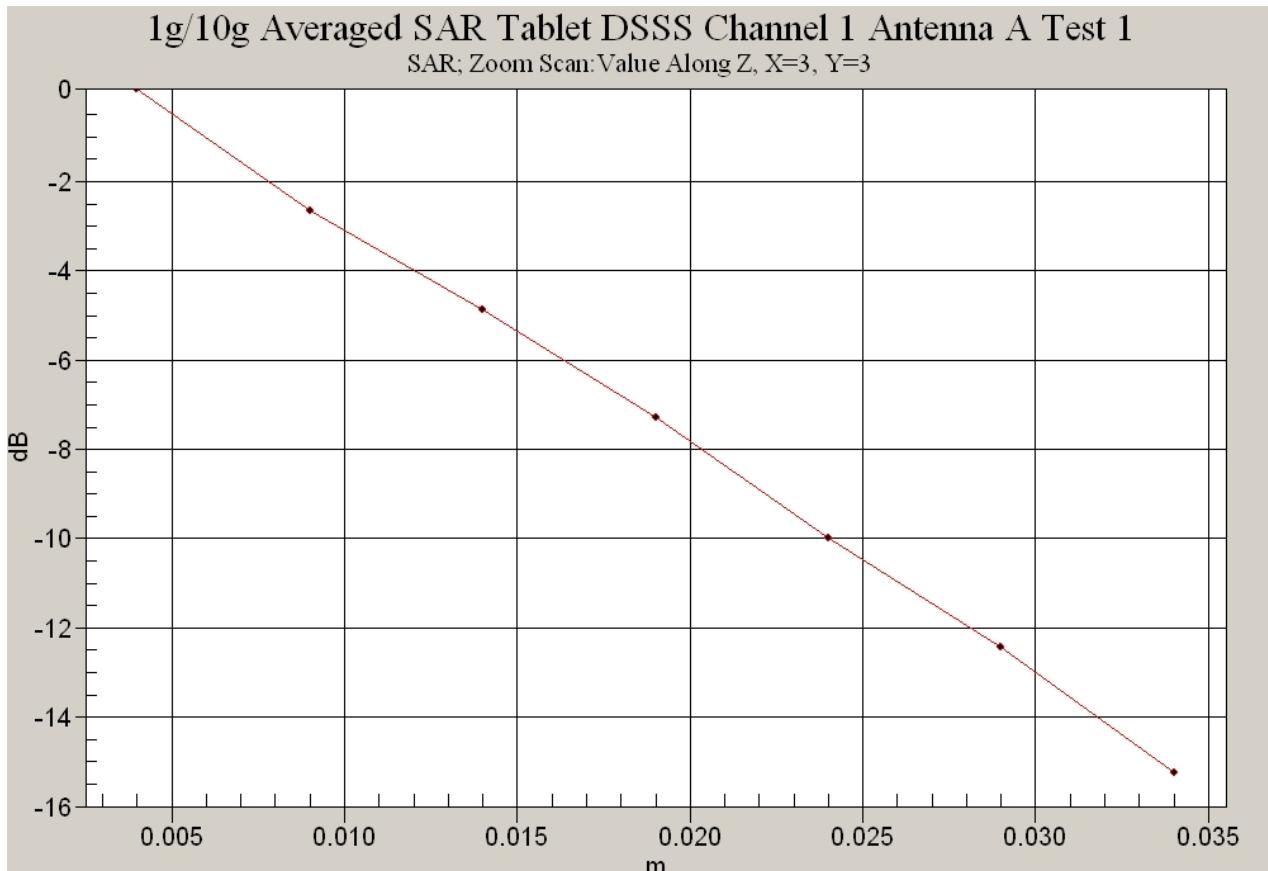

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

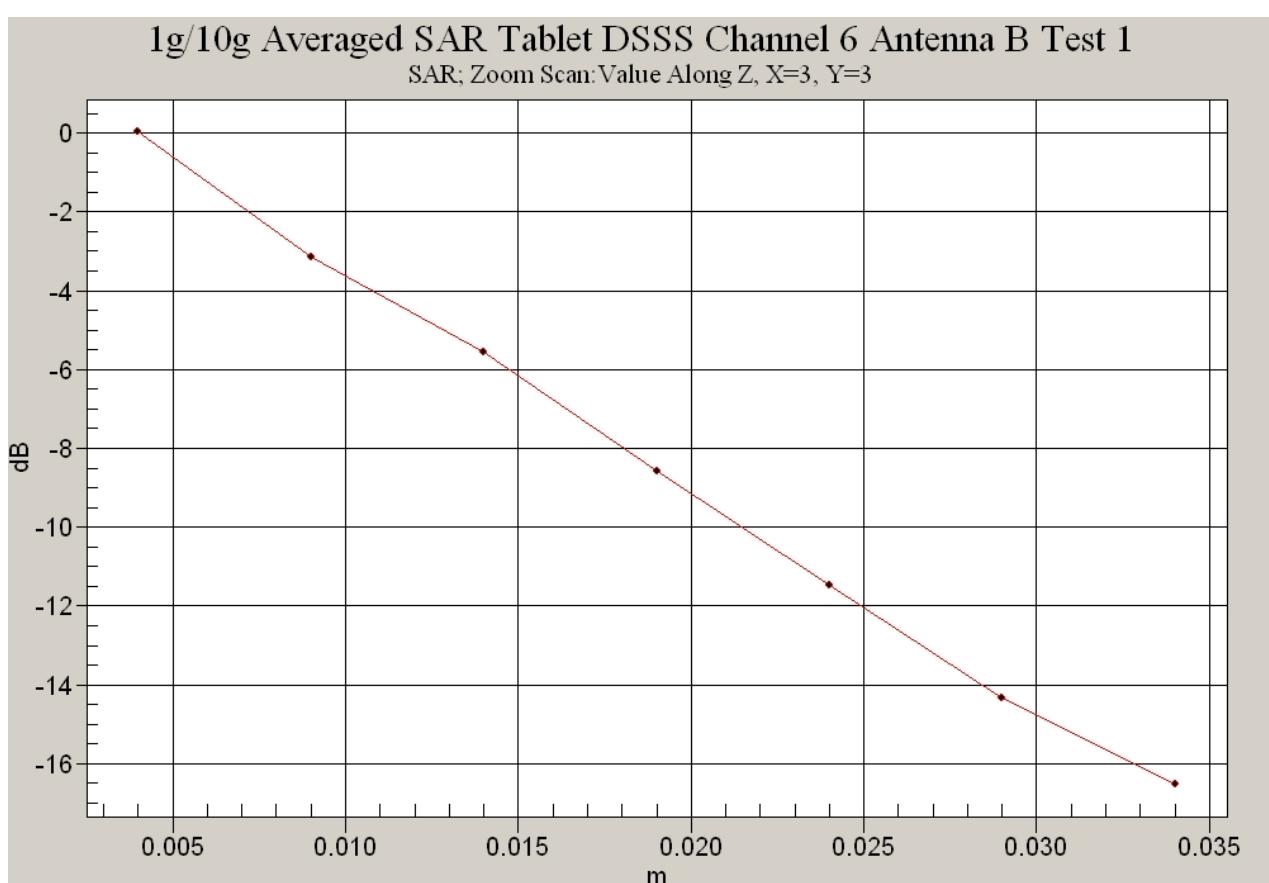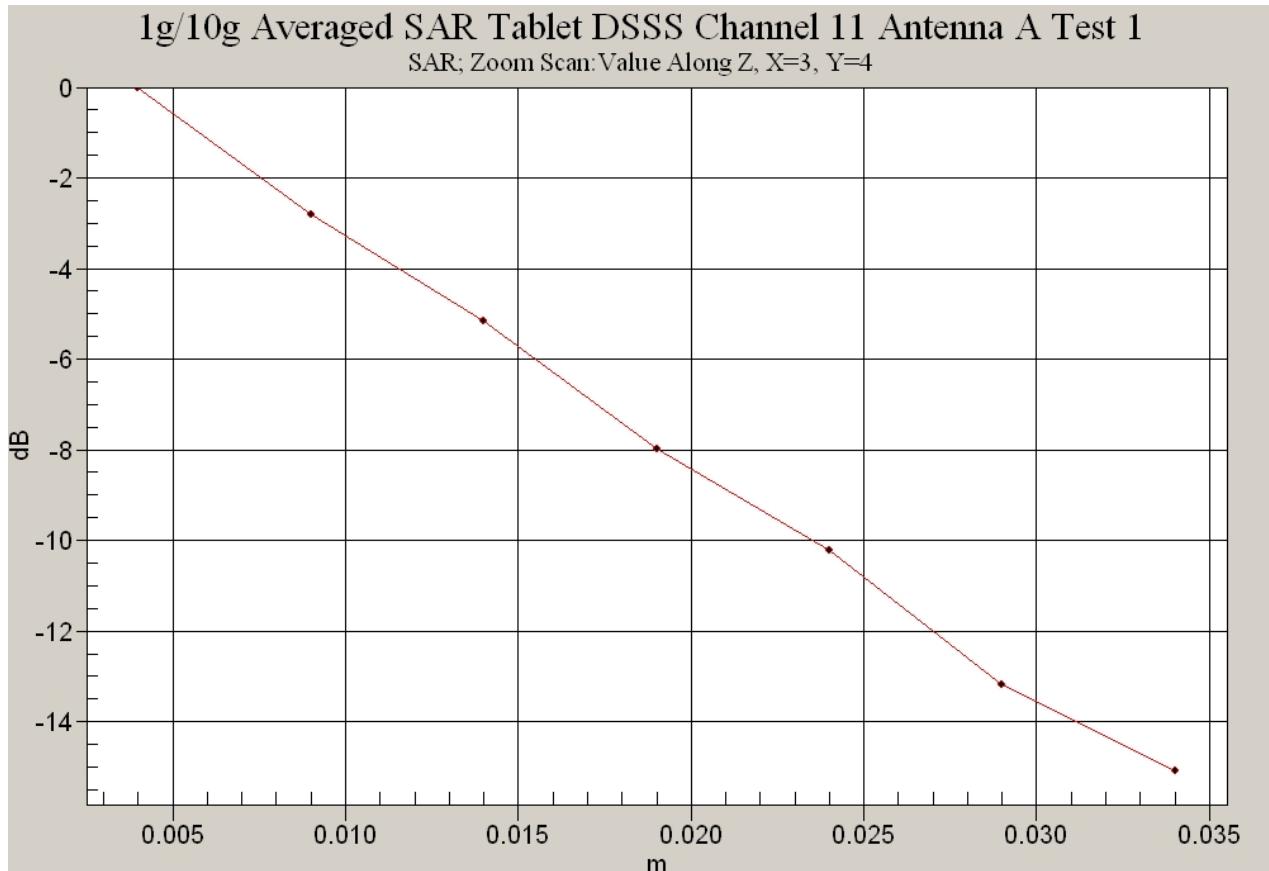

**Test Date: 08 September 2008**

**File Name: Validation 2450 MHz (DAE442 Probe1380) 08-09-08.da4**

**DUT: Dipole 2450 MHz; Type: DV2450V2; Serial: 724**

\* Communication System: CW 2450 MHz; Frequency: 2450 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: ET3DV6 - SN1380; ConvF(4.55, 4.55, 4.55)

- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

**Channel 1 Test/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 18.3 mW/g


**Channel 1 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.1 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 30.0 W/kg

**SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.56 mW/g**

Maximum value of SAR (measured) = 15.4 mW/g

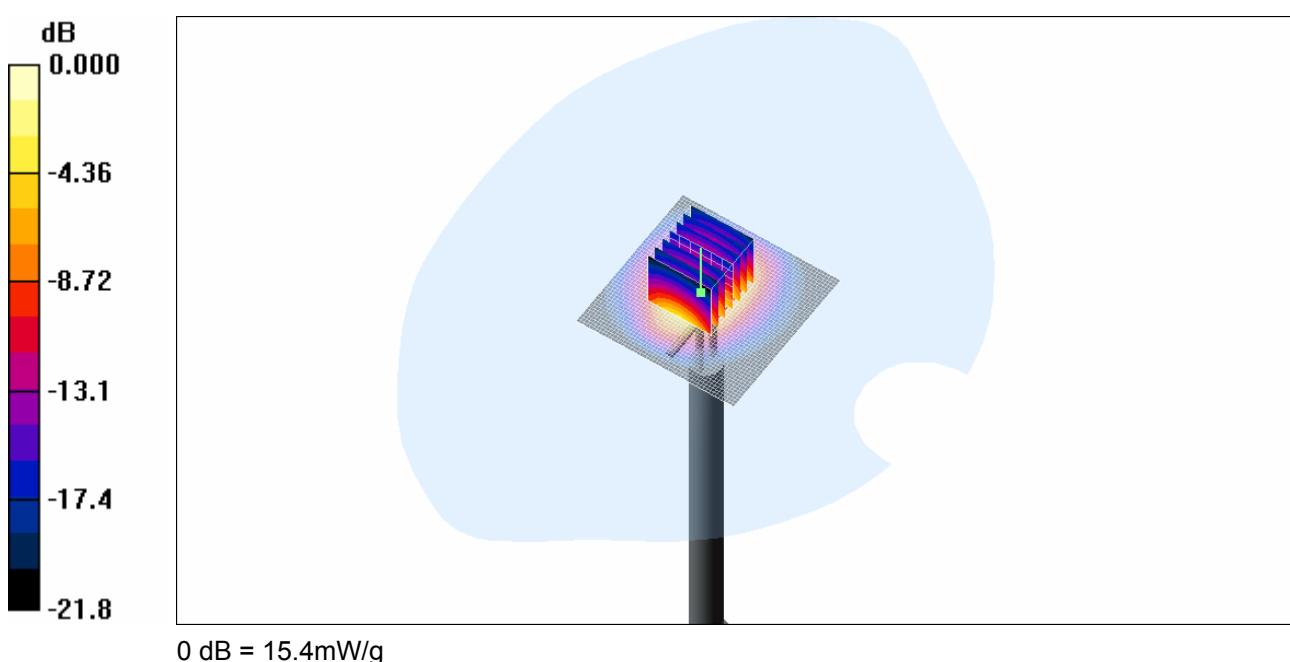

**Ambient Temperature**

**Liquid Temperature**

**Humidity**

**20.7 Degrees Celsius**


**20.5 Degrees Celsius**

**47.0 %**



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

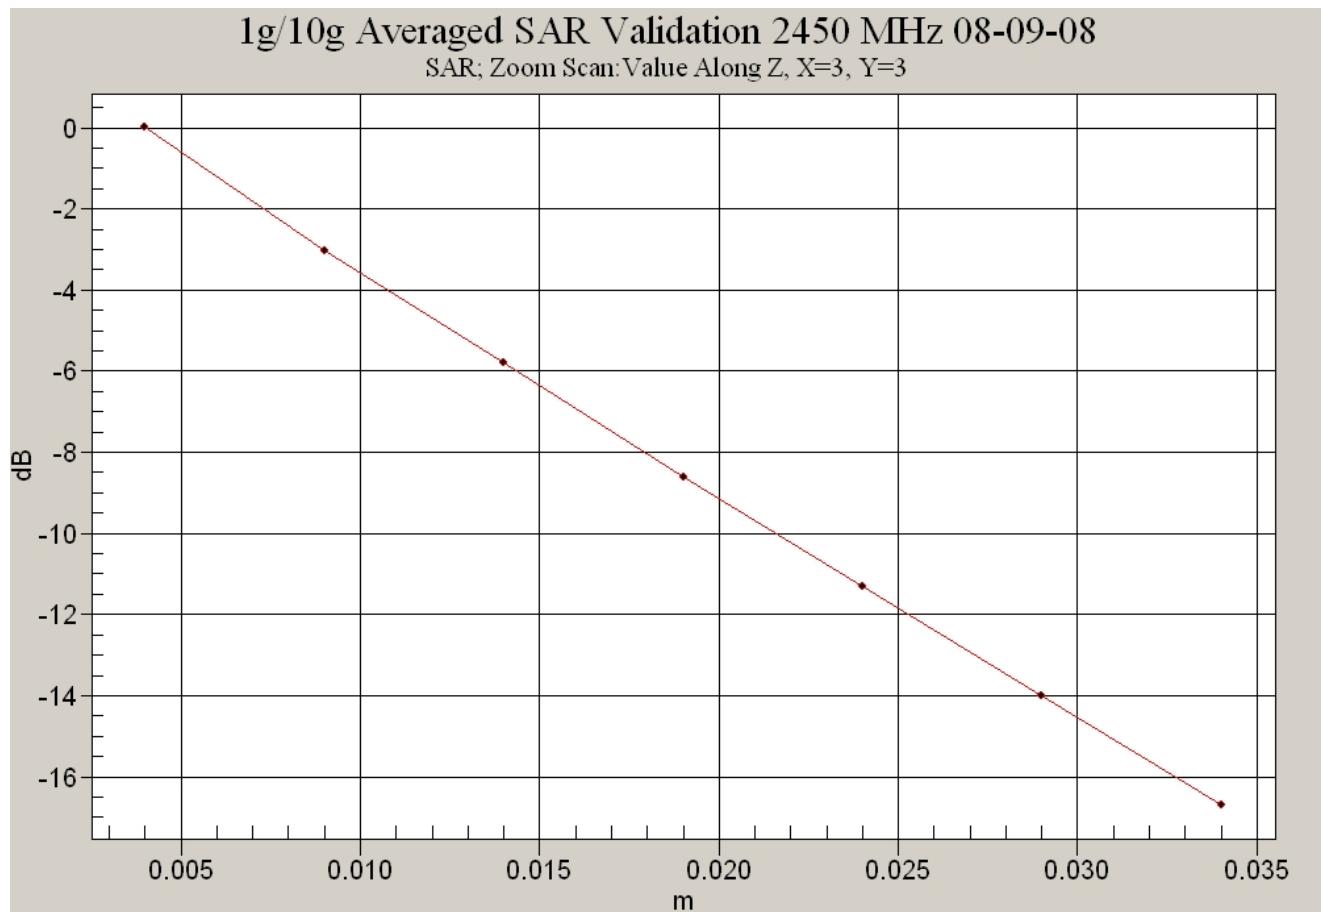

---

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)